




US 20110040589A1

(19) **United States**(12) **Patent Application Publication**
Nielsen et al.(10) **Pub. No.: US 2011/0040589 A1**(43) **Pub. Date: Feb. 17, 2011**(54) **METHODS AND APPARATUS FOR
ASSESSING COMPLEXITY OF LOCATE
REQUEST TICKETS**(75) Inventors: **Steven Nielsen**, North Palm Beach,
FL (US); **Curtis Chambers**, Palm
Beach Gardens, FL (US); **Jeffrey
Farr**, Jupiter, FL (US); **Greg Block**,
Juno Beach, FL (US)Correspondence Address:
FOLEY & LARDNER LLP
111 HUNTINGTON AVENUE, 26TH FLOOR
BOSTON, MA 02199-7610 (US)(73) Assignee: **CertusView Technologies, LLC**,
Palm Beach Gardens, FL (US)(21) Appl. No.: **12/840,461**(22) Filed: **Jul. 21, 2010****Related U.S. Application Data**(63) Continuation of application No. 12/823,028, filed on
Jun. 24, 2010.(60) Provisional application No. 61/220,491, filed on Jun.
25, 2009.(30) **Foreign Application Priority Data**

Jun. 23, 2010 (CA) 2706195

Publication Classification(51) **Int. Cl.**
G06Q 10/00 (2006.01)(52) **U.S. Cl.** **705/7**(57) **ABSTRACT**

Locate and/or marking operations involve detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities. One or more attributes of a locate and/or marking operation requested in a locate request ticket are assessed to provide one or more ticket assessment outcomes. Ticket information is obtained from the locate request ticket and analyzed so as to assign at least one complexity designation to the ticket. The complexity designation(s) is/are transmitted and/or stored so as to facilitate clearing the locate request ticket and/or dispatching a locate technician to perform the locate and/or marking operation.

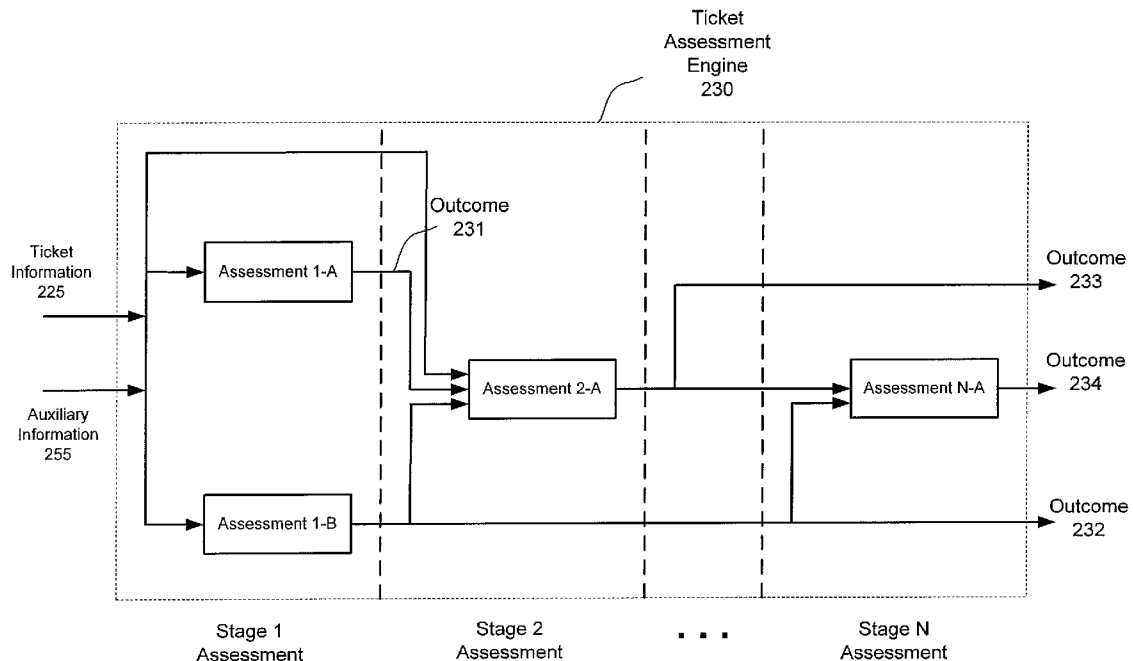

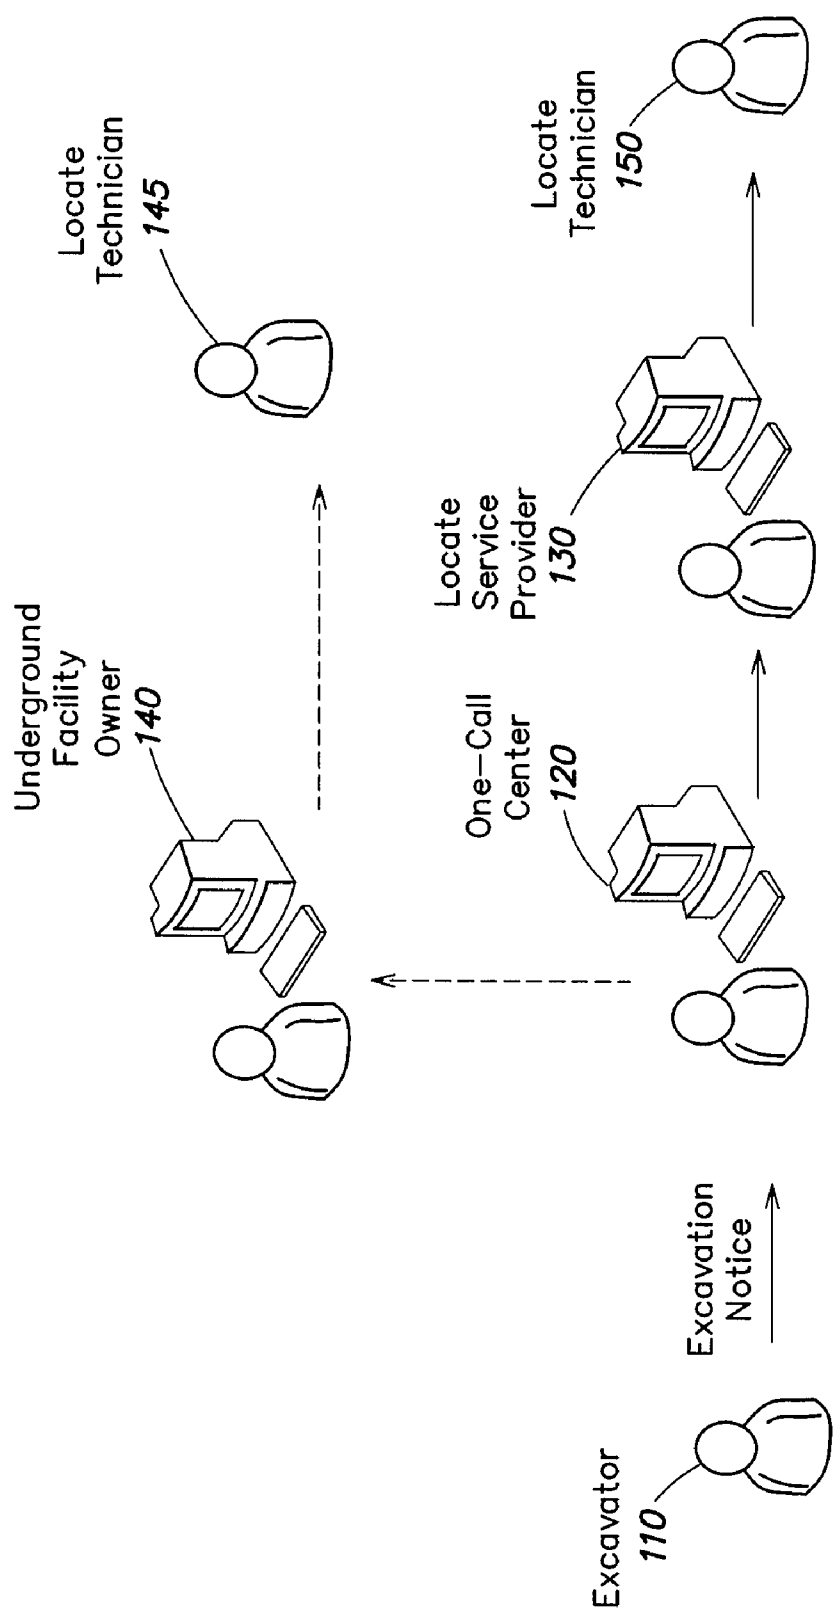


FIG. 1

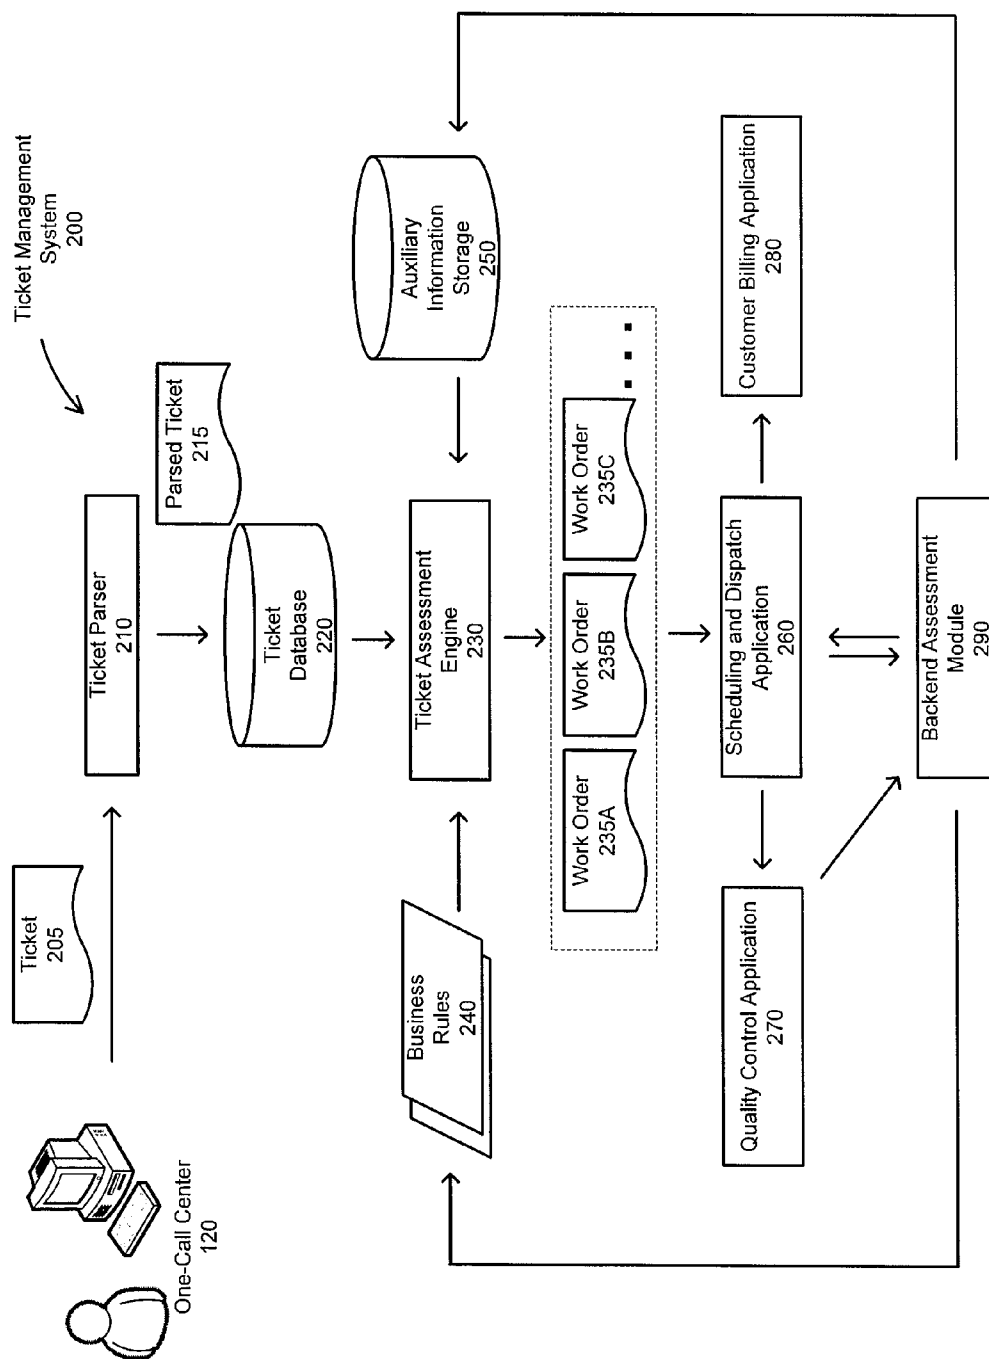


FIG. 2

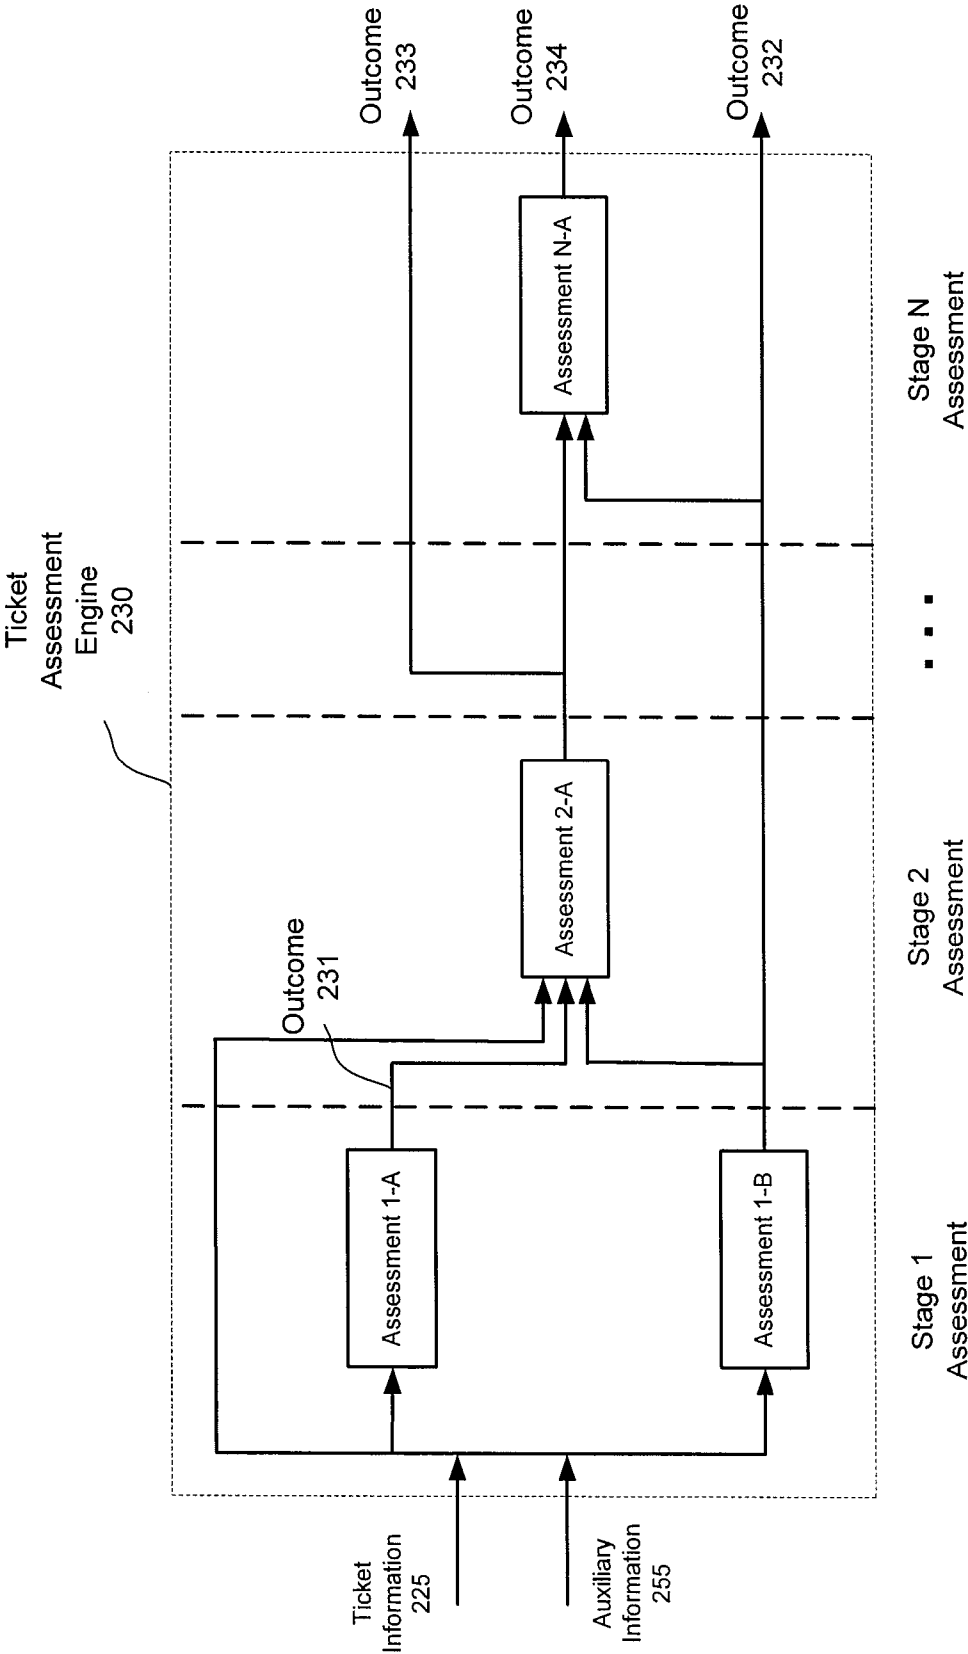


FIG. 2A

Excavation Notice	
KD 00005 POCS 12/31/08 20:19:11 20083771309--000 NEW XCAV RTN	
===== UNDERGROUND UTILITY LINE PROTECTION REQUEST =====	
302	Serial Number--[20083771309] - [000] Channel# -- [2013026] [0313]
	Message Type--[NEW] [EXCAVATION] [ROUTINE]
	County--[BUCKS] 304A Municipality--[BENSALEM TWP]
	Work Site--[100 ST. FRANCIS LN]
	Nearest Intersection--[SMOKY MOUNTAIN HWY]
	Second Intersection--[CHESTNUT HILL]
	Subdivision--[]
	Location Information- Ticket
304B	[MARK PERIMETER OF BUILDING] 300
	Caller Lat/Lon--[]
	Mapped Type--[P] Mapped Lat/Lon--
	[35.67696022/-83.7560695]
306	Map Graphic--[http://www.palcall.org/ViewMap/view.aspx?sn=20083771309]
	Type of Work--[INSTL CONDUIT] Depth--[18-30IN]
	Extent of Excavation--[392FT] Method of Excavation--[DRILL, TRENCHER]
	Street--[] Sidewalk--[] Pub Prop--[] Pvt Prop--[x] Other--[]
308	Lawful Start Dates--[06-Jan-09 Through 15-Jan-09]
	Scheduled Excavation Date--[06-Jan-09] Dig Time--[0700] Duration--[3 DAYS]
	Response Due Date--[05-Jan-09]
	Caller--[ANDREW JONES] Phone--[732-690-8274] Ext--[]
	Excavator--[JACK SMITH CONSTRUCTION] Homeowner/Business--[B]
	Address--[17 WILLOW RD]
	City--[PALMER] 310 State--[PA] Zip--[18045]
	Fax--[610-258-9238] Email--[JACKSMITHLLC@YAHOO.COM]
	Work Being Done For--[VERIZON FTTP AND INFRASOURCE]
	Person to Contact--[ANDREW JONES] Phone--[732-690-8274] Ext--[]
	Best Time to Call--[ANYTIME]
	Prepared--[Dec31-08] at [2019] by [JANE DOE] 312
	Job Number--[8A37020-002]
	Remarks--
	[] 314
	FP 0 FP =W&SA
	KC 0 KC =PECO PLMG
	KD 0 KD=TWNSND WRTR
	XZ 0 XZ =COMCAST CABLE B
	Serial Number--[20083771309]-[000]

FIG. 3

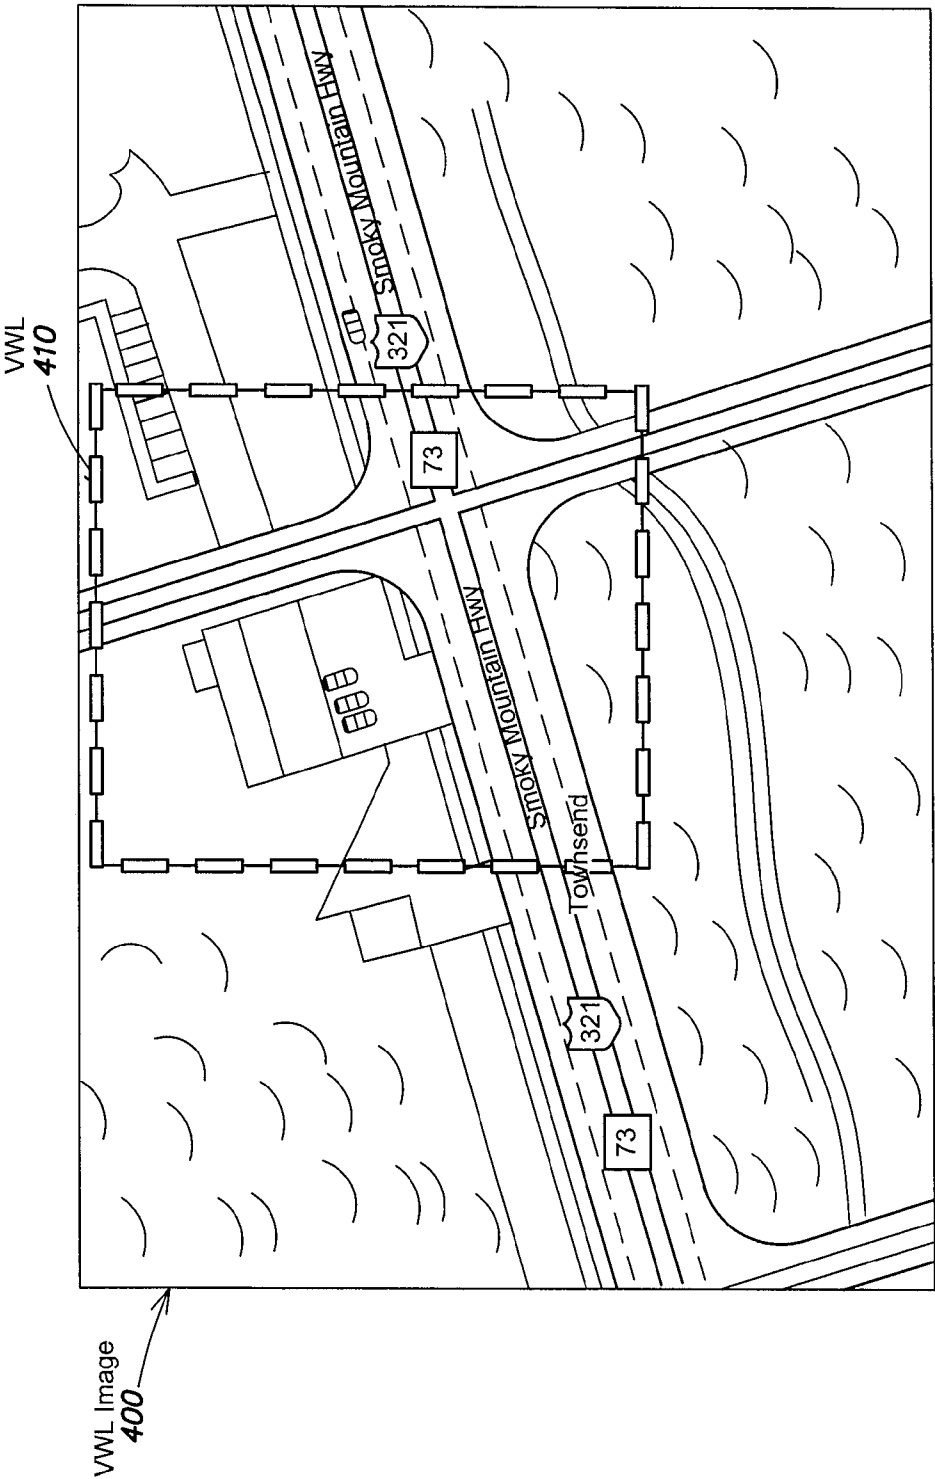
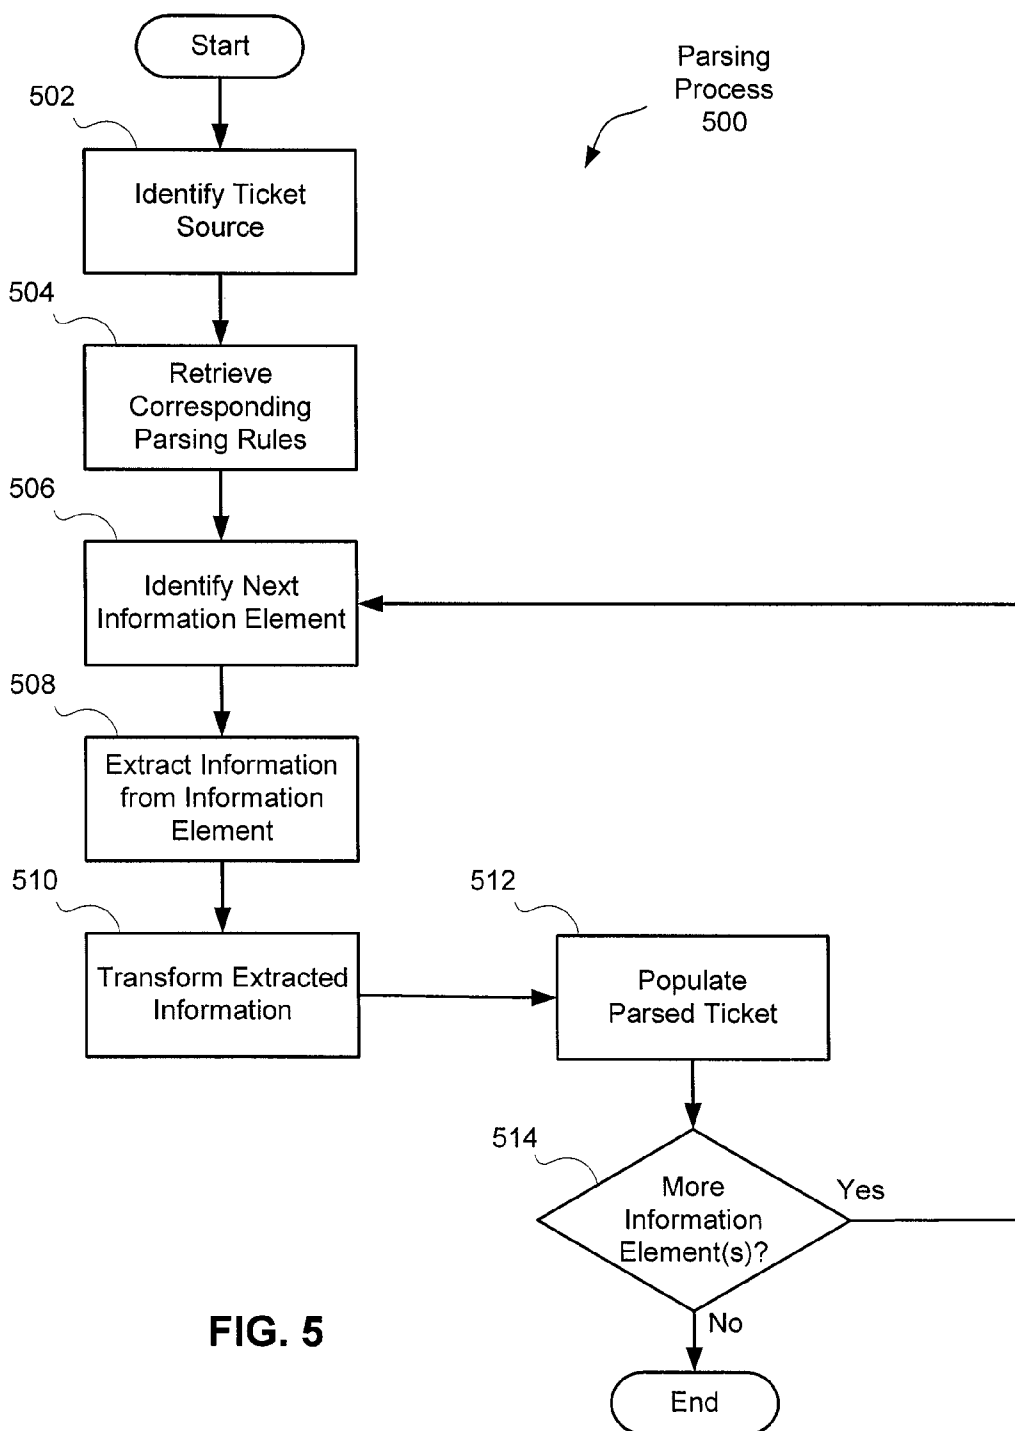


FIG. 4



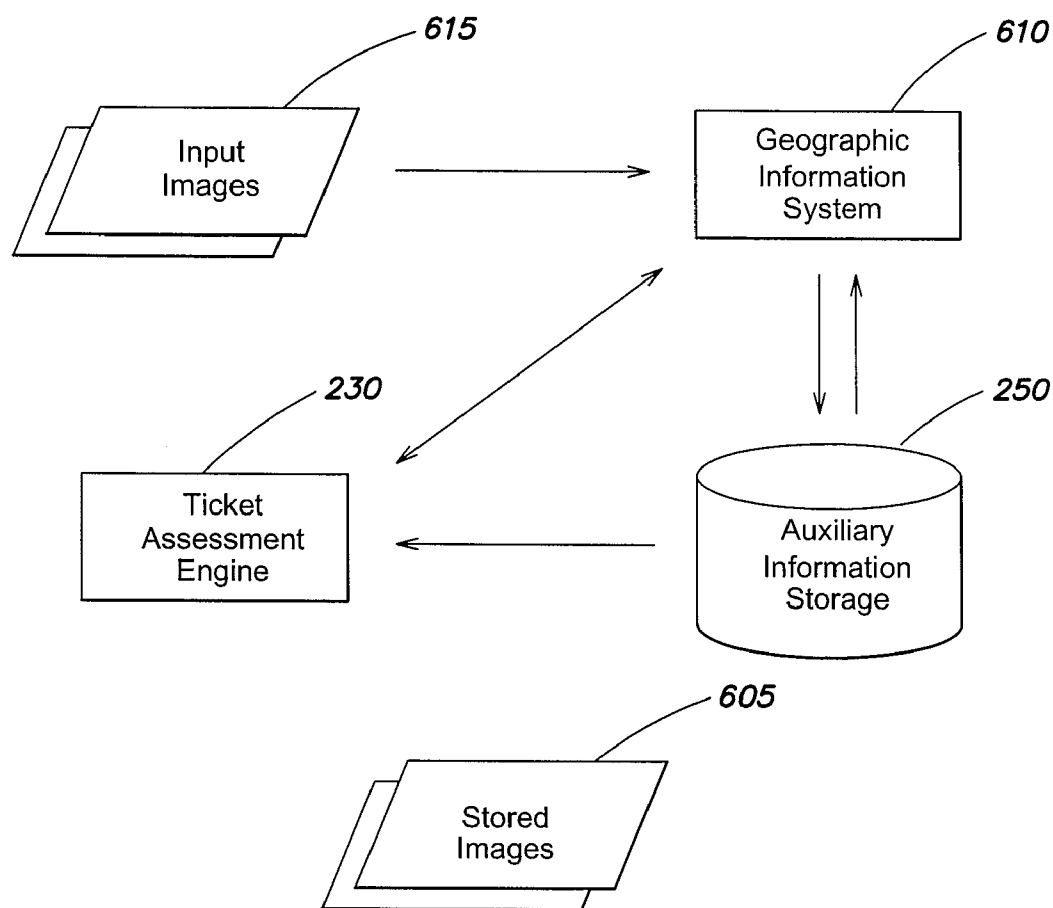


FIG. 6

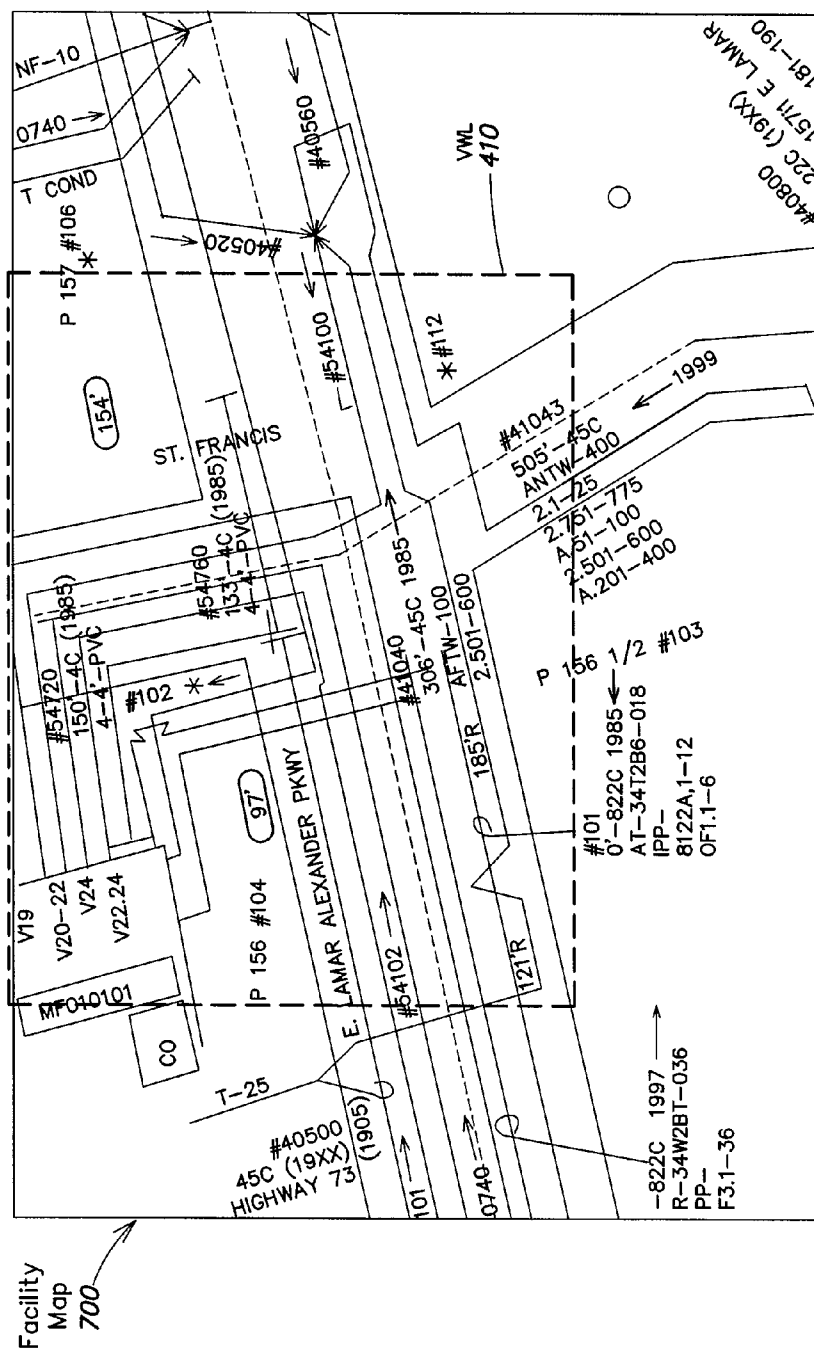
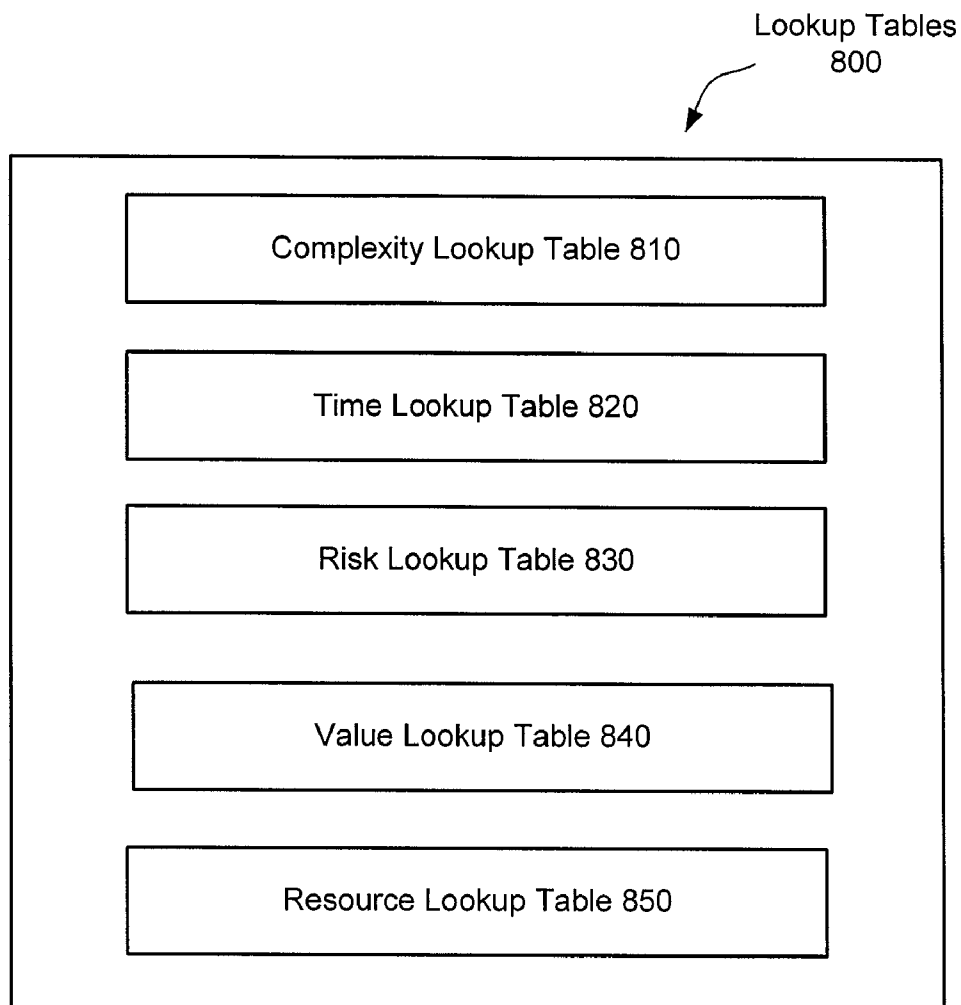


FIG. 7

**FIG. 8**

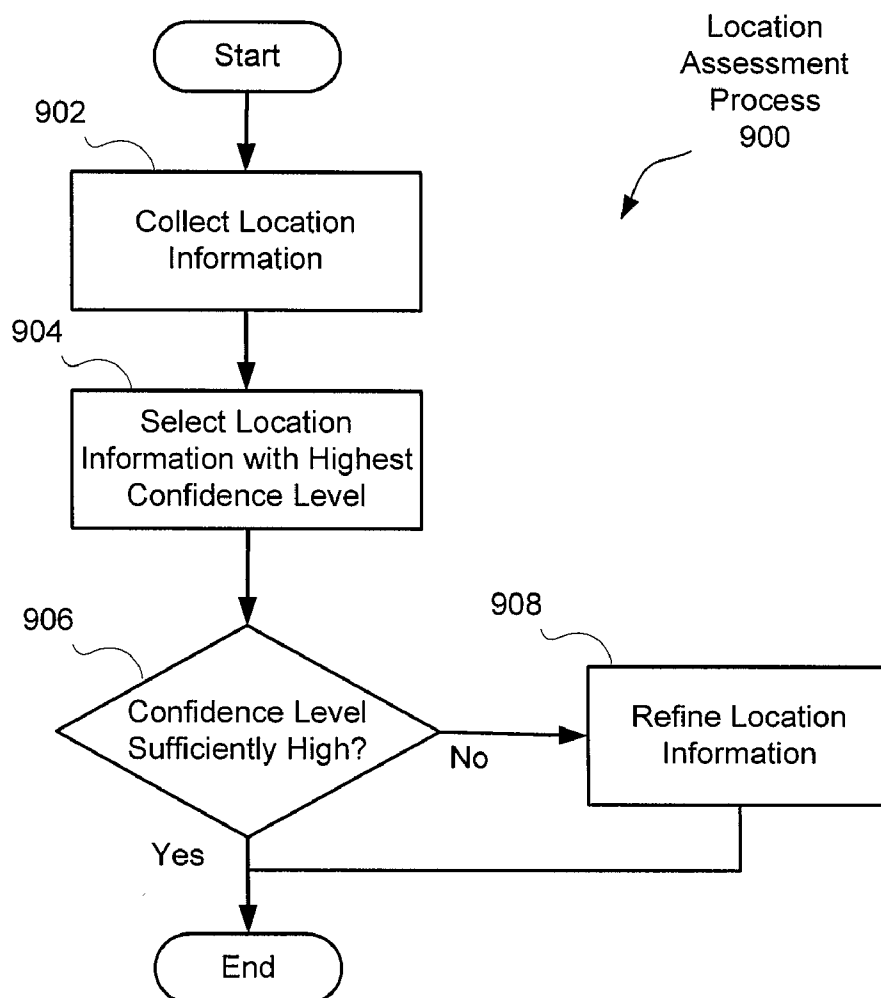


FIG. 9

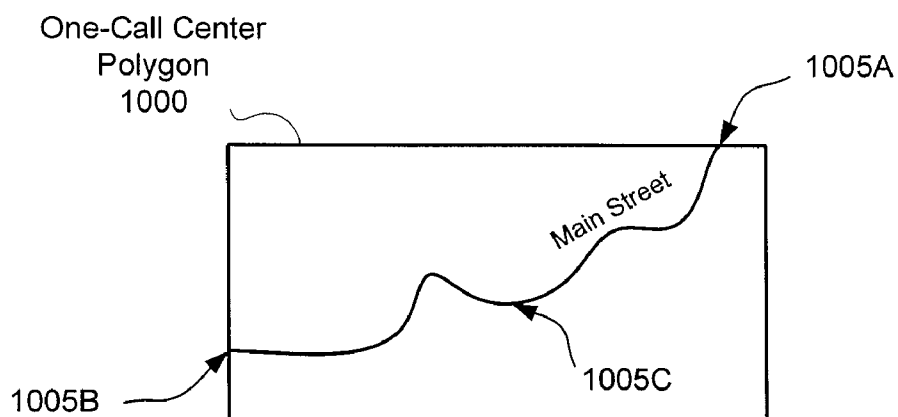
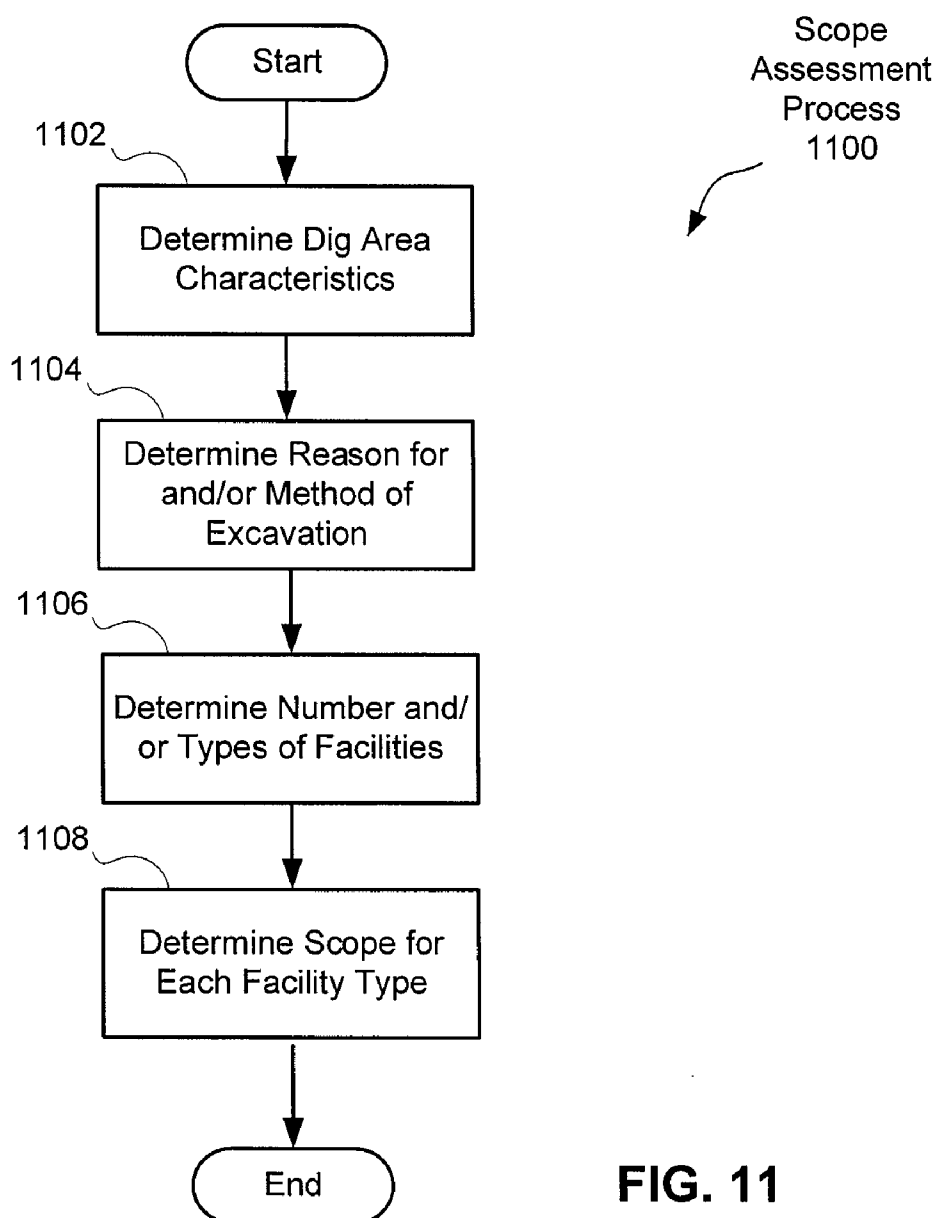


FIG. 10

**FIG. 11**

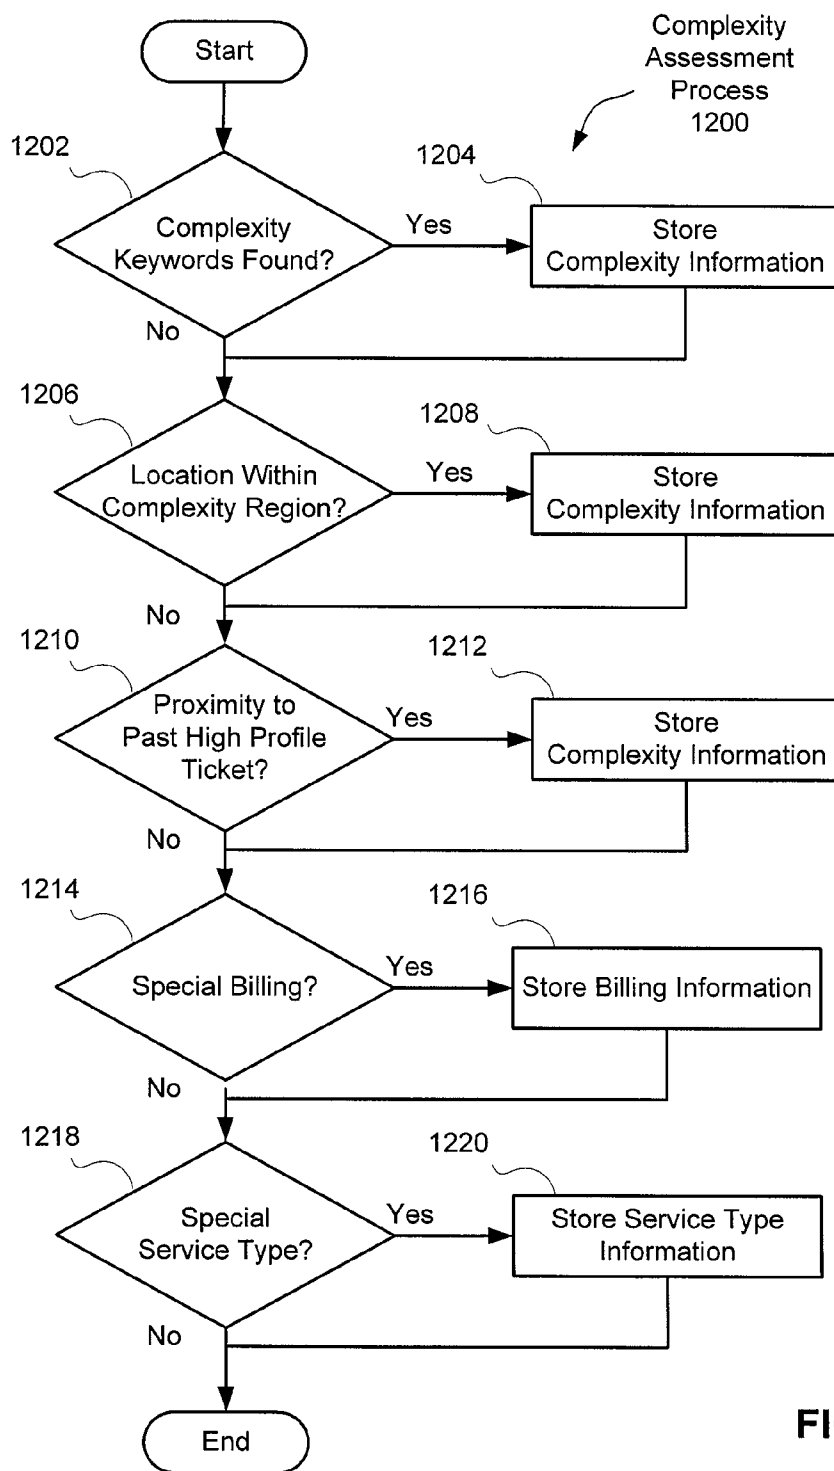
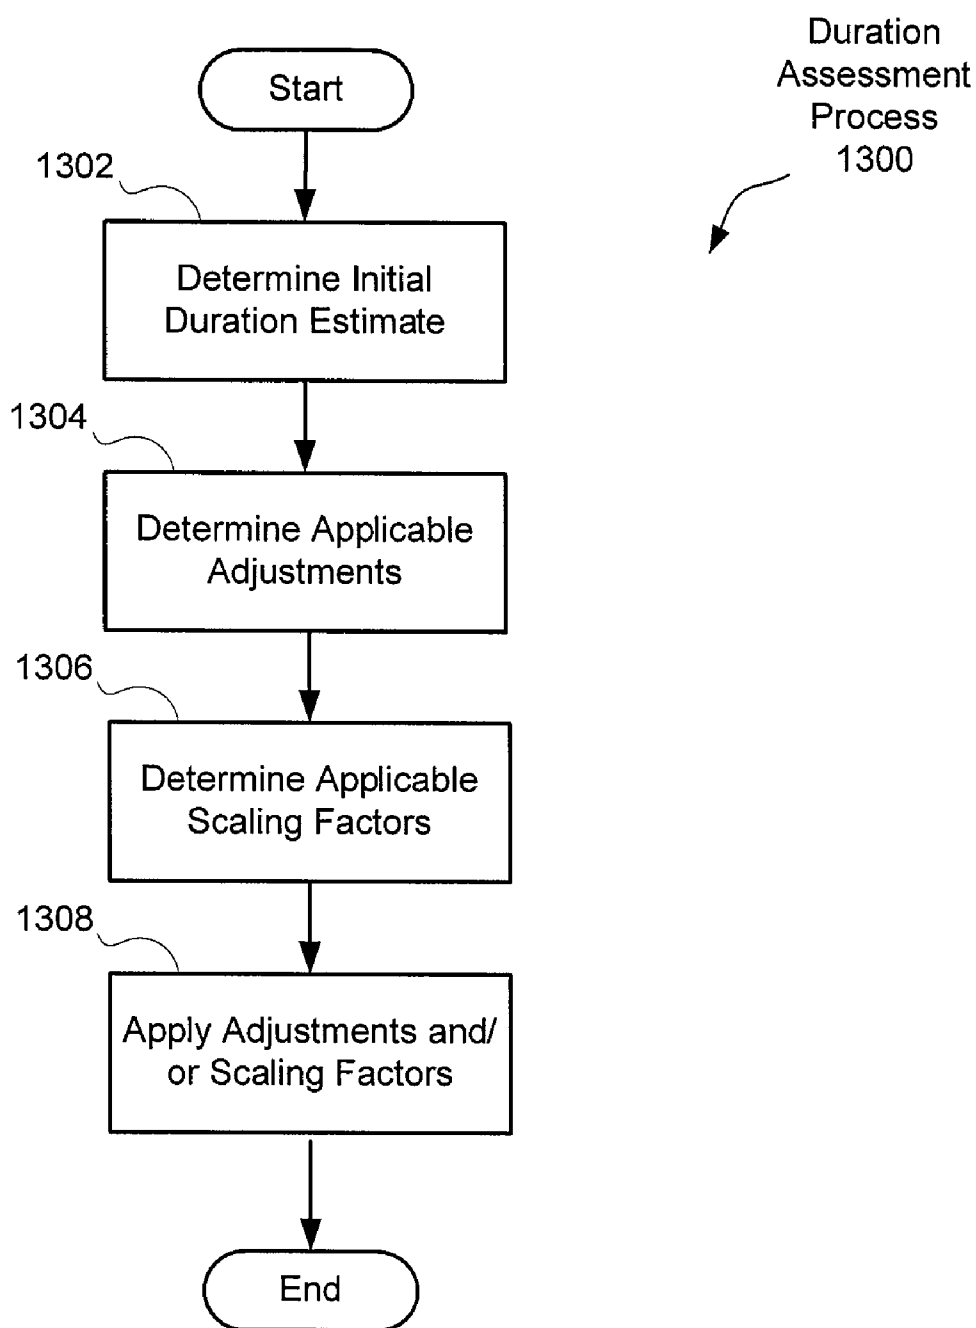


FIG. 12

**FIG. 13**

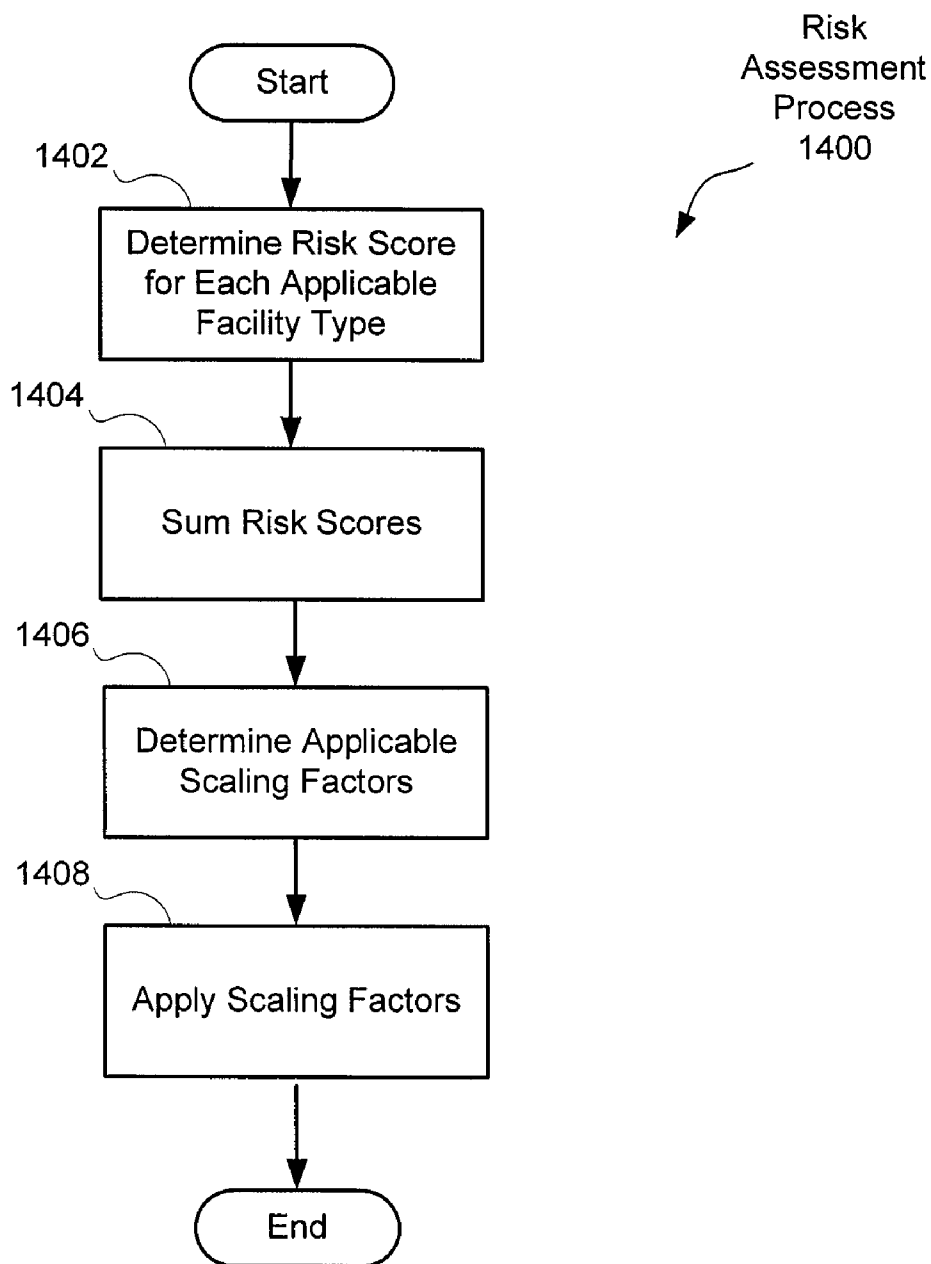


FIG. 14

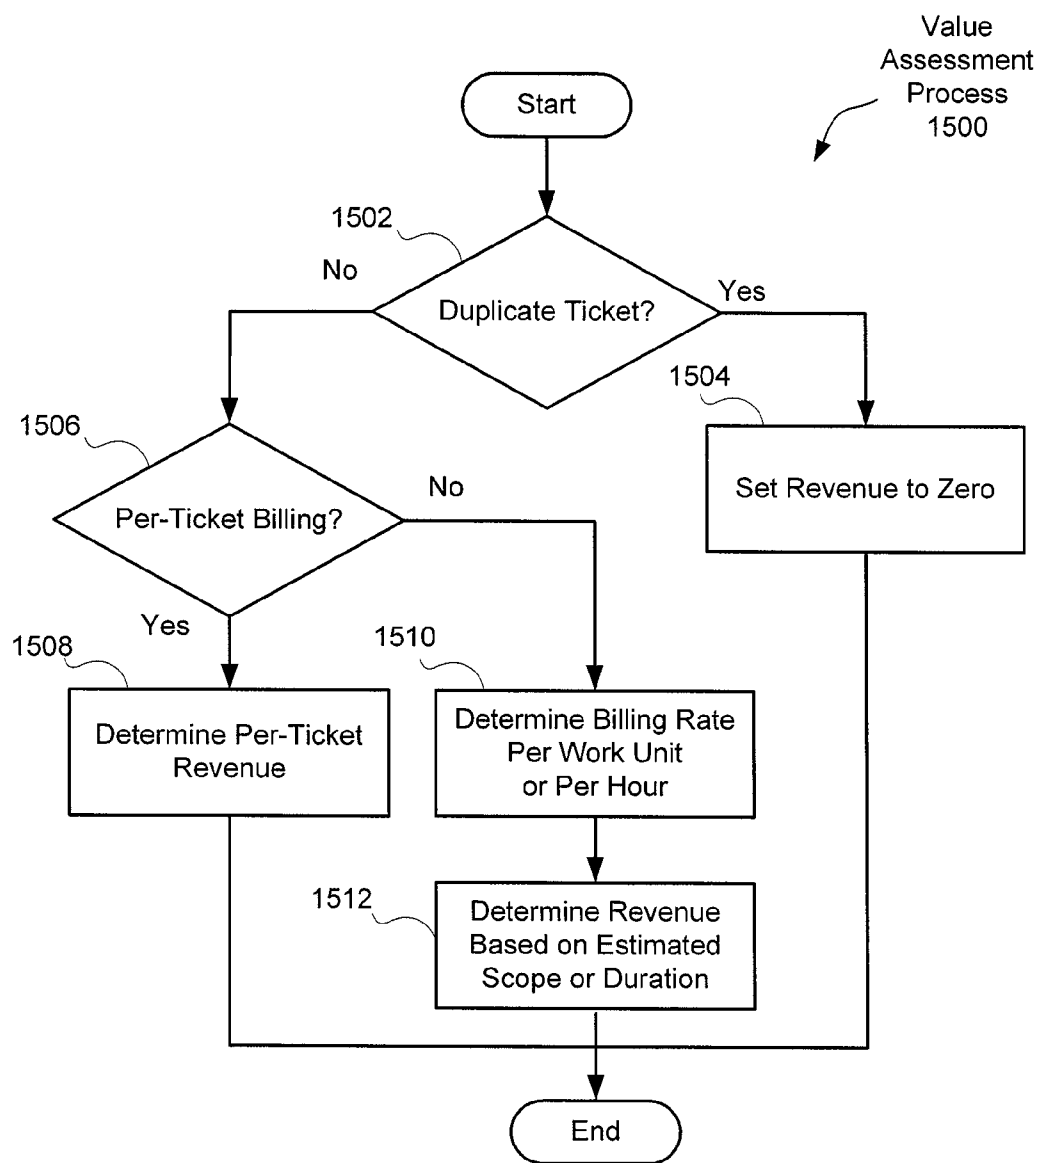
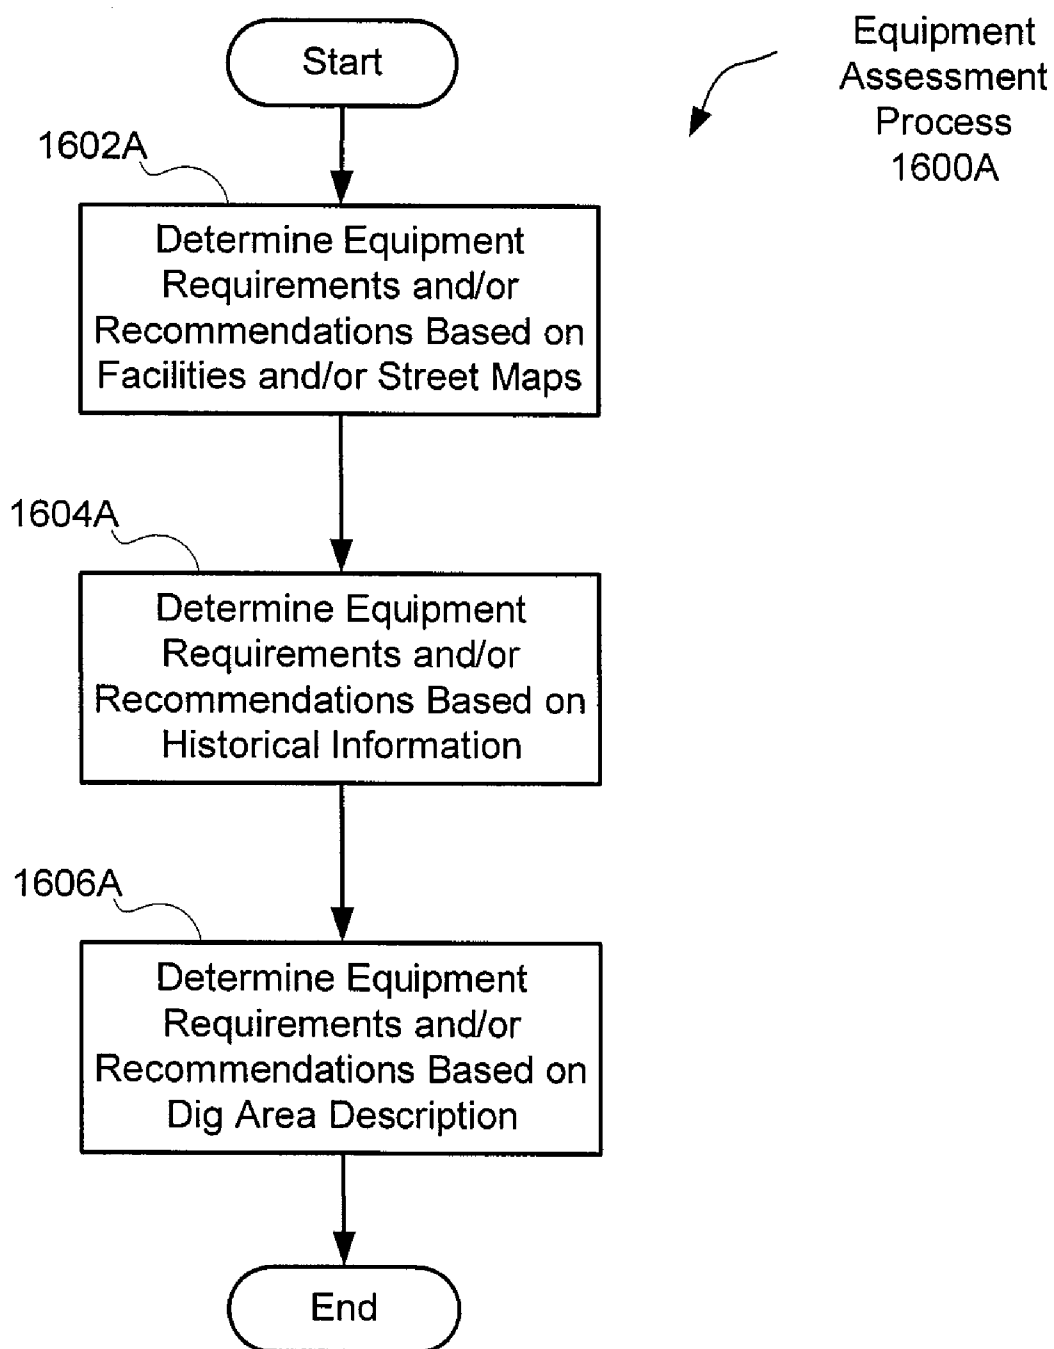
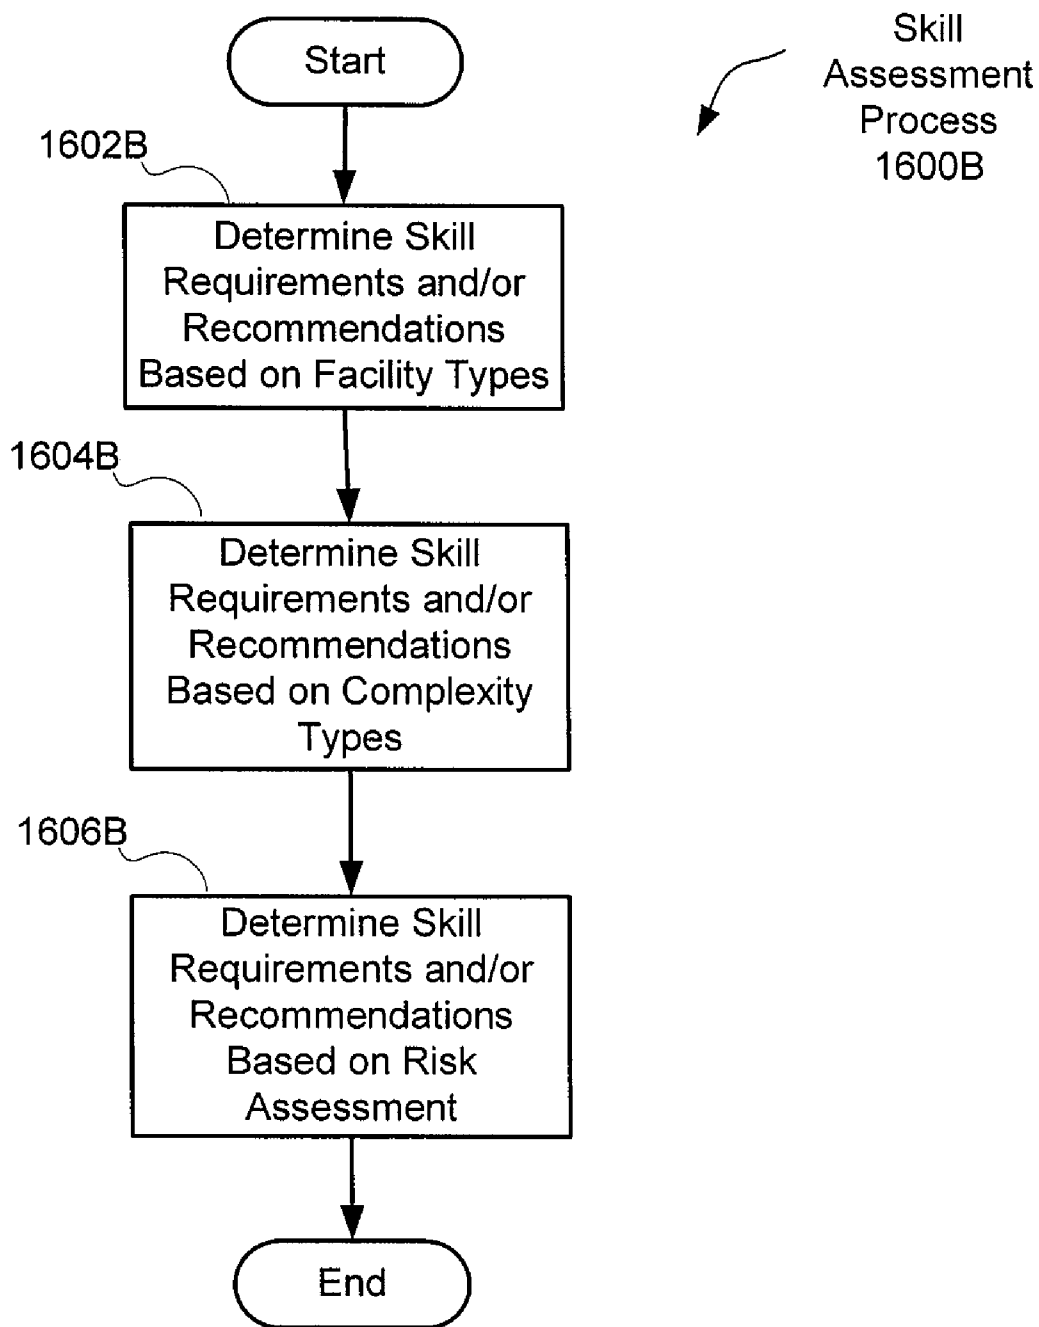


FIG. 15

**FIG. 16A**

**FIG. 16B**

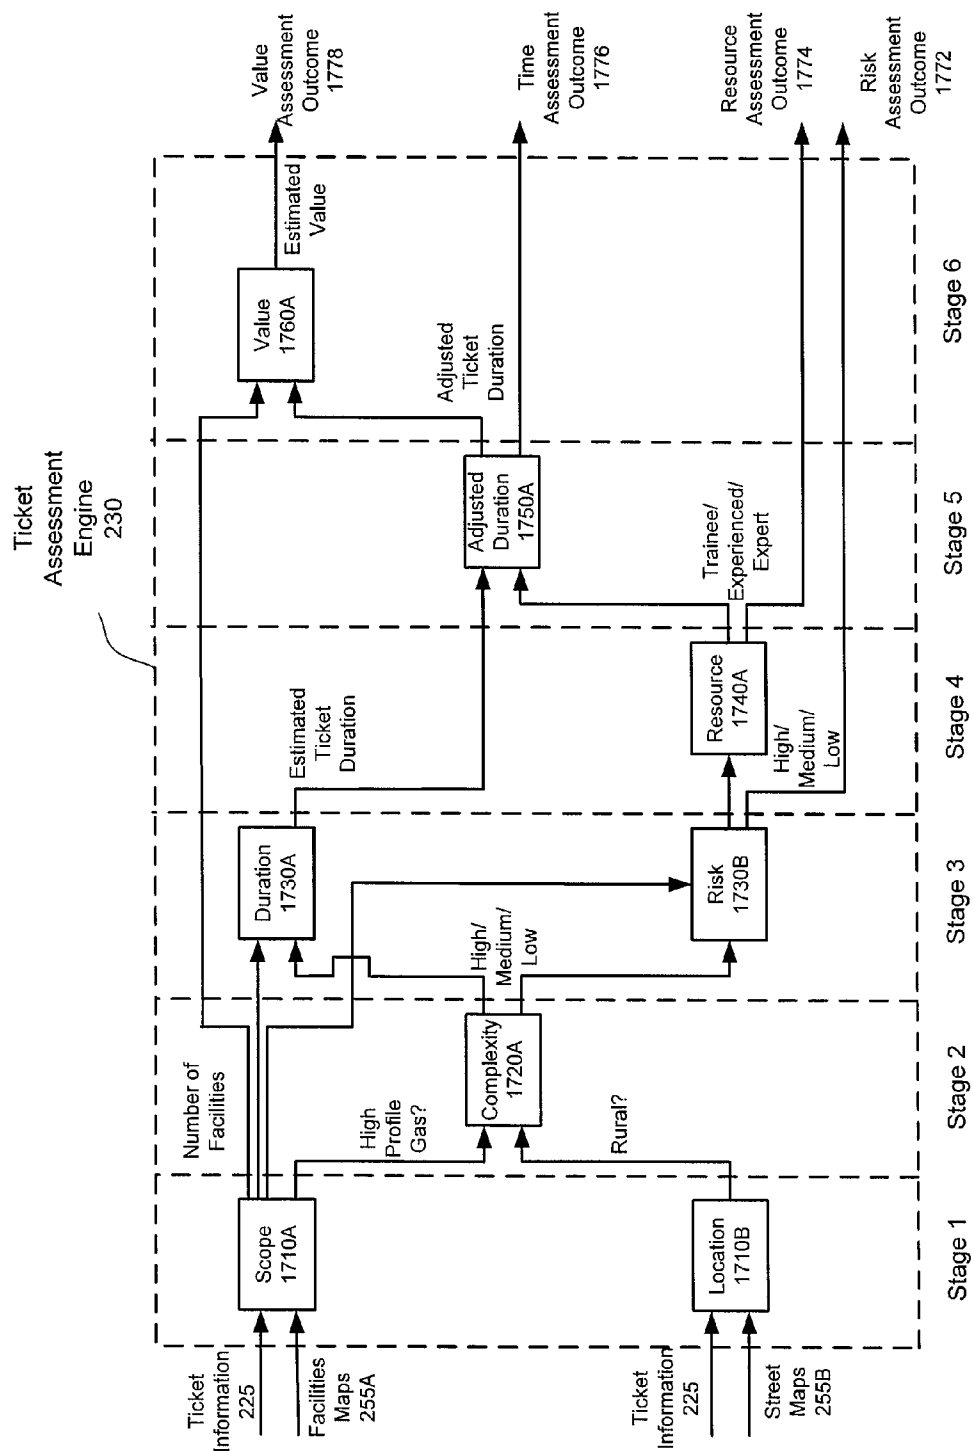


FIG. 17

Work Order
1800

1812 Work Order

Work Order Id: 28955

Ticket Number: 20083771309-000

Scheduled Work Begin Date/Time 04-Jan-2009 9:00AM

Expected Duration: 1 Hour

Due Date: 05-Jan-2009

Type: Utility Locate

Priority: 3-ROUTINE

Dispatch Address: 1804

Address1: 100 ST. FRANCIS LN

Address2:

Address3:

City: Townsend State: TN Zip: 37882

Nearest Intersection: SMOKY MOUNTAIN HWY

Second Intersection: [CHESTNUT HILL]

Excavation Information: 1806

Work Being Done For: VERIZON FTTP AND INFRASOURCE

Project Type:

Type of Work: INSTL CONDUIT Depth 18-30IN

Extent: 392FT Method: DRILL, TRENCHER

Street--[] Sidewalk--[] Pub Prop--[] Pvt Prop--[x] Other--[]

Excavator Information: 1810

Name: JACK SMITH CONSTRUCTION Homeowner/Business--[B]

Address: 17 WILLOW RD

City: TOWNSEND State: TN Zip: 37882

FAX #: 610-258-9238 Email: JACKSMITHLLC@YAHOO.COM

Site Information-

From Address1: 110 ST FRANCIS LN To Address1:

From Address2: To Address2:

From Address3: To Address3:

City: State: TN Zip: 37882

Subdivision Name: Site Marked in White--[Y]

FIG. 18A
FIG. 18B

A B

FIG. 18A

A

B

Locate Instructions:
[MARK PERIMETER OF BUILDING]

Caller Information:


Name:	ANDREW JONES	Phone: 732-690-8274 Ext:
Contact:	ANDREW JONES	Phone: 732-690-8274 Ext:
Best Time to Call:	ANYTIME	

Remarks--
[]

Work Order Task

0001	Utility Locate	Gas
0002	Utility Locate	Electric
0003	Utility Locate	CATV

FIG. 18B

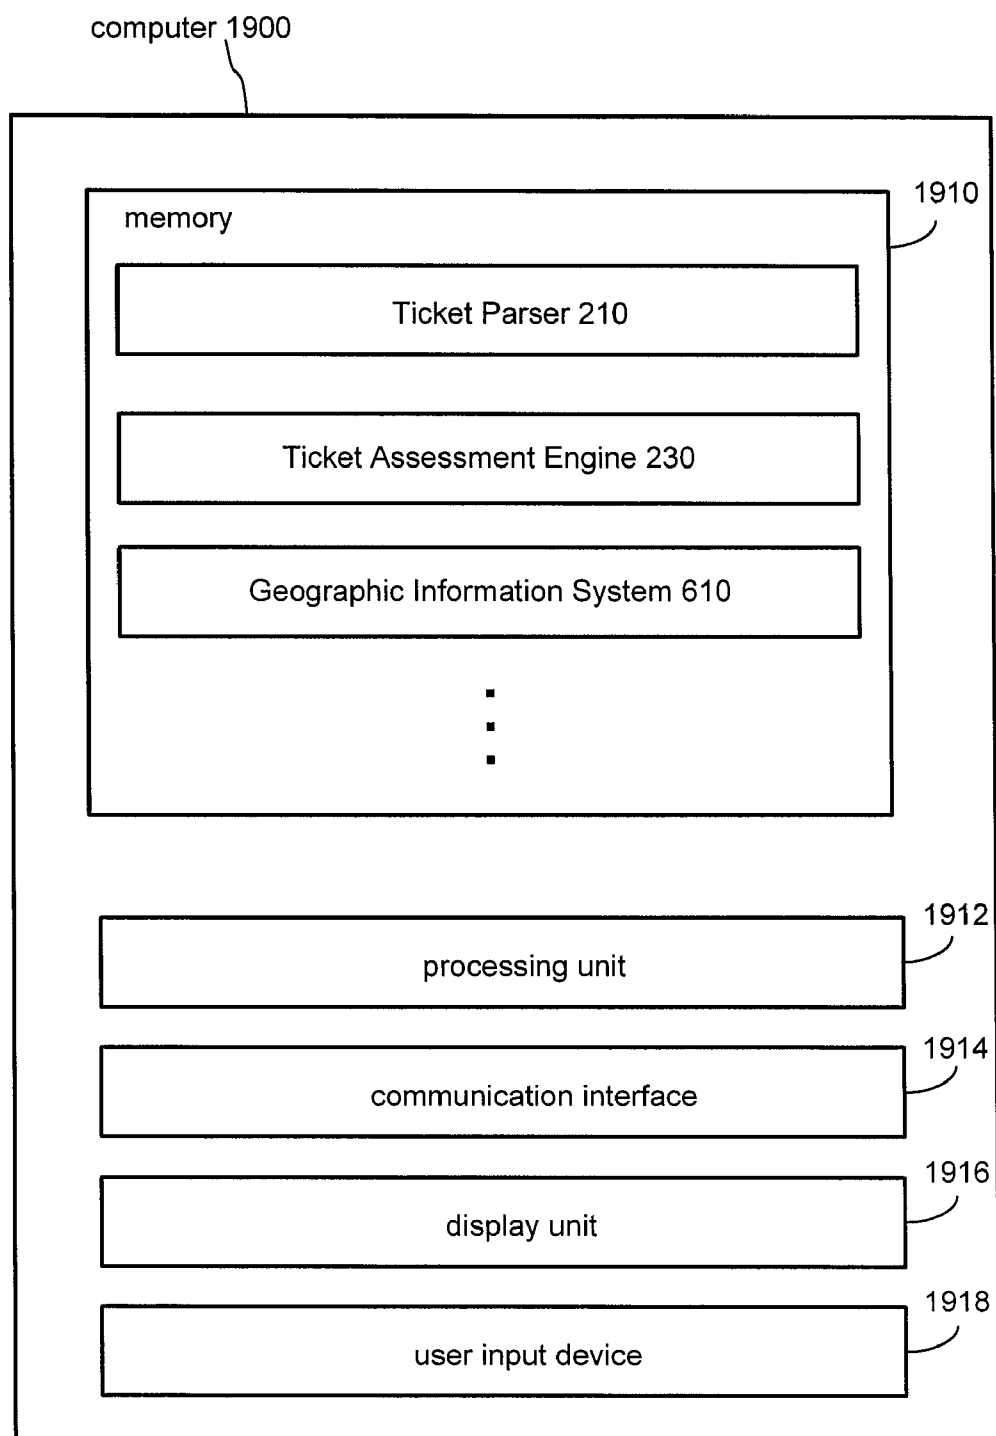**FIG. 19**

METHODS AND APPARATUS FOR ASSESSING COMPLEXITY OF LOCATE REQUEST TICKETS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims a priority benefit, under 35 U.S.C. §120, as a continuation (CON) of U.S. Non-provisional application Ser. No. 12/823,028, entitled “METHODS AND APPARATUS FOR ASSESSING LOCATE REQUEST TICKETS,” filed Jun. 24, 2010, under Attorney Docket No. D0687.70034US01.

[0002] Ser. No. 12/823,028 claims a priority benefit, under 35 U.S.C. §119(a), to Canadian Application Ser. No. (not yet assigned), entitled “METHODS AND APPARATUS FOR ASSESSING LOCATE REQUEST TICKETS,” filed on Jun. 23, 2010, under Attorney Docket No. PAT 71588-1 CA.

[0003] Ser. No. 12/823,028 claims a priority benefit, under 35 U.S.C. §119(e), to U.S. Provisional Patent Application No. 61/220,491, entitled “METHODS AND APPARATUS FOR ASSESSING FIELD SERVICE OPERATION TICKETS,” filed on Jun. 25, 2009 under Attorney Docket No. D0687.70034US00.

[0004] Each of the above-identified applications is incorporated by reference herein in its entirety.

BACKGROUND

[0005] Fixed and mobile computer-based information systems are becoming cheaper, more rugged, and increasingly networked. As a result, technological advances are changing the way businesses collect, analyze, and manage information. For example, certain processes and certain types of equipment and instrumentation are becoming more automatic in nature, especially with regard to the capture and manipulation of data and the conversion of data into useful information.

[0006] The area of field service operations is an example of an area that is experiencing growth in information technology. Field service operations may be any operation in which companies dispatch technicians and/or other staff to remote locations in order to perform certain activities, for example, installations, services and/or repairs. Field service operations may exist in industries, such as, but not limited to, network installations, utility installations, security systems, construction, medical equipment, heating, ventilating and air conditioning (HVAC) and the like.

[0007] An example of a field service operation in the construction industry is a so-called “locate and marking operation,” also commonly referred to more simply as a “locate operation” (or sometimes merely as “a locate”). In a typical locate operation, a locate technician visits a work site in which there is a plan to disturb the ground (e.g., excavate, dig one or more holes and/or trenches, bore, etc.) so as to determine a presence or an absence of one or more underground facilities (such as various types of utility cables and pipes) in a dig area to be excavated or disturbed at the work site.

[0008] In many states, an excavator who plans to disturb ground at a work site is required by law to notify any potentially affected underground facility owners prior to undertaking an excavation activity. Advanced notice of excavation activities may be provided by an excavator (or another party) by contacting a “one-call center.” One-call centers typically are operated by a consortium of underground facility owners for the purposes of receiving excavation notices and in turn

notifying facility owners and/or their agents of a plan to excavate. As part of an advanced notification, excavators typically provide to the one-call center various information relating to the planned activity, including a description of the dig area to be excavated or otherwise disturbed.

[0009] FIG. 1 illustrates an example in which a locate operation is initiated as a result of an excavator **110** providing an excavation notice to a one-call center **120**. An excavation notice also is commonly referred to as a “locate request,” and may be provided by the excavator to the one-call center via an electronic mail message, information entry via a website maintained by the one-call center, or a telephone conversation between the excavator and a human operator at the one-call center. The locate request may include an address or some other location-related information describing the geographic location of a work site at which the excavation is to be performed, as well as a description of the dig area (e.g., a text description), such as its location relative to certain landmarks and/or its approximate dimensions, within which there is a plan to disturb the ground.

[0010] Based on this information, the one-call center identifies certain underground facilities that may be affected by the proposed excavation at the work site. For example, one-call centers generally have access to various existing maps of underground facilities in their jurisdiction, referred to as “facilities maps.” Facilities maps typically are provided by underground facilities owners within the jurisdiction and show, for respective different utility types, where underground facilities purportedly may be found relative to some geographic reference frame or coordinate system (e.g., a grid, a street or property map, GPS latitude and longitude coordinates, etc.).

[0011] Most often, using such facilities maps, a one-call center identifies a significant buffer zone around an identified work site (i.e., based on the address or location information provided by an excavator in the locate request), so as to make an over-inclusive identification of underground utilities that are implicated by the proposed excavation (e.g., to err on the side of caution). This practice of creating a buffer zone around an identified work site with reference to one or more facilities maps commonly is referred to as generating a “polygon” or “polygon map.” Based on these generally over-inclusive polygons (and in some instances significantly over-inclusive polygons), the one-call center identifies all of the underground facilities that may fall within the polygon so as to notify the corresponding facility owners and/or their agents of the proposed excavation. Again, it should be appreciated that polygons or polygon maps utilized by one-call centers for this purpose typically embrace a geographic area that includes but goes well beyond the actual work site, and in many cases the geographic area enclosed by a given polygon is significantly larger than the actual dig area in which excavation or other similar activities are planned.

[0012] Once facilities implicated by the locate request are identified by a one-call center (e.g., via the polygon process), the one-call center generates a “locate request ticket” (also known as a “locate ticket,” or simply a “ticket”). The locate request ticket typically identifies the work site of the proposed excavation and a description of the dig area, typically lists on the ticket all of the underground facilities implicated by the proposed excavation (e.g., by providing a member code for the facility owner of an underground facility that falls within a given polygon), and may also include various other information relevant to the proposed excavation (e.g., the name of

the excavation company, a name of a property owner or party contracting the excavation company to perform the excavation, etc.). The one-call center sends the ticket to one or more underground facility owners **140** and/or one or more locate service providers **130** (who may be acting as contracted agents of the facility owners) so that they can conduct a locate and marking operation to verify a presence or absence of the underground facilities in the dig area. For example, in some instances, a given underground facility owner **140** may operate its own fleet of locate technicians (e.g., locate technician **145**), in which case the one-call center **120** may send the ticket to the underground facility owner **140**. In other instances, a given facility owner may contract with a locate service provider to receive locate request tickets and perform a locate and marking operation in response to received tickets on their behalf.

[0013] More specifically, upon receiving the locate request, a locate service provider or a facility owner (hereafter referred to as a “ticket recipient”) may dispatch a locate technician to the work site of planned excavation to determine a presence or absence of one or more underground facilities in the dig area to be excavated or otherwise disturbed. A first step for the locate technician includes utilizing an underground facility “locate device,” which is an instrument for detecting facilities that are concealed in some manner, such as cables and pipes that are located underground, to verify the presence or absence of underground facilities indicated in the locate request ticket as potentially present in the dig area (e.g., via the facility owner member codes listed in the ticket). An underground facility locate device is used to detect electromagnetic fields that are generated by a “test” signal provided along a length of a target facility to be identified. Locate devices typically include both a signal transmitter to provide the test signal (e.g., which is applied by the locate technician to a tracer wire disposed along a length of a facility), and a signal receiver which is generally a hand-held apparatus carried by the locate technician as the technician walks around the dig area to search for underground facilities. The signal receiver indicates a presence of a facility when it detects electromagnetic fields arising from the test signal. Conversely, the absence of a signal detected by the receiver of the locate device generally indicates the absence of the target facility.

[0014] Subsequently, the locate technician then generally marks the presence (and in some cases the absence) of a given underground facility in the dig area based on the various signals detected (or not detected) using the locate device. For this purpose, the locate technician conventionally utilizes a “marking device” to dispense a marking material on, for example, the surface of the ground along a detected underground facility. Marking material may be any material, substance, compound, and/or element, used or which may be used separately or in combination to mark, signify, and/or indicate. Examples of marking materials may include, but are not limited to, paint, chalk, dye, and/or iron. Marking devices, such as paint marking wands and/or paint marking wheels, provide a convenient method of dispensing marking materials onto surfaces, such as onto the surface of the ground.

[0015] In some environments, arrows, flags, darts, or other types of physical marks may be used to mark the presence or absence of an underground facility in a dig area, in addition to or as an alternative to a material applied to the ground (such as paint, chalk, dye) along the path of a detected utility. The marks resulting from any of a wide variety of materials and/or

objects used to indicate a presence or absence of underground facilities generally are referred to as “locate marks.” Often, different color materials and/or physical objects may be used for locate marks, wherein different colors correspond to different utility types. For example, the American Public Works Association (APWA) has established a standardized color-coding system for utility identification for use by public agencies, utilities, contractors and various groups involved in ground excavation (e.g., red=electric power lines and cables; blue=potable water; orange=telecommunication lines; yellow=gas, oil, steam). In some cases, the technician also may provide one or more marks to indicate that no facility was found in the dig area (sometimes referred to as a “clear”).

[0016] As mentioned above, the foregoing activity of identifying and marking a presence or absence of one or more underground facilities generally is referred to for completeness as a “locate and marking operation.” However, in light of common parlance adopted in the construction industry, and/or for the sake of brevity, one or both of the respective locate and marking functions may be referred to in some instances simply as a “locate operation” or a “locate” (i.e., without making any specific reference to the marking function). Accordingly, it should be appreciated that any reference in the relevant arts to the task of a locate technician simply as a “locate operation” or a “locate” does not necessarily exclude the marking portion of the overall process.

[0017] The locate service provider **130** may handle a high volume of locate requests on a daily basis. For example, the locate service provider **130** may have locate offices (or profit centers) in different geographical regions and each locate office may have a hundred or more locate technicians in the field each day. Depending on its size, each locate office may respond to hundreds or even thousands of locate requests on a given day.

[0018] The locate service provider **130** may use one or more ticket processing systems to process incoming locate request tickets from the one-call center **120**. For example, the ticket processing system may extract identifying information such as a ticket number from an incoming ticket and create a database entry for that ticket number. The database entry may be used throughout the life cycle of the ticket to keep track of pertinent information, such as the status of the ticket (e.g., whether the ticket has been dispatched to a locate technician and, if so, which locate technician).

[0019] The ticket processing system may populate the database entry with additional information retrieved from the ticket. For example, if the ticket includes an address for a corresponding work site, the ticket processing system may store the address in an appropriate field in the database entry.

SUMMARY

[0020] The inventors have appreciated that, although the Pipeline Safety Reauthorization Act of 1988 requires all states to establish one-call coverage for pipelines, the specific operations and practices of one-call centers may vary from region to region. For example, different jurisdictions may have different regulations regarding ticket content (e.g., the minimum amount of information that must be included in a ticket) and ticket due date (e.g., the deadline by which a locate operation must be performed in response to an incoming ticket).

[0021] Also, different one-call centers may obtain information from different sources and package the information into tickets in different manners. For example, depending on the

particular excavator who provides an excavation notice and the particular one-call center that accepts and processes the excavation notice, a resulting locate request ticket may identify the location and boundaries of a proposed work site/dig area in a number of different ways, using street addresses, map grids, and/or latitudinal and longitudinal (lat/long) coordinates.

[0022] The inventors have appreciated that such disparities in ticket information may have adverse effects on the quality and efficiency of locate operations. For example, inadequate or inaccurate information regarding the work site and/or dig area location may cause delays in locate operations (e.g., a locate technician may be unable to ascertain the exact location and/or boundaries of the work site and/or dig area during a first visit and may need to return to the work site at some later time when improved location information becomes available). These delays may increase the operating costs of a locate service provider and may also increase the risk of damaging underground facilities.

[0023] The inventors have further appreciated that conventional ticket processing systems used by locate service providers may have limited assessment capabilities. That is, conventional ticket processing systems may offer limited capabilities in deriving information that is not explicitly included in the incoming tickets. For example, little or no assessment is done to estimate various aspects (or attributes) of a requested locate operation, such as location, scope, time, complexity, risk, value, resource requirements and the like. The lack of information regarding these and other aspects of locate request tickets may lead to various inefficiencies, e.g., in the scheduling of the locate operations and/or the allocation of resources to the locate operations. There may also be an increased risk of damaging underground facilities. As a result, profitability of the locate service providers may be adversely affected.

[0024] Thus, the inventors have recognized a need for improved information management, dissemination, and utilization in the locate industry and other field service industries in which mobile technicians are dispatched in response to incoming service requests.

[0025] In view of the foregoing, one embodiment of the present invention is directed to an apparatus for assessing one or more attributes of a locate operation requested in a locate request ticket. The apparatus comprises at least one processor programmed to extract ticket information from the locate request ticket at least in part by parsing the locate request ticket; apply one or more business rules to at least some of the ticket information to obtain a ticket assessment outcome for each of the one or more attributes; and dispatch at least one locate technician to perform the locate operation, based at least in part on the ticket assessment outcome for each of the one or more attributes.

[0026] Another embodiment is directed to an apparatus for assessing a complexity of one or more locate operations requested in a locate request ticket. The apparatus comprises at least one processor programmed to extract one or more information elements from the locate request ticket, and associate one or more complexity types to the locate request ticket based at least in part on the one or more information elements.

[0027] Another embodiment is directed to an apparatus for assessing a level of risk associated with one or more locate operations requested in a locate request ticket. The apparatus comprises at least one processor programmed to extract one or more information elements from the locate request ticket,

and determine a risk value associated with the locate request ticket based at least in part on the one or more information elements.

[0028] Another embodiment is directed to an apparatus for assessing at least one attribute of a locate and/or marking operation requested in a locate request ticket, the locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the apparatus comprising: at least one communication interface; at least one memory to store processor-executable instructions; and at least one processor communicatively coupled to the at least one memory and the at least one communication interface, wherein, upon execution of the processor-executable instructions, the at least one processor: A) obtains ticket information from the locate request ticket at least in part by parsing the locate request ticket; B) applies one or more business rules to at least some of the ticket information to generate at least one ticket assessment outcome for the at least one attribute; and C) controls the at least one communication interface to transmit, and/or controls the at least one memory to store, the at least one ticket assessment outcome so as to facilitate clearing the locate request ticket and/or dispatching at least one locate technician to perform the locate and/or marking operation, based at least in part on the at least one ticket assessment outcome.

[0029] Another embodiment is directed to a method, performed in a system comprising at least one processor, at least one memory, and at least one communication interface, for assessing at least one attribute of a locate and/or marking operation requested in a locate request ticket, the locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the method comprising: A) obtaining ticket information from the locate request ticket at least in part by parsing, via the at least one processor, the locate request ticket; B) applying one or more business rules to at least some of the ticket information, via the at least one processor, to generate at least one ticket assessment outcome for the at least one attribute; and C) transmitting via the at least one communication interface, and/or storing in the at least one memory, the at least one ticket assessment outcome so as to facilitate clearing the locate request ticket and/or dispatching at least one locate technician to perform the locate and/or marking operation, based at least in part on the at least one ticket assessment outcome.

[0030] Another embodiment is directed to at least one non-transitory computer-readable storage medium encoded with at least one program including processor-executable instructions that, when executed by a processor, perform a method for assessing at least one attribute of a locate and/or marking operation requested in a locate request ticket, the locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the method comprising: A) obtaining ticket information from the locate request ticket at least in part by parsing the locate request ticket; B) applying one or more business rules to at least some of the ticket information to generate at least one ticket assessment outcome for the at least one attribute;

and C) transmitting and/or storing the at least one ticket assessment outcome so as to facilitate clearing the locate request ticket and/or dispatching at least one locate technician to perform the locate and/or marking operation, based at least in part on the at least one ticket assessment outcome.

[0031] Another embodiment is directed to an apparatus for assessing complexity of a locate and/or marking operation requested in a locate request ticket, the locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the apparatus comprising: at least one communication interface; at least one memory to store processor-executable instructions; and at least one processor communicatively coupled to the at least one memory and the at least one communication interface, wherein, upon execution of the processor-executable instructions, the at least one processor: A) analyzes ticket information obtained from the locate request ticket; B) assigns at least one complexity designation to the locate request ticket based at least in part on A); and C) controls the at least one communication interface to transmit, and/or controls the at least one memory to store, the at least one complexity designation so as to facilitate clearing the locate request ticket and/or dispatching at least one locate technician to perform the locate and/or marking operation, based at least in part on the at least one complexity designation.

[0032] Another embodiment is directed to a method, performed in a system comprising at least one processor, at least one memory, and at least one communication interface, for assessing complexity of a locate and/or marking operation requested in a locate request ticket, the locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the method comprising: A) analyzing, via the at least one processor, ticket information obtained from the locate request ticket; B) assigning, via the at least one processor, at least one complexity designation to the locate request ticket based at least in part on A); and C) transmitting via the at least one communication interface, and/or storing in the at least one memory, the at least one complexity designation so as to facilitate clearing the locate request ticket and/or dispatching at least one locate technician to perform the locate and/or marking operation, based at least in part on the at least one complexity designation.

[0033] Another embodiment is directed to at least one non-transitory computer-readable storage medium encoded with at least one program including processor-executable instructions that, when executed by a processor, perform a method for assessing complexity of a locate and/or marking operation requested in a locate request ticket, the locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the method comprising: A) analyzing ticket information obtained from the locate request ticket; B) assigning at least one complexity designation to the locate request ticket based at least in part on A); and C) transmitting and/or storing the at least one complexity designation so as to facilitate clearing the locate request ticket and/or dispatching at least one locate technician

to perform the locate and/or marking operation, based at least in part on the at least one complexity designation.

[0034] Another embodiment is directed to an apparatus for assessing risk associated with a locate and/or marking operation requested in a locate request ticket, the locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the apparatus comprising: at least one communication interface; at least one memory to store processor-executable instructions; and at least one processor communicatively coupled to the at least one memory and the at least one communication interface, wherein, upon execution of the processor-executable instructions, the at least one processor: A) analyzes ticket information obtained from the locate request ticket; B) assigns at least one risk designation to the locate request ticket based at least in part on A); and C) controls the at least one communication interface to transmit, and/or controls the at least one memory to store, the at least one risk designation so as to facilitate clearing the locate request ticket and/or dispatching at least one locate technician to perform the locate and/or marking operation, based at least in part on the at least one risk designation.

[0035] Another embodiment is directed to a method, performed in a system comprising at least one processor, at least one memory, and at least one communication interface, for assessing risk associated with a locate and/or marking operation requested in a locate request ticket, the locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the method comprising: A) analyzing ticket information obtained from the locate request ticket; B) assigning at least one risk designation to the locate request ticket based at least in part on A); and C) transmitting and/or storing the at least one risk designation so as to facilitate clearing the locate request ticket and/or dispatching at least one locate technician to perform the locate and/or marking operation, based at least in part on the at least one risk designation.

[0036] Another embodiment is directed to at least one non-transitory computer-readable storage medium encoded with at least one program including processor-executable instructions that, when executed by a processor, perform a method for assessing risk associated with a locate and/or marking operation requested in a locate request ticket, the locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the method comprising: A) analyzing ticket information obtained from the locate request ticket; B) assigning at least one risk designation to the locate request ticket based at least in part on A); and C) transmitting and/or storing the at least one risk designation so as to facilitate clearing the locate request ticket and/or dispatching at least one locate technician to perform the locate and/or marking operation, based at least in part on the at least one risk designation.

[0037] Another embodiment is directed to an apparatus for assessing a locate and/or marking operation requested in a locate request ticket, the locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area,

wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the apparatus comprising: at least one communication interface; at least one memory to store processor-executable instructions; and at least one processor communicatively coupled to the at least one memory and the at least one communication interface, wherein, upon execution of the processor-executable instructions, the at least one processor: A) in a first stage of assessment, produces a first assessment outcome at least in part by analyzing at least some ticket information obtained from the locate request ticket; B) in a second stage of assessment, produces a second assessment outcome based at least in part on the first assessment outcome; and C) controls the at least one communication interface to transmit, and/or controls the at least one memory to store, at least one of the first assessment outcome and the second assessment outcome so as to facilitate clearing the locate request ticket and/or dispatching at least one locate technician to perform the locate and/or marking operation.

[0038] Another embodiment is directed to a method, performed in a system comprising at least one processor, at least one communication interface, and at least one memory, for assessing a locate and/or marking operation requested in a locate request ticket, the locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the method comprising: A) in a first stage of assessment performed by the at least one processor, producing a first assessment outcome at least in part by analyzing at least some ticket information obtained from the locate request ticket; B) in a second stage of assessment performed by the at least one processor, producing a second assessment outcome based at least in part on the first assessment outcome; and C) transmitting via the at least one communication interface, and/or storing in the at least one memory, at least one of the first assessment outcome and the second assessment outcome so as to facilitate clearing the locate request ticket and/or dispatching at least one locate technician to perform the locate and/or marking operation.

[0039] Another embodiment is directed to at least one non-transitory computer-readable storage medium encoded with at least one program including processor-executable instructions that, when executed by a processor, perform a method for assessing a locate and/or marking operation requested in a locate request ticket, the locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the method comprising: A) in a first stage of assessment, producing a first assessment outcome at least in part by analyzing at least some ticket information obtained from the locate request ticket; and B) in a second stage of assessment, producing a second assessment outcome based at least in part on the first assessment outcome.

[0040] Another embodiment is directed to an apparatus for managing information assets used for assessing locate and/or marking operations requested in locate request tickets, each locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation

activities, the apparatus comprising: at least one communication interface; at least one memory to store processor-executable instructions; and at least one processor communicatively coupled to the at least one memory and the at least one communication interface, wherein, upon execution of the processor-executable instructions, the at least one processor: A) analyzes a record of a completed locate and/or marking operation; and B) updates, based at least in part on A), at least one information asset used for assessing locate and/or marking operations requested in locate request tickets. In one aspect, the at least one information asset comprises at least one business rule to be applied to ticket information to obtain one or more ticket assessment outcomes.

[0041] Another embodiment is directed to a method, performed in a system comprising at least one processor and at least one memory, for managing information assets used for assessing locate and/or marking operations requested in locate request tickets, each locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the method comprising: A) analyzing, via the at least one processor, a record, stored in the at least one memory, of a completed locate and/or marking operation; and B) updating, based at least in part on A), at least one information asset stored in the at least one memory and used for assessing locate and/or marking operations requested in locate request tickets. In one aspect, the at least one information asset comprises at least one business rule to be applied to ticket information to obtain one or more ticket assessment outcomes.

[0042] Another embodiment is directed to at least one non-transitory computer-readable storage medium encoded with at least one program including processor-executable instructions that, when executed by a processor, perform a method for managing information assets used for assessing locate and/or marking operations requested in locate request tickets, each locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the method comprising: A) analyzing a record of a completed locate and/or marking operation; and B) updating, based at least in part on A), at least one information asset used for assessing locate and/or marking operations requested in locate request tickets. In one aspect, the at least one information asset comprises at least one business rule to be applied to ticket information to obtain one or more ticket assessment outcomes.

[0043] For purposes of the present disclosure, the term “dig area” refers to a specified area of a work site within in which there is a plan to disturb the ground (e.g., excavate, dig holes and/or trenches, bore, etc.), and beyond which there is no plan to excavate in the immediate surroundings. Thus, the metes and bounds of a dig area are intended to provide specificity as to where some disturbance to the ground is planned at a given work site. It should be appreciated that a given work site may include multiple dig areas.

[0044] The term “facility” refers to one or more lines, cables, fibers, conduits, transmitters, receivers, or other physical objects or structures capable of or used for carrying, transmitting, receiving, storing, and providing utilities, energy, data, substances, and/or services, and/or any combination thereof. The term “underground facility” means any

facility beneath the surface of the ground. Examples of facilities include, but are not limited to, oil, gas, water, sewer, power, telephone, data transmission, cable television (TV), and/or internet services.

[0045] The term “locate device” refers to any apparatus and/or device for detecting and/or inferring the presence or absence of any facility, including without limitation, any underground facility.

[0046] The term “marking device” refers to any apparatus, mechanism, or other device that employs a marking dispenser for causing a marking material and/or marking object to be dispensed, or any apparatus, mechanism, or other device for electronically indicating (e.g., logging in memory) a location, such as a location of an underground facility. Additionally, the term “marking dispenser” refers to any apparatus, mechanism, or other device for dispensing and/or otherwise using, separately or in combination, a marking material and/or a marking object. An example of a marking dispenser may include, but is not limited to, a pressurized can of marking paint. The term “marking material” means any material, substance, compound, and/or element, used or which may be used separately or in combination to mark, signify, and/or indicate. Examples of marking materials may include, but are not limited to, paint, chalk, dye, and/or iron. The term “marking object” means any object and/or objects used or which may be used separately or in combination to mark, signify, and/or indicate. Examples of marking objects may include, but are not limited to, a flag, a dart, and arrow, and/or an RFID marking ball. It is contemplated that marking material may include marking objects. It is further contemplated that the terms “marking materials” or “marking objects” may be used interchangeably in accordance with the present disclosure.

[0047] The term “locate mark” means any mark, sign, and/or object employed to indicate the presence or absence of any underground facility. Examples of locate marks may include, but are not limited to, marks made with marking materials, marking objects, global positioning or other information, and/or any other means. Locate marks may be represented in any form including, without limitation, physical, visible, electronic, and/or any combination thereof.

[0048] The terms “locate and marking operation,” “locate operation,” and “locate” are used interchangeably and refer to any activity to detect, infer, and/or mark the presence or absence of an underground facility. In some instances, the term “marking operation” is used to more specifically refer to that portion of a locate operation in which a marking material and/or one or more marking objects is/are employed to mark a presence or an absence of one or more underground facilities. The term “locate technician” refers to an individual performing a locate operation. A locate operation often is specified in connection with a dig area, at least a portion of which may be excavated or otherwise disturbed during excavation activities.

[0049] The terms “locate request” and “excavation notice” are used interchangeably to refer to any communication to request a locate and marking operation. The term “locate request ticket” (or simply “ticket”) refers to any communication or instruction to perform a locate operation. A ticket might specify, for example, the address or description of a dig area to be marked, the day and/or time that the dig area is to be marked, and/or whether the user is to mark the excavation area for certain gas, water, sewer, power, telephone, cable

television, and/or some other underground facility. The term “historical ticket” refers to past tickets that have been completed.

[0050] It should be appreciated that all combinations of the foregoing concepts and additional concepts discussed in greater detail below (provided such concepts are not mutually inconsistent) are contemplated as being part of the inventive subject matter disclosed herein. In particular, all combinations of claimed subject matter appearing at the end of this disclosure are contemplated as being part of the inventive subject matter disclosed herein. It should also be appreciated that terminology explicitly employed herein that also may appear in any disclosure incorporated by reference should be accorded a meaning most consistent with the particular concepts disclosed herein.

BRIEF DESCRIPTION OF THE DRAWINGS

[0051] The drawings are not necessarily to scale, emphasis instead generally being placed upon illustrating the principles of the invention.

[0052] FIG. 1 shows an example in which a locate operation is initiated as a result of an excavator serving an excavation notice to a one-call center.

[0053] FIG. 2 shows an example of a ticket management system, according to some embodiments of the present disclosure, comprising a number of software components for performing various functions, such as parsing incoming locate request tickets, assessing parsed tickets according to appropriate business rules, and scheduling and dispatching locate technicians to perform locate operations.

[0054] FIG. 2A shows an illustrative implementation of a ticket assessment engine comprising a network of ticket assessment modules arranged in multiple stages.

[0055] FIG. 3 shows an example of a locate request ticket that may be received by a ticket management system, according to some embodiments of the present disclosure.

[0056] FIG. 4 shows an example of a virtual white lines (VWL) image associated with a ticket received by a ticket management system, according to some embodiments of the present disclosure.

[0057] FIG. 5 shows an illustrative process that may be performed by a ticket parsing application to convert an incoming locate request ticket into a parsed ticket, according to some embodiments of the present disclosure.

[0058] FIG. 6 shows an example in which a ticket assessment engine accesses one or more stored images that have been processed by a geographic information system, according to some embodiments of the present disclosure.

[0059] FIG. 7 shows an example of a facilities map with an overlaid VWL image, according to some embodiments of the present disclosure.

[0060] FIG. 8 shows an illustrative set of lookup tables that may be used by a ticket assessment engine, according to some embodiments of the present disclosure.

[0061] FIG. 9 shows an illustrative process that may be performed by a ticket assessment engine to selecting the best available location information and refine the location information when necessary, according to some embodiments of the present disclosure.

[0062] FIG. 10 illustrates an exemplary method for refining location information, according to some embodiments of the present disclosure.

[0063] FIG. 11 shows an illustrative process that may be performed by a ticket assessment engine to assess the scope of a locate request ticket, according to some embodiments of the present disclosure.

[0064] FIG. 12 shows an illustrative process that may be performed by a ticket assessment engine to assess the complexity of a locate request ticket, according to some embodiments of the present disclosure.

[0065] FIG. 13 shows an illustrative process that may be performed by a ticket assessment engine to estimate the duration of a locate request ticket, according to some embodiments of the present disclosure.

[0066] FIG. 14 shows an illustrative process that may be performed by a ticket assessment engine to compute a risk measurement associated with a locate request ticket, according to some embodiments of the present disclosure.

[0067] FIG. 15 shows an illustrative process that may be performed by a ticket assessment engine to compute an estimated value for a locate request ticket, according to some embodiments of the present disclosure.

[0068] FIG. 16A shows an illustrative process that may be performed by a ticket assessment engine to identify one or more required and/or recommended pieces of equipment for performing a requested locate operation, according to some embodiments of the present disclosure.

[0069] FIG. 16B shows an illustrative process that may be performed by a ticket assessment engine to identify one or more requirements and/or recommendations for selecting a suitable technician to perform a requested locate operation, according to some embodiments of the present disclosure.

[0070] FIG. 17 shows an illustrative example of a multi-stage ticket assessment engine having a network of assessment modules.

[0071] FIG. 18 shows an example of a work order that may be created from an incoming locate request ticket, according to some embodiments of the present disclosure.

[0072] FIG. 19 shows an illustrative computer that may be used for improving information management, dissemination, and utilization in the locate industry and other field service industries, according to some embodiments of the present disclosure.

DETAILED DESCRIPTION

I. Overview

[0073] Various embodiments described herein relate to systems, methods and apparatus for improved information management, dissemination and utilization in field service operations in which mobile technicians are dispatched in response to service requests. In particular, some exemplary embodiments relate to systems, methods and apparatus for automatically and intelligently assessing locate request tickets to provide information that can be used to improve activity scheduling, resource allocation, quality control, and/or regulatory compliance. While the particular example of locate request tickets is provided herein primarily for purposes of illustration, it should be appreciated that the inventive concepts described herein may be more generally applicable to other types of field service operations.

[0074] As discussed above, the inventors have appreciated that there is a lack of an established data standard for use when sharing information among various entities in the locate industry, such as excavators, one-call centers, facility owners and locate service providers. As a result, the availability and

consistency of data may not be always guaranteed. Accordingly, in some exemplary embodiments, a ticket management system is provided that associates a level of confidence with at least some input data to indicate how reliable the data is. For example, a level of confidence may be assigned to a data unit as it enters the ticket management system, so that the propagation of unreliable information may be limited. In some embodiments, confidence levels may be used to resolve conflicts, so that information from a more trust-worthy source may be chosen over information from a less trust-worthy source. Additionally, multiple related pieces of information may be compared, and a confidence level may be increased when the related pieces of information are consistent with each other.

[0075] In some further embodiments, a ticket management system is provided that includes a ticket assessment engine for analyzing incoming locate request tickets. The ticket assessment engine may be programmed to derive useful information that is not directly available from the tickets themselves. A number of different types of assessments may be performed, including, but not limited to, those listed below. Furthermore, the different types of assessments may be performed in one or more stages, where an assessment outcome from one stage may influence an assessment outcome at a subsequent stage.

[0076] Location: In location assessment, various locations of interest may be derived and/or estimated, such as a location of a work site in which excavation activities are planned. In some instances, insufficient location information may be provided in a locate request ticket. For example, a location description may be vague or ambiguous (e.g., a street name without any house numbers). In other instances, multiple conflicting pieces of location information may be given (e.g., a street address and a pair of lat/long coordinates that do not match). In these situations, additional analysis may be needed to ascertain the location of the work site. Other examples of location information that may be assessed include a location of one or more landmarks at or near the work site, a location of one or more dig area indicators provided on a virtual white lines (VWL) image, and the like.

[0077] Scope: In scope assessment, any descriptive information regarding a requested locate operation may be analyzed from incoming locate request tickets, such as information describing the extent and/or nature of the requested work. For example, the size of a dig area, as measured in length or in area, may be indicative of the scope of a requested locate operation. The depth of excavation and the number of different facilities to be located may also be relevant.

[0078] Complexity: Complexity assessment may identify one or more aspects of a requested locate operation that may influence a manner in which the locate operation is to be conducted. For example, a locate operation may be classified as high complexity when a high profile facility asset (e.g., gas pipes and/or fiber-optic communication cables) is involved or when the work site is in a restricted access area (e.g., a military base or gated community). Such a classification may be used, for example, to determine whether a highly skilled technician and/or particular/special equipment may be required, and/or whether a delay in completing the locate operation is likely.

[0079] Time: Various time-related aspects of a requested locate operation may be assessed, such as a deadline by

which the locate operation must be completed and/or an expected duration (e.g., an expected amount of time needed to complete the locate operation). In some situations, the expected duration for a requested locate operation may be determined based on its estimated scope (e.g., the number and types of different facilities involved) and/or complexity (e.g., delays due to access restrictions, special skills and/or equipment required, etc.).

[0080] Risk: Risk assessment may include estimating a measure of damages in an event of an accident (e.g., when underground facilities are damaged during excavation due to an improperly or inaccurately performed locate and/or marking operation). Examples of damages include, but are not limited to, economic losses, damages to property, environmental damages, and/or personal injuries. Certain intangible losses may also be taken into account, such as loss of customer satisfaction. In some embodiments, a locate service provider may wish to assess a level of potential liability for damages in an accident where the locate service provider is at fault (e.g., failing to complete a locate operation by a required deadline or inadequately performing a location operation). For example, a locate operation involving one or more main utility lines (e.g., water mains serving an entire neighborhood) may be considered high risk, because an accident involving a main utility line may expose the locate service provider to a large range of damages. By contrast, a locate operation involving only service lines (e.g., utility lines leading to a customer's premise) may be considered low risk, because the potential scope of damages may be relatively small in an accident involving a service line.

[0081] Value: Value assessment may be performed according to different measures of value. For instance, value assessment may be performed from the perspective of a locate service provider based on business value created by performing a locate operation. In some embodiments, such business value may simply be the revenue collected for the locate operation. In other embodiments, a measure of net profit may be used, where various operating costs may be subtracted from the revenue. For example, a measure of profit may take into account information from one or more contracts established between a locate service provider and a facilities owner (or some other entity contracting with the locate service provider to perform locate operations). Examples of contractual information include, but are not limited to, contractual provisions specifying bonuses and/or penalties for certain tickets. In some further embodiments, a more sophisticated measure such as value at risk may be used.

[0082] Resource: Resource assessment may include identifying one or more resources (e.g., equipment and/or personnel) needed to adequately perform a requested locate operation. In some embodiments, resource assessment may identify a personnel skill level or certification required to perform a locate operation. For example, in some jurisdictions, only a technician with gas certification may be dispatched to perform a locate operation involving gas pipes. In another example, personnel skill level may encompass both long term measurements, such as years of experience, and short term measurement, such as recent performance evaluations.

In some further embodiments, resource assessment may identify one or more tools and/or pieces of equipment required or recommended for a locate operation. For example, if a locate request ticket indicates that one or more gas facilities are to be located, a gas detection tool may be required or recommended. In some instances, one or more contracts established between a locate service provider and a facilities owner (or some other entity contracting with the locate service provider to perform locate operations) may specify particular tools/equipment requirements for some types of locate operations.

[0083] The inventors have appreciated that the assessment outcomes provided by a ticket assessment engine may be used to improve various aspects of the business operations of a locate service provider, such activity scheduling, resource allocation, quality control, and/or regulatory compliance. In some embodiments, the ticket assessment engine may be programmed to provide an estimated measurement, ranking, score, classification and/or some other suitable value for each of the assessment targets listed above, or any other desirable assessment targets. These outcomes may then be input into one or more other components of the ticket management system, for example, an activity scheduling application, a ticket review application for quality control and training, and/or a customer billing application.

[0084] The ticket assessment engine may access various information sources in order to produce the desired assessment outcomes. For example, the ticket assessment engine may make use of facility plats available from the facility owners to determine whether certain geographical areas should be classified as high risk or high complexity areas. As another example, the ticket assessment engine may access a database containing past damage reports to determine whether a given excavator has a history of frequent and/or costly damages. As yet another example, the ticket assessment engine may access a database containing information regarding previously completed tickets to search for notes and/or remarks regarding a given geographical location.

[0085] The inventors have further appreciated that various types of ticket assessment may be carried out by an entity other than a locate service provider, such as a facilities owner, an excavator, a one-call center, a community (e.g., city, town, village, and/or other form of municipality) and/or an insurance company. These entities may perform ticket assessment based on their own interests and concerns. For instance, in assessing potential damages in an event of an accident, a facilities owner may take into account loss of customer satisfaction due to service interruption, which may in turn lead to economic losses for the facilities owner (e.g., customer canceling service contract). As another example, a facilities owner may assess the complexity of a requested locate and/or marking operation and determine whether it may be desirable to dispatch its own personnel to monitor the operation. In some instances, the facilities owner may even decide to dispatch its own personnel to perform the requested operation, instead of a locate technician dispatched by a locate service provider. As yet another example, a facilities owner or regulatory body may use ticket assessment to identify high risk locate and/or marking operations that may require auditing prior to excavation, to ensure that the locate service provider's technicians have adequately performed the operations.

[0086] Following below are more detailed descriptions of various concepts related to, and embodiments of, inventive systems, methods and apparatus for improved information

management, dissemination and utilization in field service applications and, in particular, for assessing locate request tickets. It should be appreciated that various concepts introduced above and discussed in greater detail below may be implemented in any of numerous ways, as the disclosed concepts are not limited to any particular manner of implementation. For instance, the present disclosure is not limited to the particular arrangements of components shown in the various figures, as other arrangements may also be suitable. Such examples of specific implementations and applications are provided primarily for illustrative purposes.

[0087] Generic terms such as “engine,” “application” or “module” may be used herein when referring to one or more of software components of a ticket management system. Such terms should not be interpreted as being limiting in any way. Also, each of the software components described herein may be implemented in any suitable way, for example, as processor-executable instructions stored in at least one physical storage device (e.g., a non-volatile memory device and/or a volatile memory device) of a general purpose computer or some other suitable hardware system. The general purpose computer or hardware system may comprise at least one hardware processor for executing the instructions stored in the physical storage device, and may further comprise at least one input/output (I/O) interface for receiving inputs from input sources or devices and for sending outputs to output recipients or devices. In some embodiments, the hardware processor on which a software component executes may be in a mobile or portable device, such as a mobile telephone, personal digital assistant, a marking device (e.g., for spray painting lines or other marks on the ground), or any other type of mobile or portable device.

II. System Architecture and Components

[0088] FIG. 2 shows an example of a ticket management system 200 comprising a number of software components for performing various functions, such as parsing incoming locate request tickets, assessing parsed tickets according to appropriate business rules, and scheduling and dispatching locate technicians to perform locate operations. Generally, the ticket management system 210 may be a management software application run by a locate service provider, such as the locate service provider 130 shown in FIG. 1, although this is not required.

[0089] In the embodiment shown in FIG. 2, the ticket management system 200 receives locate request tickets 205 from one or more suitable sources, such as the one-call center 120 shown in FIG. 1. Each ticket typically includes one or more text strings describing various parameters of the requested locate operation, such as time, location and types of facilities. In some instances, one or more images depicting the work site and/or dig area may also be attached to the ticket. For purposes of the present disclosure, “ticket information” refers generally to any information included in or derived from locate request tickets (e.g., as issued by a one-call center).

[0090] Depending on the originating one-call centers, different types of information may be stored in the text portions of the tickets 205 in different formats. Therefore, a ticket parser 210 may be provided, which may be programmed to recognize an origin of a ticket 205 and perform the parsing accordingly to output a parsed ticket 215. The parsed ticket 215 may be created according to a standardized ticket format, which may be any suitable set of rules or conventions for representing and organizing data, designed to facilitate effi-

cient handling of data by various software components. For example, the standardized format may be an Extensible Markup Language (XML) format. Further details regarding ticket parsing are described below in connection with FIG. 5.

[0091] In the embodiment shown in FIG. 2, ticket information, which may include one or more of the original ticket 205, the parsed ticket 215, and any images of the work site and/or dig area that may have been attached to or otherwise included with the ticket 205, is stored in a ticket database 220. The ticket database 220 may be any substantially persistent storage of data, for example, a relational database that is created and maintained using a suitable database software. The relational database may store relationships between excavation companies, one-call centers, facility owners, locate service providers, facilities maps, locate request tickets, and the like.

[0092] Any stored ticket information, including the parsed ticket 215, along with any associated images, may be retrieved from the ticket database 220 in a suitable manner and supplied to a ticket assessment engine 230 for processing and analysis. In some instances, the ticket assessment engine 230 may identify one or more prerequisite activities that must be completed before the requested locate operation can be undertaken. For example, the ticket assessment engine 230 may determine, based on the received ticket information, that a safety personnel must be dispatched to ensure that a manhole is clear of any hazardous gases before a locate technician may enter the manhole to perform a requested locate operation, or that a vacuum truck is to be dispatched to dig one or more potholes before a locate technician can begin a requested locate operation. Such prerequisite tasks may be performed by different work crews (e.g., with different equipment and/or skill sets) and may be scheduled separately from the requested locate operation.

[0093] As another example, the ticket 205 (and hence ticket information derived therefrom) may be related to a so-called “project ticket,” which is a request for a locate operation that may encompass an appreciably large linear distance or geographic area, and hence may require a significant number of hours to complete (e.g., the work site may be several miles along a highway, or may include an entire housing development complex). The ticket assessment engine 230 may break up such a project in a suitable manner into multiple work orders (e.g., work orders 235A-C) and assess the ticket information accordingly (e.g., producing separate assessment outcomes for each individual work order). When appropriate, subsequent processing such as scheduling and dispatch may also be performed on a per work order basis.

[0094] In the embodiment shown in FIG. 2, the ticket assessment engine 230 applies an appropriate set of business rules 240 to evaluate ticket information. For example, there may be different business rules for assessing each of the following aspects: location, scope, complexity, time, risk, value, and/or resource. Exemplary business rules for some of these aspects are described in greater detail below in connection with FIGS. 9-16 and Tables 1-26. However, it should be appreciated that the present disclosure is not limited to the specific business rules discussed herein. For example, a business rule engine (not shown) may be used to allow business users to dynamically modify existing business rules and/or define new rules.

[0095] As discussed above, ticket assessment implemented by the ticket assessment engine 230 may proceed in one or more stages, where an assessment outcome from one stage

may be an input to a subsequent stage of assessment. Accordingly, in some embodiments, the ticket assessment engine **230** may comprise one or more modules arranged in multiple stages, where each module may assess a different aspect of the requested locate operation. For instance, in one exemplary embodiment, the ticket assessment engine **230** may comprise multiple modules for assessing, respectively, location, scope, complexity, time, risk, value, and/or resource. Each module may implement a corresponding set of business rules, such as the business rules shown in Tables 1-26, and different modules may implement the corresponding set of business rules at different assessment stages within the engine **230**. Examples of a ticket assessment engine **230** based on multiple assessment modules are described in greater detail below in connection with FIGS. 2A and 19.

[0096] In applying the business rules **240** to assess the ticket information, the ticket assessment engine **230** may rely on auxiliary input information such as facilities maps, past damage reports, excavator history, traffic, weather, and the like. These pieces of information may be accessed as needed from an auxiliary information storage **250**, which may include one or more databases and/or lookup tables. Examples of various types of auxiliary input information used by the ticket assessment engine **230** are described in greater detail below in connection with FIGS. 6-8.

[0097] In the embodiment shown in FIG. 2, the ticket assessment engine **230** provides as an exemplary output one or more work orders **235A-C** and populates the work order(s) with corresponding "assessment outcomes." An assessment outcome may be a numeric value (which may have any of a variety of possible units of measure, or no particular unit of measure, and may or may not be based on some range or scale), one or more symbols or alpha-character indicators (e.g., Y/N for "yes/no," T/F for "true/false," H/M/L for "high," "medium," "low," etc.), and/or one or more words/phrases. The ticket assessment engine **230** may output one or more assessment outcomes per ticket analyzed, such that a set of assessment outcomes are provided per ticket. As noted above in Section I, exemplary categories of assessment outcomes include, but are not limited to, scope, complexity, duration, risk, value, and resources. The populated work orders may then be forwarded to any number of components in the ticket management system **200**. For example, the populated work orders may be forwarded to a scheduling and dispatch application **260**, which may allocate an appropriate technician to each work order based on at least some of the assessment outcomes, such as estimated duration, estimated value and/or resource requirements. Alternatively, the populated work orders may be stored in a database that can be accessed by one or more components in the ticket management system **200**.

[0098] It should be appreciated that the ticket assessment engine **230** may be implemented in any suitable manner, as the present disclosure is not limited in this respect. In some embodiments, the ticket assessment engine **230** may be implemented using Windows Workflow Foundation (WF), which is a Microsoft® technology for defining, executing, and managing workflows. For example, a workflow definition may be loaded for assessment from a .xml file, using rules loaded from a .rules file. When a new ticket is ready for assessment, a new instance of the workflow may be instantiated in a new WF thread. At the completion of successful ticket assessment, the assessment runtime may update the

system database with the calculated output and mark the ticket as ready for scheduling.

[0099] The ticket assessment outcomes may be used by the scheduling and dispatch application **260** in any suitable manner, as the present disclosure is not limited in this respect. In some embodiments, a value assessment outcome may be used as a weighting factor. For example, a ticket that is assessed as having high value may be weighted to encourage the scheduling and dispatch application **260** to dispatch the ticket ahead of other tickets that are assessed as having lower values. A risk assessment outcome may be used in a similar fashion, to encourage the dispatch of higher risk tickets ahead of lower risk tickets. This may provide for more opportunities for review and quality assessment for the higher risk tickets.

[0100] In some further embodiments, a resource assessment outcome may be used by the scheduling and dispatch application **260** as a constraining factor in assigning technicians and/or equipment to tickets. For example, a ticket may be assessed as requiring a gas-certified, skill level 4 (GAS/4) locate technician. This may be used as a hard constraint, so that only locate technicians with GAS/4 or higher certification may be assigned to the ticket. Alternatively, the skill attribute may be used as a soft constraint, so that the ticket may be assigned to a lesser qualified locate technician only if a locate technician with GAS/4 or higher certification is not available. In such a situation, appropriate business rules may be implemented by the scheduling and dispatch application **260** to determine whether any potential negative effects (such as increased risk, increased duration, and/or decreased profitability) are outweighed by the potential benefits of completing the requested locate operation earlier.

[0101] In yet some further embodiments, the scheduling and dispatch application **260** may determine, based on one or more ticket assessment outcomes, that it is unnecessary to dispatch any technician to perform a requested locate and/or marking operation. For example, a scope assessment outcome may indicate a number and/or a type of facilities to be located as represented in the locate request ticket. In some instances, amongst the facilities noted in the ticket, there may be no underground facilities implicated (e.g., because the work site is located in a rural area that has only aerial power and phone lines and no underground gas pipes); in this case, the scope assessment outcome may indicate zero facilities of an underground type. As another example, a risk assessment outcome may indicate a low risk associated with the requested locate and/or marking operation (e.g., because all relevant facilities maps suggest that the closest underground facilities are at least some threshold distance away from a specified dig area). In these and similar situations, the locate request ticket may be flagged for an "office clear" (i.e., clearing the ticket without dispatching any locate technician to the work site), which may yield a higher profit margin for the locate service provider than a ticket for which a technician is dispatched. In some embodiments, the office clear may be performed automatically by analyzing the dig area (e.g., its shape, size, and/or location) against one or more relevant facilities maps. Alternatively, the office clear may be performed manually or semi-automatically, where a human operator screens the ticket to confirm that no underground facilities are likely present in the dig area.

[0102] When a technician reports the completion of a work order, the scheduling and dispatch application **260** may forward the work order to a quality control application **270**, along with any activity logs and/or technician reports. The

quality control application **270** may determine whether the work order has been adequately responded to, for example, by checking the activity logs to determine whether every facility type listed on the work order is accounted for. The quality control application **270** may also be programmed to present a user interface through which human supervisors may review the completed work order and determine whether the technician is in need of additional training in any particular area. Examples of manual, semi-automated and automated quality assessment techniques that may be suitable for implementing the quality control application **270** of the ticket management system **200** may be found in one or more of the following references, each of which is incorporated herein by reference:

[0103] U.S. patent application Ser. No. 12/493,109, filed on Jun. 26, 2009, entitled “Methods and Apparatus for Quality Assessment of a Field Service Operation;”

[0104] U.S. patent application Ser. No. 12/557,732, filed on Aug. 7, 2009, entitled “Methods and Apparatus for Quality Assessment of a Field Service Operation Based on Geographic Information;”

[0105] U.S. patent application Ser. No. 12/571,356, filed on Sep. 30, 2009, entitled “Methods and Apparatus for Analyzing Locate and Marking Operations with Respect to Facilities Maps;”

[0106] U.S. patent application Ser. No. 12/572,202, filed on Oct. 1, 2009, entitled “Methods and Apparatus for Analyzing Locate and Marking Operations with Respect to Historical Information;”

[0107] U.S. patent application Ser. No. 12/568,087, filed on Sep. 28, 2009, entitled “Methods and Apparatus for Generating an Electronic Record of Environmental Landmarks Based on Marking Device Actuations;”

[0108] U.S. patent application Ser. No. 12/572,260, filed on Oct. 1, 2009, entitled “Methods and Apparatus for Analyzing Locate and Marking Operations with Respect to Environmental Landmarks;” and

[0109] U.S. patent application Ser. No. 12/703,809, filed on Apr. 14, 2010, entitled “Marking Apparatus Equipped with Ticket Processing Software for Facilitating Marking Operations, and Associated Methods.”

[0110] Because of a high volume of work orders processed by a locate service provider, it may in some situations be infeasible for every work order to receive a quality assessment, especially one that requires human review. Accordingly, in some embodiments, one or more assessment outcomes may be used to filter the completed work orders to identify those work orders that may require specific quality assessment involving human review. For instance, a risk assessment outcome may be used to filter out low- or medium-risk work orders, so that only high-risk work orders are submitted for human review. In case a numerical measure of risk is used, a suitable threshold may be selected to identify high-risk work orders. Alternatively, a combination of assessment outcomes may be used for filtering. For example, one or more filtering rules may be applied to any suitable combination of assessment outcomes (e.g., location, scope, complexity, time, risk, value and/or resource) to identify candidate work orders for human review. As a more specific example, a filtering rule may take into account any suitable combination of the following information: one or more types of facilities to be located, client identity (e.g., identity of a facilities owner), type of excavation to be carried out subsequent to the locate operation, excavator identity, damage history for a geographical area encompassing the work site, and damage history

associated with the client and/or excavator. Other types of information may also be taken into account, as the inventive concepts described herein relating to filtering are not limited to any specific examples of filtering criteria.

[0111] The scheduling and dispatch application **260** may also forward the completed work order to a billing application **280**, which may apply various billing rules to calculate a fee to be billed to each customer. For example, the billing application may use the activity logs to determine the amount of time the technician spent on each facility type and compute a fee accordingly to be billed to that facility owner.

[0112] In some embodiments, the ticket assessment system **200** may further include a feedback mechanism, such as a backend assessment module **290**. As shown in FIG. 2, the backend assessment module **290** may monitor completed work orders received from the scheduling and dispatch application **260** and send appropriate updates to various other components of the ticket management system **200**. For example, the backend assessment module **290** may maintain statistical information regarding the completed work orders and provide the statistical information to a business rule engine (not shown), which may update the business rules **240** accordingly. Similarly, the backend assessment module **290** may provide updates to some of the historical information stored in the auxiliary information storage **250**.

[0113] In some instances, a work order may be closed by a technician for reasons other than having completed the requested location operation. For example, the technician may be unable to gain access to a work site, or may discover significant discrepancy between the dig area description and the actual dig area. The technician may then close the current work order and request that a new work order be generated. Upon detecting such a situation, the backend assessment module **290** may generate an appropriate new work order, e.g., with more accurate work site and/or dig area information, and submit it to the scheduling and dispatch application **260** for re-dispatch.

[0114] Additionally, the backend assessment module **290** may be adapted to receive information from the quality control application **280**. For example, upon reviewing a completed work order via the quality control application **280**, a human supervisor may discover a significant problem and may determine that a re-mark or re-stake operation is necessary. This information may be provided to the backend assessment module **290**, which may generate a new work order accordingly and perform appropriate updates to the information stored in the auxiliary information storage **250**.

[0115] Turning now to FIG. 2A, an illustrative implementation of a ticket assessment engine (e.g., the ticket assessment engine **230** of FIG. 2) is shown, comprising a network of ticket assessment modules arranged in multiple assessment stages. In this example, there are N different stages of assessment within the assessment engine, numbered 1 through N. Each stage may include one or more assessment modules (e.g., labeled in FIG. 2A as “Assessment 1-A,” “Assessment 1-B,” “Assessment N-A,” etc.), wherein each module comprises a corresponding set of business rules (e.g., business rules **240** in FIG. 2) that are used to assess various elements of ticket information. To this end, each module may receive as input one or more of the following: ticket information **225**, auxiliary information **255**, (e.g., facilities maps, stored images, historical records, environmental data and/or lookup tables), and/or one or more assessment outcomes from one or more previous stages of assessment.

[0116] For instance, as illustrated in FIG. 2A, a first stage assessment (Stage 1 Assessment) may include two modules, Assessment 1-A and Assessment 1-B, each receiving ticket information and auxiliary information as input. Assessment 1-A may produce Outcome 231, which may be fed into a Stage 2 Assessment module, Assessment 2-A. Assessment 1-B may produce Outcome 232, which may also be fed into Assessment 2-A. Furthermore, Outcome 232 may be used at an even later stage of assessment, e.g., at Assessment N-A. Further still, Outcome 232 may be output by the ticket assessment engine as a “final” assessment outcome. In this respect, Outcome 231 produced by Assessment 1-A may be an “intermediate” assessment outcome, in that it is used only internally, by other assessment modules, and is not output by the ticket assessment engine.

[0117] In addition to receiving Outcome 231 and Outcome 232, produced respectively by the modules Assessment 1-A and Assessment 1-B, Assessment 2-A may access other information, such as the ticket information 225 input to the ticket assessment engine and/or auxiliary information 255 accessible to the ticket assessment engine. The output of Assessment 2-A, namely, Outcome 233, may be output by the ticket assessment engine as a final outcome, and may be fed into a later stage assessment module, e.g., Assessment N-A. Finally, Assessment N-A may produce Outcome 234 based on inputs from different stages of assessment, e.g., Outcome 232 and Outcome 233.

[0118] Although some specific arrangements of assessment modules are shown in FIG. 2A, it should be appreciated that those arrangements are merely illustrative. Other suitable arrangements may also be used, as the present disclosure is not limited in this respect. Also, any suitable types of assessment may be implemented by the assessment modules, including, but not limited to, scope, location, complexity, risk, value, time and/or resource. A more specific illustrate example of a multi-stage ticket assessment engine is discussed in greater detail below, in connection with FIG. 17.

III. Exemplary Locate Request Ticket

[0119] FIG. 3 shows an example of a locate request ticket 300 that may be received by the ticket management system 200, for example, via email from the one-call center 120 shown in FIG. 1. The ticket 300 may contain various pieces of information stored in a number of fields, including:

[0120] Ticket number 302. A ticket type (e.g., new, emergency, re-mark or survey) may also be indicated

[0121] Location information 304A (e.g., street address, nearby cross streets, subdivision, city and/or county) and 304B (e.g., lat/long coordinates provided in decimal degrees). Although not shown, location information may also include coordinates for one or more dig area indicators on a VWL image associated with the ticket.

[0122] Excavation information 306, including reason (e.g., installing conduit), scope (e.g., 392 feet), depth (e.g., 18-30 inches), method (e.g., by drill and trencher) and property type (e.g., private property).

[0123] Timing information 308, including scheduled excavation date and time (e.g., Jan. 6, 2008 at 7:00 a.m.), duration of excavation (e.g., 3 days), and due date for the corresponding locate operation request (e.g., Jan. 5, 2008). Although not shown, timing information may also include a scheduled end date and time for the excavation activities, and/or a date and time after which locate marks may expire and a re-mark operation may be needed.

vation activities, and/or a date and time after which locate marks may expire and a re-mark operation may be needed.

[0124] Excavator information 310, including name, address, contact information such as business and/or mobile phone number, fax number and email address, and the party who contracted the excavator (e.g., as indicated in the “Work Being Done For” field). Although not shown, excavator information may also include a user identifier for the excavator (e.g., a login name used by the excavator to create the ticket via a one-call center’s web site).

[0125] One-call center information 312, including the date and time at which the ticket was created and the customer service representative who created the ticket. Although not shown, one-call center information may also include a one-call center identification (e.g., an alphanumeric identifier for the one-call center that created the ticket) and/or information identifying a method of entry for the ticket (e.g., by phone or email, or via a web site).

[0126] Member codes 314, indicating the different types of facilities that need to be located and/or the facilities owners that are notified of the ticket.

[0127] It should be appreciated that the above list of information elements is merely illustrative, as other combinations of information elements may also be suitable. For example, when preparing a locate request ticket, a one-call center may draw a polygon on a map corresponding to the work site. This polygon may be overlaid onto one or more facilities maps to determine which types of facilities are implicated. For example, a facility type (or owner) may be indicated on the locate request ticket in the member code section 314 if and only if at least one utility line of that type (or owner) touches or intersects with the polygon. In some instances, the one-call center may provide the coordinates for the vertices of the polygon in the locate request ticket, along with other information describing the location and boundaries of the work site and/or dig area.

[0128] As another example, the ticket may include locate instructions provided by an excavator who initiated the ticket, which may be in the form of free text. As yet another example, the ticket may include information indicating whether the planned excavation activities include any boring (e.g., on a street, driveway and/or sidewalk) and/or blasting. As yet another example, the ticket may indicate whether a permit has been obtained for a related construction project (e.g., installing a swimming pool or building a foundation for a structure).

[0129] In some embodiments, one or more images or graphical representations of the work site and/or dig area may be attached to the ticket 300. For instance, a so-called virtual white lines (VWL) image may be attached, which may contain a digital image of the work site including the dig area (or some other suitable digital data representing the geographic location of the dig area) along with electronic annotations delimiting the dig area.

[0130] An example of a VWL image 400 is shown in FIG. 4. As shown, the dig area is indicated on an aerial image by a set of dashed lines 410 forming a rectangle. The lines 410 are more generally referred to as “dig area indicators,” which may be any electronically generated markings indicating a point, line, path and/or area of the planned excavation.

[0131] In some embodiments, the VWL image 400 may be created by the excavator using a suitable VWL application

(not shown), such as those described in U.S. patent application Ser. No. 12/050,555 and U.S. Provisional Patent Application No. 61/151,769 and No. 61/151,815, all of which are incorporated by reference herein in their entireties. For example, the excavator may use the VWL application to obtain an aerial image of a geographical location encompassing the planned dig area and use a drawing tool of the VWL application to add the dig area indicators **410** to the aerial image.

IV. Ticket Parsing

[0132] As discussed above, locate request tickets originating from different one-call centers may store information in different formats (e.g., different one-call centers may use different commercial software to generate locate request tickets). Therefore, a ticket parsing application, such as the ticket parser **210** shown in FIG. 2, may be used to convert incoming tickets to a standardized format recognized by various components within a ticket management system.

[0133] FIG. 5 shows an illustrative process **500** that may be performed by a ticket parsing application to convert an incoming locate request ticket into a parsed ticket.

[0134] At act **502**, the ticket parsing application may identify a source or origin of an incoming ticket (e.g., a particular one-call center that generated the incoming ticket). This may be accomplished in a number of different ways. For example, the ticket parsing application may simply search the ticket to determine whether the originating one-call center is identified in the ticket itself. Alternatively, if the ticket is received via email, the ticket parsing application may identify the originating one-call center by examining the sender's email address. As yet another example, the ticket parsing application may search the ticket for some indication of a geographic area to which the work site belongs (e.g., a city or town name) and identify a one-call center serving that geographic area.

[0135] At act **504**, the ticket parsing application may retrieve or otherwise identify a set of parsing rules corresponding to the one-call center identified at act **502**. The parsing rules may allow the ticket parsing application to detect the locations of various information elements within the incoming ticket. In some instances, the information elements may be stored in respective fields in the incoming ticket. There may be a fixed ordering among the various fields, and each field may be a text block (e.g., an alphanumeric character string) of a fixed length. Thus, each field or text block may be found at a corresponding fixed offset from the beginning of the incoming ticket. Alternatively, some of the fields may have variable lengths, and one or more designated markers may be used to demarcate the end of a field (or the beginning of the next field). In that case, the ticket parsing application may locate and process the various fields in a sequential fashion.

[0136] At acts **506** and **508**, the ticket parsing application may identify an information element (e.g., a text block) that has not been processed and proceed to extract information from the identified information element. For example, for a text block corresponding to an address field, the ticket parsing application may simply copy the entire string from the text block. Some minor transformations may be performed at act **510**, such as truncating a street name that exceed a predetermined maximum length. More significant transformations may also be performed. For example, the ticket parsing application may be programmed to recognize alphanumeric codes

and/or abbreviations specific to each one-call center and map those codes and/or abbreviations to some suitable standard representations.

[0137] At act **512**, the ticket parsing application may populate appropriate fields in the parsed ticket with the information obtained at acts **506** and **508**. Then, at act **514**, the ticket parsing application may determine whether there is at least one unprocessed information element in the incoming ticket. If the determination is positive, the ticket parsing application may return to act **506** to identify a next unprocessed information element. Otherwise, the ticket parsing application may end the process **500**, and the parsed ticket may be forwarded to a ticket assessment engine for further processing and analysis.

[0138] It should be appreciated that the process **500** for parsing an incoming ticket is merely illustrative. Depending on the one-call centers' actual practices, other processes and methods may also be suitable for converting an incoming locate request ticket to a standardized format.

V. Auxiliary Information Sources

[0139] As discussed above in connection with FIG. 2, the ticket assessment engine **230** may access various types of auxiliary information from the auxiliary information storage **250** in order to produce the desired assessment outcomes. For example, as shown in FIG. 6, the assessment engine **230** may retrieve one or more stored images **605** from the auxiliary information storage **250**, along with any associated metadata (e.g., geospatial metadata). As discussed in greater detail below, the stored images **605** may be created or modified by a geographic information system (GIS) **610** based on one or more input images **615**.

[0140] For purposes of the present disclosure, an input image **615** may be represented by any source data that, when processed electronically by a suitable computer system, enables the computer system to display an image on a display device. This source data may be in any of a variety of suitable computer-readable formats, including PDF, JPG, BMP, GIF, PNG and the like.

[0141] In some instances, the source data for an image may be generated by scanning a tangible two-dimensional image source, such as paper or cloth. Alternatively, the source data may be generated by an image acquisition device as the result of acquiring a "real-world" scene. Examples of an image acquisition device include a digital camera (either still-frame or video), which may generate pixel information as part of the source data for an image. An image acquisition device may also be a laser scanning device that scans three-dimensional objects to produce coordinate information in a three-dimensional space.

[0142] The following is a non-exhaustive list of exemplary input images (or source data) using which the GIS **610** may create or modify the stored images **605**.

[0143] Manual "free-hand" paper sketches of a geographic area, which may include one or more buildings, natural or man-made landmarks, property boundaries, streets, intersections and/or public works or facilities such as street lighting, signage, fire hydrants, mail boxes, parking meters, etc.

[0144] Various maps indicating surface features and/or extents of geographical areas, such as street/road maps, topographical maps, military maps, parcel maps, tax

maps, town and county planning maps, polygon maps maintained by one-call centers and/or facility owners, virtual maps, etc.

- [0145] Facilities maps illustrating installed underground facilities, such as gas, power, telephone, cable, fiber optics, water, sewer, drainage, etc. Street-level features or landmarks (e.g., streets, buildings, aboveground facilities, etc.) may also be indicated in relation to the depicted underground facilities. Facilities maps may be provided in paper and/or electronic form and may be maintained by, for example, one or more facility owners. For example, a gas company may maintain maps of gas lines, a power company may maintain maps of power lines, and so on.
- [0146] Architectural, construction and/or engineering drawings and virtual renditions of a space/geographic area, including “as built” and/or post-construction drawings.
- [0147] Land surveys, which are plots produced at ground level using references to fixed points such as the center line of a street to indicate the metes and bounds of a building, parcel, utility, roadway, or other object or installation, as well as other related location data.
- [0148] Photographic renderings/images, including street level, topographical, satellite, and aerial photographic renderings/images, any of which may be updated periodically to capture changes in a given geographic area over time (e.g., seasonal changes such as foliage density, which may variably impact the visibility of some features in the geographic area).
- [0149] A grid (e.g., a pattern of horizontal and vertical lines) used as a reference to provide representational geographic information, which may be added as an overlay to an acquired “real world” scene, a drawing, a map, etc.
- [0150] “Bare” data representing geo-encoded information (e.g. lat/long coordinates identifying one or more points), which may be used to construct a virtual image without having captured any “real-world” scene. Such “bare” data may be in any of a variety of computer-readable formats, including XML.
- [0151] In accordance with some embodiments, input images or source data such as those listed above may be analyzed and/or manipulated by the GIS 610 shown in FIG. 6. For example, the GIS 610 may be programmed to “geotag” an input image by associating geospatial metadata with features in the input image. The geospatial metadata may include any suitable combination of lat/long coordinates, altitude, bearing, place names, etc. As another example, the GIS 610 may be programmed to create a computer-aided design (CAD) drawing showing aboveground and/or underground facilities installed in a geographic area, and to associate geospatial metadata with at least some of the facilities shown on the drawing. As yet another example, the GIS 610 may be programmed to align two geotagged images, for example, by scaling one or both of the images and aligning one or more reference points. This process is sometimes referred to as “georeferencing,” and may be useful in combining one or more facilities maps showing different types of facilities installed in the same geographic area.
- [0152] Thus, the GIS 610 may provide a framework for manipulating and displaying images in ways that may facilitate a variety of location-related analyses. As shown in FIG. 6, the ticket assessment engine may be adapted to invoke one or

more services provided by the GIS 610. For example, the assessment engine may submit a geotagged VWL image (e.g., the VWL image 400 shown in FIG. 4) to the GIS 610 and request that the dig area indicators (e.g., the dig area indicators 410) be shown on a facilities map. Upon receiving the request, the GIS 610 may obtain a relevant facilities map, for example, by retrieving one or more existing maps from the auxiliary information storage 250 and combining them if necessary, or by creating a CAD drawing showing all facilities known to be present in the geographic area shown on the VWL image 400. The GIS 610 may then render the dig area indicators 410 as an overlay on the facilities map based on the geospatial metadata associated with the VWL image and the facilities map. An example of the resulting facilities map 700 with the dig area indicators 410 is shown in FIG. 7.

[0153] Images are merely one example of a variety of different types of information that may be used by a ticket assessment engine. Another example is a set of lookup tables, such as the lookup tables 800 shown in FIG. 8. In accordance with some embodiments, the ticket assessment engine may load one or more of these lookup tables and use them to map locate operation attributes to intermediate or final assessment outcomes. The locate operation attributes may be raw attributes directly obtained from locate request tickets, or derived attributes assigned by the ticket assessment engine based on some raw attributes.

[0154] In the exemplary embodiment shown in FIG. 8, the lookup tables 800 include a complexity lookup table 810, a time lookup table 820, a risk lookup table 830, a value lookup table 840 and a resource lookup table 850.

[0155] The complexity lookup table 810 may be used to assign a suitable measure of complexity to a requested locate operation, and may be indexed with a variety of different locate operation attributes. For example, the complexity lookup table 810 may map the number of facilities to be located and/or each individual facility type (e.g., gas, cable, electric, water, etc.) to a suitable complexity level (e.g., high, medium or low). As another example, the complexity lookup table 810 may map work site details such as high traffic or restricted access to corresponding complexity reason codes that are recognized by various components within a ticket management system (e.g., the ticket management system 200 shown in FIG. 2).

[0156] Similar to the complexity lookup table 810, the time lookup table 820 and the risk lookup table 830 may be used, respectively, to assign an estimated duration and a suitable measure of risk to a requested locate operation. For example, the time lookup table 820 may map each individual facility type (e.g., gas, cable, electric, water, etc.) to a duration estimate per unit length or unit area, and the risk lookup table 830 may map each individual facility type to a suitable risk score. Additionally, the time lookup table 820 and the risk lookup table 830 may, respectively, map work site details such as high traffic or restricted access to corresponding scaling factors for increasing or decreasing a duration estimate and a risk score.

[0157] The value lookup table 840 may be used to associate a value to a requested locate operation. The value may be simply the expected revenue to be collected for the work performed, or some other suitable measure of value such as net profit (e.g., revenue less cost) or value at risk. In some embodiments, the value lookup table 840 may correlate complexity with value (e.g., mapping high complexity to high value, medium complexity to medium value, and low com-

plexity to low value), where the complexity level is determined at least in part using the complexity lookup table **810**. In some further embodiments, the value look up table **840** may map each individual facility type (e.g., gas, cable, electric, water, etc.) to a value estimate, which may be a flat rate or a rate per unit length. In yet some further embodiments, the value lookup table **840** may map ticket types (e.g., emergency, short notice, re-mark, etc.) to corresponding adjustment values for increasing or decreasing a value. For example, extra fees may be collected for an emergency locate operation, while a re-mark operation may not be billed to a customer if the locate service provider is at fault (e.g., the locate service provider did not adequately respond to the locate request ticket during a first visit, which was already billed to the customer).

[0158] The resource lookup table **850** may be used to determine any equipment requirements and/or technician certification and/or minimum skill level requirements for a requested locate operation. For example, locate technician skill levels may be ranked from 1-10, with 10 being the most skilled. The resource lookup table **850** may map high complexity to skill levels 8-10, medium complexity to skill levels 4-7, low complexity to skill levels 1-3, where the complexity level is determined at least in part using the complexity lookup table **810**. As another example, the resource lookup table **850** may map each individual facility type (e.g., gas, cable, electric, water, etc.) to one or more technician certifications (e.g., gas-certified, cable-certified, electric-certified, water-certified, etc.). As yet another example, the resource lookup table **850** may map each individual facilities type (e.g., gas) to one or more required or recommended tools or pieces of equipment (e.g., a gas detection tool).

[0159] It should be appreciated that the set of lookup tables **800** is provided herein for purposes of illustration only. For example, although lookup tables may provide quick access to data, other types of data structures may also be used to store the information contents described above. Also, a ticket assessment engine may access other types of information contents in addition to, or instead of, those described above. For example, in determining a risk level associated with a requested locate operation, a ticket assessment engine may access historical records of previously completed locate request tickets to determine whether there is a high concentration of past damage reports within the proximity of the currently requested locate operation. A historical record of a previously completed locate request ticket may also store information collected during the corresponding locate and/or marking operation. For example, the record may store an actual duration of the operation and/or actual durations of various tasks that are part of the operation. The record may further indicate whether an accident occurred during subsequent excavation (e.g., whether one or more underground facilities were damaged during excavation).

[0160] As another example, a ticket assessment engine may access records pertaining to excavation companies and/or individual excavators. Such records may contain information such as excavation company name and address, individual excavator name and address, excavator type (e.g., pool installer, landscaper, construction company, facility installer, etc.), and/or damage history. In some embodiments, a ticket assessment engine may use the excavator type information and the damage history information to assess the level of risk associated with a currently requested location operation. For example, the ticket assessment engine may return a high risk

classification for a requested locate operation when a corresponding excavation company and/or individual excavator has a significant history of damaging facilities. The ticket assessment engine may further increase a technician skill level requirement for the requested locate operation, as a way to ensure accurate marking and reduce risk.

VI. Location Assessment

[0161] As discussed above, location information provided in a locate request ticket may in some instances be incomplete and/or inaccurate. For example, the address for the work site may be vague or ambiguous (e.g., a street name without any house numbers), or multiple conflicting pieces of location information may be given (e.g., a street address and a pair of lat/long coordinates that do not match). In these situations, additional analysis may be needed to increase the level of confidence that a locate technician is being dispatched to the correct location. For example, additional location information may be extracted from a textual description of the work site that is included in the ticket, and/or from one or more virtual white lines (VWL) images associated with the ticket.

[0162] FIG. 9 shows an illustrative process **900** that may be performed by a ticket assessment engine to selecting the best available location information and refine the location information when necessary.

[0163] At act **902**, the ticket assessment engine may collect one or more pieces of location information from a locate request ticket (e.g., the parsed ticket **215** as shown in FIG. 2). For example, the ticket assessment engine may extract from the ticket a work site address, coordinates for vertices of a polygon generated by the originating one-call center, and/or any VWL images attached to the ticket. In some instances, the ticket may additionally contain portions of free text (e.g., in a "Remarks" field recording an excavator's description of the dig area and/or the reason for excavation). The ticket assessment engine may be programmed to intelligently extract location information from these portions of free text, for example, by searching for relevant phrases such as "next to," "across from," "near," etc. Alternatively, the ticket assessment engine may prompt a human user to read the portions of free text and manually enter any relevant location information.

[0164] At act **904**, the ticket assessment engine may select a piece of location information from the multiple pieces of location information collected at act **902**. This selection may be based on levels of confidence, that is, the ticket assessment engine may select the piece of location information that is deemed the most trustworthy or reliable. In some embodiments, a geotagged VWL image may be considered the most reliable among all types of location information. As such, it may be selected whenever available. If a geotagged VWL image is not available, then a complete address (e.g., with city, street name and house number) may be selected over other pieces of location information, such as a one-call center polygon. If neither a geotagged VWL image nor a complete address is available, then coordinates for the centroid of a one-call center polygon may be computed and reverse-geocoded to obtain an address.

[0165] The ticket assessment engine may also perform one or more consistency checks on the collected location information. For example, the ticket assessment engine may reverse-geocode at least some of the available coordinates to determine if the coordinates correspond to a point that falls within the city, county, and/or state indicated on the ticket.

[0166] At act 906, the ticket assessment engine may determine whether the location information selected at act 904 has a sufficiently high confidence level. If the determination is positive, then the process 900 ends and the selected location information may be recorded and used throughout the rest of the assessment process carried out by the ticket assessment engine. If the determination is negative, the ticket assessment engine may make a best-effort attempt at refining the location information at act 908.

[0167] FIG. 10 illustrates an exemplary method for refining location information. In this example, a street name (e.g., “Main Street”) is available, but without a house number. A one-call center polygon 1000 is also available. The ticket assessment engine may be programmed to determine the coordinates for the points 1005A and 1005B, at which Main Street intersects the one-call center polygon 1000. These coordinates may then be reverse-geocoded to obtain an address range on Main Street that falls within the one-call center polygon 1000. If the address range is sufficiently small, the ticket assessment engine may simply select the address range as the prevailing location information. If, however, the address range is too large, the ticket assessment engine may narrow it down by computing the centroid of the one-call center polygon 1000 and selecting one or more addresses 1005C that are closest to the computed centroid.

[0168] It should be appreciated that the various rules and methods described above in connection with FIGS. 9 and 10 are merely illustrative, as other rules and methods may also be used to select, verify and/or refine location information. Also, the ticket assessment engine may invoke the services of a geographic information system (e.g., the GIS 610 shown in FIG. 6) to perform any of the computational tasks described above.

VI. Scope Assessment

[0169] In assessing the scope of a locate request ticket, a ticket assessment engine may determine the nature and amount of work to be done in response to the ticket. The result of scope assessment may be used in a number of subsequent assessment processes, such as complexity, time, risk, value and/or resource requirements. For example, during scope assessment, the number and types of facilities to be located may be determined or verified, which may in turn be used to determine complexity (e.g., whether a high profile facility type is involved), time (e.g., an estimated duration for each facility type), risk (e.g., whether a high risk facility, such as gas, is involved), value (e.g., an estimated revenue to be collected for each facility type) and/or resource requirements (e.g., certification requirements for each facility type).

[0170] In some instances, a one-call center may compile some form of ticket scope information and include the information in a locate request ticket. For example, a one-call center may generate a polygon and determine, based on the polygon, which facility types are to be listed on the ticket. However, such information from one-call centers may not always be accurate, and therefore it may be desirable to independently generate and verify ticket scope information.

[0171] FIG. 11 shows an illustrative process 1100 that may be performed by a ticket assessment engine to assess the scope of a locate request ticket.

[0172] At act 1102, the ticket assessment engine may extract various pieces of information from the ticket to determine at least one characteristic of the planned dig area (e.g., size, shape and/or boundaries). For example, if a geotagged

VWL image is available, the ticket assessment engine may determine the dig area boundaries based on the dig area indicators and the geospatial metadata associated with the VWL image. As discussed above, the ticket assessment engine may associate a higher level of confidence to the VWL image, compared to a polygon generated by the one-call center. Therefore, in some embodiments, the VWL image may be used in lieu of the one-call center polygon in determining ticket scope.

[0173] The ticket assessment may also use other types of information during act 1102. In some embodiments, the ticket assessment engine may search for scope information in one or more free text portions of the ticket. For example, the ticket assessment engine may be programmed to search for keywords related to landmarks (e.g., sidewalk, playground, etc.) and/or directions (e.g., north, east, south, west, etc.). If one or more keywords are found, the ticket assessment engine may prompt a human user to read the free text and enter any additional scope information.

[0174] At act 1104, the ticket assessment engine may determine the reason for and/or method of excavation, which may be used to determine other scope-related parameters such as excavation depth and/or dig area size.

[0175] The reason for excavation may sometimes be given explicitly in the ticket. For example, as shown in FIG. 3, the ticket 300 may indicate under the excavation information 306 and the excavator information 310 that a conduit is being installed for a telephone company. In other situations, the reason for excavation may be found in a free text description given by the excavator, and the ticket assessment engine may search for informative keywords or key phrases in the free text description. For example, words such as “pool” and “mail-box” may be commonly used when describing the reason for excavation, and the ticket parsing application may be programmed to recognize these words and extract relevant portions of the free text. In some further situations, the reason for excavation may be inferred based on excavator information. For instance, if the excavator is a plumbing company, the reason for excavation is likely to be installing water and/or sewer lines. On the other hand, if the excavator is a pool contractor, the reason for excavation is likely to be installing a swimming pool.

[0176] In some embodiments, the excavation information may indicate a method of excavation, which may be helpful in estimating the extent of the excavation activities. Certain methods of excavation, such as blasting and/or boring, may be more likely to cause accidents compared to other methods. For example, where blasting is planned, it may be desirable to include in the dig area a circular area of a certain radius centered at the planned location of blasting. As another example, where boring is planned, it may be desirable to include in the dig area all areas within a certain distance from the planned locations of boring. The particular radius and/or distance may be selected based on a number of different factors, e.g., government regulations, contractual obligations, insurance requirements, industry best practices, and/or the locate service provider’s risk tolerance levels.

[0177] At act 1106, the ticket assessment engine may determine or verify the number and types of facilities to be located. Alternatively, the ticket assessment engine may verify the list of one-call center members (or facilities owners) who are notified of the ticket. As discussed above, it may be desirable to independently verify this type of information, even though it may be already provided by the one-call center.

[0178] The ticket assessment may use a variety of auxiliary information (e.g., as stored in the auxiliary information storage **250** shown in FIG. 2) in determining or verifying the number and types of facilities to be located. For example, the ticket assessment engine may access one or more facilities maps illustrating installed underground facilities and street-level landmarks. In some instances, the facilities maps may be geotagged, which may enable overlaying a polygon or dig area indicators onto the facilities maps (e.g., as shown in FIG. 7) to determine whether one or more items on the facilities maps fall within the dig area or are sufficiently close to the dig area.

[0179] Continuing to act **1108**, the ticket assessment engine may determine scope information for each individual facility type determined at act **1106**. For example, the ticket assessment engine may compare the dig area boundaries (e.g., as indicated by dig area indicators or a polygon) against a respective facilities map. This may facilitate subsequent time estimation (e.g., different facility types may have different duration estimates per unit length or unit area). It may also facilitate billing after the ticket has been completed (e.g., some facility owners may be billed on a per ticket basis, while other facility owners may be billed per unit of work performed).

[0180] Although detailed examples of scope-related analyses are described above in connection with FIG. 11, it should be appreciated that the inventive concepts disclosed herein are not limited to any specific implementations. For example, to the extent that the analyses are independent from each other, they may be performed in any suitable order (e.g., not necessarily in the order presented in FIG. 11). As a more specific example, the determination of excavation reason and/or method at act **1104** may be carried out prior to, or concurrently with, the determination of dig area characteristics at act **1102**. Other variations may also be possible.

V. Complexity Assessment

[0181] In various embodiments, a ticket may be considered more or less complex for a number of different reasons, such as the number and types of facilities to be located, work site characteristics and/or some other suitable combination of factors. Therefore, complexity assessment may very broadly encompass any types of analysis to categorizes and/or annotate a ticket in such a way that facilitates subsequent handling of the ticket. For example, the outcomes of complexity assessment may be presented in any suitable manner (e.g., using numerical scores and/or user-defined categories), and may inform any other assessment process, such as time, risk, value or resource requirements. Furthermore, complexity assessment may take into account any suitable input information, such as information directly available from a ticket, or information derived based on the ticket and/or other auxiliary information.

[0182] FIG. 12 shows an illustrative process **1200** that may be performed by a ticket assessment engine to assess the complexity of a locate request ticket, in accordance with some embodiments.

[0183] At act **1202**, the ticket assessment engine may perform a keyword search on the ticket to look for any keywords that may trigger a complexity designation. For example, service contracts with some facility owners may include special requirements for the handling of certain types of “high profile” facilities (e.g., gas pipes and/or fiber optic cables), and a locate service provider may receive higher compensation for

complying with these special requirements. A locate service provider may also have internal regulations designating certain facilities as being “high profile.” This may be done, for example, for risk management purposes. Thus, when the ticket assessment engine detects the presence of one or more high profile facility types (e.g., gas or fiber optic), the ticket may be put into a complexity category of “high profile.” Additionally, one or more reason codes and/or descriptions may be given to indicate why the ticket has been categorized under “high profile.”

[0184] In some embodiments, the designation of “high profile” may also take into account a location of the work site. For example, although telephone and/or electric facilities may not ordinarily be considered “high profile,” one or more sections of these facilities may be designated as such because they serve a special area, such as a hospital or military base. (This may be the case even if the work site itself is outside the special area.) Accordingly, the ticket assessment engine may use the work site location in conjunction with one or more facilities maps to determine whether any facilities to be located serve one or more special areas. If so, the ticket may be put into the “high profile” category along with an appropriate reason code and/or description.

[0185] Continuing with FIG. 12, the ticket assessment engine records, at act **1204**, the complexity category assigned to the locate request ticket during act **1202**, along with any reason codes and/or descriptions. This recording may be done in any suitable manner that allows the assigned complexity category to be later accessed using some information associated with the ticket. For example, the ticket assessment engine may store the assigned category in a database entry that can be indexed using a ticket serial number. Alternatively, the ticket assessment engine may insert the assigned complexity category into a work order created for the ticket (e.g., work orders **235A-C** shown in FIG. 2).

[0186] At act **1206**, the ticket assessment may determine whether the work site falls within some complexity region. For example, the ticket assessment engine may access a data storage (e.g., the auxiliary information storage **250**) to obtain a set of polygons representing, respectively, a set of predetermined complexity regions. Each of the polygons may be specified by the set of coordinates for its vertices, and may be associated with a complexity category indicating why the region has been designated as a complexity region. A more detailed description of the complexity category may also be provided.

[0187] The ticket assessment engine may then geocode an address of the work site and determine whether the resulting coordinates fall within any of the complexity regions represented by the polygons. If the coordinates do fall within at least one complexity region, the ticket assessment engine may proceed to act **1208** to store the corresponding complexity category and/or complexity category description.

[0188] It should be appreciated that the polygons representing complexity regions may be generated in a number of different ways, as the present disclosure is not limited in this respect. For example, a geographical information system (e.g., the GIS **610** shown in FIG. 6) may be used to analyze one or more facilities maps, either alone or in combination, to identify any geographical area with a high concentration of underground facilities. As another example, some commercially available digital map data may contain information delimiting various geographical regions of interest, such as highways, railroad tracks, parks, hospitals, military bases,

schools, gated communities, zoning parcels, etc. A geographical information system may be used to automatically assign complexity categories to some of these regions. The corresponding delimitation information may then be extracted from the digital map data and used to compute polygons.

[0189] Additionally, a geographical information system may be adapted to allow a human user to manually define a complexity region. For example, a supervisory personnel may, based on local knowledge, designate a certain geographic area as a complexity region and provide an appropriate description (e.g., the area may be known to have defective tracer wires along a certain type of facility, which may increase the difficulty in locating that type of facility). The geographic information system may present a graphic user interface to allow the supervisory personnel to electronically mark the boundaries of the complexity region.

[0190] Returning to FIG. 12, the ticket assessment engine may determine at act 1210 whether the work site is in the proximity of a past ticket categorized as “high profile.” For example, the ticket assessment engine may search a database of past tickets to determine whether the work site is within a given radius (e.g. 100 yards) of a past ticket with a “high profile” designation. If so, the ticket assessment engine may assign the complexity category “high profile potential” to the current ticket and record a reason code “historical high profile” at act 1212.

[0191] At act 1214, the ticket assessment engine may determine whether the locate request ticket is subject to special billing rules. For example, the ticket assessment engine may determine whether the ticket has a linear scope of 0.5 miles or greater (e.g., as determined during the scope assessment process 1100), or whether the work site is at a remote location that requires extended travel. Additionally, the ticket assessment engine may search one or more text fields (e.g., locate instructions, remarks and/or excavation type description) for keywords that might be relevant for billing. Then the ticket assessment engine may consult one or more billing tables to determine whether any special billing rules apply to the current ticket. For example, at act 1216, the ticket assessment engine may set a hourly status indicator to “true,” indicating that the ticket should be billed per unit of work performed, rather than at a flat rate.

[0192] It should be appreciated that the billing tables used by the ticket assessment engine may contain information that is specific to a particular geographic area. For example, different facility owners serving different geographical areas may be billed at different rates using different methods. Therefore, multiple billing tables may be prepared and selected for use based on the geographic areas in which the locate service provider is operating.

[0193] Proceeding to act 1218, the ticket assessment engine may determine a service type (e.g., “emergency,” “short notice,” “re-mark,” “re-stake,” or “re-note”) by performing a keyword search. The search may taken into account common abbreviations such as “shrt” for “short.” If a relevant keyword is found, the ticket assessment engine may record the corresponding service type at act 1220. This information may be used, for example, during the scheduling and dispatch process to determine a due date or deadline for the ticket. It may also be used in determining an appropriate fee to be billed to a customer.

[0194] As discussed in connection with FIG. 2, some of the above-described functionalities relating to complexity

assessment may be expressed via a set of business rules (e.g., one or more of business rules 240 shown in FIG. 2). An exemplary set of complexity assessment business rules is summarized in Table 2 below (BR-001 through BR-005) and described in greater detail in Tables 3-7.

VI. Time Assessment

[0195] As discussed above, various time-related aspects of a locate request ticket may be assessed, such as a due date of the ticket, an estimated duration of the requested locate operation and/or an expiration date of locate marks.

[0196] In some embodiments, the time at which a locate request ticket is generated (e.g., when an excavator notifies a one-call center regarding planned excavation activities) may be used to estimate one or more deadlines. For example, depending on a service type associated with the ticket (e.g., emergency, short notice, re-mark, etc.), a locate service provider may have more or less time to respond to the ticket. As a more specific examples, the locate service provider may be required (e.g., by government regulations and/or locate contract provisions) to respond to an emergency ticket within a short window of time (e.g., two to four hours after the ticket is generated), whereas normal tickets may be completed within a longer window of time (e.g., 48 or 72 hours after the ticket is generated).

[0197] The time of ticket generation may also be used to determine when the locate marks placed by a technician at the work site will expire. For instance, in some jurisdictions, an excavator may be required by law or regulation to request a “re-mark” operation if the planned excavation activities are not completed within a certain period of time (e.g., on the order of days, such as seven or 14 days) after the original ticket is generated. In response to such a request, a new (but related) work order may be created to dispatch a locate technician to the work site to repeat the locate operation and/or refresh the locate marks previously placed (e.g., by spraying more paint on the ground at previously marked locations). If the planned excavation activities are not completed within a longer period of time (e.g., on the order of weeks, such as three or four weeks), the ticket itself may be said to have expired, and the excavator may be required by law or regulation to initiate a new locate request ticket.

[0198] In some further embodiments, the duration of a locate request ticket (i.e., the amount of time worked by a locate technician to complete the requested locate operation) may be estimated using statistical information collected from previously complete locate request tickets. For example, a ticket assessment engine may access a historical average and/or standard deviation for tickets of a certain type (e.g., tickets having a certain combination of features). This information may then be used to establish an adjustment and/or scaling factor to be applied to future tickets of the same type (e.g., having the same combination of features).

[0199] FIG. 13 shows an illustrative process 1300 that may be performed by a ticket assessment engine to estimate the duration of a locate request ticket, in accordance with some embodiments.

[0200] At act 1302, the ticket assessment engine may establish an initial duration estimate, for example, based on the total number of facilities to be located (e.g., as determined or verified during the scope assessment process 1100). More specifically, if the ticket is an N-locate ticket (i.e., there are N different types of facilities to be located), the ticket assessment engine may obtain the historical average duration for all

previously complete N-locate tickets. Alternatively, the ticket assessment engine may obtain the standard deviation in addition to the average, and determine a duration estimate such that, with high probability, at least a desired percentage (e.g., 95 percents) of all N-locate tickets will have a duration not exceeding the duration estimate. Such an estimate may be computed using any known techniques, such as Chebychev's inequality.

[0201] In addition to the number of facilities types to be located, other ticket characteristics may also be used to determine a subset of previously completed tickets based on which a historical average duration is computed. For example, a historical average duration may be computed for all previously completed tickets located within a certain geographical area (e.g., as specified by a geofence). As another example, a historical average duration may be computed for all previously completed tickets having one or more common types of facilities (e.g., gas, cable, water, electric, etc.). As yet another example, a historical average duration may be computed for all previously completed tickets having a suitable combination of ticket characteristics, such as all tickets completed within the past three months in a specified city or neighborhood.

[0202] At act 1304, the ticket assessment engine may, based on a number of different factors, determine on or more adjustments to be applied to the initial duration estimate established at act 1302. For example, an adjustment may be assigned to each facility type based on observed averages. More specifically, if an N-locate ticket having a first facility type (e.g., gas) is on average 4 minutes longer than an N-locate ticket not having the first facility type, then an adjustment of 4 minutes may be assigned to the facility type "Gas." On the other hand, if an N-locate ticket having a second facility type (e.g., sewer) is on average 3 minutes shorter than an N-locate ticket not having the second facility type, then an adjustment of -3 minutes may be assigned to the facility type "Sewer."

[0203] As another example, an adjustment may be determined based on complexity region type (e.g., as determined at during act 1206 shown in FIG. 12). More specifically, it may have been observed that an average ticket having a complexity region type "Gated" (e.g., the work site is within a gated community requiring some form of access approval, such as an access code) is 15 minutes longer than an overall average. Then an adjustment of 15 minutes may be assigned to all tickets having a complexity region type "Gated." Alternatively, an appropriate adjustment may be chosen to guarantee that, with high probability, all tickets with complexity region type "Gated" will have a duration not exceeding the average duration plus the adjustment. Such an adjustment may be chosen using any known techniques using standard deviation information.

[0204] Similarly, adjustments may be determined for other complexity region types, such as military base (e.g., 35 minutes, due to strict verification procedures for access permits) and/or regions with aerial power lines (e.g., -10 minutes, because aerial power lines may be located without special equipment).

[0205] At act 1306, various scaling factors may be established for the duration estimate. For example, if a ticket is determined to be high profile with a certain reason code (e.g., as in act 1202 shown in FIG. 12), the reason code may be used to index an appropriate scaling factor. In some embodiments, the scaling factor may be 1.15 for a high profile ticket with no

reason code given, 1.38 for the reason code "Fiber Optic," and 1.23 for reason code "HCPhone" (or high capacity phone line).

[0206] A similar, but not necessarily identical, set of scaling factors may be chosen for tickets with high profile potential under reason code historical high profile (e.g., as determined in act 1210 shown in FIG. 12). For example, the scaling factors for no reason code, reason code "Fiber Optic" and reason code "HCPhone" may be, respectively, 1.08, 1.3 and 1.18.

[0207] Other complexity designations may also be used to establish scaling factors. For example, if a ticket's hourly status indicator is set to "true" (e.g., as in act 1214 shown in FIG. 12), the corresponding duration estimate may be scaled based on an estimated size of the dig area (e.g., in length or in area). More specifically, the scaling factor may be obtained by dividing the length of the dig area by a base value (e.g., 0.5 miles), or by dividing the area of the dig area by a base value (e.g. 10000 square feet). Similarly, the service type of a ticket (e.g., as determined in act 1218 shown in FIG. 12) may be used to look up a corresponding scaling factor, such as 1.23 for emergency and 1.82 for short notice. On the other hand, a scaling factor of less than 1 (e.g., 0.9, 0.8, or 0.6) may be used for a re-mark or re-note operation, assuming the same technician who performed the previous operation is dispatched to perform the re-mark or re-note, in which case the technician may be more efficient during the subsequent visit because he is already familiar with the work site.

[0208] It should be appreciated that all of the scaling factors may be determined based on average and/or standard deviation information using techniques similar to those described above for establishing adjustments. Other techniques may also be possible, such as manual optimizations.

[0209] Proceeding to act 1308, any adjustments determined at act 1304 and scaling factors determined at act 1306 may be applied in a suitable manner to the initial duration estimate determined at act 1302. For example, all adjustments may be applied (e.g., added to the duration estimate), and then all scaling factors may be applied (e.g., multiplied with the duration estimate). Other methods may also be possible, such as breaking down the duration estimate into different components (e.g., one for each facility type) and applying appropriate adjustments and/or scaling factors to the individual components, in addition to, or instead of applying adjustments and/or scaling factors to the overall duration estimate.

[0210] Although time assessment is performed on the basis of a locate request ticket in the above described example, it should be appreciated that the present disclosure is not so limited. Rather, time assessment may be performed with respect to any suitable unit of work, which may be larger or smaller than a locate operation corresponding to a locate request ticket. For instance, in various embodiments, time assessment may be performed with respect to a collection of related locate operations, or with respect to one or more tasks within a single locate operation. Examples of tasks include, but are not limited to, traveling to a work site, reviewing a ticket in preparation for the corresponding locate operation, reviewing a relevant map, equipment preparation, locating one or more facilities, marking one or more facilities, preparing documentation (e.g., electronically or on paper) upon completion of a ticket, and/or preparing for departure from work site. Where appropriate, each of these tasks may be further broken down into subtasks, for example, based on facility type.

[0211] As with complexity assessment, some or all of the above-described functionalities relating to time assessment may be expressed via a set of business rules (e.g., one or more of business rules 240 shown in FIG. 2). An exemplary set of time assessment business rules is summarized in Table 2 below (BR-006 through BR-012) and described in greater detail in Tables 8-14.

VII. Risk Assessment

[0212] In various embodiments, risk assessment may include estimating the extent of potential damages (e.g., economic losses, property and/or environmental damages, personal injuries, etc.) in the event of an accident during subsequent excavation. Additionally, or alternatively, risk assessment may include estimating a likelihood that an accident would occur given a set of circumstances (e.g., as described in a locate request ticket and/or inferred therefrom).

[0213] Risk assessment may be of interest to different entities associated with locate and/or marking operations. For instance, a locate service provider may wish to assess a level of potential liability for damages in an accident where the locate service provider is at fault (e.g., failing to complete a locate operation by a required deadline or inadequately performing a location operation). On the other hand, a facilities owner may wish to assess the extent of potential damage (e.g., the number of customers who may experience service interruption and/or costs for repairing damaged facilities). If the scope of potential damages is sufficiently large, the facilities owner may decide to dispatch an in-house locate technician to perform a locate operation, instead of contracting the operation to a locate service provider. As another example, the facilities owner may determine that more stringent safety procedures may be appropriate where personal injuries are likely (e.g., where a work site is located in a populous area, such as near a school or a shopping mall), and therefore may also decide to dispatch its own team of locate technicians for a better quality guarantee.

[0214] In some embodiments, the risk associated with a locate request ticket may be represented as a numerical score (e.g., a number between 1 and 100) or a broad category (e.g., high, medium or low). As discussed in greater detail below, the score or category may be determined based on historical data, such as the frequency and extent of damage among a certain class of previously completed tickets. This risk measure may be used to flag some of the incoming tickets for special consideration and/or handling. For example, it may be required that a high risk ticket be handled only by a technician with a high level of skill. Alternatively, or additionally, a high risk ticket may require supervisory review after completion, to check for any errors that may have been made by the technician performing the requested locate operations. In this manner, risk assessment may reduce the likelihood of accidents, and may thereby improve the profitability of the locate service provider's operations.

[0215] FIG. 14 shows an illustrative process 1400 that may be performed by a ticket assessment engine to compute a risk measurement (e.g., a numerical score or category) associated with a locate request ticket, in accordance with some embodiments.

[0216] At act 1402, a risk score may be established for each facility type to be located. For example, gas, electric and water may be assigned a risk score of 2.5, 0.7 and 0.2 respectively. These scores may be determined based on a number of different factors, such as the frequency of damages related to

a facility type (e.g., the percentage of gas locates that resulted in damage reports) and the extent of damages related to a facility type (e.g., the average monetary value of claims resulting from damages to gas pipes). Finer distinctions may also be made, such as assigning different risk scores based on attributes of facilities of the same type. For example, damages to water mains may result in very high claim amounts (e.g., streets may collapse due to a ruptured water main), while damages to water lines leading a customer's premise may be minor and easy to repair. As another example, the diameters of gas pipes may be taken into account, where thicker pipes may be associated with lower gas pressure and may be more at risk for explosions.

[0217] At act 1404, the various risk scores determined at act 1402 may be summed to obtain an overall risk score for the ticket. Then, at act 1406, one or more appropriate scaling factors may be determined for adjusting the overall risk score. For example, the ticket assessment engine may access a database of past damage reports to determine whether the work site and/or dig area for the current ticket is within a given radius (e.g., 500 yards) of one or more past damage reports and, if so, computes the total amount of claims from all of the damage reports within this radius. This total amount may in turn be used to lookup an appropriate scaling factor for the risk score, for example, as shown in Table 16 below.

[0218] In addition to damage reports, scaling factors may, in some embodiments, be determined based on proximity to one or more mis-locates. A mis-locate is said to have occurred when an error in connection with a locate and/or marking operation is discovered (e.g., during subsequent excavation), although the error may not have manifested itself as an accident. In some further embodiments, proximity to one or more past trouble tickets may also be used in determining a scaling factor. Trouble tickets may include any previously completed tickets whose records indicate one or more operational irregularities. For example, a past ticket may be designated as a trouble ticket if the technician dispatched to the work site had difficulty locating a certain type of facilities and had to call his supervisor for special instructions.

[0219] As another example, the ticket assessment engine may determine whether the excavator who submitted the excavation notice corresponding to the current ticket has a significant history of damages. This history can be measured in a number of different ways. For example, an average damage amount (e.g., in dollar value) per excavation (or locate operation) may be computed for at least some of the excavators for whom historical information is available. The average may be computed over a certain time frame (e.g., the past six months, or one, two, three, five or ten year). The average across different excavators may also be computed.

[0220] Then the ticket assessment engine may compare a particular excavator's average damage amount against the average across all excavators, for example, by expressing the former as a percentage of the latter. This percentage may be used to look up a corresponding scaling factor for the overall risk score of the ticket (e.g., as shown in Table 17 below).

[0221] Alternatively, or additionally, a damage count (e.g., the number of damage reports irrespective of the dollar amount for each report) may be obtained for each excavator and compared against an average damage count across different excavators, for example, over a certain time frame (e.g., the past six months, or one, two, three, five or ten year). Again, a particular excavator's damage count may be expressed as a

percentage of the average damage count, and the percentage may be used to look up an appropriate scaling factor (e.g., as shown in Table 17 below).

[0222] Complexity designations such as high profile may also be used to determine one or more appropriate scaling factors for the overall risk score. For example, if a ticket is determined to be high profile with a certain reason code (e.g., as in act **1202** shown in FIG. **12**), the reason code may be used to index an appropriate scaling factor. In some embodiments, the scaling factor may be 1.8 for a high profile ticket with no reason code given, 4.0 for the reason code “Fiber Optic,” and 2.5 for reason code “HCPhone” (e.g., as shown in Table 18 below).

[0223] As another example, if a ticket’s hourly status indicator is set to “true” (e.g., as in act **1214** shown in FIG. **12**), the corresponding risk estimate may be scaled based on an estimated size of the dig area (e.g., in length or in area). In the embodiment described in Table 20 below, the scaling factor may be obtained by dividing the length of the dig area by a base value (e.g., 0.5 miles), or by dividing the area of the dig area by a base value (e.g. 10000 square feet). Similarly, the service type of a ticket (e.g., as determined in act **1218** shown in FIG. **12**) may be used to look up a corresponding scaling factor, such as 2.85 for emergency, 3.46 for 2-hour short notice, and 3.11 for 3-hour short notice (e.g., as shown in Table 19 below).

VIII. Value Assessment

[0224] As discussed above, value assessment may be performed according to different measures of value. For instance, value assessment may be performed from the perspective of a locate service provider based on business value created by performing a locate operation. In some embodiments, such business value may simply be the revenue collected for performing the locate operation. Alternatively, or additionally, a measure of net profit may be used, where various operating costs may be subtracted from the revenue.

[0225] In some embodiments, a measure of profit may take into account information from one or more contracts established between a locate service provider and a facilities owner (or some other entity contracting with the locate service provider to perform locate operations). Examples of contractual information include, but are not limited to, contractual provisions specifying bonuses and/or penalties for certain tickets. For instance, a locate contract may provide that a penalty (e.g., a suitable percentage of the contract price for performing a locate and/or marking operation) be assessed if the locate service provider fails to meet a deadline specified in a locate request ticket. Accordingly, the value associated with the ticket may be a function of time that has a sharp decline at the specified deadline. As an other example, the locate contract may further provide that a penalty be assessed for each billing period during which the locate service provider fails to timely respond to an excessive number of tickets. Any suitable mechanism may be used to define when a penalty should be assessed, such as a percentage threshold (e.g., more than 5%, 10% or 15% of tickets being completed late). The penalty may also be assessed in any suitable manner, for example, in the form of a fixed percentage (e.g., 1%, 2%, 3% or 5%) applied to all tickets, or with step increases (e.g., penalizing more heavily when a higher percentage of tickets are completed late). Accordingly, the value associated with the current ticket may depend not only on the time at which the requested operation is performed, but also on the number of

tickets that have been completed late in the same billing period. For example, if the percentage of tickets that have been completed late in the same billing period is approaching 5%, the decline in value at the ticket deadline may include not only the penalty for missing the deadline of the individual ticket, but also the penalty for missing the deadlines of 5% of the tickets in that billing period.

[0226] In some further embodiments, value assessment may be performed from the perspective of an entity other than the locate service provider, such as a facilities owner, an excavator, a one-call center, a community (e.g., city, town, village, and/or other form of municipality) and/or an insurance company. One or more of these entities may perform value assessments based on their interests and concerns. For instance, a facilities owner may measure value in terms of value at risk (e.g., potential costs for repairing damages to facilities and/or restoring services in the event of an accident). Likewise, a community may use a value-at-risk measure, but the potential damages may be different (e.g., repairing property damage and/or environmental cleanup).

[0227] Additionally, value need not be restricted to monetary value. It may be any custom defined value, or even a time-varying function. For example, as discussed above, the value estimate may be provided to a scheduling and dispatch application (e.g., the scheduling and dispatch application **260** shown in FIG. **2**), which may use the value estimate to prioritize activities. Thus, the value estimate may be used as a means to encourage a desired scheduling behavior. For example, if a ticket falls within a certain geographic area known to have heavy traffic during certain times of day, the value estimate may be defined as a function that has lower value during the periods of heavy traffic and higher values elsewhere. This may encourage the scheduling and dispatch application to avoid dispatching the ticket during the periods of heavy traffic.

[0228] Similarly, the ticket assessment engine may access an up-to-date source of weather information and define the value estimate as a time-varying function according to the weather forecast for the work site. For instance, the value estimate function may be defined in such a way that the scheduling and dispatch application is encouraged to avoid dispatching a technician to the work site in weather conditions that may hinder the locating and marking of underground facilities (e.g., rain or snow).

[0229] FIG. **15** shows an illustrative process **1500** that may be performed by a ticket assessment engine to compute an estimated value (e.g., expected revenue) for a locate request ticket.

[0230] At act **1502**, the ticket assessment engine may determine if the ticket is a duplicate ticket, such as a re-mark, re-stake or re-note ticket. Under some service contracts, such tickets may not be billed if the re-mark, re-stake or re-note is necessitated due to some action, or lack of action, by the locate service provider. Additionally, some service contracts may specify that two tickets transmitted on the same day are duplicate tickets if the corresponding work sites are sufficiently close to each other, and that only one of the duplicate tickets may be billed.

[0231] If the ticket is determined to be a duplicate ticket, then the ticket assessment engine sets the revenue to zero at act **1504**. Otherwise, the ticket assessment engine may determine the applicable billing method at act **1506**, for example, whether the ticket should be billed at a flat rate, per unit of work performed, or per hour worked.

[0232] If the ticket is to be billed at a flat rate, the ticket assessment engine may proceed to act **1508** and consult a billing rate table to select an appropriate flat rate, for example, based on the type of facility located and/or the identity of the facility owner. Otherwise, the ticket assessment engine may proceed to act **1510** and determine an appropriate billing rate, which may be either per unit of work performed (e.g., unit length of facility marked, unit area of dig area located, or some other custom-defined unit of work) or per hour worked. Then the ticket assessment engine may proceed to act **1512** to obtain an estimated scope of the ticket (e.g., as determined during the process **1100** shown in FIG. **11**) or an estimated duration of the ticket (e.g., as determined during the process **1300** shown in FIG. **13**). Based on the rate information and the scope or time information, the ticket assessment engine may compute an estimated revenue amount for the ticket.

[0233] It should be appreciated that the process **1500** may alternatively be performed on a per facility type basis. That is, a revenue estimate may be determined for each facility type to be located using a process similar to the process **1500**. Then the separate revenue estimates may be summed to obtain a total estimate for the ticket.

[0234] Furthermore, value assessment may take into account one or more other assessment outcomes in addition to, or instead of, estimated scope or duration. For example, as illustrated in FIG. **17** and discussed in greater detail below, value assessment may, directly or indirectly, be informed by assessment outcomes relating to location, complexity, risk, and resource.

[0235] As with other types of assessment, some of the above-described functionalities relating to value assessment may be expressed via a set of business rules (e.g., one or more of business rules **240** shown in FIG. **2**). An exemplary set of value assessment business rules is summarized in Table 2 below (BR-019 through BR-022) and described in greater detail in Tables 20-23.

IX. Resource Assessment

[0236] As discussed above, resource assessment may include identifying one or more resources (e.g., equipment and/or personnel) needed and/or recommended to adequately perform a requested locate operation. For instance, ticket information, auxiliary information and/or outcomes from other types of assessment (e.g., scope and/or complexity) may be analyzed to determine whether any resource requirements and/or recommendations exist for the requested locate operation.

[0237] FIG. **16A** shows an illustrative process **1600A** that may be performed by a ticket assessment engine to identify one or more pieces of equipment that may be required and/or recommended for a locate operation but may not be available to a locate technician under ordinary circumstances (e.g., not included in a standard set of equipment carried by a locate technician).

[0238] At act **1602A**, one or more maps may be retrieved based on a work site location that is obtained either from the ticket information or as an outcome of location assessment. The retrieved maps may be analyzed to identify any equipment that may be useful in performing the requested locate operation. For example, a facilities map may be retrieved and analyzed to determine whether one or more manholes are located at or near the work site and/or whether a locate technician would need to connect a locate transmitter to a connection point in a manhole.

[0239] If it is determined that the locate technician likely needs to remove one or more manhole covers during the course of the locate operation, a “sissy hook” (or “sissy bar”), or a similar device for facilitating manhole recover removal, may be recommended. In some situations, such safety devices may be required by a worker’s safety organization such as the Occupational Safety and Health Administration (OSHA). An insurance company may also require the use of certain safety devices as a precondition to payment of damage or injury claims. Furthermore, if it is determined that a locate technician would need to connect a locate transmitter to a connection point in the manhole, a hot stick may be recommended, which could be used to secure the connection between the locate transmitter and the connection point without the locate technician physically entering the manhole.

[0240] As a further example, it may be determined, at act **1602A**, based on work site location and one or more facilities maps, that the technician likely needs to open a telephone box on a pedestal, in which case the technician may be recommended to bring a pedestal wrench, or a similar tool, for facilitating the opening of a telephone box.

[0241] In addition to facilities maps, one or more street maps may also be retrieved and analyzed at act **1602A**. For instance, it may be determined based on the work site location and one or more street maps that the work site is in an urban setting, in which case a less persistent marking material (e.g., washable paint) may be recommended so as to reduce the impact of the locate marks on the aesthetic appearance of the work site. On the other hand, if it is determined that the work site is in a high traffic area (e.g., on or near a highway), a more persistent marking material (e.g., oil-based paint) may be recommended so as to reduce the likelihood of the locate marks wearing off prior to excavation.

[0242] Continuing with FIG. **16A**, the ticket assessment engine may, at act **1604A**, retrieve and analyze historical information (e.g., one or more records of previously completed locate and/or marking operations). For example, it may be determined based on work site location and historical information that the work site likely has bad tracer wires, in which case a more advanced locate transmitter and/or receiver may be needed to obtain sufficient signal strength (e.g., locate transmitter and/or receiver with different frequency ranges). Alternatively, or additionally, a different type of locate device may be recommended, such as a sonar or ground penetrating radar device (e.g., the “Inspector 07” locator marketed by Subsurface Instruments, Inc.), which may be used to locate underground facilities without being hooked up to tracer wires.

[0243] As another example, it may be determined, at act **1604A**, based on work site location and historical information, that the work site is likely to have such dry ground as to prevent adequate ground connection, in which case the technician may be recommended to bring a bottle of water to wet the ground before attempting to make a ground connection.

[0244] Continuing to act **1606A**, the ticket assessment engine may examine a dig area description (e.g., as provided in a free text portion of the locate request ticket) to identify any special circumstances that may require addition equipment. For instance, the dig area description may indicate that the work site is within a construction zone, in which case the locate technician may be required to wear a hard hat while on site.

[0245] Although specific examples of equipment-related analyses are illustrated in FIG. **16A** and described above, it

should be appreciated that the inventive concepts disclosed herein are not limited to any specific implementations. For instance, the need to remove manhole covers may be inferred based on information other than facilities maps. As one example, if the work site is located in an urban or densely populated area, it is likely that the locate technician would encounter at least one manhole. As another example, an image of the work site (e.g., a VWL image based on an aerial image of the work site) may be consulted to determine whether one or more manholes are present. As yet another example, the need to remove manhole covers may be explicitly indicated in a free text portion of the locate request ticket (e.g., in a locate instructions section). Furthermore, one or more contracts established between a locate service provider and a facilities owner (or some other entity contracting with the locate service provider to perform locate operations) may specify particular tools/equipment requirements for some types of locate operations, in which case the ticket assessment engine would consult auxiliary information such as contract information and any particular contractual obligations therein relating to tool and/or equipment requirements.

[0246] Additionally, the ticket assessment engine may recommend or require certain equipment without analyzing any auxiliary information. For instance, a locate technician may be required or recommended to review one or more facilities maps upon arrival at a work site to familiarize himself with the layout of underground facilities at the work site (e.g., general directions of various facilities lines, locations of connection points, etc.) and to plan his work accordingly. Therefore, the ticket assessment engine may identify one or more relevant facilities maps (e.g., based on the work site location) as being recommended or required for the locate operation.

[0247] In some further embodiments, resource assessment may identify a personnel skill level or certification required and/or recommended to perform a locate operation. For example, in some jurisdictions, only a technician with gas certification may be dispatched to perform a locate operation involving gas pipes. In another example, one or more assessment outcomes (e.g., scope, location, complexity, time and/or risk) may be used to determine a minimum skill level requirement for the locate operation. As a more specific example, a ticket may be assigned a high complexity level due to complex layout of underground facilities at or near the work site, in which case it may be desirable to dispatch a technician with knowledge and/or familiarity of the geographical area encompassing the work site.

[0248] In some embodiments, personnel skill level may include both long term measurements (e.g., years of experience and/or cumulative training) and short term measurements (e.g., recent performance evaluations). Furthermore, statistics may be collected regarding each technician's performance patterns. For instance, a technician may consistently perform at a higher level during certain hours of day (e.g., in the morning or in the afternoon), and may be assigned different skill levels depending on the time of day of dispatch.

[0249] FIG. 16B shows an illustrative process 1600B that may be performed by a ticket assessment engine to identify one or more requirements and/or recommendations for selecting a suitable technician to perform a requested locate operation. As discussed above, skill requirements and/or recommendations may refer broadly to any suitable attributes of a technician, including experience level, past performance level (e.g., both long term and short term), certifications, and/or security clearance.

[0250] At act 1602B, the ticket assessment engine may determine skill requirements based on the types of facilities to be located. For example, a contract with a facility owner (e.g., gas) may require that only technicians with the appropriate certification (e.g., gas certification) be dispatched to locate facilities owned by that facility owner. This may be done by consulting a lookup table that maps facility types to skill requirements (e.g., the lookup table 850 shown in FIG. 8).

[0251] At act 1604B, the ticket assessment engine may determine whether the ticket is associated with any complexity types (e.g., as determined during the process 1200 shown in FIG. 12). If so, the ticket assessment engine may look up any skill requirements associated with the identified complexity types. For example, a complexity reason code "Military Base" may indicate that only technicians with certain levels of security clearance may gain access to the work site. As another example, for a high profile ticket (e.g., by reason of high profile facilities types and/or proximity to historical damages), a high level of experience and/or good performance may be recommended.

[0252] At act 1606B, the ticket assessment engine may obtain a risk score for the ticket (e.g., as determined during the process 1400 shown in FIG. 14) and look up any applicable skill requirements. For example, a technician with a high level of experience and/or good performance may be recommended and/or required for a high risk ticket.

[0253] Although detailed examples of resource assessment are described above in connection with FIGS. 16A-B, it should be appreciated that the inventive concepts disclosed herein are not limited to any specific implementations. For example, to the extent that the resource-related analyses are independent from each other, they may be performed in any suitable order (e.g., not necessarily in the orders presented in FIGS. 16A-B).

[0254] As with other types of assessment, some of the above-described functionalities relating to skill requirements assessment may be expressed via a set of business rules (e.g., one or more of business rules 240 shown in FIG. 2). An exemplary skill requirements assessment business rule is described in Table 26 below.

X. Detailed Example of Ticket Assessment

[0255] FIG. 17 shows an illustrative example of a ticket assessment process executed by a multi-stage ticket assessment engine (e.g., the ticket assessment engine 230 shown in FIGS. 2 and 2A), having a network of assessment modules or subprocesses. The assessment modules may be arranged in multiple stages (e.g., six stages), where an assessment module at each stage may receive as input one or more intermediate outcomes of assessment from one or more previous stages. For instance, in the embodiment shown in FIG. 17, a first stage may include a scope assessment module 1710A and a location assessment module 1710B, a second stage may include a complexity assessment module 1820A, a third stage may include a duration assessment module 1730A and a risk assessment module 1730B, a fourth stage may include a resource assessment module 1740A, a fifth stage may include an adjusted duration assessment module 1750A, and a sixth stage may include a value assessment module 1760A.

[0256] In the example shown in FIG. 17, the ticket assessment process may receive as initial input a locate request ticket (e.g., the ticket 300 shown in FIG. 3) as part of ticket information 225. Various information elements may be extracted from the input ticket (e.g., using a ticket parsing

process such as the one shown in FIG. 5 and described above) and provided to various assessment modules. For example, scope-related information such as polygon and/or dig area indicator coordinates and/or member codes identifying one or more notified facilities owners may be extracted and provided to the scope assessment module 1710A. Additionally, one or more relevant facilities maps 255A may be accessed (e.g., from the auxiliary information storage 250 shown in FIG. 2) and provided to the scope assessment module 1710A. Based on these pieces of information, the scope assessment module 1710A may output the number of facilities to be located pursuant to the input ticket, as well as an indication of whether the facilities to be located include one or more high profile gas facilities.

[0257] As a more specific example, with reference to FIG. 3, the member codes shown at 314 (e.g., “FP=W&SA,” “KD=TWNSND WRTR,” “KC=PECO PLMG,” and “XZ=COMCAST CABLE B”) may indicate a total of four facilities types to be located (e.g., sewer, water, gas, and cable). The scope assessment module 1710A may further determine that a high profile gas facilities type is present (e.g., as indicated by the member code “KC=PECO PLMG”).

[0258] As another example, location-related information such as work site address and/or GPS coordinates may be extracted from the input ticket and provided to the location assessment module 1710B. Additionally, one or more relevant street maps 255B may be accessed (e.g., from the auxiliary information storage 250 shown in FIG. 2) and provided to the location assessment module 1710B, which may analyze the street maps 255B to determine whether the work site is likely to be in a rural area (e.g., as distinguished from an urban or suburban area). The outcome of that determination may be output by the location assessment module 1710B.

[0259] As a more specific example, with reference to FIG. 3, the work site address shown at 304A (e.g., “100 St. Francis Ln” in “Bensalem Twp”) may be extracted from the ticket 300 and provided to the locate assessment module 1710B, which may determine that the work site is not located in a rural area.

[0260] Proceeding to the second stage of assessment, one or more outputs of the first stage, such as the indication of whether one or more high profile gas facilities are to be located and the indication of whether the work site is located in a rural area, may be provided to the complexity assessment module 1720A, which may analyze those intermediate assessment outcomes and assign a complexity category to the input ticket. For example, the complexity assessment module 1720A may implement the following decision table.

TABLE 1A

		Location	
		Rural	Not Rural
Scope	High Profile Gas	Medium	High
	Not High Profile Gas	Low	Medium

[0261] As a more specific example, the scope assessment module 1710A may determine that the input ticket does request that one or more high profile gas facilities be located, and the location assessment module 1710B may determine that the work site is not located in a rural area. As a result, the complexity assessment module 1720A may assign a complexity level of “High” to the input ticket.

[0262] Proceeding to the third stage of assessment, one or more outputs of the first and second stages, such as the number of facilities to be located and the complexity category, may be provided to the duration assessment module 1730A, which may analyze those intermediate assessment outcomes and output an estimated duration for completing the input ticket. For example, the duration assessment module 1730A may assume that a certain amount of time (e.g., 10 minutes) may be needed to locate each type of facilities, and that the total duration may be scaled according to the complexity category (e.g., scaling factors of 1, 1.2 and 1.5 may be applied, respectively, to the complexity categories low, medium and high).

[0263] As a more specific example, the scope assessment module 1710A may determine that the input ticket requests a total of four facilities to be located. Because the complexity assessment module 1720A has assigned a complexity level of “High” to the input ticket, the duration assessment module 1730A may compute an estimated duration for the input ticket as follows:

$$4 \text{ facilities types} \times 10 \text{ minutes per facilities type} \times \text{scaling factor } 1.5 = 60 \text{ minutes.}$$

[0264] Additionally, the number of facilities to be located and the complexity category may be provided to the risk assessment module 1730B, which may analyze those intermediate assessment outcomes and assign a risk category to the input ticket. For example, the risk assessment module 1730B may implement the following decision table.

TABLE 1B

		Number of Facilities				
		1	2	3	4	5
Complexity	High	Medium	Medium	High	High	High
	Medium	Low	Low	Medium	Medium	High
	Low	Low	Low	Low	Medium	Medium

[0265] In this example, because the scope assessment module 1710A has determined that the input ticket requests a total of four facilities to be located, and the complexity assessment module 1720A has assigned a complexity level of “High” to the input ticket, the risk assessment module 1730B may assign a risk level of “High” to the input ticket. This outcome may be output by the overall assessment process as a final outcome, Risk Assessment Outcome 1772, which may be used by other ticket manage system components, such as the scheduling and dispatch application 260 shown in FIG. 2.

[0266] The output of the risk assessment module 1730B may also be an intermediate outcome consumed by an assessment module at a subsequent stage, such as the resource assessment module 1740A at the fourth stage, which may determine an appropriate technician skill level according to the risk category assigned to the input ticket. For instance, the resource assessment module 1740A may determine that a high risk ticket may require a technician skill level of “expert,” a medium risk ticket may require a technician skill level of “experienced” or higher, and a low risk ticket may be dispatched to any technician, including those at a “trainee” level. In this example, because the risk assessment module 1730B has assigned a risk level of “High” to the input ticket, the resource assessment module 1740A may determine that an expert technician may be required. As for the risk assessment outcome, the resource assessment outcome may be out-

put as a final outcome, Resource Assessment Outcome **1774**, for use by other ticket manage system components.

[0267] Proceeding to the fifth stage of assessment, one or more outputs of the previous stages, such as the estimated duration and the technician skill requirement, may be provided to the adjusted duration assessment module **1750A**, which may adjust the estimated duration based on technician skill level. For example, the adjusted duration assessment module **1750A** may apply scaling factors of 1, 1.1 and 1.3, respectively, to tickets with technician skill levels of expert, experienced and trainee. As another example, the adjusted duration assessment module **1750A** may apply one or more scaling factors to the estimated duration based on a resource assessment outcome relating to required or recommended equipment. For instance, the estimated duration may be adjusted upward if a piece of additional or more advanced equipment (e.g., an "Innspector 07" locator) is required or recommended.

[0268] In the example illustrated in FIG. 17, because the duration assessment module **1730A** has output 60 minutes as the estimated duration, and the resource assessment module **1740A** has determined that an expert technician may be required, the adjusted duration assessment module **1750A** may compute an adjusted duration for the input ticket as follows:

$$60 \text{ minutes} * \text{scaling factor } 1 = 60 \text{ minutes.}$$

[0269] As for risk and resource, the adjusted duration may be output as a final outcome, Time Assessment Outcome **1776**, for use by other ticket manage system components.

[0270] Proceeding to the sixth stage of assessment, one or more outputs of the previous stages, such as the number of facilities to be located and the adjusted duration, may be provided to the value assessment module **1760A**, which may analyze those pieces of information and estimate the amount of profit to be gained by completing the input ticket. For example, the value assessment module **1760A** may access contractual information from one or more databases to determine an amount of revenue that the locate service provider can expect to collect for completing the input ticket. The value assessment module **1760A** may also access employee and/or company information from one or more databases to determine an estimated cost for completing the ticket, which may include technician compensation, materials costs and/or overhead costs. As a more specific example, the value assessment module **1760A** may determine that the expected revenue rate is \$10 per type of facilities located and the expected cost is \$0.5 per minute worked.

[0271] In this example, because the scope assessment module **1710A** has determined that a total of four facilities types are to be located and the adjusted duration assessment module **1730A** has output 60 minutes as the adjusted duration, the value assessment module **1760A** may compute the estimated profit as follows:

$$4 \text{ facilities types} * \$10 \text{ per facilities type} - 60 \text{ minutes} * \$0.5 \text{ per minute} = \$10.$$

[0272] As for risk, resource and adjusted duration, the estimated profit may be output as a final outcome, Value Assessment Outcome **1778**, for use by other ticket manage system components.

[0273] Although various implementation details are shown in FIG. 17 and described above, it should be appreciated that such details are provided merely for purposes of illustration, and that the present disclosure is not limited to these specific

examples. For example, various assessment modules need not be arranged in linearly ordered stages. Rather, the network of assessment modules can have any suitable configuration (e.g., including one or more loops). Additionally, the business rules implemented by the assessment modules of FIG. 17 are provided solely for purposes of illustration, as other business rules may also be suitable (e.g., the business rules shown in Tables 2-26 below).

XI. Example of Work Order

[0274] FIG. 18 shows an example of a work order **1800** that may be created from an incoming locate request ticket (e.g., the ticket **300** shown in FIG. 3). As shown, the work order **1800** may include a plurality of information elements extracted from the ticket **300**, such as ticket number **1802**, address of work site **1804**, excavation information **1806**, due date information **1808**, excavator information **1810**, etc. These information elements may be presented in the work order **1800** in a different format compared to the ticket **300**. The work order **1800** may also include additional information elements, such as a work order number **1812** different from the ticket number (e.g., multiple different work orders may be created based on the same ticket), an expected duration **1814** (e.g., as determined during the process **1300** shown in FIG. 13) and work order task information **1816** listing the facility types to be located within this work order.

[0275] The work order **1800** may be forwarded by the ticket assessment engine to other software applications for further processing. For example, the scheduling and dispatch application **260** (as shown in FIG. 2) may schedule the work order to commence at a certain date and time (e.g., Jan. 4, 2009 at 9:00 AM, as shown in FIG. 18).

XII. Backend and On-Going Assessments

[0276] As discussed above, a feedback mechanism (e.g., the backend assessment module **290** shown in FIG. 2) may be provided in accordance with some embodiments to review completed tickets and perform various information updates. For example, the various processes carried out by the ticket assessment engine **230** may rely on historical information, such as statistical information regarding previously completed tickets. For improved performance and reliability, it may be desirable to update the historical and/or statistical information on an on-going basis, as more completed tickets are accumulated over time.

[0277] Accordingly, in some embodiments, the backend assessment module **290** may be programmed to make adjustments to the assessment business rules **240** shown in FIG. 2. For example, any historical averages used in the assessment business rules **240** may be updated on a regular basis. As a more specific example, an illustrative business rule BR-007 is shown in Table 9 below, which is based on historical average durations of locate operations. As shown in Table 9, the duration of a 3-locate ticket for which sewer is one of the facility types to be located may be, on average, three minutes shorter than that of a 3-locate ticket without a sewer locate. Such an adjustment in duration may be adjusted regularly (e.g., daily, weekly, monthly, annually, etc.), or according to any other suitable schedule, based on data collected from recently completed locate operations.

[0278] It should be appreciated that the analysis of a previously completed locate operation may be informed by an outcome of the excavation activities that took place subse-

quent to the locate operation. In one illustrative scenario, it may be observed that the duration of the locate operation was two minutes shorter than average. However, it may be further observed that an accident occurred during subsequent excavation and a probable cause of the accident was misplacement of locate marks. In that case, the duration of the locate operation may be considered an anomaly and may not be used to adjust the historical average duration used for assessing future tickets.

[0279] In addition to making adjustments to existing business rules, new rules may be added as new patterns are observed from newly accumulated information. For example, a pattern may emerge that locate operations within 2 miles of central Manhattan, N.Y. are, on average, four minutes longer than locate operations conducted elsewhere. Accordingly, a new rule may be defined to adjust the estimated duration upward by four minutes for all locate request tickets within 2 miles of central Manhattan, N.Y. Alternatively, a new complexity type may be created (e.g., “high density urban”) and all locate operations within 2 miles of central Manhattan, N.Y. may be assigned the new complexity type. New business rules may then be defined to adjust the estimated duration upward for all locate operations having the new complexity type.

[0280] Additionally, the facilities maps available from one-call centers and/or facility owners may not always contain sufficient and accurate information. For example, for some historic urban neighborhoods, the only available facilities maps may have been created many years ago and may not contain absolute location information such as lat/long coordinates. Some of the street-level landmarks shown on the maps may have been moved or no longer exist. In such a situation, it may be difficult to determine the exact location of some of the facilities shown on the maps.

[0281] Thus, in accordance with some embodiments of the present disclosure, the GIS 610 shown in FIG. 6 may be used as part of a system for continually improving the quality of available facilities maps. For example, the GIS 610 may be used to digitize existing maps printed on paper or cloth and augment the digitized maps with geospatial metadata.

[0282] In some instances, the geospatial metadata added to facilities maps may be generated at least partially based on previously completed locate request tickets. For example, the backend assessment module 290 shown in FIG. 2 may be adapted to recognize some geographic areas as areas with insufficient information and may forward to the GIS 610 the results of completed location operations in those areas, which may include technician logs and/or geotagged images with technician annotations indicating marked facilities. Using this information, the GIS 610 may be able to derive accurate location information for the marked facilities and augment the facilities maps accordingly with some appropriate geospatial metadata.

[0283] As another example, the backend assessment module 290 may be programmed to discover inconsistencies between existing facilities maps and the actual result of a completed locate operation, and to notify the GIS 610 of the discovered inconsistencies. Alternatively, the GIS 610 may be adapted to receive from a human user an indication that there is an error on an existing facilities map. In either situation, the GIS 610 may respond by verifying the report of inconsistency and correcting the facilities map accordingly.

[0284] In some further embodiments, the backend assessment module 290 may be programmed to perform time-re-

lated analyses based on completed tickets. The types of time-related analyses of interest may vary according the entity from whose perspective the analyses are performed. For instance, from the perspective of a locate service provider, it may be desirable to analyze not only total on-site time (e.g., the length of time between a technician arriving at a work site and the technician departing from the work site upon completion of the requested locate operation), but also a breakdown of the total duration into individual tasks, such as equipment preparation, locating, marking final documentation and/or personal breaks. Each task may be further broken down, for example, into subtasks each pertaining to a particular type of facilities. The locate service provider may also analyze travel time, for example, between successive locate operations and/or daily, weekly or monthly totals. These types of fine-grained analyses (e.g., analyzing durations of smaller units of work) may help the locate service provider identify potential quality and/or efficiency issues.

[0285] For instance, in some embodiments, the backend assessment module may compare each technician’s record against fleet-wide and/or historical records and may, as a result, identify a technician who consistently spends too much (or too little) time when locating a particular type of facilities. This may suggest further training for the technician with respect to the particular facilities type to ensure that the technician correctly follows the recommended procedures. As another example, the backend assessment module may identify a technician whose patterns of personal breaks negatively impact his work efficiency, in which case coaching may be appropriate.

[0286] Time-related analyses may also be performed from the perspective of an entity other than a locate service provider, such as a regulatory body, a one-call center and/or an insurance company. For instance, a regulatory body or one-call center may be more interested in timely completion of tickets (e.g., reporting percentage of tickets that are completed on time and/or identifying tickets that are completed late) and less interested in work duration (e.g., length of time taken to complete the requested locate operation or a task within the requested locate operation). Statistics on response time (e.g., length of time between receiving a ticket from a one-call center and completing the requested locate operation) may also be of interest.

[0287] In yet some further embodiments, the backend assessment module 290 may be programmed to review completed tickets and identify suitable candidates for human review. For instance, a regulatory body may use the backend assessment module to identify high risk and/or high value tickets to be audited. A quality control application (e.g., the quality control application 270 shown in FIG. 2) may be employed in conjunction with the backend assessment module to further filter the identified high risk and/or high value tickets. For instance, the quality control application may flag those tickets with potential quality issues (e.g., technician unable to gain access to dig area, insufficient locate signals, inclement weather during operation, etc.) Alternatively, the backend assessment module may itself be programmed to perform some or all of the quality control analysis. In either manner, backend assessment may be employed to reduce the volume of completed tickets that require human review, without unacceptable degradation in safety. Examples of manual, semi-automated and automated quality assessment tech-

niques that may be implemented as part of backend assessment can be found in one or more of the following references, each of which is incorporated herein by reference:

[0288] U.S. patent application Ser. No. 12/493,109, filed on Jun. 26, 2009, entitled “Methods and Apparatus for Quality Assessment of a Field Service Operation;”

[0289] U.S. patent application Ser. No. 12/557,732, filed on Aug. 7, 2009, entitled “Methods and Apparatus for Quality Assessment of a Field Service Operation Based on Geographic Information;”

[0290] U.S. patent application Ser. No. 12/571,356, filed on Sep. 30, 2009, entitled “Methods and Apparatus for Analyzing Locate and Marking Operations with Respect to Facilities Maps;”

[0291] U.S. patent application Ser. No. 12/572,202, filed on Oct. 1, 2009, entitled “Methods and Apparatus for Analyzing Locate and Marking Operations with Respect to Historical Information;”

[0292] U.S. patent application Ser. No. 12/568,087, filed on Sep. 28, 2009, entitled “Methods and Apparatus for Generating an Electronic Record of Environmental Landmarks Based on Marking Device Actuations;”

[0293] U.S. patent application Ser. No. 12/572,260, filed on Oct. 1, 2009, entitled “Methods and Apparatus for Analyzing Locate and Marking Operations with Respect to Environmental Landmarks;” and

[0294] U.S. patent application Ser. No. 12/703,809, filed on Apr. 14, 2010, entitled “Marking Apparatus Equipped with Ticket Processing Software for Facilitating Marking Operations, and Associated Methods.”

TABLE 2

Example rules of assessment business rules 240				
Number	Category	Impacts	Name	Description
BR-001	Complexity	Time, Risk, Resource	Keywords - Complexity	Use keywords to predict complexity potential and/or high profile potential
BR-002	Complexity	Time, Risk, Resource	Complexity Region - Complexity	Determine whether excavation notice is within a Complexity Region
BR-003	Complexity	Time, Risk, Resource	Proximity to Historical High Profile - High Profile	Use proximity to historical high profile tickets to estimate high profile potential
BR-004	Complexity	Time, Risk, Resource, Revenue	Project/Hourly Scope - Complexity	Determine if a project/hourly scope applies to the excavation notice
BR-005	Complexity	Time, Risk, Resource	Emergency/Short Notice Type - Complexity	Determine if an emergency/short notice type applies to the excavation notice
BR-006	Time	Time	Locate Count - Time	Use number of locates to set initial estimate of ticket duration
BR-007	Time	Time	Facility Type - Time	Use facility types to be located to adjust estimated ticket duration
BR-008	Time	Time	High Profile - Time	Use high profile certainty to adjust estimated ticket duration
BR-009	Time	Time	High Profile Potential - Time	Use high profile potential to adjust estimated ticket duration
BR-010	Time	Time	Complexity Regions - Time	Use complexity regions to adjust estimated ticket duration
BR-011	Time	Time	Service Type - Time	Use the service type (emergency or short notice) to adjust estimated ticket duration
BR-012	Time	Time	Project/Hourly Scope - Time	Adjust duration for project/hourly scope excavation notice
BR-013	Risk	Risk	Facility Types - Risk	Use facility types to estimate risk
BR-014	Risk	Risk	Proximity to Historical High Profile - Risk	Use proximity to historical damage reports to adjust estimated risk
BR-015	Risk	Risk	Excavator Damage History - Risk	Use excavator damage history to adjust estimated risk
BR-016	Risk	Risk	High Profile Potential - Risk	Use high profile potential to adjust estimated risk
BR-017	Risk	Risk	Service Type - Risk	Use the service type (emergency or short notice) to adjust estimated risk
BR-018	Risk	Risk	Project/Hourly Scope - Risk	Adjust risk for project/hourly scope excavation notice
BR-019	Value	Value	Billing Rules Per Ticket - Value	Apply applicable Per Ticket billing business rates and rules to determine value
BR-020	Value	Value	Duplicate Ticket Rules - Value	Apply duplicate ticket rules to determine if billing value is zero
BR-021	Value	Value	Billing Rates By Unit- Value	Apply applicable By Unit billing business rates and rules to determine value

TABLE 2-continued

Example rules of assessment business rules 240				
Number	Category	Impacts	Name	Description
BR-022	Value	Value	Project/Hourly Scope - Value	Adjust value for project/hourly scope excavation notice
BR-023	Resource	Resource	Determine Resource Requirements - Skill	Determine skill requirements for the excavation notice

TABLE 3

First example complexity determination of assessment business rules 240		
Business Rule ID	BR-001 (of Table 2)	
Business Rule Name	Keywords - Complexity	BR Category: CPL
Business Rule Description	Use keywords to predict complexity potential and/or high profile potential	
Fields	Excavation Notice ID, Work Order Number, Task ID, locate instruction text, comment text, excavation type description	
Required Rule	IF excavation type description contains FiOS	
Operation	THEN complexity type = High Profile Potential	
Example Implementation	The keywords will be stored in a decision table as an input column, with corresponding values for complexity type and high potential reason description. For example:	
	KEYWORD	HIGH PROFILE
	COMPLEXITY TYPE	REASON DESCRIPTION
	FiOS	High Profile Potential Fiber Optic
	Gated	Gated
	AFB	Military Base
	Aerial	Aerial Power Lines

TABLE 4

Second example complexity determination of assessment business rules 240		
Business Rule ID	BR-002 (of Table 2)	
Business Rule Name	Complexity Region - Complexity	BR Category: CPL
Business Rule Description	Determine whether excavation notice is within a Complexity Region	
Fields	Excavation Notice ID, Work Order Number, Task ID, latitude number, longitude number	
Required Rule	IF work location is inside a gated community	
Operation	THEN Complexity Type = Gated	
Example Implementation	The complexity regions will be defined by Supervisors using the Scheduling interface. The complexity region is defined by a complexity type, high profile reason description (if applicable), and a series of latitude/longitude coordinates which define a complexity region polygon.	

TABLE 5

Third example complexity determination of assessment business rules 240		
Business Rule ID	BR-003 (of Table 2)	
Business Rule Name	Proximity to Historical High Profile - High Profile	BR Category: CPL
Business Rule Description	Use proximity to historical high profile tickets to estimate high profile potential	

TABLE 5-continued

Third example complexity determination of assessment business rules 240	
Fields	Excavation Notice ID, Work Order Number, Task ID, lat number,
Required	long number, Facility Type Code, Facility Type Description
Rule	IF work location is within a 100 yard radius of a high profile
Operation	historical location
Example	THEN Complexity Type = High Profile Potential High Profile Potential Reason = Historical High Profile Reason
Implement- ation	Historical high profile tickets will be retained with high profile reason description and latitude/longitude coordinates which define the work location.

TABLE 6

Fourth example complexity determination of assessment business rules 240	
Business	BR-004 (of Table 2)
Rule ID	
Business	Project/Hourly Scope - BR Category:
Rule Name	Complexity CPL
Business Rule	Determine if a project/hourly scope applies to the excavation
Description	notice
Fields	Excavation Notice ID, Work Order Number, Task ID, Size of Locate
Required	Area, Footage, Miles, Bounded By, locate instruction text, comment text, excavation type description
Rule	IF size of locate area in miles is greater than 0.5
Operation	THEN Hourly Status Indicator = True
Example	
Implement- ation	The decision factors leading to hourly status designation center upon the complexity and size of the locate task, and travel considerations such as whether the worksite is a remote/rural/ desert location. Decisions will be based upon dimensional fields (Size of Locate Area, Footage, Miles, Bounded By) and keyword fields (locate instruction text, comment text, excavation type description). Business rules such as this one, which are derived based upon billing tables, will need to undergo definition and validation prior to rollout in any given location. This is due to the fact that the rules can differ from contract-to-contract, and by area to area within a state.

TABLE 7

Fifth example complexity determination of assessment business rules 240	
Business	BR-005 (of Table 2)
Rule ID	
Business	Emergency/Short Notice BR Category:
Rule Name	Type - Complexity CPL
Business Rule	Determine if an emergency/short notice type applies to the
Description	excavation notice
Fields	Excavation Notice ID, Work Order Number, Task ID, Service Type,
Required	locate instruction text, comment text, excavation type description
Rule	IF excavation type description contains Emergency
Operation	THEN service type = Emergency
Example	
Implement- ation	For tickets with a routine ticket type, keywords will be searched for to determine if a short notice or emergency ticket type should in fact be applied to the excavation notice.

TABLE 8

First example time estimation of assessment business rules 240		
Business	BR-006 (of Table 2)	
Rule ID		
Business	Locate Count -	BR Category:
Rule Name	Time	TME
Business Rule	Use number of locates to set an initial estimate of	
Description	ticket duration.	
Fields	work_order.work_order_id,	
Required	work_order_locate_task.work_order_locate_task_id	

TABLE 8-continued

First example time estimation of assessment business rules 240		
Rule	IF count(tasks) > 3	
Operation	THEN duration = 19	
Example		
Implemen- tation	The locate count values and corresponding ticket duration values are stored in locate_assess_cond. For example:	
	LOCATE COUNT	AVG DURATION
	1	7
	2	13
	3	19

TABLE 9

Second example time estimation of assessment business rules 240		
Business	BR-007 (of Table 2)	
Rule ID		
Business	Facility Type - Time	BR Category:
Rule Name		TME
Business Rule	Use facility types to be located to adjust estimated	
Description	ticket duration	
Fields	util_type_code.displ_type_code, util_locate_request.util_type_code,	
Required	util_locate_request.util_locate_request_id, work_order_locate_task.util_locate_request_id, work_order_locate_task.work_order_id	
Rule	IF Facility Type Codes include Gas	
Operation	THEN duration = duration + 4	
Example		
Implemen- tation	The facility type values with associated adjustment values are stored in locate_assess_cond. Note that the reason that, for example, the sewer number might be a negative adjustment, is that statistics might tell us that 3-locate tickets with sewer are, on average, 3 minutes shorter in duration than 3-locate tickets without a sewer locate. For example:	
	FACILITY TYPE	DURATION ADJUSTMENT
	Gas	4
	Sewer	-3
	Water	-2

TABLE 10

Third example time estimation of assessment business rules 240		
Business	BR-008 (of Table 2)	
Rule ID		
Business	High Profile - Time	BR Category:
Rule Name		TME
Business Rule	Use high profile certainty to adjust estimated ticket duration	
Description		
Fields	high_profile_reason_code.displ_reason_code, util_locate_high_profile_reason.high_profile_reason_code,	
Required	util_locate_high_profile_reason.util_locate_request_id, util_locate_request.util_locate_request_id, work_order_locate_task.util_locate_request_id, work_order_locate_task.work_order_id	

TABLE 10-continued

Third example time estimation of assessment business rules 240		
Rule	IF High Profile Reason Code = HCPHONE	
Operation	THEN duration = duration * 1.23	
Example		
Implemen- tation	The high profile reason codes will be stored in a decision table as an input column, with corresponding multiplier values for ticket duration. For example:	
	HIGH PROFILILE REASON CODE	HP REASON DESCRIPTION
		DURATION MULTIPLIER
	None	no reason
	FiOS	Fiber Optic
	HCPHONE	High Capacity Phone Line

TABLE 11

Fourth example time estimation of assessment business rules 240		
Business	BR-009 (of Table 2)	
Rule ID		
Business	High Profile Potential - Time	BR Category:
Rule Name		TME
Business Rule	Use proximity to historical high profile areas to adjust	
Description	estimated ticket duration	
Fields	work_order.lat_nbr, work_order.long_nbr,	
Required	high_profile_service_area.high_profile_reason_code, high_profile_reason_code.high_profile_reason_code, util_locate_request.util_locate_request_id, util_locate_high_profile_reason.util_locate_request_id, work_order_locate_task.work_order_id, work_order_locate_task.util_locate_request_id	
Rule	IF High Profile Potential Reason Code = HCPHONE	
Operation	THEN duration = duration * 1.18	
Example		
Implemen- tation	The high profile reason codes will be stored in a decision table as an input column, with corresponding multiplier values for ticket duration.	
	For example:	
	HI PROFILE REASON CODE	HP POTENTIAL REASON DESCRIPTION
		DURATION MULTIPLIER
	None	no reason
	FiOS	Fiber Optic
	HCPHONE	High Capacity Phone Line

TABLE 12

Fifth example time estimation of assessment business rules 240		
Business	BR-010 (of Table 2)	
Rule ID		
Business	Complexity	BR Category:
Rule Name	Regions - Time	TME
Business Rule	Use complexity regions to adjust estimated ticket duration. Determine	
Description	if work order is in a complexity region by determining whether the	
	work order location is inside a defined complexity area.	
Fields	complexity_reason_code.displ_reason_code,	
Required	complexity_service_area.service_area_id, service_area_coordnat.seq_nbr, service_area_coordnat.lat_nbr, service_area_coordnat.long_nbr, service_area_coordnat.spatial_type_code, service_area.service_area_id, work_order.lat_nbr, work_order.long_nbr	

TABLE 12-continued

Fifth example time estimation of assessment business rules 240									
Rule	IF Complexity Region Type = Military Base								
Operation	THEN duration = duration + 35								
Example									
Implementation	The complexity region type codes will be stored in a decision table as an input column, with corresponding multiplier values for ticket duration. For example:								
	<table> <tr> <th>COMPLEXITY REGION TYPE</th><th>DURATION ADJUSTMENT</th></tr> <tr> <td>Gated</td><td>15</td></tr> <tr> <td>Military Base</td><td>35</td></tr> <tr> <td>Aerial</td><td>-10</td></tr> </table>	COMPLEXITY REGION TYPE	DURATION ADJUSTMENT	Gated	15	Military Base	35	Aerial	-10
COMPLEXITY REGION TYPE	DURATION ADJUSTMENT								
Gated	15								
Military Base	35								
Aerial	-10								

TABLE 13

Sixth example time estimation of assessment business rules 240							
Business Rule ID	BR-011 (of Table 2)						
Business Rule Name	Service Type - Time						
Business Rule Description	BR Category: TME Use the service type (emergency or short notice) to adjust estimated ticket duration						
Fields Required	work_order_locate_task.work_order_id, excavatn_notice.ticket_type_code, client_locate_request.excavatn_notice_id, excavatn_notice.excavatn_notice_id, util_locate_request.util_locate_request_id, work_order_locate_task.util_locate_request_id, ticket_type_code.displ_type_code						
Rule	IF Service Type = Emergency						
Operation	THEN duration = duration * 1.43						
Example							
Implementation	The service types will be stored in a decision table as an input column, with corresponding multiplier values for ticket duration. For example:						
	<table> <tr> <th>DURATION SERVICE TYPE</th><th>MULTIPLIER</th></tr> <tr> <td>Emergency</td><td>1.23</td></tr> <tr> <td>Short Notice</td><td>1.82</td></tr> </table>	DURATION SERVICE TYPE	MULTIPLIER	Emergency	1.23	Short Notice	1.82
DURATION SERVICE TYPE	MULTIPLIER						
Emergency	1.23						
Short Notice	1.82						

TABLE 14

Seventh example time estimation of assessment business rules 240	
Business Rule ID	BR-012 (of Table 2)
Business Rule Name	Project/Hourly Scope - Time
Business Rule Description	BR Category: TME Adjust duration for project/hourly scope excavation notice
Fields Required	excavatn_notice.site_dig_length, excavatn_notice.site_dig_width, excavatn_notice.site_dig_depth, excavatn_notice.site_dig_length_uom_code, excavatn_notice.site_dig_width_uom_code, excavatn_notice.site_dig_depth_uom_code, excavatn_notice.excavatn_notice_id, client_locate_request.client_locate_request_id, util_locate_request.client_locate_request_id, work_order_locate_task.util_locate_request_id, work_order_locate_task.work_order_id
Rule	IF excavation size greater than minimum for project scope status
Operation	THEN duration = duration * (size of locate area in miles)/0.5
Example	
Implementation	The duration adjustment will be proportional to the appropriate locate size field, divided by the baseline appropriate to that field.

TABLE 14-continued

Seventh example time estimation of assessment business rules 240	
1. If the dig dimension fields are not populated, ignore this rule. 2. If the dig dimension fields are populated, and if the dig square footage is over the stored lookup value for square feet (e.g., 10,000), adjust the duration upwards in proportion to the ratio for square footage. 3. If the dig dimension fields are populated, and item 2 does not apply, and if the dig length is above the stored lookup value for length in miles, adjust the duration upwards in proportion to the ratio for linear miles. For example:	
SCOPE MEASURABLE	BASELINE
Length of Locate Area	0.5 miles
Footage	10000 sq ft

TABLE 15

First example risk estimation of assessment business rules 240									
Business Rule ID	BR-013 (of Table 2)								
Business Rule Name	Facility Types - Risk								
Business Rule Description	BR Category: RSK Use facility types to estimate risk								
Fields	Excavation Notice ID, Work Order Number, Task ID, Facility Type								
Required Rule	IF facility type descriptions contain gas and water								
Operation	THEN Risk = 2.5 + 0.2 = 2.7								
Example Implementation	The facility types will be stored in a decision table as an input column, with corresponding values for additive facility type risk values. For example:								
	<table> <tr> <th>FACILITY TYPE DESCRIPTION</th><th>FACILITY TYPE RISK VALUE</th></tr> <tr> <td>Gas</td><td>2.5</td></tr> <tr> <td>Electric</td><td>0.7</td></tr> <tr> <td>Water</td><td>0.2</td></tr> </table>	FACILITY TYPE DESCRIPTION	FACILITY TYPE RISK VALUE	Gas	2.5	Electric	0.7	Water	0.2
FACILITY TYPE DESCRIPTION	FACILITY TYPE RISK VALUE								
Gas	2.5								
Electric	0.7								
Water	0.2								

TABLE 16

Second example risk estimation of assessment business rules 240		
Business Rule ID	BR-014 (of Table 2)	
Business Rule Name	Proximity to Historical High Profile - Risk	BR Category: RSK
Business Rule Description	Use proximity to historical damage reports to adjust estimated risk	
Fields	Excavation Notice ID, Work Order Number, Task ID, lat number, long number, damage latitude, damage longitude, damage amount	
Required Rule	IF work location is within a 500 yard radius of one or more damage report historical locations totaling \$15,000	
Operation	THEN Risk = Risk * 2.0	
Example Implementation	The \$15,000 figure cited above is only an example, the actual criteria will be defined by Risk Management based upon historical statistics, and will be specific to an individual area. Historical damage reports will be retained along with excavator, damage cost, facility type, and latitude/longitude coordinates which define the damage location. For example:	
	MIN DAMAGE	MAX DAMAGE
		RISK MULTIPLIER
	1	1.1
	1000	1.3
	10000	2.0
	100000	4.0

TABLE 17

Third example risk estimation of assessment business rules 240		
Business	BR-015 (of Table 2)	
Rule ID		
Business	Excavator Damage	BR Category:
Rule Name	History - Risk	RSK
Business Rule	Use excavator damage history to adjust estimated risk	
Description		
Fields	Excavation Notice ID, Work Order Number, Task ID, lat number, long	
Required	number, excavator, excavator damage amount, excavator damage count, excavator locate count	
Rule	IF High Profile Potential Reason Code Is Between 100 and 300	
Operation	THEN risk = risk * 2.0	
Example		
Implement-	Historical damage reports will be retained along with excavator, damage	
tation	cost, facility type, and latitude/longitude coordinates which define the	
	damage location. For example:	
	MAXIMUM EXCAVATOR DAMAGE AMOUNT PER LOCATE	
	AS PERCENTAGE OF MEANMAXIMUM EXCAVATOR	
	DAMAGE AMOUNT PER LOCATE AS PERCENTAGE OF	
	RISK	
	MEAN	MULTIPLIER
	0	0.5
	50	1.0
	100	2.0
	300	4.0
	Additionally, risk multipliers will be applied for excavator	
	damage count:	
	MAXIMUM EXCAVATOR DAMAGE COUNT PER LOCATE	
	AS PERCENTAGE OF MEANMAXIMUM EXCAVATOR	
	DAMAGE COUNT PER LOCATE AS PERCENTAGE OF	
	RISK	
	MEAN	MULTIPLIER
	0	0.5
	50	1.0
	100	1.3
	300	1.8

TABLE 18

Fourth example risk estimation of assessment business rules 240		
Business	BR-016 (of Table 2)	
Rule ID		
Business	High Profile	BR Category:
Rule Name	Potential - Risk	RSK
Business Rule	Use high profile potential to adjust estimated risk	
Description		
Fields	Excavation Notice ID, Work Order Number, Task ID, High Profile	
Required	Potential (derived), High Profile Potential Reason (derived)	
Rule	IF High Profile Potential Reason Description = Fiber Optic	
Operation	THEN risk = risk * 4.0	
Example		
Implement-	The high profile reason codes will be stored in a decision table as an	
tation	input column, with corresponding multiplier values for risk.	
	For example:	
	HP POTENTIAL REASON	HP POTENTIAL REASON
	DESCRIPTION	RISK MULTIPLIER
	581 no reason	1.8
	585 Fiber Optic	4.0
	586 High Capacity Phone Line	2.5

TABLE 19

Fifth example risk estimation of assessment business rules 240		
Business Rule ID	BR-017 (of Table 2)	
Business Rule Name	Service Type - Risk	BR Category: RSK
Business Rule Description	Use the service type (emergency or short notice) to adjust estimated risk	
Fields	Excavation Notice ID, Work Order Number, Task ID, Service Type	
Required Rule	IF Service Type = Emergency	
Operation	THEN risk = risk* 2.85	
Example Implementation	The service types will be stored in a decision table as an input column, with corresponding multiplier values for ticket duration. For example:	
	SERVICE TYPE	RISK MULTIPLIER
	Emergency	2.85
	Short Notice - 2 hours	3.46
	Short Notice - 3 hours	3.11

TABLE 20

Sixth example risk estimation of assessment business rules 240		
Business Rule ID	BR-018 (of Table 2)	
Business Rule Name	Project/Hourly Scope - Risk	BR Category: RSK
Business Rule Description	Adjust risk for project/hourly scope excavation notice	
Fields	Excavation Notice ID, Work Order Number, Task ID, Hourly Status Indicator, Size of Locate Area, Footage, Miles, Bounded By	
Required Rule	IF Hourly Status Indicator = True	
Operation	THEN risk = risk * (size of locate area in miles)/0.5	
Example Implementation	The risk adjustment will be proportional to the appropriate locate size field, divided by the baseline appropriate to that field. For example:	
	SCOPE MEASURABLE	BASELINE
	Size of Locate Area	0.5 miles
	Footage	10000 sq ft

TABLE 21

First example value estimation of assessment business rules 240		
Business Rule ID	BR-019 (of Table 2)	
Business Rule Name	Billing Rules Per Ticket - Value	BR Category: VAL
Business Rule Description	Use estimated located value to estimate ticket value	
Fields	Excavation Notice ID, Work Order Number, Task ID, Member Code, Estimated Located Value (Derived from Billing Rate Tables)	
Required Rule	IF estimated located value equals \$35.50	
Operation	THEN Value = \$35.50	
Example Implementation	If the billing method associated with the client is "Per Ticket" or "Per Transmission", then assume a located, normal, closed ticket. Then lookup the billing rate value associated with the member code associated with the facility locate request and a located, normal, closed ticket.	

TABLE 22

Second example value estimation of assessment business rules 240		
Business Rule ID	BR-020 (of Table 2)	
Business Rule Name	Duplicate Ticket Rules - Value	BR Category: VAL
Business Rule Description	Apply duplicate ticket rules to determine if date worked affects value	
Fields	Excavation Notice ID, Work Order Number, Task ID, Duplicate Rule Applicability (Derived)	
Required Rule	IF duplicate rule is true	
Operation	THEN Value = 0	
Example Implementation	A subset of the billing subsystem business rules deal with the application of duplicate ticket rules applicable to many service contracts. Many client contracts stipulate that the locating company cannot charge for services performed on a duplicate ticket. These contracts also stipulate what conditions define a duplicate ticket. For example, a contract may define a duplicate ticket as two or more tickets transmitted on the same business day with identical excavation sites. Business Rule ID: BR-21.0 Business Rule Name: Duplicate Address on Same Day Business Rule Description Cannot bill for subsequent unique Tickets on the same day with the same address	

TABLE 22-continued

Second example value estimation of assessment business rules 240	
Fields Required	Ticket#, AddressID, Date
Rule Operation	Find = [Ticket#, AddressID, Date]
If Found > "true"	
Then No Charge	
Status on found record = NC	
END	
A variant of this rule involves tickets that must be re-worked. For example, the locator may mark facilities on an excavation site; the excavator subsequently damages or destroys the markings. In this scenario, the locating company is considered "not at fault" for the re-work, and according to the terms of the contract may charge the facility for this re-work.	
Business Rule ID: BR-21.1	
Business Rule Name: Duplicate Ticket, re-work	
Business Rule Description Cannot bill for duplicate tickets if at fault	
Fields Required	Ticket Number, Ticket Type
Rule Operation	If Ticket = "Dup" And "At Fault" = True
Then No Charge	
Status = NC	
END	
Another variant of this rule involves a more stringent definition of what constitutes a duplicate ticket. A contract may stipulate that the locating company cannot charge the facility for two tickets transmitted on the same day within a certain proximity to each other (although at different addresses).	
Business Rule ID: BR-21.2	
Business Rule Name: Duplicate Ticket, Contract-specific attributes	
Business Rule Description Cannot bill for duplicate tickets defined by contract-specific attributes	
Fields Required	Ticket Number, Ticket Type, Contract-specific attributes
Rule Operation	If Ticket = "Dup"
Then No Charge	
Status = NC	
END	

TABLE 23

Business Rule ID	BR-AE-021
Business Rule Name	Billing Rates By Unit- Value
Business Rule Description	BR Category: VAL Apply applicable By Unit billing business rates and rules to determine value
Fields Required	Excavation Notice ID, Work Order Number, Task ID, Member Code, Billing Rate Table Criteria and Values
Rule Operation	IF member code equals 74538 and quantity equals 1 THEN Value = 25.75
Example Implementation	If the billing method associated with the client is "By Unit", then assume a quantity of 1 (this would mean that the lowest lineal feet in the billing table would be applied). Then lookup the billing rate value associated with the member code associated with the utility locate request and a quantity of one.

TABLE 24

Business Rule ID	BR-AE-022
Business Rule Name	Project/Hourly Scope - Value
Business Rule Description	BR Category: VAL Adjust value for project/hourly scope excavation notice
Fields Required	Excavation Notice ID, Work Order Number, Task ID, Hourly Status Indicator, Size of Locate Area, Footage, Miles, Bounded By
Rule Operation	IF Hourly Status Indicator = True THEN value = 4 * (size of locate area in miles)/0.5
Example	

TABLE 24-continued

Implement- ation	Value for hourly projects is governed by the billing tables (per contractual terms). Most contracts pay on unit pay rather than hourly. If the contract allows for per hour billing, then the value adjustment will be proportional to the appropriate locate size field, multiplied by the baseline hours for that field, divided by the baseline appropriate to that field. For example:		
	SCOPE MEASURABLE	BASELINE SIZE	BASELINE HOURS
	Size of Locate Area	0.5 miles	4
	Footage	10000 sq ft	3

TABLE 25

Business Rule ID	BR-AE-022		
Business Rule Name	Project/Hourly Scope--Value	BR Category: VAL	
	SCOPE MEASURABLE	BASELINE SIZE	BASELINE HOURS
	Size of Locate Area	0.5 miles	4
	Footage	10000 sq ft	3

TABLE 26

Business Rule ID	BR-AE-023		
Business Rule Name	Determine Resource Requirements - Skill	BR Category: SKL	
Business Rule Description	Determine skill requirements for the excavation notice		
Fields	Excavation Notice ID, Work Order Number, Task ID,		
Required	Service Type, Utility Type, locate instruction text, comment text, excavation type description		
Rule Operation	IF Utility Type equals Gas AND High Profile equals True		
Example	THEN Add Resource Requirement for Gas Add Resource Requirement for Expert Add Resource Requirement for High Profile		
Implementation	Examples of skill levels include novice locator, experienced locator, and expert locator. Examples of skill areas include gas qualification, military base eligibility, high profile qualified, and downtown qualified.		

[0295] While various inventive embodiments have been described and illustrated herein, those of ordinary skill in the art will readily envision a variety of other means and/or structures for performing the function and/or obtaining the results and/or one or more of the advantages described herein, and each of such variations and/or modifications is deemed to be within the scope of the inventive embodiments described herein. More generally, those skilled in the art will readily appreciate that all parameters, dimensions, materials, and configurations described herein are meant to be exemplary and that the actual parameters, dimensions, materials, and/or configurations will depend upon the specific application or applications for which the inventive teachings is/are used. Those skilled in the art will recognize, or be able to ascertain using no more than routine experimentation, many equivalents to the specific inventive embodiments described herein. It is, therefore, to be understood that the foregoing embodiments are presented by way of example only and that, within the scope of the appended claims and equivalents thereto,

inventive embodiments may be practiced otherwise than as specifically described and claimed. Inventive embodiments of the present disclosure are directed to each individual feature, system, article, material, kit, and/or method described herein. In addition, any combination of two or more such features, systems, articles, materials, kits, and/or methods, if such features, systems, articles, materials, kits, and/or methods are not mutually inconsistent, is included within the inventive scope of the present disclosure.

[0296] The above-described embodiments can be implemented in any of numerous ways. For example, the embodiments may be implemented using hardware, software or a combination thereof. When implemented in software, the software code can be executed on any suitable processor or collection of processors, whether provided in a single computer or distributed among multiple computers.

[0297] FIG. 19 shows an illustrative computer 1900 that may be used for improving information management, dissemination, and utilization in the locate industry and other field service industries, in accordance with some embodiments. For example, the computer 1900 comprises a memory 1910, a processing unit 1912 (which may include one or more processors), one or more communication interfaces 1914, one or more display units 1916, and one or more user input devices 1918. The memory 1910 may comprise any tangible computer-readable media, and may store computer instructions for implementing various components of a ticket management system, such as the ticket parser 210 and the ticket assessment engine 230 shown in FIG. 2 and the geographic information system 610 shown in FIG. 6. The processing unit 1912 may be used to execute the instructions implementing these software components. The communication interface(s) 1914 may be coupled to a wired or wireless network, bus, or other communication means and may therefore allow the computer 1900 to transmit communications to and/or receive communications from other devices. The display unit(s) 1916 may be provided, for example, to allow a human user to view assessment outcomes produced by the ticket assessment engine 230. The user input device(s) 1918 may be provided, for example, to allow the human user to make any desired manual adjustments to the assessment outcomes.

[0298] The various methods or processes outlined herein may be coded as software that is executable on one or more processors that employ any one of a variety of operating systems or platforms. Additionally, such software may be written using any of a number of suitable programming languages and/or programming or scripting tools, and also may

be compiled as executable machine language code or intermediate code that is executed on a framework or virtual machine.

[0299] In this respect, various inventive concepts may be embodied as a computer readable storage medium (or multiple computer readable storage media) (e.g., a computer memory, one or more floppy discs, compact discs, optical discs, magnetic tapes, flash memories, circuit configurations in Field Programmable Gate Arrays or other semiconductor devices, or other non-transitory medium or tangible computer storage medium) encoded with one or more programs that, when executed on one or more computers or other processors, perform methods that implement the various embodiments of the invention discussed above. The computer readable medium or media can be transportable, such that the program or programs stored thereon can be loaded onto one or more different computers or other processors to implement various aspects of the present invention as discussed above.

[0300] The terms “program” or “software” are used herein in a generic sense to refer to any type of computer code or set of computer-executable instructions that can be employed to program a computer or other processor to implement various aspects of embodiments as discussed above. Additionally, it should be appreciated that according to one aspect, one or more computer programs that when executed perform methods of the present invention need not reside on a single computer or processor, but may be distributed in a modular fashion amongst a number of different computers or processors to implement various aspects of the present invention.

[0301] Computer-executable instructions may be in many forms, such as program modules, executed by one or more computers or other devices. Generally, program modules include routines, programs, objects, components, data structures, etc. that perform particular tasks or implement particular abstract data types. Typically the functionality of the program modules may be combined or distributed as desired in various embodiments.

[0302] Also, data structures may be stored in computer-readable media in any suitable form. For simplicity of illustration, data structures may be shown to have fields that are related through location in the data structure. Such relationships may likewise be achieved by assigning storage for the fields with locations in a computer-readable medium that conveys relationship between the fields. However, any suitable mechanism may be used to establish a relationship between information in fields of a data structure, including through the use of pointers, tags or other mechanisms that establish relationship between data elements.

[0303] Also, various inventive concepts may be embodied as one or more methods, of which an example has been provided. The acts performed as part of the method may be ordered in any suitable way. Accordingly, embodiments may be constructed in which acts are performed in an order different than illustrated, which may include performing some acts simultaneously, even though shown as sequential acts in illustrative embodiments.

[0304] All definitions, as defined and used herein, should be understood to control over dictionary definitions, definitions in documents incorporated by reference, and/or ordinary meanings of the defined terms.

[0305] The indefinite articles “a” and “an,” as used herein in the specification and in the claims, unless clearly indicated to the contrary, should be understood to mean “at least one.”

[0306] The phrase “and/or,” as used herein in the specification and in the claims, should be understood to mean “either or both” of the elements so conjoined, i.e., elements that are conjunctively present in some cases and disjunctively present in other cases. Multiple elements listed with “and/or” should be construed in the same fashion, i.e., “one or more” of the elements so conjoined. Other elements may optionally be present other than the elements specifically identified by the “and/or” clause, whether related or unrelated to those elements specifically identified. Thus, as a non-limiting example, a reference to “A and/or B”, when used in conjunction with open-ended language such as “comprising” can refer, in one embodiment, to A only (optionally including elements other than B); in another embodiment, to B only (optionally including elements other than A); in yet another embodiment, to both A and B (optionally including other elements); etc.

[0307] As used herein in the specification and in the claims, “or” should be understood to have the same meaning as “and/or” as defined above. For example, when separating items in a list, “or” or “and/or” shall be interpreted as being inclusive, i.e., the inclusion of at least one, but also including more than one, of a number or list of elements, and, optionally, additional unlisted items. Only terms clearly indicated to the contrary, such as “only one of” or “exactly one of,” or, when used in the claims, “consisting of,” will refer to the inclusion of exactly one element of a number or list of elements. In general, the term “or” as used herein shall only be interpreted as indicating exclusive alternatives (i.e. “one or the other but not both”) when preceded by terms of exclusivity, such as “either,” “one of,” “only one of,” or “exactly one of.” “Consisting essentially of,” when used in the claims, shall have its ordinary meaning as used in the field of patent law.

[0308] As used herein in the specification and in the claims, the phrase “at least one,” in reference to a list of one or more elements, should be understood to mean at least one element selected from any one or more of the elements in the list of elements, but not necessarily including at least one of each and every element specifically listed within the list of elements and not excluding any combinations of elements in the list of elements. This definition also allows that elements may optionally be present other than the elements specifically identified within the list of elements to which the phrase “at least one” refers, whether related or unrelated to those elements specifically identified. Thus, as a non-limiting example, “at least one of A and B” (or, equivalently, “at least one of A or B,” or, equivalently “at least one of A and/or B”) can refer, in one embodiment, to at least one, optionally including more than one, A, with no B present (and optionally including elements other than B); in another embodiment, to at least one, optionally including more than one, B, with no A present (and optionally including elements other than A); in yet another embodiment, to at least one, optionally including more than one, A, and at least one, optionally including more than one, B (and optionally including other elements); etc.

[0309] In the claims, as well as in the specification above, all transitional phrases such as “comprising,” “including,” “carrying,” “having,” “containing,” “involving,” “holding,” “composed of,” and the like are to be understood to be open-ended, i.e., to mean including but not limited to. Only the transitional phrases “consisting of” and “consisting essentially of” shall be closed or semi-closed transitional phrases, respectively, as set forth in the United States Patent Office Manual of Patent Examining Procedures, Section 2111.03.

What is claimed is:

1. An apparatus for assessing complexity of a locate and/or marking operation requested in a locate request ticket, the locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the apparatus comprising:

at least one communication interface;

at least one memory to store processor-executable instructions; and

at least one processor communicatively coupled to the at least one memory and the at least one communication interface, wherein, upon execution of the processor-executable instructions, the at least one processor:

A) analyzes ticket information obtained from the locate request ticket;

B) assigns at least one complexity designation to the locate request ticket based at least in part on A); and

C) controls the at least one communication interface to transmit, and/or controls the at least one memory to store, the at least one complexity designation so as to facilitate clearing the locate request ticket and/or dispatching at least one locate technician to perform the locate and/or marking operation, based at least in part on the at least one complexity designation.

2. The apparatus of claim 1, wherein the at least one complexity designation comprises a numerical score or a descriptive category.

3. The apparatus of claim 1, wherein the at least one processor further:

D) creates at least one work order corresponding to the locate request ticket, the work order comprising the at least one complexity designation assigned to the locate request ticket; and

E) annotates the work order with at least one reason code or description associated with the at least one complexity designation,

and wherein, in C), the processor controls the at least one communication interface to transmit, and/or controls the at least one memory to store, the at least one work order.

4. The apparatus of claim 1, wherein:

in A), the at least one processor recognizes in the ticket information at least one keyword and/or code associated with a high profile facilities type; and

in B), the at least one processor assigns the at least one complexity designation based at least in part on the high profile facilities type.

5. The apparatus of claim 1, wherein, in A), the at least one processor:

A1) identifies, based on the ticket information analyzed in A), at least one work site location at which the locate and/or marking operation is to be performed; and

A2) determines whether the at least one work site location is within at least one complexity region.

6. The apparatus of claim 5, wherein, in A2), the at least one processor:

retrieves a plurality of coordinates specifying the at least one complexity region; and

determines whether the at least one work site location is within the at least one complexity region based on the plurality of coordinates.

7. The apparatus of claim 6, wherein at least some of the plurality of coordinates are computed based at least in part on

delimitation information from a digital map, the delimitation information delimiting at least one complex geographical area.

8. The apparatus of claim 7, wherein the at least one complex geographical area is selected from a group consisting of: a highway, a set of railroad tracks, a park, a hospital, a school, a gated community, a zoning parcel, and a military base.

9. The apparatus of claim 6, wherein at least some of the plurality of coordinates are computed based at least in part on one or more electronic markings generated by a user to define the at least one complexity region.

10. The apparatus of claim 5, wherein:

in A2), the at least one processor determines whether the at least one work site location is within a threshold distance of at least one historical ticket location associated with a previous ticket that is assigned a first complexity designation; and

in B), the at least one processor assigns the first complexity designation to the locate request ticket.

11. The apparatus of claim 1, wherein, in A), the at least one processor:

A1) determines whether billing of the locate and/or marking operation is based on units of work performed.

12. The apparatus of claim 11, wherein, in A1), the at least one processor:

A2) identifies, based on the ticket information analyzed in A), at least one work site location at which the locate and/or marking operation is to be performed; and

A3) identifies at least one billing table corresponding to the work site location.

13. The apparatus of claim 1, wherein:

in A), the at least one processor identifies, based on the ticket information analyzed in A), at least one service type associated with the locate and/or marking operation, the at least one service type being specified by at least one contract between a locate service provider and at least one other entity, under which contract the locate service provider is to perform at least part of the locate and/or marking operation; and

in B), the at least one processor assigns the at least one complexity designation based at least in part on the at least one service type.

14. The apparatus of claim 13, wherein the service type is selected from a group consisting of: emergency, short notice, re-mark, re-stake, and re-note.

15. The apparatus of claim 1, wherein the at least one processor further:

D) uses the at least one complexity designation to assess at least one other attribute of the locate and/or marking operation.

16. The apparatus of claim 15, wherein the at least one other attribute is selected from a group consisting of: time, risk, resource, and value.

17. In a system comprising at least one processor, at least one memory, and at least one communication interface, a method for assessing complexity of a locate and/or marking operation requested in a locate request ticket, the locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the method comprising:

A) analyzing, via the at least one processor, ticket information obtained from the locate request ticket;

B) assigning, via the at least one processor, at least one complexity designation to the locate request ticket based at least in part on A); and

C) transmitting via the at least one communication interface, and/or storing in the at least one memory, the at least one complexity designation so as to facilitate clearing the locate request ticket and/or dispatching at least one locate technician to perform the locate and/or marking operation, based at least in part on the at least one complexity designation.

18. The method of claim **17**, wherein the at least one complexity designation comprises a numerical score or a descriptive category.

19. The method of claim **17**, further comprising:

D) creating at least one work order corresponding to the locate request ticket, the work order comprising the at least one complexity designation assigned to the locate request ticket; and

E) annotating the work order with at least one reason code or description associated with the at least one complexity designation.

and wherein C) comprises transmitting and/or storing the at least one work order.

20. The method of claim **17**, wherein:

A) comprises recognizing in the ticket information at least one keyword and/or code associated with a high profile facilities type; and

B) comprises assigning the at least one complexity designation based at least in part on the high profile facilities type.

21. The method of claim **17**, wherein A) comprises:

A1) identifying, based on the ticket information analyzed in A), at least one work site location at which the locate and/or marking operation is to be performed; and

A2) determining whether the at least one work site location is within at least one complexity region.

22. The method of claim **21**, wherein A2) comprises:

retrieving a plurality of coordinates specifying the at least one complexity region; and

determining whether the at least one work site location is within the at least one complexity region based on the plurality of coordinates.

23. The method of claim **22**, wherein at least some of the plurality of coordinates are computed based at least in part on delimitation information from a digital map, the delimitation information delimiting at least one complex geographical area.

24. The method of claim **23**, wherein the at least one complex geographical area is selected from a group consisting of: a highway, a set of railroad tracks, a park, a hospital, a school, a gated community, a zoning parcel, and a military base.

25. The method of claim **22**, wherein at least some of the plurality of coordinates are computed based at least in part on one or more electronic markings generated by a user to define the at least one complexity region.

26. The method of claim **21**, wherein:

A2) comprises determining whether the at least one work site location is within a threshold distance of at least one historical ticket location associated with a previous ticket that is assigned a first complexity designation; and

B) comprises assigning the first complexity designation to the locate request ticket.

27. The method of claim **17**, wherein A) comprises:

A1) determining whether billing of the locate and/or marking operation is based on units of work performed.

28. The method of claim **27**, wherein A1) comprises:

A2) identifying, based on the ticket information analyzed in A), at least one work site location at which the locate and/or marking operation is to be performed; and

A3) identifying at least one billing table corresponding to the work site location.

29. The method of claim **17**, wherein:

A) comprises identifying, based on the ticket information analyzed in A), at least one service type associated with the locate and/or marking operation, the at least one service type being specified by at least one contract between a locate service provider and at least one other entity, under which contract the locate service provider is to perform at least part of the locate and/or marking operation; and

B) comprises assigning the at least one complexity designation based at least in part on the at least one service type.

30. The method of claim **29**, wherein the service type is selected from a group consisting of: emergency, short notice, re-mark, re-stake, and re-note.

31. The method of claim **17**, further comprising:

D) using the at least one complexity designation to assess at least one other attribute of the locate and/or marking operation.

32. The method of claim **31**, wherein the at least one other attribute is selected from a group consisting of: time, risk, resource, and value.

33. At least one non-transitory computer-readable storage medium encoded with at least one program including processor-executable instructions that, when executed by a processor, perform a method for assessing complexity of a locate and/or marking operation requested in a locate request ticket, the locate and/or marking operation comprising detecting and/or marking a presence or an absence of at least one underground facility within a dig area, wherein at least a portion of the dig area is planned to be excavated or disturbed during excavation activities, the method comprising:

A) analyzing ticket information obtained from the locate request ticket;

B) assigning at least one complexity designation to the locate request ticket based at least in part on A); and

C) transmitting and/or storing the at least one complexity designation so as to facilitate clearing the locate request ticket and/or dispatching at least one locate technician to perform the locate and/or marking operation, based at least in part on the at least one complexity designation.

* * * * *