



- (51) **International Patent Classification:**
G06F 17/30 (2006.01) G06Q 30/00 (2012.01)
G06Q 30/02 (2012.01)
- (21) **International Application Number:**
PCT/US2013/025142
- (22) **International Filing Date:**
7 February 2013 (07.02.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/632,815 10 February 2012 (10.02.2012) US
13/413,158 6 March 2012 (06.03.2012) US
- (71) **Applicant: LIVEPERSON, INC.** [US/US]; 475 10th Avenue, 5th Floor, New York, NY 10018 (US).
- (72) **Inventors: ZELENKO, Avinoam;** Spinoza 6/a, 43253 Ra'anana (IL). **GORDON, Vitaly;** P.O. Box 305, 43253 Bnei Zion (IL). **KEHAT, Arnon-Naftally;** 92 Ha-Ilanot Street, 42823 Zoran (IL). **BARAK, Matan;** 23 Macabi Street, 43253 Ra'anana (IL).
- (74) **Agent: GERETY, Todd, A.;** Proskauer Rose, LLP, One International Place, Boston, MA 02110 (US).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published: — with international search report (Art. 21(3))

(54) **Title:** ANALYTICS DRIVEN ENGAGEMENT

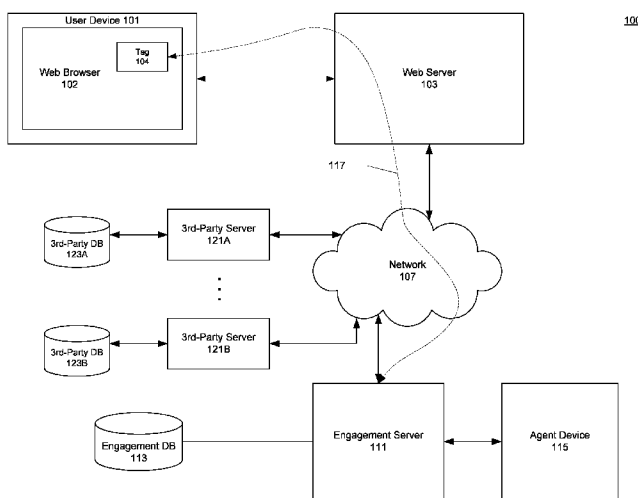


Fig. 1

(57) **Abstract:** Various embodiments relate to an engagement server and a related method of initiating an engagement between an agent device and a user device based on formed and modified engagement rules. In one embodiment, the engagement server can receive one or more third-party analytic reports and use them to form engagement rules that determine when the engagement server initiates an engagement between the agent device and user device. In some embodiments, the engagement server can also receive user interaction data from the user device to modify engagement rules to fit a particular user. In some embodiments, the engagement server can use the third-party analytic reports and/or user interaction data from a plurality of users to form a statistical model. The engagement server may then use the statistical model to form and/or modify the engagement rules.

WO 2013/119808 A1

ANALYTICS DRIVEN ENGAGEMENT

TECHNICAL FIELD

[0001] Various exemplary embodiments disclosed herein relate generally to methods executed on a computer and computer-based apparatus, including computer program products, for an analytic driven engagement.

BACKGROUND

[0002] A company can use its website in a variety of ways to communicate information to its customers. For example, a company can configure its website to provide information to a customer before the customer makes a purchasing decision. In other instances, the company can directly provide its products and/or services to its customers through its website, provide customer service through a support network, and/or gather specific information about its potential customers.

[0003] In order to implement such a wide array of services (which customers in this day and age have come to expect from Internet companies), many companies must employ large, robust websites and maintain large web presences. One consequence of creating such large and complex websites is that customers may not readily find the information or service they desire. For example, a customer may navigate to a desired location (e.g., web page) on a company's website, yet many not know the appropriate next steps to take once he or she reaches the desired location (e.g., how to complete a purchase transaction, how to compare a displayed product with other products, etc.). It is often difficult to determine when to engage a user of a website (e.g., to provide online chat help, to send coupons, to send advertisements, etc.).

SUMMARY

[0004] The methods and apparatus disclosed herein allow a website to engage website users (or to offer engagement to users) when the users may want or need help (e.g., to offer online

chat with customer service agents, to provide coupons, etc.). Actions or other properties associated with the user's interaction with the website can be used to decide when the website should engage with a customer (e.g., offered help).

[0005] A brief summary of various exemplary embodiments is presented. Some simplifications and omissions may be made in the following summary, which is intended to highlight and introduce some aspects of the various exemplary embodiments, but not limit the scope of the invention. Detailed descriptions of a preferred exemplary embodiment adequate to allow those of ordinary skill in the art to make and use the inventive concepts will follow in the later sections.

[0006] In one embodiment, a computerized method for automatically adjusting engagement rules based on user interaction with a website is featured. The method includes a server computer storing a set of engagement rules for a website, wherein each engagement rule defines criteria that, if met, causes the website to engage a user of the website. The method includes the server computer receiving data indicative of a set of users' interactions with the website, wherein the data is generated by a third-party data provider. The method also includes automatically the server computer adjusting one or more generated rules from the set of engagement rules based on the received data.

[0007] In another embodiment, a computer program product, tangibly embodied in a non-transitory computer readable medium is featured. The computer program product includes instructions being configured to cause a data processing apparatus to store a set of engagement rules for a website, wherein each engagement rule defines criteria that, if met, causes the website to engage a user of the website. The computer program product includes instructions being configured to cause a data processing apparatus to receive data indicative of a set of users' interactions with the website, wherein the data is generated by a third-party data provider. The computer program product includes instructions being configured to cause

a data processing apparatus to automatically adjust one or more generated rules from the set of engagement rules based on the received data.

[0008] In another embodiment, an apparatus for automatically adjusting engagement rules based on user interactions with a website is featured. The apparatus comprises a processor and memory. The apparatus is configured to store a set of engagement rules for a website, wherein each engagement rule defines criteria that, if met, causes the website to engage a user of the website. The apparatus is configured receive data indicative of a set of users' interactions with the website, wherein the data is generated by a third-party data provider. The apparatus is configured to automatically adjust one or more generated rules from the set of engagement rules based on the received data.

[0009] In other examples, any of the aspects above include one or more of the following features. In some examples, the server computer receives second data indicative of a second set of users' interactions with the website, wherein the second data is generated by a second third-party data provider that is different than the third-party data provider. In some examples, the server computer generates a statistical model based on the received data and the second received data. The received data and the second received data can each comprise one or more parameters. Generating the statistical model can comprise correlating a first parameter from the received data and a second parameter from the second received data using a principal component analysis (PCA).

[0010] In some examples, the statistical model can be indicative of user interaction with the website. The received data can comprise a website analytic report. Engaging a user can comprise transmitting a pop-up window to the user. Automatically adjusting can comprise creating a new engagement rule in the set of engagement rules. Automatically adjusting can comprise changing an existing engagement rule in the set of engagement rules.

[0011] It should be apparent that, in this manner, various exemplary embodiments enable dynamic engagement between an agent and a user on a website (or other user engagements, such as providing targeted advertisements, providing coupons, etc.). Particularly, by using analytical reports and modeling an agent can engage a user under predefined conditions, which can result in a more meaningful engagement between the agent and user.

[0012] The techniques, which include both methods and apparatuses, described herein can provide one or more of the following advantages. The incorporation of one or more third-party analytic tools and analytic reports allows the system to determine when to engage a user (e.g., based on robust statistics) that will more likely result in a successful engagement (e.g., a helpful engagement to the user, an engagement that promotes the sale of products or services, etc.) between agent and user. Automatically integrating such analytic tools with the rest of the engagement system eliminates the need for manual creation and maintenance of engagement rules that define the criterion(s) for when the system engages a user. Other aspects and advantages of the embodiments will become apparent from the following detailed description, taken in conjunction with the accompanying drawings, illustrating the principles of the invention by way of example only.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] In order to better understand various exemplary embodiments, reference is made to the accompanying drawings wherein:

[0014] FIG. 1 illustrates an exemplary analytic-driven engagement system;

[0015] FIG. 2 illustrates a flowchart of an exemplary method of initiating engagement; and

[0016] FIG. 3 illustrates a flowchart of another exemplary method of initiating engagement.

DETAILED DESCRIPTION

[0017] Referring now to the drawings, in which like numerals refer to like components or

steps, there are disclosed broad aspects of various exemplary embodiments.

[0018] In general overview, computerized systems and methods are provided for an analytic-driven engagement system that initiates engagement with a user (e.g., engagement between a customer service agent and the user) based on, at least, analytic reports and/or analytic tools. The analytic reports and tools can be produced both internally and can be received from a third party. An engagement can include, for example, direct communications between an agent and a user (e.g., online text chat, voice chat, video chat, etc.). An engagement can also include other forms of action based on a user's interaction with the website. For example, a user can be presented with instructional text or video (e.g., that is automatically-generated based on the user's actions taken at the website), coupons (e.g., for products offered on the website and/or for products related to the website content), articles, community-created content, social media content (e.g., Facebook, Twitter), etc. An engagement server can monitor a user's activities when connected to a website or webpage. The engagement server, using engagement rules dynamically formed from at least the analytic tools, waits until the engagement rules are satisfied before engaging the user. In some embodiments, the engagement server can form the engagement rules from other users' activity data. In some embodiments, the engagement server can initiate the engagement between an agent and the user through the creation of a chat session on both the user device and agent device that enable direct communication between the user and agent. In some embodiments, the engagement server can initiate another form of initiation, such as providing specific content like an advertisement.

[0019] FIG. 1 illustrates an exemplary analytic-driven engagement system 100, which includes a user device 101, a web server 103, a network 107, an engagement server 111, an engagement database (DB) 113, an agent device 115, third-party servers 121A-121B, and third-party databases 123A-123B. The user device 101 includes a web browser 102 that

connects to the web server 103. The web browser 102 can also include a tag 104. In the illustrative embodiment, the user device 101 is in communication with the web server 103, while the engagement server 111 is in communication with the engagement DB 113 and the agent device 115. In some embodiments, the engagement server 111 can enable communication between the user device 101 and the agent device 115 through the tag 104 in the web browser 102 (e.g., the tag 104 determines an engagement rule is satisfied, and sets up a chat session between the user of the user device 101 and the agent device 115 through the engagement server 111). In some embodiments, the engagement server 111 can receive information from the tag 104 via the web server 103 and the network 107, where the web server 103 and the network 107 relay the information between the engagement server 111 and the tag 104 (e.g., as illustrated by connection 117).

[0020] Network 107 can be, for example, a packet-switching network that is able to forward packets to other devices based on information included in the packet. The network 107 can provide, for example, phone and/or Internet service to various devices like the user device 101 and the agent device 115 in communication with the network 107.

[0021] The engagement server 111 can be, for example, a single web server with a processor and memory. In some embodiments, the engagement server 111 can include multiple web servers connected directly or through the network 107. For example, the agent or agent company can improve brand management and/or customer service by connecting its agents with its customers (or users) at what it deems opportune times (e.g., as defined by the engagement rules). Advantageously, the engagement server 111 can receive user interaction data from a particular user device 101 (e.g., from tag 104) and use various engagement rules to determine when to engage with user device 101 (e.g., to initiate an engagement between an agent and a user via the agent device 115 and the user device 101). In some embodiments, the engagement server 111 can retrieve other data, such as user analytics stored in engagement

database (DB) 113 to form and/or modify its engagement rules. The engagement server 111 can also store the engagement rules in the engagement database 113. In some embodiments, the engagement server 111 can retrieve one or more third-party analytics, such as third-party analytic reports, from third party databases 123A-123B via third-party servers 121A-121B when forming and/or modifying the stored engagement rules. The engagement server 111 can also provide other software to both the user device 101 and the agent device 115. For example, the engagement server 111 can provide chat software to the user device 101 and the agent device 115 to facilitate a chat session between the user device 101 and the agent device 115.

[0022] Engagement database (DB) 113 can be a database in communication with the engagement server 111 that can provide user analytics to the engagement server 111. In some embodiments, the engagement DB 113 can be in communication with the engagement server 111 through a direct connection. In other embodiments, the engagement DB 113 can be in communication with the engagement server 111 through the network 107. In some embodiments, the engagement database 113 stores the engagement rules. In some embodiments, the engagement DB 113 can store web analytics received by the engagement server 111. In some embodiments, the engagement DB 113 can accumulate and store user interaction data the engagement server 111 received from a plurality of user devices 101 over time. In some embodiments, the engagement DB 113 can store statistical models form by the engagement server 111. The engagement server 111 can access the engagement DB 113 when forming and updating engagement rules, statistical models, and accumulated user interaction data. The engagement server 111 can use information stored in the engagement DB 113 with other information, such as third-party web analytics retrieved from other sources when forming or modifying engagement rules and/or statistical models.

[0023] Third-Party databases (DBs) 123A-123B can be one or more databases in

communication with the engagement server 111 through the network 107 and third-party servers 121A-121B. Each of the third-party servers 121A-121B can be, for example, a single web server with a processor and memory that are controlled by a party other than the user or agent. Third-party DBs 123A-123B can accumulate and store web analytics, which the engagement server 111 can access when forming and modifying its engagement rules and/or statistical models. In some embodiments, the web analytics stored in the third-party DBs 123A-123B can be static web analytic reports. In other embodiments, the third-party DBs can include web analytic reports that are consistently updated by the third-party. In some embodiments, the engagement server 111 can access the static and/or updated web analytic reports stored in one or more of the third-party DBs when forming and modifying its engagement rules, or when forming and modifying its statistical models. For example, the engagement server 111 can connect to the first third-party DB 123A to retrieve a static third-party report, connect to the second third-party DB 123B to retrieve an updated third-party report, and/or connect to the engagement DB 113 to retrieve accumulated user interaction data to form a statistical model for the user.

[0024] In some embodiments, the statistical model can be generated using partial-least-squares projections to latent structures, (PLS), principal component analysis (PCA), or a combination of PLS and PCA. Further details of PCA and PLS analysis can be found in “Multi- and Megavariate Data Analysis, Part I, Basic Principles and Applications”, Eriksson et al, Umetrics Academy, January 2006, and “Multi- and Megavariate Data Analysis, Part II, Advanced Applications and Method Extensions”, Eriksson et al., Umetrics Academy, March 2006, the entirety of which are herein incorporated by reference.

[0025] PLS is a multivariate analytical tool commonly used to analyze data. PLS is a method for relating two data matrices, X and Y, to each other by a linear multivariate model. In its simplest form, a linear model specifies the relationship between a dependent or response

variable y , or a set of response variables Y , and a set of predictor variables X 's. For example, the response variable y is a user-specified quality for irregular objects, and the predictor variables X are the measured data for the irregular objects.

[0026] A PLS component includes a vector of X -scores t , Y -scores u , weights w and c , and loadings p . PLS components of a PLS model are traditionally calculated using the nonlinear iterative partial least squares (NIPALS) algorithm. There are many variations on the NIPALS algorithm, which consist of a matrix-vector multiplication (e.g., $X'y$) to generate the weight vector w . The matrix-vector multiplication is computed through a set of vector-vector multiplications $x_k' \times y$, to result in scalar results w_k .

[0027] PLS can be represented graphically. For example, consider a regression application with N observations, 3 X -variables (factors/predictors), and 1 y -variable (response). Here, the dimensions of the X matrix are 3 columns by N observations, and the dimensions of the Y matrix is 1 column by N observations. Because there are two matrices, each row (or each observation of the N observations) corresponds to two points; one point on the X -space for the X matrix and one in the Y -space for the Y matrix. When the data table is graphed for all N observations, there is a cluster of N points in the X -space and a cluster of N points in the Y -space. The first PLS component is a line, or vector, in the X -space which approximates the cluster of points and provides a good correlation with the y -vector. Upon computing the first PLS component, the co-ordinate of an observation i along the first component vector can be obtained by projecting the sample onto the line to achieve the score t_{i1} of observation i . The scores of all the observations form the first X -score vector t_1 . A model estimate of y can be determined by multiplying t_1 by the weight of the y -vector c_1 :

$$\hat{y}_{(1)} = c_1 t_1$$

Equation 1

where:

$\hat{y}_{(1)}$ is an estimate of y after one PLS model component;

c_1 is the weight of the y-vector; and

t_1 is the first X-score vector.

[0028] Usually, one PLS component is insufficient to adequately model the variation in the y-data. A second PLS component is used to expand on the PLS model. The second PLS component is also a line in the X-space, which passes through the origin and is orthogonal to the first PLS component. After computing the second PLS component, a second score vector t_2 is achieved, as well as weights c_2 and w_2 :

$$\hat{y}_{(2)} = c_1 t_1 + c_2 t_2 \quad \text{Equation 2}$$

where:

$\hat{y}_{(2)}$ is an estimate of y after two PLS model components;

c_1 is the weight of the first y-vector;

t_1 is the first X-score vector;

c_2 is the weight of the second y-vector; and

t_2 is the second X-score vector.

[0029] This PLS component generation process is repeated until reaching the desired number of components for the PLS model. Additionally, this can be performed with a single response y or multiple responses Y.

[0030] The vector-vector multiplications of the NIPALS algorithm produce similar results to a least squares estimation of a slope of a line through the origin $b = (x'y)/(x'x)$, where $x'x$ is a constant. Further, partial averages of the sorted data set divided into three portions gives a good estimate of $b = (yy_3 - yy_1)/(xx_3 - xx_1)$, where the average of the highest third of y is yy_3 , the average of the lowest third of y is yy_1 , the average of the highest third of x is xx_3 , and the average of the lowest third of x is xx_1 . While partial averages can be a good estimate of b, partial averages can be affected by outside tails of the distribution. Further, computation of PLS components is limited based on the amount of memory available in the processing

system. With large amounts of data storage becoming available at lower prices, the size of data sets are becoming increasingly larger than the computer memory available in the processing system. Consequently PLS processing of large data sets becomes time consuming. Further, standard PLS deflates both the X and Y matrices to speed up the computation with constant vector subtractions.

[0031] PCA is a multivariate projection method designed to extract and display the systematic variation in a data matrix X, revealing groups of observations, trends, and outliers. Data matrix X is a matrix of data with N rows (observations) and K columns (variables). The observations can be, for example, analytical samples, chemical compounds or reactions, process time points of a continuous process, batches from a batch process, biological individuals, trials of a DOE-protocol, and other measurements. To characterize the properties of the observations, variables are measured. The variables can be, for example, of spectral origin, of chromatographic origin, or measurements from sensors in a process (e.g., temperatures, flows, pressures, curves, etc.).

[0032] In some embodiments, the data are pre-processed (e.g., through scaling and mean-centering, described in further detail below). Once pre-processed (if at all), the first principal component (PC1) is computed, which is the line in the K-dimensional space that best approximates the data in the least squares sense. The line goes through the average point, and each observation can be projected onto the line to calculate the observation's score. The model can be extended with additional principal components. Usually, one principal component is insufficient to model the systematic variation of a data set. The second principal component, for example, is also represented by a line in the K-dimensional space which is orthogonal to the first PC. The line also passes through the average point, and improves the approximation of the X-data as much as possible.

[0033] To determine which variables are responsible for the patterns seen among the

observations, the principal component loadings are analyzed, which are vectors called p_1 and p_2 . Geometrically, the principal component loadings express the orientation of the model plane in the K-dimensional variable space. The direction of PC1 in relation to the original variables is given by the cosine of the angles for each variable. For example, for three variables, the direction is given by α_1 , α_2 , and α_3 . These values indicate how the original variables (e.g., x_1 , x_2 , and x_3 for a three variable matrix) load, or contribute to, PC1. A second set of loading coefficients expresses the direction of PC2 in relation to the original variables.

[0034] By using PCA a data table X is modeled as:

$$X = 1 * \bar{x}' + T * P' + E \quad \text{Equation 3}$$

where:

$1 * \bar{x}'$ represents the variable averages after pre-processing the data, if any;

$T * P'$ models the structure; and

E contains noise.

[0035] The principal component scores are the columns of the score matrix T (e.g., t_1 , t_2 , and t_3 for first, second, and third components). These scores are the coordinates of the observations in the model. The scores can be sorted in descending importance (e.g., t_1 explains more variation than t_2). As discussed above, the meaning of the scores is given by the loadings, which build up the loading matrix P (e.g., loadings of the first, second, and third components are p_1 , p_2 , and p_3). The loadings demonstrate the magnitude (e.g., large or small correlation) and the manner (e.g., positive or negative correlation) in which the measured variables contribute to the scores.

[0036] In some embodiments, the data matrices are preprocessed before performing PCA and/or PLS. For example, when using PLS, one or more of the matrices (e.g., matrix X and/or matrix Y) are transformed, centered, and/or scaled by a preprocessing method. Similarly, prior to PCA, the data can be pre-treated into a form suitable for analysis (e.g., to reshape the data such that important assumptions are better fulfilled). PLS modeling works best when the

data are generally symmetrically distributed and have a generally constant error variance. Variables that vary more than ten-fold can be logarithmically transformed before the analysis to remove undesired behavior. Transforming variables can improve the predictive power and interpretability of a multivariate model. For example, a dataset which includes measurements that are outliers may unduly influence model building. Manipulating such measurements in some way prior to data analysis prevents the measurements from exerting a large influence on the model, causing the measurements to dominate over the other measurements. For example, outliers can be removed to minimize the effect that the measurements would have on the model.

[0037] To give variables (i.e., columns) of a matrix relatively or approximately equal weight in the subsequent analysis, the data can be column-wise transformed, scaled, and/or centered. Transformations of variables are often used to give them a more symmetrical distribution. For example, logarithmic transformations, negative logarithm scaling, logit scaling, square root scaling, fourth root scaling, inverse scaling, or power transformation scaling can be used.

[0038] For many types of data, centering and scaling are intertwined. Centering corresponds to a subtraction of a reference vector, where scaling the variables involves multiplying the variables by a scaling vector. The choice of scaling vector is crucial. In situations where variables of different origin and numerical range are encountered the scaling vector is usually chosen as the inverse spread of the variables. In other situations, such as with process data, the scaling vector may be defined relative to a tolerable spread in the variables.

[0039] A scaling vector is a representation of a number of observations on a line such that the positioning of the points is related in some mathematical sense to one or more criteria relevant to the observations. The scaling process involves regulating the length of a coordinate axis in variable space according to a predetermined criteria (e.g., that the length of each coordinate axis be set to the same variance). A common technique for scaling data is

referred to as “unit variance,” “UV” scaling, or “auto-scaling.” Unit variance scaling involves calculating a standard deviation for a particular variable from a data set. A scaling weight is calculated as the inverse of the standard deviation. Each value of the variable is multiplied by the scaling weight to determine the scaled variable. After all of the variables in the data matrices have been scaled, each of the variables (i.e., coordinate axes) have unit variance.

[0040] In FIG. 1, The web server 103 can be, for example, a single web server with a processor and memory. In other embodiments, the web server 103 can be a plurality of web servers configured to provide web services to a user device 101. The website can provide tag 104 along with website code (e.g., HTML code), comprising code (e.g., JavaScript code) that, when executed by the web browser 102 on the user device 101, monitors user activity of an associated website displayed in the web browser 102. In some embodiments, instead of or in addition to the tag 104, the website provided by the web server 103 can provide an application programming interface (API) that facilitates monitoring user activity, such as the monitoring of keywords in messages, or other data used within the website (e.g., which can be viewed by the user device 101). The API can be an interface implemented by the website that enables other software programs to interact with the website. In some embodiments, the web server 103 can provide a same website viewed on both the user device 101 via the web browser 102 and the agent device 115 (e.g., via a web browser on the agent device 115, not shown). In such instances, the website viewed on the agent device 115 and user device 101 may not be identical.

[0041] The user device 101 can be computing devices with a processor and memory that can interact with the website through its web browser 102. For example, the user device 101 can include desktop computers, laptop computer, tablet computers, and/or mobile phones connected to the network 107. A user of the user device 101 can use the user device 101 to connect to the website provided by the web server 103 and can be engaged with an agent

device (e.g., agent device 115) through the engagement server 111.

[0042] The web browser 102 can be software used by the user device to connect to other devices through the network 107. In some embodiments, the user device can be connected to the web server 103 before connecting to the network 107. In other embodiments, the web server 103 can be connected to the user device 101 through the network 107.

[0043] Tag 104 can be a coded tag, such as an HTML tag, that can be included in a web page the web server 103 provides to the user device 101 through the web browser 102. In some embodiments, the tag 104 can be a tag module stored in the memory of the user device 101 that communicates with the web server 103 and/or the engagement server 111 via the connection 117. For example, when the user causes the web browser 102 to load the web page, the web browser 102 processes the tag 104, which causes the web browser 102 to download default tag code (e.g., a JavaScript code file) from the web server 103. In some embodiments, the engagement server 111 can provide the default tag code to the web browser 102. The web browser 102 can receive, process, and execute the default tag code to generate the tag. The default tag code can contain code/instructions that monitor and transmit information indicative of the user's interaction with the web page (e.g., user interaction data) to the web server 103, the engagement server 111, or both. For example, the user interaction data can include mouse clicks, form entries, and Uniform Resource Locator (URL) history. Combinations of one or more user interactions can trigger actions by the engagement server 111, which is described below with reference to FIGS. 2 and 3.

[0044] Agent device 115 can be computing devices with a processor and memory that can connect to the engagement server 111 and can be in communication with the user device 101. For example, the agent device 115 can include desktop computers, laptop computers, tablet computers, and/or mobile phones connected to the network 107. The agent using the agent device 115 can use the agent device 115 to connect to the user device through an engagement

(e.g., chat, video chat, phone chat, etc.) initiated by the engagement server 111. Once engagement is initiated, the agent device 115 and user device 101 can be in communication with each other through the network 107. This can allow, for example, engagement between the agent and user through interactions such as a live chat session.

[0045] FIG. 2 illustrates a flowchart of an exemplary method 200 for initiating engagement with a user (e.g., a user browsing a website). For example, the engagement server 111 can run method 200 to determine whether to connect the agent device 115 to the user device 101. Method 200 starts at step 201 and proceed to step 203, where the engagement server 111 receives and stores engagement rules (e.g., receives and stores them in engagement DB 113). These engagement rules can be rules for determining when (e.g., based on certain user interactions with a website, based on the passage of a preconfigured amount of time, etc.) to connect the agent device 115 to the user device 101 for direct engagement (or mediated engagement), or for the web server 103 or the engagement server 111 to provide specific content to the user device 101 (e.g., a coupon, a targeted advertisement, etc.). For example, an engagement rule can be configured such that the engagement server 111 initiates a chat session between the agent device 115 and the user device 101 when the user device 101 has been idle on the same web page within a website for a specified period. In some embodiments, the engagement rule can be generated based on previous third-party analytics. For example, the engagement server 111 can retrieve one or more third-party analytic reports from third-party databases 123A-123B, which can indicate that users have a higher bounce rate once they reach a specific web page (e.g., a “FAQ” or “Help” web page). The engagement server 111 can then create and store an engagement rule that includes a shortened timer when a user device 101 is visiting one of these specific, “high-bounce” web pages.

[0046] The engagement server 111 can then proceed to step 205, where it receives user

interaction data from the user device 101. For example, the tag 104 included in the user device 101 (e.g., downloaded from web server 103) can track and record user interaction data within the web browser 102. In some embodiments, the tag 104 sends the user interaction data to the web server 103, which can then send the user interaction data through the network 107 to the engagement server 111. In some embodiments, the tag 104 sends the user interaction data directly to the engagement server via connection 117. In some embodiments, the tag 104 can send the user interaction data to the engagement server 111 in packets at standard intervals, where the engagement server 111 can accrue the packets of data. In other embodiments, the tag 104 can wait for triggers to send user interaction data to the engagement server 111. This can, for example, help reduce the volume of user interaction data sent to the engagement server 111.

[0047] After receiving the user interaction data, the engagement server 111 can then proceed to step 207, where it can adjust the engagement rules. In some embodiments, the engagement server 111 can adjust the previously-stored engagement rules to, for example, trigger based on different conditions. For example, the engagement server 111 in step 205 may receive user interaction data that indicates that the user is spending longer-than-average times on each webpage before traversing to another page within the website. The engagement server 111 can then adjust engagement rule to have a longer trigger time so that the engagement server 111 initiates an engagement between the agent device 115 and the user device 101 after a longer period (e.g., to prevent initiating an engagement before a user may need help).

[0048] In step 209, the engagement server 111 determines whether it has received data indicative of an engagement rule being satisfied. In some embodiments, the engagement server 111 can monitor the user interaction data received in step 205 and compare the user interaction data against a plurality of engagement rules, initiating an engagement between the agent device 115 and the user device 101 when the conditions of any of the plurality of

engagement rules is satisfied. For example, the engagement server 111 can be using an engagement rule that waits until a user has been on a specific web page (e.g., an FAQ page) for at least a specified duration. When the engagement server 111 reviews the received user interaction data to determine that the user has been on the specific web page for longer than the specified duration, the engagement server may then proceed to step 211 and initiate an engagement between with user device 101 (e.g., present the user device 101 with a popup, set up a service session between the user device 101 and the agent device 115 (e.g., a chat session, a video session, etc.), etc.). Otherwise, the engagement server 111 can loop back to step 209 (e.g., to analyze newly received user interaction data) to determine whether any of its engagement rules have been satisfied.

[0049] In step 211, the engagement server 111 can initiate an engagement with the user. For example, the engagement server 111 can initiate a chat session between the agent and the user via the agent device 115 and the user device 101. In some embodiments, the engagement server 111 can initiate an engagement with the user through other means, such as providing additional text or video instructions based on the engagement rule satisfied. For example, the engagement server 111 can monitor an engagement rule regarding a user comparing two or more similar products. Once the engagement server 111 determines that the comparison engagement rule has been satisfied, the engagement server 111 can provide a stored video comparison of the two or more products. In some embodiments, the engagement server can use other means through JavaScript and HTML to engage with the user device 101. This can include, for example, providing to the web browser 102 a banner, a tool-tip, hover-over text, and similar methods to provide more information to the user. Once the engagement has been initiated, the engagement server 111 can stop method 200 at step 213.

[0050] FIG. 3 illustrates a flowchart of another exemplary method of initiating engagement. Similar to the method 200 (e.g., implemented by the engagement server 111), the engagement

server 111 can implement method 300 to incorporate web analytics from various sources along with received user interaction data to determine whether to initiate an engagement with the user device 101. Method 300 begins at step 301 and proceeds to step 303, where the engagement server 111 receives and stores one or more engagement rules. Similar to step 203, the engagement server 111 can receive one or more engagement rules that may indicate when to initiate an engagement with the user device 101 and the agent device 115. In some embodiments, the engagement server 111 can incorporate one or more third-party analytics, such as multiple third-party analytic reports, from one or more third-party databases 123A-123B via third-party servers 121A-121B.

[0051] In step 305, the engagement server 111 can receive user interaction data from a plurality of user devices similar to the user device 101 in Fig. 1. Similar to step 205 in method 200, the engagement server 111 can receive data that indicates how a particular user is interacting with the site. In step 305, the engagement server 111 can receive user interaction data from a plurality of user devices 101, such as simultaneously receiving data from multiple user devices 101 in parallel. In some embodiments, the engagement server 111 can accumulate the user interaction data from the plurality of users and store this data for later use. The engagement server 111 can track different data for different individual users; this data may still be used together by the engagement server 111 in later use.

[0052] The engagement server 111 can then proceed from step 305 and proceed to step 306, where the engagement server 111 generates a statistical model based on the accumulated user interaction data. In some embodiments, the engagement server can use various third-party analytics received from the plurality of third-party databases 123A-123B, in addition to stored user interaction data and the user interaction data received in step 305. The engagement server 111 can form the statistical model to create a “model” user profile, for example, that can represent the expected actions of a typical, default user. In such instances,

the engagement server 111 bases its engagement decisions on the default statistical profile that can be constantly updated as the engagement server 111 receives new user interaction data. In some embodiments, the engagement server 111 can use the statistical model to form a plurality of user profiles that it may use to model each of the plurality of user devices for which it is receiving user interaction data.

[0053] After creating the statistical model, the engagement server 111 can then proceed to step 307, where it can adjust the engagement rules based on the received user interaction data. In some embodiments, the engagement server 111 can use the user interaction data to adjust the engagement rules. In other embodiments, the engagement server 111 can first use the statistical model to adjust the engagement rules and subsequently use the user interaction data to further adjust the engagement rules. The engagement server 111 may act in a similar manner to that of step 207, as the engagement server 111 can use the user interaction data along with the statistical model to modify the previously received and stored engagement rules so that the engagement server 111 initiates an engagement between the agent device 115 and the user device 101 at more opportune times.

[0054] In order to determine whether it is an opportune time to initiate an engagement between the user device 101 and the agent device 115, the engagement server 111 may proceed to step 309, where the engagement server 111 determines whether it has received user interaction data from a user device 101 indicative of any of the engagement rules being satisfied. In some embodiments, the engagement server 111 can constantly monitor multiple user devices 101 and can determine whether one of the plurality of user devices 101 satisfied its conditions for engagement. If not, the engagement server 111 can loop back to step 309 and wait until a condition is satisfied.

[0055] When a condition is satisfied, the engagement server 111 can proceed to step 311, where the engagement server 111 initiates an engagement with the user device 101. Similar

to step 211, the engagement server 111 can initiate direct communication, such as, for example, a text or video chat session, between an agent and user via the agent device 115 and the user device 101. Once the engagement server 111 successfully initiates an engagement with the user device 101, it may proceed to step 313 and end method 300.

[0056] The above-described computerized methods and apparatuses can be implemented in digital and/or analog electronic circuitry, or in computer hardware, firmware, software, or in combinations of them. The implementation can be as a computer program product, i.e., a computer program tangibly embodied in a machine-readable storage device, for execution by, or to control the operation of, a data processing apparatus, e.g., a programmable processor, a computer, and/or multiple computers. A computer program can be written in any form of computer or programming language, including source code, compiled code, interpreted code and/or machine code, and the computer program can be deployed in any form, including as a stand-alone program or as a subroutine, element, or other unit suitable for use in a computing environment. A computer program can be deployed to be executed on one computer or on multiple computers at one or more sites.

[0057] The computerized method steps can be performed by one or more processors executing a computer program to perform functions of the invention by operating on input data and/or generating output data. Method steps can also be performed by, and an apparatus can be implemented as, special purpose logic circuitry, e.g., a FPGA (field programmable gate array), a FPAA (field-programmable analog array), a CPLD (complex programmable logic device), a PSoC (Programmable System-on-Chip), ASIP (application-specific instruction-set processor), or an ASIC (application-specific integrated circuit). Subroutines can refer to portions of the computer program and/or the processor/special circuitry that implement one or more functions.

[0058] Processors suitable for the execution of a computer program include, by way of

example, both general and special purpose microprocessors, and any one or more processors of any kind of digital or analog computer. Generally, a processor receives instructions and data from a read-only memory or a random access memory or both. The essential elements of a computer are a processor for executing instructions and one or more memory devices for storing instructions and/or data. Memory devices, such as a cache, can be used to temporarily store data. Memory devices can also be used for long-term data storage. Generally, a computer also includes, or is operatively coupled to receive data from or transfer data to, or both, one or more mass storage devices for storing data, e.g., magnetic, magneto-optical disks, or optical disks. A computer can also be operatively coupled to a communications network in order to receive instructions and/or data from the network and/or to transfer instructions and/or data to the network. Computer-readable storage devices suitable for embodying computer program instructions and data include all forms of volatile and non-volatile memory, including by way of example semiconductor memory devices, e.g., DRAM, SRAM, EPROM, EEPROM, and flash memory devices; magnetic disks, e.g., internal hard disks or removable disks; magneto-optical disks; and optical disks, e.g., CD, DVD, HD-DVD, and Blu-ray disks. The processor and the memory can be supplemented by and/or incorporated in special purpose logic circuitry.

[0059] To provide for interaction with a user, the above described techniques can be implemented on a computer in communication with a display device, e.g., a CRT (cathode ray tube), plasma, or LCD (liquid crystal display) monitor, for displaying information to the user and a keyboard and a pointing device, e.g., a mouse, a trackball, a touchpad, or a motion sensor, by which the user can provide input to the computer (e.g., interact with a user interface element). Other kinds of devices can be used to provide for interaction with a user as well; for example, feedback provided to the user can be any form of sensory feedback, e.g., visual feedback, auditory feedback, or tactile feedback; and input from the user can be

received in any form, including acoustic, speech, and/or tactile input.

[0060] The above described techniques can be implemented in a distributed computing system that includes a back-end component. The back-end component can, for example, be a data server, a middleware component, and/or an application server. The above described techniques can be implemented in a distributed computing system that includes a front-end component. The front-end component can, for example, be a client computer having a graphical user interface, a Web browser through which a user can interact with an example implementation, and/or other graphical user interfaces for a transmitting device. The above described techniques can be implemented in a distributed computing system that includes any combination of such back-end, middleware, or front-end components.

[0061] The computing system can include clients and servers. A client and a server are generally remote from each other and typically interact through a communication network. The relationship of client and server arises by virtue of computer programs running on the respective computers and having a client-server relationship to each other.

[0062] The components of the computing system can be interconnected by any form or medium of digital or analog data communication (e.g., a communication network). Examples of communication networks include circuit-based and packet-based networks. Packet-based networks can include, for example, the Internet, a carrier internet protocol (IP) network (e.g., local area network (LAN), wide area network (WAN), campus area network (CAN), metropolitan area network (MAN), home area network (HAN)), a private IP network, an IP private branch exchange (IPBX), a wireless network (e.g., radio access network (RAN), 802.11 network, 802.16 network, general packet radio service (GPRS) network, HiperLAN), and/or other packet-based networks. Circuit-based networks can include, for example, the public switched telephone network (PSTN), a private branch exchange (PBX), a wireless network (e.g., RAN, bluetooth, code-division multiple access (CDMA) network, time

division multiple access (TDMA) network, global system for mobile communications (GSM) network), and/or other circuit-based networks.

[0063] Devices of the computing system and/or computing devices can include, for example, a computer, a computer with a browser device, a telephone, an IP phone, a mobile device (e.g., cellular phone, personal digital assistant (PDA) device, laptop computer, electronic mail device), a server, a rack with one or more processing cards, special purpose circuitry, and/or other communication devices. The browser device includes, for example, a computer (e.g., desktop computer, laptop computer) with a world wide web browser (e.g., Microsoft® Internet Explorer® available from Microsoft Corporation, Mozilla® Firefox available from Mozilla Corporation). A mobile computing device includes, for example, a BlackBerry®. IP phones include, for example, a Cisco® Unified IP Phone 7985G available from Cisco System, Inc, and/or a Cisco® Unified Wireless Phone 7920 available from Cisco System, Inc.

[0064] One skilled in the art will realize the invention may be embodied in other specific forms without departing from the spirit or essential characteristics thereof. The foregoing embodiments are therefore to be considered in all respects illustrative rather than limiting of the invention described herein. Scope of the invention is thus indicated by the appended claims, rather than by the foregoing description, and all changes that come within the meaning and range of equivalency of the claims are therefore intended to be embraced therein.

Claims:

1. A computerized method for automatically adjusting engagement rules based on user interactions with a website, the method comprising:

storing, by a server computer, a set of engagement rules for a website, wherein each engagement rule defines criteria that, if met, causes the website to engage a user of the website;

receiving, by the server computer, data indicative of a set of users' interactions with the website, wherein the data is generated by a third-party data provider; and

automatically adjusting, by the server computer, one or more generated rules from the set of engagement rules based on the received data.

2. The method of claim 1, further comprising:

receiving, by the server computer, second data indicative of a second set of users' interactions with the website, wherein the second data is generated by a second third-party data provider that is different than the third-party data provider; and

generating, by the server computer, a statistical model based on the received data and the second received data.

3. The method of claim 2, wherein:

the received data and the second received data each comprise one or more parameters; and

generating the statistical model comprises correlating a first parameter from the received data and a second parameter from the second received data using a principal component analysis (PCA).

4. The method of claim 2, wherein the statistical model is indicative of user interaction with the website.

5. The method of claim 1, wherein the received data comprises a website analytic report.
6. The method of claim 1, wherein engaging a user comprises transmitting a pop-up window to the user.
7. The method of claim 1, wherein automatically adjusting comprises creating a new engagement rule in the set of engagement rules.
8. The method of claim 1, wherein automatically adjusting comprises changing an existing engagement rule in the set of engagement rules.
9. A computer program product, tangibly embodied in a non-transitory computer readable medium, the computer program product including instructions being configured to cause a data processing apparatus to:
 - store a set of engagement rules for a website, wherein each engagement rule defines criteria that, if met, causes the website to engage a user of the website;
 - receive data indicative of a set of users' interactions with the website, wherein the data is generated by a third-party data provider; and
 - automatically adjust one or more generated rules from the set of engagement rules based on the received data.
10. The computer program product of claim 9 further comprising instructions being configured to cause a data processing apparatus to:
 - receive second data indicative of a second set of users' interactions with the website, wherein the second data is generated by a second third-party data provider that is different than the third-party data provider; and
 - generate a statistical model based on the received data and the second received data.

11. The computer program product of claim 10, wherein:
the received data and the second received data each comprise one or more parameters;
and
instructions to generate the statistical model comprises instructions to correlate a first parameter from the received data and a second parameter from the second received data using a principal component analysis (PCA).
12. The computer program product of claim 10, wherein the statistical model is indicative of user interaction with the website.
13. The computer program product of claim 9, wherein the received data comprises a website analytic report.
14. The computer program product of claim 9, wherein engaging a user comprises transmitting a pop-up window to the user.
15. An apparatus for automatically adjusting engagement rules based on user interactions with a website, the apparatus comprising a processor and memory configured to:
store a set of engagement rules for a website, wherein each engagement rule defines criteria that, if met, causes the website to engage a user of the website;
receive data indicative of a set of users' interactions with the website, wherein the data is generated by a third-party data provider; and
automatically adjust one or more generated rules from the set of engagement rules based on the received data.
16. The apparatus of claim 15, further configured to:

receive second data indicative of a second set of users' interactions with the website, wherein the second data is generated by a second third-party data provider that is different than the third-party data provider; and

generate a statistical model based on the received data and the second received data.

17. The apparatus of claim 16, wherein:

the received data and the second received data each comprise one or more parameters;

and

generating the statistical model comprises correlating a first parameter from the received data and a second parameter from the second received data using a principal component analysis (PCA).

18. The apparatus of claim 16, wherein the statistical model is indicative of user interaction with the website.

19. The apparatus of claim 15, wherein the received data comprises a website analytic report.

20. The apparatus of claim 15, wherein engaging a user comprises transmitting a pop-up window to the user.

100

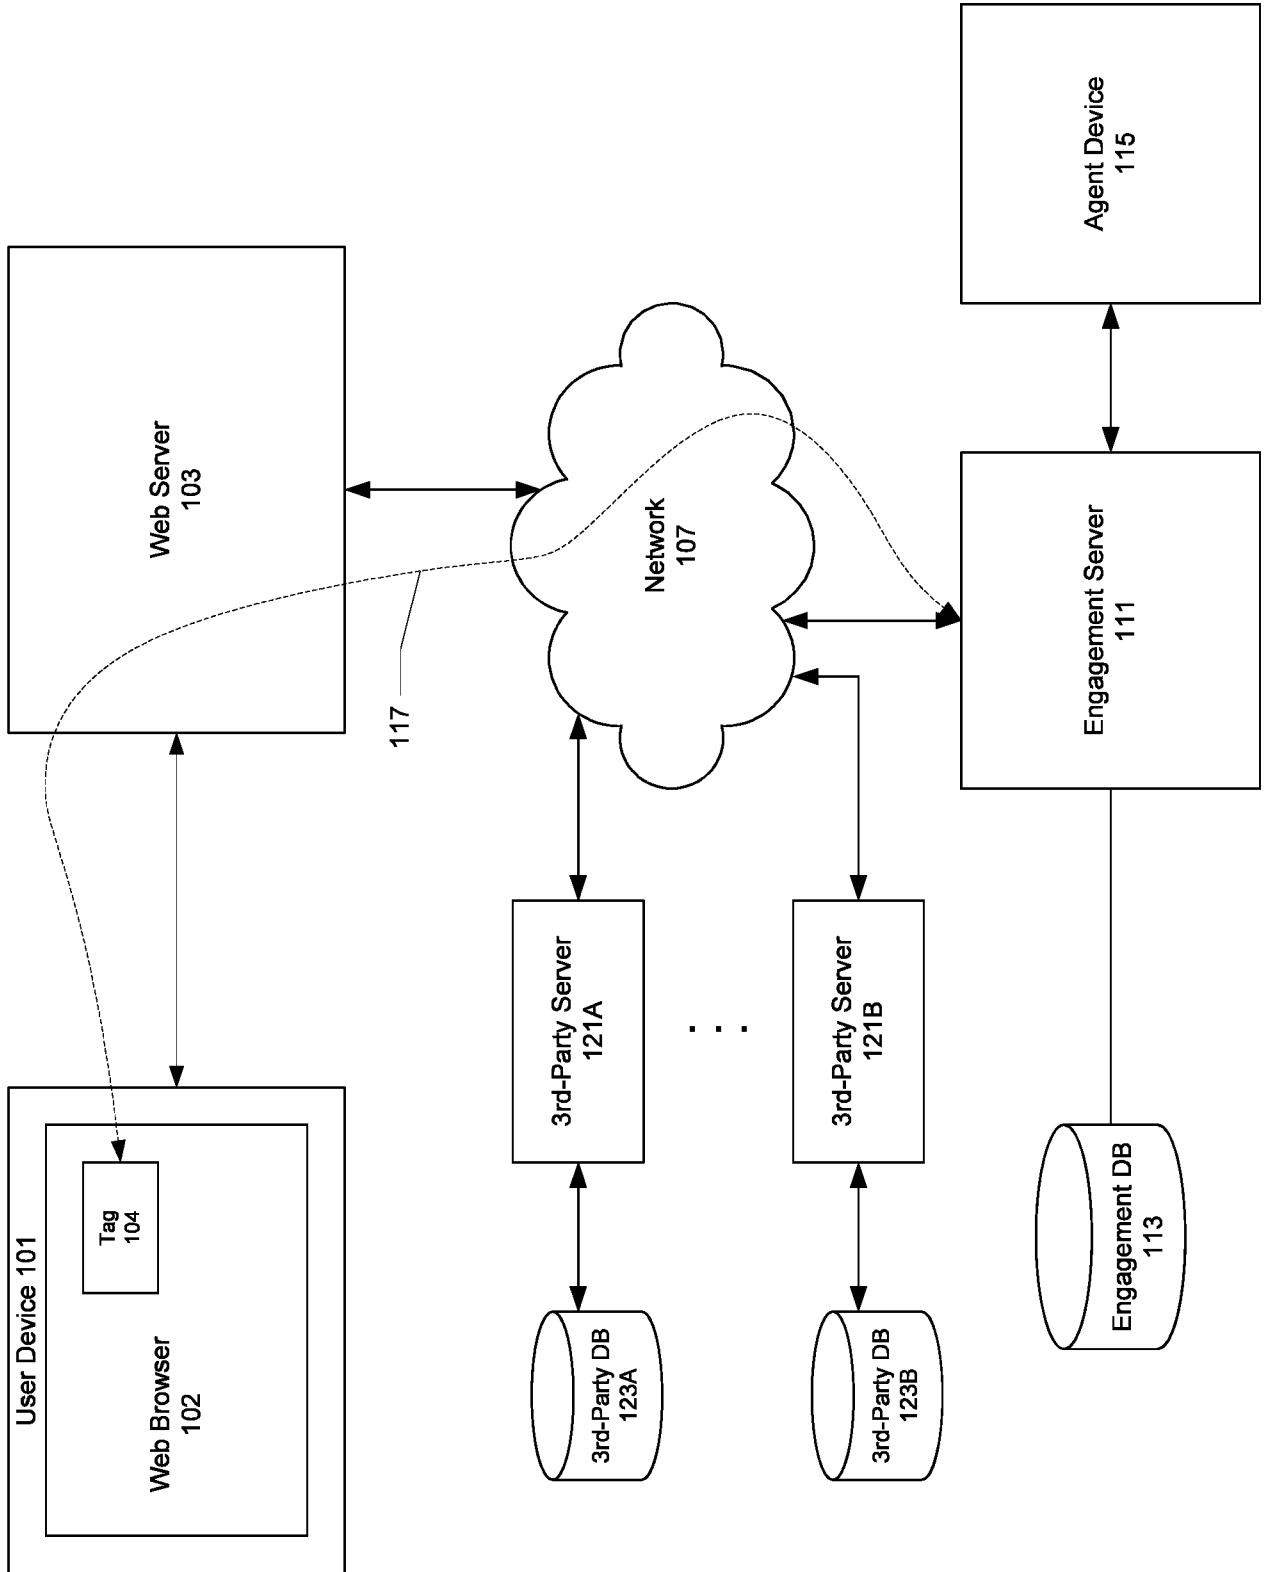


Fig. 1

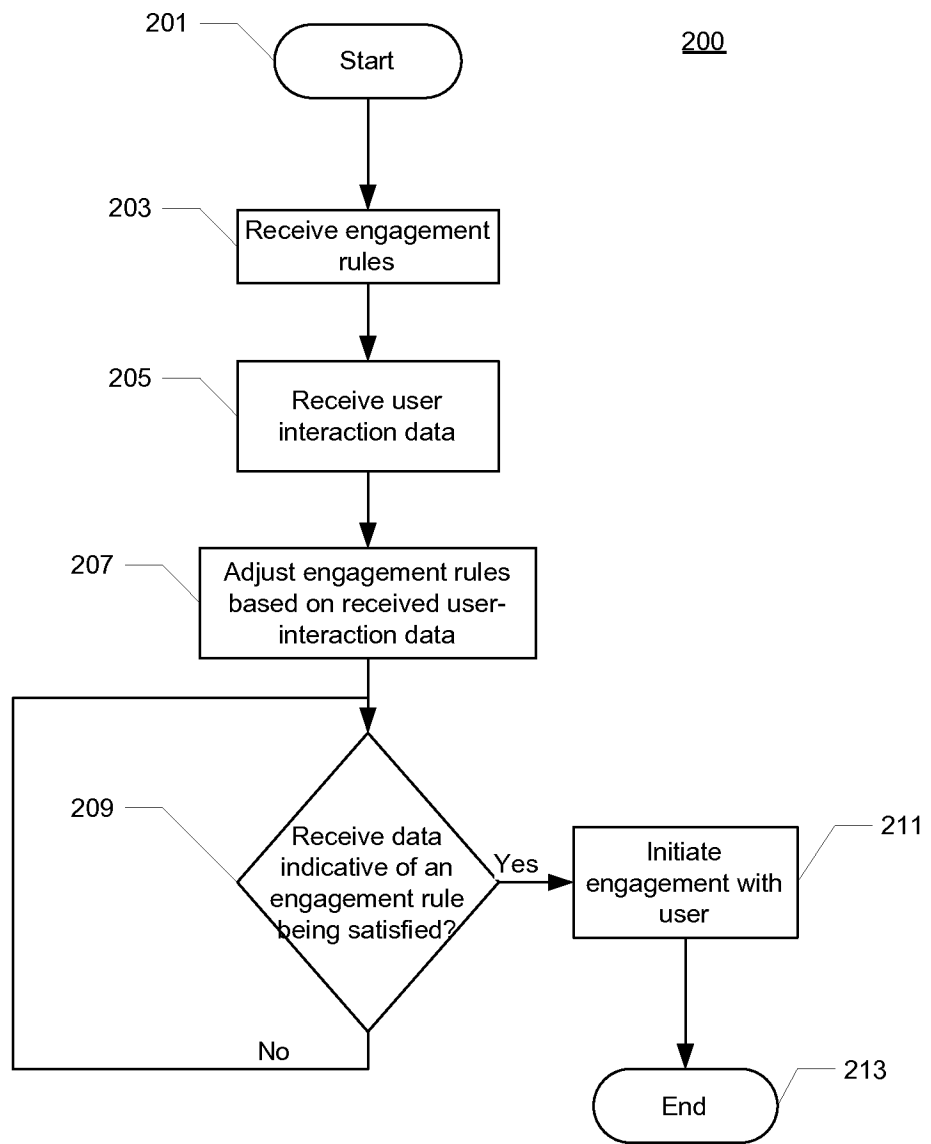


Fig. 2

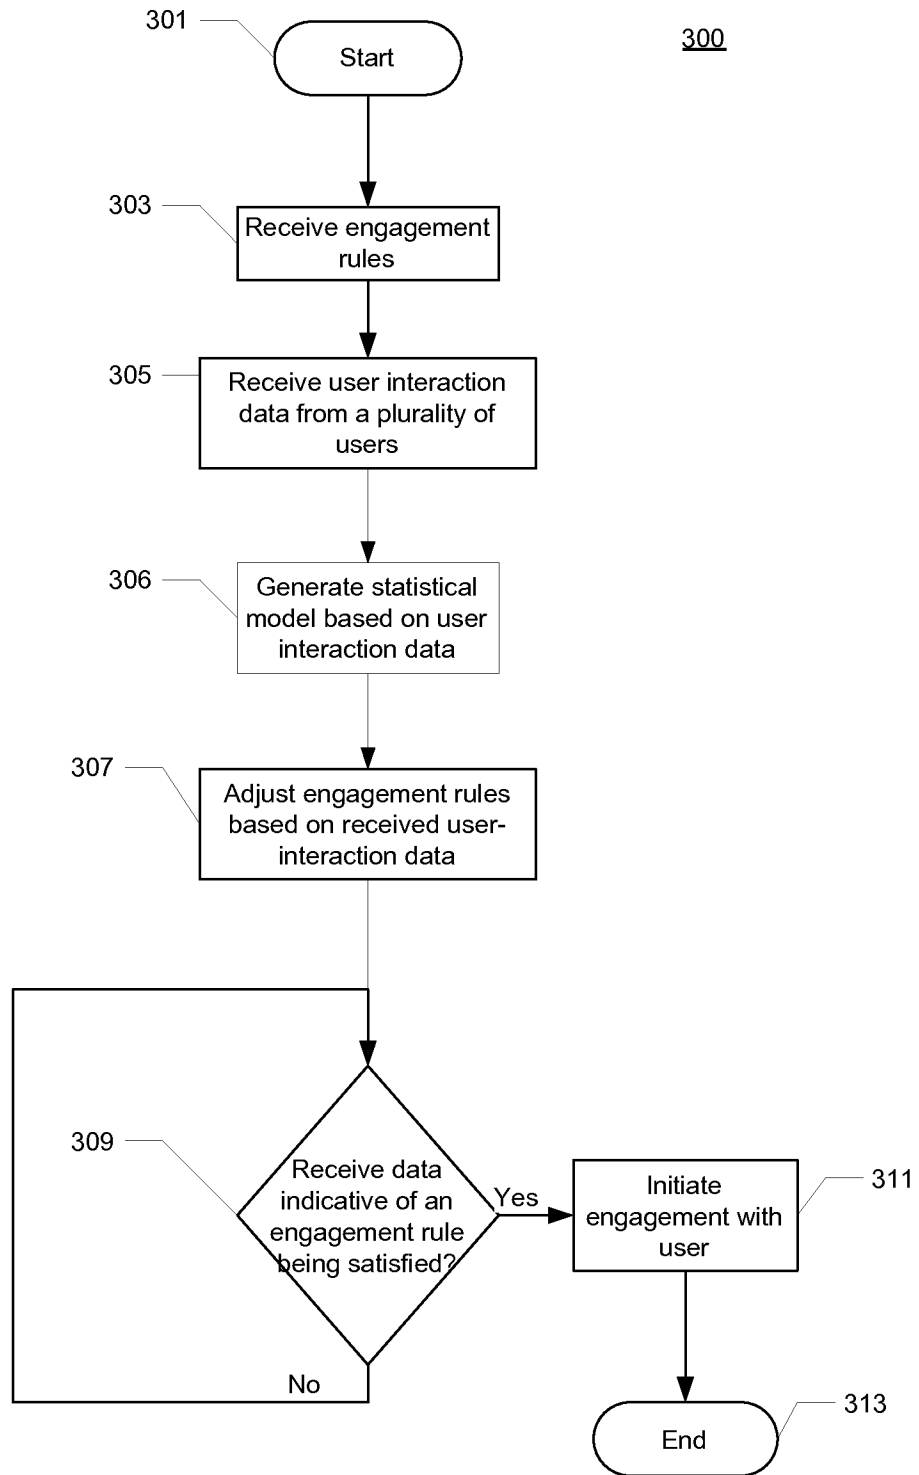


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/025142

A. CLASSIFICATION OF SUBJECT MATTER
INV. G06F17/30 G06Q30/02 G06Q30/00
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
G06F G06Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 2011/307331 A1 (RICHARD ERIC R [US] ET AL) 15 December 2011 (2011-12-15) paragraphs [0010] - [0014] paragraphs [0018] - [0032] A user is monitored during web surfing sessions. A rules engine determines when and how to "engage" the user. This may be a pop-up, a chat bubble, an advertisement, or a user survey.; paragraphs [0064] - [0088], [0143]; figures 2-17	1,6-9, 14,15,20 2-5, 10-13, 16-19
Y	US 2010/281008 A1 (BRAUNWARTH MARY S [US]) 4 November 2010 (2010-11-04) paragraph [0025] - paragraph [0034]; figures 1-6	2-5, 10-13, 16-19
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>
---	---

Date of the actual completion of the international search 25 April 2013	Date of mailing of the international search report 06/05/2013
--	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Bowler, Alyssa
--	--

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/025142

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2011/258039 A1 (PATWA PRITESH [US] ET AL) 20 October 2011 (2011-10-20) Advertisements are delivered to users based on user engagement with advertisements.; paragraphs [0002] - [0008] -----	1-20
A	US 2011/137733 A1 (BAIRD JAMES [US] ET AL) 9 June 2011 (2011-06-09) abstract paragraphs [0003] - [0004] -----	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2013/025142

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011307331 A1	15-12-2011	US 2011307331 A1 WO 2012030777 A1	15-12-2011 08-03-2012

US 2010281008 A1	04-11-2010	NONE	

US 2011258039 A1	20-10-2011	CN 102222300 A US 2011258039 A1	19-10-2011 20-10-2011

US 2011137733 A1	09-06-2011	CA 2783355 A1 CA 2784192 A1 EP 2510486 A2 EP 2510487 A2 US 2011137733 A1 US 2011137737 A1 US 2011137925 A1 WO 2011072048 A2 WO 2011072054 A2 WO 2011072062 A2	16-06-2011 16-06-2011 17-10-2012 17-10-2012 09-06-2011 09-06-2011 09-06-2011 16-06-2011 16-06-2011 16-06-2011
