United States Patent [19]

Wochnowski

[11] **3,881,498**

[45] **May 6, 1975**

[54] **APPARATUS FOR INCREASING THE VOLUME OF MOIST TOBACCO**

[75] Inventor: **Waldemar Wochnowski**, Hamburg, Germany

[73] Assignee: **Hauni-Werke Korber & Co. AG**, Hamburg, Germany

[22] Filed: **Jan. 26, 1972**

[21] Appl. No.: **220,848**

[30] **Foreign Application Priority Data**

Jan. 27, 1971 Germany 2103669

[52] **U.S. Cl.** ..... **131/134**; 131/140 P; 131/121

[51] **Int. Cl.** **A24b 3/18**; A24b 9/00

[58] **Field of Search** 131/140–144, 131/133–136

[56] **References Cited**

UNITED STATES PATENTS

2,614,935	10/1952	Dienst et al.	99/81
2,739,599	3/1956	Abbott, Jr.	131/121
3,524,452	8/1970	Moser et al.	131/140 P
3,529,606	9/1970	de la Burde et al.	131/140 P
3,683,937	8/1972	Fredrickson et al.	131/140 P

Primary Examiner—Melvin D. Rein

Attorney, Agent, or Firm—Michael S. Striker

[57] **ABSTRACT**

Particles of a tobacco stream are first expanded by passing across a high-frequency field wherein they are exposed to the action of electromagnetic waves which effect a vaporization of moisture in the capillaries with attendant increase in volume. The thus expanded particles of the tobacco are thereupon conveyed through a drying zone wherein the particles are externally heated by hot air for a short period of time to thus effect rapid drying of strata immediately adjacent to external surfaces of the particles and to thereby stabilize the particles against shrinkage. In the last step, the tobacco stream is forcibly cooled with air to effect a condensation of vaporized moisture in the capillaries. The expansion of tobacco can be enhanced if the tobacco stream is caused to pass through a bath containing freon or another organic fluid having a boiling point lower than water before the tobacco stream is conveyed across the high frequency field.

10 Claims, 7 Drawing Figures

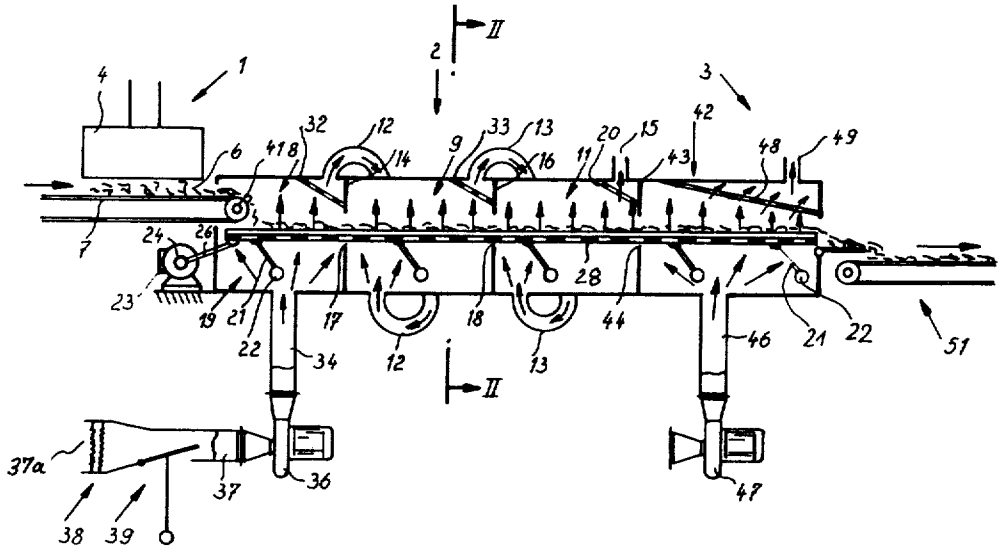

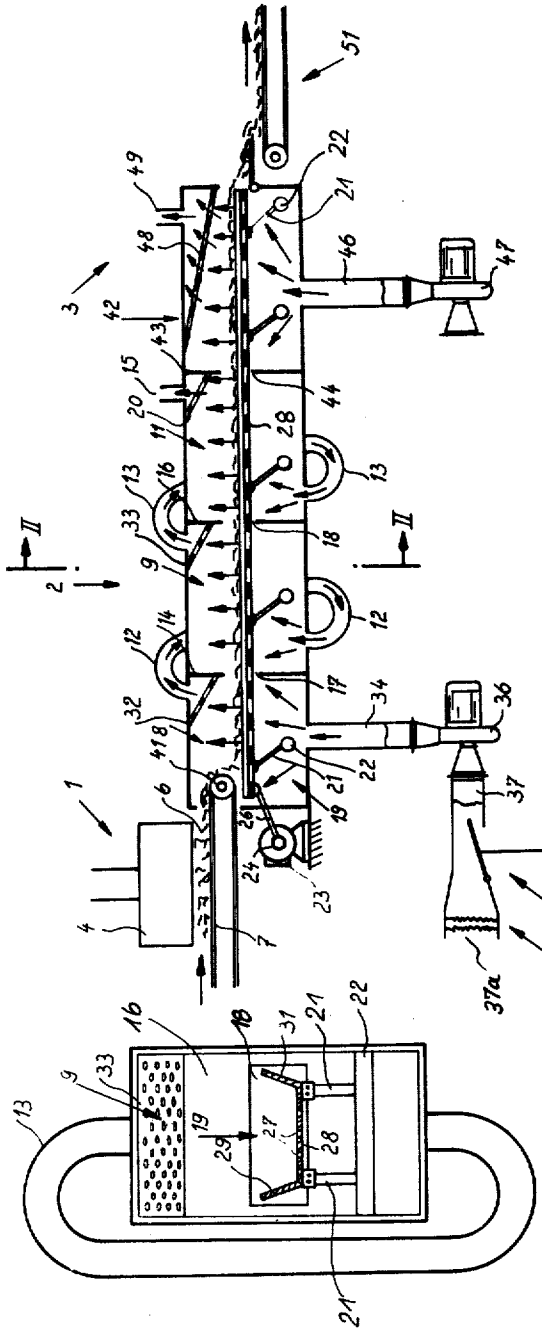

Fig.1

Fig.2

Fig. 3

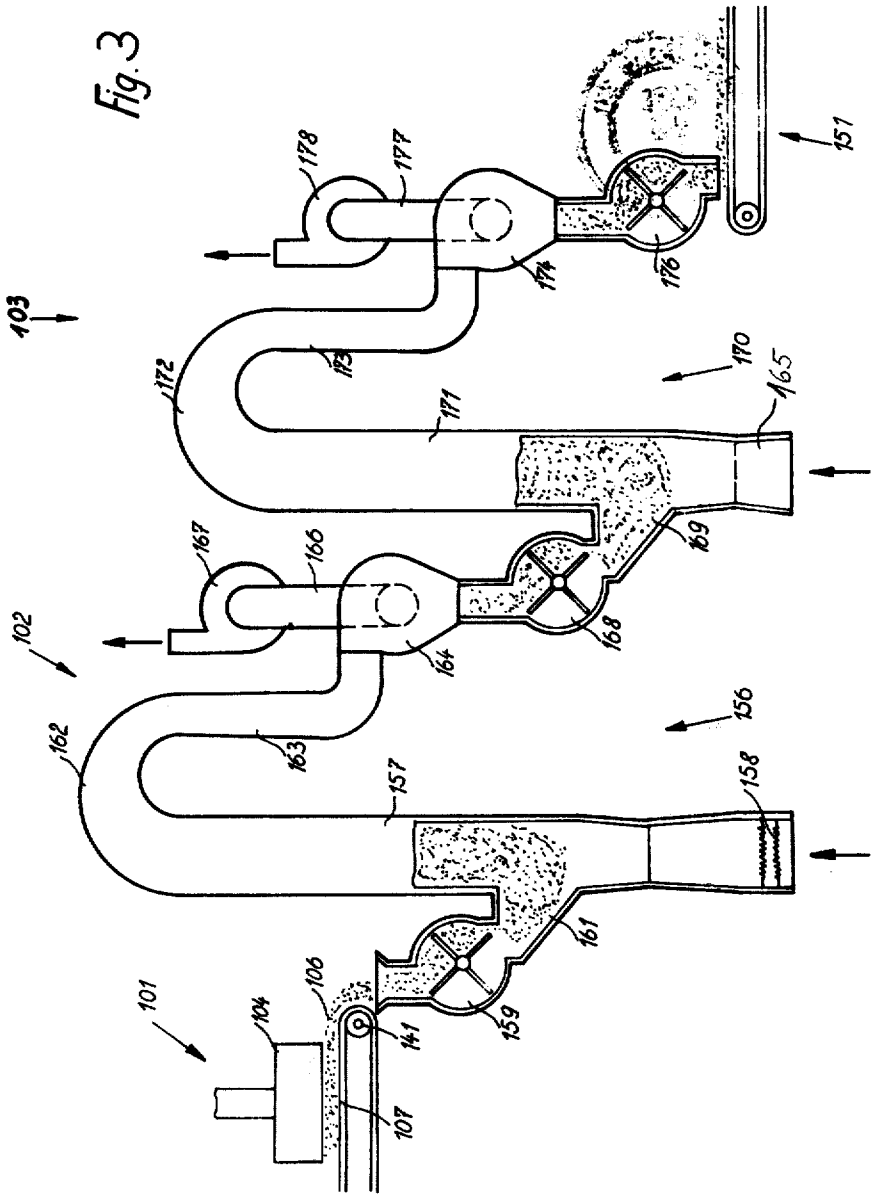
101
102
103
104
106
107
141
151
156
157
158
159
161
162
163
164
165
166
167
168
169
170
171
172
173
174
176
177
178

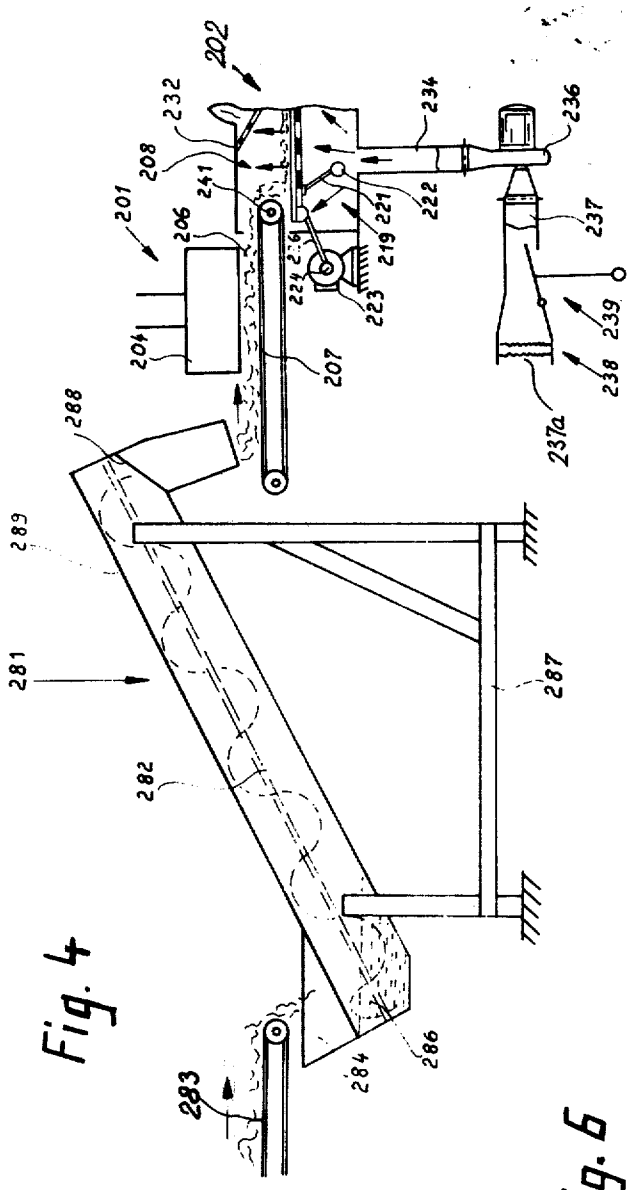

Fig. 4

Fig. 6

Fig. 7

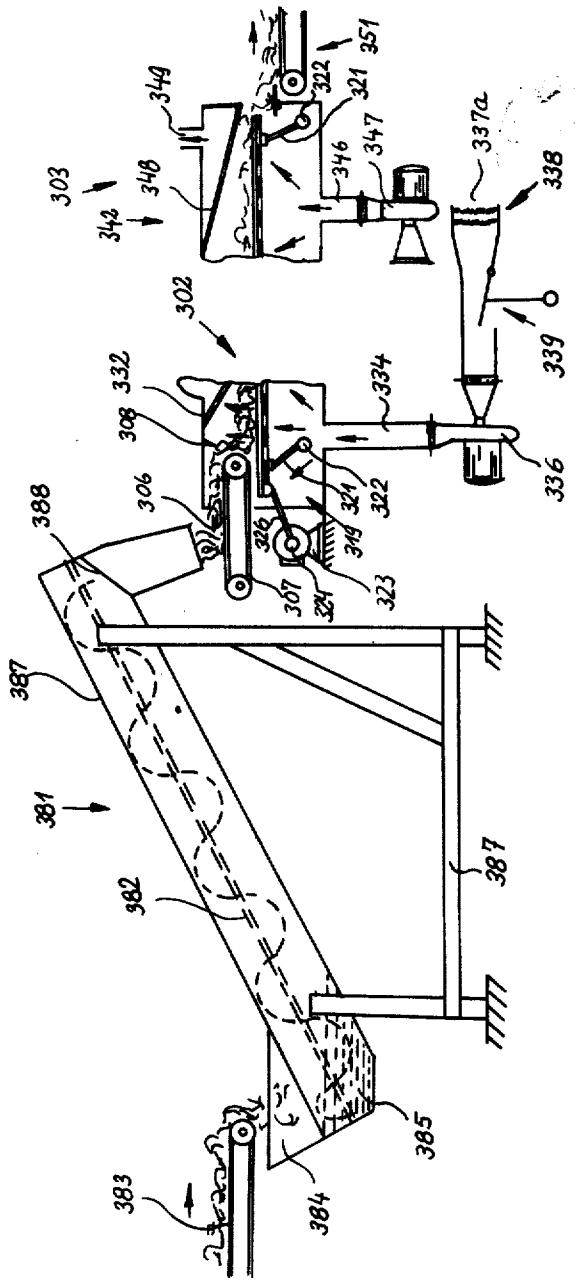
303
342
348
349
351
322
321
347
346
337a
338
339
302
332
308
334
336
306
388
326
307
221
323
387
381
382
385
384
383

Fig. 5

APPARATUS FOR INCREASING THE VOLUME OF MOIST TOBACCO

BACKGROUND OF THE INVENTION

The present invention relates to a method and apparatus for increasing the volume of moist tobacco. More particularly, the invention relates to improvements in a method and apparatus for increasing the volume of tobacco leaves or portions of leaves by subjecting such tobacco particles to the action of a high-frequency field which causes a vaporization of moisture in capillaries of tobacco particles with attendant expansion of capillaries and the resulting increase in volume of tobacco.

The minimum weight of cigarettes or analogous tobacco-containing articles is usually prescribed by law. Since the manufacturers try to maintain the weight of tobacco in a smokers' product as close to the minimum permissible weight as possible, and since the mass of such minimum quantity of tobacco is often insufficient to properly fill the wrapper of a cigarette or a like smokers' product, the manufacturers strive to expand (i.e., to increase the volume of) tobacco particles in order to make sure that a quantity of tobacco having the minimum permissible weight will produce an article having the desirable "feel" or firmness in the hand of a smoker and that particles of tobacco will be less likely to escape at the ends of rod-like tobacco fillers in cigarettes or the like. It is a well known fact that tobacco particles are more likely to escape at the ends of relatively soft cigarettes wherein the tendency of tobacco particles to shift is much more pronounced than in a relatively tightly packed cigarette.

German Pat. No. 738,726 discloses a method of increasing the volume of tobacco particles by subjecting such particles to the action of a high-frequency electric field, especially a field of ultrashort waves with an output of 4–5 watts per gram of tobacco. The high-frequency field causes vaporization of water in the capillaries of tobacco with attendant expansion, and the tobacco is thereupon immediately cooled. The reason for expansion of tobacco in a high-frequency field is that the temperature of water in capillaries (and hence the pressure of resulting steam) rises too rapidly to allow for complete diffusion of steam through the walls of the capillaries. Thus, the rising steam pressure causes a desirable expansion of capillaries; such procedure is known as "puffing."

The immediate cooling of freshly expanded tobacco is considered necessary in order to avoid excessive losses in moisture content. The cooling action is sufficiently intensive to bring about a condensation of steam in the capillaries. It was found that the just described conventional treatment causes undesirable bursting of capillaries so that the expanded and cooled tobacco yields a relatively high percentage of tobacco dust. The bursting capillaries release the steam so that the latter can escape and thus allows for substantial contraction or shrinkage of tobacco. As a result of frequent bursting of capillaries, escape of steam and ensuing shrinkage, the maximum increase in volume of tobacco which is treated in accordance with the method of the aforementioned German patent is only in the range of about 20 percent. In other words, the increase in volume is far from satisfactory, especially when compared with the outlay for machinery and energy which must be utilized to first subject tobacco to the action of a high-frequency field and to thereupon immediately

cool freshly expanded tobacco in order to avoid an excessive reduction in moisture content.

SUMMARY OF THE INVENTION

An object of the invention is to provide a novel and improved method of increasing the volume of tobacco leaves, fragments of tobacco leaves or other particles of tobacco according to which the gain in the volume of tobacco is much higher than in accordance with heretofore known methods, which yields a relatively small percentage of tobacco dust, and which reduces the likelihood of bursting of capillary walls subsequent to expansion.

Another object of the invention is to provide a method according to which the expansion and subsequent treatment of tobacco particles can be completed within extremely short intervals of time, in a small area, and with an acceptable reduction in moisture content.

A further object of the invention is to provide a method which can be resorted to for expansion of many types of tobacco and which can be practiced in presently known tobacco processing plants.

An additional object of the invention is to provide a novel and improved apparatus for increasing the volume of tobacco prior to conversion of expanded tobacco into rods or streams which are ready for wrapping to form plain cigarettes, filter cigarettes, cigarillos, cigars and/or other tobacco-containing smokers' products.

A further object of the invention is to provide the improved apparatus with novel means for preventing the bursting of capillaries in freshly expanded tobacco during cooling.

The method of the present invention is employed for increasing the volume of tobacco, such as tobacco particles constituting portions of or entire tobacco leaves. The method comprises the steps of subjecting moist tobacco to the action of a high-frequency field (preferably to the action of high-frequency electromagnetic waves) so as to vaporize the moisture in the capillaries of tobacco with attendant expansion or volumetric increase of tobacco particles, subjecting the thus expanded tobacco to a short-lasting external heating action, preferably by intimately contacting such tobacco by currents of hot air or another suitable gaseous fluid (e.g., for a period of 3 to 9 seconds) to effect rapid drying of tobacco adjacent to the external surfaces of tobacco particles, and thereupon subjecting the thus externally heated tobacco to a cooling action to effect a condensation of vaporized moisture therein, preferably by bringing about a forced exchange of heat between heated tobacco and atmospheric air or another suitable fluid coolant.

The tobacco is preferably transported in the form of a continuous stream, and the step of subjecting freshly expanded tobacco to a short-lasting external heating action may comprise agitating the tobacco stream while moving it lengthwise and intimately contacting the agitated stream with currents of hot air. The agitating step may comprise vibrating the tobacco stream in the drying zone so that the agitated stream moves lengthwise in the form of a turbulent layer which is traversed by currents of hot air. Alternatively, the step of subjecting freshly expanded tobacco to a short-lasting external drying action may comprise conveying the tobacco stream along a predetermined confining path by and in a current of hot air so that the heating medium

serves as a carrier for tobacco during transport through the drying zone.

At least a portion of the moisture content of tobacco prior to expansion may be due to the presence in tobacco capillaries of an organic fluid, such as freon, having a boiling point which is lower than the boiling point of water. This can be achieved by conveying the tobacco stream through a bath of organic fluid and thereupon into the range of the high-frequency field.

If the tobacco is externally heated in a pneumatic conveyor by intimate contact with a hot gaseous fluid, the flow of such fluid is preferably concurrent with the direction of transport of tobacco. The same preferably holds true when the tobacco stream is transported through the drying zone by a vibratory conveyor. The transport of tobacco through the cooling zone preferably (but not necessarily) takes place in the same way as through the drying zone, i.e., by a vibratory conveyor (which may be the same conveyor which transports tobacco through the driving zone) or by a current of gaseous coolant which serves as a carrier for surface-dried tobacco during transport through the cooling zone.

The novel features which are considered as characteristic of the invention are set forth in particular in the appended claims. The improved apparatus itself, however, both as to its construction and its mode of operation, together with additional features and advantages thereof, will be best understood upon perusal of the following detailed description of certain specific embodiments with reference to the accompanying drawing.

BRIEF DESCRIPTION OF THE DRAWING

FIG. 1 is a schematic central longitudinal vertical sectional view of an apparatus for increasing the volume of moist tobacco which embodies one form of the invention;

FIG. 2 is an enlarged transverse vertical sectional view as seen in the direction of arrows from the line II—II of FIG. 1;

FIG. 3 is a schematic central longitudinal vertical sectional view of a second apparatus;

FIG. 4 is a schematic side elevational view of a moistening device for tobacco which is fed to the apparatus of FIG. 1 or 3;

FIG. 5 is a schematic side elevational view of a modification of the moistening device of FIG. 4;

FIG. 6 is a section through a tobacco particle before the increase in volume; and

FIG. 7 illustrates the tobacco particle of FIG. 6 after the increase in volume.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The apparatus of FIGS. 1 and 2 comprises a heating unit 1, a drying unit 2 and a cooling unit 3. The heating unit 1 preferably comprises a microwave emitter or sender 4, for example, a sender of the type known as MAGNETRON (trademark) produced by the West German firm Deutsche Mikrowellengesellschaft and similar to those employed in certain types of baking ovens. The sender 4 emits high-frequency electromagnetic waves to heat the moisture in the capillaries of tobacco 6 which is being transported by a conveyor belt 7 of the heating unit 1 so that the stream of tobacco 6 passes across the high-frequency field of the sender 4.

The drying unit 2 comprises a series of chambers 8, 9 and 11 which communicate with each other by means of pipes 12 and 13 serving to circulate a hot gaseous fluid (preferably air) which heats tobacco 6 after the latter advances beyond the high-frequency electromagnetic field. The last chamber 11 of the drying unit 2 has an outlet 15 which is located behind a sieve 20 or an analogous foraminous tobacco intercepting device. The chambers 8, 9 and 9, 11 are respectively separated from each other by partitions 14 and 16 which are provided with openings 17 and 18 for a transporting device 19 here shown as a vibratory or shaker conveyor which has a foraminous bottom wall or platform 28 mounted on carriers 22 by means of pairs of leaf springs 21 and receiving recurrent movements from a drive including an electric motor 23 whose output shaft drives an eccentric 24. The latter transmits motion to a connecting rod 26 which is articulately coupled to the platform 28 of the transporting device 19. The apertures 27 (e.g., perforations) of the platform 28 are shown in FIG. 2. The transporting device 19 further comprises two side walls 29 and 31 which flank the platform 28 and are inclined upwardly and outwardly (see particularly FIG. 2). The intake ends of the aforementioned pipes 12, 13 for hot air are located behind sieves 32 and 33. The means for supplying hot air to the drying unit 2 comprises a supply conduit 34 which admits hot air into the bottom region of the first or foremost chamber 8 below the platform 28 and receives hot air from the pressure side of a blower 36. The suction side of the blower 36 is connected with a second supply conduit 37 having a preferably open intake end 37*a* for atmospheric air and containing an electric resistance heater 38. A manually or automatically adjustable mixer valve 39 is mounted in the supply conduit 37 downstream of the heater 38 to regulate the rate of admission of unheated atmospheric air to the air stream which has been heated by the device 38. In this way, the operator or an automatic detector can regulate the temperature of hot air which enters the chamber 8 by way of the supply conduit 34.

The discharge end of the aforementioned conveyor belt 7 in the heating unit 1 extends into the chamber 8 at a level above the platform 28 and is trained over a roller 41. The heated tobacco 6 which reaches the roller 41 descends by gravity to be intercepted by the platform 28 and to be conveyed through the chambers 8, 9 and 11 of the drying unit 2.

The cooling unit 3 comprises a compartment 42 which is located immediately downstream of and is separated from the last chamber 11 of the drying unit 2 by a partition 43 having an opening 44 for the platform 28 and side walls 29, 31 of the transporting device 19. The means for admitting a cooling fluid (preferably air) into the compartment 42 comprises a supply conduit 46 which communicates with the compartment 42 at a level below the platform 28 and receives relatively cool atmospheric air from the pressure side of a blower 47. The outlet 49 of the compartment 42 is separated from the major part of the internal space of the cooling unit 3 by a sieve 48 or an analogous tobacco intercepting device. A removing or take-off conveyor 51 is provided to receive treated tobacco 6 from the compartment 42 of the cooling unit 3 and to transport such tobacco to a further processing station, not shown.

The operation:

The belt 7 of the heating unit 1 transports tobacco 6 (with a moisture content in the range of between about

18 and 20 percent) across the electromagnetic field which is produced by the sender 4. The high-frequency energy generated by the emitter or sender 4 heats the moisture in the capillaries of tobacco 6 so that the moisture is converted into steam and its volume increases to effect a desirable stretching or expansion of capillaries under the action of steam pressure. In other words, the tobacco is inflated as a result of steam pressure in its capillaries, not unlike a balloon which is being filled with air. The thus heated and expanded tobacco 6 reaches the roller 41 at the discharge end of the conveyor belt 7 in the chamber 8 of the drying unit 2 and descends onto the left-hand end portion of the platform 28 to advance in the channel defined by the trough-shaped transporting device 19. The latter transports successive increments of the tobacco stream through the chambers 8, 9, 11 of the drying unit 2 and thereupon into and through the compartment 42 of the cooling unit 3. The blower 36 supplies into the lower region of the chamber 8 a current of hot air (whose temperature is determined by the setting of the flap of the mixer valve 39 in the supply conduit 37) whereby such air passes through the apertures 27 of the platform 28, across the tobacco stream in the chamber 8, through the sieve 32, through the pipe 12 which connects the upper region of the chamber 8 with the lower region of the chamber 9, through the platform 28 in the chamber 9, through the tobacco stream in this chamber, thereupon through the sieve 33, through the pipe 13 which connects the upper region of the chamber 9 with the lower region of the chamber 11, through the platform 28, through the tobacco stream in the chamber 11, and through the sieve 20 and outlet 15 to be discharged into the atmosphere or to be recirculated to the intake end 37*a* of the supply conduit 37.

It will be noted that the width of the channel defined by the platform 28 and side walls 29, 31 of the trough-shaped transporting device 19 increases in the direction of air flow through the platform 28 (i.e., upwardly, as viewed in FIG. 1 or 2), so that the speed at which the particles of tobacco rise under the action of currents of hot air in the drying unit 2 decreases. As the platform 28 vibrates under the action of the eccentric 24 which drives the connecting rod 26, it causes the layer of tobacco 6 thereon to rise and fall so that the particles of tobacco are continuously agitated and are intimately contacted by currents of hot air which pass upwardly through the apertures 27 of the platform 28. It can be said that the mass of tobacco in the chambers 8, 9 and 11 of the drying unit 2 forms a turbulent layer wherein the particles move relative to each other and relative to the platform 28 under the action of the motor 23 as well as under the action of ascending currents of hot air which pass through the apertures 27. This insures a highly intensive and hence satisfactory exchange of energy between tobacco 6 and hot air. It will be noted that the flow of hot air which contacts the particles of tobacco 6 in the drying unit 2 is substantially at right angles to the direction of transport of such particles from the heating unit 1 toward the cooling unit 3. The drying process which takes place in the unit 2 can be termed an external drying action with currents of air which are conveyed concurrently with the tobacco stream because the tobacco particles are contacted with hot air at a maximum temperature in the first chamber 8 and with hot air at lowest temperature in the last chamber 11.

The very hot air which comes into contact with tobacco particles in the first chamber 8 of the drying unit 2 brings about an abrupt or sudden drying of the stratum adjacent to the external surface of each freshly expanded tobacco particle. The drying action in the second and third chambers 9, 11 serves mainly to stabilize the effect which is produced in the first chamber 8 without effecting any appreciable drying in the inner stratum or strata of tobacco. This will be readily appreciated since the temperature of hot air in the chambers 9 and 11 is respectively lower than in the chambers 8 and 9, and also because the moisture content of air in the chambers 9 and 11 is respectively higher than in the chambers 8 and 9. Since the main purpose of the drying unit 2 is to effect a preferably abrupt drying action upon the outermost stratum of each tobacco particle which leaves the belt 7 of the heating unit 1, the drying unit 2 could operate properly with a single chamber, e.g., with the chamber 8. If the drying unit 2 comprises a single chamber, such single chamber 8 is preferably at least slightly longer then the illustrated chamber 8.

The rapid drying of exposed surfaces of tobacco particles in the chamber or chambers of the drying unit 2 stabilizes the volume of such particles so that they remain expanded or puffed, i.e., the volume of such particles does not decrease appreciably during transport by the platform 28 through the drying unit 2. The transporting device 19 immediately introduces the freshly surface-dried tobacco particles into the compartment 42 of the cooling unit 3 wherein the particles are subjected to the cooling action of currents of relatively cool air which is supplied into the lower region of the compartment 42 by the blower 47 through the intermediary of the supply conduit 46. The intensive cooling of tobacco particles in the turbulent tobacco layer above the upper side of the platform 28 in the compartment 42 brings about a reduction of the steam pressure in the capillaries of tobacco particles and the condensation of steam. The condensation of steam is desirable in order to prevent penetration of steam into the outer strata of tobacco particles because such penetration could result in softening of the abruptly cooled and dried outer strata immediately adjacent to the external surfaces of tobacco particles. The dried skin of each tobacco particle acts not unlike a shell to prevent shrinkage (reduction in volume) of tobacco particles during cooling with attendant drop of steam pressure in the capillaries. Consequently, the increased volume of tobacco particles is preserved and stabilized during transport through the units 2, 3 so that the volume of tobacco particles which reach the removing conveyor 51 considerably exceeds the volume of tobacco particles which are expanded or puffed in accordance with the heretofore known methods.

For example, the tobacco which is being fed onto the belt 7 of the heating unit 1 can be maintained at room temperature and the temperature of expanded tobacco particles downstream of the sender 4 may be between 40°–99°C. The temperature of hot air in the chambers 8, 9, 11 of the drying unit 2 may vary between 180°–80°C. As mentioned above, the moisture content of tobacco 6 which is fed onto the belt 7 may be in the range of 18–20 percent, and the moisture content of tobacco leaving the compartment 42 of the cooling unit 3 may be about 13 percent. The increase in volume of the tobacco (leaf tobacco and cut tobacco rag) is in the range of up to 30 percent (compare FIGS. 6 and 7).

The speed of the tobacco stream on the belt **7** can be selected in such a way that the interval required by tobacco particle to travel across the electromagnetic field which is produced by the sender **4** is between 10–40 seconds. The length of the period of dwell of tobacco particles in the chambers **8, 9, 11** of the drying unit may be between 3 and 9 seconds. It is clear that the above data are furnished merely by way of example since the temperature of hot air in the drying unit **2**, the initial moisture content of tobacco, the speed of tobacco transport across the electromagnetic field, and/or the speed of transport of tobacco through the units **2** and **3** will depend on a number of factors, such as the nature of tobacco, the size of tobacco particles, the rate at which the width of the platform **28** increases in the direction of tobacco transport, the construction of the sender **4** and/or others.

The electromagnetic field which is produced by the sender **4** insures very rapid and reliable vaporization of moisture in the capillaries of tobacco **6**. The next-following step, i.e., the action of hot gaseous fluid in the chambers **8, 9** and **11** of the drying unit **2**, has been found to produce an unexpected and highly desirable effect, namely, it prevents bursting of capillaries and it also stabilizes the walls of capillaries to thus prevent appreciable shrinkage during cooling in the unit **3**. The external heating action of hot air has been found to be particularly satisfactory for such purposes.

The forcible cooling of tobacco in the drying unit **3** also constitutes a novel step of the improved method. Such forcible cooling results in rapid condensation of steam in the expanded capillaries of tobacco **6** to thus prevent gradual softening of capillary walls which would take place if the tobacco **6** leaving the unit **1** or **2** were allowed to cool slowly, e.g., merely by exposure to a stagnant body of atmospheric air. Softening of capillary walls, as a result of gradual condensation of steam therein, would permit excessive shrinkage of such walls so that the major part of beneficial expanding action in the heating unit **1** would be lost.

The heating of tobacco **6** in a high-frequency field, especially a high-frequency electromagnetic field, brings about the advantage that, in contrast to heating of an entire tobacco particle with steam which causes the capillary walls to become porous and to prevent excessive escape of vaporized moisture, the high-frequency field heats mainly the moisture in the capillaries but the heating action upon the tissue of tobacco particles (which is a poor conductor of heat) is much less pronounced.

A gradual reduction of the speed of air currents which pass upwardly through the apertures **27** of the platform **28** is desirable in order to insure that the air currents cannot entrain lighter tobacco particles above the main layer of tobacco which is being agitated in the channel of the transporting device **19**. This is achieved in a very simple way by providing the transporting device **19** with side walls **29, 31** whose internal surfaces diverge outwardly and upwardly to thus effectively reduce the speed of air currents which pass through the apertures **27**. In other words, the speed of air currents decreases proportionally with their distance from the apertures **27**.

FIG. **3** illustrates certain details of a second apparatus which is provided with pneumatic transporting devices for freshly expanded tobacco particles. All such parts of the second apparatus which are identical with or clearly analogous to the corresponding parts of the apparatus shown in FIGS. **1–2** are denoted by similar reference characters plus **100**. The heating unit **101** comprises an endless belt **107** which is trained over rollers **141** (only one shown) and transports a stream of tobacco **106** across the electromagnetic field produced by a sender **104**. The expanded particles of tobacco **106** descend into an air lock **159** and enter the drying unit **102** which comprises a pneumatic transporting device **156** for expanded tobacco. The device **156** includes an upright duct **157** which is a functional equivalent of the chamber **8** of the drying unit **2** and receives expanded tobacco by way of a chute **161** located downstream of the air lock **159**. The lower end of the duct **157** is open to admit atmospheric air which is heated by a preferably adjustable electric resistance heater **158**. The upper end portion of the duct **157** forms an elbow **162** of gradually decreasing cross sectional area (as considered in the direction of tobacco transport) which communicates with an upright intermediate pipe **163** serving to deliver freshly surface-dried tobacco particles into an air separator **164** which is connected with a blower **167** serving to evacuate air whereby the expanded and surface-dried tobacco particles descend into a second air lock **168**. The connection between the separator **164** and blower **167** comprises a suction pipe **166**.

The air lock **168** delivers tobacco particles into the cooling unit **103** which comprises an upright duct **171** corresponding to the compartment **42** of the cooling unit **3**. The lower portion **165** of the cooling duct **171** receives freshly expanded and surface-dried tobacco particles by way of a chute **169** which is located immediately downstream of the air lock **168**. The lower end of the duct **171** is open to admit cool atmospheric air which serves as a carrier for tobacco particles and is drawn upwardly by a blower **178** connected with an air separator **174** by a suction pipe **177**. The upper end portion of the duct **171** forms an elbow **172** of a gradually diminishing cross-sectional area which discharges cooled tobacco particles into an upright intermediate pipe **173** for delivery into the air separator **174**. The latter furnishes cooled tobacco particles to an air lock **176** which discharges tobacco onto a removing or take-off conveyor **151**. The reference character **170** denotes the pneumatic transporting device of the cooling unit **103**. It will be noted that the construction of the drying unit **102** is practically identical with that of the cooling unit **103** and that these units share the feature of embodying devices **156, 170** for pneumatic transport of tobacco **106**.

The operation of the apparatus of FIG. **3** is as follows:

The belt **107** transports a stream of tobacco **106** across the electromagnetic field which is produced by the sender **104** of the heating unit **101** whereby the tobacco expands in the same way and for the reasons explained in connection with FIGS. **1–2**. The freshly expanded tobacco **106** is caused to descend at the right-hand end of the belt **107** and is introduced into the drying unit **102** by way of the air lock **159** which admits the expanded tobacco particles into the lower portion of the duct or chamber **157** by way of the chute **161**. The expanded tobacco particles are entrained by the ascending current of hot air which enters the lower end of the duct **157** and is heated by the device **158** to an elevated temperature which suffices to insure satisfactory surface drying of tobacco particles during trans-

port from the chute **161**, by way of the elbow **162**, pipe **163** and into the air separator **164**. The current of hot air in the duct **157** brings about a desirable agitation and loosening of freshly expanded tobacco particles to insure rapid and effective surface drying of each tobacco particle prior to entry into the cooling unit **103**. It will be seen that the tobacco particles entering the duct **157** by way of the chute **161** are first contacted by hot air which is maintained at a maximum temperature (it having been heated by the device **158** immediately or closely upstream of the point where the chute **161** communicates with the duct **157**). This brings about the aforedescribed abrupt surface-drying action to prevent deflation or collapse of tobacco particles during the next stage or stages of transport through the units **102** and **103**.

The freshly expanded and surface-dried tobacco particles pass through the air lock **168** to be admitted into the cooling duct or compartment **171** by way of the chute **169**. The ascending current of cool air which enters the duct **171** by way of the lower portion **165** entrains the tobacco particles toward and through the elbow **172** whereby such particles descend in the pipe **173** and are separated from air in the device **174**. The agitating action of cool air in the duct **171** is analogous to the action of hot air in the duct **157**. Due to rapid energy exchange between tobacco and cool air in the duct **171**, the steam pressure in the tobacco particles decreases, the steam is condensed and the outermost strata of tobacco particles remain dry to prevent any appreciable shrinkage in the cooling unit **103**. The particles which leave the air lock **176** descend onto the take-off conveyor **151** and are transported to a further processing station.

FIG. **4** illustrates a portion of a third apparatus which constitutes a modification of the apparatus of FIGS. **1–2** and wherein all such parts which are identical with or clearly analogous to the corresponding parts of the apparatus of FIGS. **1–2** are denoted by similar reference characters plus **200**. The apparatus of FIG. **4** comprises a feeding unit **281** which serves to deliver specially prepared tobacco **206** onto the upper stretch of the belt **207** in the heating unit **201**. The feeding unit **281** comprises a vessel **284**, a feed screw **282** which serves to transport tobacco from the vessel **284** upwardly toward a chute **288** which dumps tobacco onto the belt **207**, a cylinder or barrel **289** wherein the feed screw **282** rotates (the motor or other suitable drive means for rotating the feed screw **282** is not shown in FIG. **4**), a supply of an organic fluid **286** in the vessel **284**, and a conveyor **283** which delivers tobacco to the vessel. The barrel **289** of the feeding unit **281** is mounted on a frame **287** which also supports the vessel **284** and the chute **288**. The details of the drying unit **202** and cooling unit (not shown in FIG. **4**) are preferably identical with those of the corresponding units in the apparatus of FIGS. **1–2**. The organic fluid **286** in the vessel **284** is freon or any other suitable preferably non-toxic organic fluid with a low boiling point. Such fluid may be maintained at a temperature of about 30°C.

The operation of the apparatus of FIG. **4**:

The belt **283** delivers a stream of tobacco **206** directly into the vessel **284** which is partially filled with organic fluid **286**. The particles of tobacco **206** are enriched with such organic fluid and are conveyed by the feed screw **282** to move in the barrel **289** and to descend onto the upper stretch of the belt **207** in the heating unit **201** by way of the chute **288**. The expansion of tobacco particles during travel across the electromagnetic field produced by the sender **204** of the heating unit **201** takes place substantially in the same way as described in connection with FIGS. **1** and **2**. The organic fluid enhances the expansion of tobacco particles due to its low boiling point, i.e., due to the fact that its volume increases more rapidly than that of water. Thus, even though the supply of energy furnished by the heating device **201** need not be increased beyond that in the cooling unit **1** of FIGS. **1** and **2**, the expansion of tobacco particles on the belt **207** is more pronounced. The freshly expanded tobacco particles are thereupon dried and cooled in the same way as described in connection with FIGS. **1** and **2**.

The method which can be carried out with an apparatus embodying the structure of FIG. **4** constitutes an improvement over conventional methods according to which tobacco is merely soaked in or impregnated with an organic fluid and is thereupon heated in a hot gaseous fluid. Such conventional methods also insure some expansion of tobacco but the permanent expansion is much less pronounced than if the soaking with organic fluid is followed by transport of tobacco through a high-frequency field, immediate external heating with a hot gaseous fluid and immediate forced cooling with a gaseous fluid medium.

An important advantage of the improved method and apparatus is that the abrupt drying of freshly expanded tobacco prevents any appreciable shrinkage of such tobacco so that the volume of tobacco leaving the cooling unit considerably exceeds the volume of tobacco which leaves a conventional apparatus. As explained above, this is attributed to the fact that the strata immediately adjacent to the surfaces of tobacco particles act as shells which prevent a collapse or shrinkage of particles subsequent to cooling which is desirable in order to reduce the steam pressure and to effect a condensation of steam. It was found that the increase in volume of tobacco particles which are treated in accordance with the method of the present invention is a multiple of the volumetric increase of tobacco particles which are treated in accordance with heretofore known methods. The organic fluid which is used in the apparatus of FIG. **4** brings about an even more pronounced expansion of tobacco particles without necessitating the consumption of larger amounts of energy for operation of the heating unit **201**. This is attributed to more pronounced expansion of freon and analogous organic fluids having a lower boiling point than water.

It is further clear that the improved apparatus is susceptible of many additional modifications without departing from the spirit of the present invention. For example, the feeding unit **281** of FIG. **4** can be utilized to feed tobacco to the heating unit **101** of FIG. **3**, the drying unit **202** of FIG. **4** may comprise a single chamber or only two chambers, and the length of the cooling duct **171** in the apparatus of FIG. **3** may be greater or less than that of the duct **157**. It is further clear that each of the three illustrated apparatus can be provided with suitable means for changing the initial moisture content of tobacco, the speed of transport of tobacco through the heating unit and/or the speed of transport of tobacco through the drying and/or cooling unit.

FIG. **5** illustrates a modification of the apparatus of FIG. **4** without an arrangement for the production of

high-frequency energy. Parts which correspond to those of FIG. **4** are denoted by similar reference characters plus **100** and are not further described. The apparatus of FIG. **5** is distinguished from the apparatus of FIG. **4** in that the feeding device **381** contains ordinary water and that no arrangement for the production of high-frequency energy is mounted adjacent to the belt **307.** This apparatus is particularly suitable for increasing the volume of cut tobacco stems which can absorb a large amount of moisture.

The operation of the apparatus of FIG. **5** is as follows:

The tobacco is delivered by the belt **383** into the feeding unit **381.** The vessel **384** with water **385** is arranged in the bottom region of the feeding unit **381** so that the tobacco falls directly into the water **385** from the belt **383.** The tobacco, which is soaked with water, is conveyed by the feed screw **382** from the vessel **384** to the chute **388.** The tobacco, which has a moisture content of over 40 percent H_2O, is conveyed by the belt **307** into the chamber **308** of the drying unit **302** where the tobacco is transferred onto the transporting device **319.** As already described in connection with FIG. **1,** hot air is circulated around the tobacco to effect an abrupt drying action upon the external surfaces of the tobacco particles which stabilizes the external surfaces of the tobacco particles in their expanded form, so that the expanded tobacco does not shrink during the subsequent removal of surplus moisture. With this method of increasing the volume, an increase in volume in the range of up to 50 percent is achieved in the case of cut tobacco stems.

Without further analysis, the foregoing will so fully reveal the gist of the present invention that others can, by applying current knowledge, readily adapt it for various applications without omitting features which fairly constitute essential characteristics of the generic and specific aspects of my contribution to the art and, therefore, such adaptations should and are intended to be comprehended within the meaning and range of equivalence of the claims.

What is claimed as new and desired to be protected by Letters Patent is set forth in the appended:

1. Apparatus for increasing the volume of tobacco which comprises means for conveying moistened tobacco thru a heating unit wherein the moistened tobacco is subjected to the action of a high frequency field element and the moisture in the tobacco capillaries is vaporized with attendant expansion of the tobacco, means for conveying the expanded tobacco through a drying unit wherein the tobacco is subjected to a short-lasting external heating action sufficient to effect rapid drying of the tobacco adjacent the external surfaces of the tobacco and means for conveying the thus heated tobacco to a cooling unit said unit being provided with means to produce a forcible cooling action on the tobacco sufficient to effect condensation of the vaporized moisture already present in the capillaries of the tobacco without significantly affecting the surface thereof.

2. Apparatus as defined in claim **1,** wherein said means for subjecting moist tobacco to the action of a high-frequency field element comprises a device for generating high-frequency electromagnetic waves.

3. Apparatus as defined in claim **1** wherein the conveying means for moving the tobacco through the drying and cooling units comprises vibratory conveyor means.

4. Apparatus as defined in claim **1,** wherein the means for subjecting tobacco to said short-lasting heating action comprises at least one chamber through which the tobacco is moved by said vibratory conveyor means, and means for circulating through said chamber currents of a hot gaseous fluid in intimate contact with tobacco in said chamber.

5. Apparatus as defined in claim **4,** wherein said vibratory conveyor comprises a trough having a foraminous tobacco supporting bottom wall and said air currents are caused to pass upwardly through said bottom wall, the width of said trough increasing in the direction of flow of said currents in said trough to thus reduce the speed of such currents.

6. Apparatus as defined in claim **5,** wherein said circulating means is arranged to circulate said gaseous fluid transversely of and through tobacco on said bottom wall.

7. Apparatus as defined in claim **1,** wherein said drying unit comprises means for circulating a current of a hot gaseous fluid along a predetermined path and the tobacco which is expanded in said heating unit is thereupon transported through said drying unit and is surface-heated by such gaseous fluid.

8. Apparatus as defined in claim **7,** further comprising means for introducing expanded tobacco into said path.

9. Apparatus as defined in claim **8,** wherein said cooling unit comprises means for circulating a current of a gaseous coolant along a second predetermined path and the tobacco which is surface-dried in said first path is transported and cooled by gaseous fluid in said second path, and further comprising means for introducing surface-dried tobacco from said first path into said second path.

10. Apparatus as defined in claim **1,** wherein said drying unit comprises a series of chambers and means for circulating through said chambers a hot gaseous fluid so that the fluid passes through successive chambers of said series, and further comprising transporting means for moving expanded tobacco through successive chambers of said series.

* * * * *