

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
9 April 2009 (09.04.2009)

PCT

(10) International Publication Number
WO 2009/043156 A1

(51) International Patent Classification:

C08F 4/646 (2006.01) C08F 4/02 (2006.01)
C08F 10/02 (2006.01) C08F 4/22 (2006.01)

(21) International Application Number:

PCT/CA2008/001737

(22) International Filing Date:

30 September 2008 (30.09.2008)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2,605,077 1 October 2007 (01.10.2007) CA

(71) Applicant (for all designated States except US): NOVA
CHEMICALS (INTERNATIONAL) S.A. [CH/CH]; Avenue De La Gare 14, CH-1700 Fribourg (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HOANG, Peter,
Phung, Minh [CA/CA]; 78 Hamptons Heights NW, Calgary, Alberta T3A 5W1 (CA). KER, Victoria [MY/CA]; 120 Harvest Hills Drive Ne, Calgary, Alberta T3K 3X4 (CA). FUNK, Bradley [CA/CA]; 1320-23rd St. NW, Calgary, Alberta T2N 2P3 (CA).

(74) Agents: TROTT, Trevor et al.; 2928 - 16 Street NE, Calgary, Alberta T2E 7K7 (CA).





(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- with amended claims

(54) Title: A CO-SUPPORTED CATALYST SYSTEM COMPRISING CHROMIUM AND GROUP 4 METAL COMPLEX

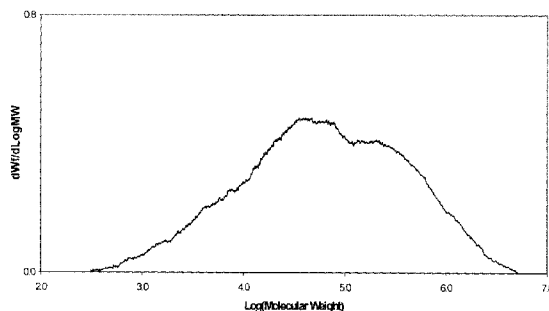

(57) Abstract: Polyethylene is made by (co)polymerizing ethylene in a gas-phase reactor using a catalyst system comprising a chromium catalyst and a Group 4 transition metal catalyst, co-supported on an inorganic oxide support. The Group 4 transition metal catalyst is defined by the formula shown, wherein M is a Group 4 metal, P1 is a phosphinimide or ketimide ligand (shown), L is a monoanionic ligand which is a cyclopentadienyl or a bulky heteroatom type ligand, m is 1 or 2, n is 0 or 1, and p is an integer. The co-supported catalyst system gives access to polyethylene having a broad or bimodal molecular weight distribution. In the copolymerization of ethylene, reversed or partially reversed comonomer distribution is achieved: the Group 4 component provides polymer segments having higher molecular weight and also higher comonomer incorporation than polymer segments produced at the chromium sites. (Formulae I,II,III).



WO 2009/043156 A1

TECHNICAL FIELD

5 The present invention relates to polymerization processes in which a co-supported catalyst system is used to produce polyethylene polymers having a broad or bimodal molecular weight distribution. Specifically, the use of a catalyst system comprising co-supported chromium and organometallic catalysts is described.

BACKGROUND ART

10 Co-supported or mixed catalyst systems for use in olefin polymerization often include a catalyst having a low response to hydrogen and a catalyst having a high response to hydrogen. Such catalysts provide polyethylene polymers with broad or multimodal molecular weight distribution: a low response to hydrogen facilitates the formation of high
15 molecular weight polymer fractions, while a high response to hydrogen facilitates the formation of low molecular weight polymer fractions. Polyethylene resins having a broad or bimodal molecular weight distribution are desirable due to their improved mechanical properties,
20 such as an increased environmental stress cracking resistance (ESCR), as well as their good processability. Two or more catalysts may be co-supported on a single support for use in gas or slurry phase polymerization processes in order to provide homogeneous product particles, but mixed catalysts systems, in which each catalyst component is supported
25 separately, may also be used.

 Co-supported and mixed catalysts capable of producing bimodal polyethylene having a reversed comonomer incorporation have also been developed. Bimodal polyethylene resins having a reversed comonomer distribution generally have high PENT performance properties and good
30 processing characteristics making them particularly suitable for use in the formation of high pressure pipe.

Chromium based polymerization catalysts can also be used to produce polyethylene with a broad, sometimes bimodal molecular weight distribution. In order to further improve upon such resins, chromium catalysts have been combined with various other transition metal catalysts in co-supported or mixed catalyst formulations. Indeed, polymerization catalysts comprising active chromium compounds and group 4 transition metal compounds are known, despite conventional wisdom that teaches that chromium catalysts and group 4 transition metal catalysts tend to deactivate each other.

For example, US Pat. No. 7,163,906 describes "metallocene combination catalysts" which comprise at least one group 4 based metallocene compound and at least one organochromium compound, which are both supported on a single chemically treated solid metal oxide. The "metallocene combination catalysts" are useful in the production of bimodal polyethylene resins.

US Pat. No. 6,794,326 teaches a catalyst system comprising chromium oxide and a zirconium based metallocene, co-supported on an inorganic oxide support.

US Pat. No. 6,780,809 discloses a modified chromium oxide catalyst for the polymerization of ethylene to give bimodal resin. The modified catalyst comprises a chromium oxide catalyst that has been co-supported on an inorganic oxide with a transition metal compound and a catalyst activator. The transition metal compound is preferably a group 4 compound that has at least one cyclopentadienyl ligand. Both catalyst components are supported on the same support particles and the catalyst provides a homogeneous product powder.

US Pat. No. 5,723,399 describes an ethylene polymerization catalyst which comprises a chromium based polymerization catalyst, which includes chrome oxides, silyl chromates and amido chromates, which is co-supported on a metal oxide with a transition metal compound which includes metallocenes, constrained geometry catalysts and catalysts having amidinato ligands.

US Pat. Nos. 4,701,432; 5,077,255; 5,124,418; and 5,183,867 disclose a dual catalyst formulation in which a non-metallocene catalyst and a metallocene catalyst are immobilized on an inorganic oxide for use in olefin polymerization processes. The non-metallocene catalysts are
5 compounds of a group 4, 5 or 6 metal, excluding compounds having a cyclopentadienyl ligand. Non-metallocenes based on group 4 are preferred for use in the dual catalysts.

EP No. 339,571 describes a process in which a titanium or chromium compound is added to an inorganic oxide to provide a titanium
10 or chromium containing inorganic oxide support material, which is subsequently heat treated at between 300°C and 1000°C. To the heat treated support was added a metallocene compound, and the resulting supported dual catalyst system was used in the polymerization of ethylene.

15 In US Pat. No. 6,013,595 the use of a "catalytic solid" for (co)polymerization of ethylene was reported. The catalytic solid, which comprises an least one inorganic oxide support, at least one transition metal metallocene catalyst, at least one metallocene activator compound and at least one chromium compound, is used to produce polyethylene
20 with a broad molecular weight distribution.

US Pat. Nos. 5,032,651 and 5,104,839 teach a polymerization process for polymerizing ethylene using a mixed catalyst system. The mixed catalyst system consists of a first component comprising a supported chromium oxide catalyst, and a second catalyst component
25 comprising a tetrabenzylzirconium catalyst that has been separately supported. The chromium oxide is supported on a solid aluminophosphate particulate support, while the tetrabenzylzirconium catalyst is supported on a separate inorganic particulate support that is preferably also an aluminophosphate particulate support. The polymers obtained using the
30 mixed catalyst system have improved environmental stress cracking resistance (ESCR) relative to polymers made from a chromium catalyst alone.

US Pat. No. 6,180,731 describes a process in which a Phillips catalyst is combined with a separately supported metallocene catalyst to produce a polyethylene resin in the gas phase. The polyethylenes made with the mixed catalyst system are resistant to stress cracking.

5 US Pat. No. 6,734,131 discloses a clay-silica agglomerate for use as a support for chromium based polymerization catalysts. The agglomerate support facilitates the formation of broad molecular weight or bimodal polyethylene. The patent also teaches that a supplemental catalyst consisting of an agglomerate supported metallocene catalyst,
10 transition metal bidentate or tridentate ligand catalyst, or constrained geometry catalyst may be used in combination with the agglomerate supported chromium catalyst.

Similarly, US Pat. Nos 6,958,375; 6,946,420 teach the use of a clay-silica agglomerate as a support for the co-immobilization of a
15 bidentate or tridentate ligand transition metal catalyst with a chromium catalyst.

Despite the above progress, further investigation into mixed or co-supported catalysts containing a chromium catalyst and other transition metal catalysts is required to discover new compatible catalyst
20 components capable of improving the properties of existing resins. For example, none of the above co-supported or mixed catalyst systems comprising a chromium based catalyst component teach the formation of bimodal polyethylene having reversed comonomer incorporation. In addition, there is no teaching of the use of polymerization catalysts having
25 at least one phosphinimide or ketimide ligand.


DISCLOSURE OF INVENTION

The present invention provides a catalyst system comprising a co-supported group 6 based polymerization catalyst and a group 4 based polymerization catalyst which do not significantly deactivate or poison one
30 another when immobilized on a single support.

In one aspect, the invention provides a polymerization catalyst system comprising:

- a) a chromium catalyst; and
 b) an organometallic catalyst;
 co-supported on an inorganic oxide, wherein the organometallic catalyst comprises:

- 5 i) an organometallic complex having the formula:



wherein, M is a group 4 metal; PI is a phosphinimide ligand or a ketimide ligand; L is a monoanionic ligand selected from the group consisting of a cyclopentadienyl type ligand or a bulky heteroatom ligand; Y is an activatable ligand; PI and L may optionally be joined by a bridging group; two PI ligands may optionally be joined by a bridging group; m is 1 or 2; n is 0 or 1; and p is an integer and the sum of m+n+p equals the valence state of M; and


- 15 ii) an activator.

In another aspect of the invention, a process is provided to produce broad, bimodal or multimodal polyethylene polymers having at least one higher molecular weight fraction having a greater comonomer incorporation than that of a lower molecular weight fraction.

20 In another aspect of the invention, a process is provided to produce an ethylene homopolymer or copolymer comprising contacting ethylene and optionally an α -olefin with a catalyst system in a polymerization reactor, wherein the catalyst system comprises:

- a) a chromium catalyst; and
 25 b) an organometallic catalyst;
 co-supported on an inorganic oxide, wherein the organometallic catalyst comprises:

- i) an organometallic complex having the formula:



wherein, M is a group 4 metal; PI is a phosphinimide ligand or a ketimide ligand; L is a monoanionic ligand selected from the group consisting of a cyclopentadienyl type ligand or a bulky heteroatom ligand; Y is an activatable ligand; PI and L may optionally be joined by a bridging group; two PI ligands may optionally be joined by a bridging group; m is 1 or 2; n is 0 or 1; and p is an integer and the sum of m+n+p equals the valence state of M; and

5

ii) an activator.

10 The present invention also provides a process in which the ratio of catalysts on a support can be changed to manipulate the properties of the product resin.

BRIEF DESCRIPTION OF DRAWINGS

Figure 1 is a Gel Permeation Chromatograph (GPC) profile of a polymer prepared according to Example 1 (Comparative).

15

Figure 2 is a GPC profile of a polymer prepared according to Example 2 (Comparative).

Figure 3 is a GPC profile of a polymer prepared according to an embodiment of the current invention (Example 3).

BEST MODE FOR CARRYING OUT THE INVENTION

20

The present invention is directed to a polymerization process using a catalyst system comprising: (a) a chromium catalyst and (b) a group 4 transition metal catalyst having at least one phosphinimide or ketimide ligand, with both catalysts being co-immobilized on an inorganic oxide support. As defined herein, the group 4 transition metal catalyst having at least one phosphinimide or ketimide ligand, is an "organometallic complex".

25

In the current invention, the term "co-supported" or "co-supported catalyst(s)" is used to describe a catalyst system in which at least two polymerization catalysts are supported on the same batch of support particles. The term "mixed catalyst(s)" connotes a polymerization catalyst system in which at least two polymerization catalysts have been supported

30

separately on different batches of support particles that may be of the same or different type.

In the current invention, at least two catalysts are immobilized (i.e. supported) by co-supporting them on the same batch of support material.

5 Hence the catalysts of the current invention are "co-supported" catalyst systems as defined above.

By the term "immobilized" it is meant that the polymerization catalysts are physically or chemically adsorbed onto a support surface or absorbed within a support. The terms "deposited" and "supported" can be used interchangeably with "immobilized".

Catalyst supports are well known in the art and may be chosen from a wide range of well known materials or mixtures thereof. For example, catalyst support materials include inorganic oxides, such as but not limited to silica gel; magnesium halides; zeolites; layered clay minerals; agglomerated support materials; and polymer supports such as but not limited to polyethylene, polypropylene, polystyrene, or poly(aminostyrene) supports. In some cases, a support material can also act as a polymerization catalyst activator or as a co-activator. For example, supports that contain aluminoxane functionalities or where the support is capable of performing similar chemical functions as an aluminoxane, are suitable for use as a "support-activator".

The supported catalysts of the current invention can be formed in situ in the presence of the support material (i.e. in a polymerization reactor or on route to a reactor), or the support can be pre-impregnated or premixed, simultaneously or sequentially, with one or more polymerization catalysts

Preferred supports for use in the current invention are inorganic oxides.

The inorganic oxide used in the current invention may be any oxide of the metals from groups 2, 3, 4, 11, 12, 13 and 14 of the Period Table of Elements. Preferred inorganic oxides include silica, SiO₂; aluminophosphate, AlPO₄; magnesia, MgO; alumina, Al₂O₃; titania, TiO₂;

zinc oxide, ZnO; and zirconia, ZrO₂ and the like or mixtures thereof, with SiO₂ being most preferred. When the inorganic oxide is a silica support, it will contain not less than 80% by weight of pure SiO₂, the balance being other oxides such as but not limited to oxides of Zr, Zn, Mg, Ti, Mg and P.

5 The inorganic oxide support is composed of particles having a spheroid shape and a size ranging from about 10 micrometers to about 150 micrometers (μm). The particle size distribution can be broad or narrow. The inorganic oxide typically will have a surface area of at least about 100 m²/g, preferably from about 150 to 1,500 m²/g. The pore
10 volume of the inorganic oxide support should be at least 0.2, preferably from about 0.3 to 5.0 ml/g. The surface area and pore volume are determined by nitrogen adsorption according to B.E.T. techniques, which are well known in the art and are described in the *Journal of the American Chemical Society*, 1939, v 60, pg 209-319.

15 Generally, the inorganic oxide support will contain acidic surface hydroxyl groups that will react with a polymerization catalyst. Prior to use, the inorganic oxide may be dehydrated to remove water and to reduce the concentration of surface hydroxyl groups. For example, the inorganic
20 oxide may be heated at a temperature of at least 200°C for up to 24 hrs, typically at a temperature of from about 500°C to about 800°C for about 2 to 20 hrs, preferably 4 to 10 hrs. The resulting support will be free of adsorbed water and should have a surface hydroxyl content from about 0.1 to 5 mmol/g of support, preferably from 0.5 to 3 mmol/g. The amount
25 of hydroxyl groups in a silica support may be determined according to the method disclosed by J. B. Peri and A. L. Hensley Jr., in *J. Phys. Chem.*, 72 (8), 1968, pg 2926.

 A silica support that is suitable for use in the present invention has a high surface area and is amorphous. By way of example, useful silicas are commercially available under the trademark of Sylopol® 958, 955 and
30 2408 by the Davison Catalysts, a Division of W. R. Grace and Company and ES-70W by Ineos Silica.

Although heating is the preferred means of removing surface hydroxyl groups present in inorganic oxides, such as silica, the hydroxyl groups may also be removed by other removal means, such as chemical means. For example, a desired proportion of OH groups may be reacted
5 with a suitable chemical agent, such as a hydroxyl reactive aluminum compound (e.g. triethyl aluminum) or a silane compound. This method of treatment has been disclosed in the literature and two relevant examples are: U.S. Pat. No. 4,719,193 to Levine in 1988 and by Noshay A. and Karol F. J. in *Transition Metal Catalyzed Polymerizations*, Ed. R. Quirk,
10 396, 1989. By way of example, a silica support may be treated with an aluminum compound of the formula $R^1_bAl(OR^1)_aX_{3-(a+b)}$ where a is either 0 or 1, b is an integer from 1 to 3, a+b is from 1 to 3, R^1 is a C_{1-8} alkyl radical, and X is a chlorine atom. The amount of aluminum compound, $R^1_bAl(OR^1)_aX_{3-(a+b)}$ is such that the amount of aluminum on the support
15 prior to adding the polymerization catalyst will be from about 0 to 2.5 weight %, preferably from about 0 to 2.0 weight % based on the weight of the support.

The chromium catalyst of the current invention is any chromium compound or mixture of compounds capable of polymerizing olefins and
20 which can be deposited on the surface of a support or within a support. Minor amounts of a secondary metal species such as titanium and or aluminum compounds may also be incorporated together with the chromium compound. The chromium compound used can be any appropriate chromium salt or an inorganic or organic chromium compound.
25 For example, chromocene (i.e. bis(cyclopentadienyl)chromium), silyl chromate and chromium oxide may be used. Preferably, the chromium compound is a chromium oxide or a silyl chromate compound.

The chromium oxide may be CrO_3 or any compound that is convertible to CrO_3 under oxidizing conditions. Examples of compounds
30 that are convertible to CrO_3 under oxidizing conditions are disclosed in US Pat. Nos. 2,825,721; 3,023,203; 3,622,251; and 4,011,382 and include but are not limited to chromic acetyl acetone, chromic chloride, chromic


nitrate, chromic acetate, chromic sulfate, ammonium chromate, ammonium dichromate and other soluble salts of chromate.

The silyl chromate (i.e. silyl chromium) catalysts will have at least one group of the formula I:



wherein R is a hydrocarbyl group having from 1 to 14 carbon atoms.

In a preferred aspect of the invention, the silyl chromate catalyst is a bis-trihydrocarbylsilylchromate having the formula II:

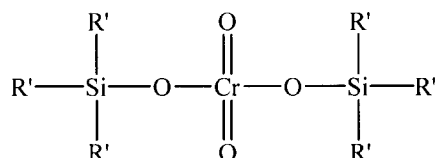

- 10 wherein R' is a hydrocarbyl group having from 1 to 14 carbon atoms. R' can independently be any type of hydrocarbyl group such as an alkyl, alkaryl, aralkyl or an aryl radical. Some non-limiting examples include methyl, ethyl, propyl, iso-propyl, n-butyl, iso-butyl, n-pentyl, iso-pentyl, t-pentyl, hexyl, 2-methyl-pentyl, heptyl, octyl, 2-ethylhexyl, nonyl, decyl,
- 15 hendecyl, dodecyl, tridecyl, tetradecyl, benzyl, phenethyl, p-methyl-benzyl, phenyl, tolyl, xylyl, naphthyl, ethylphenyl, methylnaphthyl, dimethylnaphthyl, and the like. Illustrative of the preferred silylchromates but by no means exhaustive or complete of those that can be employed in this process are such compounds as bis-trimethylsilylchromate,
- 20 bis-triethylsilylchromate, bis-tributylsilylchromate, bis-triisopentylsilylchromate, bis-tri-2-ethylhexylsilylchromate, bis-tridecylsilylchromate, bis-tri(tetradecyl)silylchromate, bis-tribenzylsilylchromate, bis-triphenethylsilylchromate, bis-triphenylsilylchromate, bis-tritolylsilylchromate, bis-trixylylsilylchromate,
- 25 bis-trinaphthylsilylchromate, bis-triethylphenylsilylchromate, bis-trimethylnaphthylsilylchromate, polydiphenylsilylchromate, polydiethylsilylchromate and the like. Examples of

bis-trihydrocarbylsilylchromate catalysts are also disclosed in U.S. Pat. Nos. 3,704,287 and 4,100,105.


The chromium catalyst may optionally comprise one or more than one co-catalyst. Optionally, the co-catalyst can be added to the supported
5 chromium catalyst in situ.

Co-catalysts include compounds represented by formula:



where M^* represents an element of the Group 1, 2 or 13 of the Periodic Table, a tin atom or a zinc atom; and each R^2 independently represents a
10 hydrogen atom, a halogen atom (e.g., chlorine, fluorine, bromine, iodine and mixtures thereof), an alkyl group (e.g., methyl, ethyl, propyl, pentyl, hexyl, heptyl, octyl, decyl, isopropyl, isobutyl, s-butyl, t-butyl), an alkoxy group (e.g., methoxy, ethoxy, propoxy, butoxy, isopropoxy), an aryl group (e.g., phenyl, biphenyl, naphthyl), an aryloxy group (e.g., phenoxy), an
15 arylalkyl group (e.g., benzyl, phenylethyl), an arylalkoxy group (benzyloxy), an alkylaryl group (e.g., tolyl, xylyl, cumenyl, mesityl), or an alkylaryloxy group (e.g., methylphenoxy), provided that at least one R^2 is selected from a hydrogen atom, an alkyl group having 1 to 24 carbon atoms or an aryl, arylalkyl or alkylaryl group having 6 to 24 carbon atoms; and n is the
20 oxidation number of M^* .

Preferred co-catalysts are organoaluminum compounds having the formula:




where (X^1) is a hydrocarbyl having from 1 to about 20 carbon atoms; (X^2)
25 is selected from alkoxide or aryloxy, any one of which having from 1 to about 20 carbon atoms; halide; or hydride; and n is a number from 1 to 3, inclusive. Specific examples of (X^1) moieties include, but are not limited to, ethyl, propyl, n-butyl, sec-butyl, isobutyl, hexyl, and the like. In another aspect, (X^2) may be independently selected from fluoro or chloro. The
30 value of n is not restricted to be an integer, therefore this formula includes sesquihalide compounds or other organoaluminum cluster compounds.

Some non-limiting examples of aluminum co-catalyst compounds that can be used in this invention include, but are not limited to, trialkylaluminum compounds, dialkylaluminum halide compounds, dialkylaluminum alkoxide compounds, dialkylaluminum hydride
 5 compounds, and combinations thereof. Specific examples of organoaluminum co-catalyst compounds that are useful in this invention include, but are not limited to: trimethylaluminum (TMA); triethylaluminum (TEA); triisopropylaluminum; diethylaluminum ethoxide; tributylaluminum; disobutylaluminum hydride; triisobutylaluminum; and diethylaluminum
 10 chloride.


The molar ratio of co-catalyst to chromium catalyst can be about from about 1:1 to about 30:1, preferably from about 1:1 to about 15:1.

The organometallic complex used in the current invention has the formula:




wherein M is a group 4 metal; PI is independently a phosphinimide ligand or a ketimide ligand; L is a monoanionic ligand selected from the group consisting of a cyclopentadienyl type ligand or a bulky heteroatom ligand; Y is an activatable ligand; m is 1 or 2; n is 0 or 1; and p is an integer and
 20 the sum of m+n+p equals the valence state of M. The preferred metals, M are selected from the group IV metals with titanium being most preferred.

The phosphinimide ligand is defined by the formula:



wherein each R^{21} is independently selected from the group consisting of a
 25 hydrogen atom; a halogen atom; C_{1-20} , preferably C_{1-10} hydrocarbyl radicals which are un-substituted by or further substituted by a halogen atom; a C_{1-8} alkoxy radical; a C_{6-10} aryl or aryloxy radical; an amido radical; a silyl radical of the formula:




wherein each R²² is independently selected from the group consisting of hydrogen, a C₁₋₈ alkyl or alkoxy radical, and C₆₋₁₀ aryl or aryloxy radicals; and a germanyl radical of the formula:



wherein R²² is as defined above.

As used herein, the term “ketimide ligand” refers to a ligand which: (a) is bonded to the transition metal via a metal-nitrogen atom bond; (b) has a single substituent on the nitrogen atom, (where this single
10 substituent is a carbon atom which is doubly bonded to the N atom); and (c) has two substituents Sub 1 and Sub 2 (described below) which are bonded to the carbon atom. Conditions a, b and c are illustrated below:



The substituents “Sub 1” and “Sub 2” may be the same or different
15 and can be bonded to each other by a bridging group to form a ring. The bridging group can be any saturated or unsaturated alkyl group or aryl group including fused ring aryl groups, where the alkyl or aryl groups can optionally contain heteroatoms or be further substituted by alkyl, aryl or heteroatom containing alkyl or aryl groups. Exemplary substituents
20 include hydrocarbyls having from 1 to 20 carbon atoms, silyl groups, amido groups and phosphido groups. For reasons of cost and convenience, these substituents may both be hydrocarbyl radicals, especially simple alkyl radicals (e.g. C₁₋₆) such as but not limited to tertiary butyl.

25 The activatable ligand, Y is independently selected from the group consisting of a hydrogen atom; a halogen atom, a C₁₋₁₀ hydrocarbyl radical; a C₁₋₁₀ alkoxy radical; a C₅₋₁₀ aryl oxide radical; each of which said hydrocarbyl, alkoxy, and aryl oxide radicals may be un-substituted by or further substituted by one or more substituents selected from the group

consisting of a halogen atom; a C₁₋₈ alkyl radical; a C₁₋₈ alkoxy radical; a C₆₋₁₀ aryl or aryloxy radical; an amido radical which is un-substituted or substituted by up to two C₁₋₈ alkyl radicals; and a phosphido radical which is un-substituted or substituted by up to two C₁₋₈ alkyl radicals. Most preferably Y is selected from the group consisting of a hydrogen atom, a halide atom and a C₁₋₄ alkyl radical.

By the term "activatable", it is meant that the ligand Y may be cleaved from the metal center M, via a protonolysis reaction or abstracted from the metal center M, by suitable acidic or electrophilic activator compounds respectively, which are further described below. Protonolysis or abstraction reactions generates an active "cationic" metal center which can polymerize olefins, as is well known in the art.

In the current invention, L is a monoanionic ligand selected from the group consisting of a cyclopentadienyl type ligand or a bulky heteroatom ligand. Preferably L is a cyclopentadienyl type ligand.

The term "cyclopentadienyl type ligand" refers to a 5-membered carbon ring having delocalized bonding within the ring and bound to the metal atom through η^5 bonds and said ligand being un-substituted or up to fully substituted with one or more substituents selected from the group consisting of C₁₋₁₀ hydrocarbyl radicals in which the hydrocarbyl substituents are un-substituted or further substituted by one or more substituents selected from the group consisting of a halogen atom and a C₁₋₈ alkyl radical; a halogen atom; a C₁₋₈ alkoxy radical; a C₆₋₁₀ aryl or aryloxy radical, in which the aryl or aryloxy are un-substituted or further substituted by one or more substituents selected from the group consisting of a halogen atom and a C₁₋₈ alkyl radical; an amido radical which is un-substituted or substituted by up to two C₁₋₈ alkyl radicals; a phosphido radical which is un-substituted or substituted by up to two C₁₋₈ alkyl radicals; silyl radicals of the formula $-\text{Si}-(\text{R}^{22})_3$ wherein each R²² is independently selected from the group consisting of hydrogen, a C₁₋₈ alkyl or alkoxy radical, and C₆₋₁₀ aryl or aryloxy radicals; and germanyl radicals of the formula $\text{Ge}-(\text{R}^{22})_3$ wherein R²² is as defined above; and one or

more fused aromatic rings which can be un-substituted or further substituted with one or more substituents selected from the group consisting of a halogen atom, C₁₋₈ alkyl radical and C₆₋₁₀ aryl radical. In an aspect of the invention, the cyclopentadienyl type ligand is selected from
5 the group consisting of an unsubstituted cyclopentadienyl ligand, a (perfluorophenyl)cyclopentadienyl ligand, an indenyl ligand and a fluorenyl ligand.

As used herein, the term "bulky heteroatom ligand" refers to a ligand that contains at least one heteroatom selected from the group
10 consisting of boron, nitrogen, oxygen, phosphorus or sulfur. The heteroligand may be sigma or pi-bonded to the metal. Exemplary heteroligands include ketimide ligands, silicone-containing heteroligands, amido ligands, alkoxy ligands, boron heterocyclic ligands (e.g. borabenzene ligands) and phosphole ligands, as further described below.

15 Silicon containing heteroligands are defined by the formula:



wherein the – denotes a bond to the transition metal and μ is sulfur or oxygen.

The substituents on the Si atom, namely R^x, R^y and R^z are required
20 in order to satisfy the bonding orbital of the Si atom. The use of any particular substituent R^x, R^y or R^z is not especially important to the success of this invention. It is preferred that each of R^x, R^y and R^z is a C₁₋₂ hydrocarbyl group (i.e. methyl or ethyl) simply because such materials are readily synthesized from commercially available materials.

25 The term "amido" is meant to convey its broad, conventional meaning. Thus, these ligands are characterized by (a) a metal-nitrogen bond; and (b) the presence of two substituents, which are typically alkyl, phenyl, trialkyl or triaryl silyl groups on the nitrogen atom.

The terms "alkoxy" and "aryloxy" are also intended to convey their
30 conventional meaning. Thus, these ligands are characterized by (a) a metal oxygen bond; and (b) the presence of a hydrocarbyl group bonded to the oxygen atom. The hydrocarbyl group may be a C₁₋₁₀ straight

chained, branched or cyclic alkyl radical or a C₆₋₁₃ aromatic radical which radicals are un-substituted or further substituted by one or more C₁₋₄ alkyl radicals (e.g. 2, 6 di-tertiary butyl phenoxy).

Boron heterocyclic ligands are characterized by the presence of a boron atom in a closed ring ligand (e.g. borabenzene ligands which are un-substituted or may be substituted by one or more halogen atoms, C₁₋₁₀ alkyl groups, and/or C₁₋₁₀ alkyl groups containing a hetero atom (e.g. O, or N atoms)). This definition includes heterocyclic ligands that may also contain a nitrogen atom in the ring. These ligands are well known to those skilled in the art of olefin polymerization and are fully described in the literature (see, for example, U.S. Patents 5,637,659; 5,554,775; and references cited therein).

The term "phosphole" is also meant to convey its conventional meaning. "Phospholes" are cyclic dienylic structures having four carbon atoms and one phosphorus atom in the closed ring. The simplest phosphole is C₄PH₄ (which is analogous to cyclopentadiene with one carbon in the ring being replaced by phosphorus). The phosphole ligands may be substituted with, for example, C₁₋₂₀ hydrocarbyl radicals (which may, optionally, contain halogen substituents); phosphido radicals; amido radicals; or silyl or alkoxy radicals. Phosphole ligands are also well known to those skilled in the art of olefin polymerization and are described as such in U.S. Pat. No. 5,434,116 (Sone, to Tosoh).

In an aspect of the invention, PI and L may be joined by a suitable bridging group. In another aspect of the invention, two PI ligands may be joined by a suitable bridging group. The bridging group may be selected from a group comprising: organic bridging groups including hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl and a substituted heterohydrocarbyl; inorganic bridging groups; ionic linking groups; and a group comprising: methylene, dimethylmethylene, 1,2-ethane, 1,2-phenylene, 1,2-propane, 1,2-catechol, 1,2-dimethylhydrazine, —B(R⁵)—, —Si(R⁵)₂—, —P(R⁵)— and —N(R⁵)— where R⁵ is hydrogen, a hydrocarbyl or substituted hydrocarbyl, a substituted heteroatom, or a halogen.

Some non-limiting examples of bridging group include bridging groups containing at least one Group 13 to 16 atom, often referred to a divalent moiety such as but not limited to at least one of a carbon, oxygen, nitrogen, silicon, boron, germanium and a tin atom or a combination thereof. Preferably, the bridging group contains a carbon, silicon or germanium atom, most preferably at least one silicon atom or at least one carbon atom. The bridging group may also contain substituent radicals, R⁵ as defined above including halogens.

Bridging groups include but are not limited to, a di C₁₋₆ alkyl radical (e.g. alkylene radical for example an ethylene bridge), di C₆₋₁₀ aryl radical (e.g. a benzyl radical having two bonding positions available), silicon or germanium radicals substituted by one or more radicals selected from the group consisting of C₁₋₆ alkyl, C₆₋₁₀ aryl, phosphine or amine radical which are unsubstituted or up to fully substituted by one or more C₁₋₆ alkyl or C₆₋₁₀ aryl radicals, or a hydrocarbyl radical such as a C₁₋₆ alkyl radical or a C₆₋₁₀ arylene (e.g. divalent aryl radicals); divalent C₁₋₆ alkoxide radicals and the like.

The activator, which together with the organometallic complex, makes up the organometallic catalyst of the current invention, is selected from the group consisting of alkylaluminoxanes, ionic activators and electrophilic borane compounds. Preferably the activator will be an alkylaluminoxane or an ionic activator.

The alkylaluminoxanes are complex aluminum compounds of the formula:



wherein each R¹² is independently selected from the group consisting of C₁₋₂₀ hydrocarbyl radicals and m is from 3 to 50. Optionally a hindered phenol can be added to the alkylaluminoxane to provide a molar ratio of Al³:hindered phenol of from 2:1 to 5:1 when the hindered phenol is present.


In an aspect of the invention, R¹² of the alkylaluminoxane, is a methyl radical and m is from 10 to 40. In an aspect of the invention, the

molar ratio of Al³:hindered phenol, if it is present, is from 3.25:1 to 4.50:1. Preferably the phenol is substituted in the 2, 4 and 6 position by a C₂₋₆ alkyl radical. Desirably the hindered phenol is 2,6-di-tertbutyl-4-ethyl-phenol.


The alkylaluminumoxanes are typically used in substantial molar
 5 excess compared to the amount of group 4 transition metal in the organometallic complex. The Al³:group 4 transition metal molar ratios are from 10:1 to 10,000:1, preferably about 30:1 to 500:1.

The ionic activators include activators that activate the organometallic complex by protonolysis of a suitable activatable ligand or
 10 by the electrophilic abstraction of a suitable activatable ligand. Although the "ionic activator" may abstract or cleave one or more activatable ligand so as to ionize the catalyst center into a "cation", it does not covalently bond with the catalyst, providing instead, sufficient distance between the catalyst metal center and the ionizing activator to permit a polymerizable
 15 olefin to enter the resulting active site.

The ionic activators used in the present invention are selected from compounds of the formula:



wherein B is a boron atom, R¹³ is a cyclic C₅₋₇ aromatic cation or a
 20 triphenyl methyl cation and each R¹⁴ is independently selected from the group consisting of phenyl radicals which are un-substituted or substituted with 3 to 5 substituents selected from the group consisting of a fluorine atom, a C₁₋₄ alkyl or alkoxy radical which is un-substituted or substituted by a fluorine atom; and a silyl radical of the formula —Si—(R¹⁵)₃; wherein
 25 each R¹⁵ is independently selected from the group consisting of a hydrogen atom and a C₁₋₄ alkyl radical; and compounds of the formula:



wherein B is a boron atom, H is a hydrogen atom, Z is a nitrogen atom or phosphorus atom, t is 2 or 3 and R¹⁸ is selected from the group consisting
 30 of C₁₋₈ alkyl radicals, a phenyl radical which is un-substituted or substituted by up to three C₁₋₄ alkyl radicals, or one R¹⁸ taken together with the nitrogen atom may form an anilinium radical and R¹⁴ is as defined above.

Specific ionic activators that may be used in the current invention include but are not limited to: triethylammonium tetra(phenyl)boron, tripropylammonium tetra(phenyl)boron, tri(n-butyl)ammonium tetra(phenyl)boron, trimethylammonium tetra(p-tolyl)boron, 5 trimethylammonium tetra(o-tolyl)boron, tributylammonium tetra(pentafluorophenyl)boron, tripropylammonium tetra(o,p-dimethylphenyl)boron, tributylammonium tetra(m,m-dimethylphenyl)boron, tributylammonium tetra(p-trifluoromethylphenyl)boron, tributylammonium tetra(pentafluorophenyl)boron, tri(n-butyl)ammonium tetra(o-tolyl)boron, 10 N,N-dimethylanilinium tetra(phenyl)boron, N,N-diethylanilinium tetra(phenyl)boron, N,N-diethylanilinium tetra(phenyl)n-butylboron, di-(isopropyl)ammonium tetra(pentafluorophenyl)boron, dicyclohexylammonium tetra(phenyl)boron, triphenylphosphonium tetra(phenyl)boron, tri(methylphenyl)phosphonium tetra(phenyl)boron, 15 tri(dimethylphenyl)phosphonium tetra(phenyl)boron, tropillium tetrakis(pentafluorophenyl) borate, triphenylmethylium tetrakis(pentafluorophenyl) borate, tropillium phenyltris(pentafluorophenyl) borate, triphenylmethylium phenyltris(pentafluorophenyl) borate, benzene (diazonium) phenyltris(pentafluorophenyl) borate, tropillium tetrakis (2,3,5,6- 20 tetrafluorophenyl) borate, triphenylmethylium tetrakis (2,3,5,6-tetrafluorophenyl) borate, tropillium tetrakis (3,4,5-trifluorophenyl) borate, benzene (diazonium) tetrakis (3,4,5-trifluorophenyl) borate, tropillium tetrakis (1,2,2-trifluoroethenyl) borate, triphenylmethylium tetrakis (1,2,2-trifluoroethenyl) borate, tropillium tetrakis (2,3,4,5-tetrafluorophenyl) 25 borate, and triphenylmethylium tetrakis (2,3,4,5-tetrafluorophenyl) borate.


Some readily commercially available ionic activators include: N,N-dimethylaniliniumtetrakis(pentafluorophenyl) borate; triphenylmethylium tetrakis(pentafluorophenyl) borate (tritylborate); and tris(pentafluorophenyl) borane.

30 The ionic activators may also have an anion containing at least one group comprising an active hydrogen or at least one of any substituent able to react with the support. As a result of these reactive substituents,

the anionic portion of these ionic activators may become bonded to the support under suitable conditions. One non-limiting example includes ionic activators with tris(pentafluorophenyl)(4-hydroxyphenyl) borate as the anion. These tethered ionic activators are more fully described in U.S.

5 Pat. Nos 5,834,393; 5,783,512; and 6,087,293.

The electrophilic borane compounds that may be used in the present invention include compounds of the formula:



wherein R¹⁴ is as defined above.

10 The ionic activators or electrophilic borane compounds may be used in amounts which provide a molar ratio of group 4 transition metal to boron that will be from 1:1 to 1:6, preferably from 1:1 to 1:2.

Optionally, mixtures of alkylaluminumoxanes, ionic activators, and electrophilic boranes may be used as activators for the organometallic
15 complex.

In the present invention, a chromium catalyst including optional co-catalysts, an organometallic complex and activator are co-supported (i.e. co-immobilized) on an inorganic oxide.

The present invention is not limited to any particular procedure for
20 supporting the chromium catalyst and organometallic catalyst. Processes for depositing chromium catalysts, organometallic complexes, as well as co-catalysts and activators on a support are well known in the art (for some non-limiting examples of catalyst supporting methods, see "Supported Catalysts" by James H. Clark and Duncan J. Macquarrie,
25 published online November 15, 2002 in the Kirk-Othmer Encyclopedia of Chemical Technology Copyright © 2001 by John Wiley & Sons, Inc.; for some non-limiting methods to support chromium catalysts see: US Pat. Nos 6,982,304; 6,013,595; 6,734,131; 6,958,375; and EP No. 640625; for some non-limiting methods to support an organometallic catalyst see US
30 Pat. No. 5,965,677). For example, catalysts, co-catalysts and activators may be added by co-precipitation or spray drying with the support material

or alternatively by a wet incipient method (i.e. wet impregnation) or similar method using hydrocarbon solvents/diluents or other suitable solvents/diluents.

5 The chromium catalyst and the organometallic complex as well as co-catalyst and activator can be added to the support material in any order. The catalyst system can be prepared in a stepwise manner in which catalyst precursors or intermediates are isolated or not isolated.

10 It is preferable to add the chromium catalyst and the optional co-catalyst to a support prior to the addition of the organometallic complex and activator. The organometallic complex and activator can be added simultaneously or in pre-mixed form or they may be added separately and in any order. The organometallic complex and activator can also be added to the supported chromium catalyst in situ (i.e. in a polymerization reactor or on route to a reactor).

15 A support comprising the chromium catalyst may first be obtained by any suitable known means. For example, the supported chromium catalyst may be obtained by impregnating the support with an aqueous or organic solution of a chromium compound, by co-precipitation or by spray drying with a support material. Alternatively, the supported chromium
20 catalyst may be obtained by mechanical mixing of a solid chromium compound with a support material, followed by heating the mixture. In another variation, the chromium compound may be incorporated into the support during the manufacture thereof so as to obtain a homogeneous dispersion of the metal in the support. For example, a chromium
25 compound may be spray dried with the constituent parts of a clay-inorganic oxide agglomerate to provide a supported chromium catalyst, as is taught by US Pat. No 6,734,131.

The incorporation of the organometallic complex and the activator may be performed by any suitable known means. For example, the
30 organometallic complex and activator may be slurried or dissolved in a suitable diluent or solvent and then added to the support. Suitable solvents or diluents include but are not limited to hydrocarbons and

mineral oil. Alternatively, the organometallic complex may be added to the solid support, in the form of a solid, solution or slurry, followed by the addition of the activator in solid form or as a solution or slurry.

Organometallic complex, activator, and support can be mixed together in the presence or absence of a solvent. Preferably, a solution or slurry containing an organometallic complex and activator in hydrocarbon is added to a support containing the chromium catalyst and optionally a co-catalyst.

The amount of chromium catalyst added to the support should be sufficient to obtain between 0.01% and 10%, preferably from 0.1% to 3%, by weight of chromium, calculated as metallic chromium, based on the weight of the support.

The supported chromium catalyst may require activation prior to use or prior to addition of the organometallic complex and activator.

Activation may involve calcination (as is preferred in the case of chromium oxide) or the addition of a co-catalyst compound (as is preferred in the case of silyl chromate).

Activation by calcination can be accomplished by heating the supported chromium catalyst in steam, dry air or another oxygen containing gas at temperatures up to the sintering temperature of the support. Activation temperatures are in the range of 350°C to 950°C, preferably from 500°C to 900°C and activation times are from about 10 mins to as about 72 hrs. The supported chromium catalyst may optionally be reduced after activation using for example, carbon monoxide or a mixture of carbon monoxide and nitrogen.

The amount of organometallic complex added to the support should be sufficient to obtain between 0.01% and 10%, preferably from 0.1% to 3%, by weight of transition metal, calculated as metallic Ti, Zr, Hf or combined total thereof, based on the weight of the support.

Clearly, a person skilled in the art will recognize that a number of different procedures can be used to prepare the co-supported catalyst of the current invention without changing the scope of the invention

described herein (see for example US Pat No. 6,013,595). In addition, the current invention contemplates the use of one or more than one chromium catalyst, cocatalyst, organometallic complex and activator, as well as mixtures thereof.

5 The ratio of the chromium catalyst to the organometallic catalyst used in the co-supported catalyst system of the current invention, is an important determinant of the resulting polymer product properties, and may be changed in order to control or customize the properties of the finished polymer. Thus, the ratios used are subject to wide variation, but
10 will generally include a molar ratio range of from 1:99 to 99:1 of the chromium catalyst metal, Cr to the group 4 metal of the organometallic catalyst. The preferred molar ratios of the Cr metal to group 4 metal are from 5:95 to 95:5.

 The catalyst system of the current invention, may be prepared in
15 situ in a polymerization reactor, in line and/or on route to a polymerization reactor or it may be prepared and optionally isolated prior to use in a polymerization process. Preferably, the catalyst system is prepared prior to addition to a polymerization reactor.

 The process of the current invention may be used for solution,
20 slurry or gas phase polymerization processes. Preferably, the process used is a gas-phase or slurry phase polymerization process.

 Slurry polymerization is well known in the art. The polymerization is conducted in an inert diluent in which the resulting polymer is not soluble. The monomers may be soluble in the diluent. The diluent is typically a
25 hydrocarbyl compound such as a C₅₋₁₂ hydrocarbon that may be un-substituted or substituted by a C₁₋₄ alkyl radical. Preferably the diluent is un-substituted. Some potential diluents include pentane, hexane, heptane, octane, cyclohexane and methylcyclohexane. The diluent may be hydrogenated naphtha. The diluent may also be a C₈₋₁₂ aromatic
30 hydrocarbon such as that sold by Exxon Chemical Company under the trademark ISOPAR® E. Typically, monomers are dispersed or dissolved in the diluent. The polymerization reaction takes place at temperatures

from about 20°C to about 120°C, preferably from about 40°C to 100°C.

The pressure in the reactor may be from about 15 psi to about 4,500 psi, preferably from about 100 to 1,500 psi. The reactors may be stirred tank or "loop" reactors with a settling leg to remove product polymer.


5 In gas phase polymerization, pressures can be in the range of 25 to 1000 psi, preferably 50 to 500 psi, most preferably 100 to 450 psi, and temperatures will be in the range of from 30 to 130°C, preferably 65 to 115°C. Stirred or preferably fluidized bed gas phase reactors can be used. In the gas phase fluidized bed polymerization of olefins, the
10 polymerization is conducted in a fluidized bed reactor wherein a bed of polymer particles are maintained in a fluidized state by means of an ascending gas stream comprising the gaseous reaction monomer. The polymerization of olefins in a stirred bed reactor differs from polymerization in a gas fluidized bed reactor by the action of a mechanical stirrer within
15 the reaction zone that contributes to fluidization of the bed. The gas phase polymerization may be conducted in dry mode, condensed mode or super condensed mode, all of which are well known in the art. Polymerization takes place in the presence of a non polymerizable gas that may be inert or may be an alkane, or a mixture thereof and typically hydrogen. For a
20 detailed description of gas phase fluidized bed polymerization processes see U.S. Pat. Nos 4,543, 399; 4,588,790; 5,028,670; 5,352,769 and 5,405,922 which are incorporated herein by reference.

 The polymerization process of the current invention preferably takes place in a single gas phase or slurry phase polymerization reactor. The
25 product is removed from the reactor by conventional means and separated from the diluent and/or residual monomers before further treatment.


 In the current invention, the catalyst system may be fed to a polymerization reactor in a number of ways. For example, co-supported catalyst may be fed to the reactor using one or more catalyst feeders. The
30 supported catalyst components may be fed to a reactor via a dry catalyst feeder or as a slurry in a hydrocarbon or other suitable viscous inert liquid such as but not limited to mineral oil. The catalyst slurry can be fed into

the reactor using any suitable liquid delivery system, such as but not limited to a high pressure syringe pump or other displacement device.

Optionally, scavengers are added to the polymerization reactor. In an aspect of the invention, scavengers are organoaluminum compounds
5 having the formula:



where (X^5) is a hydrocarbyl having from 1 to about 20 carbon atoms; (X^6) is selected from alkoxide or aryloxy, any one of which having from 1 to about 20 carbon atoms; halide; or hydride; and n is a number from 1 to 3,
10 inclusive; or alkylaluminumoxanes having the formula:



wherein each R^{30} is independently selected from the group consisting of C_{1-20} hydrocarbyl radicals and m is from 3 to 50. Preferred scavengers are trialkylaluminum compounds.

15 Optionally, the scavengers may be independently supported. For example, an inorganic oxide that has been treated with an organoaluminum compound or an alkylaluminumoxane may be added to the polymerization reactor. Suitable, inorganic oxides are as described above, with silica being preferred. The method of addition of the organoaluminum
20 or alkylaluminumoxane compounds to the inorganic oxide is not specifically defined and is carried out by procedures well known in the art.

The catalyst system of this invention is used to polymerize either ethylene alone (i.e. homopolymerization) or ethylene in conjunction with higher monomers (i.e. copolymerization), such as any one of C_3 - C_{10}
25 α -olefins, including but not limited to propylene, 1-butene, 1-pentene, 1-hexene, 4-methyl-1-pentene, 1-heptene or 1-octene, preferably 1-butene, 4-methyl-1-pentene, 1-hexene, and 1-octene.

The polymers prepared in accordance with the present invention have a broad, bimodal or multimodal molecular weight distribution.

30 Overall, the weight average molecular weight (Mw) of the resins will preferably be greater than about 30,000 ranging up to 10^7 , preferably 10^5 to 10^6 . The polymers may have a density as low as 0.89 g/cc and as high

as 0.965 g/cc as measured according to the procedure of ASTM D-792. Preferably, the polymers will have a density from 0.912 g/cc to 0.960 g/cm³.

By the term "bimodal" it is meant that there will be a lower molecular weight component observed as a peak or shoulder in a GPC analysis (according to ASTM D6474-99) and there will be one or more higher molecular weight components observed as a separate peak or shoulder in a GPC analysis (i.e. the molecular weight distribution, can be said to have two maxima in a molecular weight distribution curve). The term "multi-modal" denotes the presence of more than two maxima in a molecular weight distribution curve generated according to the method of ASTM D6474-99.

In an aspect of the invention, the lower molecular weight component will be present in an amount from 1 to 99, preferably from 30 to 95, most preferably from 40 to 95 weight % of the total bimodal resin. The high molecular weight component may be present in amounts from 99 to 1, preferably 70 to 5, most preferably from about 60 to 5 weight % of the total polymer.

In an aspect of the invention, the low molecular weight polyethylene component may have a weight average molecular weight greater than 5,000, typically from 10,000 to 140,000, preferably from about 15,000 to about 100,000. The low molecular weight polyethylene may have a polydispersity (Mw/Mn) greater than about 5 and less than about 50, typically from 10 to 45. The higher molecular weight portion may have a weight average molecular weight from 100,000 to 800,000, preferably from about 140,000 to about 400,000 and a polydispersity less than about 10.

In an aspect of the invention, the catalyst system and process of the current invention produces polymers having reversed or partially reversed comonomer distributions. The phrase "reversed comonomer distribution" or "partially reversed comonomer distribution" means that on deconvolution of GPC-FTIR (or temperature raising elution fractionation, TREF) data (profiles) (typically using molecular weight distribution

segments of not less than 10,000) there is one or more higher molecular weight components having a higher comonomer incorporation than in one or more lower molecular weight segments. If the comonomer incorporation rises with molecular weight, the distribution is described as
5 “reversed”. Where the comonomer incorporation rises with increasing molecular weight and then declines, the comonomer distribution is described as “partially reversed”.

The polymers produced in accordance with the present inventive process are suitable for use in a number of applications including for
10 example film (blown and cast), extruded articles such as pipe (for potable water or for gas), rotomolded articles, injection molded articles, blow molded articles and geomembranes.

The invention will now be illustrated by the following non-limiting examples.

15

EXAMPLES

General Considerations: Molecular weight distribution and molecular weight averages (M_w , M_n , M_z) of resins were determined using high temperature Gel Permeation Chromatography (GPC) according to the ASTM D6474: “Standard Test Method for Determining Molecular Weight
20 Distribution and Molecular Weight Averages of Polyolefins”. The system was calibrated using the 16 polystyrene standards ($M_w/M_n < 1.1$) in M_w range 5×10^3 to 8×10^6 and 3 hydrocarbon Standards C_{60} , C_{40} , and C_{20} . The operating conditions are listed below:

GPC instrument:	Polymer Laboratories @ 220 equipped with a refractive index detector
Software:	Viscotek® DM 400 Data Manager with Trisec® software
Columns:	4 Shodex® AT-800/S series cross-linked styrene-divinylbenzene with pore sizes 10 ³ Å, 10 ⁴ Å, 10 ⁵ Å, 10 ⁶ Å
Mobile Phase:	1,2,4-trichlorobenzene
Temperature:	140°C.
Flow Rate:	1.0 ml/min
Sample Preparation:	Samples were dissolved in 1,2,4-trichlorobenzene by heating on a rotating wheel for four hours at 150°C.
Sample Filtration:	No
Sample Concentration:	0.1% (w/v)

The branch frequency of copolymer samples was determined by Fourier Transform Infrared Spectroscopy (FTIR) as per the ASTM D6645-5 01 method. A Thermo-Nicolet 750 Magna-IR Spectrophotometer equipped with OMNIC version 7.2a software was used for the measurements.

Example 1 (Comparative)

Preparation of an Organometallic Complex, (Cp-
 10 **C₆F₅)Ti(N=P^tBu₃)Cl₂: (a) Preparation of Cp(C₆F₅)SiMe₃. A solution of hexafluorobenzene (59.54 g, 320 mmol) in 50 mL of tetrahydrofuran (THF) was added dropwise over 10 to 15 minutes to two molar equivalents of sodium cyclopentadienide in THF (320 mL, 2.0 M, 640 mmol). The reaction was mildly exothermic and the reaction was maintained at about
 15 room temperature by cooling the reaction flask in an oil bath. On completing C₆F₆ addition, the purple reaction mixture was heated and kept at 60°C for 3 hours. The reaction was allowed to cool slightly and was then added to neat chlorotrimethylsilane (60 mL, 450 mmol) at 0°C over
 20 15-30 minutes. After an additional 30 minutes, the reaction was warmed to 30°C and the THF, excess chlorotrimethylsilane and other volatiles were removed *in vacuo*. The resulting wet solid was then slurried in heptane**

and filtered to remove inorganic solids. The solids were washed with heptane until the filtrate was pale brown. Concentration of the heptane filtrate *in vacuo* yielded the product, (pentafluorophenylcyclopentadienyl)-trimethylsilane (76.60 g, 79%), as a dark brown oil with a purity of 88% by GC. (b) Preparation of $Cp(C_6F_5)TiCl_3$. $Cp(C_6F_5)SiMe_3$ (65.05 g, 214 mmol) was added drop-wise over 15 to 20 minutes to neat titanium tetrachloride (49.10 g, 258 mmol) while stirring at 60°C. A dark red-brown solution resulted, which was subsequently stirred for 3 hours at 60°C. Heptane (100 ml) was then added to give a slurry, which was cooled by removing solvent *in vacuo* to half-initial volume. The reaction was filtered and the isolated solid washed with additional heptane. The orange-brown product was dried *in vacuo*. Yield = 57.42 g (148 mmol, 70%). (c) Preparation of $(Cp-C_6F_5)Ti(N=P^tBu_3)Cl_2$. $Cp(C_6F_5)TiCl_3$ (30.5g, 79mmol) and trimethylsilyl-tri-*t*-butylphosphinimine, $tBu_3P(=N-SiMe_3)$ (22.92, 79.3 mmol) were combined as solids and toluene (30 g) was added. The reaction was heated at 100°C for 1 hour and then heptane (200 mL) was added. The resulting yellow slurry was filtered and the solid product dried *in vacuo*. Yield = 42.9 g, 96%.

Preparation of an Organometallic Catalyst on an Inorganic Oxide Support: Sylopol 2408[®] silica, purchased from Grace Davison, was calcined by fluidizing with air at 200°C for 2 hours and then under a flow of nitrogen at 600°C for 6 hours. A slurry was made by adding 3g of the calcined silica to 10 mL of toluene. To the silica slurry was added 9 g of a 10 wt% methyl aluminoxane (MAO) solution in toluene purchased from Albemarle. The resulting mixture was stirred for 1 hour at ambient temperature. Separately, 72 mg of the organometallic complex, $(Cp-C_6F_5)Ti(N=P^tBu_3)Cl_2$ prepared as above was dissolved in 10mL of toluene and the resulting solution was added to the MAO/silica slurry. After one hour of stirring at ambient temperature, the slurry was filtered. The solid component was washed with toluene and anhydrous pentane. The final

product was dried in vacuum to 300 mTorr (40 Pa) and stored under nitrogen until used. The Al content in the dry catalyst was 10.5 wt%.

Polymerization: A 2 L stirred tank reactor was heated at 100°C for 1 hour and thoroughly purged with nitrogen. The reactor was then cooled to 95°C. The following components were then successively added into the reactor: 0.5g of Sylopol® 955 silica purchased from W.R. Grace that had been dehydrated at 200°C in air for 2 hrs and 600°C in nitrogen for 6hrs and treated with 0.12 g of a 25 wt% triethyl aluminum solution; 0.041 g of the silica supported organometallic catalyst prepared above; 50psig nitrogen; and 3 mL of 1-hexene. The reactor was subsequently pressurized with 150 psia of ethylene to give a total reactor pressure of approximately 200 psig. During the polymerization, ethylene was continuously fed into the reactor in order to maintain a constant reactor pressure. The polymerization was carried out at 95°C for 1 hour, yielding 8 g of polymer.

Figure 1 shows the GPC profile of the polymer. The polymer has a unimodal molecular weight distribution. The branch frequency of the polymer is shown in Table 1.

Table 1

Branch Frequency and Molecular Weight of Polymers

Example	Catalyst	Support	Branch Frequency (branch/1000 C)	Mn (x 10 ³)	Mw (x 10 ³)	Mz (x 10 ³)	Mw/Mn
Comp. Ex. 1	organometallic cat.	Silica	12.9	168	481	950	2.9
Comp. Ex. 2	chromium cat.	Silica	2.7	9.3	172	1069	18.6
Ex. 3	co-supported cat.	Silica	3.6	12.2	241	1,133	19.8

Example 2 (Comparative)

Preparation of a Chromium Catalyst on an Inorganic Oxide Support:

Sylopol 955® silica, purchased from Grace Davison, was calcined by fluidizing with air at 200°C for 2 hours and then under a flow of nitrogen at 600°C for 6 hours. In an autoclave reactor were added 40 g of the

calcined silica, 1.3 g of silyl chromate and 155 g of pentanes. The reactor was maintained at 50-53°C for 5 hours. 1.38 g of diethyl aluminum ethoxide diluted in 5 mL of pentanes was added to the reactor and the mixture was stirred at 50°C for 1 hour. The reactor was then heated to
5 80°C to distill off the solvent.

Polymerization: The polymerization was carried out similarly to comparative Example 1, except that 0.244 g of the silica supported chromium catalyst prepared above was used. The polymerization gave 90 g of polymer product.

10 Figure 2 shows the GPC profile of the polymer that exhibits a unimodal molecular weight distribution. The branch frequency of the polymer is shown in Table 1.

Comparison of Examples 1 and 2, demonstrates that under similar polymerization conditions, the silica supported chromium catalyst
15 produced a polymer with lower molecular weight and lower comonomer incorporation than that obtained with the silica supported organometallic catalyst (see Table 1).

Example 3 (Inventive)

**Preparation of a Co-Supported Chromium Catalyst/Organometallic
20 Catalyst on an Inorganic Oxide:** In a flask, 3.0 g of the silica supported chromium catalyst prepared in Example 2 was added to 10 mL of toluene at room temperature. Separately, 2.0 g of a 10 wt% MAO solution in toluene was mixed with a solution of 0.015 g of the organometallic complex, $(Cp-C_6F_5)Ti(N=P^tBu_3)Cl_2$ (as prepared in Example 1), dissolved
25 in 5 mL of toluene. The resulting solution was added to the chromium catalyst slurry and the mixture was stirred for 1 hour at room temperature. The slurry was filtered and the solid was washed with toluene and pentanes. The catalyst was then dried under vacuum. This provided a co-supported catalyst system having a molar ratio of Cr to Ti of 5.7/1.

30

Polymerization Using a Co-Supported Chromium**Catalyst/Organometallic Catalyst on an Inorganic Oxide in a Stirred****Gas Phase Reactor:** A 2 L stirred the reactor was heated at 100°C for 1

hour and thoroughly purged with nitrogen. The reactor was then cooled to

5 95°C. The following components were then successively added into the reactor: 0.5 g of Sylopol[®] 955 silica purchased from W.R. Grace that had been dehydrated at 200°C in air for 2 hrs and 600°C in nitrogen for 6 hrs and treated with 0.12 g of a 25 wt% triethyl aluminum solution; 50 psi nitrogen, 3 mL of 1-hexene; and 0.207 g of the co-supported catalyst
10 system prepared above. The reactor was subsequently pressurized with 150 psia of ethylene to give a total reactor pressure of approximately 200 psig. During the polymerization, ethylene was continuously fed into the reactor in order to maintain a constant reactor pressure. The polymerization was carried out at 95°C for 1 hour, yielding 81 g of polymer.

15 Figure 3 shows the GPC profile of the polymer produced according to Example 3. The polymer clearly exhibits a bimodal molecular weight distribution. By comparing Figures 1-3, a person skilled in the art would recognize that the low molecular weight fraction can be attributed to polymer made by the chromium catalyst and the high molecular weight
20 fraction can be attributed to polymer produced by the organometallic catalyst.

Due to poor solubility, GPC-FTIR data could not be obtained for a polymer produced according to Example 3. However, a person skilled in the art will recognize that use of appropriate ratios of Cr to Ti can provide a
25 bimodal resin which exhibits reversed co-monomer incorporation, since the organometallic catalyst incorporates higher amounts of comonomer than does the chromium catalyst as demonstrated by the higher branch frequencies obtained for the supported organometallic catalyst (Example 1) relative to the supported chromium catalyst (Example 2), under similar
30 polymerization conditions (compare Examples 1 and 2 in Table 1).

INDUSTRIAL APPLICABILITY


The invention provides a co-supported catalyst system suitable for use in the production of bimodal polyethylene having reversed comonomer incorporation. Bimodal polyethylenes with a reversed comonomer content
5 are useful in numerous applications including for example blown and cast film, extruded articles such as pipe (for potable water or for gas), rotomolded articles, injection molded articles, blow molded articles and geomembranes.

CLAIMS

1. A catalyst system for homopolymerization or copolymerization of ethylene, said catalyst system comprising:

- (a) a chromium catalyst; and
 5 (b) an organometallic catalyst;
 co-supported on an inorganic oxide, wherein the organometallic catalyst comprises:

i) an organometallic complex having the formula:



10 wherein, M is a group 4 metal; PI is a phosphinimide ligand or a ketimide ligand; L is a monoanionic ligand selected from the group consisting of a cyclopentadienyl type ligand or a bulky heteroatom ligand; Y is an activatable ligand; PI and L may optionally be joined by a bridging group; two PI ligands
 15 may optionally be joined by a bridging group; m is 1 or 2; n is 0 or 1; and p is an integer and the sum of m+n+p equals the valence state of M; and

ii) an activator.

2. The process of claim 1, wherein the inorganic oxide is selected from
 20 the group consisting essentially of SiO₂, Al₂O₃, MgO, AlPO₄, TiO₂, ZrO₂ and mixtures thereof.

3. The process of claim 2, wherein the molar ratio of Cr to group 4 metal is from 5:95 to 95:5.

4. The process of claim 3, wherein the chromium catalyst is a silyl
 25 chromium catalyst.

5. The process of claim 4, wherein the activator is selected from the group consisting of alkylaluminoxanes, ionic activators and mixtures thereof.

6. The process of claim 5, wherein PI is a phosphinimide ligand.

30 7. The process of claim 6, wherein L is a cyclopentadienyl type ligand.

8. The process according to claim 6, wherein L a bulky heteroatom type ligand.
9. The process according to claim 8, wherein the bulky heteroatom type ligand is a borabenzene ligand.
- 5 10. The process according to claims 6-9, wherein Y is independently selected from the group consisting of a hydrogen atom; a halogen atom, a C₁₋₁₀ hydrocarbyl radical; a C₁₋₁₀ alkoxy radical; a C₅₋₁₀ aryl oxide radical; each of which said hydrocarbyl, alkoxy, and aryl oxide radicals may be un-
- 10 substituted by or further substituted by one or more substituents selected from the group consisting of a halogen atom; a C₁₋₈ alkyl radical; a C₁₋₈ alkoxy radical; a C₆₋₁₀ aryl or aryloxy radical; an amido radical which is un-
- substituted or substituted by up to two C₁₋₈ alkyl radicals; and a phosphido radical which is un-substituted or substituted by up to two C₁₋₈ alkyl radicals.
- 15 11. The process of claim 5, wherein PI is a ketimide ligand.
12. The process of claim 11, wherein L is a cyclopentadienyl type ligand.
13. The process according to claim 11, wherein L a bulky heteroatom type ligand.
- 20 14. The process according to claim 13, wherein the bulky heteroatom type ligand is a borabenzene ligand.
15. The process according to claims 11-14, wherein Y is independently selected from the group consisting of a hydrogen atom; a halogen atom, a C₁₋₁₀ hydrocarbyl radical; a C₁₋₁₀ alkoxy radical; a C₅₋₁₀ aryl oxide radical;
- 25 each of which said hydrocarbyl, alkoxy, and aryl oxide radicals may be un-substituted by or further substituted by one or more substituents selected from the group consisting of a halogen atom; a C₁₋₈ alkyl radical; a C₁₋₈ alkoxy radical; a C₆₋₁₀ aryl or aryloxy radical; an amido radical which is un-
- substituted or substituted by up to two C₁₋₈ alkyl radicals; and a phosphido radical which is un-substituted or substituted by up to two C₁₋₈ alkyl
- 30 radicals.

16. A process to produce an ethylene homopolymer or copolymer comprising contacting ethylene and optionally an α -olefin with a catalyst system in a polymerization reactor, wherein the catalyst system comprises:

- 5 a) a chromium catalyst; and
 b) an organometallic catalyst;
 co-supported on an inorganic oxide, wherein the organometallic catalyst comprises:

- i) an organometallic complex having the formula:



wherein, M is a group 4 metal; PI is a phosphinimide ligand or a ketimide ligand; L is a monoanionic ligand selected from the group consisting of a cyclopentadienyl type ligand or a bulky heteroatom ligand; Y is an activatable ligand; PI and L may optionally be joined by a bridging group; two PI ligands may optionally be joined by a bridging group; m is 1 or 2; n is 0 or 1; and p is an integer and the sum of m+n+p equals the valence state of M; and

- 15 ii) an activator.

20

AMENDED CLAIMS

received by the International Bureau on 26 February 2009 (26.02.2009)

CLAIMS


1. A catalyst system for homopolymerization or copolymerization of ethylene, said catalyst system comprising:

(a) a chromium catalyst; and

(b) an organometallic catalyst;

co-supported on an inorganic oxide, wherein the organometallic catalyst comprises:

i) an organometallic complex having the formula:



wherein, M is a group 4 metal; PI is a phosphinimide ligand or a ketimide ligand; L is a monoanionic ligand selected from the group consisting of a cyclopentadienyl type ligand or a bulky heteroatom ligand; Y is an activatable ligand; PI and L may optionally be joined by a bridging group; two PI ligands may optionally be joined by a bridging group; m is 1 or 2; n is 0 or 1; and p is an integer and the sum of m+n+p equals the valence state of M; and

ii) an activator.

2. The catalyst system of claim 1, wherein the inorganic oxide is selected from the group consisting essentially of SiO₂, Al₂O₃, MgO, AlPO₄, TiO₂, ZrO₂ and mixtures thereof.

3. The catalyst system of claim 2, wherein the molar ratio of Cr to group 4 metal is from 5:95 to 95:5.

4. The catalyst system of claim 3, wherein the chromium catalyst is a silyl chromium catalyst.

5. The catalyst system of claim 4, wherein the activator is selected from the group consisting of alkylaluminoxanes, ionic activators and mixtures thereof.


6. The catalyst system of claim 5, wherein PI is a phosphinimide ligand.

7. The catalyst system of claim 6, wherein L is a cyclopentadienyl type ligand.

8. The catalyst system according to claim 6, wherein L a bulky heteroatom type ligand.

9. The catalyst system according to claim 8, wherein the bulky heteroatom type ligand is a borabenzene ligand.

10. The catalyst system according to claims 6-9, wherein Y is independently selected from the group consisting of a hydrogen atom; a halogen atom, a C₁₋₁₀ hydrocarbyl radical; a C₁₋₁₀ alkoxy radical; a C₅₋₁₀ aryl oxide radical; each of which said hydrocarbyl, alkoxy, and aryl oxide radicals may be un-substituted by or further substituted by one or more substituents selected from the group consisting of a halogen atom; a C₁₋₈ alkyl radical; a C₁₋₈ alkoxy radical; a C₆₋₁₀ aryl or aryloxy radical; an amido radical which is un-substituted or substituted by up to two C₁₋₈ alkyl radicals; and a phosphido radical which is un-substituted or substituted by up to two C₁₋₈ alkyl radicals.
11. The catalyst system of claim 5, wherein PI is a ketimide ligand.
12. The catalyst system of claim 11, wherein L is a cyclopentadienyl type ligand.
13. The catalyst system according to claim 11, wherein L a bulky heteroatom type ligand.
14. The catalyst system according to claim 13, wherein the bulky heteroatom type ligand is a borabenzene ligand.
15. The catalyst system according to claims 11-14, wherein Y is independently selected from the group consisting of a hydrogen atom; a halogen atom, a C₁₋₁₀ hydrocarbyl radical; a C₁₋₁₀ alkoxy radical; a C₅₋₁₀ aryl oxide radical; each of which said hydrocarbyl, alkoxy, and aryl oxide radicals may be un-substituted by or further substituted by one or more substituents selected from the group consisting of a halogen atom; a C₁₋₈ alkyl radical; a C₁₋₈ alkoxy radical; a C₆₋₁₀ aryl or aryloxy radical; an amido radical which is un-substituted or substituted by up to two C₁₋₈ alkyl radicals; and a phosphido radical which is un-substituted or substituted by up to two C₁₋₈ alkyl radicals.
16. A process to produce an ethylene homopolymer or copolymer comprising contacting ethylene and optionally an α -olefin with a catalyst system in a polymerization reactor, wherein the catalyst system comprises:
- a) a chromium catalyst; and
 - b) an organometallic catalyst;
- co-supported on an inorganic oxide, wherein the organometallic catalyst comprises:
- i) an organometallic complex having the formula:



wherein, M is a group 4 metal; PI is a phosphinimide ligand or a ketimide ligand; L is a monoanionic ligand selected from the group consisting of a

cyclopentadienyl type ligand or a bulky heteroatom ligand; Y is an activatable ligand; PI and L may optionally be joined by a bridging group; two PI ligands may optionally be joined by a bridging group; m is 1 or 2; n is 0 or 1; and p is an integer and the sum of $m+n+p$ equals the valence state of M; and

5

ii) an activator.

1/2

Figure 1

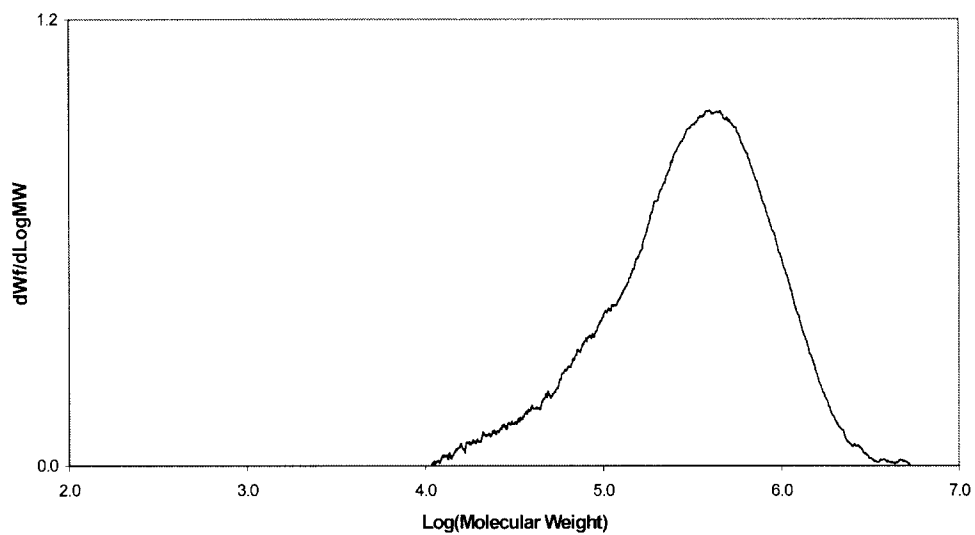


Figure 2


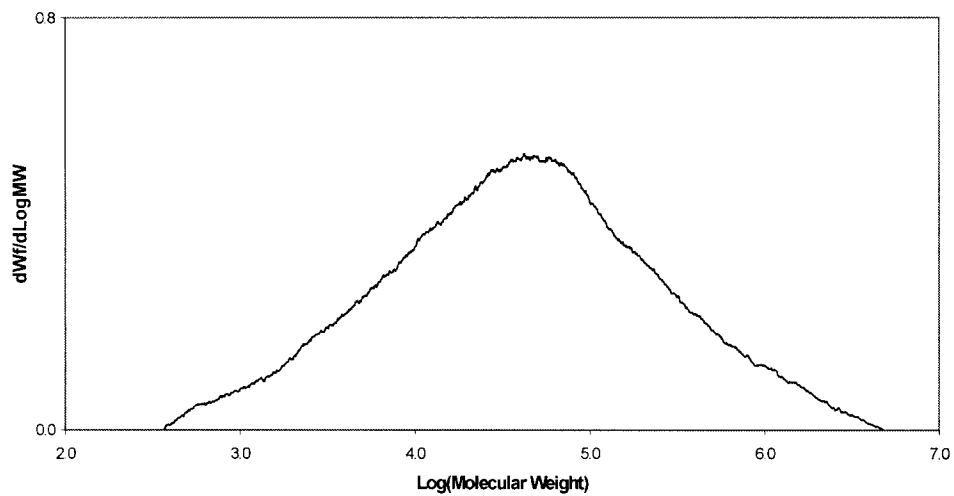


Figure 3

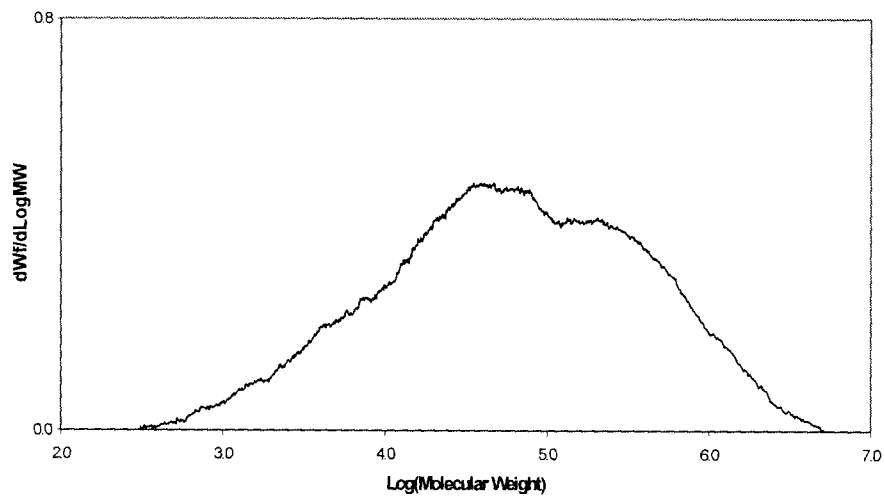

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2008/001737

<p>A. CLASSIFICATION OF SUBJECT MATTER IPC: <i>C08F 4/646</i> (2006.01), <i>C08F 10/02</i> (2006.01), <i>C08F 4/02</i> (2006.01), <i>C08F 4/22</i> (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC</p>														
<p>B. FIELDS SEARCHED</p> <p>Minimum documentation searched (classification system followed by classification symbols) IPC: <i>C08F 4/646</i> (2006.01), <i>C08F 10/02</i> (2006.01), <i>C08F 4/02</i> (2006.01), <i>C08F 4/22</i> (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC</p> <p>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched</p> <p>Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used) Canadian Patent Database, Scopus, Delphion, West; search terms: (chromium OR Cr) (phosphinimi* OR ketimi*)</p>														
<p>C. DOCUMENTS CONSIDERED TO BE RELEVANT</p> <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th style="width:10%;">Category*</th> <th style="width:60%;">Citation of document, with indication, where appropriate, of the relevant passages</th> <th style="width:30%;">Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td align="center">Y</td> <td>US 5,723,399 (Takemoto et al.) 03 March 1998 (03-03-1998) entire document cited in the application</td> <td align="center">1-8, 10-13, 15, 16</td> </tr> <tr> <td align="center">Y</td> <td>CA 2,215,444 (Brown et al.) 15 March 1999 (15-03-1999) entire document</td> <td align="center">1-5, 11-13, 15, 16</td> </tr> <tr> <td align="center">Y</td> <td>US 5,965,677 (Stephan et al.) 12 October 1999 (12-10-1999) entire document</td> <td align="center">1-8, 10, 16</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	Y	US 5,723,399 (Takemoto et al.) 03 March 1998 (03-03-1998) entire document cited in the application	1-8, 10-13, 15, 16	Y	CA 2,215,444 (Brown et al.) 15 March 1999 (15-03-1999) entire document	1-5, 11-13, 15, 16	Y	US 5,965,677 (Stephan et al.) 12 October 1999 (12-10-1999) entire document	1-8, 10, 16
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.												
Y	US 5,723,399 (Takemoto et al.) 03 March 1998 (03-03-1998) entire document cited in the application	1-8, 10-13, 15, 16												
Y	CA 2,215,444 (Brown et al.) 15 March 1999 (15-03-1999) entire document	1-5, 11-13, 15, 16												
Y	US 5,965,677 (Stephan et al.) 12 October 1999 (12-10-1999) entire document	1-8, 10, 16												
<p><input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.</p>		<p><input checked="" type="checkbox"/> See patent family annex.</p>												
<p>* Special categories of cited documents :</p> <p>“A” document defining the general state of the art which is not considered to be of particular relevance</p> <p>“E” earlier application or patent but published on or after the international filing date</p> <p>“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>“O” document referring to an oral disclosure, use, exhibition or other means</p> <p>“P” document published prior to the international filing date but later than the priority date claimed</p>		<p>“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>“&” document member of the same patent family</p>												
<p>Date of the actual completion of the international search 10 December 2008 (10-12-2008)</p>		<p>Date of mailing of the international search report 15 January 2009 (15-01-2009)</p>												
<p>Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 001-819-953-2476</p>		<p>Authorized officer Samantha Drouin 819- 934-2324</p>												

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2008/001737

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6,013,595 (Lhost et al.) 11 January 2000 (11-01-2000) examples, claims cited in the application	1-3, 16
Y	EP 339,571 (Sasaki) 02 November 1989 (02-11-1989) examples 16-29 cited in the application	1-3, 16
Y	US 6,780,809 (Follestad et al.) 24 August 2004 (24-08-2004) examples, claims cited in the application	1-3, 16
Y	US 7,163,906 (McDaniel et al.) 16 January 2007 (16-01-2007) examples, claims cited in the application	1-3, 16
A	CA 2,527,580 (Hoang et al.) 07 June 2006 (07-06-2006) entire document	1-16
A	CA 2,278,042 (McKay et al.) 19 January 2001 (19-01-2001) entire document	1-16
A	US 2007/0049711 (Kuo et al.) 01 March 2007 (01-03-2007) par. [0026], [0032], [0034], [0054], [0236], [0241], [0306]-[0312]	1-3, 16
P,A	CA 2,583,007 (Gao et al.) 29 September 2008 (29-09-2008) pages 5-6; page 15, line 19 to page 16, line 2; page 18, lines 15-18	1-3, 16

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2008/001737

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US 5723399A	03-03-1998	DE 69602329D1	10-06-1999
		DE 69602329T2	23-09-1999
		EP 0763550A1	19-03-1997
		EP 0763550B1	06-05-1999
		JP 9136912A	27-05-1997
CA 2215444A1	15-03-1999	AT 229042T	15-12-2002
		AU 8970098A	05-04-1999
		CA 2215444C	02-08-2005
		CN 1210312C	13-07-2005
		CN 1270601A	18-10-2000
		DE 69809957D1	16-01-2003
		DE 69809957T2	04-09-2003
		DK 1021470T3	17-03-2003
		EP 1021470A1	26-07-2000
		EP 1021470B1	04-12-2002
		ES 2188000T3	16-06-2003
		JP 2001516776T	02-10-2001
		US 6114481A	05-09-2000
		US 6420300B1	16-07-2002
		WO 9914250A1	25-03-1999
US 5965677A	12-10-1999	AT 235518T	15-04-2003
		AU 740558B2	08-11-2001
		AU 7192098A	21-01-1999
		BR 9802353A	14-12-1999
		CA 2210131A1	09-01-1999
		CA 2210131C	02-08-2005
		CN 1206015A	27-01-1999
		CN 1222548C	12-10-2005
		DE 69812485D1	30-04-2003
		DE 69812485T2	04-03-2004
		EP 0890581A1	13-01-1999
		EP 0890581B1	26-03-2003
		ES 2196493T3	16-12-2003
		FI 981404A	10-01-1999
		FI 981404D0	17-06-1998
		JP 11071420A	16-03-1999
		NO 324681B1	03-12-2007
NO 983151A	11-01-1999		
RU 2203908C2	10-05-2003		
US 6013595A	11-01-2000	AT 179995T	15-05-1999
		BE 1009186A3	03-12-1996
		BR 9600991A	30-12-1997
		CA 2170805A1	14-09-1996
		CN 1156729A	13-08-1997
		DE 69602391D1	17-06-1999
		DE 69602391T2	16-12-1999
		EP 0733650A1	25-09-1996
		EP 0733650B1	12-05-1999
		ES 2133888T3	16-09-1999
		JP 8259618A	08-10-1996
		RU 2162091C2	20-01-2001

Continued on next page.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2008/001737

Information on patent family members, continued.

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
EP 0339571A1	02-11-1989	DE 68913226D1	31-03-1994
		DE 68913226T2	29-09-1994
		EP 0339571B1	23-02-1994
		JP 1272605A	31-10-1989
		JP 1292009A	24-11-1989
		JP 2640491B2	13-08-1997
		JP 2678914B2	19-11-1997
		NO 172242B	15-03-1993
		NO 172242C	23-06-1993
		NO 891710A	27-10-1989
		NO 891710D0	25-04-1989
US 6780809B1	24-08-2004	AT 283866T	15-12-2004
		AU 738712B2	27-09-2001
		AU 740974B2	15-11-2001
		AU 2443099A	23-08-1999
		AU 2443199A	23-08-1999
		BR 9907702A	14-11-2000
		BR 9907708A	14-11-2000
		CA 2320271A1	12-08-1999
		CA 2320271C	17-07-2007
		CA 2320436A1	12-08-1999
		CA 2320436C	14-08-2007
		CN 1132853C	31-12-2003
		CN 1136241C	28-01-2004
		CN 1290272A	04-04-2001
		CN 1290274A	04-04-2001
		DE 69922340D1	05-01-2005
		DE 69922340T2	10-11-2005
		EP 1045866A1	25-10-2000
		EP 1045866B1	01-12-2004
		EP 1053264A1	22-11-2000
		ES 2234237T3	16-06-2005
		JP 2002502895T	29-01-2002
		JP 2002502897T	29-01-2002
		NO 980552D0	09-02-1998
US 6541581B1	01-04-2003		
WO 9940126A1	12-08-1999		
WO 9940126A9	21-10-1999		
WO 9940131A1	12-08-1999		
US 7163906B2	16-01-2007	US 2006094590A1	04-05-2006
CA 2527580A1	07-06-2006	AT 396209T	15-06-2008
		DE 602005006949D1	03-07-2008
		EP 1669376A1	14-06-2006
		EP 1669376B1	21-05-2008
		JP 2006169521A	29-06-2006
		US 7064096B1	20-06-2006
US 2006122054A1	08-06-2006		
CA 2278042A1	19-01-2001	AU 5960000A	05-02-2001
		DE 60001281D1	27-02-2003
		DE 60001281T2	13-11-2003
		EP 1212367A1	12-06-2002
		EP 1212367B1	22-01-2003
		JP 2003505542T	12-02-2003
		US 6235672B1	22-05-2001
		US 6486273B1	26-11-2002
		WO 0105849A1	25-01-2001

Continued on next page.

INTERNATIONAL SEARCH REPORTInternational application No.
PCT/CA2008/001737

Information on patent family members, continued.

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
US 2007049711A1	01-03-2007	CA 2620568A1 CN 101253201A EP 1919966A1 KR 20080049728A WO 2007030260A1	15-03-2007 27-08-2008 14-05-2008 04-06-2008 15-03-2007
CA 2583007A1	29-09-2008	US 2008242811A1 WO 2008119153A1	02-10-2008 09-10-2008