

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 August 2006 (03.08.2006)

PCT

(10) International Publication Number
WO 2006/079867 A1

- (51) International Patent Classification:
H04M 1/663 (2006.01) *H04M 1/247* (2006.01)
- (21) International Application Number:
PCT/IB2005/000224
- (22) International Filing Date: 31 January 2005 (31.01.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BUNTE, Björn** [DE/DE]; Am Holtmanngarten 7, 59425 Unna (DE). **LEHN, Karsten** [DE/DE]; Auf dem Spiek 45, 59174 Kamen (DE). **BUTH, Peter** [DE/DE]; Kupferplatte 7, 44795 Bochum (DE).
- (74) Agent: **KURIG, Thomas**; Becker, Kurig, Straus, Bavariastrasse 7, 80336 München (DE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

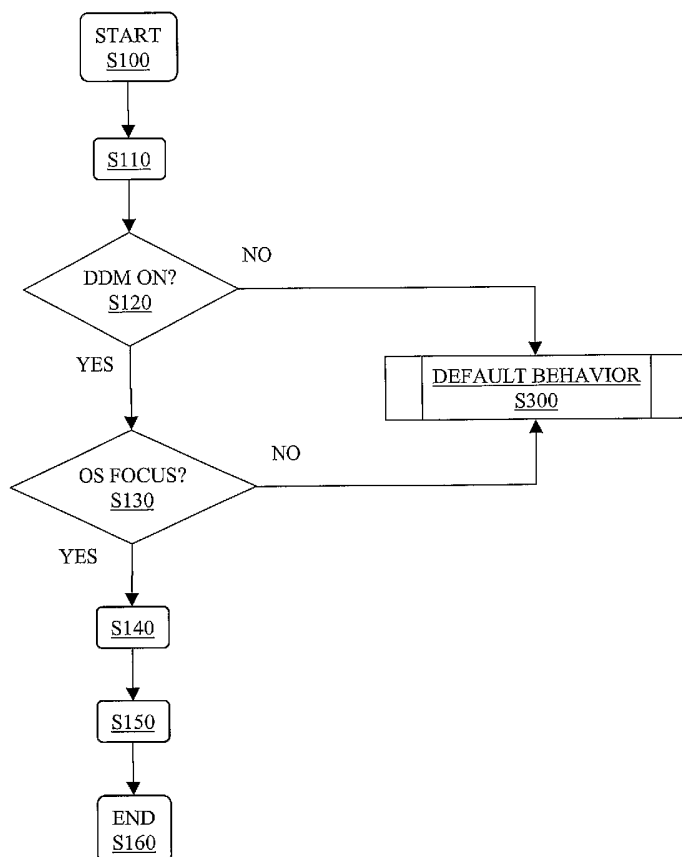
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND DEVICE FOR INHIBITING INTERRUPTION OF A RUNNING APPLICATION BY AN EVENT



(57) Abstract: The present invention proposes a methodology implementable in form of a hardware or software module for inhibiting interruption of a running application by an event according to a selected non-disturbance profile, said event occurring on a mobile device.

WO 2006/079867 A1

Method and Device for inhibiting interruption of a running application by an event

5

The present invention relates to methods for inhibiting interruption of a running application on a mobile device, wherein said event occurs while running said application. In particular, the present invention relates to a mobile device enabled to provide said methods in an efficient manner.

10

Today's mobile devices are developed to offer a user a wide spectrum of usability. A modern mobile device unifies almost all functions known from a usual personal computer and it has additionally the functionality of a mobile phone. They offer, among other things, the possibility to maintain and manage tasks or appointments, browse the internet, writing emails and even executing applications. Additionally, said devices may include useful tools like a video and a photo camera or an mp3 player, for instance.

15

Due to enhanced device capabilities of regular mobile handsets and new devices, specifically for gaming, the market for mobile gaming is growing rapidly. Mobile devices that are adapted to process complex applications like games for instance have become more powerful in the last years. Those mobile devices include colour displays, large memory, as well as download and execution environments making game applications more fun and easier to access.

25

According to the state of the art, a mobile device interrupts or pauses a running application if an incoming call for instance occurs. This is done by a pop up message or similar and the user has to handle said pop up message for continuing using of said application. There is no possibility to set up a "do not disturb" behavior (or mode) within the running application

which makes it possible to run said application without interruptions.

If a user receives for example a short message while running a game application, the operating system will interrupt said game and the user has to handle the pop up messages
5 displayed on the screen for continuing the game. This behavior is undesirable for the user because of the unwanted distractions. Presently, if a user wants to play a game without disturbance, he has to switch off the communication interface of the device to avoid the above-mentioned behavior. However, the user does not want to switch off the communication interface because he needs the cellular engine to connect to game servers, for
10 instance in order to play online multiplayer games. When watching or recording a video on a mobile phone or a mobile media player convergence device, the user does not want to be disturbed by events driven by the phone side of the device.

WO 2004/057888 discloses a mobile terminal that avoids a user to manually adjust the
15 availability settings. However, said device is enabled to selectively set the availability based on a running application. One main disadvantage of the disclosed methodology is the necessary permanent connection to a network and additionally it cannot deal with application running alternatively in the foreground and in the background on the basis of the operating system.

20

The overall object of the present invention is to improve the presently available behavior of a mobile device as an event is received while a certain application is running. Especially, it is an object of the present invention to ensure proper continuation of running applications, especially games, even in case of incoming events.

25

According to a first aspect of the present invention, a method for inhibiting interruption of a running application by an event is provided. Said inhibiting is provided according to a selected non-disturbance profile. Said event occurs on a mobile device, while said device is running a certain application. Modern mobile devices offer a lot of applications, whereby a
30 user wants to be undisturbed by incoming calls or other events. In a first operation detecting of an occurrence of said event is provided. Afterwards, a determining if said non-disturbance

profile has been set is provided. Then, inhibiting interruption of said running application according to said determined non-disturbance profile follows.

5 According to an embodiment of the present invention, said inhibiting is accompanied by a secondary indication without intermitting execution of said application if said non-disturbance profile is set. Thereby, a secondary indication to the user is provided, wherein said user realizes the occurrence of an event even if the application is not intermitted. The secondary indication may be in form of an audio notification for instance.

10 According to another embodiment of the present invention, a primary indication is provided if said non-disturbance profile is unset. Therewith a normal behavior of said device is reached.

15 According to another embodiment of the present invention, said non-disturbance profile is disabled if said application is run in the background on the basis of an operating system operating said mobile device. While the application is run in the background the mobile device will have a normal, standard behavior. Further, if the focus of the operating system is set back on the application, which corresponds to a foreground executing of said application, the non-disturbance mode is reactivated.

20

According to another embodiment of the present invention, said secondary indication is an audio, a vibrating or a visible indication provided by means of said mobile device. Thereby a user is notified about the occurrence of said event.

25 According to another embodiment of the present invention, said detected event is an external event. Thus it is possible to execute an application without being disturbed by an external event, like an incoming call for instance.

30 According to another embodiment of the present invention, said external event is an incoming short message (SMS), a multi media message (MMS), a Bluetooth-connection or a PoC-message.

According to another embodiment of the present invention, said detected event is an internal event. Thereby, internal events are handled in an efficient manner and a user may run said application without being disturbed.

5

According to another embodiment of the present invention, said internal event is a general system alert, a clock alert, a low energy indication, a reminding task or the like.

According to another embodiment of the present invention, said MMS is not fetched while
10 said application is active and said non-disturbance profile is set. Because of the CPU performance increasing while fetching an MMS, it is preferred that said SMS is fetched later after quitting or pausing the foreground application.

According to another embodiment of the present invention, said profile settings define
15 parameters for operating said mobile device. Thereby a general behavior controlling of said device is possible.

According to another embodiment of the present invention, said operational parameters
20 provide an automatic activation of said non-disturbance profile on the basis of time information. Thus it is possible to activate said non-disturbance profile on a time basis. For instance while playing in the night hours or the like said modus is automatically set.

According to another embodiment of the present invention, said running application is a
gaming application or a scanning application by means of a digital camera within said device.
25 While using the camera device within said device it is preferred, that the scanning application is not intermitted by an incoming call for instance.

According to another embodiment of the present invention, said non-disturbance profile is set
within said running application. While running an application like a gaming application for
30 instance it is possible to set said non-disturbance profile by means of said application. This is advantageous because the user must not interrupt the running application to set said profile.

According to another embodiment of the present invention, said non-disturbance profile is set in the device settings. However, if a user has once set said non-disturbance profile, it will be activated only when said application is started and deactivated when said application is terminated or paused.

According to another embodiment of the present invention, said non-disturbance profile is passed through into the general profile settings of said mobile device. Thereby, the mobile device settings inherit said non-disturbance profile, so that said mobile profile may become a general profile setting if wanted.

According to another embodiment of the present invention, said non-disturbance profile is controlled by said general profile settings of said mobile device. It is possible to implement a non-disturbance profile within the general profile settings of said device. For instance, there may be implemented a general register for all applications within the device and a user is able to centrally control the non-disturbance functionality.

According to another embodiment of the present invention, said parameters of said non-disturbance profile that are used to determine said secondary indication are controlled by said mobile device for all applications. Thereby, the mobile device is able to control the behavior of all applications running on said device. Thus, a centralized supervision by said mobile device is reached.

According to another embodiment of the present invention, a user can define said parameters of said non-disturbance profile. In this manner a user is able to set his own non-disturbance profile settings.

According to another embodiment of the present invention, said parameters of said non-disturbance profile that are used to determine said secondary indication are controlled by said running application and only valid for said running application. For instance, if a user sets said non-disturbance profile within one certain application those settings are only valid for

that defined running application. If said running application is moved into the background of the OS said secondary indication may be deactivated.

10

According to another embodiment of the present invention, said user can define said parameters of said non-disturbance profile for said application. Thereby a convenient user controlled behavior of said profile may be reached.

10

According to another aspect of the present invention, a computer program product is provided, which comprises program code sections stored on a machine-readable medium for carrying out the operations of the method according to any aforementioned embodiment of the invention, when the computer program product is run on a processor-based device, a computer, a terminal, a network device, a mobile terminal, or a mobile communication enabled terminal.

15

According to another aspect of the present invention, a computer program product is provided, said product comprising program code sections for carrying out the steps of anyone of the method according to any aforementioned embodiment of the invention, when said program is run on a processor-based device, a terminal device, a network device, a portable terminal, a consumer electronic device, or a mobile communication enabled terminal.

20

According to another aspect of the present invention, a software tool is provided. The software tool comprises program portions for carrying out the operations of the aforementioned methods when the software tool is implemented in a computer program and/or executed.

25

According to another aspect of the present invention, a computer data signal embodied in a carrier wave and representing instructions is provided which when executed by a processor causes the operations of the method according to an aforementioned embodiment of the invention to be carried out.

30

According to yet another aspect of the present invention a mobile device adapted for

inhibiting interruption of a running application by an event according to a selected non-disturbance profile is provided. Said device comprises at least one component for detecting an occurrence of said event, one component for determining if said non-disturbance profile has been set and one component for inhibiting interruption of said running application according to said determined non-disturbance profile.

According to another embodiment of the present invention, said device further comprises a central processing unit (CPU) adapted for controlling said components. Thus a central controlling unit is provided which interconnects all the modules within said device.

According to another embodiment of the present invention, said device further comprises a memory unit and a data communication interface.

Advantages of the present invention will become apparent to the reader of the present invention when reading the detailed description referring to embodiments of the present invention, based on which the inventive concept is easily understandable.

The accompanying drawings are included to provide a further understanding of the invention, and are incorporated in and constitute a part of this specification. The drawings illustrate embodiments of the present invention and together with the description serve to explain the principles of the invention. In the drawings,

Fig. 1 is a flow chart illustrating a method for indicating an event in accordance with the present invention;

Fig. 2 depicts an options menu for setting the DDM mode in accordance with the present invention;

Fig. 3 depicts a possible implementation of the methodology according to the present invention;

Fig. 4 shows a mobile device according to the present invention.

It shall be noted that the designations portable device and mobile device are used synonymously throughout the description.

5

Reference will be made in detail to the embodiments of the invention examples, which are illustrated in the accompanying drawings. Wherever possible same reference numbers are used throughout the drawings and description to refer to similar or like parts. The following description relates to various embodiments based on which the skilled reader will understand the principle inventive concept of the present invention. Nevertheless, the skilled reader will appreciate that the inventive concept is likewise applicable to further embodiments, which are covered by the scope of the accompanying claims.

10

The following designations of abbreviations are used:

15

DDM Don't Disturb Mode (non-disturbance profile)

SW Software

SDK Software Development Kit

PoC Push to talk Over Cellular network

KLS Keep last settings (which means that the settings of the active profile shall be used)

20

MMS Multi Media Message

SMS Short Message Service

Vibra Vibration setting within the mobile device (phone)

API Application Interface

25

UI User Interface (e.g. Display).

Fig. 1 is a flow chart representing as an operation sequence block diagram the methodology for indicating an event on a mobile device while running a certain application. Said method may be processed on a mobile device like a mobile phone, a PDA or the like.

30

In an operation S100, the operational sequence starts. In accordance with the aforementioned

description of the inventive concept, a mobile device enabled to receive external events is provided. Said device is a mobile phone for instance which is equipped with an operating system (e.g. Symbian OS but not restricted thereto) and is additionally adapted to perform complex operations, for example in form of games.

5

While said user is playing a game an external event occurs in form of an incoming phone call or an incoming message (SMS). In an operation S110 the device is detecting the occurrence of said incoming call and has to manage this event. The state of the art methods are interrupting the application (game) and inform the user about said occurrence, which may be a disturbing or inconvenient behavior.

10

According to the present invention, an operation S120 is determining if said device has the possibility to be switched into a don't disturb mode (DDM). The operation S120 is represented as a conditional operation defining two branches, wherein the NO branch describes the default or standard behavior. This means that if the device has not enabled the DDM mode a standard operation S300 is performed, representing the default behavior of a mobile phone while an incoming event occurs as running a certain application. Thereby, the game is intermitted (paused) and the user will be informed about the occurrence of said external event. The user has now to deal with the messages displayed on the phone screen if he wants to continue playing the game, which may be inconvenient.

15

20

If the device has an enabled DDM mode, corresponding to the YES branch of the conditional operation S120, an operation S130 follows. The operation S130 is a conditional operation as well, and it will check if the operating system focus is applied on said application (game). With other words, the operation S130 checks if the game is run in the foreground or in the background based on the OS. This step is a key feature of a modern operating system like Symbian OS for instance. If the application is however in the background, according to the NO branch, said default operation S300 is provided, executing the above-mentioned steps for informing the user about the incoming call, or whatever.

25

30

If the conditional operation detects that the application is run in the foreground of the OS,

which means that the OS is focused on said application, an operation S140 in accordance with the present invention follows. In operation S140 said application determines the game state and selects the indication used to inform the user. For example, the application could select said default operation when the application state is in a menu, but it could decide not to show a message on the display when the application is running with time critical user input, like a running game, a running video recording activity or the like. Operation S150 informs the user about said event according to the indication selected in operation S140. According to the present inventive step the phone may ring for instance but the game will be not interrupted and the user is now able to decide if he wants to respond or not. If the running application provides audio output like an MP3 player or a radio, a video or TV application, the phone or the portable device respectively may not ring but only vibrate and give an optical signal like a flashing background or keyboard illumination. Further, it is imaginable to inform the caller that the user has set the DDM mode on, for instance. It is also imaginable that the incoming events are accumulated in the background without noticing the user, so that after quitting or pausing the application the user is informed about the events by means of a list or the like.

With reference to fig. 2, a possible implementation in accordance with the present invention is depicted. Fig. 2 shows an options menu integrated in a certain application (game) which allows enabling of said DDM status or modus. The options menu is implemented as a graphical user interface (GUI) with a check button 21 adapted to switch on or off said DDM modus.

The mode can be activated/deactivated manually via the game menu or automatically when the user or the system (as in screensaver) puts another application to the foreground. Once, the DDM is deactivated (manually or automatically) the user will get the affected indications as in non-DDM, corresponding to the default behavior.

A list of possible actions which will deactivate the DDM, according to this example implementation is listed below: switching the game application to the background, ending the game, game crash, pausing the game. Other actions may be defined within the scope of the present invention.

The status of the DDM feature should be visible within the games option menu in the section where the user could enable/disable it, cf. fig. 2 check button 21). The status is clearly highlighted via a symbol or via words like (ON/OFF).

5

The active device profile settings are valid even if the DDM was set to active, wherein said device settings are generally phone-related (mobile device-related) settings. The device profile settings correspond to those settings which define the standard behavior of said device. Some examples of active device settings are the ringing tone loudness or vibration strength signaling an incoming call, for instance. These active device profile settings may sometimes interfere with the profile settings provided by means of the DDM mode. For instance, ringing tone rendering while running a game (or another API using sound), may be influenced by the sound settings within said API (game). Thus, a possible implementation of handling some above-mentioned conflicts is shown with reference to table 1.

15

Only for some special events the device will not behave accordingly to the active device profile settings. These exceptions are listed in the following table (table 1) and they describe a possible implementation as a non-restricting example. For instance, if the vibra-settings and the DDM are set, a system alert will not cause a vibra-procedure, according to a possible implementation in accordance with table 1. There is a lot of possible exception handling implementations within the scope of the present invention and table 1 just depicts an example.

20

Event	Game status	Vibra	Pop up menu	Game audio	Event indication audio
Incoming call indication phase	ACTIVE	KLS	OFF	OFF	KLS
Active call	PAUSED	KLS	ON	OFF	KLS
Alert (calendar & alarm clock) (for 3 sec)	ACTIVE	KLS	OFF	KLS	KLS

System alert	PAUSED	OFF	ON	OFF	ON
Incoming MMS	ACTIVE	OFF	OFF	KLS	OFF
Bluetooth message	ACTIVE	OFF	OFF	KLS	OFF
PoC message	ACTIVE	OFF	OFF	OFF	Voice message

Table 1

The contents of table 1 may be implemented as a list of settings in the DDM implementation of the device in a fixed way, or they can be configured by the application. In this way different applications could use different settings for the DDM. So, it may be favorable for an application in which optical information is prominent to have DDM settings that use acoustic indications in order not to interrupt the displayed optical information. An application in which audio information is prominent like an MP3 player or a radio, optical or vibrating indication of an event may be used in order not to interrupt the audio. In another embodiment the contents of table 1 may also be user configurable through a device menu and / or through an application menu. In the device menu the user could select those settings that are valid for all applications on the device, in the latter case the user could independently decide for each application which settings to use or override the device settings in case the application settings are in conflict with the device settings. If a conflict of device and application settings occurs, the application settings will be used, but only for this application.

Device settings will be stored in the device and will be applied to an application that uses the DDM mode according to the process described in fig. 1. Device settings may for example be stored in or associated with the device profiles.

Application settings will be stored in the device with an indication to which application they are associated and will be applied only to the associated application according to the process described in fig. 1.

Further, since an incoming MMS has high impact on the GPRS bandwidth and the processing power capabilities for the running game, the MMS must not be fetched while the DDM is active. According to the present invention the incoming MMS is just signaled to the user without downloading the message. This means that all available CPU performance is used for

the present application (game) without any sacrifices.

Another process which may have a negative impact on the CPU performance is for example the receiving of a PoC message. Because this feature require an active GPRS connection while PoC messages are sent or received it will have a similar impact on the bandwidth and the processing power like fetching a MMS, which is already discussed above. Similar to MMS the whole CPU power will be used for the application run in the foreground, in accordance with the present invention.

Also an incoming GSM call could have an impact to the game performance (game experience) while the DDM is activated especially at the beginning / end of the call indication phase. Additionally, a server connection might be interrupted or slowed down if other applications use the cellular data transfer, however this could also result in a slow down of online game play.

Further, the audio routing behavior within the DDM will remain the same like in the non-DDM mode which means that the game audio will be muted during the event indication phase and in the active call mode. Once the event indication phase or active call mode is finalized the game audio will be switched on again with the previously set sound level.

Table 2 indicates the status of the DDM when the mode is active and the user switches to a different state within the game.

Game state	DDM status
Paused (manually and automatically)	ON
Game focus set to the background (another application becomes the foreground)	OFF
Multiplayer game session	OFF
Restart of the game (DDM set to ON during the last game play session)	ON

Table 2

This means, for instance, that the DDM mode will be switched off when a user will set a multiplayer game session. If the focus is set to the background on the basis of an OS
5 operating said device the DDM mode is switched temporarily off as well. If said application is afterwards rerun in the foreground according to said OS, the DDM mode is switched on again, in accordance with the present invention.

In another embodiment of the present invention it is imaginable that settings concerning the
10 DDM mode are first controlled by the operating system (OS) of said mobile device. In a next step if the OS detects that the application is running in the foreground of the OS system and additionally the DDM mode is set (enabled) the OS will handover the indication control to the running application. However, the application is now able to decide if the DDM mode settings may be applied or not. For instance, the DDM mode will be active just if the user is
15 really playing the gaming application and not if said application is in another mode, like game options controlling or the like. Thereby only in an active mode the DDM mode may be enabled so that the user is able to play the game without any disturbance.

Further it is imaginable that single, certain parameters belonging to the DDM mode are
20 individually modifiable or adjustable by a user of said portable device. The parameters may be modified even on device level or on application level. The device level settings are then valid for all applications which use the DDM mode. The application level settings are valid for said application and they may be controlled by an application menu, for instance.

25 With reference to fig. 3 a possible software (SW) concept of the DDM mode in accordance with the present invention is depicted. Fig. 3 illustrates the basic SW concept for the DDM implementation which mainly bases on two API's, 400 and 402 and one server resided inside the core of the OS 406 (Symbian OS for instance).

30 The DDM-API 400 is enabled to provide a method to enable or disable the DDM mode, or generally said API 400 is controlling the DDM interface. The features-API 402 provides

methods to verify the device capabilities of the mobile device including the DDM feature.

The game 408 requires this information to decide whether to enable the DDM options menu or not. This API 402 may not be exclusively used for the DDM setting; it may also be used
5 for other API relevant features (not mentioned). A panic server 406 allows disabling the DDM once an unexpected device crash occurs or reset is executed.

The system application 404 is a key functionality based on the OS and it allows switching said application to the foreground or background and it handles therefore the activation or
10 deactivation of the DDM if the system application will switch off the game.

With reference to fig. 4, a mobile device 1 in accordance with the present invention is depicted. Said mobile device may be a mobile phone adapted for execute games or other multimedia applications, also called game deck. The CPU controls all components within
15 said mobile device 1. The component for detecting 40, determining 20 and inhibiting 10 in accordance with the present invention are connected to said CPU. Additionally the mobile device is equipped with a memory unit 50 adapted for storing different data and also with an I/O 30 module used by a user for inputting and receiving information.

20 The detecting component 40 may be implemented as transceiver which is able to receive incoming events by means of an antenna 66.

The following description in connection with the accompanying tables illustrates the behavior of a mobile device (game deck) mobile device in accordance with the present
25 invention opposite to a state of the art device (right side of the chart). A number of use cases are listed in the following. There are a lot of imaginable implementations describing the behavior of said mobile device within the scope of the present invention.

Table 3 shows one possibility of the initial settings of the mobile device, running a gaming
30 application. These settings are used as a basis for the possible use cases listed in the following tables 3 to 8. The left side of the tables represents the device behavior if the DDM mode is set in

accordance with the present invention, while the right side depicts the state of the art functionality.

Phase	DDM (ON)		DDM (OFF)	
Active game play	UI	Standard Game Window is displayed	UI	Standard Game Window is displayed
	Pop up	No	Pop up	No
	Game status	Active	Game status	Active
	Audio game	On	Audio game	On
	Event audio indication	Off	Event audio indication	Off
	Application focus	Game	Application focus	Game
	Comment	-	Comment	-

Table 3

5

The following table 4 explains the behavior of said mobile device while an incoming call is detected. In accordance with the inventive step of the present invention the gaming application is not inhibited by said incoming call.

Phase	DDM (ON)		DDM (OFF)	
Incoming call Indication	UI	Standard Game Window is displayed	UI	Incoming Call is indicated
	Pop up	No	Pop up	Yes
	Game status	Active	Game status	Paused
	Audio game	Off	Audio game	Off
	Event audio indication	On	Event audio indication	On

	Application focus	Game	Application focus	Call application
	Comment	-	Comment	-

Table 4

A similar behavior is achieved when a MMS message is received, but according to the present invention the MMS will be later fetched, because of conserving the CPU performance for the active application

Phase	DDM (ON)		DDM (OFF)	
Incomin g MMS	UI	Standard Game Window is displayed	UI	Retrieving of MMS is indicated, and; After approx. 2 seconds the game pause menu will be displayed.
	Pop up	No	Pop up	Yes
	Game status	Active	Game status	Paused
	Audio game	On	Audio game	Off
	Alert audio indication	Off	Alert audio indication	On
	Applic ation focus	Game	Applic ation focus	Game (pause menu)
	Com ment	As long as the DDM is active the MMS will not be fetched.	Com ment	Just after the indication the MMS will be fetched

Table 5

Another possible use case is the receiving of an incoming PoC event which is depicted in accordance with table 6.

Phase	DDM (ON)		DDM (OFF)	
Incoming PoC message	UI	Standard Game Window is displayed	UI	Incoming PoC is indicated
	Pop up	No	Pop up	Yes
	Game status	Active	Game status	Paused
	Audio game	Off	Audio game	Off
	Event audio indication	On	Event audio indication	On
	Application focus	Game	Application focus	Game (pause menu)
	Comment	The game audio will only be muted while the PoC message arrives.	Comment	The game will be paused just after the PoC message arrives. The user needs to resume the game afterwards.

5

Table 6

The mobile device behavior in accordance with the present invention is shown while a calendar / alarm clock alert occurs in accordance with the present invention (Table 7). As
10
aforementioned, the right side describes the state of the art behavior of said mobile device.

Further, low battery warnings or general system alerts may be handled within the scope of the present invention.

Phase	DDM (ON)		DDM (OFF)	
Incoming alert	UI	Standard Game Window is displayed	UI	Alert event is indicated, and; After pressing the 'Stop' or 'Snooze' button, the game pause menu will get the focus.
	Pop up	No	Pop up	Yes
	Game status	Active	Game status	Paused
	Audio game	Off	Audio game	Off
	Event audio indication	On, for 3 seconds	Event audio indication	On
	Application focus	Game	Application focus	Calendar / Alarm clock application
	Comment	Game audio will be muted only for 3 seconds	Comment	-

Table 7

Table 8 describes receiving of a Bluetooth message from a PC, for instance and it shows as a
5 non-restricting example in which manner said connecting request will be managed.

Phase	DDM (ON)		DDM (OFF)	
Connection request from PC	UI	Standard Game Window is displayed	UI	Connecting menu is indicated
	Pop up	No	Pop up	Yes
	Game status	Active	Game status	Paused
	Audio game	On	Audio game	Off
	Event audio indication	Off	Event audio indication	On

	Applica tion focus	Game	Applica tion focus	System
--	--------------------------	------	--------------------------	--------

Table 8

Even though the invention is described above with reference to embodiments according to the accompanying drawings, it is clear that the invention is not restricted thereto but it can be
5 modified in several ways within the scope of the appended claims.

Claims

1. Method for inhibiting interruption of a running application by an event according to a selected non-disturbance profile, said event occurring on a mobile device, comprising the steps of:
 - detecting an occurrence of said event;
 - determining if said non-disturbance profile has been set;
 - inhibiting interruption of said running application according to said determined non-disturbance profile.
2. Method according to claim 1, wherein said inhibiting is accompanied by a secondary indication without intermitting execution of said application if said non-disturbance profile is set.
3. Method according to anyone of the preceding claims, wherein a primary indication is provided if said non-disturbance profile is unset.
4. Method according to anyone of the preceding claims, wherein said non-disturbance profile is disabled if said application is run in the background on the basis of an operating system operating said mobile device.
5. Method according to anyone of the preceding claims, wherein said secondary indication is an audio, a vibrating or a visible indication provided by means of said mobile device.
6. Method according to anyone of the preceding claims, wherein said detected event is an external event.
7. Method according to claim 6, wherein said external event is an incoming short message (SMS), a multi media message (MMS), a Bluetooth-connection or a PoC-message or the like.

8. Method according to anyone of the preceding claims, wherein said detected event is an internal event.

5 9. Method according to claim 8, wherein said internal event is a general system alert, a clock alert, a low energy indication, a reminding task or the like.

10 10. Method according to anyone of the preceding claims, wherein said MMS is not fetched while said application is active and said non-disturbance profile is set.

11. Method according to anyone of the preceding claims, wherein said profile settings define parameters for operating said mobile device.

15 12. Method according to anyone of the preceding claims, wherein said operational parameters provide an automatic activation of said non-disturbance profile on the basis of time information.

20 13. Method according to anyone of the preceding claims, wherein said running application is a gaming application or a scanning application by means of a digital camera within said device.

25 14. Method according to anyone of the preceding claims, wherein said non-disturbance profile is set within said running application.

15. Method according to anyone of the preceding claims, wherein said non-disturbance profile is activated when said application is started.

30 16. Method according to anyone of the preceding claims, wherein said non-disturbance profile is passed through to general profile settings of said mobile device.

17. Method according to anyone of the preceding claims, wherein said non-disturbance profile is controlled by said general profile settings of said mobile device.
18. Method according to anyone of claims 2 – 17, wherein parameters of said non-disturbance profile that are used to determine said secondary indication are controlled by said mobile device for all applications.
19. Method according to claim 18, wherein a user can define said parameters of said non-disturbance profile.
20. Method according to anyone of claims 2 – 17, wherein parameters of said non-disturbance profile that are used to determine said secondary indication are controlled by said running application and only valid for said running application.
21. Method according to claim 20, wherein the user can define said parameters of said non-disturbance profile for said application.
22. A computer program product, comprising program code sections for carrying out the operations of anyone of the preceding claims, when said program is run on a processor-based device, a terminal device, a network device, a portable terminal, a consumer electronic device, or a mobile communication enabled terminal
23. A computer program product, comprising program code sections stored on a machine-readable medium for carrying out the operations of anyone of the preceding claims, when said program product is run on a processor-based device, a terminal device, a network device, a portable terminal, a consumer electronic device, or a mobile communication enabled terminal.
24. A software tool, comprising program portions for carrying out the operations of any one of the preceding claims, when said program is implemented in a computer program for being executed on a processor-based device, a terminal device, a network

device, a portable terminal, a consumer electronic device, or a mobile communication enabled terminal.

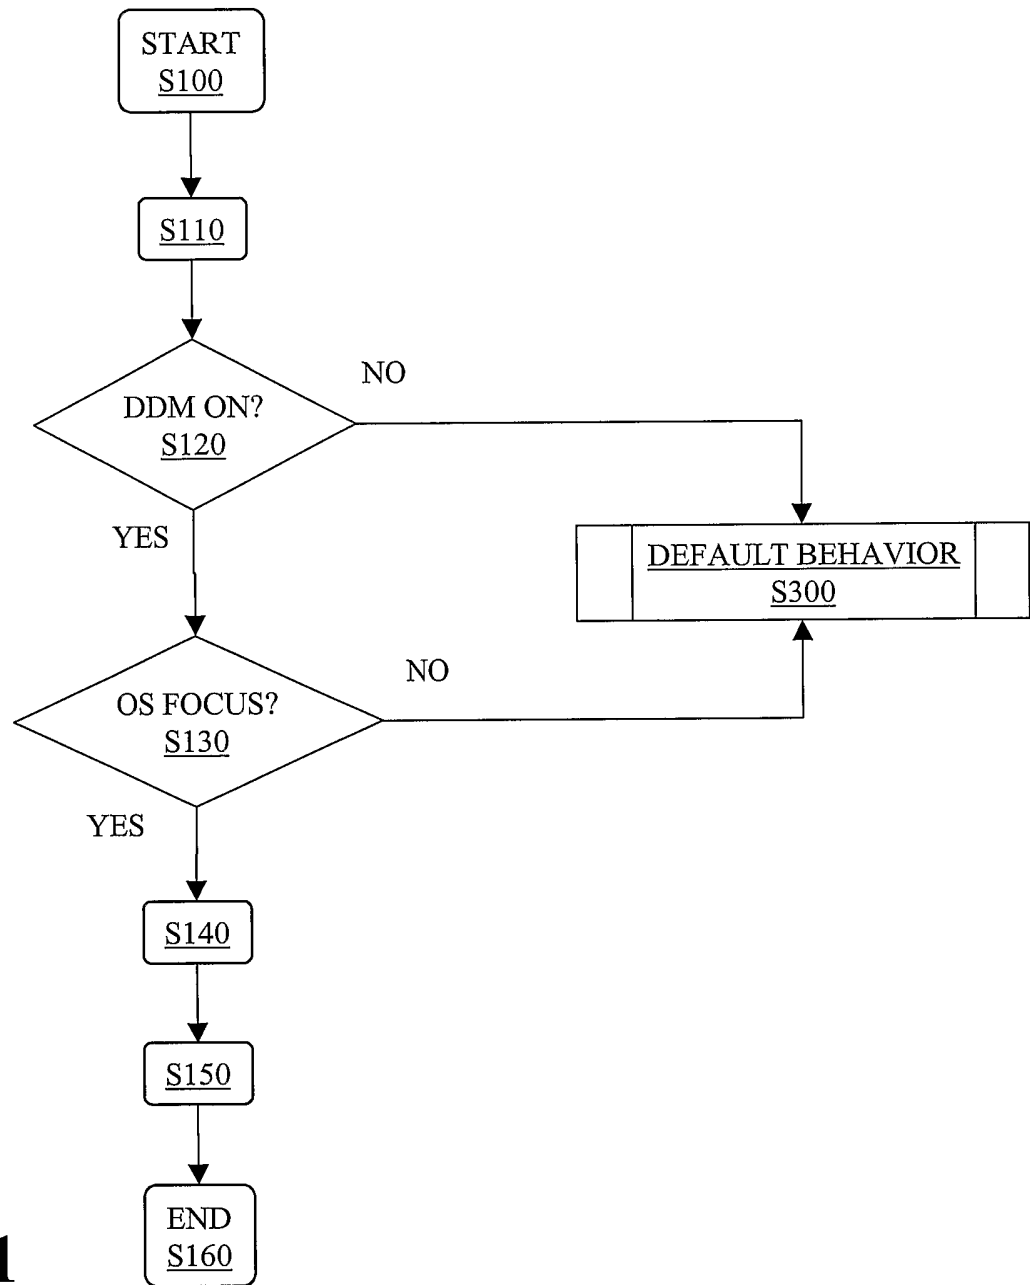
25. A computer data signal embodied in a carrier wave and representing instructions,
5 which when executed by a processor cause the operations of anyone of the preceding claims to be carried out.

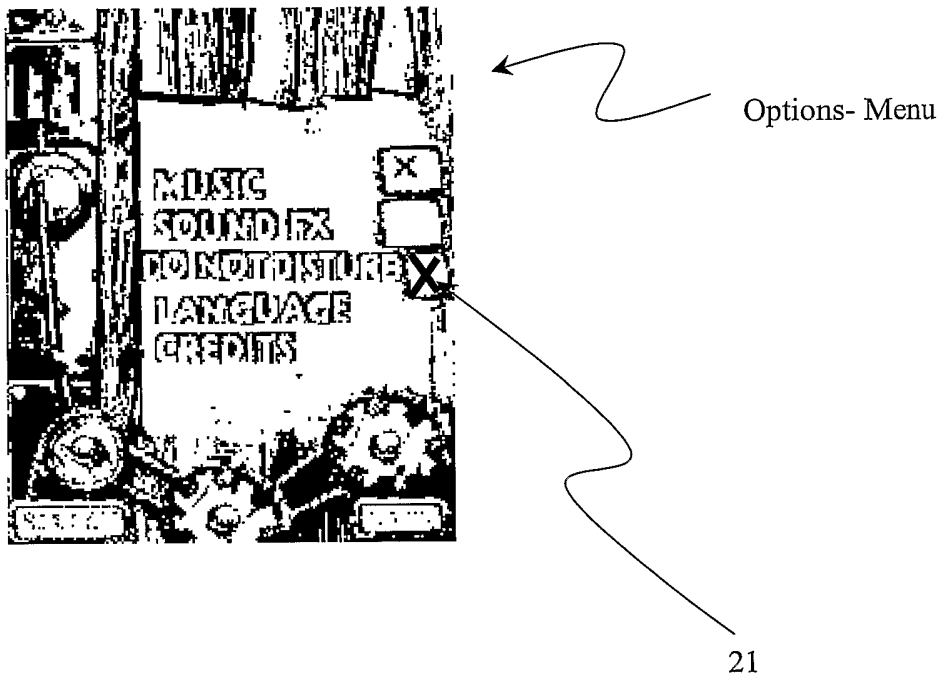
26. Mobile device adapted for inhibiting interruption of a running application by an event according to a selected non-disturbance profile, said event occurring on a mobile
10 device, comprising:

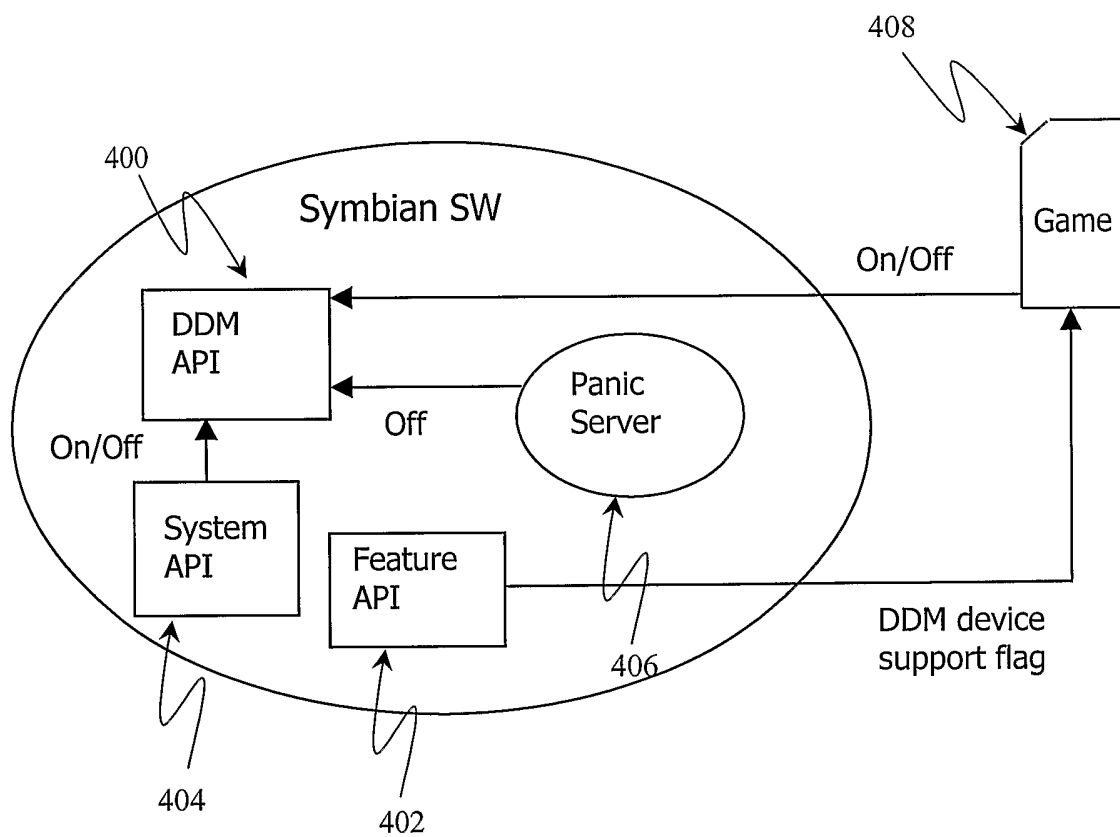
- component for detecting an occurrence of said event;
- component for determining if said non-disturbance profile has been set;
- component for inhibiting interruption of said running application according to said determined non-disturbance profile.

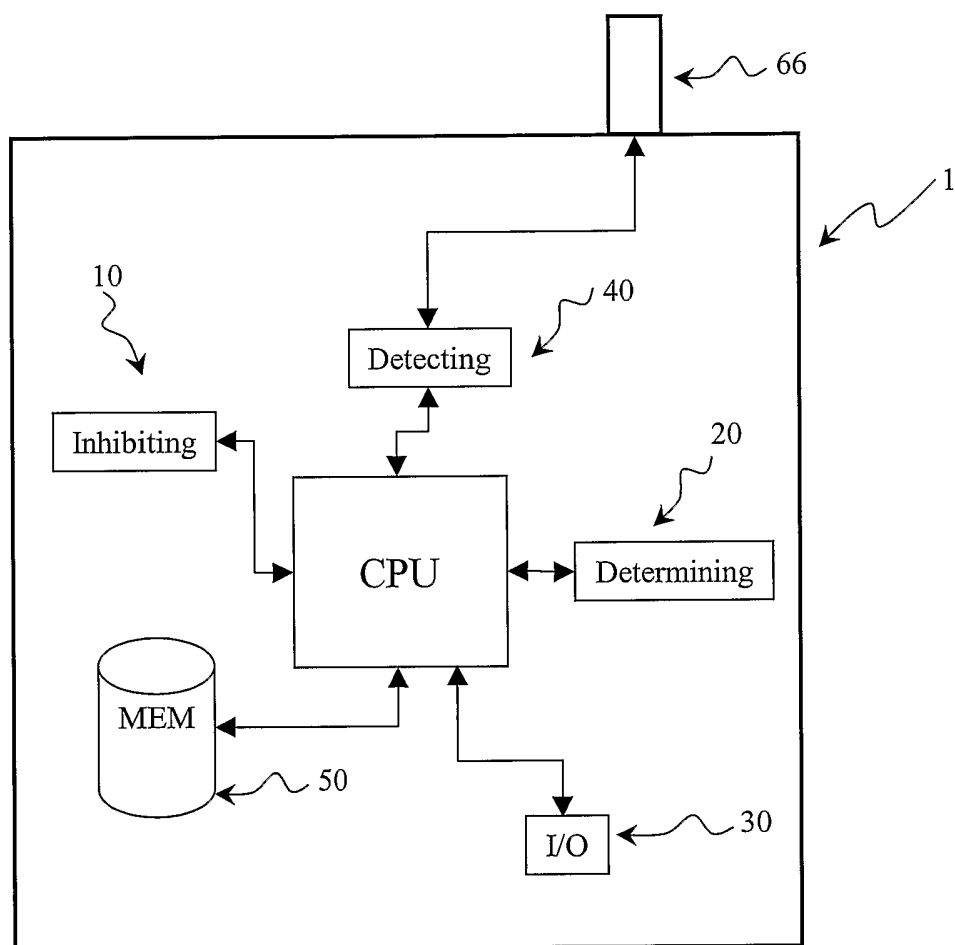
15 27. Mobile device according to claim 26, further comprising a central processing unit (CPU) adapted for controlling said components.

20 28. Mobile device according to claim 26, further comprising a memory unit and a data communication interface.

**Fig. 1**

**Fig. 2**

**Fig. 3**

**Fig. 4**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 2005/000224

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04M 1/663, H04M 1/247

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04M, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 20040121802 A1 (JIN-TAE KIM ET AL), 24 June 2004 (24.06.2004), section 0008-0011; claim 1; abstract --	1-28
X	WO 0191424 A1 (YAMAHA CORPORATION), 29 November 2001 (29.11.2001), figures 1-9, abstract --	1-28
A	GB 2396994 A (NOKIA CORPORATION), 7 July 2004 (07.07.2004), page 2, line 15 - line 31, claims 1-2, abstract --	1-28

☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 14 Sept 2005	Date of mailing of the international search report 15-09-2005
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer Nils Nordin/MP Telephone No. +46 8 782 25 00

SUBSTITUTE SHEET (RULE 26)

International application No.

PCT/IB 2005/000224

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 20020094839 A1 (SATOSHI OTSUKA), 18 July 2002 (18.07.2002), section 0004-0007; claims 1,45; abstract -- -----	1-28

INTERNATIONAL SEARCH REPORT

Information on patent family members

31/08/2005

International application No.

PCT/IB 2005/000224

US	20040121802	A1	24/06/2004	NONE		
WO	0191424	A1	29/11/2001	AU	5877201 A	03/12/2001
				JP	2001333153 A	30/11/2001
GB	2396994	A	07/07/2004	AU	2003303449 A	00/00/0000
				GB	0230295 D	00/00/0000
				WO	2004059965 A	15/07/2004
US	20020094839	A1	18/07/2002	JP	3626689 B	09/03/2005
				JP	2002218021 A	02/08/2002