



- (51) **International Patent Classification:**
A01J 5/00 (2006.01) *A01K 1/12* (2006.01)
- (21) **International Application Number:**
PCT/US2012/033892
- (22) **International Filing Date:**
17 April 2012 (17.04.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/095,983 28 April 2011 (28.04.2011) US
- (71) **Applicant (for all designated States except US):** **TECHNOLOGIES HOLDINGS CORP.** [US/US]; 3737 Wil-
lowick Road, Houston, TX 77019 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **HOFMAN, Henk**
[NL/NL]; Platterdijk 47, NL-8531 PC Lemmer (NL). **VAN
DER SLUIS, Peter, Willem** [NL/NL]; Kamperwetering
19, NL-8271 PP Ijsselmuiden (NL). **GROENSMA, Ype**
[NL/NL]; C. Van Schouwenlaan 25, NL-8441 CA Heeren-
veen (NL).
- (74) **Agent:** **BHAVSAR, Samir, A.**; Baker Botts L.L.P., 2001
Ross Avenue, Suite 600, Dallas, TX 75201 (US).
- (81) **Designated States (unless otherwise indicated, for every
kind of national protection available):** AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States (unless otherwise indicated, for every
kind of regional protection available):** ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the
earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) **Title:** MILKING BOX WITH ROBOTIC ATTACHER

(57) **Abstract:** In certain embodiments, a system includes a front wall (124a), a rear wall positioned (124c) substantially parallel to the front wall (124a), and first and second side walls (124b, 124d) each extending between the front wall (124a) and the rear wall (124c). The first side wall includes a gate, and the second side wall is spaced apart from the first side wall such that the front wall, the rear wall, the first side wall, and the second side wall define a milking box stall of a size sufficient to accommodate a dairy live-stock. The system includes an equipment portion (128) located adjacent to the rear wall. The equipment portion (128) houses a ro-botic attacher configured to extend between the rear legs of a dairy livestock located within the milking box stall (122) in order to at-tach milking equipment to the dairy livestock..



MILKING BOX WITH ROBOTIC ATTACHER

TECHNICAL FIELD

5 This invention relates generally to dairy farming and more particularly to a milking box with a robotic attacher.

BACKGROUND OF THE INVENTION

 Over time, the size and complexity of dairy milking operations has increased. Accordingly, the need for efficient and scalable systems and methods that support dairy milking operations has also increased. Systems and methods supporting dairy milking operations, however, have proven inadequate in various respects.

SUMMARY OF THE INVENTION

15 According to embodiments of the present disclosure, disadvantages and problems associated with previous systems supporting dairy milking operations may be reduced or eliminated.

 In certain embodiments, a system includes a front wall, a rear wall positioned substantially parallel to the front wall, and first and second side walls each extending between the front wall and the rear wall. The first side wall includes a gate, and the second side wall is spaced apart from the first side wall such that the front wall, the rear wall, the first side wall, and the second side wall define a milking box stall of a size sufficient to accommodate a dairy livestock. The system includes an equipment portion located adjacent to the rear wall. The equipment portion houses a robotic attacher configured to extend between the rear legs of a dairy livestock located within the milking box stall in order to attach milking equipment to the dairy livestock.

 Particular embodiments of the present disclosure may provide one or more technical advantages. For example, in certain embodiments, the system of the present disclosure includes a robotic attacher positioned to the rear of a milking box housing a dairy cow being milked rather than to the side of the milking box, as in certain conventional systems. The robotic attacher being positioned to the rear of a milking box may allow two milking boxes to be positioned side-by-side such that the robotic

attacher may attach milking equipment to dairy cows located in each of the milking boxes. As a result, the cost associated with the milking boxes may be less than that of certain conventional milking boxes, which may require a milking robot for each milking box. Additionally, the robotic attacher being positioned to the rear of a milking box may allow for gates to be positioned on each side of the milking box. As a result, a dairy cow may enter or exit the milking box on either side, allowing for increased sorting capabilities.

Certain embodiments of the present disclosure may include some, all, or none of the above advantages. One or more other technical advantages may be readily apparent to those skilled in the art from the figures, descriptions, and claims included herein.

BRIEF DESCRIPTION OF THE DRAWINGS

To provide a more complete understanding of the present invention and the features and advantages thereof, reference is made to the following description taken in conjunction with the accompanying drawings, in which:

FIGURES 1A-1B illustrate example configurations of an enclosure 100 in which one or more milking boxes are installed, according to certain embodiments of the present disclosure;

FIGURE 2 illustrates an example controller that may be used to control one or more components of the example milking box depicted in FIGURE 1, according to certain embodiments of the present disclosure;

FIGURE 3 illustrates a detailed perspective view of the example milking box depicted in FIGURE 1, according to certain embodiments of the present disclosure;

FIGURE 4 illustrates a detailed perspective view of the example robotic attacher depicted in FIGURE 3, according to certain embodiments of the present disclosure;

FIGURE 5 illustrates an example method for milking a dairy cow using the example milking box depicted in FIGURES 1-4, according to certain embodiments of the present disclosure; and

FIGURE 6 illustrates an example method for installation of the example milking box depicted in FIGURES 1-4, according to certain embodiments of the

present disclosure.

DETAILED DESCRIPTION OF THE DRAWINGS

FIGURES 1A-1B illustrate example configurations of an enclosure 100 in which one or more milking boxes 120 are installed, according to certain embodiments of the present disclosure. Enclosure 100 may be divided into a number of regions 110 (e.g., regions 110a and 110b), and each region 110 may include resting stalls, feeding troughs, walking paths, and/or other structure suitable for housing dairy livestock. Although the present disclosure contemplates enclosure 100 as housing any suitable dairy livestock (e.g., dairy cows, goats, sheep, water buffalo, etc.), the remainder of this description is detailed with respect to dairy cows.

Each milking box 120 may include a stall portion 122 configured to house a dairy cow being milked. The stall portion 122 of each milking box 120 may be defined by a number of walls 124, each of which may each be constructed from any suitable materials arranged in any suitable configuration operable to maintain a dairy cow within stall portion 122 during milking. In certain embodiments, stall portion 122 of milking box 120 may include walls 124a, 124b, 124c, and 124d. For purposes of illustration, wall 124a may be designated as the front of milking box 120 such that the head of a dairy cow being milked would be facing wall 124a. Wall 124c may be positioned opposite wall 124a and may be designated as the rear of milking box 120. Walls 124b and 124d may each form a side extending between the front and rear of milking box 120. Walls 124a, 124b, 124c, and 124d may be spaced apart a suitable distance to ensure the comfort of the dairy cow within stall portion 122.

Walls 124b and/or 124d may comprise one or more gates 126. In certain embodiments, wall 124b and/or wall 124d may comprise an entry gate 126a and an exit gate 126b. A dairy cow may enter milking box 120 through an opened entry gate 126a and exit milking box 120 through an opened exit gate 126b. Closing gates 126 may maintain the dairy cow within milking box 120 during milking, while opening one or more gates 126 may allow the dairy cow to exit milking box 120. In certain embodiments, gates 126 may each be coupled to a corresponding actuator such that the gates 126 may be automatically opened and/or closed. For example, the actuators corresponding to gates 126 may each be configured to communicate (e.g., via wireless

or wireline communication) with a controller 200, depicted in detail in FIGURE 2.

Controller 200 may include one or more computer systems at one or more locations. Examples of computer systems may include a personal computer, workstation, network computer, kiosk, wireless data port, personal data assistant (PDA), one or more processors within these or other devices, or any other suitable device for receiving, processing, storing, and communicating data. In short, controller 200 may include any suitable combination of software, firmware, and hardware. Controller 200 may include any appropriate interface 210 for receiving inputs and providing outputs, logic 220, one or more processing modules 230, and memory module 240. Logic 220 includes any information, logic, applications, rules, and/or instructions stored and/or executed by controller 200. Processing modules 230 may each include one or more microprocessors, controllers, or any other suitable computing devices or resources and may work, either alone or with other components, to provide a portion or all of the functionality described herein. Controller 200 may additionally include (or be communicatively coupled to via wireless or wireline communication) one or more memory modules 240. Memory modules 240 may be non-transitory and may each include any memory or database module. Memory modules 240 may take the form of volatile or non-volatile memory, including, without limitation, magnetic media, optical media, random access memory (RAM), read-only memory (ROM), removable media, or any other suitable local or remote memory component.

Returning to FIGURE 1, controller 200 may be operable to determine, using any appropriate logic in conjunction with signals received from other components of milking box 120 (e.g., presence sensor 132, gate sensors 134, and/or identification sensor 136, each of which is described with regard to FIGURE 3, below), which gates 126 should be open and/or closed. Controller 200 may then communicate signals to the actuators coupled to the determined gates 126, the signals causing the gates 126 to open or close. The automated control of gates 126 using controller 200 is described in further with regard to FIGURE 3, below

Each milking box 120 may additionally include an equipment portion 128 located to the rear of stall portion 122 (i.e., adjacent to rear wall 124c of stall portion 122). Equipment portion 128 may comprise any structure suitable for housing and/or

storing a robotic attacher (e.g., robotic attacher 150, described below with regard to FIGURE 3), one or more preparation cups, teat cups, receiver jars, separation containers, and/or any other suitable milking equipment. Rear wall 124c (which may include a backplane 138, as described below with regard to FIGURE 3) may separate stall portion 122 from equipment portion 128 such that equipment portion 128 is substantially inaccessible to a dairy cow located in stall portion 122. Accordingly a dairy cow located in stall portion 122 may be prevented from accidentally damaging the milking equipment by kicking, biting, trampling, or exposing the milking equipment to dirt, fluids, etc.

10 In certain embodiments, the equipment portion 128 being located to the rear of stall portion 122 may allow milking boxes 120 to be aligned in a single row such that walls 124b and 124d of each milking box 120 may comprise an entry gate 126a and an exit gate 126b (as illustrated in FIGURE 1A). As a result, milking boxes 120 may be used to sort dairy cows into particular regions 110 by controlling the opening/closing of each gate 126 (e.g., in response to signals from a controller 200, as described above). For example, a dairy cow needing a health check or medical attention may be sorted into an appropriate region 110 (e.g., a veterinary pen). As another example, a dairy cow determined to be finished milking for the year and needing to be dried off and bread may be sorted out of the milking heard. As yet another example, a dairy cow may be sorted into one of a number of regions 110 based on the stage of lactation of the dairy cow (as dairy cows in different stages may require different feeds).

25 In certain other embodiments, the equipment portion 128 being located to the rear of stall portion 122 may allow pairs of milking boxes 120 to be located side by side such that the milking boxes share a wall 124 (e.g., wall 124b may be shared between milking box 120c and milking box 120d, as depicted in FIGURE 1B). As a result, a single robotic attacher (e.g., robotic attacher 150, described below with regard to FIGURE 3) may be shared by the pair of milking boxes 120, which may reduce to cost of installing multiple milking boxes 120 in the enclosure 100.

30 FIGURE 3 illustrates a detailed perspective view of an example milking box 120, according to certain embodiments of the present disclosure. As described above with regard to FIGURE 1, milking box 120 may comprise a stall portion 122 (defined

by walls 124 and gates 126) and equipment portion 128 located to the rear of stall portion 122. In certain embodiments, stall portion 122 of milking box 120 may include a feed bowl 130, a presence sensor 132, one or more gate sensors 134, and an identification sensor 136. Additionally, one or more of feed bowl 130, presence
5 sensor 132, gate sensor(s) 134, and identification sensor 136 may be communicatively coupled to controller 200 (described above with regard to FIGURE 2).

In certain embodiments, feed bowl 130 may dispense feed in order to attract a dairy cow so that the dairy cow will enter milking box 120 voluntarily. Accordingly, at least one of the entry gates 126a may remain open when there is no dairy cow
10 present to allow a dairy cow to enter. Once the dairy cow has entered milking box 120, presence sensor 132 may detect the presence of the dairy cow. For example, presence sensor 132 may detect when the dairy cow has passed through the entrance gate 126a and/or when the dairy cow is generally centered in the stall portion 122. Upon detecting the presence of the dairy cow, presence sensor 132 may send a signal
15 to controller 200. In response to the signal, controller 200 may cause one or more actuators to close gates 126. Gate sensor 134 may determine when gates 126 have closed. Gate sensor 134 may communicate a signal to controller 200 upon determining that gates 126 have closed. Controller 200 may initiate a milking procedure in response to the signal.

20 In certain embodiments, identification sensor 136 may determine the identity of the dairy cow. As an example, identification sensor 136 may comprise an antenna operable to read a radio frequency identification (RFID) from an ear tag, a collar, or other identifier associated with the dairy cow. Once the dairy cow has been identified, the identification sensor 136 may optionally be turned off to prevent
25 wasting power and/or to minimize the dairy cow's exposure to radio waves.

Identification sensor 136 may communicate the identity of the dairy cow to controller 200 to facilitate retrieving information describing the dairy cow (e.g., from memory 240 or any other suitable location). Information describing the dairy cow may comprise historical data describing the particular dairy cow during a previous
30 time period, such as a previous milking cycle. The previous milking cycle may refer to a milking cycle in which milking equipment was manually attached (e.g., by a user) or a milking cycle in which milking equipment was automatically attached (e.g., by a

robotic attacher 150, described below). In certain embodiments, milking equipment may be attached manually the first time the dairy cow is milked in order to establish initial information describing the dairy cow, such as where the teats are located. The location of the dairy cow's teats may be described relative to a feature of the dairy
5 cow, such as relative to the rear of the dairy cow, the hind legs, and/or a portion of the dairy cow's udder, such as a mid-line of the udder or relative to one or more of the other teats. A robotic attacher (e.g., robotic attacher 150, described below) may use the information describing the location of the teats during subsequent milkings to facilitate automatically attaching the milking equipment.

10 Examples of historical data include measurements, statistics, health information, and any other information describing the dairy cow during a previous time period. Examples of measurements include the length of the dairy cow (e.g., from head to tail) and the location of the dairy cow's teats during a previous milking cycle. Examples of statistics may include statistics describing when the dairy cow
15 was last milked, the amount of milk produced in previous milking cycles, and so on. Examples of health information may include a designation not to milk the dairy cow due to a health problem or a designation to sort the dairy cow into a veterinary pen. In certain embodiments, a user may set an indicator in the database to indicate that the dairy cow should be sorted into the veterinary pen because the dairy cow is due for a
20 check-up or because the user noticed the dairy cow appears to be ill or injured.

 Controller 200 may use the information retrieved according to the identity of the dairy cow to determine how the particular dairy cow should be handled. If the information indicates the dairy cow should not be milked, controller 200 may cause an actuator to open one or more of the exit gates 126b. For example, if controller 200
25 determines that the dairy cow should be sorted into a particular region 110 of enclosure 100, such as a veterinary pen, it may cause the exit gate 126b that accesses the selected region 110 to open. Alternatively, controller 200 may cause multiple exit gates 126b to open if the dairy cow is to be given the option of which region 110 to occupy upon exiting milking box 120. In certain embodiments, a prod may be used to
30 encourage the dairy cow to exit. Examples of prods include a noise, a mechanical device, or a mild electric shock.

Upon a determination that the dairy cow should be milked, controller 200 may continue the milking procedure. In certain embodiments, controller 200 may cause a dispenser to drop feed into feed bowl 130. Additionally, controller 200 may cause feed bowl 130 to move toward the dairy cow in order to encourage the dairy cow to move to a pre-determined part of stall portion 122. As an example, feed bowl 130 may be initially positioned in the front of stall portion 122 when the dairy cow enters. Feed bowl 130 may then move back toward the dairy cow to encourage the dairy cow to move to the rear of stall portion 122 (e.g., against backplane 138, described below) in order to facilitate attaching the milking equipment to the dairy cow. To ensure feed bowl 130 does not crowd the dairy cow, the amount of movement of feed bowl 130 may be customized to the size of the dairy cow. For example, a user may determine an appropriate location for feed bowl 130 the first time the dairy cow enters milking box 120. The location may be stored (e.g., in memory module 240 of controller 200) such that it may be retrieved during subsequent milkings according to the identity of the dairy cow. Alternatively, the feed bowl 130 may be configured to continue moving toward the rear of the stall portion 122 until the dairy cow contacts backplane 138 (described below), which may indicate that the dairy cow is positioned in a location that is suitable for attaching the milking equipment.

In certain embodiments, rear wall 124c of stall portion 122 includes a backplane 138. Backplane 138 may comprise any suitable configuration of materials suitable for locating the rear of the dairy cow in order to facilitate the efficient attachment of the milking equipment. In certain embodiments, the dairy cow may be backed toward backplane 138 by moving feed bowl 130 as described above. In certain other embodiments, backplane 138 may be moved forward toward the dairy cow. In certain other embodiments, a combination of backing the dairy cow toward backplane 138 and moving backplane 138 forward toward the dairy cow may be used. It may be determined that the rear of the dairy cow has been located when a portion of backplane 138, such as a pipe or bracket, touches the rear of the dairy cow at any suitable location, such as approximately mid-flank (i.e., between the udder and the tail). Backplane 138 may additionally include a manure gutter for directing manure toward a side of stall portion 122 (e.g., away from the dairy cow's udder and the milking equipment).

In certain embodiments, stall portion 122 may additionally include a waste grate 140 for disposing of waste. Waste grate 140 may have a rough surface to discourage the dairy cow from standing on it. In addition, waste grate 140 may be dimensioned such that when the dairy cow's hind legs are positioned on opposite
5 sides of waste grate 140, the hind legs are separated to facilitate attachment of the milking equipment to the dairy cow's teats.

In certain embodiments, equipment portion 128 of milking box 120 may include a robotic attacher 150, one or more preparation cups 166, teat cups 168, pumps 170, receiver jars 172, milk separation containers 174, and/or any other
10 suitable milking equipment. In certain embodiments, robotic attacher 150 may be suspended into equipment portion 128 from a rail 160. Rail 160 may be generally located above the level of the udder of a dairy cow located in stall portion 122 such that the teats of the dairy cow may be accessible to robotic attacher 150 when suspended from rail 160. For example, rail 160 may extend across the top of
15 equipment portion 128 of milking box 120 and may be oriented substantially parallel to rear wall 124c.

Robotic attacher 150 may be communicatively coupled to controller 200 (e.g., via a network facilitating wireless or wireline communication). Controller 200 may cause robotic attacher to attach certain milking equipment to the dairy cow's teats.
20 For example, in certain embodiments, robotic attacher 150 may access a storage area 164 to retrieve preparation cups 166 and/or teat cups 168. Preparation cups 166 may be adapted to clean the teats, stimulate the flow of milk, and discard fore milk from the teat (e.g., the first few millimeters of milk that may be dirty). Teat cups 168 may be adapted to extract milk from the dairy cow. Preparation cups 166 and/or teat cups
25 168 attached to extendable hoses may be hung within storage area 164 between milkings to protect the cups from manure and flies. When it is time to milk the dairy cow, robotic attacher 150 may pull preparation cups 166 from storage area 164 and attach them to the dairy cow one at a time, two at a time, or four at a time. After the teats have been prepared, preparation cups 166 may be removed and teat cups 168
30 may be attached one at a time, two at a time, or four at a time. Once the cups are attached, robotic attacher 150 may withdraw to prevent the dairy cow from causing

accidental damage to the equipment, and the system may proceed with milking the dairy cow.

During milking, pump 170 may pump good milk from teat cup 168 to receiver jar 172 to be stored at a cool temperature. Pump 170 may pump bad milk to milk separation container 174 to be discarded. Milk may be determined to be bad based on testing the milk and/or based on the particular dairy cow from which the milk has been extracted. For example, information retrieved from a database according to the dairy cow's identifier may indicate that the milk should be discarded because the dairy cow is ill or has recently calved.

10 In certain embodiments, robotic attacher 150 comprises a main arm 152, a supplemental arm 154, a gripping portion 156, and a vision system 158. In certain embodiments, the movement of main arm 152, supplemental arm 154, and gripping portion 156 may be varied in response to signals received from controller 200 (as described in further detail in FIGURE 4 below). Although the components of robotic attacher 150 are depicted and primarily described as oriented in a particular manner, the present disclosure contemplates the components having any suitable orientation, according to particular needs.

20 In order to obtain access to the dairy cow's teats, main arm 152, supplemental arm 154, and gripping portion 156 may work together to facilitate movement in three dimensions, for example, according to an x-axis, a y-axis, and a z-axis. As illustrated, the x-axis extends in the direction of the dairy cow's length (e.g., from head-to-tail), the y-axis extends in the direction of the dairy cow's height, and the z-axis extends in the direction of the dairy cow's width.

25 Main arm 152 may comprise a vertical arm movably coupled to rail 160. For example, a hydraulic cylinder may movably couple main arm 152 to rail 160. Main arm 152 may traverse rail 160 to facilitate movement of robotic attacher 150 along the z-axis. Accordingly, rail 160 may comprise a track and rollers adapted to support the weight of robotic attacher 150 and to facilitate movement of main arm 152 back-and-forth along rail 160. To prevent wires and hoses from interfering with the movement of main arm 152 along rail 160, guides 162 may be used to loosely hold the wires and hoses in place. For example, guides 162 may comprise U-shaped brackets that allow the wires and hoses to extend a sufficient amount to accommodate movements of

30

main arm 152, but prevent the wires and hoses from dangling in the path of main arm 152.

Main arm 152 attaches to supplemental arm 154. Supplemental arm 154 facilitates movements in any direction. That is, supplemental arm 154 moves in-and-out along the x-axis, up-and-down along the y-axis, and/or from side-to-side along the z-axis. Accordingly, supplemental arm may extend between the rear legs of the dairy cow located within stall portion 122 in order to attach milking equipment to the dairy cow. Supplemental arm 154 may comprise gripping portion 156. Gripping portion 156 may grip a preparation cup 166 or a teat cup 168 for attachment to the dairy cow's teat. Gripping portion 156 may comprise a wrist adapted to perform fine movements, such as pivot and tilt movements, to navigate around the dairy cow's legs and to access the dairy cow's teats. To determine the location of the dairy cow's legs and teats, robotic attacher 150 may use vision system 158. An example embodiment of vision system 158 is described with respect to FIGURE 4 below.

FIGURE 4 illustrates a detailed perspective view of an example of robotic attacher 150, according to certain embodiments of the present disclosure. Robotic attacher 150 may include a main arm 152, a supplemental arm 154, a gripping portion 156, and a vision system 158. As described with respect to FIGURE 3, robotic attacher 150 may be communicatively coupled to controller 200. Controller 200 may cause robotic attacher to retrieve a cup, such as preparation cup 166 or teat cup 168, move the cup toward a teat of a dairy cow within milking box 120, and attach the cup to the teat.

In general, the teats of the dairy cow may be relatively less visible when looking at the dairy cow from the rear and relatively more visible when looking at the dairy cow from the side. Vision system 158 may facilitate locating the teats from a position to the rear of the dairy cow. Vision system 158 may include multiple cameras, such as a first camera 158a and a second camera 158b. In certain embodiments, cameras 158a, 158b may be coupled to robotic attacher 150 and may be positioned at any suitable location along main arm 152 or supplemental arm 154. As an example, second camera 158b may be coupled to gripping portion 156 of supplemental arm 154 at a location proximate to the part of gripping portion 156

adapted to hold a teat cup, and first camera 158a may be coupled to supplemental arm 154 at a location between second camera 158b and main arm 152.

In operation, controller 200 may access a first image 176 generated by first camera 158a (e.g., from memory module 240) and use first image 176 to determine, using any suitable logic 220, a reference point 178 proximate to the udder, which may then be stored (e.g., in memory module 240). The reference point 178 may be defined relative to certain features of the dairy cow, such as the hind legs and/or the udder. Controller 200 may send a signal to robotic attacher 150 causing robotic attacher 150 to position second camera 158b relative to the reference point 178. Accordingly, second camera 158b may have a consistent point of reference from one milking cycle to the next, which may allow the teats to be located efficiently. Controller 200 may access a second image 180 generated by second camera 158b (e.g., from memory module 240) in order to determine, using any suitable logic 220, a location of a teat.

In certain embodiments, first camera 158a may comprise a three-dimensional camera adapted to generate a first image 176 depicting the rear of the dairy cow, including the hind legs and the udder. Using a three-dimensional camera may facilitate generating a relatively complete image of the rear of the dairy cow within approximately a couple of seconds (e.g., one second), which may be faster than the amount of time it would take for a two-dimensional camera to generate a similar image. In certain embodiments, second camera 158b may comprise a two-dimensional camera adapted to generate a second image 180 depicting at least a portion of the udder to facilitate locating the teats. Second camera 158b may facilitate locating the end of each teat with a relatively high degree of accuracy, such as within a few millimeters. The location of the teat may be used to instruct robotic attacher 150 where to attach the milking equipment.

First camera 158a may begin generating the first image 176 in response to a signal from controller 200 indicating that the dairy cow is positioned proximate to the milking equipment. As an example, the signal may indicate that the rear of the dairy cow has been detected by the backplane 138 of the milking box 120. First camera 158a may begin generating the first image 176 from a starting point and may update the first image 176 in real-time as robotic attacher 150 approaches the dairy cow. The starting point may be determined according to a default position of robotic attacher

150 (e.g., a position determined relative to milking stall 122). Thus, the starting point may be determined without the use of historical data associated with the particular dairy cow being milked. First camera 158a may communicate the first image 176 to controller 200, and controller 200 may use the image to locate main features of the dairy cow, such as the right hind leg, the left hind leg, the udder, and/or the tail.

Controller 200 may determine the reference point 178 based on the location of the main features of the dairy cow. The reference point 178 may be defined relative to certain features of the dairy cow, such as the hind legs and/or the udder. As an example, the reference point 178 may be defined between the hind legs and/or below the udder. For example, in certain embodiments, the reference point 178 may be located proximate to a mid-point of the udder. The mid-point of the udder may refer to a point generally located between the front teats and the rear teats in the x-direction and/or between the left teats and the right teats in the z-direction. In certain embodiments, the mid-point of the udder may be estimated prior to determining the precise location of the teats, for example, according to the general size and location of the udder. The reference point 178 may be spaced apart from the dairy cow in the y-direction to minimize the likelihood that second camera 158b touches the dairy cow. For example, the reference point 178 may be located a few inches below the mid-point of the udder.

Controller 200 may communicate the reference point 178 and/or information describing the main features of the dairy cow to robotic attacher 150. The reference point 178 may be used to position second camera 158b. The information describing the main features of the dairy cow may be used to prevent robotic attacher 150 from colliding with the dairy cow when navigating second camera 158b toward the reference point 178. Information describing the main features of the dairy cow may include the position of the hind legs, the space between the hind legs, the position of the udder, the height of the udder, the position of the tail, and/or other information. Once robotic attacher 150 has positioned second camera 158b relative to the reference point 178, second camera 158b may begin scanning the udder.

In certain embodiments, second camera 158b may determine where to look for one or more of the teats according to historical data. The historical data may be received from controller 200 and may describe a previously-determined location of

the teats relative to the reference point 178. The previously-determined location may be based on the location of the teats during one or more previous milking cycles. As an example, the previously-determined location may comprise the location of the teats during the most recent milking cycle. As another example, the previously-determined location may comprise an average of the locations of the teats during a number of previous milking cycles. As another example, the previously-determined location may comprise the location of the teats during a previous milking cycle in which the udder was likely to be as full of milk as the current milking cycle. For example, if eight hours have elapsed since the dairy cow was last milked, the previously-determined location may be determined from a previous milking cycle in which the dairy cow had not been milked for approximately eight hours. Referring to historical data may minimize the area that second camera 158b must scan in order to locate the teat and may reduce the amount of time required to locate the teat.

Second camera 158b may communicate the second image 180 to controller 200, and controller 200 may access the second image 180 to locate the teats of the dairy cow. As described above, in certain embodiments, second camera 158b may comprise a two-dimensional camera, such as a horizontal laser. If the horizontal laser may scan a portion of the udder other than the teats (e.g., a relatively even surface of the udder), the scan communicated to controller 200 may generally resemble a substantially solid line. If the horizontal laser scans a portion of the udder that includes the teats, the scan communicated to controller 200 may generally resemble a broken line depicting the teats and the spaces between the teats. As an example, controller 200 may determine that a teat has been located if the scan comprises a broken line in which a solid portion of the line generally corresponds to the width of a teat and the broken portions of the line generally correspond to the proportions of the space between teats.

In certain embodiments, robotic attacher 150 may further comprise a nozzle 182. Nozzle 182 may be coupled to gripping portion 156. Nozzle 182 may spray disinfectant on the teats of the dairy cow at the end of a milking cycle, that is, after the dairy cow has been milked and the teat cups have been removed. The disinfectant may be sprayed to prevent mastitis or other inflammation or infection. In certain embodiments, gripping portion may be operable to rotate 180° around the x-axis.

During milking, second camera 158b may be generally oriented on top of gripping portion 156, and nozzle 182 may be generally oriented underneath gripping portion 156 (i.e., opposite second camera 158b). Orienting nozzle 182 underneath gripping portion 156 during milking may prevent milk or other contaminants from accessing nozzle 182. Once the milking has been completed, gripping portion 156 may rotate such that nozzle 182 may be generally oriented on top of gripping portion 156, and second camera 158b may be generally oriented underneath gripping portion 156. Orienting nozzle 182 on top of gripping portion 156 after milking may facilitate spraying the teats with disinfectant from nozzle 182.

FIGURE 5 illustrates an example method 500 for milking a dairy cow using the example milking box 120 depicted in FIGURES 1-4, according to certain embodiments of the present disclosure. In certain embodiments, milking box 120 may be positioned within enclosure 100, and at least one of the gates 126 of stall portion 122 may be opened to allow the dairy cow to voluntarily enter milking box 120. At step 502, presence sensor 132 detects the presence of the dairy cow. Presence sensor 132 communicates a signal to controller 200 indicating the presence of the dairy cow has been detected. Controller 200 sends a signal to an actuator causing gates 126 to close at step 504. Thus, the dairy cow is prevented from exiting the milking box. Gate closed sensor 134 determines that the gates are closed and communicates a gate-closed signal to controller 200. In response to the gate-closed signal, controller 200 causes the milking procedure to proceed to the next step. For example, controller 200 sends a signal requesting identification sensor 136 to provide an identifier associated with the dairy cow.

At step 506, identification sensor 136 reads an ear tag, collar, or other identifier (e.g., an RFID signal) associated with the dairy cow. Identification sensor 136 communicates the identifier to controller 200 to facilitate determining the identity of the cow. At step 508, controller 200 retrieves information associated with the particular dairy cow according to the determined identity of the dairy cow. For example, information may be retrieved from memory 240. Controller 200 determines whether to proceed with milking the dairy cow at step 510. The determination may be made according to the information associated with the dairy cow. For example, if the information indicates that the dairy cow is ill or that the dairy cow has already been

5 milked in the current milking cycle, a determination may be made not to proceed with milking the dairy cow. Alternatively, if the information indicates that the dairy cow is healthy and that it is time to milk the dairy cow, a determination may be made to proceed with milking the dairy cow. If the dairy cow is to be milked, the method continues to step 512. If the dairy cow is not to be milked, the method skips to step 548.

10 At step 512, controller 200 causes a dispenser to drop feed into feed bowl 130 and positions feed bowl 130. In certain embodiments, feed bowl 130 may move toward the rear of the stall to encourage the dairy cow to back-up toward the milking equipment. Controller 200 determines that the dairy cow is positioned near the milking equipment at step 514. For example, a signal received from backplane 138 of milking box 120 may be used to determine that the dairy cow is positioned near the milking equipment. The signal may indicate when the rear of the dairy cow touches a portion of backplane 138. Upon determining the dairy cow is positioned near the milking equipment (e.g., toward the rear of the stall portion of the milking box),
15 controller 200 instructs first camera 158a to generate a first image 176 of the rear of the dairy cow at step 516. In certain embodiments, first camera 158a may be positioned on robotic attacher 150, and first camera 158a may begin generating the first image 176 in-flight, that is, as robotic attacher 150 retrieves a preparation cup
20 166 or teat cup 168 from storage and begins moving the cup toward the udder. At step 518, controller 200 receives the first image 176. The first image 176 includes main features of the dairy cow, such as the hind legs, the udder, and/or the tail. Controller 200 accesses the first image 176 to determine a reference point 178 at step 520. As an example, the reference point 178 may comprise a point between the dairy
25 cow's hind legs, a point below the dairy cow's udder, and/or a point proximate to a mid-point of the udder. The mid-point may refer to a point between a first teat and a second teat (e.g., between a left teat and a right teat and/or between a front teat and a rear teat).

30 At step 522, controller 200 sends a signal causing robotic attacher 150 to position second camera 158b relative the reference point 178. Controller 200 communicates historical data to second camera 158b at step 524. The historical data may comprise data retrieved from a database that indicates a previously-determined

location of the teats during a previous milking cycle. The previously-determined location may be described relative to the reference point 178. The method proceeds to step 526 where controller 200 sends a signal causing second camera 158b to generate a second image 180. Second camera 158b may generate the second image 180 by scanning a portion of the udder indicated by the historical data. Second camera 158b may scan the whole teat to facilitate identifying the angle of the teat and the point attachment. At step 528, the controller 200 receives the second image 180 from the second camera. Controller 200 accesses the second image 180 to determine the location of the teats at step 530. The teats may be located in any suitable manner, such as one at a time, two at a time, or four at a time.

Upon determining the location of the teats, controller 200 causes robotic attacher 150 to attach one or more preparation cups 166 at step 532. Second camera 158b may continue to scan the teat while the preparation cup is being attached. Continuing to scan the teat may allow for efficient attachment of the preparation cup. In addition, continuing to scan the teat may allow the preparation cup to be attached at a suitable angle, with the mouthpiece centered on the teat, to prevent folding the teat into the preparation cup. Vacuum pressure may be used to hold the preparation cups in place. Preparation cup 166 facilitates preparing the teat at step 534. Preparation may include cleaning the teat, stimulating the flow of milk, and discarding fore milk from the teat. After each of the teats have been prepared, preparation cups 166 may be removed at step 536. For example, the vacuum pressure may be released to remove the preparation cups and the preparation cups may be returned to the storage area.

The method continues to step 538, where controller 200 causes robotic attacher 150 to attach a teat cup 168. For example, teat cup 168 may be retrieved from storage area 164 and navigated to the teat. Second camera 158b may continue to scan the teat while the teat cup 168 is being attached to ensure proper placement of the teat cups. Vacuum pressure may be used to attach the teat cup 168. A sensor may be used to determine the vacuum pressure associated with each teat cup 168. If the vacuum level is low, it may indicate that teat cup 168 has fallen off and needs to be reattached. In certain embodiments, additional teat cups 168 may be attached by reperforming steps 522-530 to locate additional teats.

Once teat cups 168 have been attached to all four teats, robotic attacher 150 may retract and the method may proceed to step 540 to extract milk from the dairy cow. As an example, milk may be extracted by applying pulsation to the teat cup. A sensor may monitor the flow of milk. If the flow becomes low, it may be determined whether teat cup 168 should be removed or reattached. For example, if teat cup 168 has been attached for at least approximately one-and-a-half minutes and/or the amount of milk extracted is consistent with previous milking cycles, it may be determined that teat cup 168 should be removed, otherwise, it may be determined that teat cup 168 should be reattached. When it is determined that teat cup 168 should be removed, controller 200 initiates step 542 to remove teat cups 168. For example, controller 200 may send a signal causing the vacuum pressure to be released to allow teat cups 168 to drop from the teats. Teat cups 168 may be returned to storage area 164 by retracting hoses attached to teat cups 168 or by any other suitable method. Controller 200 then sends a signal to robotic attacher 150 to cause gripping portion 156 to rotate at step 544 in order to orient nozzle 182 toward the teat. The method applies disinfectant to the teat at step 546 by spraying the disinfectant through nozzle 182.

At step 548, controller 200 determines which gate(s) 126 to open. Selectively opening gates 126 may allow the dairy cow to be sorted into a particular region 110 of enclosure 100. The dairy cow may be sorted if its milk tested bad, if it failed to produce a sufficient amount of milk, if information retrieved from a database indicates the dairy cow should be sorted, or for other suitable reasons. Controller 200 sends a signal causing an actuator to open the selected gate(s) at step 550. In certain embodiments, a prod may be used to encourage the dairy cow to exit the milking box. The dairy cow exits the milking box and the method ends.

FIGURE 6 illustrates an example method 600 for installation of milking box 120, according to certain embodiments of the present disclosure. The method may begin by positioning walls 124 in order to define stall portion 122. For example, the method positions a front wall 124a at step 602. The method proceeds to step 604 where a rear wall 124c is positioned substantially parallel to front wall 124a. Rear wall 124c may be spaced apart from front wall 124a a suitable distance to accommodate a dairy cow. At step 606, a first side wall 124b is positioned to extend

between front wall 124a and rear wall 124c. The first side wall may include one or more gates, such as an entry gate 126a and an exit gate 126b. The method proceeds to step 608 to position a second side wall 124d to extend between front wall 124a and rear wall 124c. Second side wall 124d may be spaced apart from first side wall 124d in order to accommodate a dairy livestock within stall portion 122. Second side wall 124d may or may not include gates 126. For example, in certain embodiments, second side wall 124d may comprise a second entry gate 126a and a second exit gate 126b. In alternative embodiments, second side wall 124d may be positioned adjacent a second milking box and may define a boundary between milking box 120 and the adjacent milking box. In step 610, an equipment portion 128 is positioned to the rear of milking box 120, adjacent rear wall 124c. Rear wall 124c may comprise a backplane 138 adapted to physically contact a mid-flank portion of the dairy livestock when the dairy livestock is positioned proximate to equipment portion 128 of milking box 120.

At step 612, a movable feed bowl 130 may be positioned within milking box 120. Movable feed bowl 130 may be adapted to move from the front of milking box 120 toward the rear of milking box 120 to encourage the dairy livestock to back-up toward backplane 138. The method may proceed to step 614 to install a plurality of sensors within milking box 120. Examples of sensors include a presence sensor 132 adapted to detect the presence of the dairy livestock within milking box 120, one or more gate closed sensors 134 to detect whether gates 126 are closed, and a livestock identification sensor 136 adapted to determine the identity of the dairy livestock present within milking box 120. At step 616, a waste grate 140 may be positioned within milking box 120.

The method may proceed to step 618 to position a rail 160. Rail 160 may be positioned to extend in a horizontal direction substantially parallel to rear wall 124c. For example, the horizontal direction may refer to the z-axis illustrated in FIGURE 3. In certain embodiments, rail 160 may be positioned proximate to rear wall 124c. At step 620, a robotic attacher 150 may be positioned in milking box 120. Robotic attacher may comprise a main arm 152, a supplemental arm 154, including a gripping portion 156, and a vision system 158. In certain embodiments, robotic attacher 150 may be positioned in equipment portion 128 of milking box 120 by suspending main

arm 152 from rail 160. Accordingly, main arm 152 may be operable to traverse rail 160 in the horizontal direction. In certain embodiments, one or more guides 162 may be positioned proximate to rail 160. Guides 162 may be adapted to guide the path of hoses and wires connected to robotic attacher 150 to prevent the hoses and wires from interfering with the movement of main arm 152 along rail 160. Supplemental arm 154 may be positioned to facilitate selectively extending supplemental arm 154 between the rear legs of the dairy livestock located within stall portion 122.

The method proceeds to step 622 to position other milking equipment in equipment portion 128 of milking box 120. Other milking equipment may include one or more preparation cups 164, teat cups 168, pumps 170, milk receiver jars 172, and/or milk separation containers 174. The method then ends.

Modifications, additions, or omissions may be made to the systems described herein without departing from the scope of the invention. The components may be integrated or separated. Moreover, the operations may be performed by more, fewer, or other components. Additionally, the operations may be performed using any suitable logic comprising software, hardware, and/or other logic. As used in this document, "each" refers to each member of a set or each member of a subset of a set.

Modifications, additions, or omissions may be made to the methods described herein without departing from the scope of the invention. For example, the steps may be combined, modified, or deleted where appropriate, and additional steps may be added. Additionally, the steps may be performed in any suitable order without departing from the scope of the present disclosure.

Although the present invention has been described with several embodiments, diverse changes, substitutions, variations, alterations, and modifications may be suggested to one skilled in the art, and it is intended that the invention encompass all such changes, substitutions, variations, alterations, and modifications as fall within the spirit and scope of the appended claims.

What is claimed is:

1. A system, comprising:
a front wall;
5 a rear wall positioned opposite the front wall;
a first side wall extending between the front wall and the rear wall, the first
side wall including a first gate;
a second side wall extending between the front wall and the rear wall, the
second side wall spaced apart from the first side wall such that the front wall, the rear
10 wall, the first side wall, and the second side wall define a milking box stall of a size
sufficient to accommodate a dairy livestock; and
an equipment portion located adjacent to the rear wall, the equipment portion
housing a robotic attacher configured to extend between the rear legs of a dairy
livestock located within the milking box stall in order to attach milking equipment to
15 the dairy livestock.
2. The system Claim 1, wherein the first side wall further comprises a
second gate.
- 20 3. The system of Claim 2, wherein the second side wall comprises a third
gate and a fourth gate.
4. The system of Claim 1, wherein the second side wall defines a
boundary between the milking box stall and an adjacent milking box stall.

5. The system of Claim 1, wherein:
the second side wall defines a boundary between the milking box stall and an adjacent milking box stall; and
the robotic attacher is configured to:
5 extend between the rear legs of the dairy livestock located in the milking box stall in order to attach milking equipment to the dairy livestock during a first time period; and
extend between the rear legs of a second dairy livestock located in the adjacent milking box stall in order to attach milking equipment to the second dairy
10 livestock during a second time period.
6. The system of Claim 1, wherein:
the rear wall comprises a backplane adapted to physically contact a rear portion of the dairy livestock when the dairy livestock is positioned proximate to the
15 equipment portion of the milking box; and
the front wall comprises a movable feed bowl, the movable feed bowl adapted to extend toward the rear wall.
7. The system of Claim 1, wherein the robotic attacher comprises:
20 a main arm;
a supplemental arm extending from the main arm, the supplemental arm configured to move between the rear legs of the dairy livestock located within the milking box; and
a vision system operable to facilitate movement of the supplemental arm
25 between the rear legs of the dairy livestock located within the milking box.
8. The system of Claim 7, wherein:
the equipment portion comprises a rail extending in a horizontal direction substantially parallel to the rear wall; and
30 the main arm is suspended from the rail and operable to move along the rail in the horizontal direction.

9. The system of Claim 1, further comprising:
a presence sensor adapted to detect the presence of the dairy livestock located within the milking box; and
a livestock identification sensor adapted to determine the identity of the dairy livestock located within the milking box.
10. A method, comprising:
positioning a front wall;
positioning a rear wall opposite the front wall;
positioning a first side wall extending between the front wall and the rear wall, the first side wall including a first gate;
positioning a second side wall extending between the front wall and the rear wall, the second side wall spaced apart from the first side wall such that the front wall, the rear wall, the first side wall, and the second side wall define a milking box stall of a size sufficient to accommodate a dairy livestock; and
positioning an equipment portion adjacent to the rear wall, the equipment portion housing a robotic attacher configured to extend between the rear legs of a dairy livestock located within the milking box stall in order to attach milking equipment to the dairy livestock.
11. The method of Claim 10, wherein the first side wall comprises a second gate.
12. The method of Claim 11, wherein the second side wall comprises a third gate and a fourth gate.
13. The method of Claim 10, further comprising positioning the milking box proximate to an adjacent milking box, wherein the second side wall defines a boundary between the milking box and the adjacent milking box.
14. The method of Claim 10, further comprising:

positioning the milking box proximate to an adjacent milking box, wherein the second side wall defines a boundary between the milking box and the adjacent milking box; and

5 suspending a robotic attacher in the equipment portion of the milking box, the robotic attacher adapted to:

 extend between the rear legs of the dairy livestock located in the milking box stall in order to attach milking equipment to the dairy livestock during a first time period; and

10 extend between the rear legs of a second dairy livestock located in the adjacent milking box stall in order to attach milking equipment to the second dairy livestock during a second time period.

15 15. The method of Claim 10, wherein:

 the rear wall comprises a backplane adapted to physically contact a rear portion of the dairy livestock; and

 the front wall comprises a movable feed bowl, the movable feed bowl adapted to move toward the rear wall.

20 16. The method of Claim 10, wherein the robotic attacher comprises:

 a main arm;

 a supplemental arm extending from the main arm, the supplemental arm configured to move between the rear legs of the dairy livestock located within the milking box; and

25 a vision system operable to facilitate movement of the supplemental arm between the rear legs of the dairy livestock located within the milking box.

17. The method of Claim 10, further comprising positioning a plurality of sensors within the milking box, the plurality of sensors including:

30 a presence sensor adapted to detect the presence of the dairy livestock within the milking box; and

 a livestock identification sensor adapted to determine the identity of the dairy livestock.

18. The method of Claim 10, further comprising:
positioning a rail in the equipment portion, the rail positioned to extend in a horizontal direction substantially parallel to the rear wall; and
5 suspending a main arm of the robotic attacher from the rail, the main arm operable to move along the rail in the horizontal direction.
19. The method of Claim 10, wherein:
the first side wall comprises a second gate;
10 the second side wall comprises a third gate and a fourth gate;
the method further comprising:
opening the first gate for the dairy livestock to enter the milking box;
detecting the presence of the dairy livestock within the milking box;
determining when the first gate, the second gate, the third gate, and the
15 fourth gate are each closed;
performing a milking procedure;
determining to sort the dairy livestock into either a first region or a second region; and
opening one of the first, second, third, and fourth gates in order to
20 allow the dairy livestock into the determined first or second region.
20. A system, comprising:
a front wall;
a rear wall positioned opposite the front wall;
25 a first side wall extending between the front wall and the rear wall, the first side wall including a first gate and a second gate;
a second side wall extending between the front wall and the rear wall, the second side wall including a third gate and a fourth gate, the second side wall spaced apart from the first side wall such that the front wall, the rear wall, the first side wall,
30 and the second side wall define a milking box stall of a size sufficient to accommodate a dairy livestock;

an equipment portion located adjacent to the rear wall, the equipment portion housing a robotic attacher configured to extend between the rear legs of a dairy livestock located within the milking box stall in order to attach milking equipment to the dairy livestock, the robotic attacher comprising:

5 a main arm suspended within the equipment portion of the milking box;

 a supplemental arm extending from the main arm, the supplemental arm configured to move between the rear legs of the dairy livestock located within the milking box in order to attach milking equipment to the dairy livestock; and

10 a vision system operable to facilitate movement of the supplemental arm between the rear legs of the dairy livestock located within the milking box.

21. A system, comprising:

 a front wall;

15 a rear wall positioned opposite the front wall;

 a first side wall extending between the front wall and the rear wall, the first side wall including a gate;

 a second side wall extending between the front wall and the rear wall, the second side wall defining a boundary between the milking box and an adjacent
20 milking box, the second side wall spaced apart from the first side wall such that the front wall, the rear wall, the first side wall, and the second side wall define a milking box stall of a size sufficient to accommodate a dairy livestock;

 an equipment portion located adjacent to the rear wall, the equipment portion housing a robotic attacher configured to extend between the rear legs of a dairy
25 livestock located within the milking box stall in order to attach milking equipment to the dairy livestock, the robotic attacher comprising:


 a main arm suspended within the equipment portion of the milking box;

 a supplemental arm extending from the main arm, the supplemental
30 arm configured to move between the rear legs of the dairy livestock located within the milking box in order to attach milking equipment to the dairy livestock; and

a vision system operable to facilitate movement of the supplemental arm between the rear legs of the dairy livestock located within the milking box.

1/6

FIG. 1A

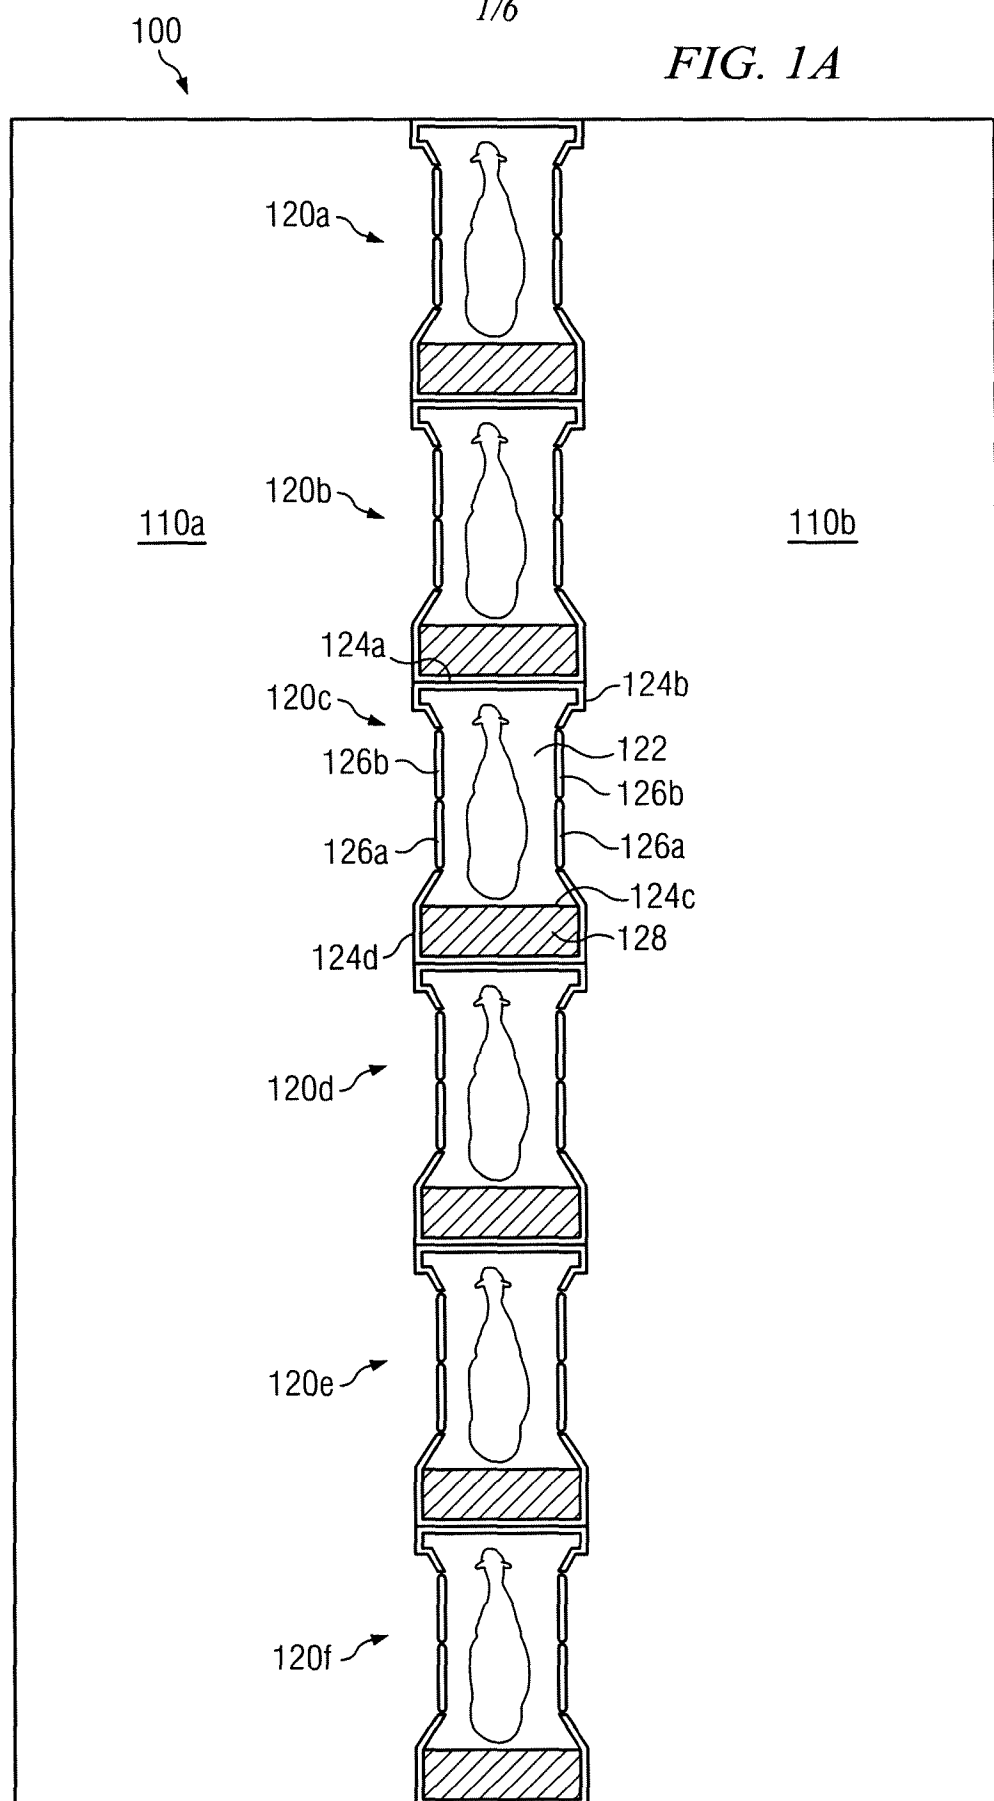

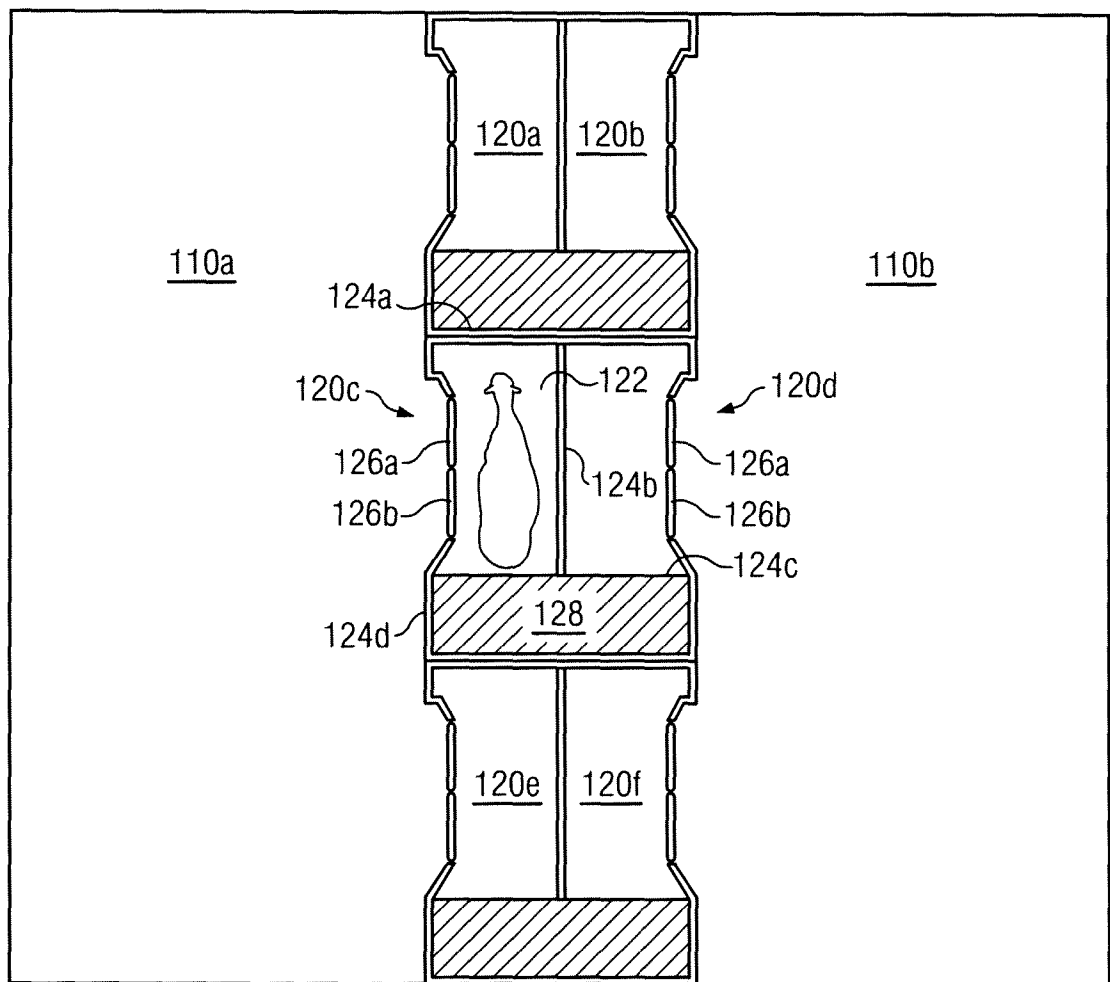


FIG. 1B

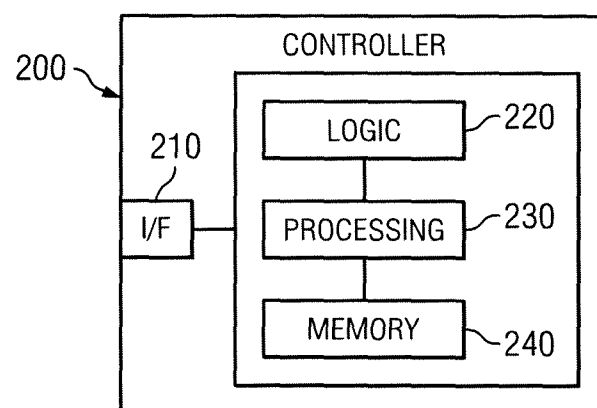
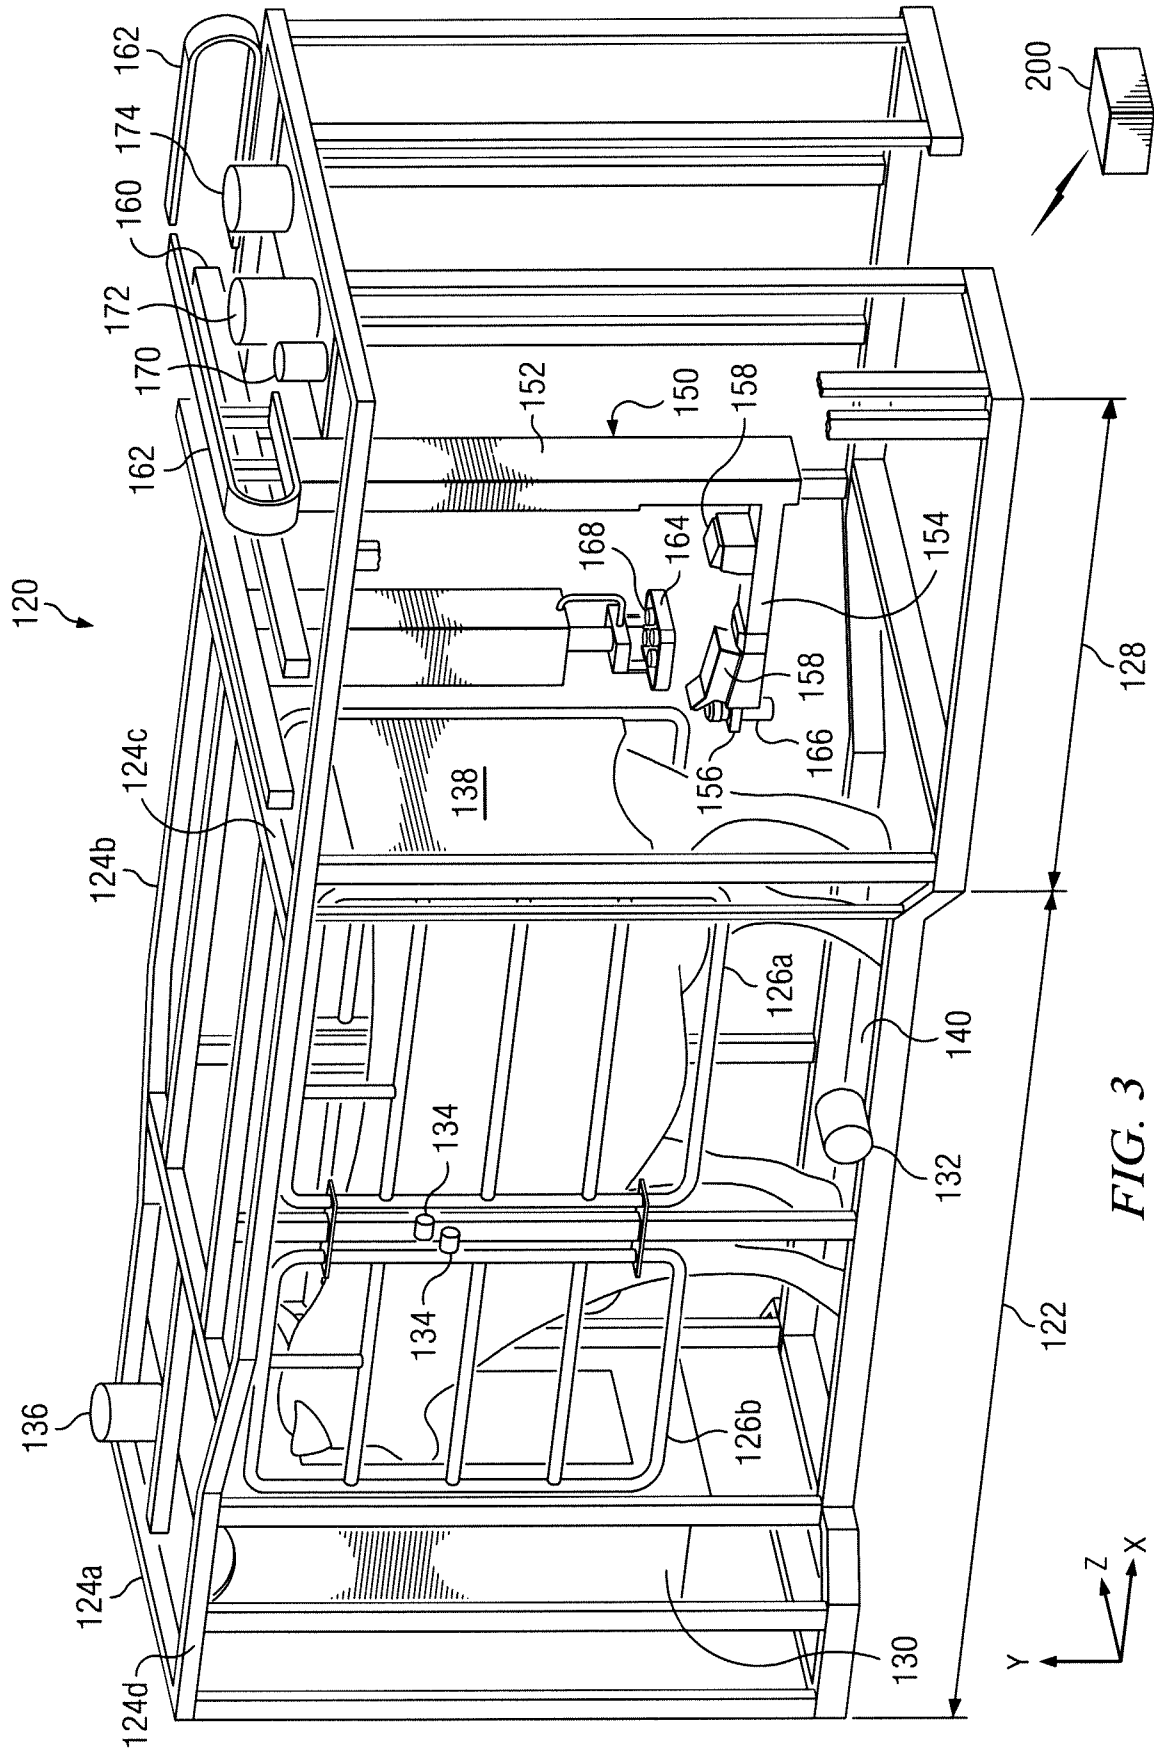


FIG. 2




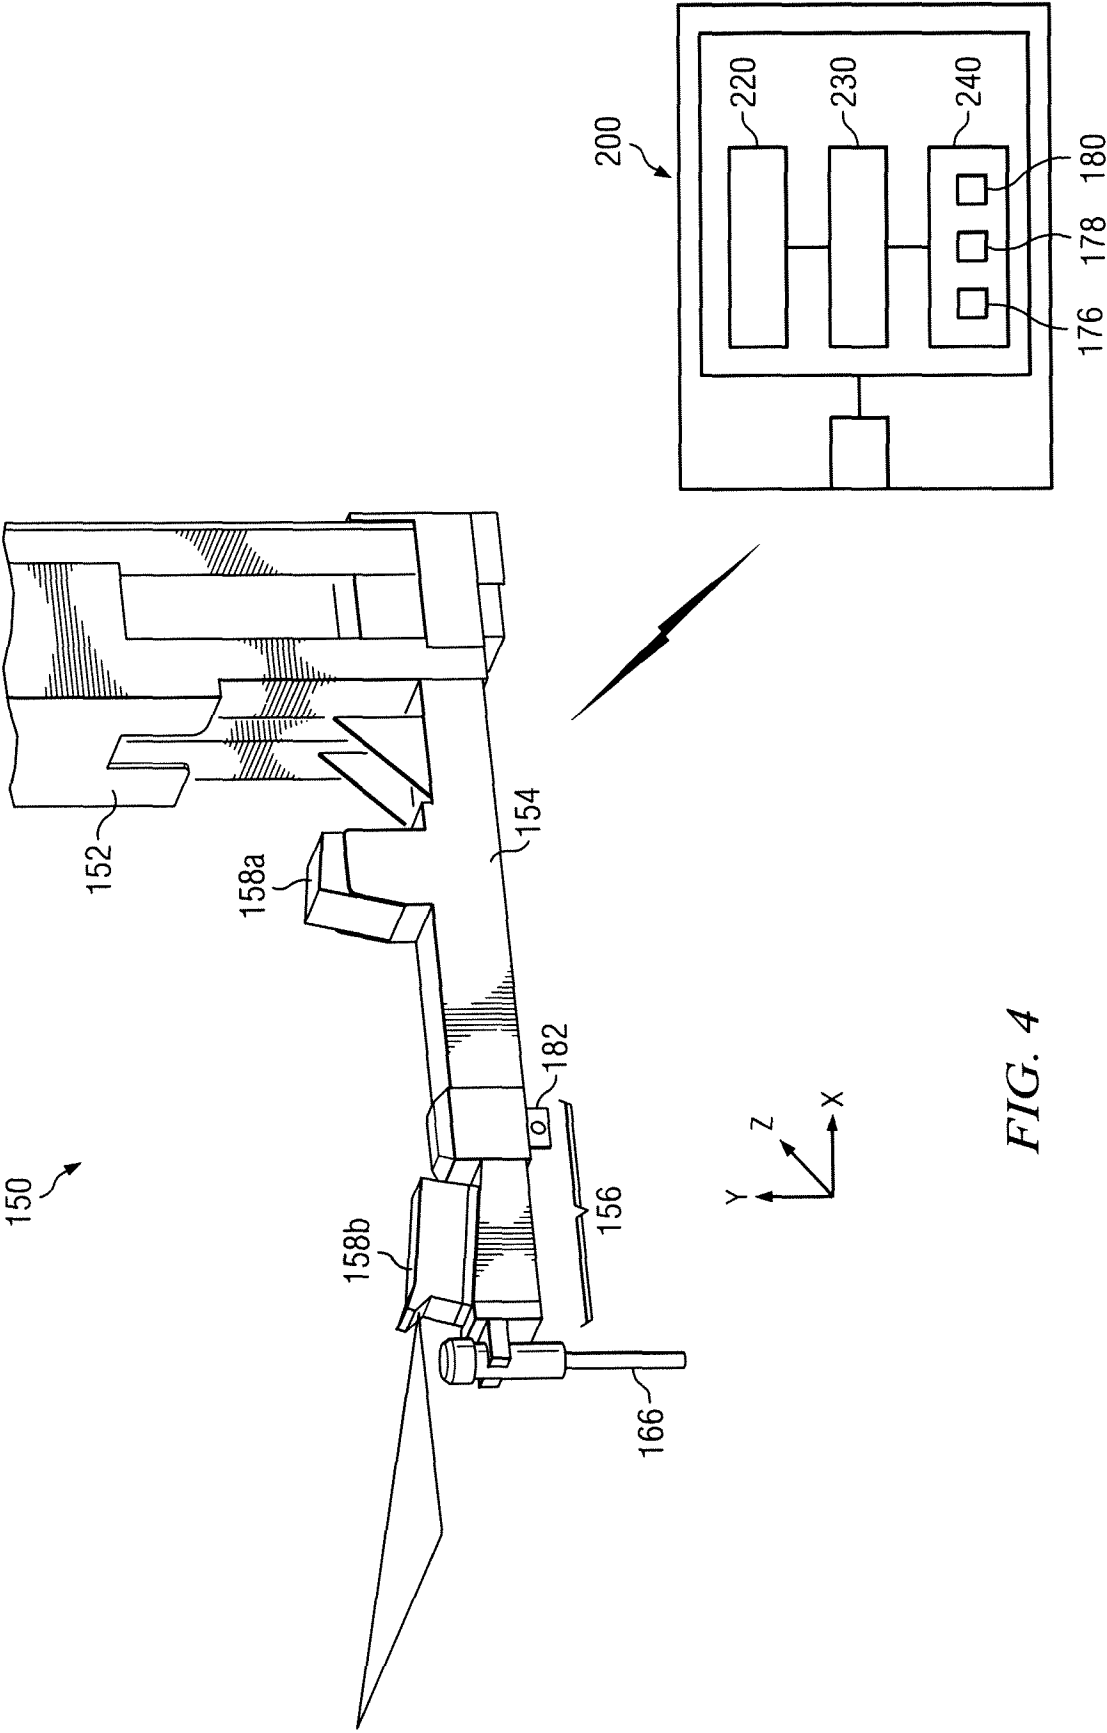


FIG. 4

5/6

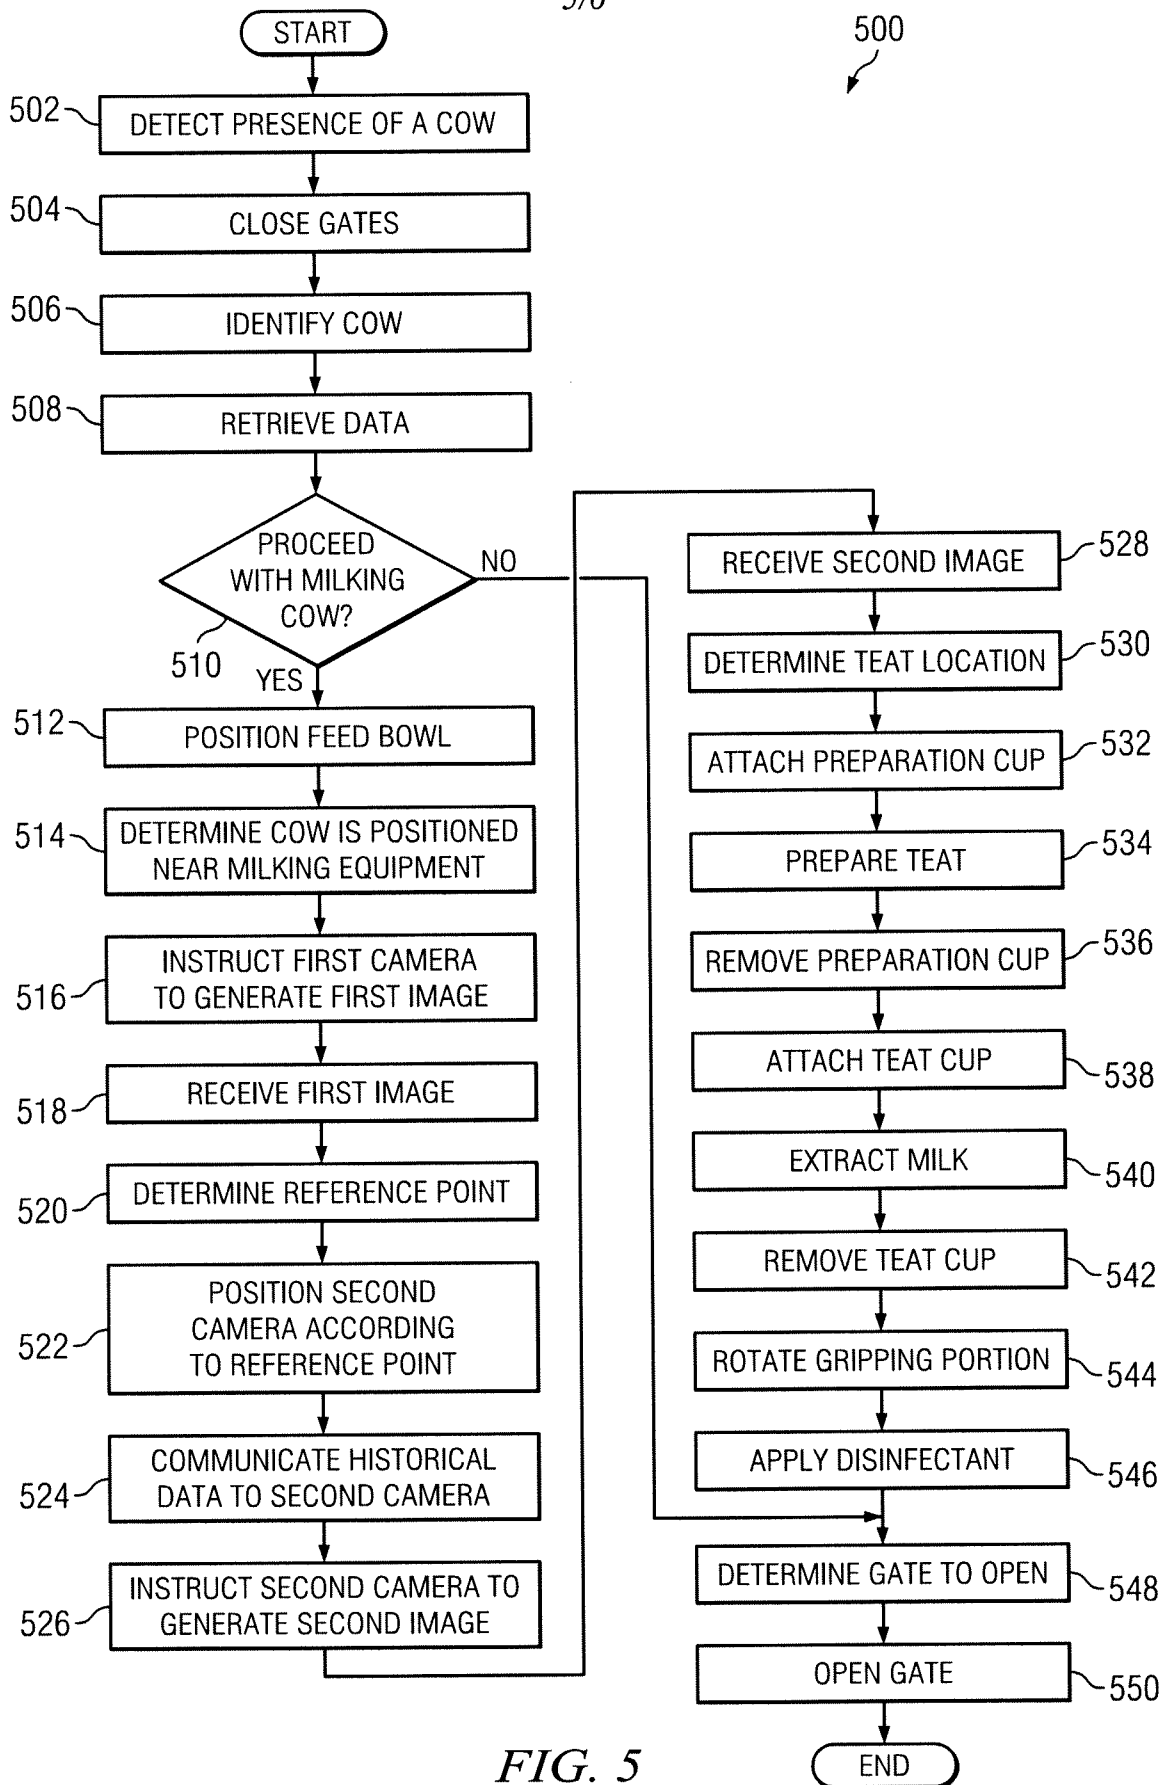

6/6

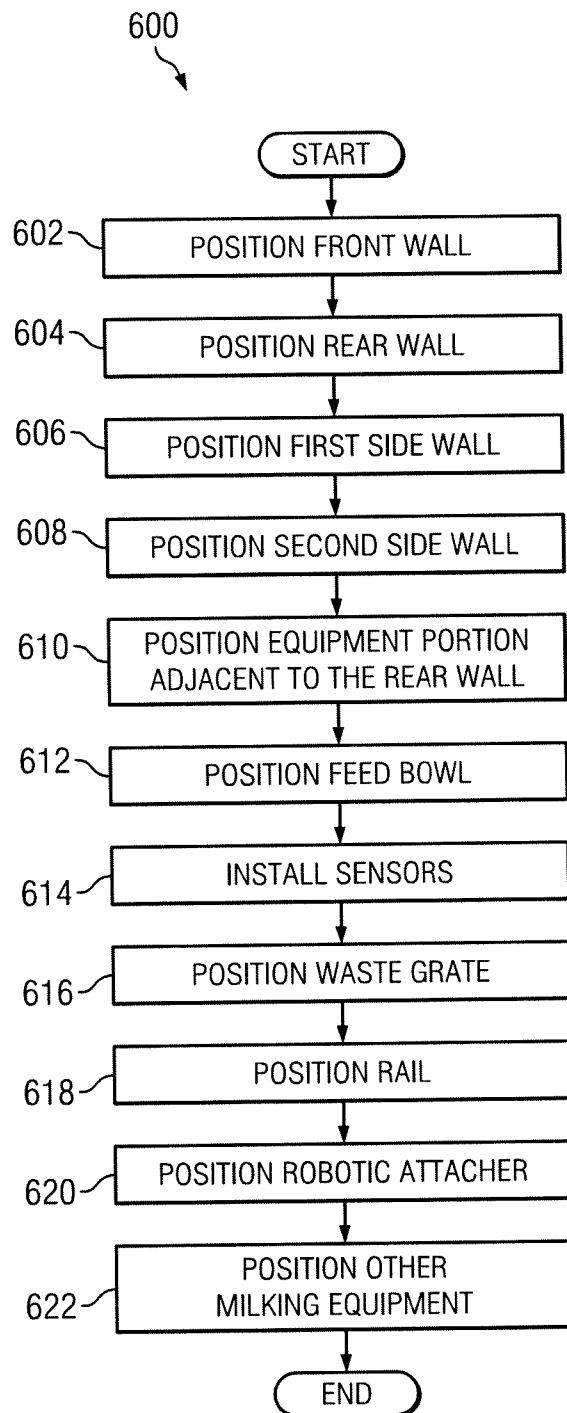


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/033892

A. CLASSIFICATION OF SUBJECT MATTER
INV. A01J5/00 A01K1/12
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A01J A01K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 630 558 A2 (TEXAS INDUSTRIES INC [AN] MAASLAND NV [NL]) 28 December 1994 (1994-12-28)	1,2,4,5, 7,9-11, 13,14, 16,17,21
Y	figures 1,2 column 8, lines 30-36 column 5, lines 42-49	3,6,8, 12,15, 18-20
X	US 2004/103846 A1 (FRANSEN RENATUS IGNATIUS [NL]) 3 June 2004 (2004-06-03)	1,2,10, 11
Y	figure 3	6,8,15, 18,19
Y	US 5 784 994 A (VAN DER LELY CORNELIS [CH]) 28 July 1998 (1998-07-28) figure 4	3,12,20
	----- -/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 July 2012

Date of mailing of the international search report

31/07/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Nédélec, Morgan

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/033892

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 1 316 253 A2 (WESTFALIA LANDTECHNIK GMBH [DE] WESTFALIASURGE GMBH [DE]) 4 June 2003 (2003-06-04) figure 4 -----	3,12,20
Y	EP 0 634 097 A1 (TEXAS INDUSTRIES INC [AN] MAASLAND NV [NL]) 18 January 1995 (1995-01-18) figure 3 column 3, lines 52-55 column 4, lines 20-21 -----	6,15
Y	WO 98/35547 A1 (MAASLAND NV [NL]; BERG KAREL VAN DEN [NL]) 20 August 1998 (1998-08-20) figures 1,2 -----	8,18
Y	WO 97/37528 A1 (PROLION BV [NL]; AURIK ERIK ARNOLDUS [NL]; VELDHUIZEN GIJS BERTUS WOUT) 16 October 1997 (1997-10-16) claim 8 -----	19
A	WO 2010/014002 A1 (LELY PATENT NV [NL]; VAN DEN BERG KAREL [NL]) 4 February 2010 (2010-02-04) the whole document -----	1,10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/033892

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0630558	A2	28-12-1994	DE 69424342 D1 15-06-2000
			DE 69424342 T2 04-01-2001
			DE 69433633 D1 22-04-2004
			DE 69433633 T2 17-02-2005
			DE 69434748 T2 16-05-2007
			EP 0630558 A2 28-12-1994
			EP 0962130 A2 08-12-1999
			EP 1393620 A2 03-03-2004
			EP 1645181 A1 12-04-2006
			NL 9301098 A 16-01-1995
US 2004103846	A1	03-06-2004	DE 60314334 T2 07-02-2008
			DK 1374670 T3 15-10-2007
			EP 1374670 A1 02-01-2004
			NL 1020934 C2 30-12-2003
			US 2004103846 A1 03-06-2004
US 5784994	A	28-07-1998	CA 2170046 A1 18-01-1996
			DE 69524042 D1 03-01-2002
			DE 69524042 T2 11-07-2002
			DE 69533971 D1 03-03-2005
			DE 69533971 T2 30-03-2006
			DE 69534572 D1 08-12-2005
			DE 69534572 T2 27-07-2006
			DE 69534866 T2 21-09-2006
			EP 0716566 A1 19-06-1996
			EP 1120033 A2 01-08-2001
			EP 1120034 A2 01-08-2001
			EP 1481583 A2 01-12-2004
			JP H09502362 A 11-03-1997
			NL 9401113 A 01-02-1996
			NZ 288747 A 24-02-1997
			US 5784994 A 28-07-1998
			US 6009833 A 04-01-2000
			WO 9601040 A2 18-01-1996
EP 1316253	A2	04-06-2003	DE 10158979 A1 12-06-2003
			EP 1316253 A2 04-06-2003
EP 0634097	A1	18-01-1995	DE 69419212 D1 29-07-1999
			DE 69419212 T2 20-01-2000
			EP 0634097 A1 18-01-1995
			NL 9301214 A 01-02-1995
WO 9835547	A1	20-08-1998	AT 243927 T 15-07-2003
			AU 731664 B2 05-04-2001
			AU 6123098 A 08-09-1998
			CA 2251478 A1 20-08-1998
			DE 69815967 D1 07-08-2003
			DE 69815967 T2 27-05-2004
			DK 900000 T3 27-10-2003
			EP 0900000 A1 10-03-1999
			JP 2000508925 A 18-07-2000
			NL 1005255 C2 13-08-1998
			NZ 332623 A 28-01-2000
			US 6205949 B1 27-03-2001
			WO 9835547 A1 20-08-1998

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/033892

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9737528	A1	16-10-1997	DE 69719078 D1 20-03-2003
			DE 69719078 T2 13-11-2003
			EP 0959665 A1 01-12-1999
			JP 2000508167 A 04-07-2000
			NL 1004917 C1 14-10-1997
			US 6095086 A 01-08-2000
			WO 9737528 A1 16-10-1997

WO 2010014002	A1	04-02-2010	AU 2009277234 A1 04-02-2010
			CA 2731313 A1 04-02-2010
			EP 2317837 A1 11-05-2011
			NL 1035763 C2 29-01-2010
			US 2011114024 A1 19-05-2011
			WO 2010014002 A1 04-02-2010
