



(86) Date de dépôt PCT/PCT Filing Date: 2012/10/17
(87) Date publication PCT/PCT Publication Date: 2013/04/25
(85) Entrée phase nationale/National Entry: 2014/01/28
(86) N° demande PCT/PCT Application No.: US 2012/060548
(87) N° publication PCT/PCT Publication No.: 2013/059271
(30) Priorité/Priority: 2011/10/17 (US61/547,884)

(51) Cl.Int./Int.Cl. *B66F 11/04* (2006.01)
(71) Demandeur/Applicant:
JLG INDUSTRIES, INC., US
(72) Inventeurs/Inventors:
HOFFMAN, JOHN, US;
GREEN, BRIAN, US;
YOUNG, TROY, US;
SOLLERS, JESSE, US
(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : ACTIONNEMENT A DISTANCE D'ETAI DE VERIN DE PLATEFORME ELEVATRICE A CISEAUX
(54) Title: REMOTE ACTIVATION OF SCISSOR LIFT CYLINDER PROP

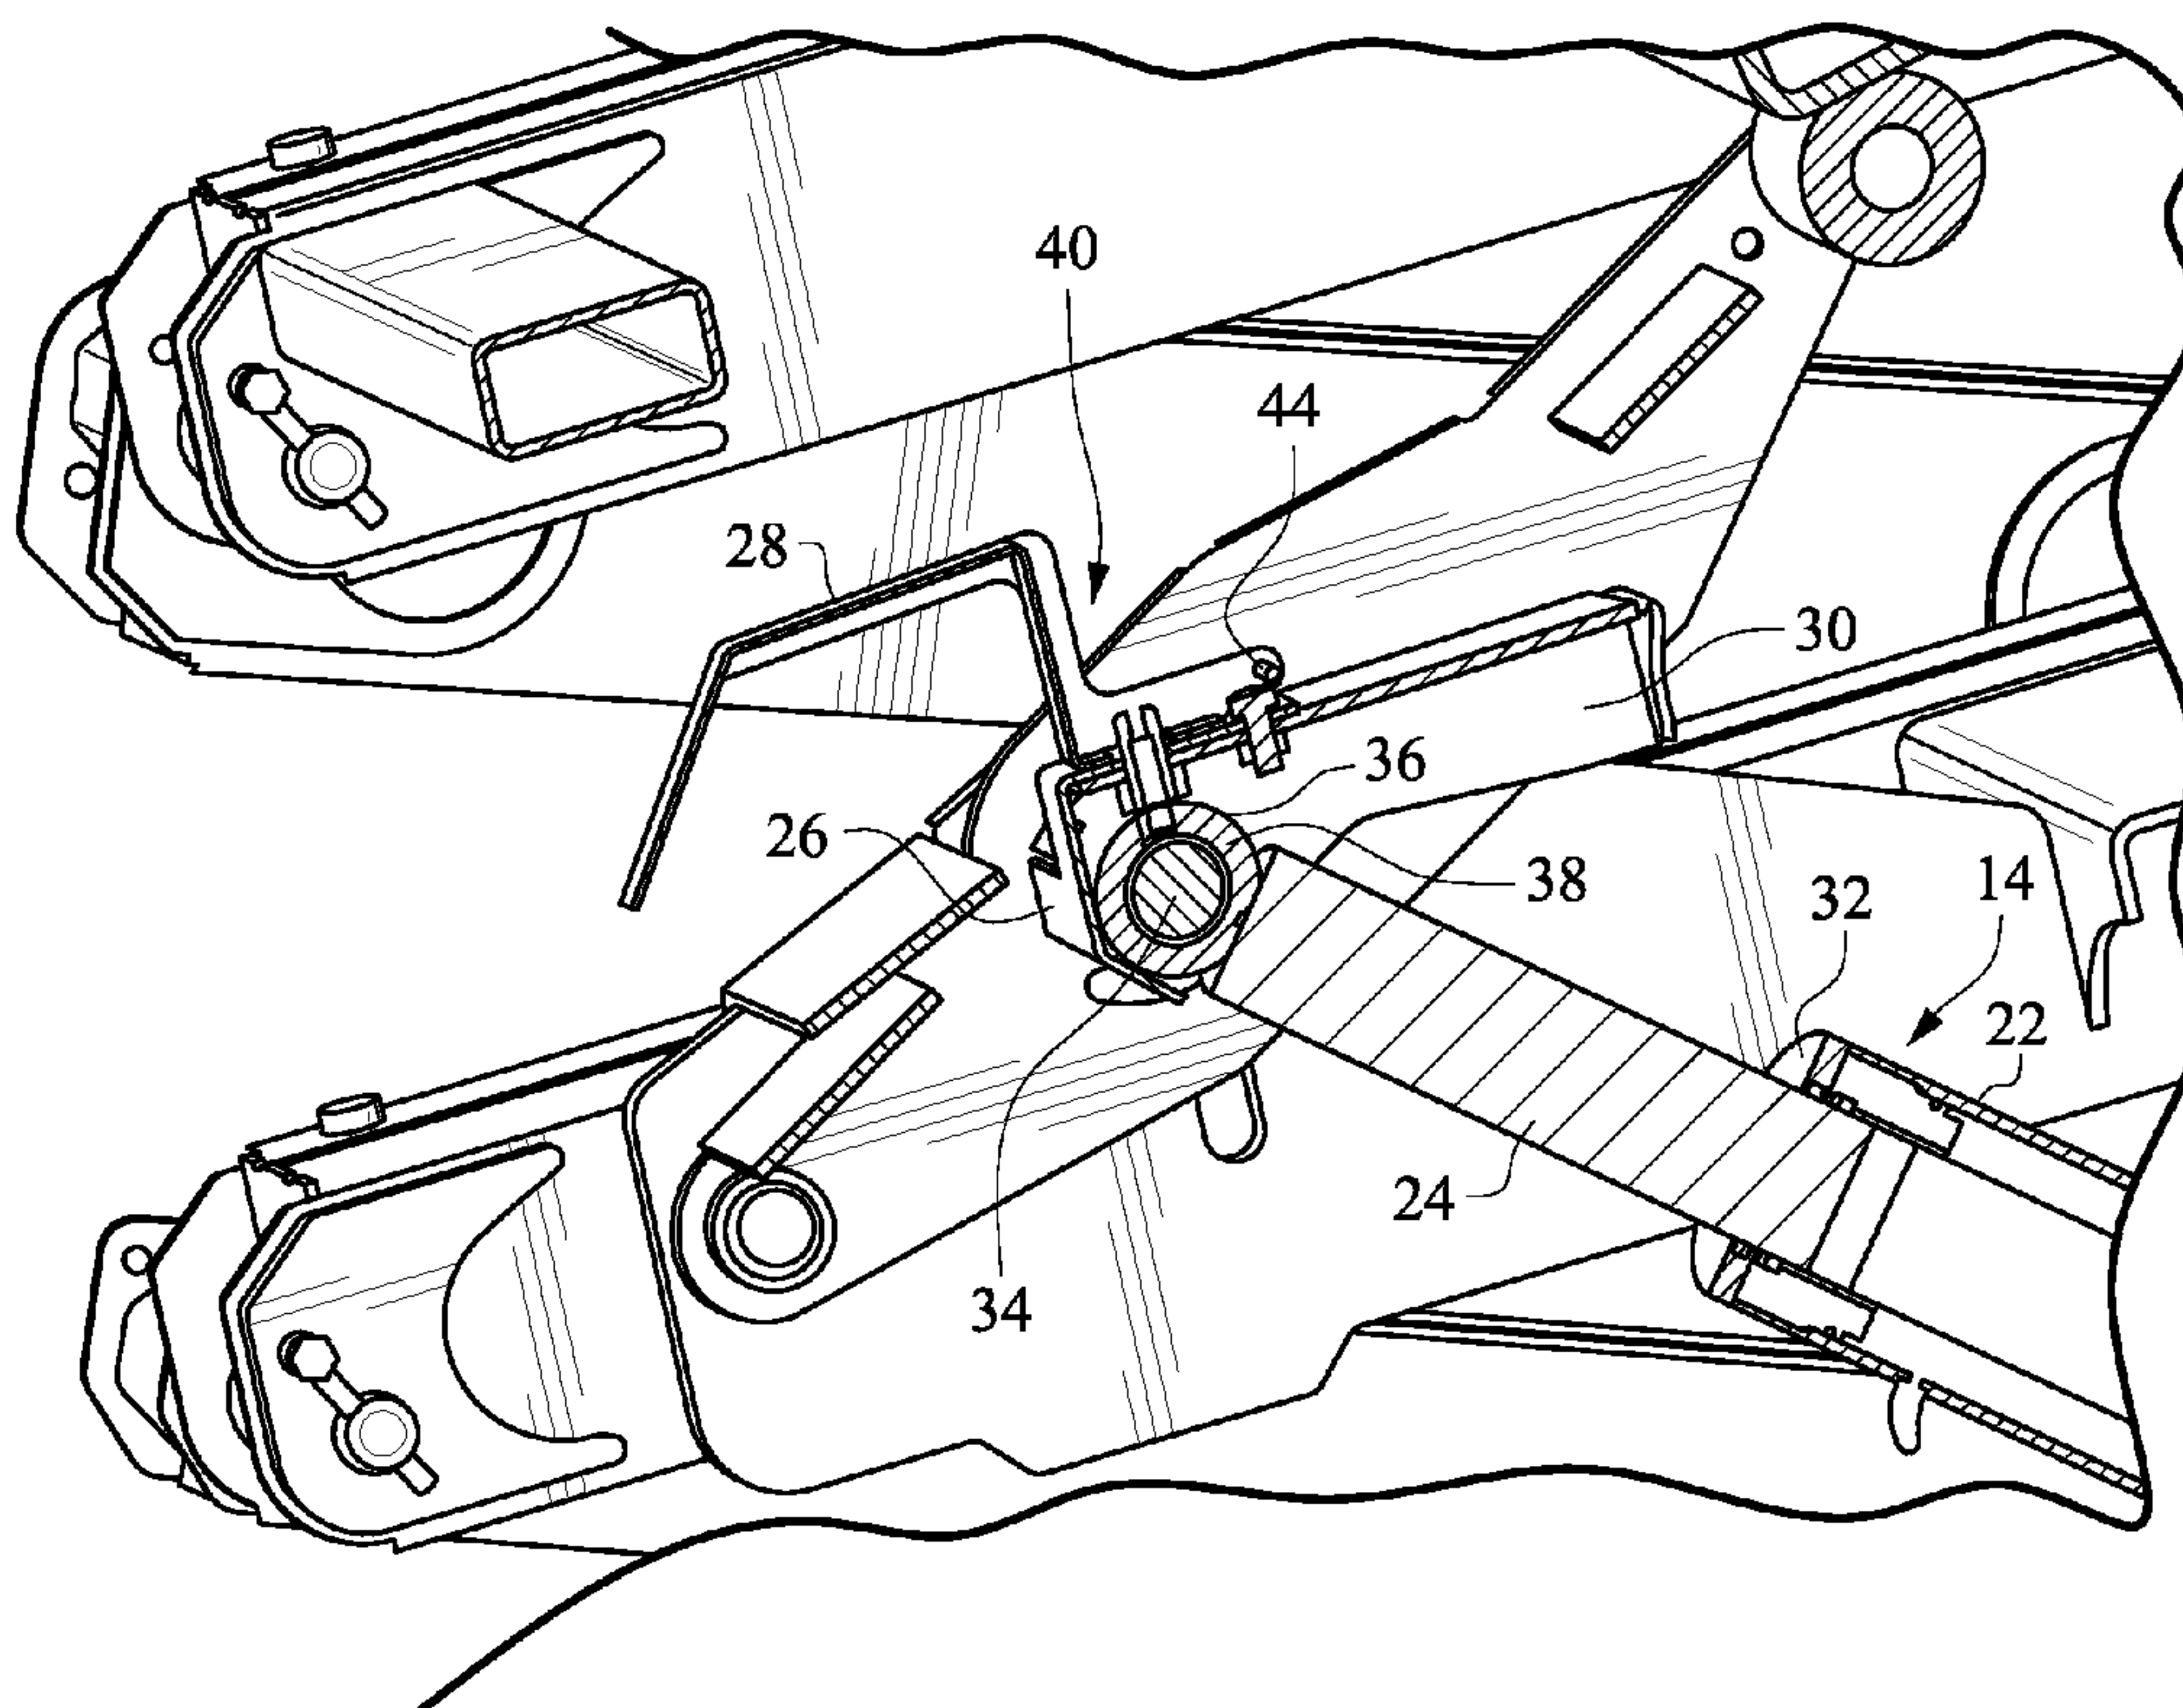


Fig. 3

(57) **Abrégé/Abstract:**

A cylinder prop assembly is cooperable with a lift cylinder for a scissor lift and includes a cylinder prop displaceable between a disengaged position, in which the cylinder rod is movable relative to the cylinder housing, and an engaged position in which the cylinder rod is locked from displacement relative to the cylinder housing. An actuation lever is coupled with the cylinder prop and is accessible to displace the cylinder prop between the disengaged position and the engaged position.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2013/059271 A1(43) International Publication Date
25 April 2013 (25.04.2013)(51) International Patent Classification:
B66F 11/04 (2006.01)

(21) International Application Number:

PCT/US2012/060548

(22) International Filing Date:

17 October 2012 (17.10.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/547,884 17 October 2011 (17.10.2011) US

(71) Applicant: **JLG INDUSTRIES, INC.** [US/US]; 13712
Crayton Boulevard, Hagerstown, MD 21742-2386 (US).(72) Inventors: **HOFFMAN, John**; c/o JLG Industries, Inc.,
13712 Crayton Boulevard, Hagerstown, MD 21742-2386
(US). **GREEN, Brian**; c/o JLG Industries, Inc., 13712
Crayton Boulevard, Hagerstown, MD 21742-2386 (US).
YOUNG, Troy; c/o JLG Industries, Inc., 13712 Crayton
Boulevard, Hagerstown, MD 21742-2386 (US).
SOLLERS, Jesse; c/o JLG Industries, Inc., 13712 Crayton
Boulevard, Hagerstown, MD 21742-2386 (US).(74) Agent: **KAGEN, Alan, M.**; Nixon & Vanderhye P.C., 901
North Glebe Road, 11th Floor, Arlington, VA 22203-1808
(US).(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: REMOTE ACTIVATION OF SCISSOR LIFT CYLINDER PROP

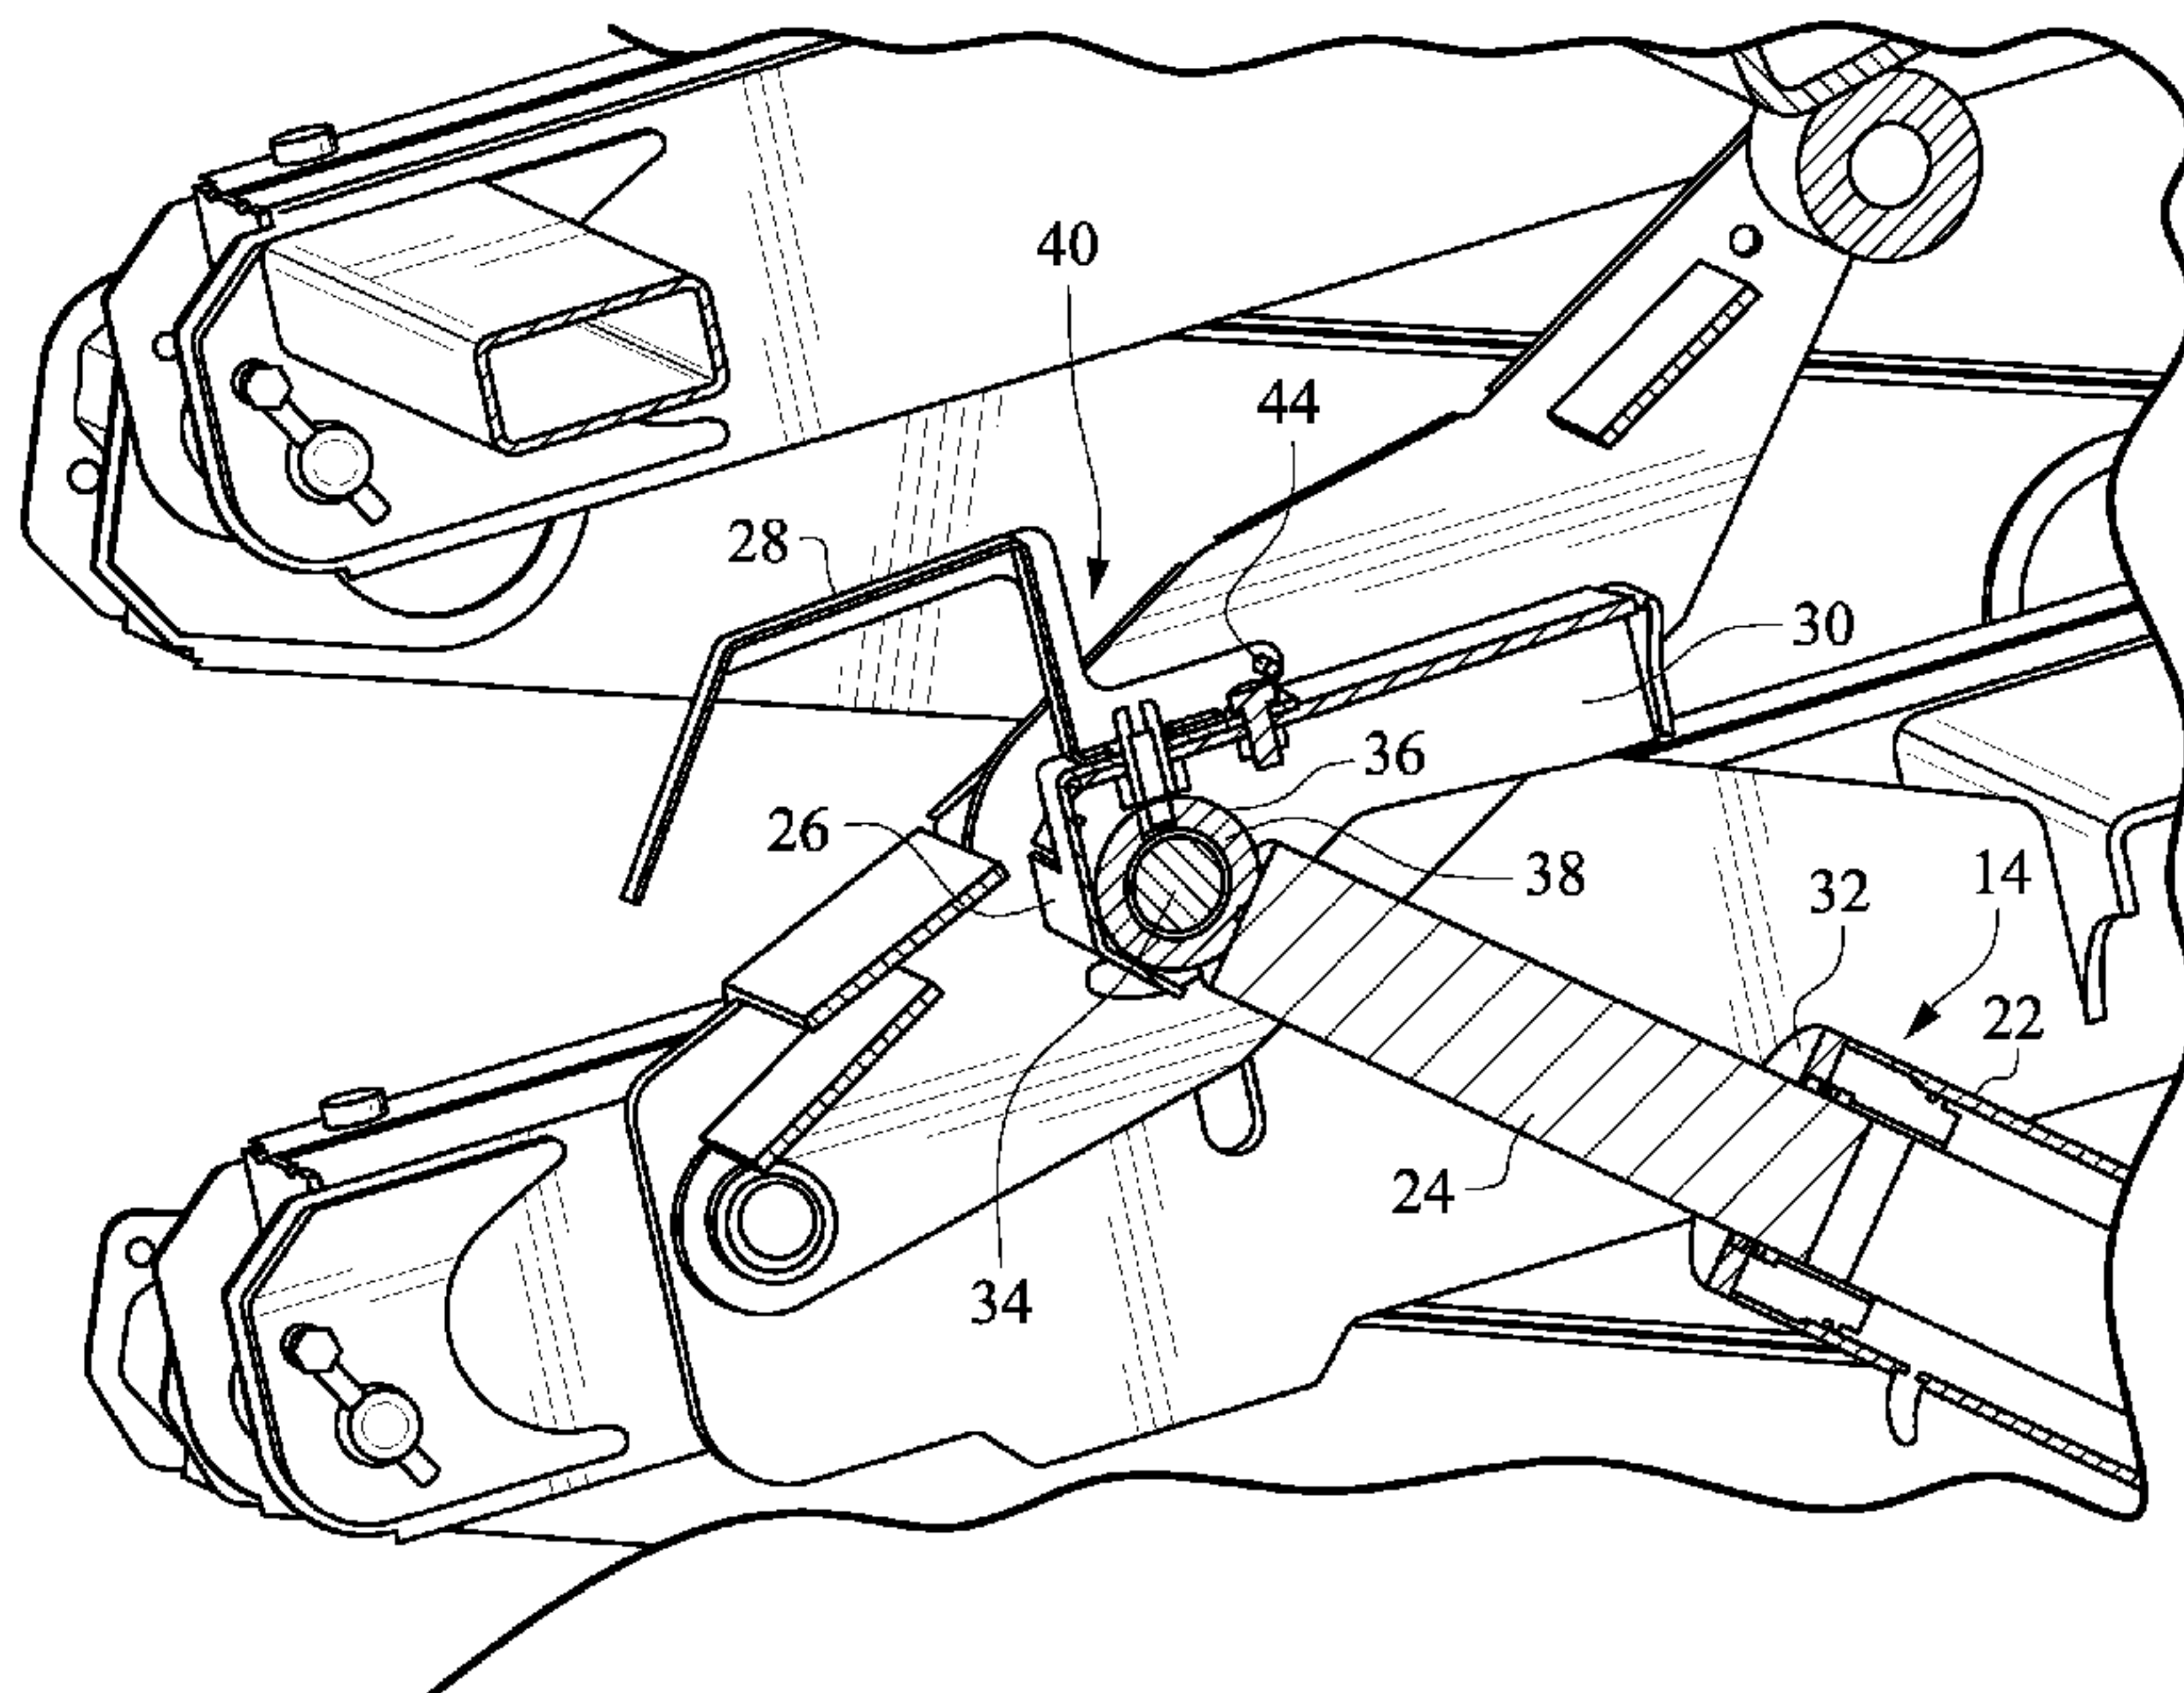


Fig. 3

(57) Abstract: A cylinder prop assembly is cooperable with a lift cylinder for a scissor lift and includes a cylinder prop displaceable between a disengaged position, in which the cylinder rod is movable relative to the cylinder housing, and an engaged position in which the cylinder rod is locked from displacement relative to the cylinder housing. An actuation lever is coupled with the cylinder prop and is accessible to displace the cylinder prop between the disengaged position and the engaged position.

WO 2013/059271 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

— *of inventorship (Rule 4.17(iv))*

Declarations under Rule 4.17:

Published:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

— *with international search report (Art. 21(3))*

TITLE OF INVENTION

REMOTE ACTIVATION OF SCISSOR LIFT CYLINDER PROP

This application claims the benefit of U.S. Provisional Patent Application Serial No. 61/547,884, filed October 17, 2011, the entire content of which is herein incorporated by
5 reference.

BACKGROUND OF THE INVENTION

The invention relates generally to scissor lifts and, more particularly, to a cylinder prop assembly suitable for use with a scissor lift.

Work platforms are utilized for a variety of different uses including loading and
10 unloading of items in a warehouse and/or repairing components located at a particular elevation, such as repairing a broken ceiling light in a gymnasium. In a scissor lift, left and right side arm stacks are pinned together to define a scissor arm assembly and support a work platform. A lift cylinder acts to extend and retract the scissor arm assembly to raise and lower the platform via controls on the platform. The platform and scissor assembly are supported on
15 a base portion including drive wheels that are also controllable with controls accessible on the platform.

Regular maintenance of the equipment often requires an operator to reach into and through the scissor arm assembly. For example, items requiring maintenance may include the lift cylinder itself, hydraulic hoses, electrical wires, scissor arms, etc. A potential hazard exists
20 for the operator when reaching into or through the scissor assembly in the event that the operator inadvertently releases the hydraulic pressure in the lift cylinder causing the scissor assembly to retract. Previously, prop arms and the like have been installed between connecting pins in the scissor arm assembly to provide a mechanical lock against such retraction. The conventional structures, however, result in unequal loading of the scissor arm stack because the
25 arms are only propped on one side, resulting in unnatural twisting of the whole unit and unnecessary stresses on the scissor structure.

SUMMARY OF THE INVENTION

It would be desirable for a cylinder prop assembly to safely prevent retraction of the scissor assembly during maintenance and the like while avoiding unequal loading of the scissor
30 arm stack. The cylinder prop assembly of the described embodiments prevents retraction of the scissor arm lift cylinder to enable access inside the arms for inspection and routine

maintenance. The assembly can be remotely activated and deactivated to maintain operator safety.

In an exemplary embodiment, a scissor lift includes a lift cylinder having a housing and a cylinder rod, where the cylinder rod is displaceable relative to the housing by hydraulic fluid.

5 A scissor arm assembly is displaceable between a raised position and a lowered position by the lift cylinder, and a platform is supported by the scissor arm assembly. A cylinder prop assembly acts between the scissor arm assembly and the lift cylinder. The cylinder prop assembly includes a retaining plate secured to a distal end of the cylinder rod and pivotable relative to the cylinder rod, an actuation lever coupled with the retaining plate, and a cylinder

10 prop coupled with the retaining plate and displaceable via the actuation lever between a disengaged position in which the cylinder rod is unlocked for displacement relative to the housing and an engaged position in which the cylinder rod is locked from displacement relative to the housing.

The scissor arm assembly may include a left side arm stack and a right side arm stack

15 connected to each other across a middle area, where the cylinder prop assembly is disposed in the middle area. An end of the cylinder rod may include a bushing having an opening therein, where the cylinder prop includes an axle positioned in the opening and rotatable in the opening. The cylinder prop assembly may also include a locking mechanism cooperable with a hole in the bushing to lock the cylinder prop in the disengaged position.

20 In another exemplary embodiment, a cylinder prop assembly acts between a cylinder rod and a cylinder housing. In the cylinder prop assembly, a retaining plate is securable to a distal end of the cylinder rod and pivotable relative to the cylinder rod, and an actuation lever is coupled with the retaining plate. A cylinder prop is coupled with the retaining plate and displaceable via the actuation lever between a disengaged position in which the cylinder rod is

25 unlocked for displacement relative to the housing and an engaged position in which the cylinder rod is locked from displacement relative to the housing.

The cylinder housing may define a shoulder relative to the cylinder rod, where in the engaged position, the cylinder prop is disposed adjacent the shoulder. A locking mechanism may be cooperable with the bushing to lock the cylinder prop in the disengaged position.

30 Additionally, the locking mechanism may include a spring-loaded plunger engageable with a hole in the bushing. The spring-loaded plunger may be disposed through the retaining plate and connected to the actuation lever, where the actuation lever is pivotable relative to the retaining plate to retract the spring-loaded plunger.

In yet another exemplary embodiment, a cylinder prop assembly is cooperable with a lift cylinder for a scissor lift. The cylinder prop assembly includes a cylinder prop displaceable between a disengaged position in which the cylinder rod is movable relative to the cylinder housing and an engaged position in which the cylinder rod is locked from displacement relative to the cylinder housing. An actuation lever is coupled with the cylinder prop and is accessible to displace the cylinder prop between the disengaged position and the engaged position.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects and advantages will be described in detail with reference to the accompanying drawings, in which:

10 FIG. 1 is a perspective view of a scissor type aerial work platform;

FIG. 2 shows a machine operator remotely engaging/disengaging the cylinder prop assembly while remaining clear of all pinch/crush hazards;

FIG. 3 is a cut-away view showing the cylinder prop assembly in a disengaged position; and

15 FIG. 4 is a cut-away view showing the cylinder prop assembly in an engaged position.

DETAILED DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a scissor lift 10 including a scissor arm assembly 12 displaceable between a raised position and a lowered position by a lift cylinder 14 such as a hydraulic lift cylinder or the like. The scissor arm assembly 12 includes a left side arm stack and a right side arm stack connected to each other across a middle area as shown. A platform 16 is supported by the scissor arm assembly 12. The scissor lift 10 also includes a base support 18 including wheels and driving structure. Scissor lift controls are accessible to an operator on the platform 16.

A cylinder prop assembly 20 acts between the scissor arm assembly 12 and the lift cylinder 14. As shown in Fig. 2, the cylinder prop assembly 20 is positioned in the middle area between the left side and right side arm stacks of the scissor arm assembly 12. In this position, an operator can safely and remotely engage and disengage the cylinder prop assembly 20.

FIGS. 3 and 4 are cut-away views showing the cylinder prop assembly in a disengaged position and an engaged position, respectively. The lift cylinder 14 includes a housing 22 and a cylinder rod 24 displaceable relative to the housing 22 by hydraulic fluid. The cylinder prop assembly 20 serves to lock the cylinder rod 24 from displacement relative to the housing 22.

The cylinder prop assembly 20 includes a retaining plate 26 secured to a distal end of the cylinder rod 24 and pivotable relative to the cylinder rod 24. An actuation lever 28 is coupled with the retaining plate 26, and a cylinder prop 30 is coupled with the retaining plate and displaceable via the actuation lever 28 between the disengaged position (FIG. 3) and the engaged position (FIG. 4). The cylinder housing 22 defines a shoulder 32 relative to the cylinder rod 24. As shown in FIG. 4, in the engaged position, the cylinder prop 30 is disposed adjacent the shoulder 32. An opposite end of the cylinder prop 30 includes an axle 34 that is positionable and rotatable in an opening 36 in a bushing 38 at a distal end of the cylinder rod 24. A locking mechanism 40 is cooperable with a hole in the bushing 38 to lock the cylinder prop 30 in the disengaged position. Preferably, the locking mechanism includes a spring-loaded plunger 42 engageable with the hole in the bushing 38. The spring loaded plunger 42 is disposed through the retaining plate 26 and connected to the actuation lever 28. The actuation lever 28 is pivotable relative to the retaining plate 26 at pivot 44 to retract the spring loaded plunger 42 as the cylinder prop 30 is displaced from its disengaged position to its engaged position via the actuation lever 28. Thus, the actuation lever 28 is cooperable with the locking mechanism 40 to selectively disengage the locking mechanism 40.

Components of the cylinder prop assembly are made of suitably strong materials such as steel or a material of similar strength and durability. The cylinder prop assembly provides a safe and effective mechanism for preventing inadvertent retraction of a scissor arm assembly during inspection and routine maintenance. The structure can be retrofit for existing machines and provides an effective solution for operator pinch/crush hazards.

While the invention has been described in connection with what is presently considered to be the most practical and preferred embodiments, it is to be understood that the invention is not to be limited to the disclosed embodiments, but on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

WHAT IS CLAIMED IS:

1. A scissor lift comprising:
 - a lift cylinder including a housing and a cylinder rod, wherein the cylinder rod is displaceable relative to the housing by hydraulic fluid;
 - a scissor arm assembly displaceable between a raised position and a lowered position by the lift cylinder;
 - a platform supported by the scissor arm assembly; and
 - a cylinder prop assembly acting between the scissor arm assembly and the lift cylinder and including:
 - a retaining plate secured to a distal end of the cylinder rod and pivotable relative to the cylinder rod,
 - an actuation lever coupled with the retaining plate, and
 - a cylinder prop coupled with the retaining plate and displaceable via the actuation lever between a disengaged position in which the cylinder rod is unlocked for displacement relative to the housing and an engaged position in which the cylinder rod is locked from displacement relative to the housing.
2. A scissor lift according to claim 1, wherein the scissor arm assembly comprises a left side arm stack and a right side arm stack connected to each other across a middle area, and wherein the cylinder prop assembly is disposed in the middle area.
3. A scissor lift according to claim 1, wherein an end of the cylinder rod comprises a bushing having an opening therein, and wherein the cylinder prop includes an axle positioned in the opening and rotatable in the opening.
4. A scissor lift according to claim 3, wherein the cylinder prop assembly further comprises a locking mechanism cooperable with a hole in the bushing to lock the cylinder prop in the disengaged position.
5. A cylinder prop assembly acting between a cylinder rod and a cylinder housing, the cylinder prop assembly comprising:
 - a retaining plate securable to a distal end of the cylinder rod and pivotable relative to the cylinder rod;
 - an actuation lever coupled with the retaining plate; and
 - a cylinder prop coupled with the retaining plate and displaceable via the actuation lever between a disengaged position in which the cylinder rod is unlocked

for displacement relative to the housing and an engaged position in which the cylinder rod is locked from displacement relative to the housing.

6. A cylinder prop assembly according to claim 5, wherein an end of the cylinder rod comprises a bushing having an opening therein, and wherein the cylinder prop includes an axle positionable and rotatable in the opening.

7. A cylinder prop assembly according to claim 6, wherein the cylinder housing defines a shoulder relative to the cylinder rod, and wherein in the engaged position, the cylinder prop is disposed adjacent the shoulder.

8. A cylinder prop assembly according to claim 6, further comprising a locking mechanism cooperable with the bushing to lock the cylinder prop in the disengaged position.

9. A cylinder prop assembly according to claim 8, wherein the locking mechanism comprises a spring-loaded plunger engageable with a hole in the bushing.

10. A cylinder prop assembly according to claim 9, wherein the spring-loaded plunger is disposed through the retaining plate and connected to the actuation lever, and wherein the actuation lever is pivotable relative to the retaining plate to retract the spring-loaded plunger.

11. A cylinder prop assembly cooperable with a lift cylinder for a scissor lift, wherein the lift cylinder includes a cylinder rod and a cylinder housing, the cylinder prop assembly comprising:

a cylinder prop displaceable between a disengaged position in which the cylinder rod is movable relative to the cylinder housing and an engaged position in which the cylinder rod is locked from displacement relative to the cylinder housing; and

an actuation lever coupled with the cylinder prop and accessible to displace the cylinder prop between the disengaged position and the engaged position.

12. A cylinder prop assembly according to claim 11, further comprising a retaining plate pivotably secured to a distal end of the cylinder rod, wherein the actuation lever and the cylinder prop are connected to and movable with the retaining plate.

13. A cylinder prop assembly according to claim 12, further comprising a locking mechanism that is constructed to lock the cylinder prop in the disengaged position.

14. A cylinder prop assembly according to claim 13, wherein the actuation lever is cooperable with the locking mechanism to selectively disengage the locking mechanism.

15. A cylinder prop assembly according to claim 11, wherein an end of the cylinder rod comprises a bushing having an opening therein, and wherein the cylinder prop includes an axle positioned in the opening and rotatable in the opening.

1/4

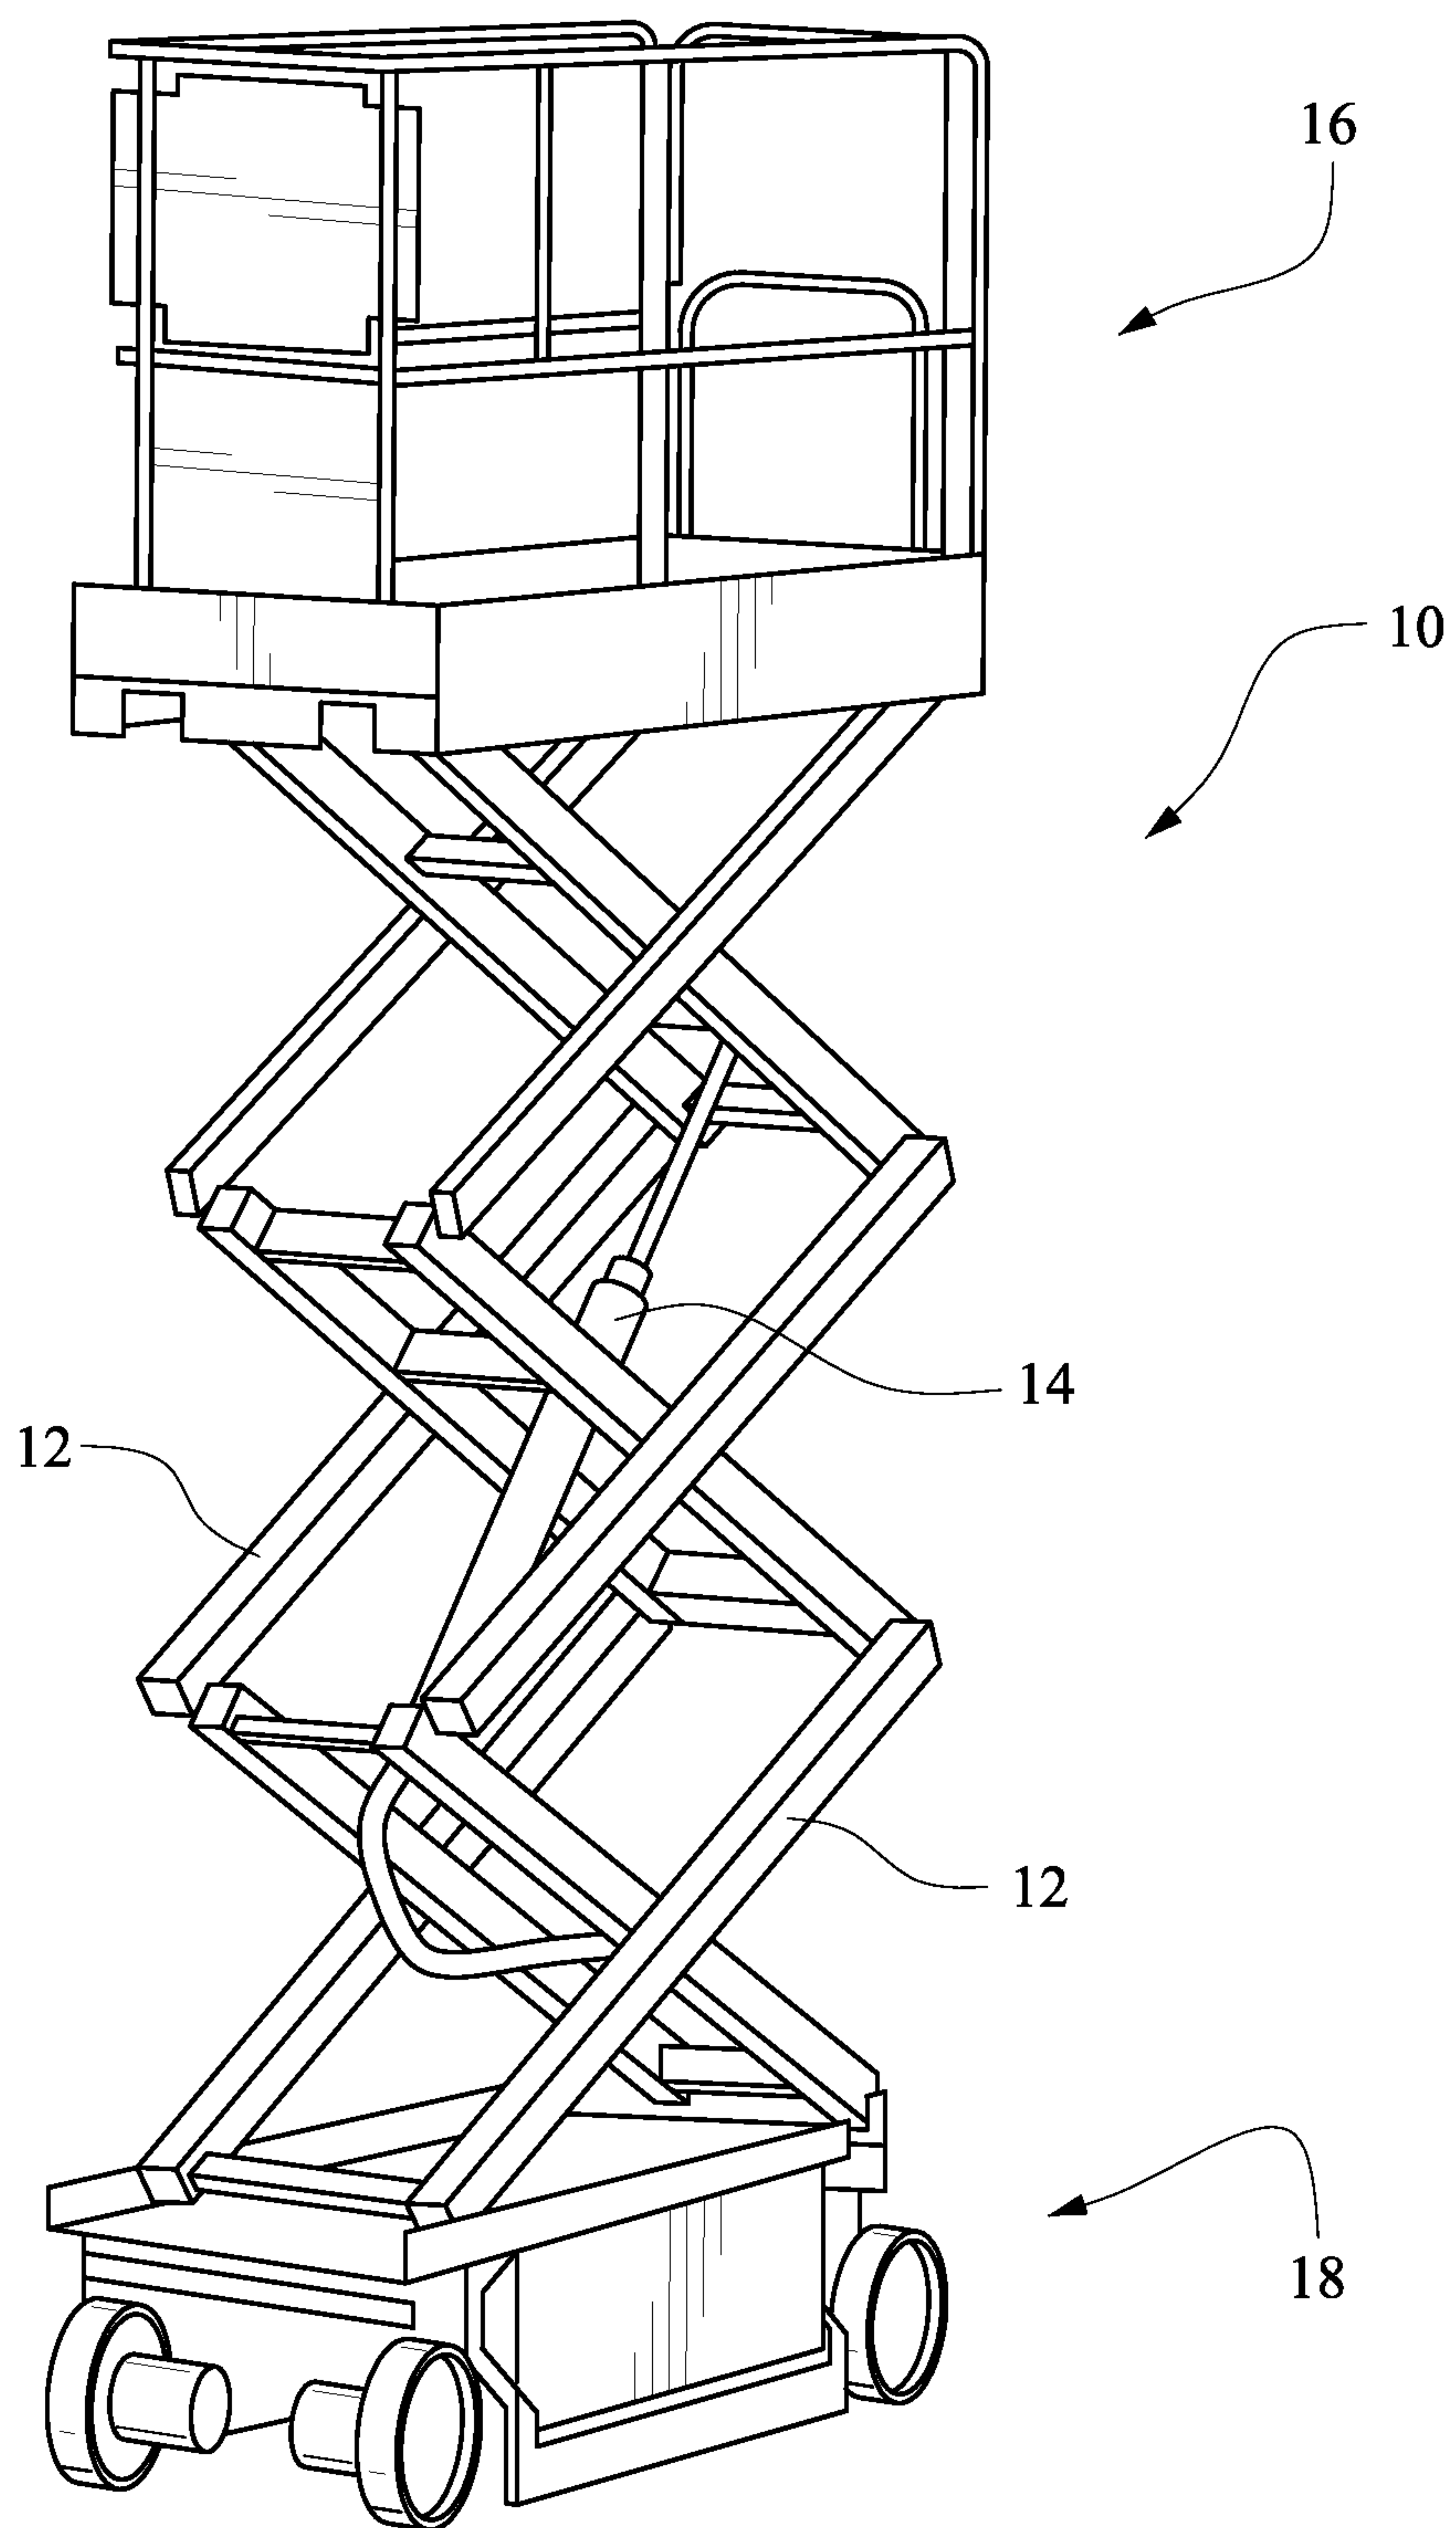


Fig. 1

2/4

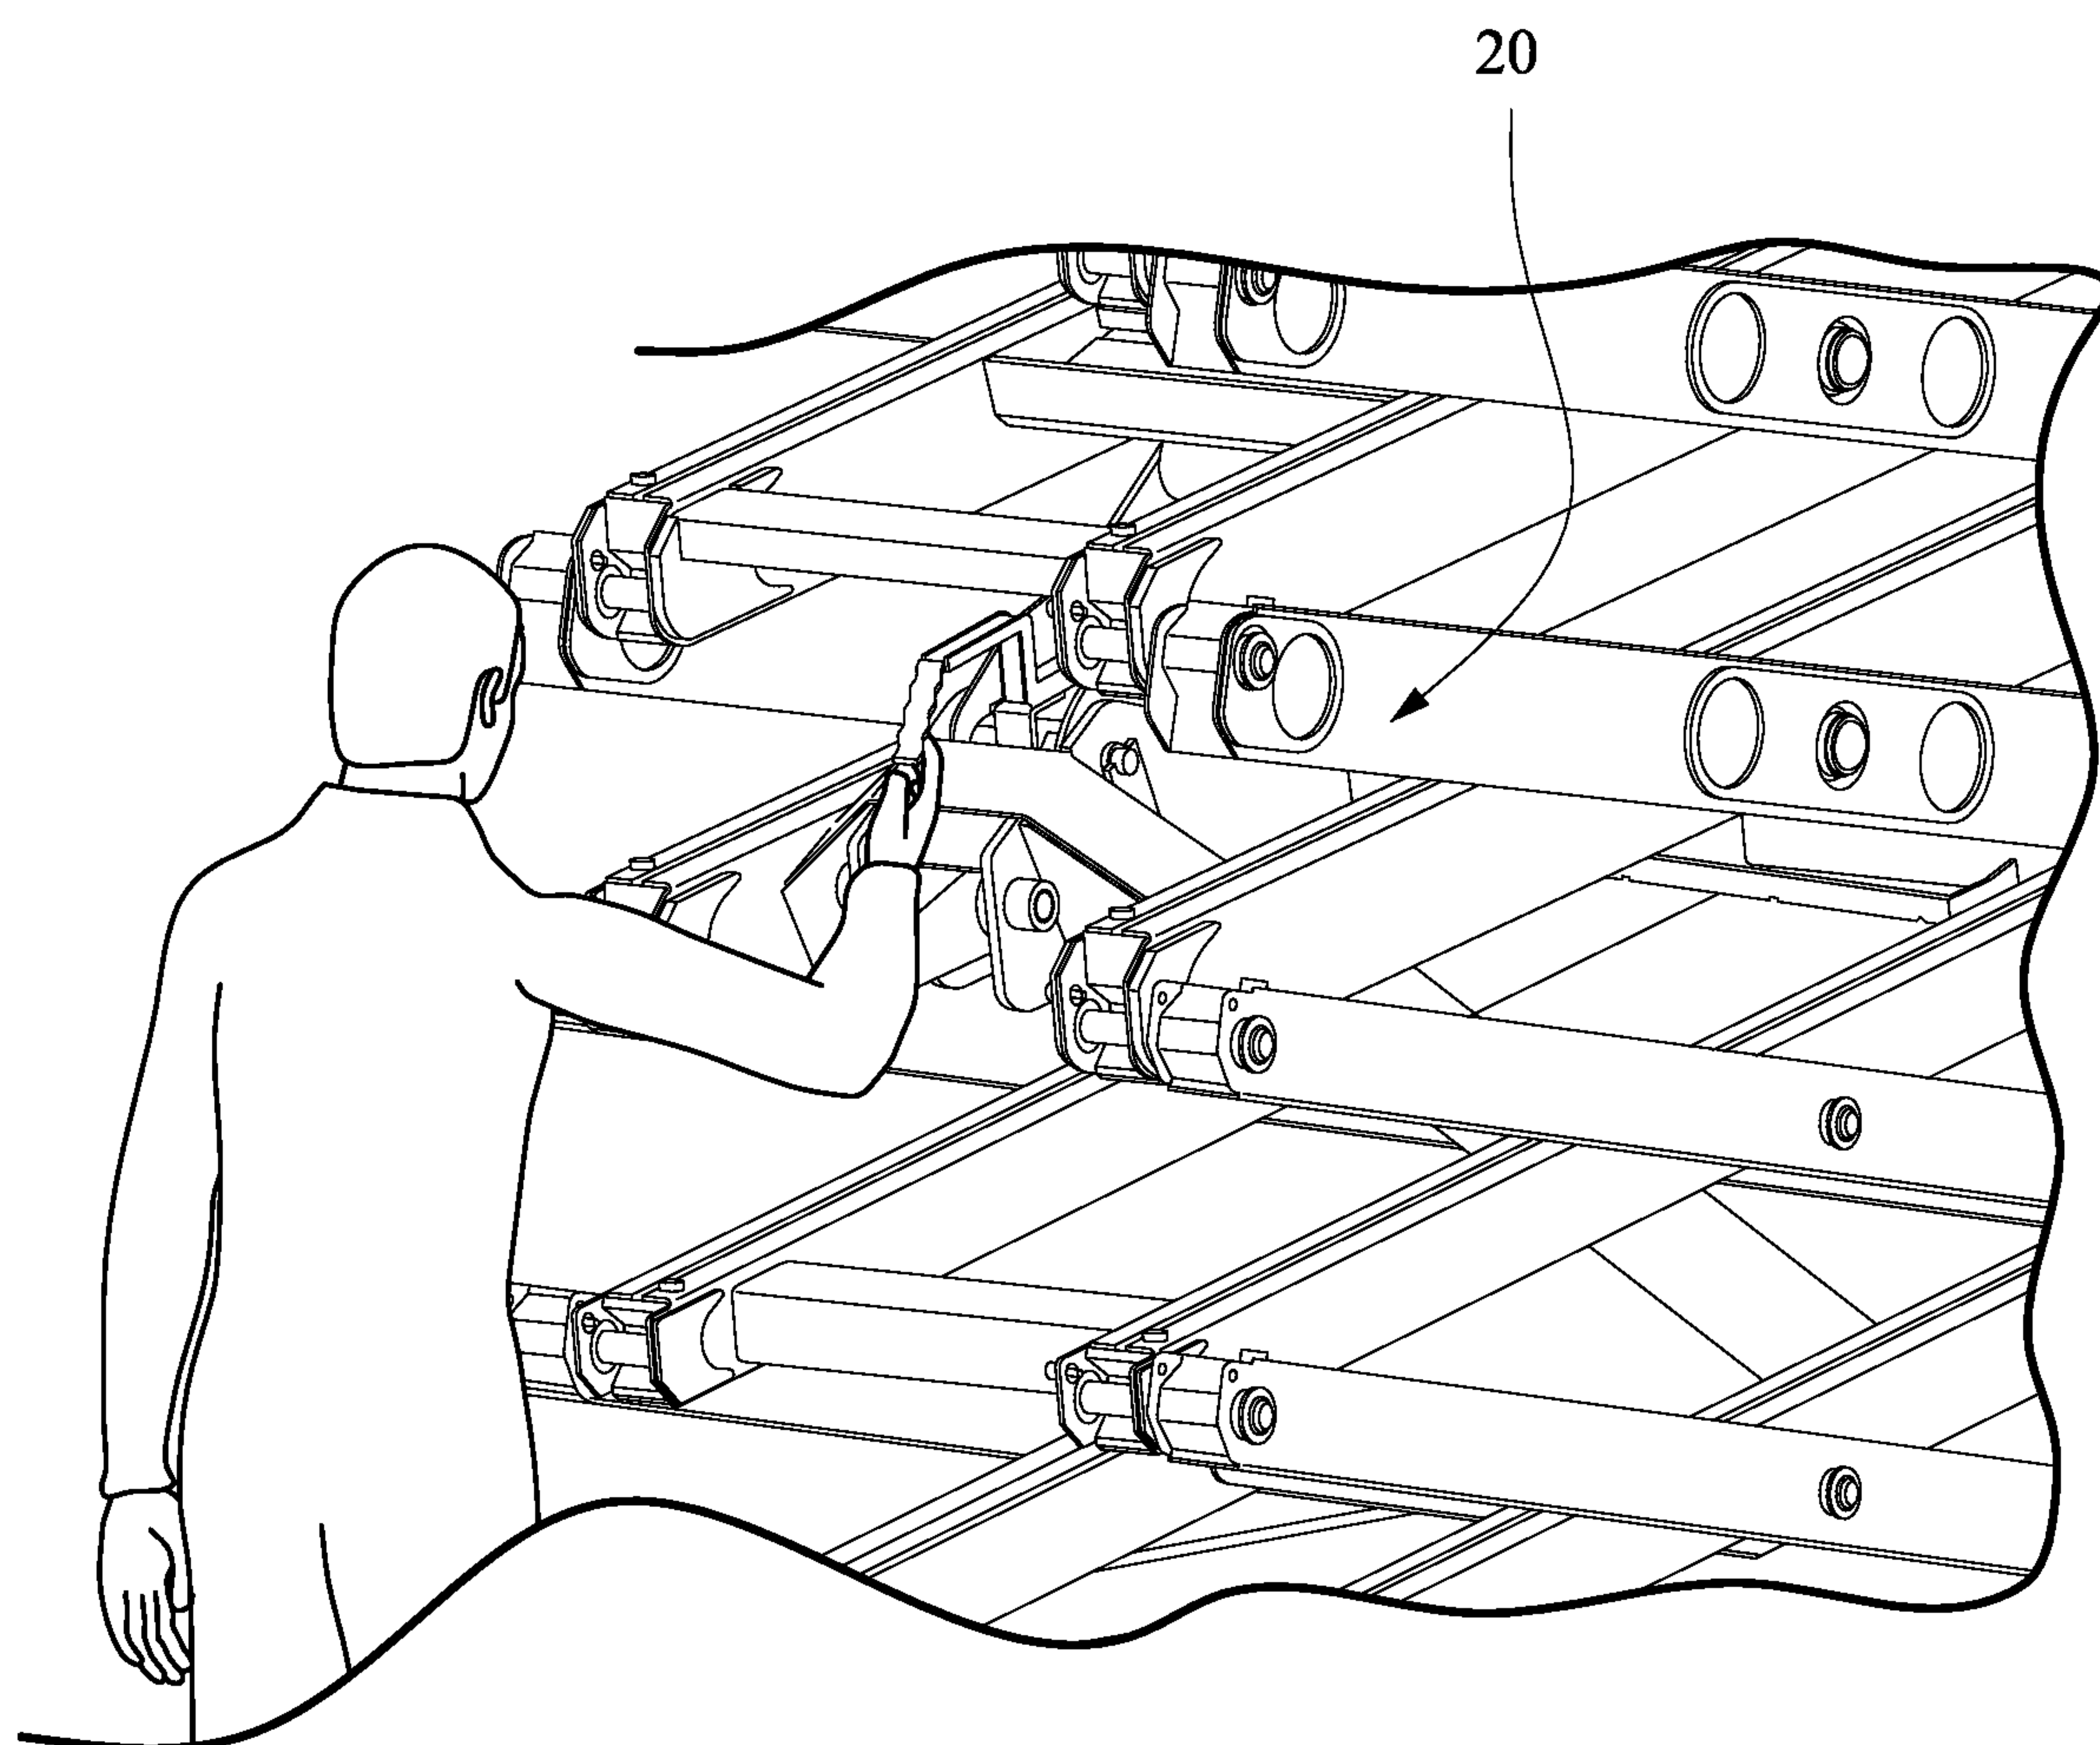


Fig. 2

3/4

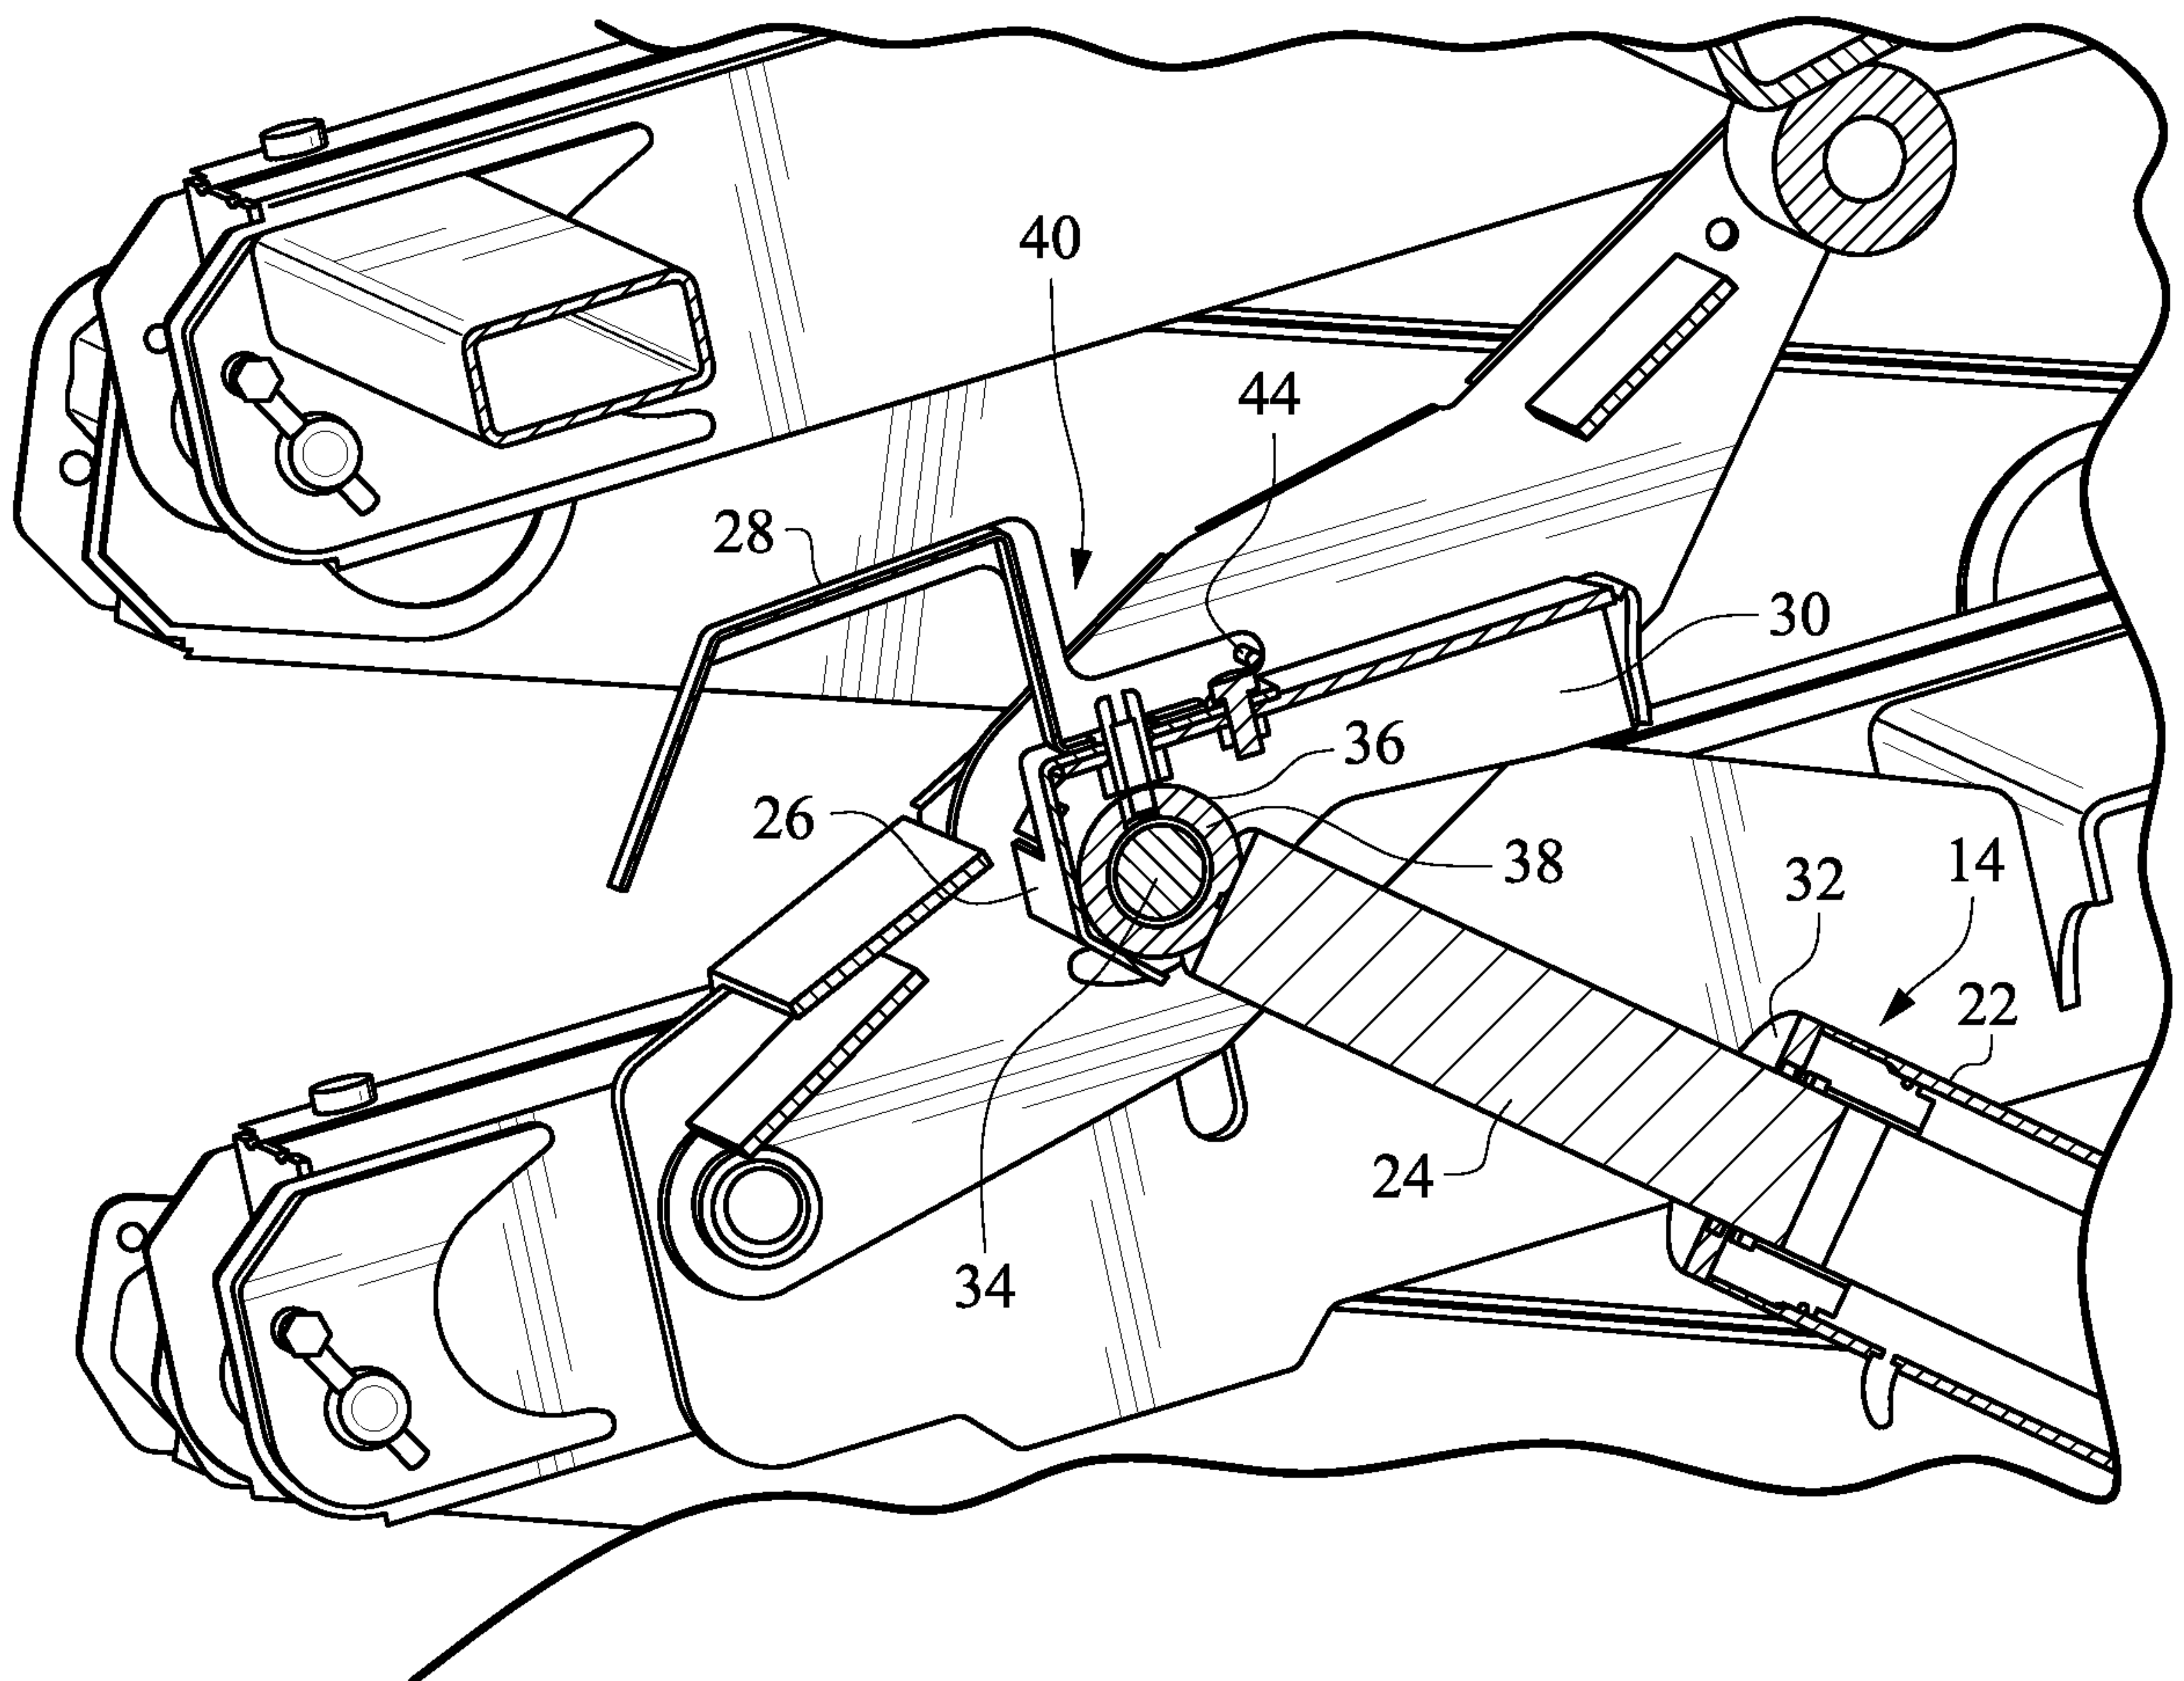


Fig. 3

4/4

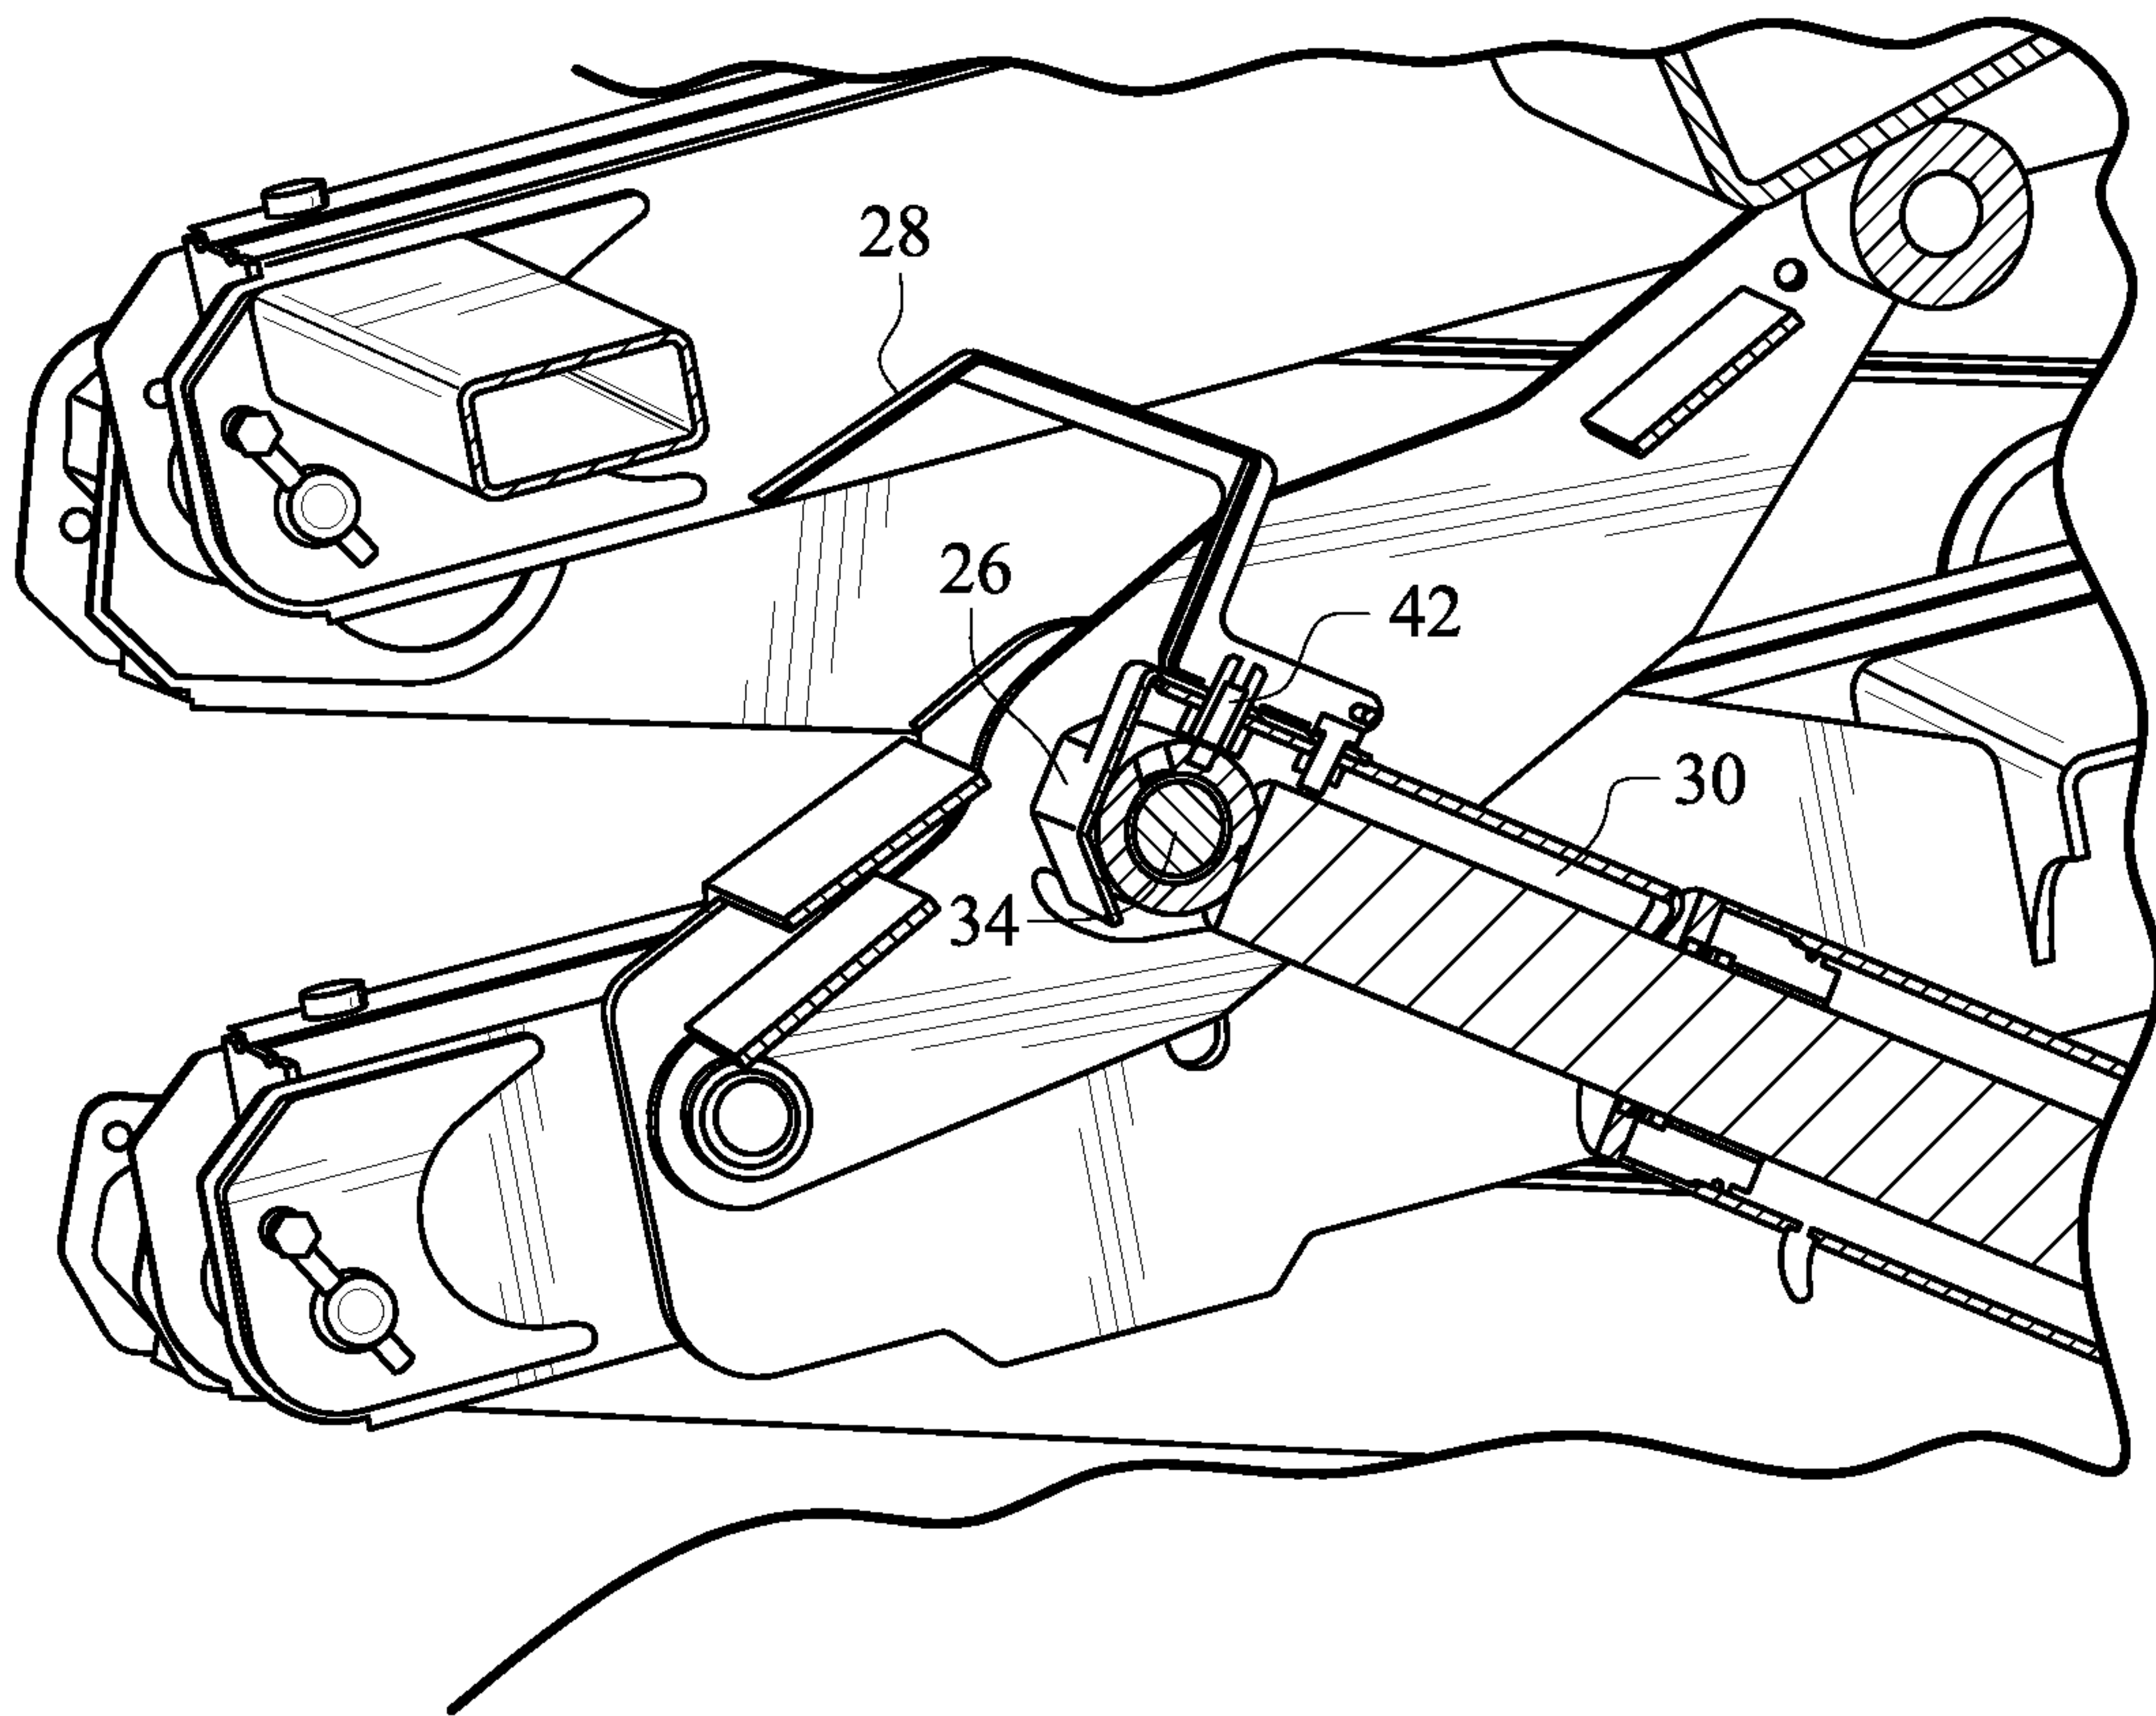


Fig. 4



Fig. 3