

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2017/046372 A1

(43) International Publication Date  
23 March 2017 (23.03.2017)

(51) International Patent Classification:  
*G06T 5/50* (2006.01)

(21) International Application Number:  
PCT/EP2016/072043

(22) International Filing Date:  
16 September 2016 (16.09.2016)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
15306436.5 17 September 2015 (17.09.2015) EP  
15306434.0 17 September 2015 (17.09.2015) EP

(71) Applicant: THOMSON LICENSING [FR/FR]; 1-5 rue Jeanne d'Arc, 92130 Issy-les-Moulineaux (FR).

(72) Inventors: DRAZIC, Valter; 975 avenue des Champs Blancs, ZAC des Champs Blancs, CS 17616, 35576 Cesson-Sévigné (FR). BOISSON, Guillaume; 975 avenue des Champs Blancs, ZAC des Champs Blancs, CS 17616, 35576 Cesson-Sévigné (FR). SEIFI, Mozdeh; 975 avenue des Champs Blancs, ZAC des Champs Blancs, CS 17616, 35576 Cesson-Sévigné (FR).

(74) Agent: BARR, Angela; Technicolor, 1-5 rue Jeanne d'Arc, 92443 Issy-les-Moulineaux (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,

[Continued on next page]

(54) Title: LIGHT FIELD DATA REPRESENTATION

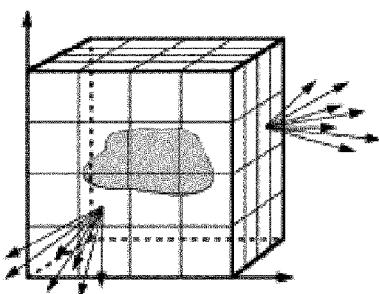


FIG. 4A

(57) Abstract: A method for reducing the parameters defining an acquired light field ray which enables only the colour associated with the light field ray to be stored instead of 4 light field coordinates (x,y,i,j) and its associated colour.

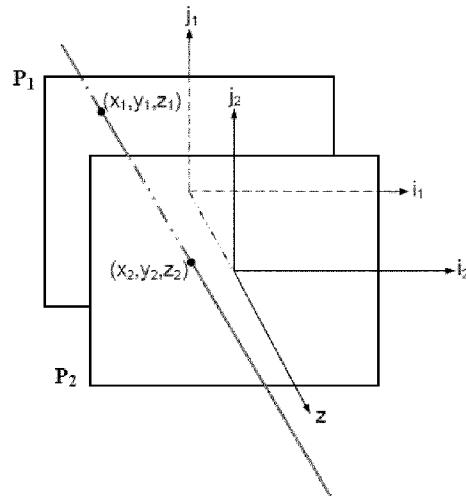


FIG. 4B



KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,

LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

**Published:**

— with international search report (Art. 21(3))

## LIGHT FIELD DATA REPRESENTATION

### TECHNICAL FIELD

The present invention relates to generation of data representing a light field. An 5 aspect of the invention relates to the provision and processing of light field metadata.

### BACKGROUND

Conventional cameras capture light from a three-dimensional scene on a two-dimensional sensor device sensitive to visible light. Light sensitive technology used in 10 such imaging devices is often based on semiconductor technology, capable of converting photons into electrons such as, for example, charge coupled devices (CCD) or complementary metal oxide technology (CMOS). A digital image photosensor, for example, typically includes an array of photosensitive cells, each cell being configured to capture incoming light. A 2D image providing spatial information is obtained from a 15 measurement of the total amount of light captured by each photosensitive cell of the image sensor device. While the 2D image can provide information on the intensity of the light and the colour of the light at spatial points of the photosensor(s), no information is provided on the direction of the incoming light.

Light field cameras (also known as radiance capturing cameras) can provide 20 directional information on incoming light rays in addition to 2D spatial information. The directional information may be obtained by the use of an array of micro-lenses, often referred to as a microlens array (MLA) associated with an image sensor. A light field array camera, for example, is provided with a microlens array and a photosensor. Light field cameras include plenoptic cameras, camera arrays and distributed cameras. A 25 plenoptic camera is provided with a main lens focusing light on a MLA, and a photosensor associated with the MLA. In other configurations of light field cameras a plurality of cameras each provided with its own lens and sensor may be used to obtain light field data.

A light field is often defined as a 4D function characterizing the light from different 30 directions at different points in a scene. The information on the directional distribution of the light rays is typically referred to as light field data or 4D data. Since the information provides 4 parameters – two dimensional positional information and two dimensional

angular information the directional distribution corresponds to a four-dimensional (4D) function. The light field may be interpreted as a two dimensional collection of 2D images of a scene.

The light field data obtained can be processed for many applications, for example,  
5 to generate refocused images of the scene, to generate images from different viewpoints,  
to provide depth information on the captured scene or to generate 3D images.

Light field data can take up large amounts of storage space which can make storage cumbersome and processing less efficient. In addition light field acquisition devices are extremely heterogeneous. Light field cameras are of different types for  
10 example plenoptic or camera arrays. Within each type there are many differences such as different optical arrangements, or micro-lenses of different focal lengths. Each camera has its own proprietary file format. At present there is no standard supporting the acquisition and transmission of multi-dimensional information for an exhaustive overview of the different parameters upon which a light-field depends. As such acquired light  
15 field data for different cameras have a diversity of formats

The present invention has been devised with the foregoing in mind.

## SUMMARY OF INVENTION

Embodiments of the invention set out to provide methods for reducing the  
20 parameters defining an acquired light field ray which enables only the colour associated with the light field ray to be stored instead of 4 light field co-ordinates (x,y,i,j) and its associated colour.

According to a first aspect of the invention there is provided a method of generating, from light field data in the form of pixels captured from a scene, geometrical  
25 data defining the path from the scene of light field rays corresponding to the captured light field data;

obtaining, from the geometrical data, intersection data defining intersections of the light field rays from the scene with a plurality of given reference planes, said reference planes corresponding to different depths in the scene, each set of  
30 intersection data corresponding to a light field ray having a colour value;

defining a parameter space of sampling cells for representation of the intersection data

determining, for example by discrete radon transformation or from calibration data, one or more digital data hyper-planes in the parameter space representing the intersection data;

providing a data format representative of the light field including data parameters defining the data hyper-planes in the parameter space and the colour value associated with each generated light field ray.

A data hyper plane in a 4D space is a set of points linked together by an equation of type  $a.x1+b.x2+c.y1+d.y2+e=0$ ; For example the equation may define a hyper plane relating light field parameter data as follows/

$$10 \quad (z_2 - z_3)(x_1 + y_1) + (z_3 - z_1)(x_2 + y_2) = (z_2 - z_1)(x_3 + y_3)$$

Where  $z1$  and  $z2$  define the depths of the reference planes,  $x1, y1$  define the intersection of a light field ray with reference plane 1,  $x2$  and  $y2$  define the intersection of the light field ray with reference plane 1, and  $x3, y3$  and  $z3$  define the intersection of the light field ray with a rendering plane.

15 In an embodiment, the data parameters defining the data hyper-planes include data representative of at least one of:

minimum value of intersection data of a first reference plane;  
maximum value of intersection data of the first reference plane;  
minimum value of intersection data of a second reference plane;

20 maximum value of intersection data of the second reference plane;

In an embodiment, the data parameters defining the data hyper-planes include data representative of at least one of:

the number of sampling cells defining the parameter space;  
the position of the first reference plane; and  
25 the position of the second reference plane.

In an embodiment, two orthogonal discrete radon transforms are applied in the parameter space to obtain the one or more digital lines .

In an embodiment, each data hyper plane format being defined by a plurality of cells of

the parameter space, at least one first cell representative of the interception of the line

30 with an axis and at least one second cell from which the slope of the line may be determined.

In an embodiment, each digital hyper plane is generated by application of Bresenham's algorithm.

In an embodiment, a beam of rays is represented as a plurality of lines having the same slope and different axis interception points.

5 In an embodiment, the data representative of the acquired light field data comprises data representative of the thickness of the beam based on upper and lower boundaries of the axis interception data of lines of the beam.

In an embodiment, the data representative of the acquired light field data is provided as meta data, the header of meta data comprising the ray diagram

10 parameters defining the graphical representation of the intersection data in a 2D ray diagram and the body of the metadata comprising data representative of colour of the ray.

Another aspect of the invention provides a device for providing metadata for captured light field data,

15 the device comprising

a light field data acquisition module for acquiring light field data captured by a light field camera and

20 a light field data generation module configured to generate, from light field data in the form of pixels captured from a scene, geometrical data defining the path from the scene of light field rays corresponding to the captured light field data;

obtain, from the geometrical data, intersection data defining intersections of the light field rays from the scene with a plurality of given reference planes, said reference planes being parallel to one another and corresponding to different depths in the 25 scene, each set of intersection data corresponding to a light field ray having a colour value;

define a parameter space of sampling cells for representation of the intersection data

30 determine, by discrete radon transformation, one or more digital data hyper-planes in the parameter space representing the intersection data;

provide a data format representative of the light field including data parameters defining the data hyper-planes in the parameter space and the colour value associated with each generated light field ray.

A further aspect of the invention provides a light field imaging device comprising:  
an array of micro lenses arranged in a regular lattice structure; a photosensor configured  
to capture light projected on the photosensor from the array of micro lenses, the  
photosensor comprising sets of pixels, each set of pixels being optically associated with  
5 a respective micro lens of the array of micro lenses; and a device for providing metadata  
in accordance with any embodiment of the second aspect of the invention.

Another aspect of the invention provides a device for rendering an image from  
light field data obtained using a method in accordance with any embodiment of the first  
aspect of the invention.

10 Another aspect of the invention provides a data package for data representative  
of rays of a light field comprising

ray diagram parameters defining the graphical representation in a ray diagram of  
intersection data of the light rays, the intersection data defining intersections of the light  
field rays from the scene with a plurality of given reference planes, said reference planes  
15 corresponding to different depths in the scene; and

colour data defining colours of the light field ray.

The data package may be carried by a signal for example or provided on a non-  
transient medium.

Another aspect of the invention provides a computer implemented method for generating  
20 data representative of a light field, the method comprising:

obtaining intersection data defining intersections of light field rays from the scene  
with a plurality of given reference planes, said reference planes corresponding to  
different depths in the scene, each set of intersection data corresponding to a light field  
ray having a colour value;

25 determining, one or more digital data hyper-planes representing the intersection  
data in a parameter space of sampling cells;

scanning data on or around the data hyper-planes by means of parametric  
equations to sample data representative of the light field ray

30 providing a data format representative of the light field including at least one data  
parameters defining the at least one data hyper plane in the parameter space and the  
colour value associated with each generated light field ray.

In an embodiment, the one or more digital data hyper-planes are determined by discrete radon transformation.

In an embodiment, two orthogonal discrete radon transforms are applied in the parameter space to obtain the one or more digital hyper planes.

5 In an embodiment, the one or more data hyper-planes are determined from data defining camera acquisition parameters

In an embodiment, scanning the data comprises applying the following algorithm:

```
for each  $i \in [0, N-1] \subset \mathbb{N}$ 
  for each  $j \in [0, M-1] \subset \mathbb{N}$ 
    for each  $k \in [0, K-1] \subset \mathbb{N}$ 
      calculate  $l \in \mathbb{N}$ 
      store RGB value of the ray located in cell  $i, j, k, l$ 
    end for  $k$ 
  end for  $j$ 
end for  $i$ 
```

15 A further aspect of the invention relates to a data package for data representative of rays of a light field comprising at least one data parameter defining a hyper-plane in a parameter space, the hyper plane representing intersection data defining intersections of light field rays from the scene with a plurality of given reference planes, said reference planes corresponding to different depths in the scene, each set of intersection data 20 corresponding to a light field ray having a colour value; and the colour value associated with each light field ray.

Another aspect of the invention provides a computer implemented method for generating data representative of a light field comprising acquiring light field data representative of light field rays captured from a scene; obtaining, from the acquired light 25 field data, intersection data defining intersections of the light field rays from the scene with a plurality of given reference planes, said reference planes corresponding to different depths in the scene; and obtaining ray diagram parameters defining the graphical representation of the intersection data in a ray diagram to provide data representative of the acquired light field data.

In an embodiment, the interception data corresponding to the light field rays is graphically represented in the ray diagram as datalines and the ray diagram parameters include data representative of at least one of: the slope of a dataline; and an interception of a dataline with an axis of the ray diagram.

5 In an embodiment, the datalines are detected in the ray diagram by applying a Radon transform.

In an embodiment, the graphical representation is provided as a matrix of cells to provide a digital dataline, each digital dataline format being defined by a plurality of cells, at least one first cell representative of the interception of the line with an axis and at least 10 one second cell from which the slope of the line may be determined.

In an embodiment, each digital dataline is generated by application of Bresenham's algorithm.

In an embodiment, the data representative of the acquired light field data comprises data defining the matrix of cells.

15 In an embodiment, the data representative of the acquired light field data further comprises colour data representing the colour of the corresponding light field rays.

In an embodiment, the data representative of the acquired light field data comprises data defining the number of cameras used to capture the light field rays.

20 In an embodiment, a beam of rays is represented as a plurality of lines having the same slope and different axis interception points.

In an embodiment, the data representative of the acquired light field data comprises data representative of the thickness of the beam based on upper and lower boundaries of the axis interception data of lines of the beam.

25 In an embodiment, the data representative of the acquired light field data is provided as meta data, the header of meta data comprising the ray diagram parameters defining the graphical representation of the intersection data in a ray diagram and the body of the metadata comprising data representative of colour of the ray.

30 A further aspect provides a for providing metadata for captured light field data, the device comprising a light field data acquisition module for acquiring light field data captured by a light field camera and a light field data generation module configured to

obtain, from the acquired light field data, intersection data defining intersections of the light field rays from the scene with a plurality of given reference planes, said reference planes corresponding to different depths in the scene; and obtain ray diagram

parameters defining the graphical representation of the intersection data in a ray diagram to provide data representative of the acquired light field data.

Another aspect provides a light field imaging device comprising: an array of micro lenses arranged in a regular lattice structure; a photosensor configured to capture light projected on the photosensor from the array of micro lenses, the photosensor comprising sets of pixels, each set of pixels being optically associated with a respective micro lens of the array of micro lenses; and a device for providing metadata as described above

At least part of the method according to embodiments of the invention may be computer implemented. Accordingly, such elements may take the form of an entirely hardware embodiment, an entirely software embodiment (including firmware, resident software, micro-code, etc.) or an embodiment combining software and hardware aspects that may all generally be referred to herein as a "circuit", "module" or "system". Furthermore, such elements may take the form of a computer program product embodied in any tangible medium of expression having computer usable program code embodied in the medium.

Since elements of the present invention can be implemented in software, the present invention can be embodied as computer readable code for provision to a programmable apparatus on any suitable carrier medium. A tangible carrier medium may comprise a storage medium such as a floppy disk, a CD-ROM, a hard disk drive, a magnetic tape device or a solid state memory device and the like. A transient carrier medium may include a signal such as an electrical signal, an electronic signal, an optical signal, an acoustic signal, a magnetic signal or an electromagnetic signal, e.g. a microwave or RF signal.

## 25 BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the invention will now be described, by way of example only, and with reference to the following drawings in which:

FIG. 1A is a schematic diagram of a light field camera according to a first embodiment of the invention;

30 FIG. 1B is a schematic diagram of a light field camera according to a second embodiment of the invention;

FIG. 2A is a functional diagram of a light field camera according to an embodiment of the invention;

FIG. 2B is a functional diagram of a light field data formator and light field data processor according to an embodiment of the invention;

FIG. 3 is an example of a 2D light field image formed on a photosensor array;

FIG. 4A and 4B graphically illustrate the use of reference planes for 5 parameterisation of light field data in accordance with one or more embodiments of the invention;

FIG. 5 schematically illustrates representation of light field rays with respect to reference planes in accordance with embodiments of the invention

FIG. 6A to 6D graphically illustrate parameterisation of rays including 10 representation of rays in 2D ray diagrams, in accordance with one or more embodiments of the invention;

FIG. 7 schematically illustrates parameters for representation of light field rays in accordance with embodiments of the invention;

FIG. 8 is a 2D ray diagram graphically illustrating intersection data in accordance 15 with embodiments of the invention;

FIG. 9 graphically illustrates a digital line generated in accordance with embodiments of the invention;

FIG. 10 graphically illustrates digital line generated in accordance with embodiments of the invention;

20 FIG. 11A-11C graphically illustrate Radon transforms applied to a digital line in accordance with embodiments of the invention;

FIG. 12A is a flow chart illustrating steps of a method in accordance with one or more embodiments of the invention;

25 FIG. 12B is a functional block diagram illustrating modules of a device for providing a light data format in accordance with one or more embodiments of the invention;

FIG. 13A schematically illustrates examples of pixel back tracing according to embodiments of the invention;

30 FIG. 13B schematically illustrates examples of acquisition devices used for ray back tracing;

FIG. 14 is an example of a parameter space in accordance with embodiments of the invention; and

FIG. 15-17 are examples of sampled light ray parameters in accordance with embodiments of the invention

FIG. 18A is a flow chart illustrating steps of a method in accordance with one or more embodiments of the invention;

FIG. 18B is a functional block diagram illustrating modules of a device for providing a light data format in accordance with one or more embodiments of the invention;

FIG. 18C is a functional block diagram illustrating modules of a display device for in accordance with one or more embodiments of the invention;

FIG. 19 is a 2D ray diagram graphically illustrating intersection data for a plurality of cameras in accordance with embodiments of the invention

#### DETAILED DESCRIPTION

Light-field cameras are typically used to record a 4D light-field on a sensor composed of an array of pixels. The 4D light-field data provides 2-dimensional spatial information and 2-dimensional angular information on the incoming light. Such light-field cameras may be for instance: a plenoptic camera 100 comprising a main lens 101, an array of lenses 110 and a photo sensor 120 as illustrated in Figure 1A; or a multi-camera array comprising an array of lenses 210 and a photosensor 220 without a main lens, as illustrated in Figure 1B. A multi-array camera may be considered as a particular case of a plenoptic camera where the main lens has an infinite focal.

Embodiments of the invention provide formatting of light field data for further processing applications such as format conversion, refocusing, viewpoint change and 3D image generation.

Figure 1A is a schematic diagram of a light field camera for which one or more embodiments of the invention may be applied.

The light field camera 100 of Figure 1A is a plenoptic type light field camera comprising a micro lens array 110 and an image sensor 120 associated with the micro lens array 110. Further optics may be provided such as an aperture 102 for enabling a selectable amount of light to enter into the light field camera. The lens arrangement further includes a main (objective) lens 101 for focusing light towards the micro lens array 110.

The micro lens array 110 is composed of an array of microlenses 111, 112, 113...11n arranged, in a regular lattice structure. For example, the structure may be a rectangular lattice of rows and columns. The micro lens array may also be referred to as

a lenslet array. For purposes of illustration, the microlens array 110 is shown with a relatively small number of microlenses, but it will be appreciated that the number of microlenses may reach up to several thousand or even several million microlenses.

5        Optionally, spacers might be placed around each micro lens of the micro-lens array 110 between the micro-lens array 110 and the image sensor 120 in order to prevent light from one micro lens from overlapping with light of other microlenses of the microlens array 110 at the image sensor 120.

10      The image sensor comprises a photosensor array 120 composed of a number  $m$  of photo sensors 121, 122, 123, 124.....12 $m$  arranged in a lattice structure. For example the structure may be a rectangular lattice of rows and columns. Each photosensor 121, 122, 123, 124.....12 $m$  corresponds to a pixel or a group of pixels of the raw image of the scene captured by the photosensor array 120, each pixel covering a part (also referred to as a point) of the scene. For purposes of illustration, the photosensor array 120 is illustrated as having a relatively small number of photosensors 121 to 12 $m$ . It will be 15 appreciated, however, that, the number of photosensors is not limited to that illustrated in Figure 1A but may be extended to any number of photosensors, for example several thousand or several million photosensors. As an illustrative example, an image of 12.4 megapixels may be provided by an array of 4088x3040 pixels/photosensors. The image sensor may be for example a charge coupled device (CCD).

20      The microlenses 111, 112, 11 $n$  of the micro lens array 110 are arranged such that each microlens is optically associated with photosensors of the photo sensor array 120. The photosensor array 120 is generally of finer pitch than the microlens array. Accordingly, each microlens is associated with a plurality of photosensors of the photosensor array 120. Optical association between a microlens and a group of 25 photosensors signifies that the light rays passing through a given microlens reach at least one of the group of photosensors optically associated with the given microlens.

30      The interposition of the microlens array 110 between the main lens 101 and the photosensor 120 results in multiple images being formed on the photosensor array 120. Each microlens of the microlens array 110 projects a respective image, onto the associated photosensors of the photosensor array 120. Accordingly the raw image captured by the image sensor 120 is composed of an array of small images, as for example illustrated in Figure 3, typically referred to as micro-images. Each micro-image corresponds to a partial field of view from a respective different viewpoint. and corresponds to a micro-lens of the microlens array. Each pixel of photosensor 120 may 35 be seen as corresponding to a 4D light field coordinate where two dimensions specify its spatial position on the sensor and two dimensions specify the angular or directional information of light that is incident upon that pixel according to the 2D position of the pixel within the microimage which it belongs to.

A color filter array (CFA) may in some cases be arranged on the microlens array 110 or on the photosensor array 120. The CFA typically arranges RGB (Red, Green and Blue) color filters on the photosensor or microlens array, the RGB arrangement taking, for example, the form of a Bayer filter mosaic. One color filter (red, green or blue filter) 5 may be associated with an MLA according to a predetermined pattern, comprising 50 % green, 25 % red and 25 % blue in the example of a Bayer filter, such a pattern also being referred to as a RGBG, GRGB or RGGB pattern. It will be appreciated that, the arrangement of the color filters on the microlens array 110 or photosensor array 120 is not limited to a RGGB pattern. In other embodiments, the predetermined pattern may be 10 a RGBE pattern with one of the green filters modified to 'Emerald' (for a block of four color filters); a CYYM pattern with one 'Cyan' filter, two 'Yellow' filters and one 'Magenta' filter (for a block of four color filters); a CYGM pattern with one 'Cyan' filter, one 'Yellow' filter, one 'Green' filter and one 'Magenta' filter; a RGBW pattern with one 'Red' filter, one 'Green' filter, one 'Blue' filter and one 'White' filter, several arrangement being possible 15 (for example arranged on a block of four color filters with 'White' for the upper left filter, 'Red' for the upper right filter, 'Blue' for the lower left filter and 'Green' for the lower right filter; or arranged on a block of 4x4 color filters with 'White', 'Blue', 'White', 'Green' for the first line, 'Blue', 'White', 'Green', 'White' for the second line below the first line, 'White', 'Green', 'White', 'Red' for the third line below the second line and 'Green', 'White', 'Red', 20 'White' for the fourth line below the third line).

The gap between the microlens array and the photosensor array may be composed of air, of an optical material having an index  $n$  (for example a glass layer) or of multiple layers comprising at least one layer air layer and at least one optical material layer. Using a glass layer to form the gap has the advantages of keeping the microlens 25 array 110 at a constant distance from the photosensor array 120 uniformly across the photosensor array 120 and of reducing this distance when needed. If  $d$  is the distance between the output of the microlens array 110 and the photosensor array 120 along a longitudinal axis, having a layer composed of an optical material with an index  $n$  ( $n > 1$ , for example  $n = 1.5$ ) between the micro lens array 110 and the photosensor array 120 30 enables the distance to be set to  $d/n$  without modifying the distance  $d$ . By adapting/modifying the index of the optical material of the layer forming the gap, it is possible to adapt/modify a parameter representative of the distance between the microlens array 110 and the photosensor array 120 without modifying the distance  $d$ .

Figure 1B is a schematic diagram of a light field camera according to a second 35 embodiment of the invention.

The light field camera 200 according to the second embodiment of the invention is a multi camera array type light field camera comprising a micro lens array 210 and an

image sensor 220 associated with the micro lens array 210. In this embodiment a main lens 201 for focusing light towards the micro lens array 210 is not present. Elements such as the photosensor array 220 and micro lens array 210 operate in a similar manner to the corresponding elements of the plenoptic type camera of Figure 1A. The main 5 difference is that the main lens is not present in the embodiment of Figure 1B. Each micro-image corresponds to a full field of view from a respective different viewpoint.

Figure 2A is a block diagram of a light field camera device in accordance with an embodiment of the invention. The light field camera comprises an aperture/shutter 102, a main (objective) lens 101, a micro lens array 110 and a 10 photosensor array 120 in accordance with the light field camera of Figure 1A. In some embodiments the light field camera includes a shutter release that is activated to capture a light-field image of a subject or scene. It will be appreciated that the functional features may also be applied to the light field camera of Figure 1B.

The photosensor array 120 provides light field image data which is acquired by 15 LF Data acquisition module 140 for generation of a light field data format by light field data formatting module 150 and/or for processing by light field data processor 155. Light field data may be stored, after acquisition and after processing, in memory 190 in a raw data format, as sub aperture images or focal stacks, or in a light field data format in accordance with embodiments of the invention.

20 In the illustrated example, the light field data formatting module 150 and the light field data processor 155 are disposed in or integrated into the light field camera 100. In other embodiments of the invention the light field data formatting module 150 and/or the light field data processor 155 may be provided in a separate component external to the light field capture camera. The separate component may be local or remote with respect 25 to the light field image capture device. It will be appreciated that any suitable wired or wireless protocol may be used for transmitting light field image data to the formatting module 150 or light field data processor 155; for example the light field data processor may transfer captured light field image data and/ or other data via the Internet, a cellular data network, a WiFi network, a BlueTooth communication protocol, and/ or any other 30 suitable means.

The light field data formatting module 150 is configured to generate data representative of the acquired light field, in accordance with embodiments of the invention. The light field data formatting module 150 may be implemented in software, hardware or a combination thereof.

35 The light field data processor 155 is configured to operate on raw light field image data received directly from the LF data acquisition module 140 for example to generate focal stacks or a matrix of views in accordance with embodiments of the

invention. Output data, such as, for example, still images, 2D video streams, and the like of the captured scene may be generated. The light field data processor may be implemented in software, hardware or a combination thereof.

In at least one embodiment, the light field camera 100 may also include a user interface 160 for enabling a user to provide user input to control operation of camera 100 by controller 170. Control of the camera may include one or more of control of optical parameters of the camera such as shutter speed, or in the case of an adjustable light field camera, control of the relative distance between the microlens array and the photosensor, or the relative distance between the objective lens and the microlens array.

In some embodiments the relative distances between optical elements of the light field camera may be manually adjusted. Control of the camera may also include control of other light field data acquisition parameters, light field data formatting parameters or light field processing parameters of the camera. The user interface 160 may comprise any suitable user input device(s) such as a touchscreen, buttons, keyboard, pointing device, and/ or the like. In this way, input received by the user interface can be used to control and/ or configure the LF data formatting module 150 for controlling the data formatting, the LF data processor 155 for controlling the processing of the acquired light field data and controller 170 for controlling the light field camera 100.

The light field camera includes a power source 180, such as one or more replaceable or rechargeable batteries. The light field camera comprises memory 190 for storing captured light-field data and/or rendered final images or other data such as software for implementing methods of embodiments of the invention. The memory can include external and/ or internal memory. In at least one embodiment, the memory can be provided at a separate device and/ or location from camera 100. In one embodiment, the memory includes a removable/swappable storage device such as a memory stick.

The light field camera may also include a display unit 165 (e.g., an LCD screen) for viewing scenes in front of the camera prior to capture and/or for viewing previously captured and/or rendered images. The screen 165 may also be used to display one or more menus or other information to the user. The light field camera may further include one or more I/O interfaces 195, such as FireWire or Universal Serial Bus (USB) interfaces, or wired or wireless communication interfaces for data communication via the Internet, a cellular data network, a WiFi network, a BlueTooth communication protocol, and/ or any other suitable means. The I/O interface 195 may be used for transferring data, such as light field representative data generated by LF data formatting module in accordance with embodiments of the invention and light field data such as raw light field data or data processed by LF data processor 155, to and from external devices such as computer systems or display units, for rendering applications.

Figure 2B is a block diagram illustrating a particular embodiment of a potential implementation of light field data formatting module 150 and the light field data processor 153.

The circuit 300 includes memory 390, a memory controller 345 and processing 5 circuitry 340 comprising one or more processing units (CPU(s)). The one or more processing units 340 are configured to run various software programs and/or sets of instructions stored in the memory 390 to perform various functions including light field data formatting and light field data processing. Software components stored in the memory include a data formatting module (or set of instructions) 350 for generating data 10 representative of acquired light data in accordance with embodiments of the invention and a light field data processing module (or set of instructions) 355 for processing light field data in accordance with embodiments of the invention. Other modules may be included in the memory for applications of the light field camera device such as an operating system module 351 for controlling general system tasks (e.g. power 15 management, memory management) and for facilitating communication between the various hardware and software components of the device 300, and an interface module 352 for controlling and managing communication with other devices via I/O interface ports.

Figure 3 illustrates an example of a 2D image formed on the photosensor array 20 120 of Figure 1A or the photosensor array 220 of Figure 1B. The 2D image, often referred to as a raw 4D light field image, is composed of an array of micro images MI, each micro image being produced by the respective micro lens  $(i, j)$  of the microlens array 110,210. The micro images are arranged in the array in a rectangular lattice structure defined by axes  $i$  and  $j$ . A micro lens image may be referenced by the respective micro lens 25 coordinates  $(i, j)$ . A pixel PI of the photosensor 120, 220 may be referenced by its spatial coordinates  $(x, y)$ . 4D light field data associated with a given pixel may be referenced as  $(x, y, i, j)$  where  $x$  and  $y$  are referenced for each micro lens; For example for a micro lens having co-ordinates  $(i, j)$  and 20x20 pixels  $0 < x < 19$  and  $0 < y < 19$ .

There are several ways of representing (or defining) a 4D light-field image. For 30 example, a 4D light-field image can be represented, by a collection of micro-lens images as previously described with reference to Figure 3. A 4D light-field image may also be represented, when recorded by a plenoptic camera by a set of sub-aperture images. Each sub-aperture image of composed of pixels of the same position selected from each

microlens image. Furthermore, a 4D light-field image may be represented by a set of epipolar images.

Embodiments of the invention provide representation of light field data based on the intersection of rays from a light field scene through a plurality of given geometrical 5 planes. In this way the diversity in formats and light field devices may be taken into account.

For the purposes of simplicity, a method for parametrizing the four dimensions of lightfield radiance may be with reference to the cube illustrated in Figure 4A. All six faces of the cube may be used to parameterize the light-field. In order to parameterise 10 direction, a second set of planes parallel to the cube faces, may be added. In this way the light field may be defined with respect to six pairs of planes with normals along the axis directions as:

$$\vec{i}, -\vec{i}, \vec{j}, -\vec{j}, \vec{k}, -\vec{k}$$

Figure 4B illustrates a light field ray passing through two reference planes  $P_1$  and 15  $P_2$  used for parameterisation positioned parallel to one another and located at known depths  $z_1$  and  $z_2$  respectively. The light field ray intersects the first reference plane  $P_1$  at depth  $z_1$  at intersection point  $(x_1, y_1)$  and intersects the second reference plane  $P_2$  at depth  $z_2$  at intersection point  $(x_2, y_2)$ . In this way the light field ray may be identified by four coordinates  $(x_1, y_1, x_2, y_2)$ . The light field can thus be parameterized by a pair of 20 reference planes for parameterization  $P_1, P_2$  also referred herein as parametrization planes, with each light field ray being represented as a point  $(x_1, y_1, x_2, y_2) \in R^4$  in 4D ray space.

For example an origin of the reference co-ordinate system may be placed at the center of a plane  $P_1$  generated by the basis vectors of the coordinate axis system 25  $(\vec{i}_1, \vec{j}_1)$ . The  $\vec{k}$  axis is normal to the generated plane  $P_1$  and the second plane  $P_2$  can be placed for the sake of simplicity at a distance  $z=\Delta$  from plane  $P_1$  along the  $\vec{k}$  axis. In order to take into account the six different directions of propagation:

$$\vec{i}, -\vec{i}, \vec{j}, -\vec{j}, \vec{k}, -\vec{k}$$

the entire light-field may be characterized by six pairs of such planes. A pair of planes, often referred to as a light slab characterizes the light-field interacting with the sensor or sensor array of the light field camera along a direction of propagation.

5 The position of a reference plane for parameterization can be given as:

$\vec{x}_0 = d\vec{n}$  where  $\vec{n}$  is the normal and  $d$  is an offset from the origin of the 3D coordinate system along the direction of the normal.

A Cartesian equation of a reference plane for parameterisation can be given as:

$$\vec{n}(\vec{x} - \vec{x}_0) = 0$$

10

As the light-field is a function of four variables, it can be difficult to illustrate in general. To facilitate illustration a 2D slice may be used and particular sets of light field rays mapped into 2D graphical representations. Figure 6 shows examples of two different representations of such 2D slices restricted to the  $x_1$  and  $x_2$  axes. The left hand side, of

15 Figure 6 illustrates respective 2D slices for different arrangements of light field rays. On the right hand side, the light-field data for each set of rays is graphically illustrated in a 2D ray coordinate system or 2D ray diagram, also referred to as a phase-space system. Each point corresponds to a light ray and is defined by its  $x$  intersection point  $x_1$  with the first reference plane  $P_1$  and its  $x$  intersection point  $x_2$  with the second reference plane  $P_2$ .

20 Figure 6A shows a collimated set of rays, Figure 6B shows a divergent ray fan, Figure 5C shows a convergent set of rays and Figure 5D depicts a focused ray fan.

25 In the 2D ray diagram of Figure 6A, collimated set of light field rays with various angles of incidence are represented. When the ray set is parallel to the  $k$  axis, then each light field ray is plotted along a  $45^\circ$  line. When the set of rays are more inclined, the line shifts upwards in the 2D diagram, and when the set of light field rays are directed downwards, the line also shifts downward (negative  $x_2$ ). Consequently parallel rays will map onto a line at  $45^\circ$ , and if the parallel set of rays makes an angle with the  $z$  axis, the

X<sub>2</sub> line intercept shifts accordingly. In the 2D ray diagram of Figure 6B various different degrees of divergence are plotted. As the point of divergence is moved from infinity toward the axis X<sub>1</sub>, the 2D ray line representation remains linear but the steepness of the lines increases with the amount of divergence. At the limit, if the point from where 5 the set of rays diverges is on the x<sub>1</sub> axis, the rays would be plotted along the vertical axis x<sub>2</sub> on the 2D ray diagram. The 2D ray diagram of Figure 6C, graphically represents a convergent set of rays. As the point of convergence is pulled toward the X<sub>2</sub> axis, the rays map to lines of decreasing gradient. The ray diagram of Figure 6D is the limit when the convergence point is on X<sub>2</sub>, a focused set of rays, then all rays on the diagram are 10 located on the horizontal axis.

In embodiments of the invention a 4D ray diagram may be used as basic representation of a light field captured by one or more light field cameras with certain portions of the light field data being generated from the raw captured format.

If a light field ray has a known position:

15  $\vec{x}_i(x_i, y_i, z_i)$  and a normalised propagation vector:

$\vec{u}(u_1, u_2, u_3)$  the general parametric equation of a ray in 3D may be given as :

$$\vec{x} = t\vec{u} + \vec{x}_i$$

The co-ordinates of the intersection  $\vec{x}_1$  between the light field ray and a reference 20 plane are given as:

$$\vec{x}_1 = \vec{x}_i + \vec{u} \frac{\vec{n}(\vec{x}_0 - \vec{x}_i)}{\vec{u}\vec{n}} \quad (A)$$

There is no intersection between the light field rays and the reference parameterization if the following condition is not satisfied:

$$(\vec{x}_1 - \vec{x}_0)\vec{u} > 0$$

Due to the perpendicularity with one of the axes of the system of the pair of reference planes used to parameterize the light-field, one of the components of the ray intersection is always constant for each plane. Hence if there is an intersection of a light field ray  $\vec{x}_1$  with the first reference plane, and the intersection  $\vec{x}_2$  of the said light field with the second reference plane, four coordinates vary and equation A can be used to calculate the four parameters of a light field ray. These four parameters can be used to build up a 4D ray diagram of the light-field.

Assuming parameterization of the light-field with reference to two parameterization reference planes, data representing the light field may be obtained as follows. If a reference system is set as pictured in Figure 5 a first parametrization plane P1 is perpendicular to z axis at  $z = z_1$ , a second parametrization plane P2 is arranged perpendicular to the z axis at  $z = z_2$  and a ray whose light field parameters are  $L(x_1; y_1; x_2; y_2)$  are to be rendered at a location  $z = z_3$  where a photosensor array of a light field camera is positioned. From equation (A) :

$$\vec{x}_3 = \vec{x}_2 + \vec{u} \frac{\vec{n}(z_3 \vec{n} - \vec{x}_2)}{\vec{u} \vec{n}}$$

$$\vec{x}_3 = \vec{x}_1 + \vec{u} \frac{\vec{n}(z_3 \vec{n} - \vec{x}_1)}{\vec{u} \vec{n}}$$

with

$$\vec{u} = \frac{\vec{x}_2 - \vec{x}_1}{\|\vec{x}_2 - \vec{x}_1\|} = (u_x, u_y, u_z)$$

$$\vec{n}(0, 0, 1)$$

Developing the above expression gives:

$$x_3 = x_2 + \frac{u_x}{u_z} (z_3 - z_2)$$

$$y_3 = y_2 + \frac{u_y}{u_z} (z_3 - z_2)$$

$$z_3 = z_3$$

$$x_3 = x_1 + \frac{u_x}{u_z} (z_3 - z_1)$$

$$y_3 = y_1 + \frac{u_y}{u_z} (z_3 - z_1)$$

$$z_3 = z_3$$

Both sets of equation should deliver the same point  $\vec{x_3}$  as the rendered light field ray at the new location. By replacing  $u_x$ ;  $u_y$ ;  $u_z$  with their corresponding expression as functions of  $\vec{x_1}$  and  $\vec{x_2}$ , if the second set of equation from the previous block is used 5 and  $x_3$  and  $y_3$  are added together:

$$x_1 + \frac{z_3 - z_1}{z_2 - z_1} (x_2 - x_1) + y_1 + \frac{z_3 - z_1}{z_2 - z_1} (y_2 - y_1) = x_3 + y_3$$

Leading to the expression:

$$(z_2 - z_3)(x_1 + y_1) + (z_3 - z_1)(x_2 + y_2) = (z_2 - z_1)(x_3 + y_3) \quad (B)$$

Co-ordinates with a subscript  $3$  relate to a known point  $(x_3, y_3, z_3)$  where the light 10 field is rendered. All depth co-ordinates  $z_i$  are known. The parameterisation planes are in the direction of propagation or rendering. The light field data parameters  $L$  are  $(x_1, y_1, x_2, y_2)$

The light field rays that form an image at point  $(x_3, y_3, z_3)$  are linked by expression (B) which defines a hyper plane in  $\mathbb{R}^4$ .

15 This signifies that if images are to be rendered from a two-plane parametrized light-field, only the rays in the vicinity of hyperplanes need to be rendered, there is no need to trace them.

From calibration of the camera the following parameters can be determined: the centre of projection ( $x_3, y_3, z_3$ ) the orientation of the optical axis of the camera and the distance  $f$  from the pinhole of the camera to the plane of the photosensor. The light field camera parameters are illustrated in Figure 7. The photosensor plane is located at 5 depth  $z_p$ . The pixel output of the photosensor is converted into geometrical representation of light field rays. A light-slab comprising the two reference planes  $P_1$  and  $P_2$  is located at depths  $z_1$  and  $z_2$ , respectively, beyond  $z_3$ , at the other side of the centre of projection of the camera to the photosensor. By applying a triangle principle to the light rays rays, pixel coordinates ( $x_p, y_p, z_p$ ) recording the light projected from the 10 array of microlenses can be mapped to ray parameters i.e. reference plane intersection points ( $x_1, y_1, x_2, y_2$ ) by applying the following expression:

$$\begin{aligned}
 x_1 &= \frac{z_3 - z_1}{z_3 - z_p} x_p + \frac{z_1 - z_p}{z_3 - z_p} x_3 \\
 y_1 &= \frac{z_3 - z_1}{z_3 - z_p} y_p + \frac{z_1 - z_p}{z_3 - z_p} y_3 \\
 x_2 &= \frac{z_3 - z_2}{z_3 - z_p} x_p + \frac{z_1 - z_p}{z_3 - z_p} x_3 \\
 y_2 &= \frac{z_3 - z_2}{z_3 - z_p} y_p + \frac{z_1 - z_p}{z_3 - z_p} y_3
 \end{aligned}
 \tag{15}$$

The above calculation may be extended to multiple cameras with different pairs of triplets ( $x_p, y_p, z_p$ ) ( $x_3, y_3, z_3$ ):

20 In the case of a plenoptic camera, a camera model with an aperture is used and a light field ray is described in the phase space as having an origin ( $x_p, y_p, z_p$ ) and a direction ( $x'_3, y'_3, 1$ ). Its propagation onto the plane ( $x_3, y_3$ ) at depth  $z_3$  can be described as a matrix transform. The lens will act as an ABCD matrix to refract the ray and another ABCD propagation matrix will bring the ray onto the light-slab reference planes  $P_1$  and 25  $P_2$ .

Figure 8 is a 2D ray diagram graphically representing intersection data ( $x_1, x_2$ ) of light field rays captured by a camera at location  $x_3= 2$  and depth  $z_3=2$  with an aperture  $|A| < 0.5$ . The data lines of the ray diagram used to parameterise are sampled by 256 cells providing an image of 256x256 pixels.

5        If the ray diagram illustrated in Figure 8 is interpreted as a matrix of 256 x256 elements, it can be seen that it is sparsely populated. If the rays were to be saved individually in a file instead of the 4D phase space matrix, this would require saving for each ray, at least 2 bytes (int16) for each position  $x_1$  or  $x_3$  plus 3 bytes for the color, i.e. 7 bytes per ray for a 2D slice light-field, and 11 bytes per ray for its full 4D representation.

10      Even then, the rays would be stored randomly in the file which might be unsuitable for applications that need to manipulate the representation. The inventors of the present invention have determined how to extract only the representative data from the ray diagram matrix and to store the data in a file in a structured manner.

15      Since the light field rays are mapped along data lines of the 2D ray diagram, it is more efficient to store parameters defining the data line rather than the line values themselves. Parameters defining the data line such as, for example, a slope defining parameter  $s$  and an axis intercept  $d$  may be stored with the set of light field rays belonging to that data line.

20      This could require for example as little as 2 bytes for slope parameter  $s$ , 2 bytes for slope parameter  $d$  and then only 3 bytes per ray. Moreover, the rays may be ordered along lines in the file. In order to set lines through matrix cells so called digital lines are generated which approximate the ray lines with minimum error.

25      To locate the data lines and to obtain slope parameter  $s$  and intercept parameter  $d$  step S704 a Radon transform is performed by line detection module 704 on the ray diagram generated in step S703 (see Figure 18A).

30      From the obtained slope parameter  $s$  and intercept parameter  $d$  a representative digital line is generated by digital line generation module 705 in step S705(see Figure 18A). In this step digital lines are generated by approximating an analytical line to its nearest grid point, for example by applying Bresenham's algorithm. Indeed Bresenham's algorithm provides a way to provide a digital line with minimal operation. Other methods

may apply a fast discrete Radon transform calculation. An example of Bresenham application is one adapted from the following reference: <http://www.cs.helsinki.fi/group/goa/mallinnus/lines/bresenh.html>.

The digital format defines the data line by two points of a grid  $(0, d)$  and  $(N-1, s)$  5  $d$  being the interception corresponding to the value of  $x_2$  when  $x_1=0$  and  $s$  being the slope parameter corresponding to the value of  $x_2$  when  $x_1=N-1$ . From the digital format generated the slope  $a$  of each individual line may be expressed as a function of  $d$  and  $s$ , as:

$$a = \frac{s - d}{N - 1}$$

10 where:

$$s \in \{0, 1, \dots, N - 1\} \text{ and } d \in \{0, 1, \dots, N - 1\}$$

Figure 9 illustrates an example of a digital line generated by application of Bresenham's algorithm.

Figure 10 illustrates a group of digital lines having the same slope  $a$  (or  $s - d$ ) but 15 different intercepts  $d$ , the group of data lines being contiguous. The group of data lines is referred to herein as a bundle of lines and corresponds to a beam resulting from the camera not being ideally pinpoint. Each line addresses different pixels. In other words, one pixel belongs only to a unique line of a bundle with the same slope but different intercepts. The upper and lower boundaries of the axis interceptions  $d$  are given as  $d_{max}$  20 and  $d_{min}$  respectively.

Ray data parameterized by a sampled pair of lines (in 2D) and belonging to one camera, belong to a family of digital lines (beam) in the phase space used for representing the data. The header of the beam can simply contain the slope  $a$  and the thickness of the beam defined by the upper and lower boundaries of the axis 25 interceptions  $d_{max} - d_{min}$ . The ray values will be stored as RGB colors along digital lines whose header can be  $d$  and  $s$ . Void cells of the ray diagram in the sampled space do not need to be stored. Coordinates  $x_1; x_2$  of the rays can be deduced from the parameters  $d, s$  and from the position of the cell along the digital line.

Table 1 is an example of a data representation format in accordance with an embodiment of the invention in the case of 2D ray diagram storage. It will be understood that for a 4D case the table would be extended in  $y_1$  and  $y_2$  dimensions.

Tags			Data			
Parametrization plane offset $z_2-z_1$ ( $z_3$ is relative to $z_1$ ) (float)				$\Delta z$		
Width in number of $x_1$ cells (integer)	min $x_1$ value (float)	max $x_1$ value (float)	$N$	$x_{1min}$	$x_{1Max}$	
Width in number of $x_2$ cells (integer)	min $x_2$ value (float)	max $x_2$ value (float)	$M$	$x_{2min}$	$x_{2Max}$	
Number of cameras (integer)			$n$			
Cam <sub>1</sub> focus (2 floats)			$x_{31}$	$z_{31}$		
lowest cam <sub>1</sub> intercept in $(x_1, x_2)$	cam <sub>1</sub> steepness	cam <sub>1</sub> number of digital lines in $x_1, x_2$	$d_1$	$s_1$	$m(1)$	
data line ( $m(1) * N * 3$ bytes)			$RGB_0$	$RGB_1$	...	$RGB_{m(1)*N}$
...			...	...		
...			...	...	...	...
Cam <sub>n</sub> focus (2 floats)			$x_{31}$	$z_{31}$		
lowest cam <sub>n</sub> intercept in $(x_1, x_2)$	cam <sub>n</sub> steepness	cam <sub>n</sub> number of digital lines in $x_1, x_2$	$d_n$	$s_n$	$m(n)$	
data line ( $m(n) * N * 3$ bytes)			$RGB_0$	$RGB_1$	...	$RGB_{m(n)*N}$

Table 1 Data representation format

5 The data includes the following parameters:

- the number of cells of the matrix of the 2D diagram ( $N$  by  $M$ ) of the interception data  $x_1, x_2$ , where  $N$  corresponds to the number of  $x_1$  cells and  $M$  corresponds to the number of  $x_2$  cells.
- parameters  $d$  and  $s$  defining the digital data line corresponding to one or more light field rays extending in the grid (of matrix  $N$  by  $M$ ) from  $(0, d)$  to  $(N-1, s)$ , as for example illustrated in Figure 9.
- the number of acquisition cameras  $n$
- the RGB data of each data line

Parameters to be estimated from the lightfield or from camera's geometry are the slope  $a$  the lower and upper bounds of the digital line intercepts ( $d_{min}, d_{max}$ ), and the digital line parameters ( $d_i, s_i$ ). The discrete Radon transform has already been discussed as a tool to measure the support location 5 of the light-field in the ray diagram.

Figure 11B shows the discrete Radon transform in the digital line parameter space ( $d, s$ ) of the datalines of Figure 11A. Figure 11C is a zoom of the region of interest comprised in Figure 11B. The beam of digital lines is located by the search for the maximum value parameters. There could be some offset 10 between the geometrical center of symmetry of the DRT and the actual position of the maximum due to image content so that later on, an algorithm is used to pin-point the center of symmetry instead of the maximum. Then, the waist of the beam transform as shown on Figure 11C is easy to find to give the values ( $d_{min}, d_{max}$ ). Point ( $d_{min} = 74, s = 201$ ) is the lower envelope of the beam of 15 digital lines from Figure 11A, and point ( $d_{max} = 81, s = 208$ ) is the upper envelope of the beam of digital lines.

The equations of two orthogonal 2D sliced spaces from equation B is given as.

$$(z_2 - z_3)(x_1 + y_1) + (z_3 - z_1)(x_2 + y_2) = (z_2 - z_1)(x_3 + y_3) \quad (C)$$

20 If a 2D slice for  $x_i$  coordinates is taken, the equation of the beam of lines where ray data through an aperture of size A at  $(x_3, y_3, z_3)$  will map is given as:

$$x_2 = \frac{(z_3 - z_2)}{(z_3 - z_1)} x_1 + \frac{(z_2 - z_1)}{(z_3 - z_1)} (x_3 \pm A) = mx_1 + (d_{max_x} - d_{min_x}) \quad (D)$$

Similarly, if a 2D slice is taken for  $y_i$  coordinates:

$$y_2 = \frac{(z_3 - z_2)}{(z_3 - z_1)} y_1 + \frac{(z_2 - z_1)}{(z_3 - z_1)} (y_3 \pm A) = my_1 + (d_{max_y} - d_{min_y}) \quad (E)$$

25 As previously described, the values of  $m$  and  $d_{max_x}, d_{min_x}, d_{max_y}, d_{min_y}$  may be evaluated in the discrete domain To localize the characteristics of a light-field as defined by the format discussed previously, there is no need to perform a 4D discrete Radon transform. If two orthogonal 2D DRT are obtained, measurements can be performed of

the slope  $m$  of the hyper-plane and the beam width of the digital hyper-planes where all data concentrates in the 4D ray-diagram.

This simpler procedure of location assumes a circular entrance pupil A so that  $d_{max_x}$ ,  $d_{min_x}$ ,  $d_{max_y}$ ,  $d_{min_y}$  will encompass all hyper-planes intercepts, some values 5 written in the format will contain no values.

In embodiments of the invention intersection data  $(x_1, y_1, x_2, y_2)$  geometrically defining intersection of light field rays with reference planes  $P_1, P_2$  is obtained by steps of back tracing and parameterization as will be described.

Figure 12A is a flow chart illustrating the steps of a method for generating data 10 representative of a light field according to one or more embodiments of the invention. Figure 12B is a block diagram schematically illustrating the main modules of a system for generating data representative of a light field according to one or more embodiments of the invention.

In a preliminary step S801 of the method raw light field data is acquired by a 15 light field camera 801. The raw light field data may for example be in the form of micro images as described with reference to Figure 3. The light field camera may be a light field camera device such as shown in Figures 1A or 1B and 2A and 2B. In general the data is provided in pixel form corresponding to pixels of the light sensor detecting the light.

20 In step S802 the acquired light field data is processed by back tracing module 702 generate from the pixel data, light field rays corresponding to the captured light field.

Pixel back-tracing refers to the operation of ray generation from pixel and camera data. This process is typically camera specific. Each camera type has its own specific art 25 of mapping rays to pixels. A plenoptic camera registers 2D arrays of images in a very specific way. Other types of camera can acquire the  $4\pi$  steradian solid angle and the device is handled differently for re-generating the rays. Since the pixel back-tracing is specific to each acquisition system, different modules of back-tracers have to be developed. A traditional light field camera can be described and modeled as a pinhole 30 and the back-tracing is straightforward. A plenoptic 2.0 camera is more difficult to back-

trace, in particular if the micro-lens array has three different lenslet focals. For the latter case back-tracing may be obtained indirectly through the focal-stack.

Figure 13A schematically illustrates an example of back tracing. Figure 13B illustrate examples of acquisition devices used for ray back tracing for which algorithms 5 are to be specified. The process of ray back-tracing as illustrated in Figure 13A is modeled by a pinhole camera.

Whether or not the original pixel array should be demosaiced into a full RGB array or kept as a raw data array can be handled by assigning to the back-traced ray either a full RGB value, or only a unique color value.

10 For back-tracing with a pinhole camera model, camera calibration is performed to locate the position of the pinhole which acts as the common point that every ray intersects. The calibration also provides pixel sizes and distance of the pixel plane to the center of projection so that each pixel can be converted easily as a ray passing through the pinhole in the global coordinate system and whose direction is the direction from the 15 pixel to the pinhole.

Each ray bundle integrated at each pixel and sustained by the lens output pupil can be reduced to the mean beam direction of propagation from the lens to the pixel as envisaged by the simple pinhole model. An example of how to use camera intrinsic and extrinsics to back-trace the pixels can be found at 20 [<http://www.ics.uci.edu/~majumder/vispercep/cameracalib.pdf>](http://www.ics.uci.edu/~majumder/vispercep/cameracalib.pdf).

In order to illustrate the pixel back-tracing procedure, it is supposed for the sake of simplicity that the center of projection of the camera is at (0, 0, 0), the image plane centered at (0; 0; f). The camera is not rotated, its principal axis is pointing in the Z direction. It is also supposed that the pixels are squares so that  $m_u = m_v = m$  25 pixels.meter<sup>-1</sup>. Finally, the image plane is translated by ( $t_u, t_v$ ) in such a way that the bottom left pixel is at ( $u = 0; v = 0$ ). The pixels are addressed by their row-column indexes pair ( $i, j$ ). If  $I$  is the image position vector in pixels (i, j, 1), then the relation between the pixel and a point P(X, Y, Z) that maps to that pixel through the central projection, is:

$$\begin{pmatrix} i \\ j \\ 1 \end{pmatrix} = \begin{pmatrix} mf & 0 & mt_u \\ 0 & mf & mt_v \\ 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} X \\ Y \\ Z \end{pmatrix} \iff I = KP \quad (\text{F})$$

Knowing  $m, f t_u, t_v$  from a calibration step, back tracing the pixel leads to:

$$P = K^{-1}I \quad (\text{G})$$

P is a point in 3D space where a ray from pixel (i,j) would pass through. With 5 one position P, and since the ray passes through (0,0,0) the direction is given by the vector  $P(X,Y,Z)$ .

In step S803 a process of parameterization is performed. Parameterization is the process of identifying uniquely each ray with tags. As a ray passes through a position and has a direction, the most straightforward parameterization would be a set of 6 real 10 numbers ( $x, y, z, u, v, w$ ) mixing spatial and directional coordinates. For the sake of simplicity a two plane parameterization as already discussed is adopted. The question which is very often asked is where to put those planes with respect to the acquisition system. Often in the literature, in particular for plenoptic cameras, for some calculation convenience, one is placed at the sensor, another one on the lenslets array or main lens. 15 Those positions should be avoided, because micro-lenses have a thickness, so where exactly shall we put one of the planes? Main lenses have a very complicated lens prescription which is unknown. So the best is to put the planes outside of the acquisition system. Assuming a first place is located at  $z = z_1$  and a second one at  $z = z_2$  with  $z_2 > z_1$ . From equation (F) it can be found that the parameters for a ray which has been 20 back-traced from pixel (I, j) as:

$$\begin{pmatrix} x_1 \\ y_1 \\ z_1 \end{pmatrix} = \begin{pmatrix} mf & 0 & mt_u \\ 0 & mf & mt_v \\ 0 & 0 & 1 \end{pmatrix}^{-1} \begin{pmatrix} i \\ j \\ 1 \end{pmatrix}$$

The first two lines of the equation are divided by  $z_1$  according to the rule for homogenous coordinates. The second set of parameters which come from the intersection with the second plane can also be written as:

$$\begin{pmatrix} x_2 \\ y_2 \\ z_2 \end{pmatrix} = \begin{pmatrix} mf & 0 & mt_u \\ 0 & mf & mt_v \\ 0 & 0 & 1 \end{pmatrix}^{-1} \begin{pmatrix} i \\ j \\ 1 \end{pmatrix}$$

Since the couple  $(z_1, z_2)$  is known it can be seen from previous derivation that the ray be uniquely described by the 4-uplet  $(x_1, y_1, x_2, y_2) \in R^4$

5 In addition, the ray is assigned with a RGB value. So to represent the ray by such parameterization, 4 floats and 3 bytes would be required resulting in a total of 19 bytes (but the ray space has not yet been sampled) In the image based format, the elemental data is represented by 2 integers and 3 bytes only. So it may be seen that this parameterization adds a lot of data to the content and in general, the light-field being a  
10 four dimensional data set, it needs an amount of storage which is not manageable as it is.

In step S804 sampling and reduction are performed. To build up a light field data format a numerical representation of the light field data is required. Since up to now, the rays are described by real numbers, the ray space coordinate system is sampled in  
15 order to assign for each ray a unique 4-uplet of integer indexes rather than real numbers. For that purpose the 4D ray-space  $x_1, y_1, x_2, y_2$ , is sampled in  $\Delta x_1, \Delta y_1, \Delta x_2, \Delta y_2$ , steps. Consequently, each ray is uniquely defined by the 4 indexes  $(i, j, k, l) \in N^4$  such that  
16  $(x_1, y_1, x_2, y_2) \approx (x_{1\min}, y_{1\min}, x_{2\min}, y_{2\min}) + (i\Delta x_1, j\Delta y_1, k\Delta x_2, l\Delta y_2)$  where the indexes best approximate the real ray's parameters. This practically means that the indexes are such  
20 that:

$$\begin{aligned} x_{1\min} + i\Delta x_1 &\leq x_1 < x_{1\min} + (i + 1)\Delta x_1 \\ y_{1\min} + j\Delta y_1 &\leq y_1 < y_{1\min} + (j + 1)\Delta y_1 \\ x_{2\min} + k\Delta x_2 &\leq x_2 < x_{2\min} + (k + 1)\Delta x_2 \\ y_{2\min} + l\Delta y_2 &\leq y_2 < y_{2\min} + (l + 1)\Delta y_2 \end{aligned}$$

The reduction is the process of defining the compact support space of the light-field generated by the rays which have been back-traced from pixels acquired by the light field camera. Figure 14 schematically illustrates the reduction process limited to a 3D space where the support cells of the light-field are shaded in. This figure shows the 5 support in the sampled space, but the support can also be known in the continuous domain by analytical derivations. In the discrete domain, the support can be found by a Discrete Radon Transform of the light-field in the 4D parameter space. More precisely, it is found by two orthogonal DRTs.

In Figure 15, the support of the light-field domain in parameter space is depicted 10 by the shaded cells . This is the continuous support. The support is sampled by the grid lines which build cells. There are  $N \times M$  cells ranging from

$[0, N-1; 0, M-1]$ . The digital line begins at column-row index  $(i=0; j=d)$  and ends at  $(i= N-1; j = s)$ .

The following illustrative example is restricted to a 2D slice. As it is known from 15 previous section, the analytic equation of the line of blocks can be found for a system which has a center of projection located at known coordinates  $(x_3, y_3, = 0, z_3) \in R^3$

If there are two parameterization lines located at  $(z_1, z_2) \in R^2$  which are also know the light field rays will be located on an affine line of equation:

$$x_2 = \frac{z_2 - z_1}{z_3 - z_1} x_1 + \frac{z_2 - z_1}{z_3 - z_1} x_3 = ax_1 + b \quad (H)$$

20 where:

$$\begin{aligned} x_{1m} &\leq x_1 \leq x_{1M} \\ x_{2m} &\leq x_2 \leq x_{2M} \end{aligned}$$

are the limits on the parameterization lines which bound all ray parameters  $(x_1, x_2)$ . The affine line passes through the shaded cells along a digital line. The cells size are:

$$\begin{aligned} \Delta x_1 &= \frac{x_{1M} - x_{1m}}{N} \\ \Delta x_2 &= \frac{x_{2M} - x_{2m}}{M} \end{aligned}$$

The 4D space may now generalized. The hyper plane support of an acquired light field is given as:

$$(z_2 - z_3)(x_1 + y_1) + (z_3 - z_1)(x_2 + y_2) = (z_2 - z_1)(x_3 + y_3)$$

Where variables indexed by 3 are known as well as  $Z_1$  and  $Z_2$ . To simplify the  
5 metadata the equation is written in canonical form:

The following lower and upper bounds are given:

$$\begin{aligned} x_{1m} &\leq x_1 \leq x_{1M} \\ x_{2m} &\leq x_2 \leq x_{2M} \\ y_{1m} &\leq y_1 \leq y_{1M} \\ y_{2m} &\leq y_2 \leq y_{2M} \end{aligned}$$

And the following cell sizes

$$\begin{aligned} \Delta x_1 &= \frac{x_{1M} - x_{1m}}{N} \\ \Delta x_2 &= \frac{x_{2M} - x_{2m}}{M} \\ \Delta y_1 &= \frac{y_{1M} - y_{1m}}{L} \\ \Delta y_2 &= \frac{y_{2M} - y_{2m}}{K} \end{aligned}$$

10 Since the 4D parameter space is filled up (or the 2D space in the example illustrated on Figure 15) cell indexes may be used to scan the data and save RGB value alone into a format (or Pack). The file format's metadata will contain all the necessary values for converting back each value written down into the file format into a sampled 4-uplet parameter for the ray which reverses the action of Packing, referred to as  
15 Unpacking the process may be illustrated with a small visual example by slicing the light-field and reducing it into a 2D space, if the mathematical notation from the previous sub-section is followed, the first column index is  $i = 0$ . There is data present in this column at cell  $j=2$ . In order to find the indexes of the pixels of the digital line the following data is required:

$$\begin{aligned}
 x_{1_i} &= x_{1_m} + i\Delta x_1 \\
 x_{2_j} &= ax_{1_i} + b \\
 j &= E\left(\frac{x_{2_j} - x_{2_m}}{\Delta x_2}\right)
 \end{aligned}
 \tag{I}$$

Where  $E$  stands for the Integer function, which rounds down any real number to a smaller natural number (integer). Hence scanning the data is a simple matter of incrementing  $i$  from 0 to  $N - 1$ . For each  $i$ , the data lies in the cell  $(i, j)$  with  $j$  calculated by the previous set of equations. For each  $i$ , the RGB value carried by the ray is stored, and this RGB value is found in that cell  $(i, j)$ . In order to later unpack the data from the format, it is known that each cell of the format is indexed by a rank  $i$ , and to regenerate the rays parameters  $(i, j)$ , the values of  $x_{1m}$ ,  $x_{2m}$ ,  $x_{1M}$ ,  $x_{2M}$ ,  $N$ ,  $M$ ,  $a$ ,  $b$ ,  $z_1$ ,  $z_2$  are stored as metadata in the file format Figure 16 illustrates the process of Scan'n'Pack and the file format structure needed with metadata as well as the saved. Two aspects may be noted: firstly that the data part contains  $N$  cells where RGB ray data are ordered, and secondly that ray parameters  $(x_1, x_2)$  are not stored. The position of the lines used to parameterize the rays,  $z_1$  and  $z_2$  are given, other data related to the position of the center of projection  $x_3$  and  $z_3$  can be derived by identifying  $a$  and  $b$  with their expression from equation H and then solving for the unknowns.

In the case where the camera cannot be modeled as a pinhole, the format is adapted to a slightly different arrangement which can be considered as a generalization of the one presented in the sub-sections above.

Indeed, it has already been shown that the rays will map along a beam of digital lines and not a unique one. As shown on Figure 17, , the metadata shall contain one supplementary value  $n$  which is the number of digital lines that have to be scanned, and the data section of the format packs additional vectors of RGB data for the additional lines.

Again, as done before, now that the 2D example has been used to illustrate the process, it may be generalized to real space, the 4D parameter space. In the 4D ray space, the ray's parameters will map into a 4D cell indexed by 4 natural numbers  $(i, j, k, \lambda) \in \mathbb{R}^4$ . These indexes will range into  $[0, N - 1; 0, M - 1; 0, K - 1; 0, L - 1]$ . In order to

scan the cells which contain data, the digital equivalent of the parametric equation of a hyper-plane may be used:

$$\begin{aligned}x_{1_i} &= x_{1_m} + i\Delta x_1 \\x_{2_j} &= x_{2_m} + j\Delta x_2 \\y_{1_k} &= y_{1_m} + k\Delta y_1\end{aligned}$$

And then:

5  $\exists y_{2_l} | \alpha(x_{1_i} + y_{1_k}) + \beta(x_{2_j} + y_{2_l}) + \gamma = 0$

From which the last missing index / may be deduced since:

$$y_{2_l} = y_{2_m} + l\Delta y_2$$

Signifying that the scan and pack algorithm in 4D may be given for example by:

```

for each  $i \in [0, N-1] \subset \mathbb{N}$ 
for each  $j \in [0, M-1] \subset \mathbb{N}$ 
  for each  $k \in [0, K-1] \subset \mathbb{N}$ 
    calculate  $l \in \mathbb{N}$ 
    store RGB value of the ray located in cell  $i, j, k, l$ 
  end for  $k$ 
end for  $j$ 
end for  $i$ 

```

10

Table 2 summarizes the type of parameters used in the metadata format with the data section containing here two vectors of RGB data. Two vectors of RGB data are used to illustrate a more general case where rays from the light field map onto more than one hyper plane by assuming  $n=2$  as an example signifying that a pair of digital 15 hyper planes is stored in the format.

Metadata	(float)	(float)	(int)	(float)	(float)	(int)	(float)	(float)	(float)	(float)
x1m	x1M	N	x2m	x2M	M	z1	z2	$\alpha$	$\beta$	$\gamma$
y1m	y1M	K	y2m	y2M	L					
(int)										
n										

Data	(p=NxMxK) RGB values									
(3 Bytes)	(3 Bytes)		...	...		(3 Bytes)	(3 Bytes)	(3 Bytes)	...	(3 Bytes)
RGB <sub>0</sub>	RGB <sub>1</sub>		...	...		RGB <sub>...</sub>	RGB <sub>1</sub>	RGB <sub>...</sub>	...	RGB <sub>p-1</sub>

Data	(p=NxMxK) RGB values									
(3 Bytes)	(3 Bytes)		...	...		(3 Bytes)	(3 Bytes)	(3 Bytes)	...	(3 Bytes)
RGB <sub>0</sub>	RGB <sub>1</sub>		...	...		RGB <sub>...</sub>	RGB <sub>1</sub>	RGB <sub>...</sub>	...	RGB <sub>p-1</sub>

Table 2 Format layout for a 4D light field

The format is used to generate rays. Firstly a 2D case is used for illustrative purposes. Firstly metadata is read. Then the data section is scanned one RGB cell after 5 the other.

Supposing the readout is at cell number i, then in order to generate ( $x_{1i}$ ,  $x_{2j}$ ) which are the parameters of the ray that has its RGB values stored at that place, the 3 equations (F) are applied. Reading additional data from the header, it may be included that the ray stored at position i in the data section of the format has its parameters ( $x_{1i}$ , 10  $z_1$ ,  $x_{2j}$ ,  $z_2$ ) which are all calculated from the file and which uniquely define that ray.

Figure 12C illustrates a device for rendering at least one image from light field data comprising a processor 811 for processing data obtained in accordance with the method of any embodiment of the invention as hereinbefore described; and a display 812 for rendering an image in accordance with the processed data.

15 Figure 18A is a flow chart illustrating the steps of a method for generating data representative of a light field according to one or more embodiments of the invention. Figure 18B is a block diagram schematically illustrating the main modules of a system for generating data representative of a light field according to one or more embodiments of the invention.

20 In a preliminary step S701 of the method raw light field data is acquired by a light field camera 701. The raw light field data may for example be in the form of micro

images as described with reference to Figure 3. The light field camera may be a light field camera device such as shown in Figures 1A or 1B and 2A and 2B.

In step S702 the acquired light field data is processed by ray parameter module 702 to provide intersection data  $(x_1, y_1, x_2, y_2)$  defining intersection of captured light field rays with a pair of reference planes for parameterization  $P_1, P_2$  at respective depths  $z_1, z_2$ .

From this step intersection data  $(x_1, y_1, x_2, y_2)$  geometrically defining intersection of light field rays with reference planes  $P_1, P_2$  is obtained.

In step S703 2D ray a diagram graphically representing the intersection data  $(x_1, y_1, x_2, y_2)$  is obtained by ray diagram generator module 703.

It would be interesting to obtain a format for the 4D case which is similar to what was proposed for the 2D case. To do so, it would be interesting to associate the 2D lines found on the  $\Pi(x_1, x_2)$ , plane with the lines found on the  $\Pi(y_1, y_2)$  place, i.e., the lines that are the results of the intersection of the corresponding hyper plane with the two orthogonal slices of  $\Pi(x_1, x_2)$ , and  $\Pi(y_1, y_2)$ . From expressions D and E, it is known that the corresponding lines have the same slope  $m$ . This is the first parameter that associates each line in  $\Pi(x_1, x_2)$  to a line in  $\Pi(y_1, y_2)$ , for a camera at a certain depth. If there are multiple cameras at the same depth), there are three lines in  $\Pi(x_1, x_2)$ , and three lines in  $\Pi(y_1, y_2)$ , with the same estimated slope of  $m$ . The correspondences in the line offsets between the lines in these two planes are then determined. To do this, the formulation of the lines in expressions D and E are exploited. In particular, denoting

$$k = \frac{z_2 - z_1}{z_3 - z_1},$$

the offsets are as follows:

$$\begin{cases} kx_3 + kA = d_{max_x} \\ kx_3 - kA = d_{min_x} \end{cases} \quad (F)$$

and

$$\begin{cases} ky_3 + kA = d_{max_y} \\ ky_3 - kA = d_{min_y} \end{cases} \quad (G)$$

The sets of the equations may be solved for  $k, x_3$  and  $y_3$ . Note that  $(x_3, y_3, z_3)$  correspond to the coordinates of the camera, or in other words the voxel where the corresponding bundle of light is focused into a circle of the radius  $A$ . We have supposed 5 that the aperture on the plane positioned at  $z_3$  is circular, so that  $d_{max_x} - d_{min_x} = d_{max_y} - d_{min_y} = 2kA$ , and by solving the previous sets of equations:

$$k = \frac{d_{max_x} - d_{min_x}}{2A} \quad (G)$$

$$x_3 = A \frac{d_{max_x} + d_{min_x}}{d_{max_x} - d_{min_x}} \quad (H)$$

$$y_3 = A \frac{d_{max_y} + d_{min_y}}{d_{max_y} - d_{min_y}} \quad (I)$$

$$10 \quad z_3 = \frac{z_2 + (k-1)z_1}{k} \quad (J)$$

The digital lines may be scanned as before on  $\Pi(x_1, x_2)$  using the Bresenham digital lines; For each individual  $(x_1, x_2)$  value, the corresponding  $(y_1, y_2)$  values captured in the light field are stored. To find such values, expression (C) is exploited. All 15 the following are either known or estimated from expressions (F) and (G)  $x_3; y_3; z_3; z_1; z_2$

Moving on each line in  $\Pi(x_1, x_2)$ , for each  $(x_1^q, x_2^q)$ , the following relationship in  $(y_1, y_2)$  is obtained:

$$y_2 = \frac{z_3 - z_2}{z_3 - z_1} y_1 + \frac{z_3 - z_2}{z_3 - z_1} x_1^q + \frac{z_2 - z_1}{z_3 - z_1} (x_3 + y_3^*) - x_2^q$$

20 or,

$$y_2 = my_1 + mx_1^q + k(x_3 + y_3^*) - x_2^q = my_1 + d_{off}(x_1^q, x_2^q, x_3, y_3^*)$$

For each point in  $\Pi(x_1, x_2)$ , a collection of lines in  $\Pi(y_1, y_2)$  is saved.  $d_{off}$  corresponds to the offset of the lines scanned and saved for  $(x_1^q, x_2^q)$ . It is noted that:

$$d_{off}(x_1^q, x_2^q) = mx_1^q + k(x_3 + y_3^*) - x_2^q$$

With reference to Figure 11 each square is a  $(x_1^q, x_2^q)$ , point, and for each one of these points, there is a set of Bresenham digital lines running out of the plane of the figure along a digital bundle defined by equation:

$$5 \quad y_2 = my_1 + d_{off}(x_1^q, x_2^q, x_3, y_3^*) \quad (K)$$

perpendicular to the depicted datalines, but in a 4D space. Here,  $y_3^*$  varies between  $y_3 - A$  to  $y_3 + A$ .

An exemplary data format for a bundle of data lines per camera is illustrated in Table 2.

Tags			Data			
Parametrization plane offset $z_2-z_1$ ( $z_3$ is relative to $z_1$ ) (float)						
Width in number of $x_1$ cells (integer)	min $x_1$ value (float)	max $x_1$ value (float)	$N$	$x_{1min}$	$x_{1Max}$	
Width in number of $x_2$ cells (integer)	min $x_2$ value (float)	max $x_2$ value (float)	$M$	$x_{2min}$	$x_{2Max}$	
Width in number of $y_1$ cells (integer)	min $y_1$ value (float)	max $y_1$ value (float)	$P$	$y_{1min}$	$y_{1Max}$	
Width in number of $y_2$ cells (integer)	min $y_2$ value (float)	max $y_2$ value (float)	$Q$	$y_{2min}$	$y_{2Max}$	
Number of cameras (integer)			$n$			
Aperture size for $cam_1$			$A_1$			
$cam_1$ focus (3 floats)			$x_{31}$	$y_{31}$	$z_{31}$	
lowest $cam_1$ intercept in $(x_1, x_2)$	$cam_1$ steepness	$cam_1$ number of digital lines in $x_1, x_2$	$d_1$	$m_1$	$k_1$	
		$cam_1$ number of digital lines in $y_1, y_2$			$l_{y_1}$	
data line ( $end_1 \equiv l_{y_1} * N * l_{y_1} * P$ ) * 3 bytes			$RGB_0$	$RGB_1$	...	$RGB_{end_1}$
...			...	...	...	
...			...	...	...	...
Aperture size for $cam_n$			$A_n$			
$cam_n$ focus (3 floats)			$x_{3n}$	$y_{3n}$	$z_{3n}$	
lowest $cam_n$ intercept in $(x_1, x_2)$	$cam_n$ steepness	$cam_n$ number of digital lines in $x_1, x_2$	$d_n$	$m_n$	$k_n$	
		$cam_n$ number of digital lines in $y_1, y_2$			$l_{y_n}$	
data line ( $end_n \equiv l_{y_n} * N * l_{y_n} * P$ ) * 3 bytes			$RGB_0$	$RGB_1$	...	$RGB_{end_n}$

Firstly general metadata of the 4D space is provided: including boundaries of the 4 axes  $x_1, x_2, y_1, y_2$  and their corresponding sampling. The number of cameras (bundles) is also provided. For each camera  $j$  the following parameters are saved:

the size of the aperture:  $A_j$ ;

the focus point of the camera:  $cam_j$ . focusPoint =  $(x_3, y_3, z_3)$

lowest  $d$  intercept in  $(x_1, x_2) = d_j$

steepness =  $m_j$

number of digital lines in  $(x_1, x_2) = l_j^x$

5 number of digital lines in  $(y_1, y_2) = l_j^y$

On each camera, for each  $(x_1^q, x_2^q)$ , scanning is started on  $(y_1, y_2)$  with respect to expression (K) using the Bresenham digital lines, and the RGB values are saved.  $y_3^*$  varies between  $y_3 - A$  to  $y_3 + A$  and the corresponding  $d_{off}$  is calculated according to expression (K).

10 The same calculations are performed in the decoding step using the stored metadata. In particular,  $k$  is found using equation (H). Hence the format remains compact. There is no need to store four indexes for each ray in the system. It is noted that the sampling of the hyper-plane above is the sampling of the 4D ray-space and thus a single  $x_1, y_1, x_2, y_2$  location is not missed. This is only one example of a systematic  
15 scanning of the 4D ray-space for saving all data in a very compact form. Other processes may of course be applied. The parametric form seems to be adapted to explore the hyper-plane because it permits an inter-leaved space exploration.

In the case of multiple cameras to work on data that contains several bundles of hyper-planes (several maxima in the Radon transform due to multiple cameras), a more  
20 complex algorithm may be used. As a pre-processing step, the parameters ( $m, k$ ) are found for all the peaks in the radon transform of  $\Pi(x_1, x_2)$ , and put in one set. The same is done for the peaks in  $(y_1, y_2)$  and the parameters are put in another set. Now in each iteration of the greedy algorithm, the maximum peak intensity is found in the 2D radon transform of  $(x_1, x_2)$  and the corresponding peak in  $(y_1, y_2)$  is found by matching the  
25 previously found parameters ( $m, k$ ). After saving the data as mentioned in the last section, these peaks are cleaned from the radon transforms, and the next iteration is started, until nothing meaningful remains in the light field

Figure 13C illustrates a device for rendering at least one image from light field data comprising a processor 711 for processing data obtained in accordance with the

method of any embodiment of the invention as hereinbefore described; and a display for rendering an image in accordance with the processed data

5        Many further modifications and variations will suggest themselves to those versed in the art upon making reference to the foregoing illustrative embodiments, which are given by way of example only and which are not intended to limit the scope of the invention, that being determined solely by the appended claims. In particular the different features from different embodiments may be interchanged, where appropriate.

10

**CLAIMS:**

1. A computer implemented method for generating data representative of a light field, the method comprising:

5 obtaining intersection data defining intersections of light field rays from the scene with a plurality of given reference planes, said reference planes corresponding to different depths in the scene, each set of intersection data corresponding to a light field ray having a colour value;

10 determining, one or more data hyper-planes representing the intersection data in a parameter space of sampling cells;

scanning data on or around the data hyper-planes by means of parametric equations to sample data representative of the light field ray

providing a data format representative of the light field including at least one data parameter defining the at least one data hyper plane in the parameter space and

15 the colour value associated with each light field ray.

2. A method according to claim 1, wherein the one or more data hyper-planes are determined by discrete radon transformation.

20 3. A method according to claim 2, wherein two orthogonal discrete radon transforms are applied in the parameter space to obtain the one or more hyper planes.

4. A method according to claim 1 wherein the one or more data hyper-planes are determined from data defining camera acquisition parameters

25

5. A method according to any preceding claim wherein scanning the data comprises applying the following algorithm

```
for each  $i \in [0, N-1] \subset \mathbb{N}$ 
  for each  $j \in [0, M-1] \subset \mathbb{N}$ 
    for each  $k \in [0, K-1] \subset \mathbb{N}$ 
      calculate  $l \in \mathbb{N}$ 
      store RGB value of the ray located in cell  $i, j, k, l$ 
    end for  $k$ 
  end for  $j$ 
end for  $i$ 
```

10

6. A method according to any preceding claim wherein the data parameters defining the at least one data hyper-plane include data representative of at least one of:

15      minimum value of intersection data of a first reference plane;  
      maximum value of intersection data of the first reference plane;  
      minimum value of intersection data of a second reference plane;  
      maximum value of intersection data of the second reference plane;  
      the number of sampling cells defining the parameter space;  
      the position of the first reference plane; and  
20      the position of the second reference plane.

7. A method according to any preceding claim wherein each data hyper-plane is defined by a plurality of cells of the parameter space, at least one first cell representative of the interception of the line with an axis and at least one second cell

25      from which the slope of the line may be determined.

8. A method according to any preceding claim wherein each digital hyper-plane is generated by application of Bresenham's algorithm.

30 9. A method according to any preceding claim wherein a beam of rays is represented as a plurality of hyper-planes having the same slope and different axis interception points.

10. A method according to claim 9 wherein the data representative of the acquired light field data comprises data representative of the thickness of the beam based on upper and lower boundaries of the axis interception data of lines of the beam.

5 11. A method for generating light field rays from light field data provided according to the method of any preceding claim comprising  
reading the meta data defining data parameters defining at least one hyper-plane and  
reading colour data cell by cell

10 12. A device for providing metadata for captured light field data,  
the device comprising  
a light field data acquisition module for acquiring light field data captured by a  
light field camera and  
a light field data generation module configured to  
15 obtain intersection data defining intersections of light field rays from the scene  
with a plurality of given reference planes, said reference planes corresponding to  
different depths in the scene, each set of intersection data corresponding to a light field  
ray having a colour value;  
determine, one or more data hyper-planes representing the intersection data in  
20 a parameter space of sampling cells;  
scan data on or around the data hyper-planes by means of parametric  
equations to sample data representative of the light field ray  
provide a data format representative of the light field including at least one data  
parameter defining the hyper-plane in the parameter space and the colour value  
25 associated with each generated light field ray.

13. A light field imaging device comprising:

30 an array of micro lenses arranged in a regular lattice structure;  
a photosensor configured to capture light projected on the photosensor  
from the array of micro lenses, the photosensor comprising sets of pixels, each  
set of pixels being optically associated with a respective micro lens of the array  
of micro lenses; and  
a device for providing metadata in accordance with claim 12.

14. A device for rendering an image from light field data obtained using a method in accordance with any one of claims 1 to 11.

5

15. A data package for data representative of rays of a light field comprising at least one data parameter defining a hyper-plane in a parameter space, the hyper plane representing intersection data defining intersections of light field rays from the scene with a plurality of given reference planes, said reference planes corresponding to different depths in the scene, each set of intersection data corresponding to a light field ray having a colour value; and the colour value associated with each light field ray.

16. A computer implemented method for generating data representative of a light field comprising

acquiring (S701) light field data representative of light field rays captured from a scene; obtaining (S702) , from the acquired light field data, intersection data defining intersections of the light field rays from the scene with a plurality of given reference planes, said reference planes corresponding to different depths in the scene; and obtaining ray diagram parameters (S704, S705) defining the graphical representation of the intersection data in a ray diagram to provide data representative of the acquired light field data.

17. A method according to claim 16 wherein the interception data corresponding to the light field rays is graphically represented in the ray diagram as datalines and the ray diagram parameters include data representative of at least one of:

the slope of a dataline; and  
an interception of a dataline with an axis of the ray diagram.

30

18. A method according to claim 17 wherein the datalines are detected in the ray diagram by applying a Radon transform.

19. A method according to claim 17 or 18 wherein the graphical representation is provided as a matrix of cells to provide a digital dataline, each digital dataline format being defined by a plurality of cells, at least one first cell representative of the interception of the line with an axis and at least one second cell from which the slope of 5 the line may be determined.
20. A method according to claim 19 wherein each digital dataline is generated by application of Bresenham's algorithm.
- 10 21. A method according to claim 19 or 20 wherein the data representative of the acquired light field data comprises data defining the matrix of cells.
- 15 22. A method according to any one of claims 16 to 21 wherein the data representative of the acquired light field data further comprises colour data representing the colour of the corresponding light field rays.
23. A method according to any one of claims 16 to 22 wherein the data representative of the acquired light field data comprises data defining the number of cameras used to capture the light field rays.
- 20 24. A method according to any one of claims 17 to 23 wherein a beam of rays is represented as a plurality of lines having the same slope and different axis interception points.
- 25 25. A method according to claim 24 wherein the data representative of the acquired light field data comprises data representative of the thickness of the beam based on upper and lower boundaries of the axis interception data of lines of the beam.
- 30 26. A method according to claim 25 wherein the data representative of the acquired light field data is provided as meta data, the header of meta data comprising the ray diagram parameters defining the graphical representation of the intersection data in a ray diagram and the body of the metadata comprising data representative of colour of the ray.

27. A device for providing metadata for captured light field data, the device comprising

a light field data acquisition module for acquiring light field data captured by a light field camera and

5 a light field data generation module configured to obtain, from the acquired light field data, intersection data defining intersections of the light field rays from the scene with a plurality of given reference planes, said reference planes corresponding to different depths in the scene; and obtain ray diagram parameters defining the graphical representation of the 10 intersection data in a ray diagram to provide data representative of the acquired light field data.

28. A light field imaging device comprising:

an array of micro lenses arranged in a regular lattice structure;

15 a photosensor configured to capture light projected on the photosensor from the array of micro lenses, the photosensor comprising sets of pixels, each set of pixels being optically associated with a respective micro lens of the array of micro lenses; and

a device for providing metadata in accordance with claim 12.

20

29. A device for rendering an image from light field data

a processor for processing data obtained in accordance with the method of any one of claims 16 to 26; and


a display for rendering an image in accordance with the processed data


25


30. A data package for data representative of rays of a light field comprising ray diagram parameters defining the graphical representation in a ray diagram of intersection data of the light rays, the intersection data defining intersections of the light field rays from the scene with a plurality of given reference planes, said reference planes corresponding to different depths in the scene; and colour data defining colours of the light field ray.


31. A computer program product for a programmable apparatus, the computer program product comprising a sequence of instructions for implementing a method


according to any one of claims 1 to 10 or 16 to 26 when loaded into and executed by the programmable apparatus.

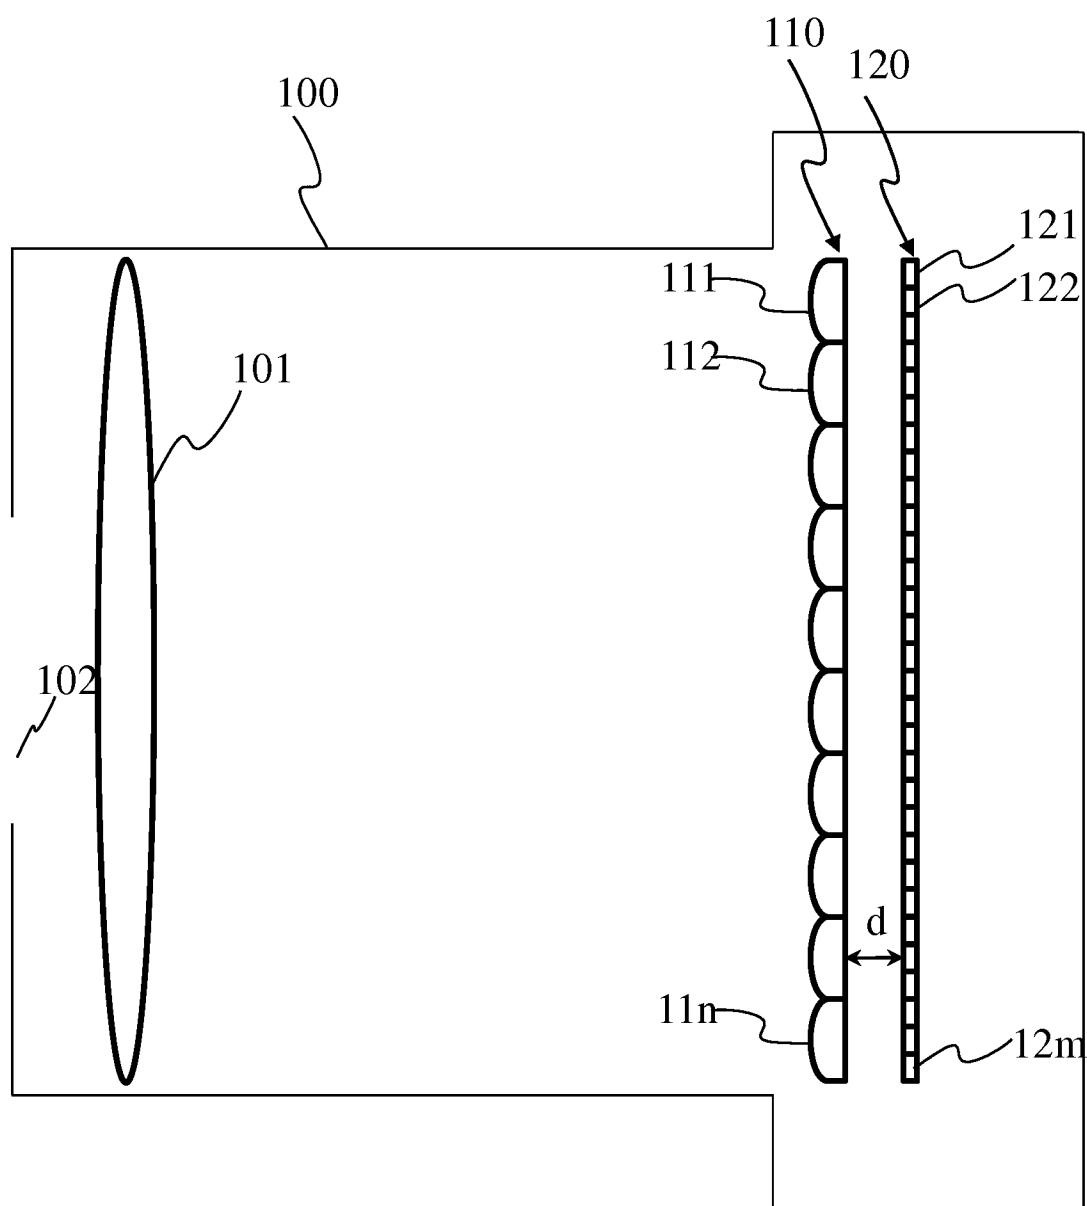**FIG. 1A**

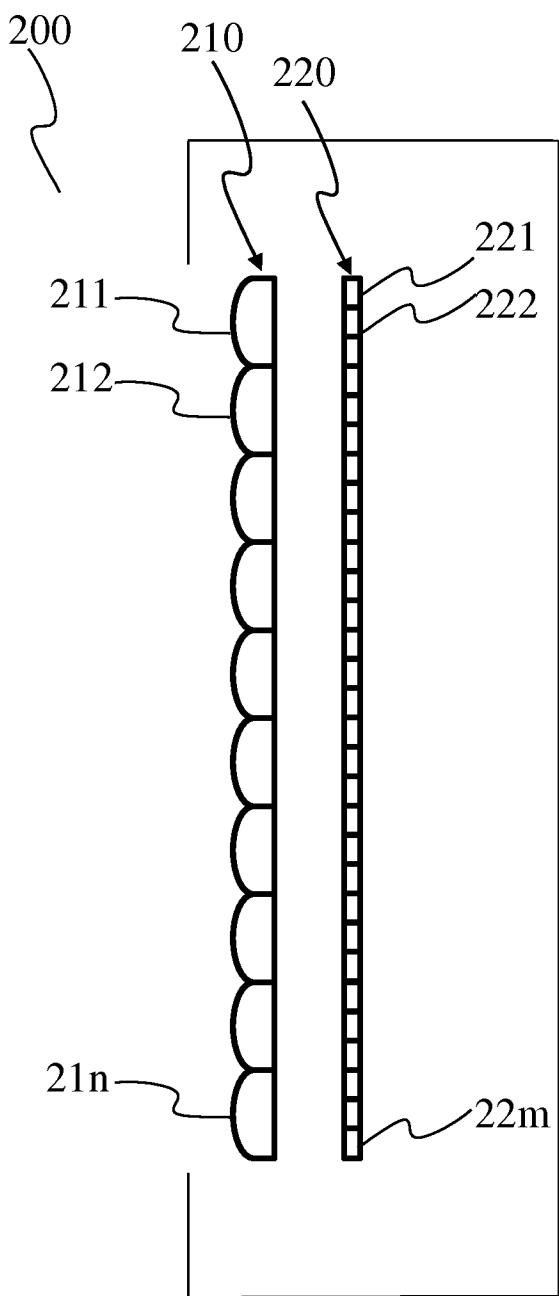
**FIG. 1B**

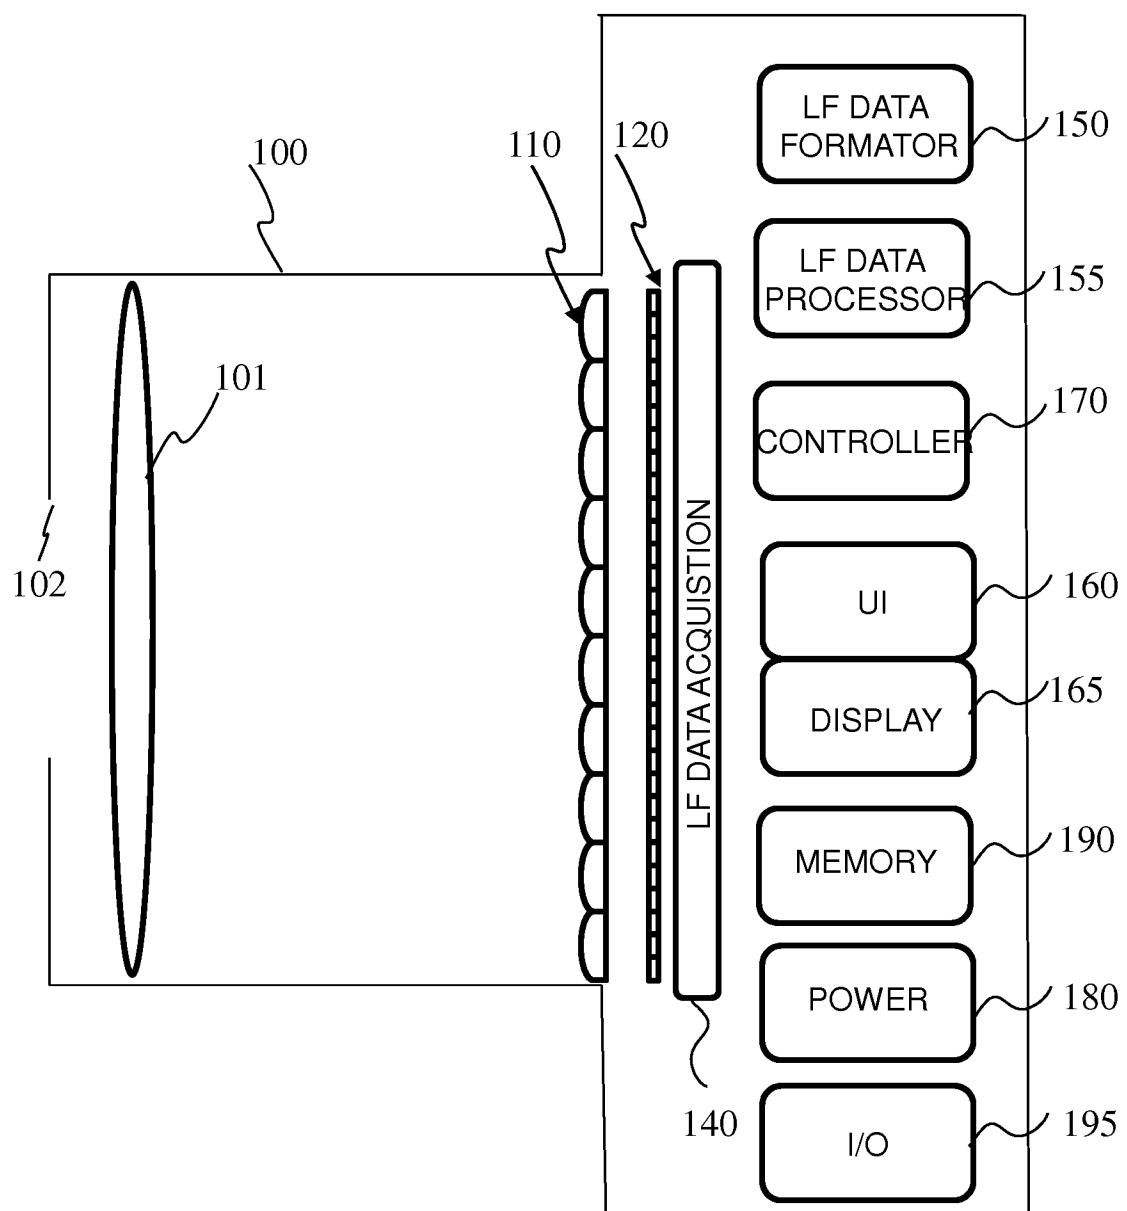**FIG. 2A**

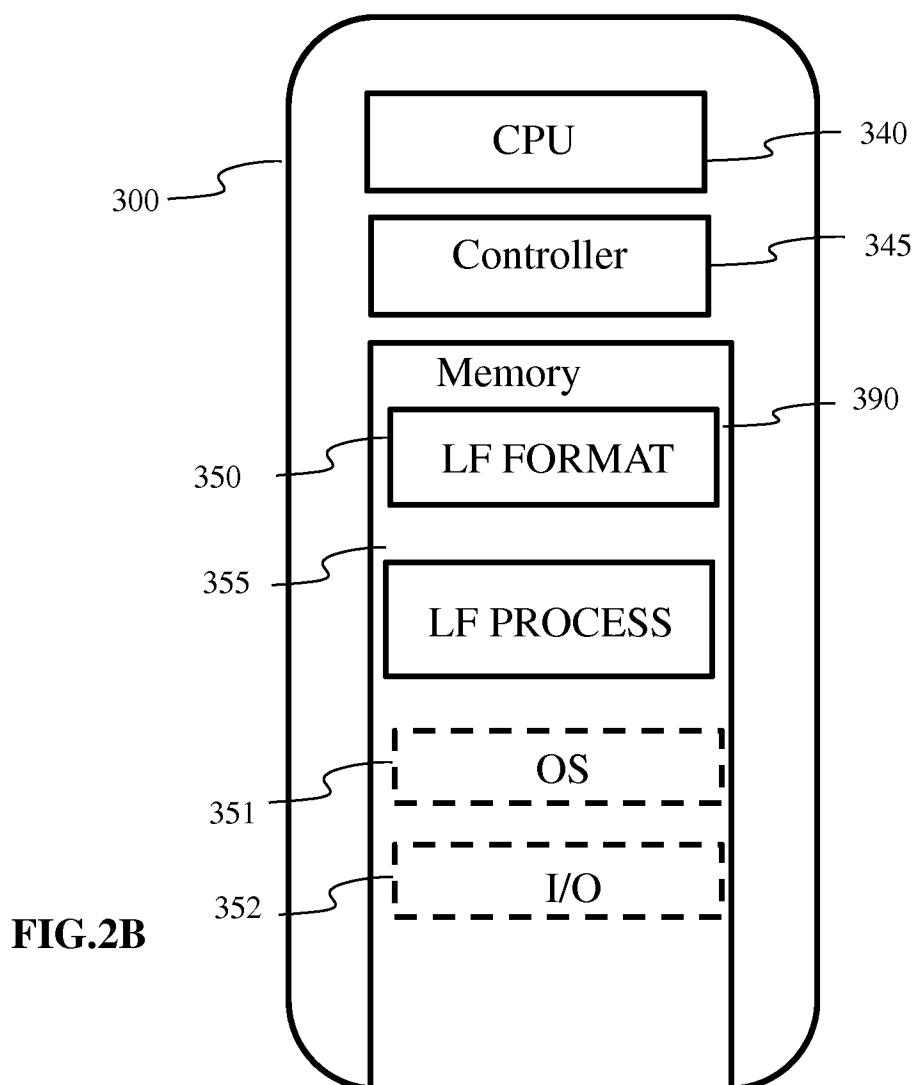

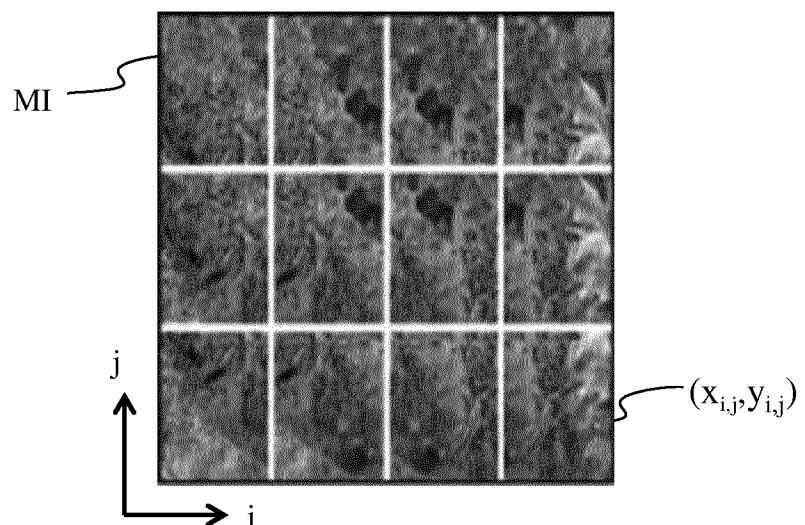**FIG. 3**

First parametrization plane    Second parametrization plane    Rendering plane

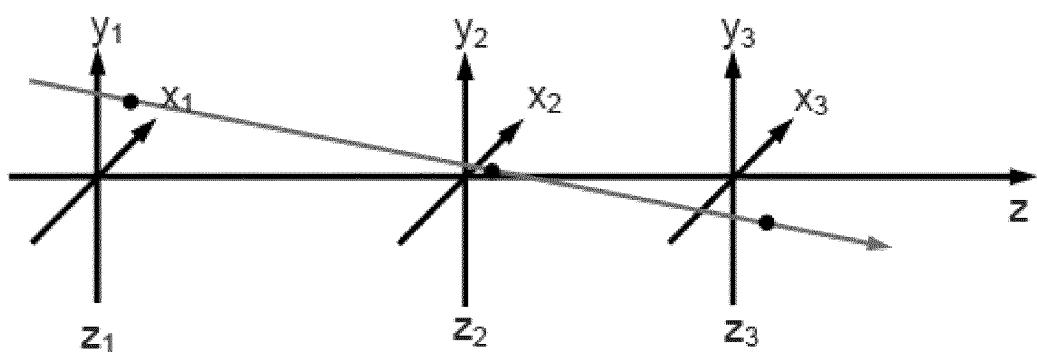**FIG. 5**

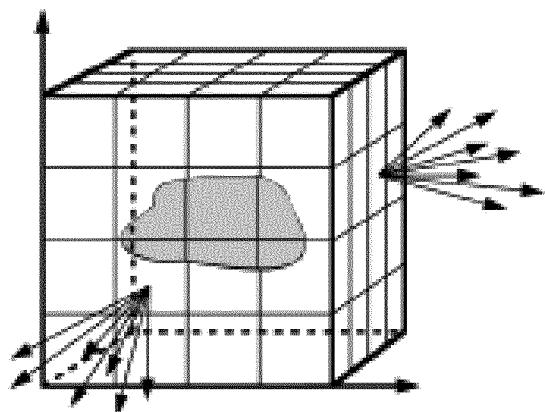


FIG. 4A








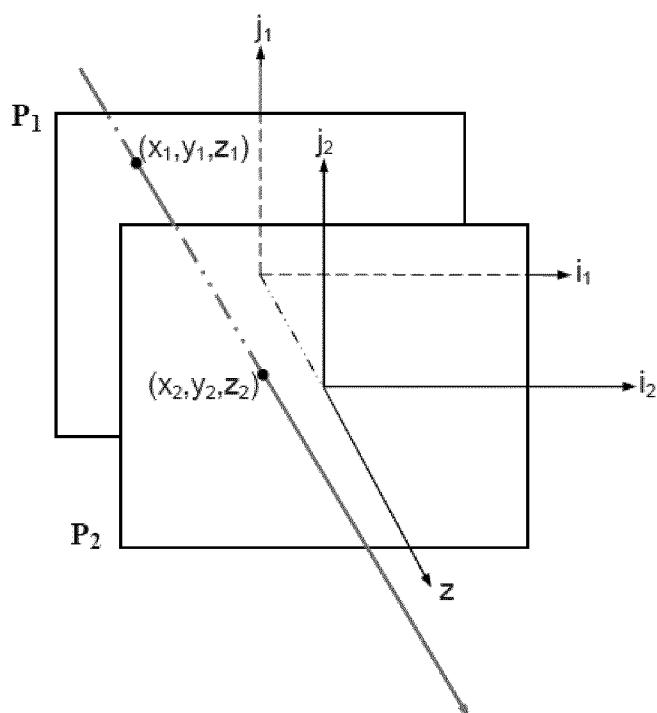



FIG. 4B


**FIG. 6**

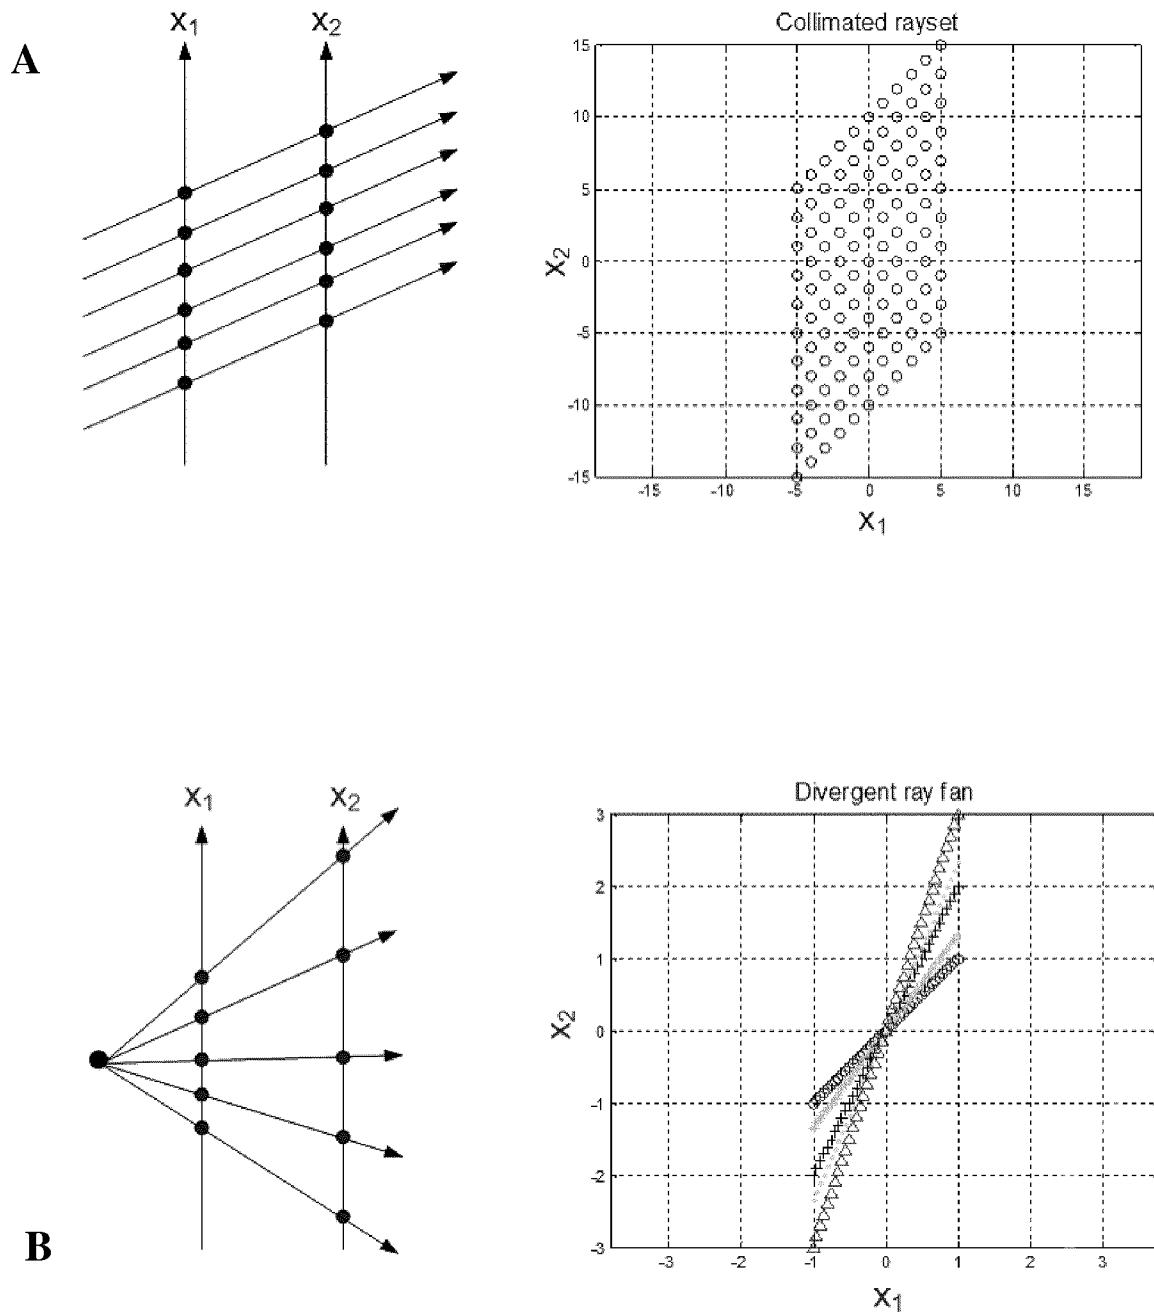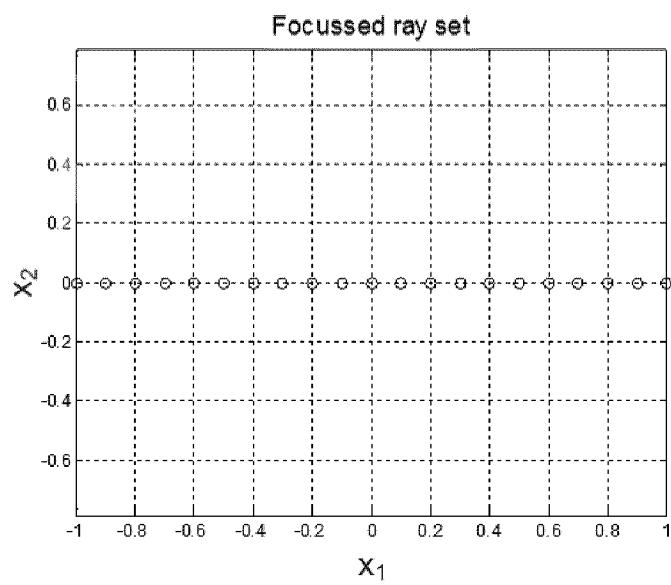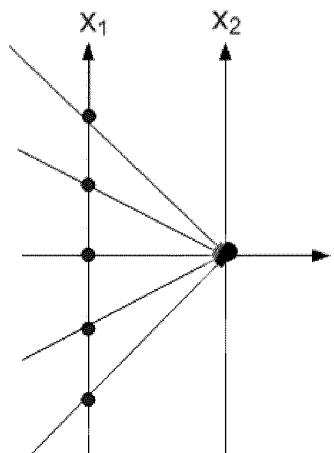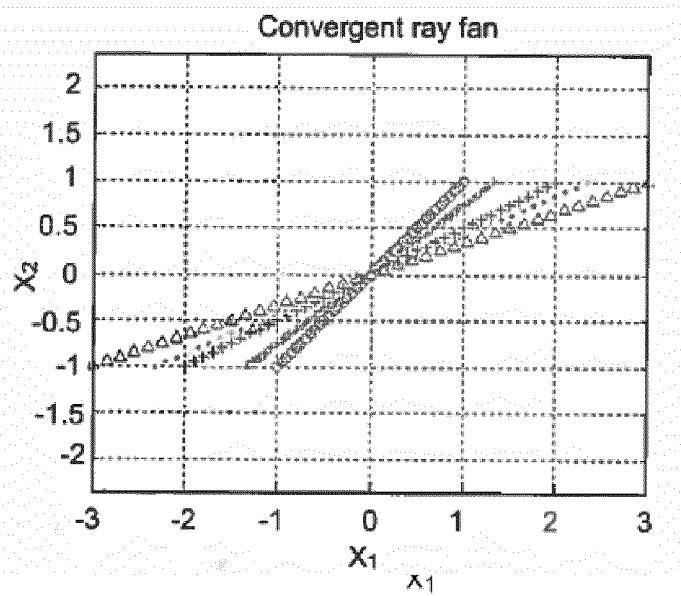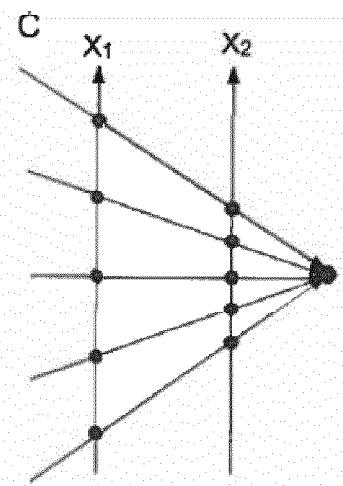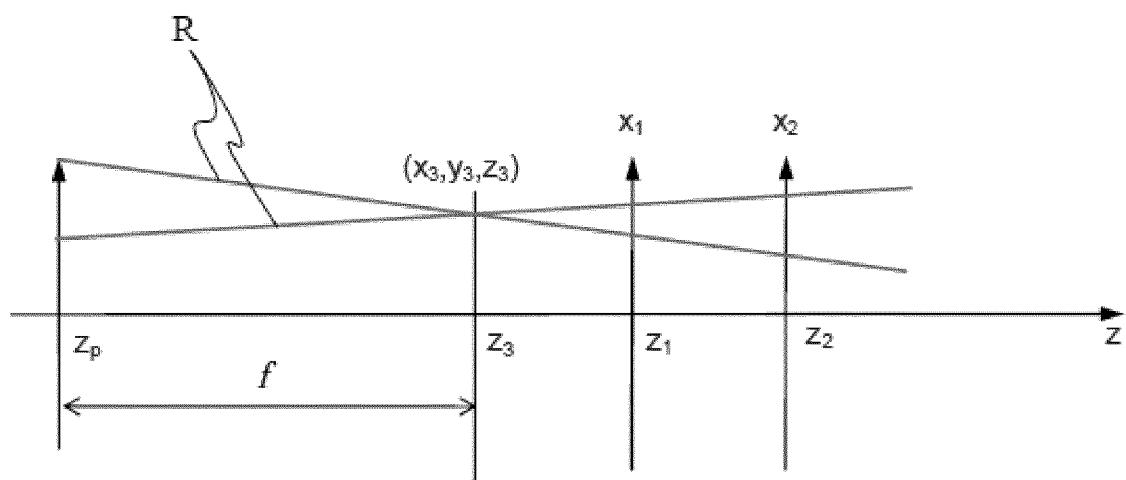
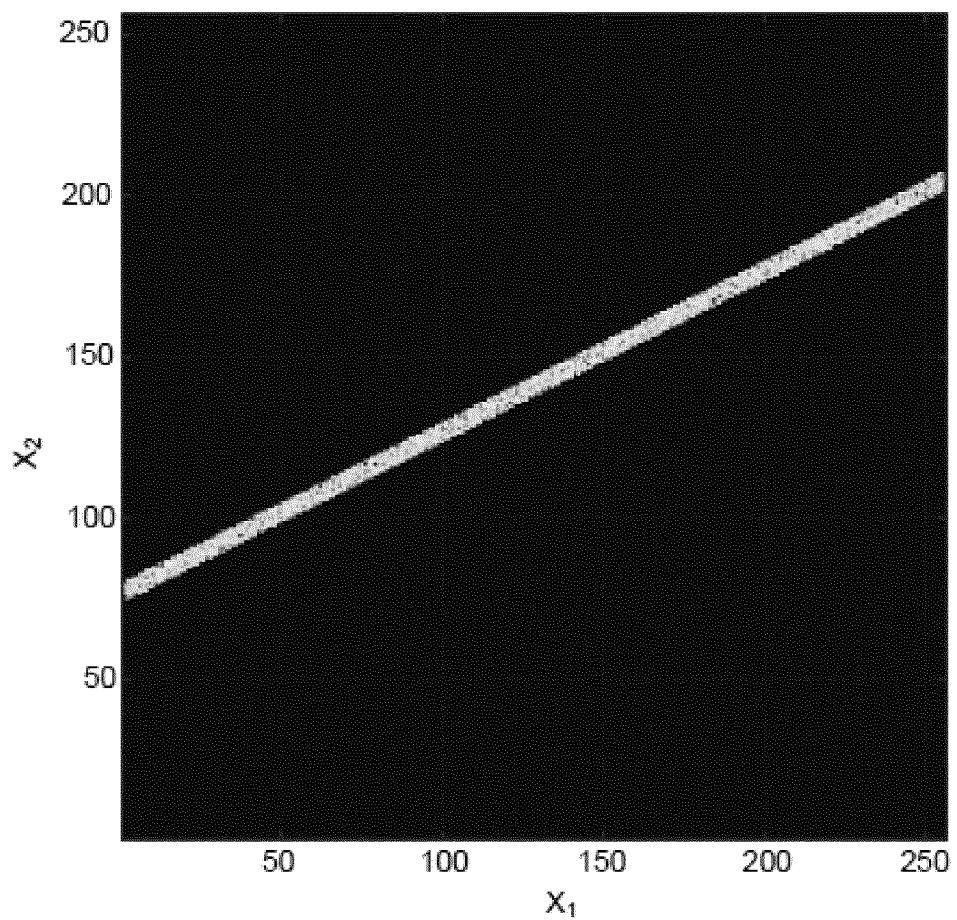



D



**FIG. 7****FIG. 8**


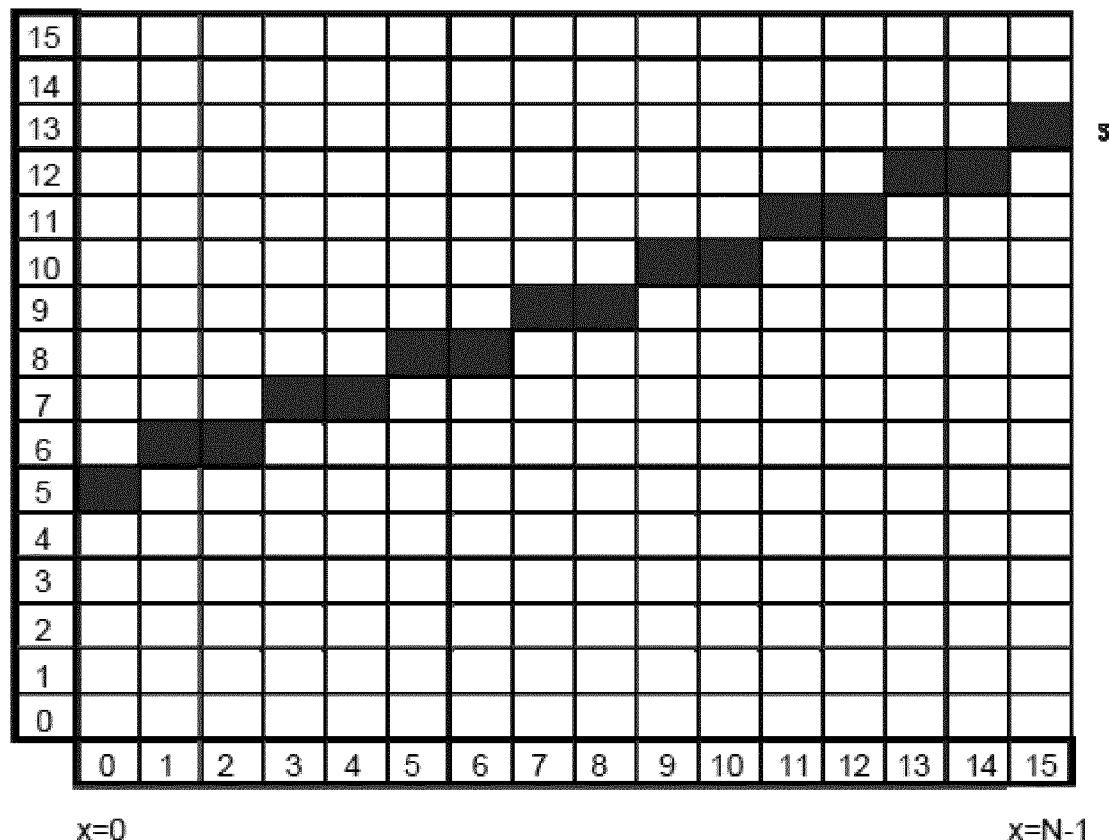
**FIG. 9**

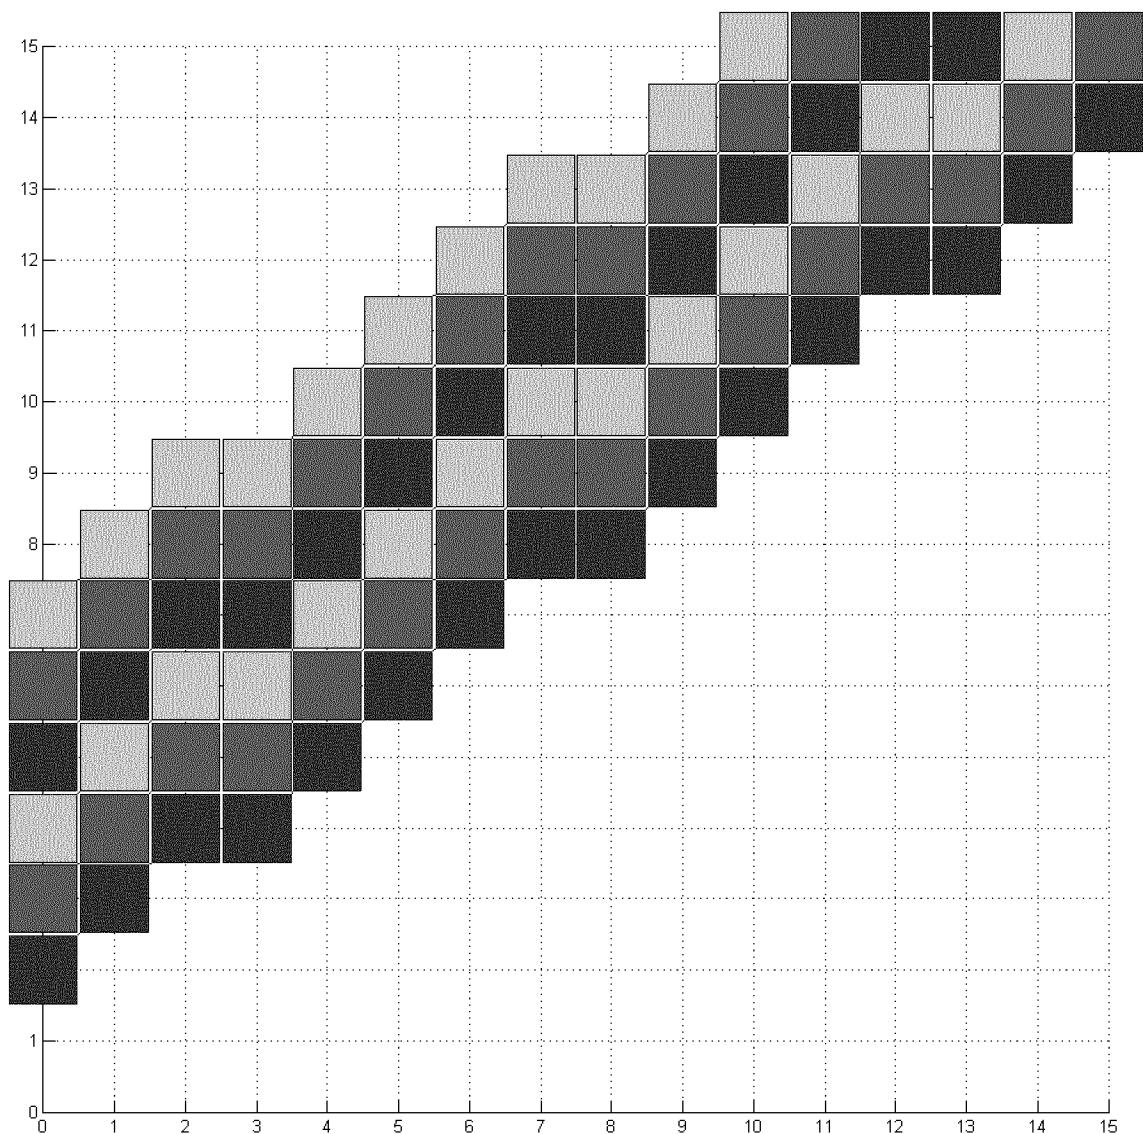**FIG. 10**

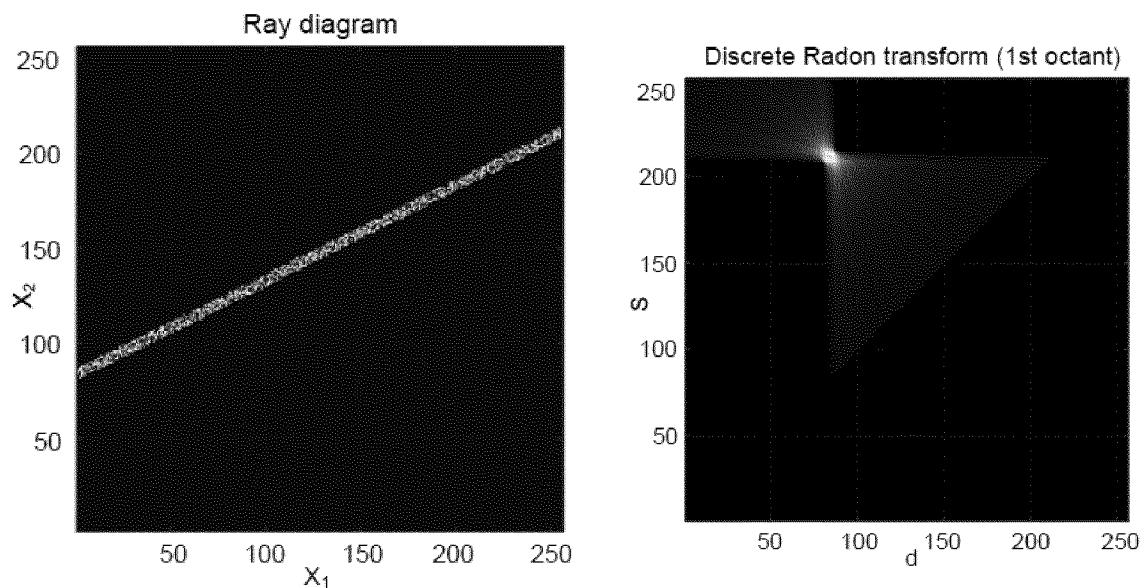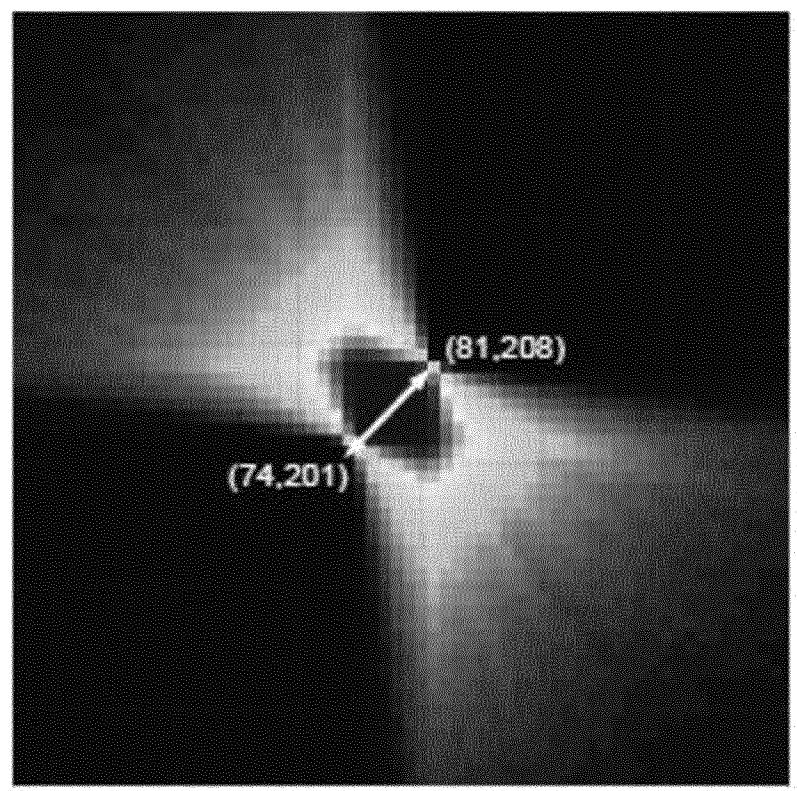**FIG. 11A****FIG. 11B****FIG. 11C**

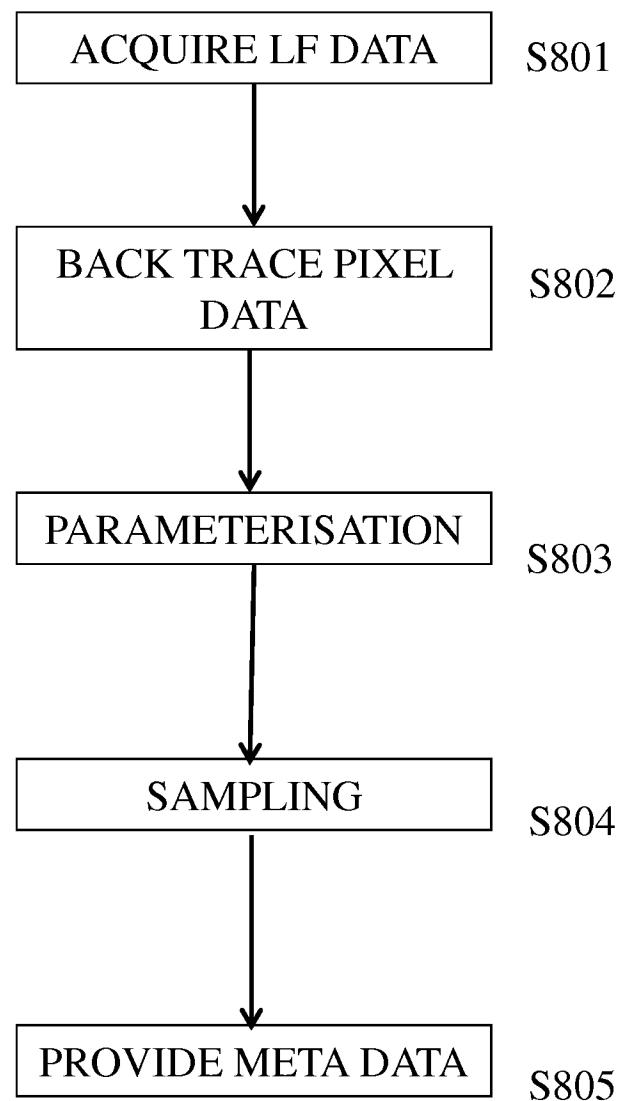**FIG. 12A**

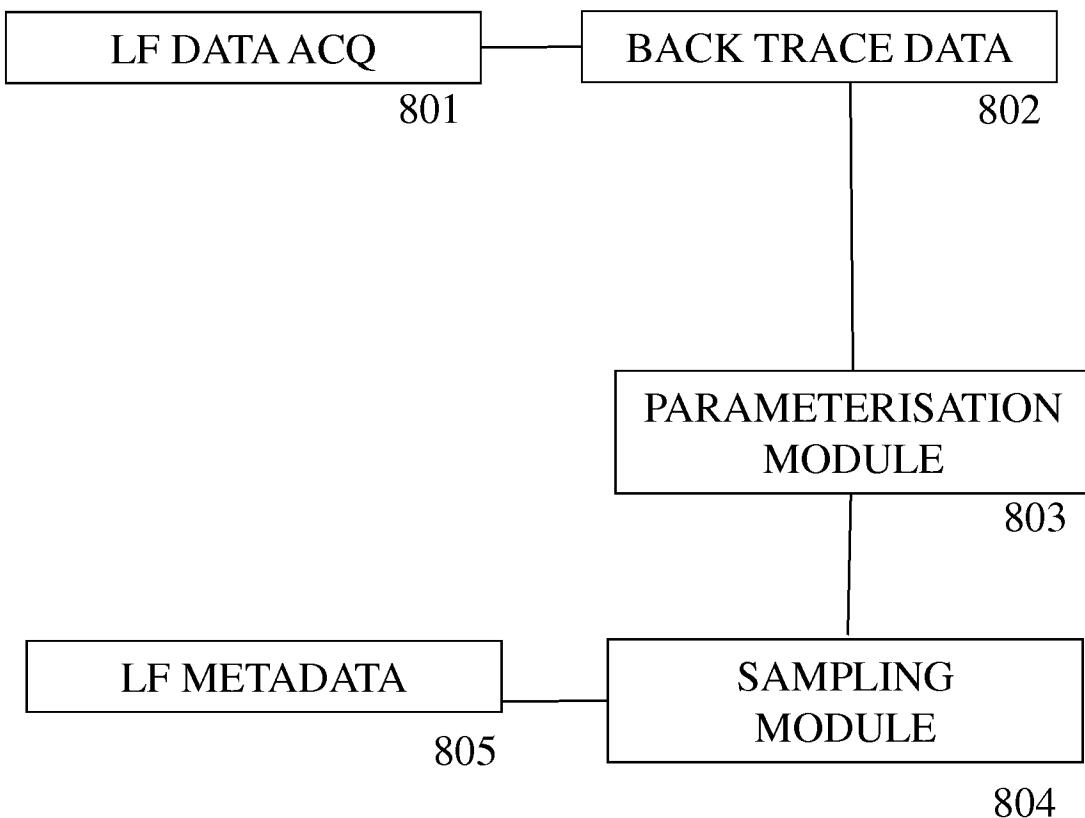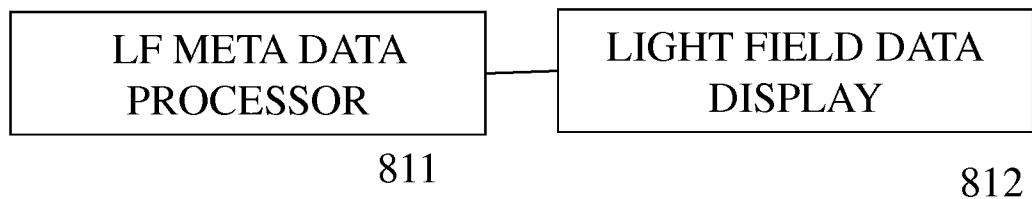**FIG. 12B****FIG. 12C**

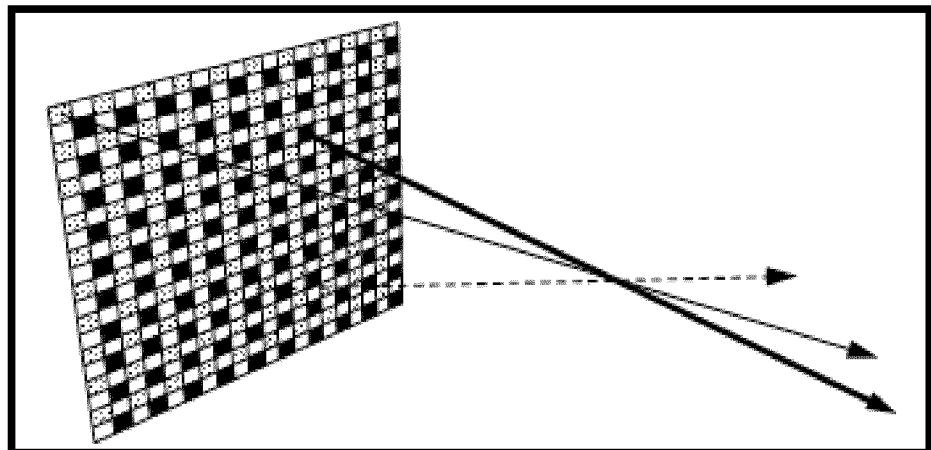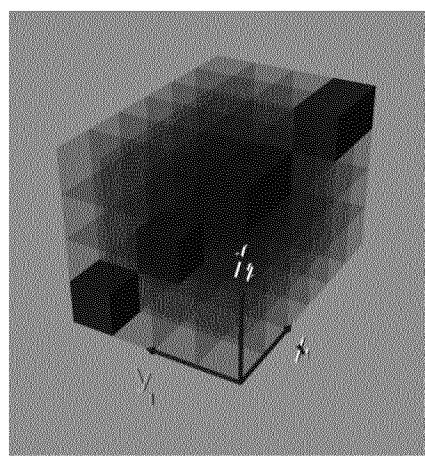**FIG. 13A****FIG. 13B****FIG. 14**

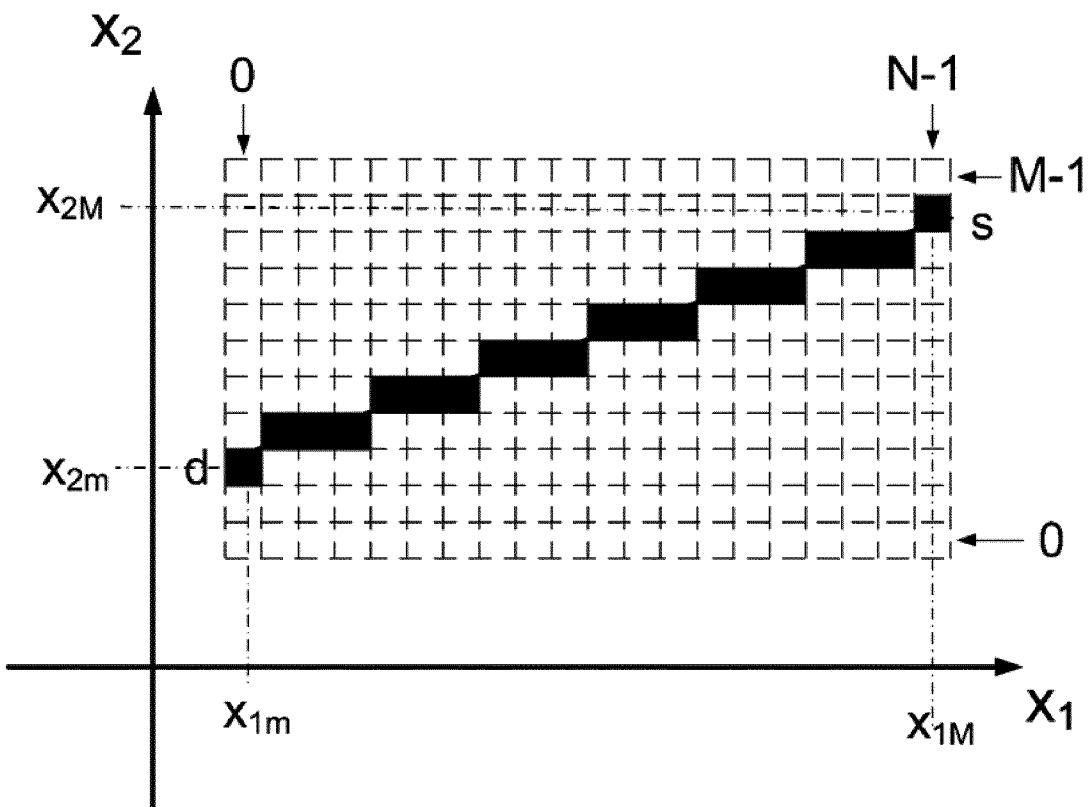


FIG. 15

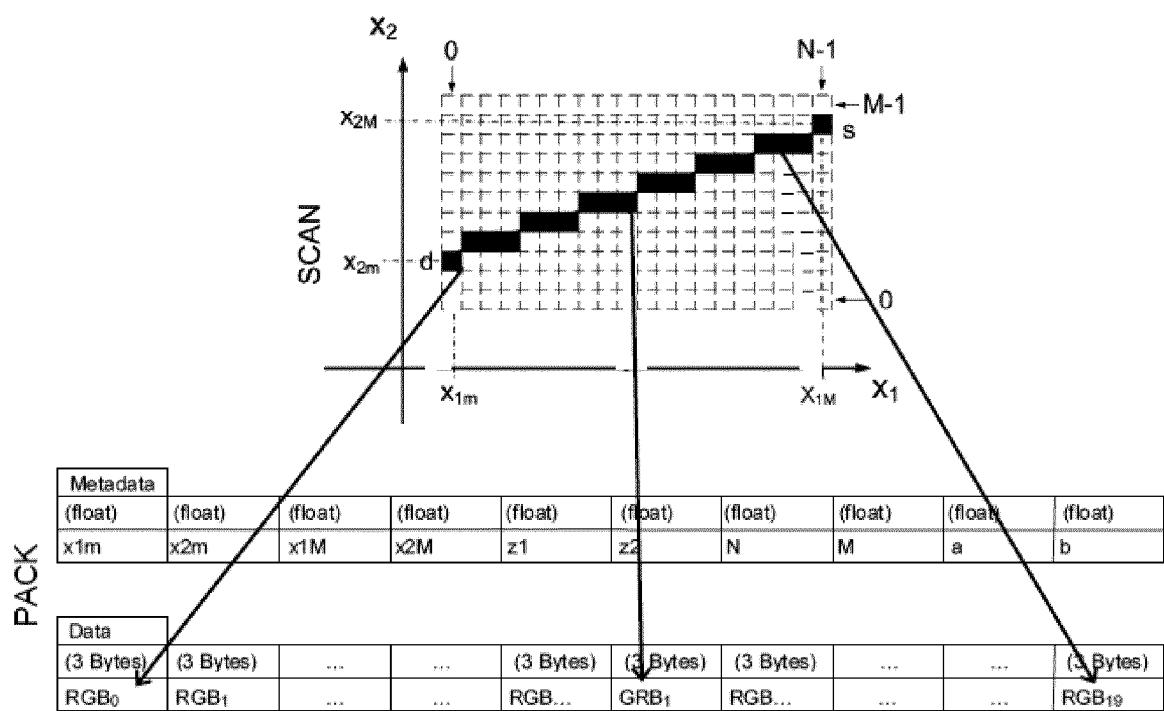


FIG. 16

FIG.17

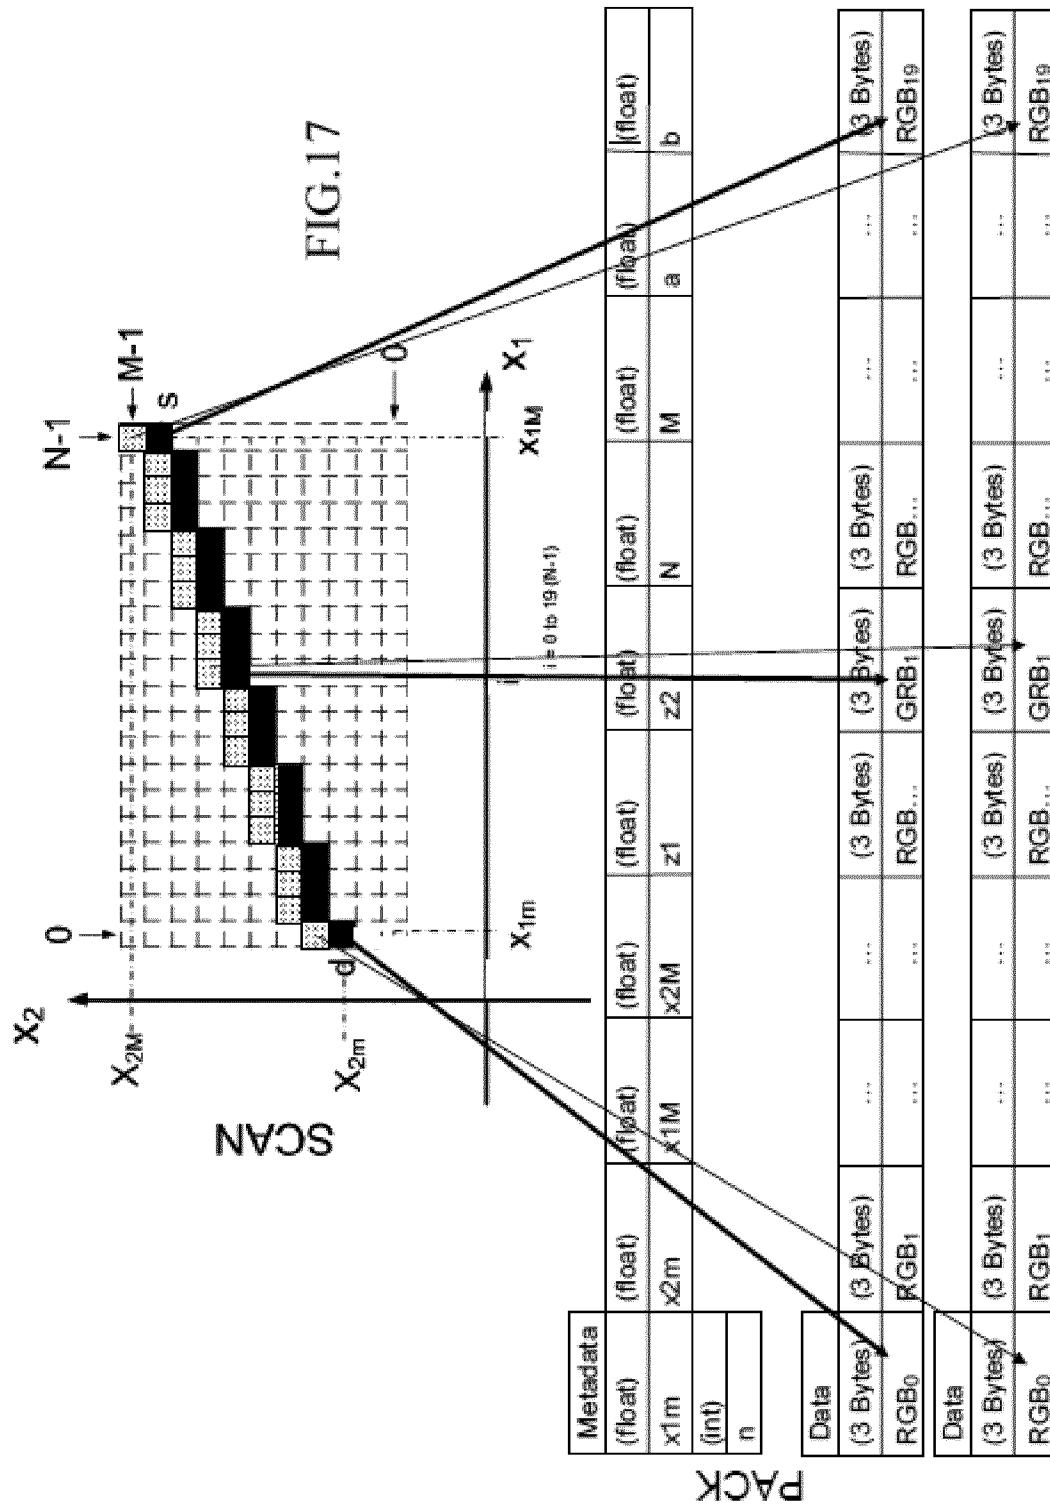
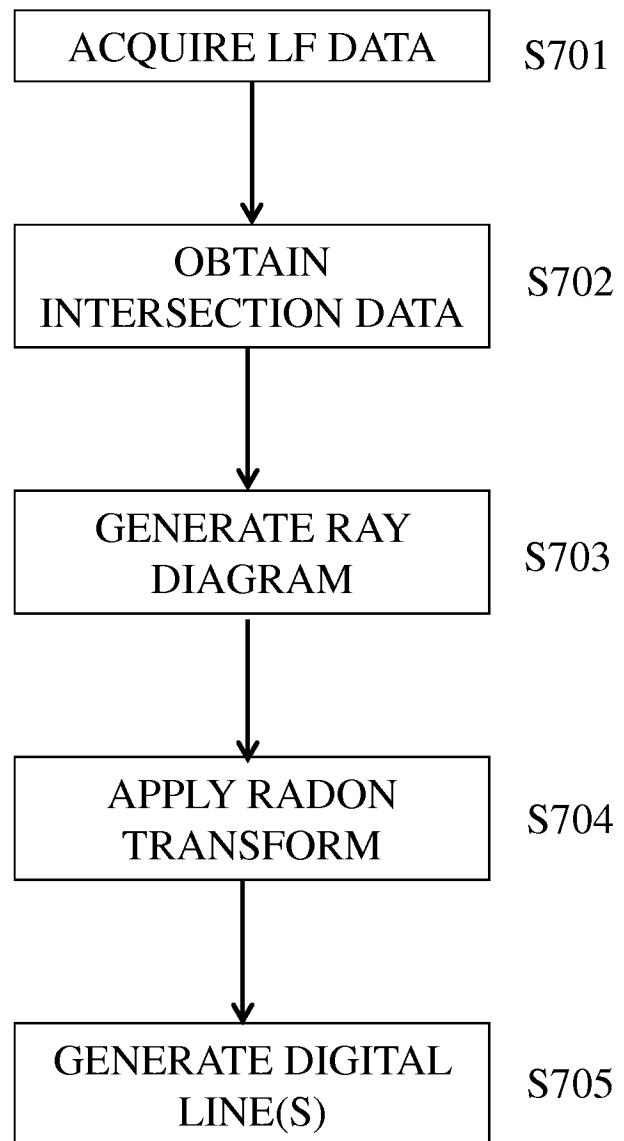
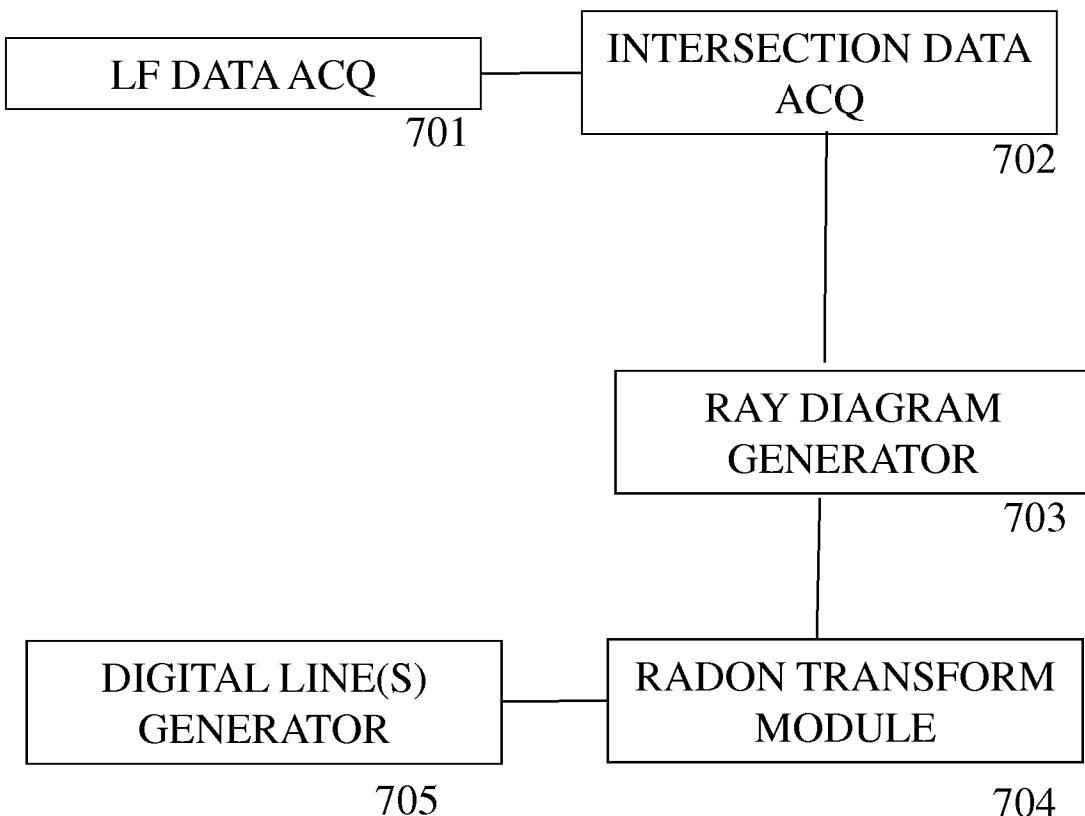
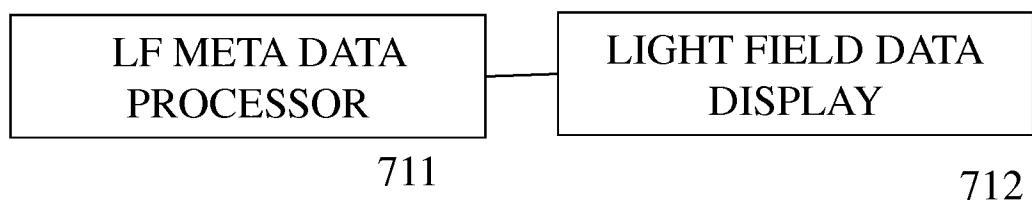
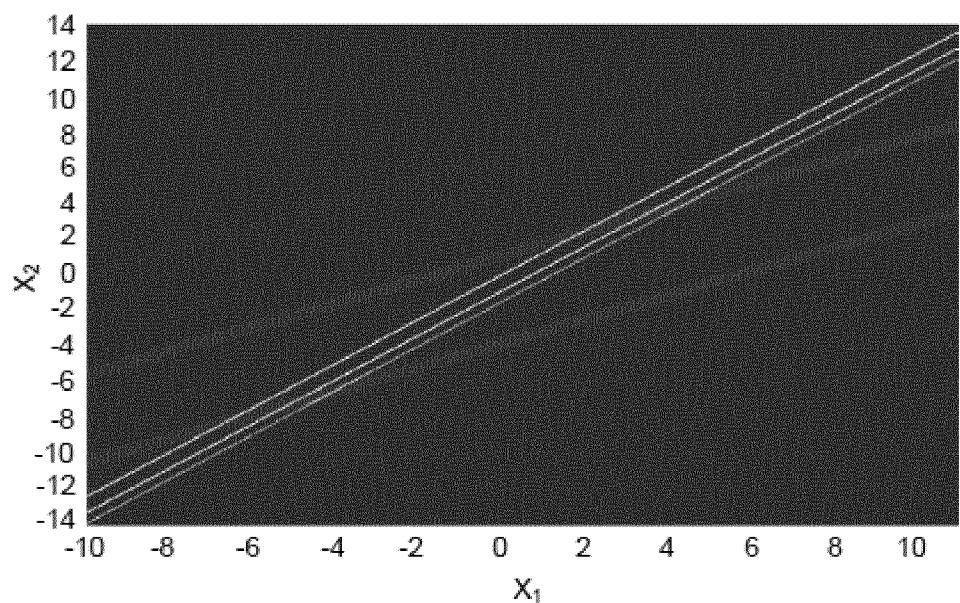


FIG. 17

**FIG. 18A**

**FIG. 18B****FIG. 18C**

**FIG. 19**

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2016/072043

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. G06T5/50  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
G06T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, COMPENDEX, INSPEC, IBM-TDB, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2015/177062 A1 (NISHIYAMA TOMOHIRO [JP]) 25 June 2015 (2015-06-25) paragraph [0029] - paragraph [0063] -----	16-31
A	US 6 097 394 A (LEVOY MARC [US] ET AL) 1 August 2000 (2000-08-01) column 11, line 47 - column 13, line 29 -----	1-15,31
A	US 2011/032337 A1 (RODRIGUEZ RAMOS JOSE MANUEL [ES] ET AL) 10 February 2011 (2011-02-10) paragraph [0032] - paragraph [0033] ----- -/-	1-15,31



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

2 December 2016

15/12/2016

Name and mailing address of the ISA/  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Rockinger, Oliver

## INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2016/072043

## C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	TODOR GEORGIEV ET AL: "Lytro camera technology: theory, algorithms, performance analysis", PROCEEDINGS OF SPIE, vol. 8667, 26 February 2013 (2013-02-26), page 86671J, XP055203972, ISSN: 0277-786X, DOI: 10.1117/12.2013581 the whole document -----	1-31
A	US 2014/328535 A1 (SORKINE-HORNUNG ALEXANDER [CH]) 6 November 2014 (2014-11-06) paragraph [0023] - paragraph [0055] -----	1-31
A	YAMASHITA K ET AL: "Compressive acquisition of ray-space using radon transform", PROCEEDINGS OF THE SPIE - THE INTERNATIONAL SOCIETY FOR OPTICAL ENGINEERING SPIE - THE INTERNATIONAL SOCIETY FOR OPTICAL ENGINEERING USA, vol. 7237, 11 January 2009 (2009-01-11), XP040493754, ISSN: 0277-786X the whole document -----	1-31
A	TODOR GEORGIEV ET AL: "The radon image as plenoptic function", 2014 IEEE INTERNATIONAL CONFERENCE ON IMAGE PROCESSING (ICIP), 27 October 2014 (2014-10-27), pages 1922-1926, XP055205391, DOI: 10.1109/ICIP.2014.7025385 ISBN: 978-1-47-995751-4 the whole document -----	1-31

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/EP2016/072043

### Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1.  Claims Nos.: because they relate to subject matter not required to be searched by this Authority, namely:
  
2.  Claims Nos.: because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3.  Claims Nos.: because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

### Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1.  As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
  
2.  As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
  
3.  As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
  
4.  No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

#### Remark on Protest

The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

No protest accompanied the payment of additional search fees.

**FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210**

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-31

efficiently storing and accessing light field data

1.1. claims: 1-15(completely); 31(partially)

the light field data, i.e. the rays of the ray diagram (obtained by the standard two plane description of the light field data) being described and encoded by the data encompassed in one or more hyperplanes which may be determined by applying (two orthogonal) Radon transform(s) to the ray diagram

1.2. claims: 16-30(completely); 31(partially)

the light field data, i.e. the rays of the ray diagram (obtained by the standard two plane description of the light field data) being encoded by their slope and interception parameters which are determined by applying a Radon transform to the ray diagram

---

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2016/072043

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 2015177062	A1	25-06-2015	JP US	2015119395 A 2015177062 A1		25-06-2015 25-06-2015
US 6097394	A	01-08-2000	AU US WO	6950098 A 6097394 A 9849667 A2		24-11-1998 01-08-2000 05-11-1998
US 2011032337	A1	10-02-2011	AU BR CA CN CO DK EG EP ES HK IL JP JP KR MA NZ RU UA US WO ZA	2009204788 A1 PI0907392 A2 2711727 A1 101952855 A 6300819 A2 2239706 T3 26176 A 2239706 A1 2372515 A1 1153297 A1 206807 A 5269099 B2 2011514964 A 20100136448 A 32069 B1 586721 A 2010133943 A 103759 C2 2011032337 A1 2009090291 A1 201004763 B		23-07-2009 21-07-2015 23-07-2009 19-01-2011 21-07-2011 03-03-2014 04-04-2013 13-10-2010 23-01-2012 10-01-2014 31-03-2015 21-08-2013 12-05-2011 28-12-2010 01-02-2011 30-11-2012 27-02-2012 25-11-2013 10-02-2011 23-07-2009 26-10-2011
US 2014328535	A1	06-11-2014	EP HK US	2806396 A1 1200961 A1 2014328535 A1		26-11-2014 14-08-2015 06-11-2014