US 20020100616A1

(19) United States

(12) Patent Application Publication (10) Pub. No.: US 2002/0100616 A1

Zupanick et al. (43) Pub. Date: Aug. 1, 2002

(54) METHOD AND SYSTEM FOR ACCESSING SUBTERRANEAN ZONES FROM A LIMITED SURFACE AREA

(76) Inventors: **Joseph A. Zupanick**, Pineville, WV (US); **Monty H. Rial**, Dallas, TX (US)

Correspondence Address:
James L. Baudino, Esq.
Baker Botts L.L.P.
2001 Ross Avenue
Dallas, TX 75201 (US)

(21) Appl. No.: **09/773,217**

(22) Filed: **Jan. 30, 2001**

Publication Classification

(51) **Int. Cl.**[7] **E21B 1/00**

(52) **U.S. Cl.** **175/67**; 166/52

(57) **ABSTRACT**

A method and system for accessing subterranean zones from the surface includes a substantially vertical well bore extending from the surface to a target zone, and an articulated well bore extending from the substantially vertical well bore to the target zone. The articulated well bore diverges from the substantially vertical well bore between the surface and the target zone. The system also includes a well bore pattern extending from the articulated well bore in the target zone operable to collect resources from the target zone. The system also includes a subsurface channel operable to communicate resources from the well bore pattern to the substantially vertical well bore. The system further includes a vertical pump disposed in the substantially vertical well bore and operable to lift resources collected in the substantially vertical well bore to the surface.

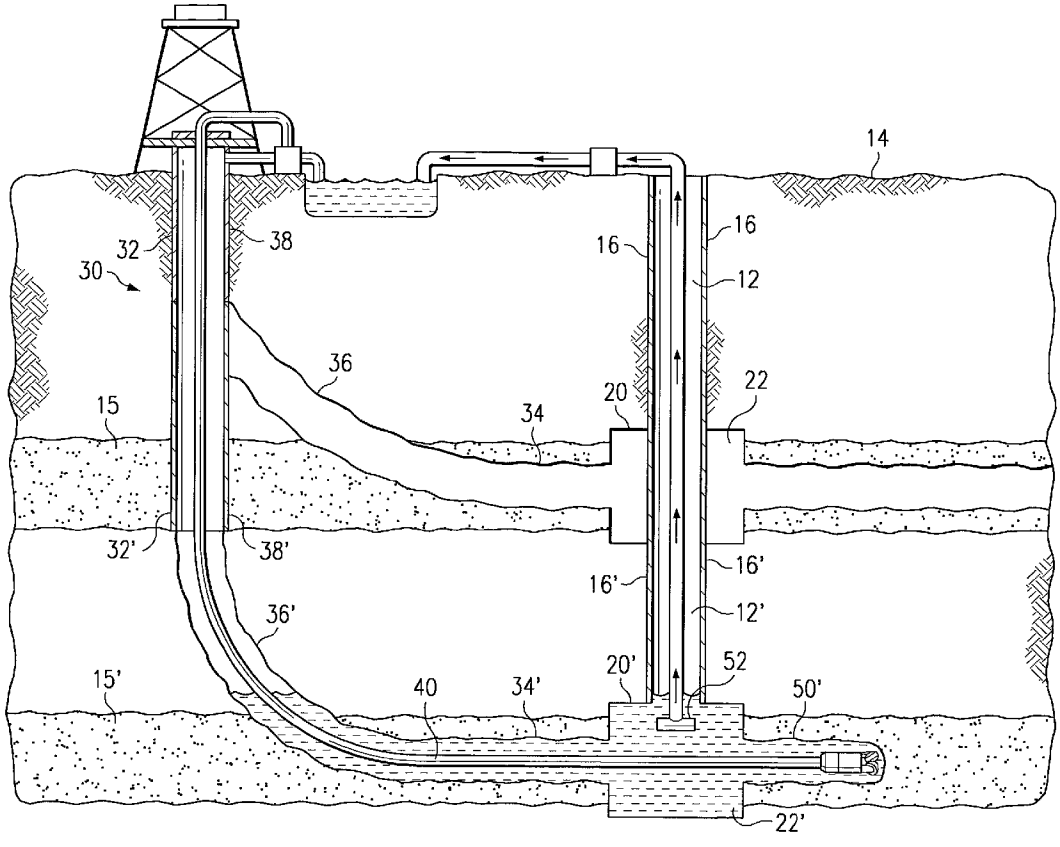
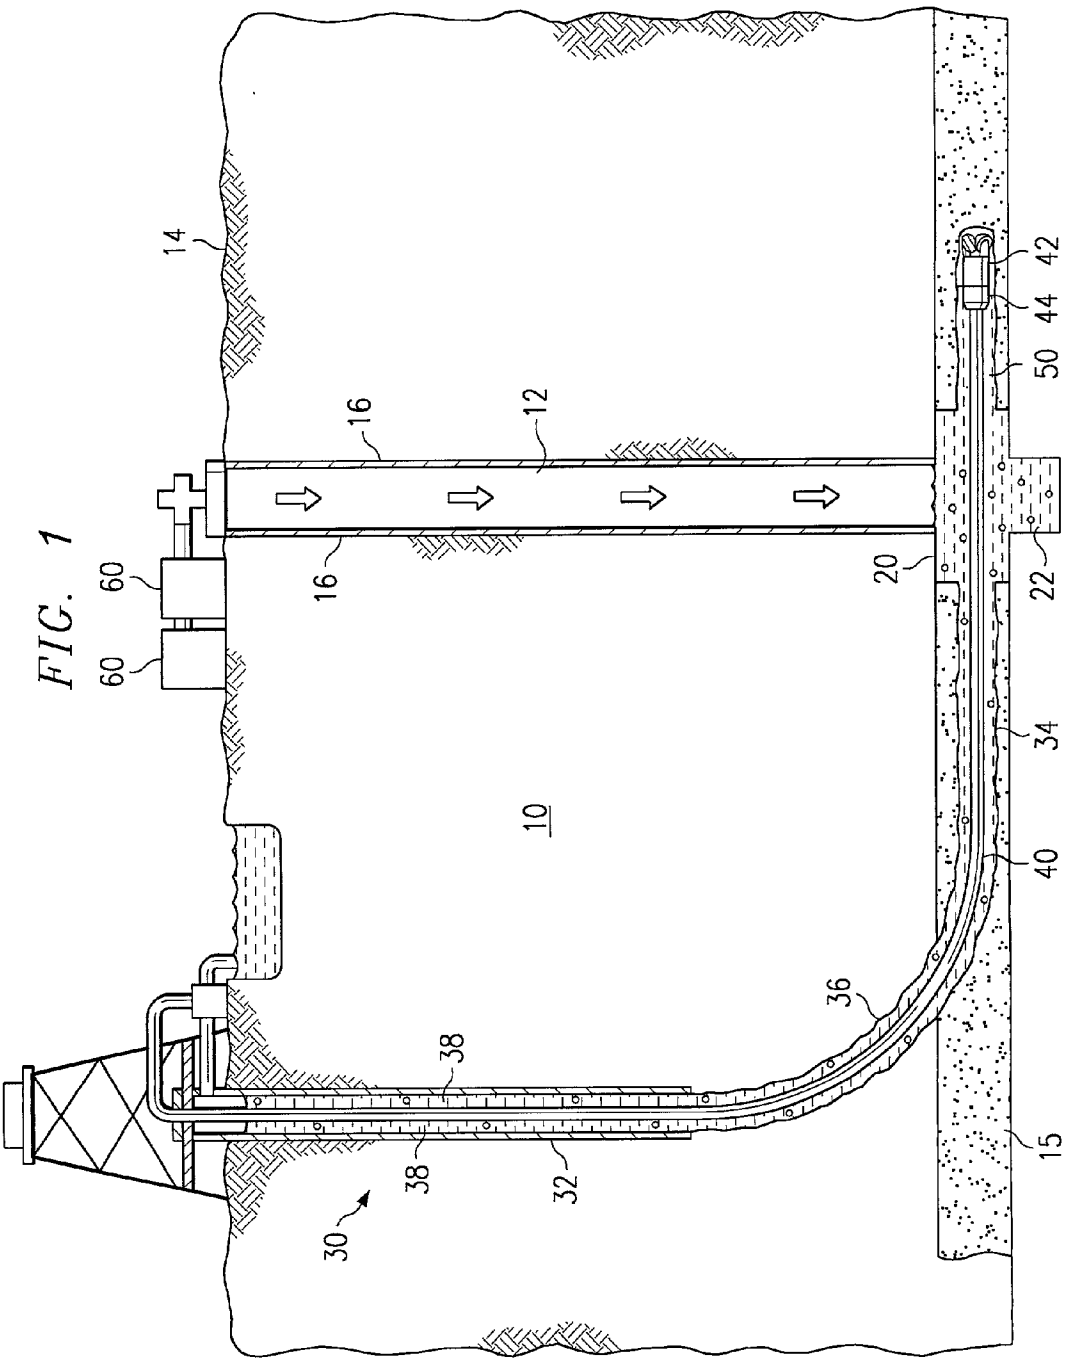


FIG. 1



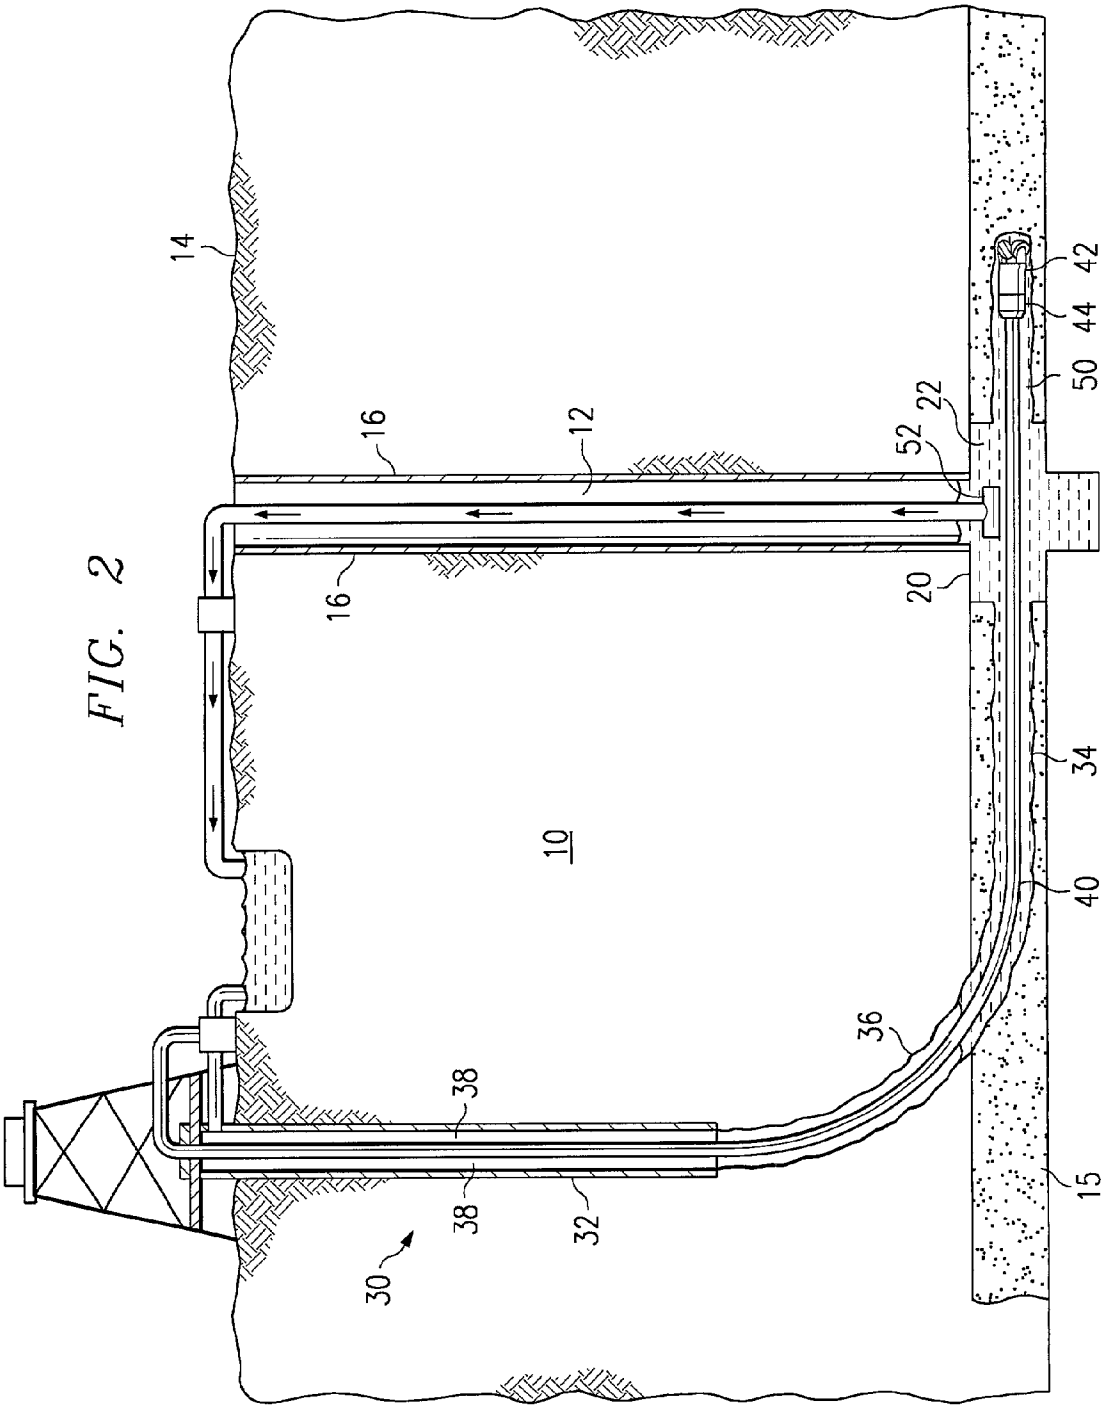


FIG. 2

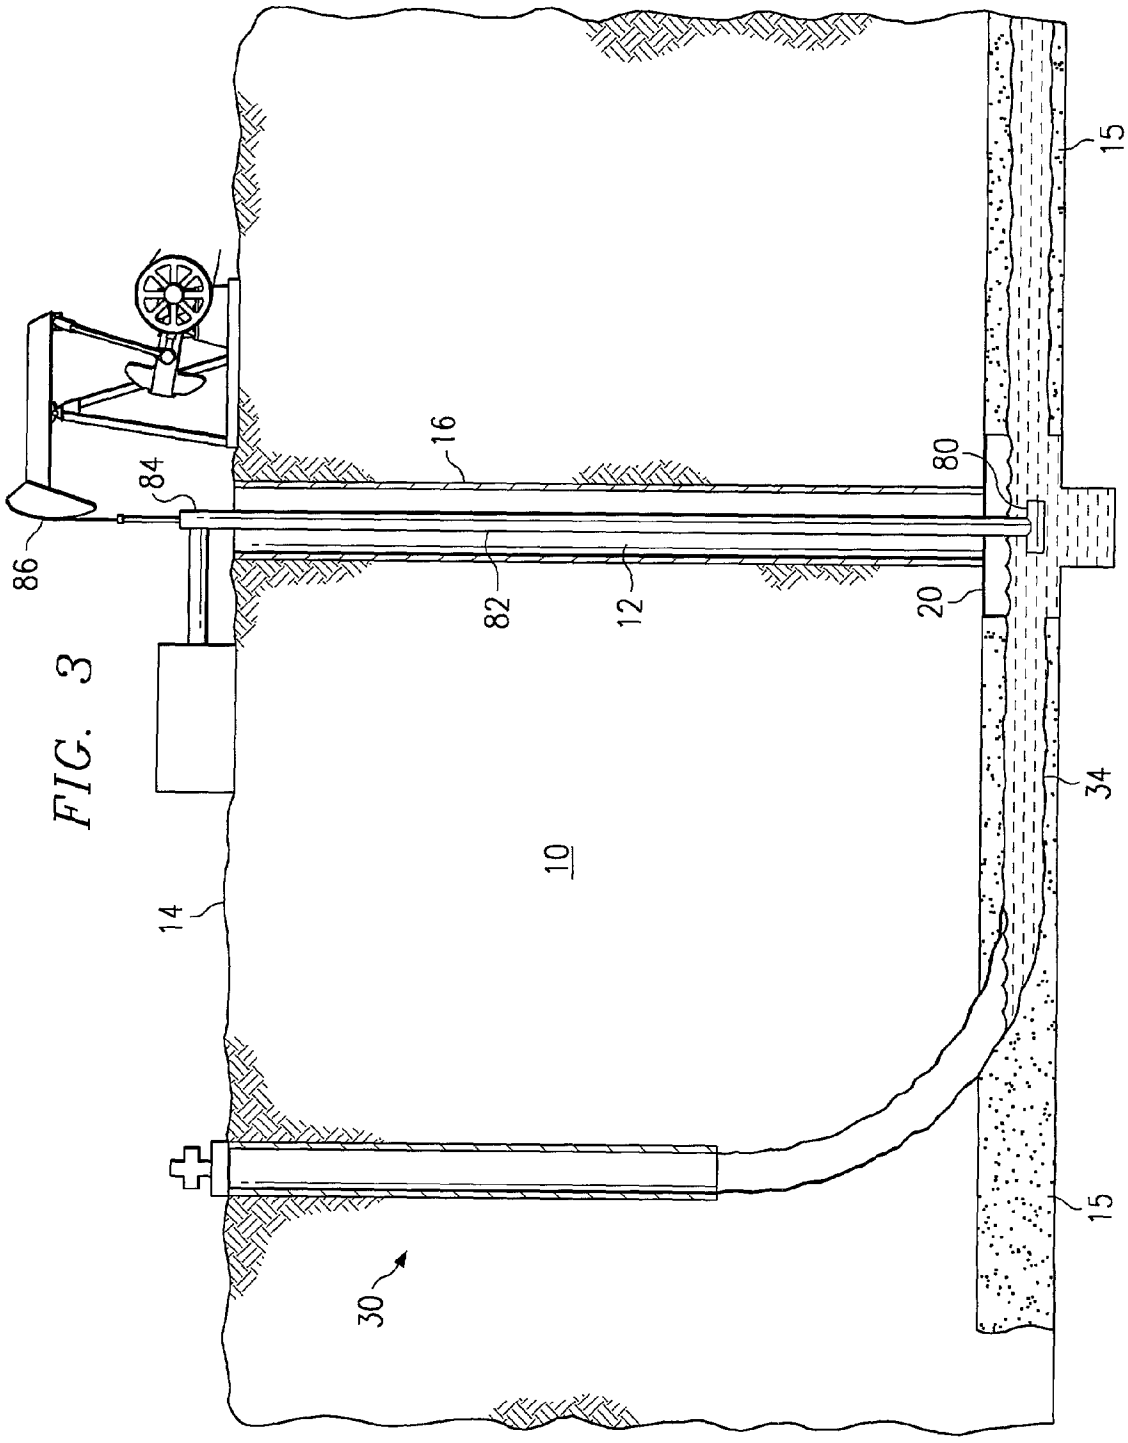


FIG. 3

FIG. 4

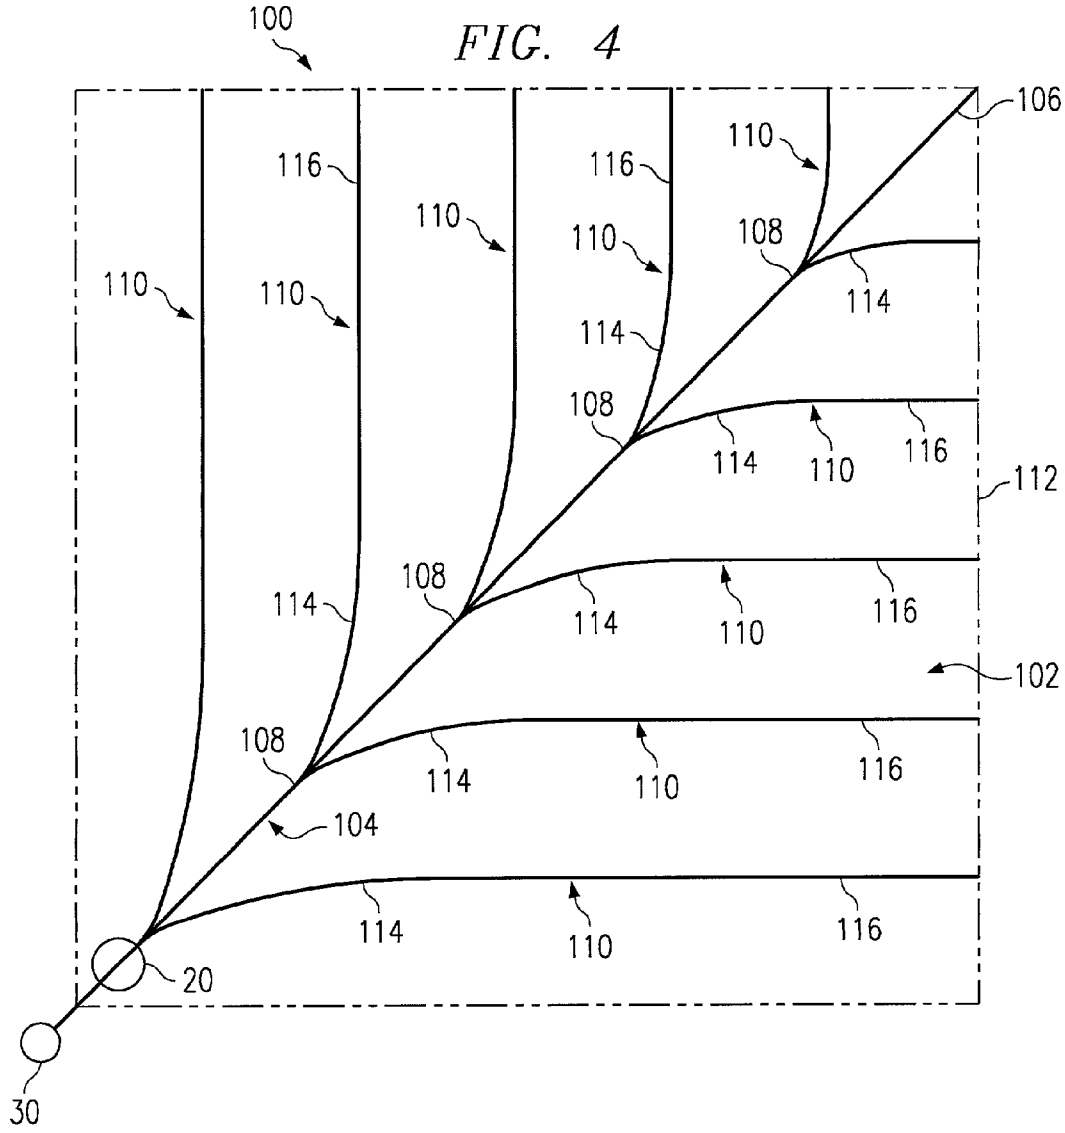

100
106
110
116
116
110
110
108
110
110
114
114
108
108
114
110
116
112
114
108
114
110
116
102
108
114
110
116
104
114
110
116
20
30

FIG. 5

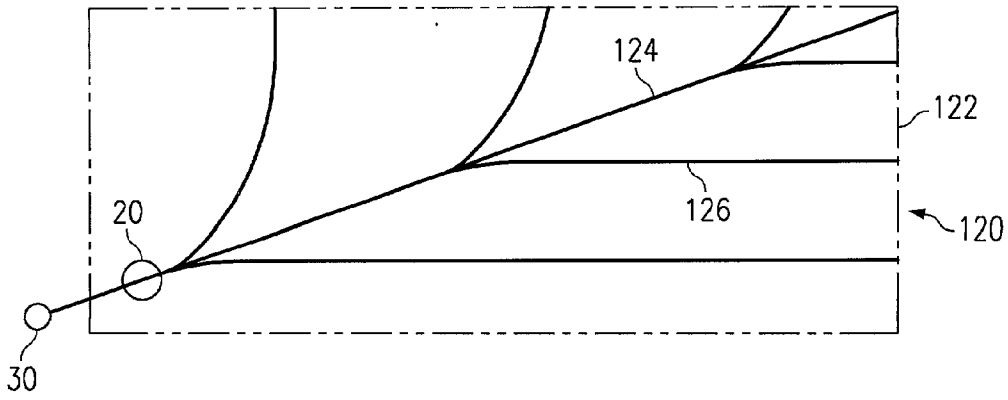

124
122
20
126
120
30

FIG. 6

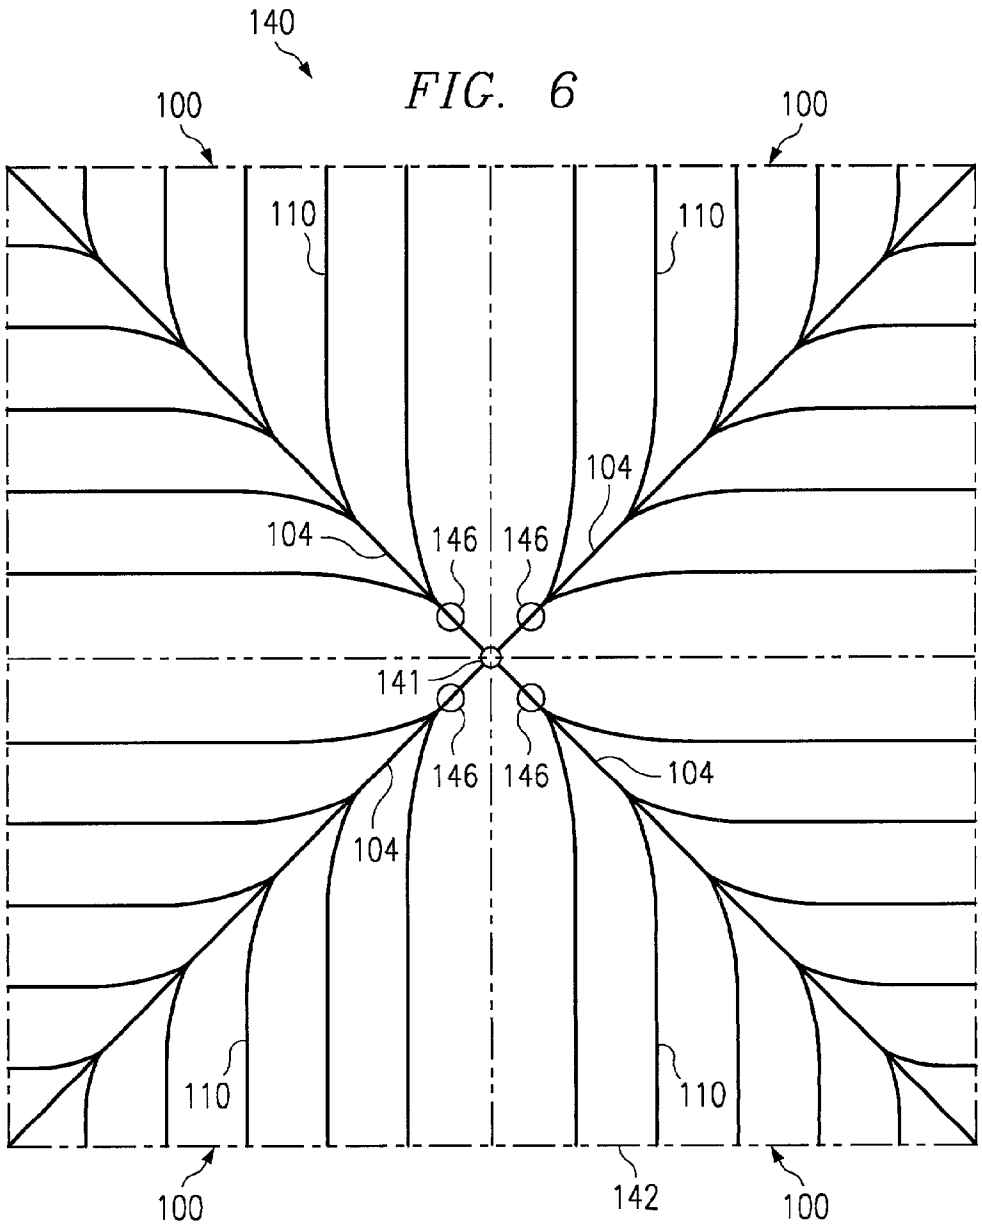
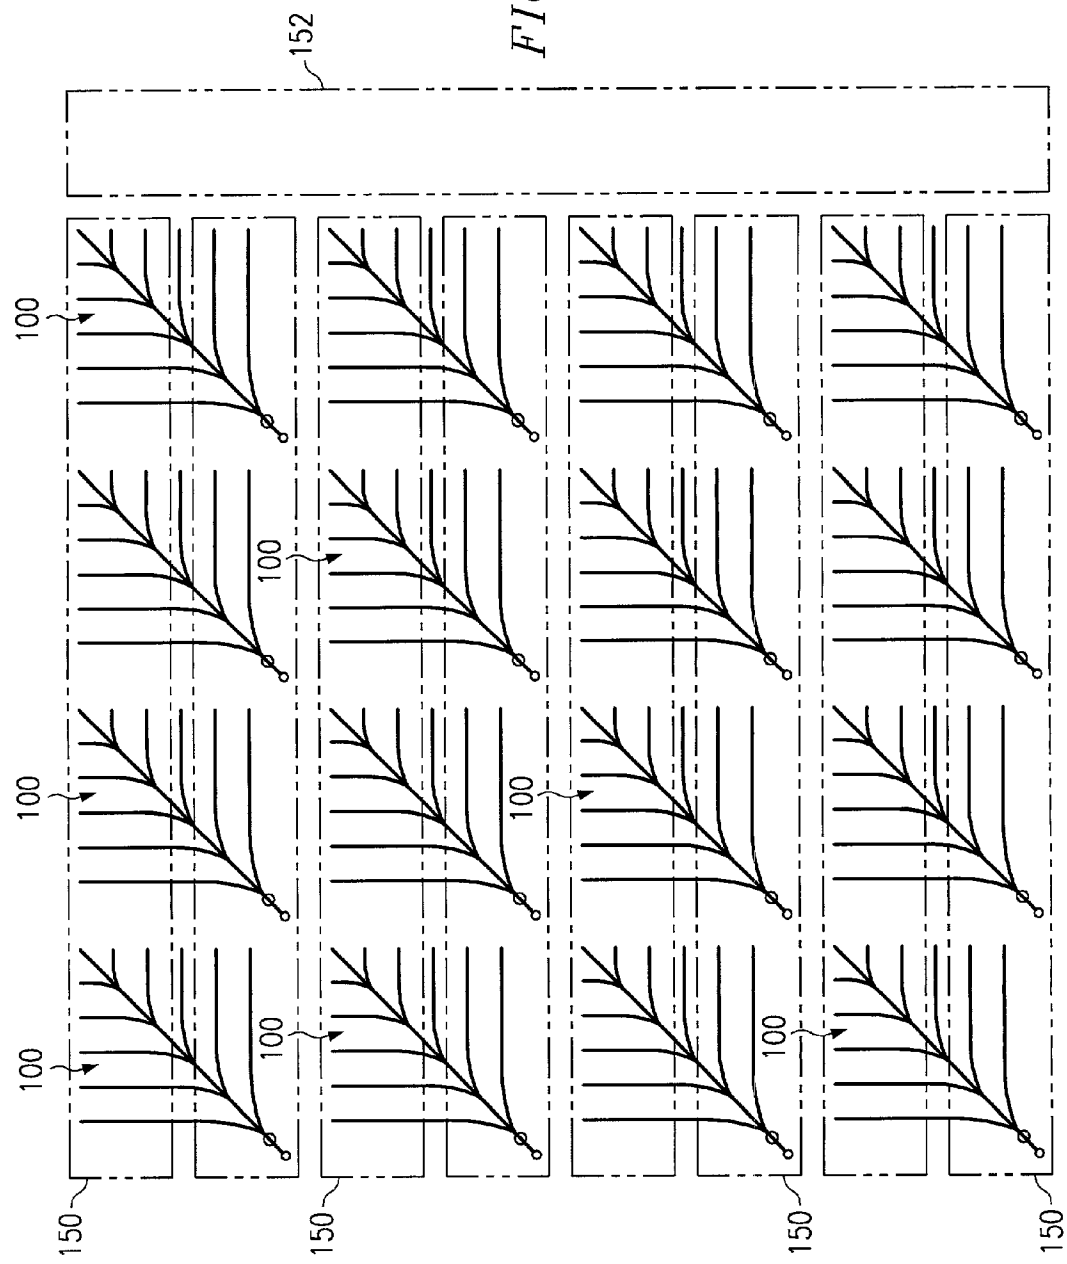

140
100
100
110
110
104
104
146
146
141
146
146
104
104
110
110
100
142
100

FIG. 7



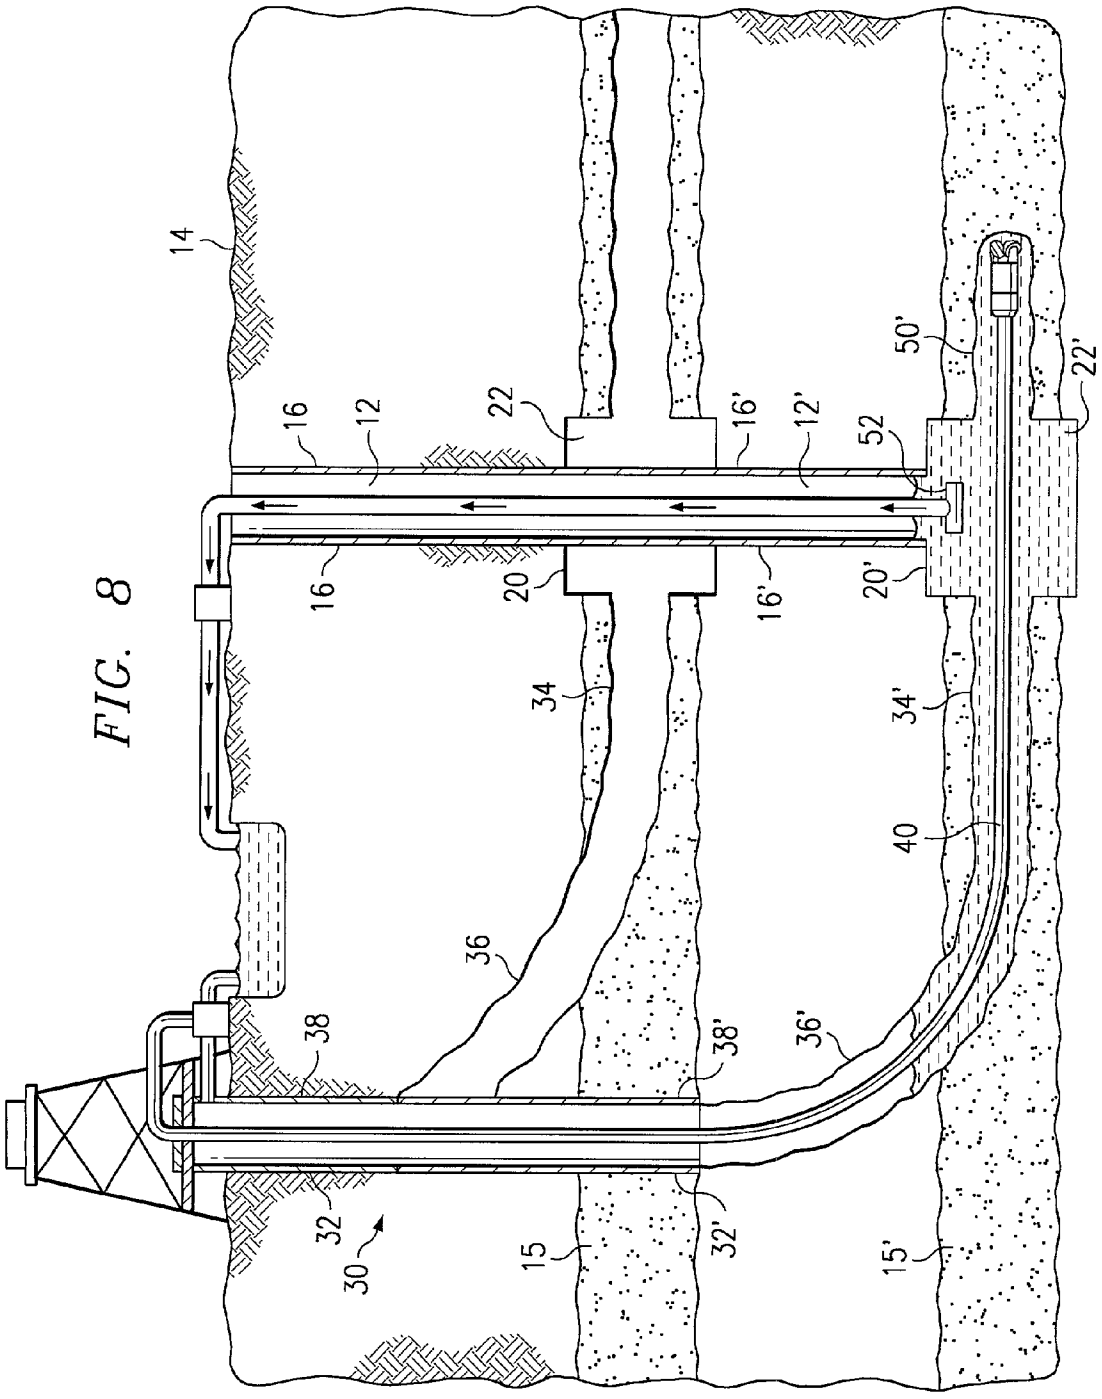

14
16
12
22
16'
12'
52
50'
22'
16
20
16'
20'
34
34'
40
36
38
38'
36'
32
30
15
32'
15'

FIG. 8

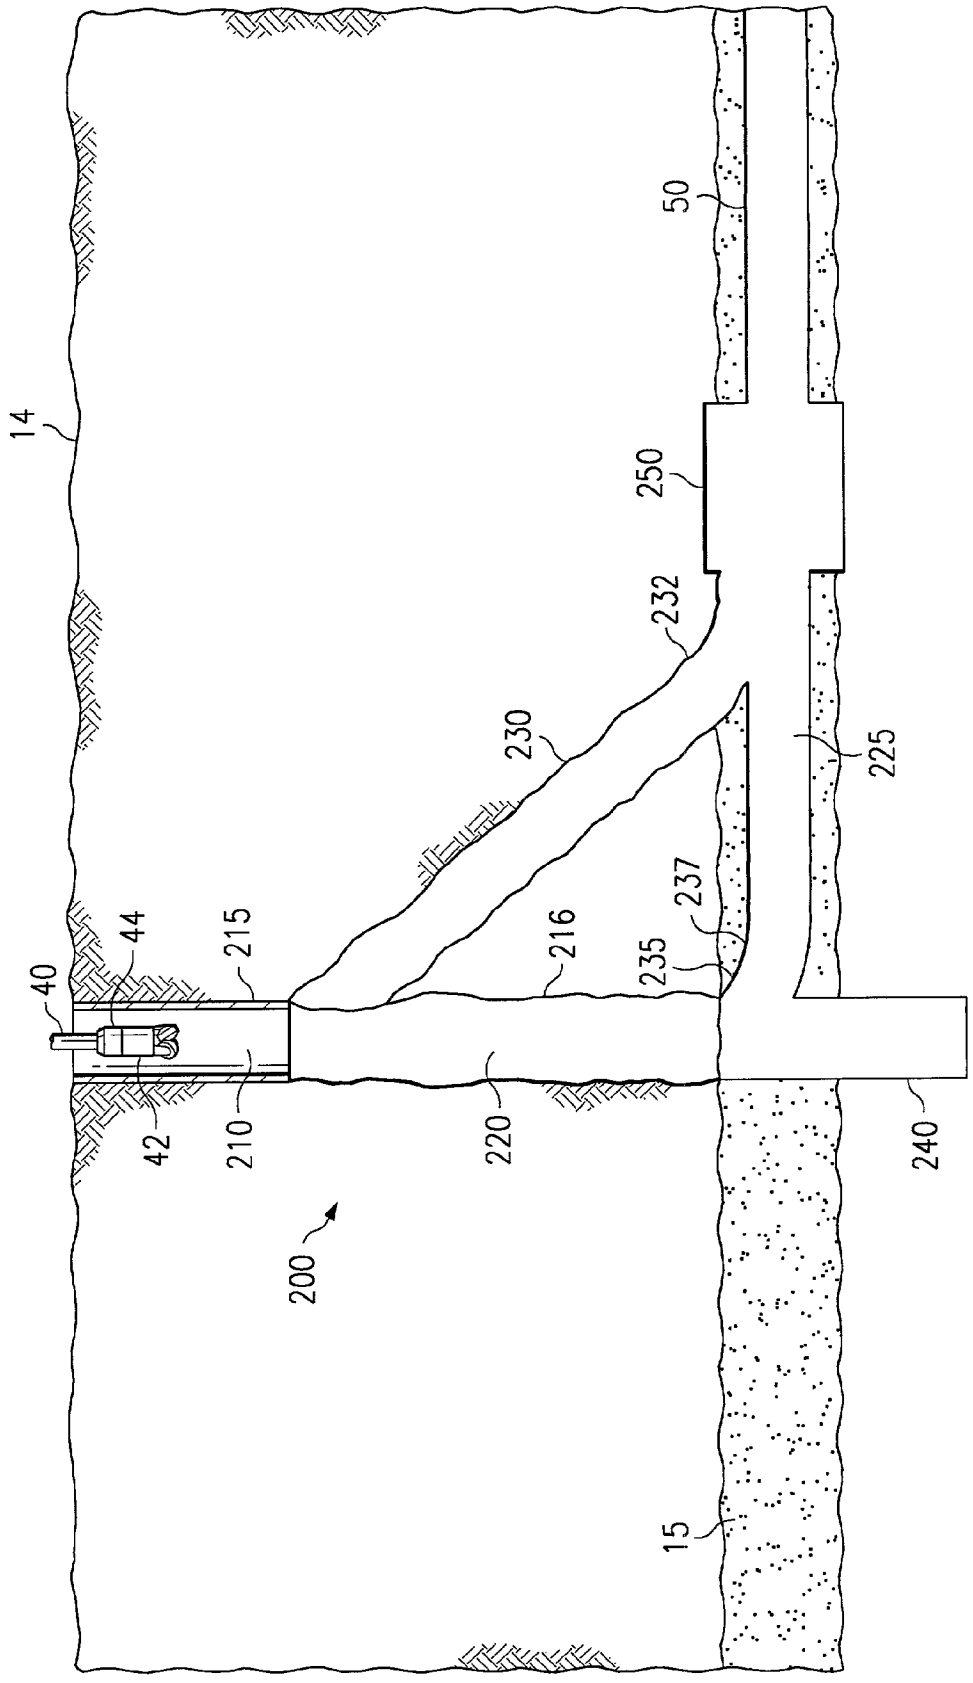


FIG. 9A

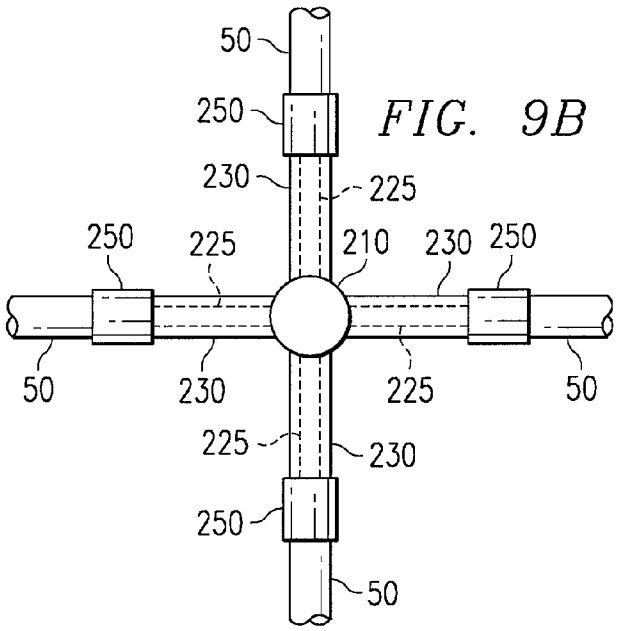

50
250
230
225
250
225
210
230
250
50
230
225
50
225
230
250
50

FIG. 9B

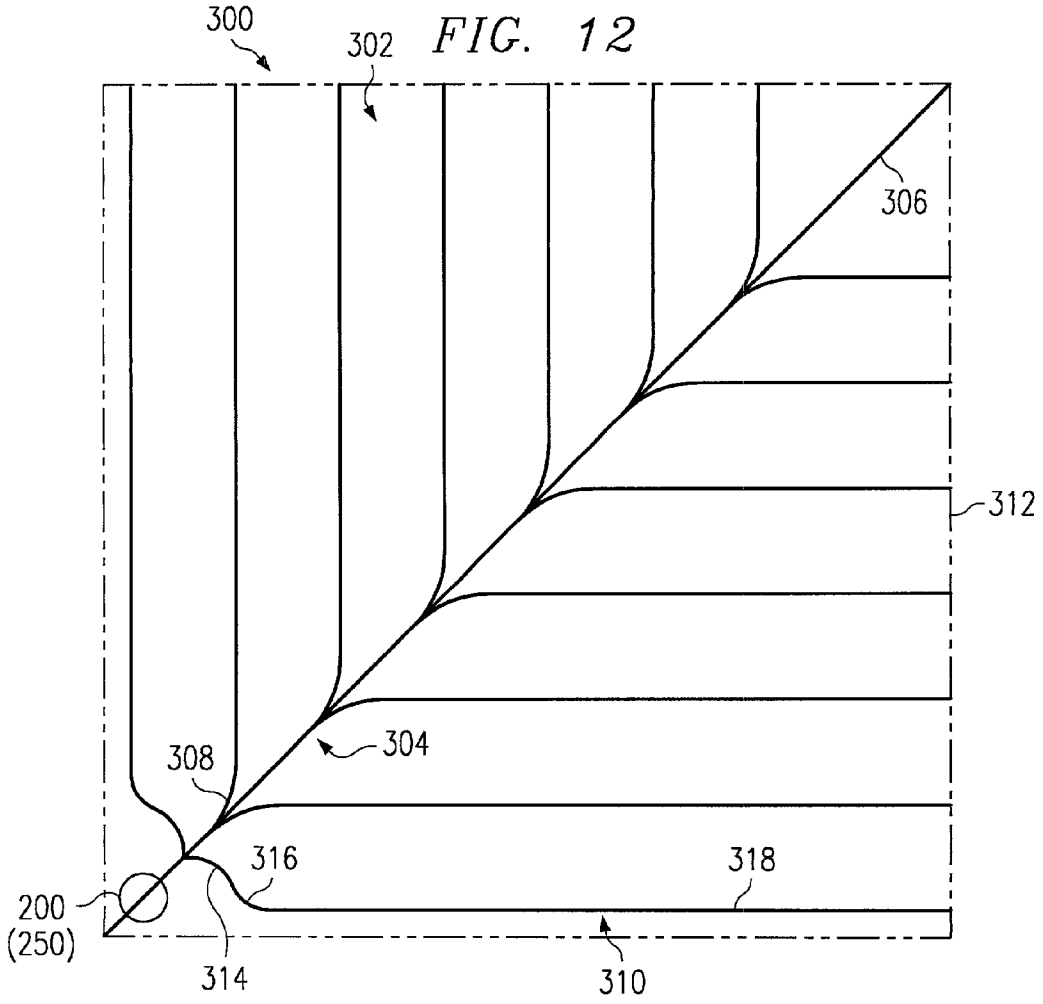

300
302
306
312
308
304
316
318
200
(250)
314
310

FIG. 12

FIG. 10

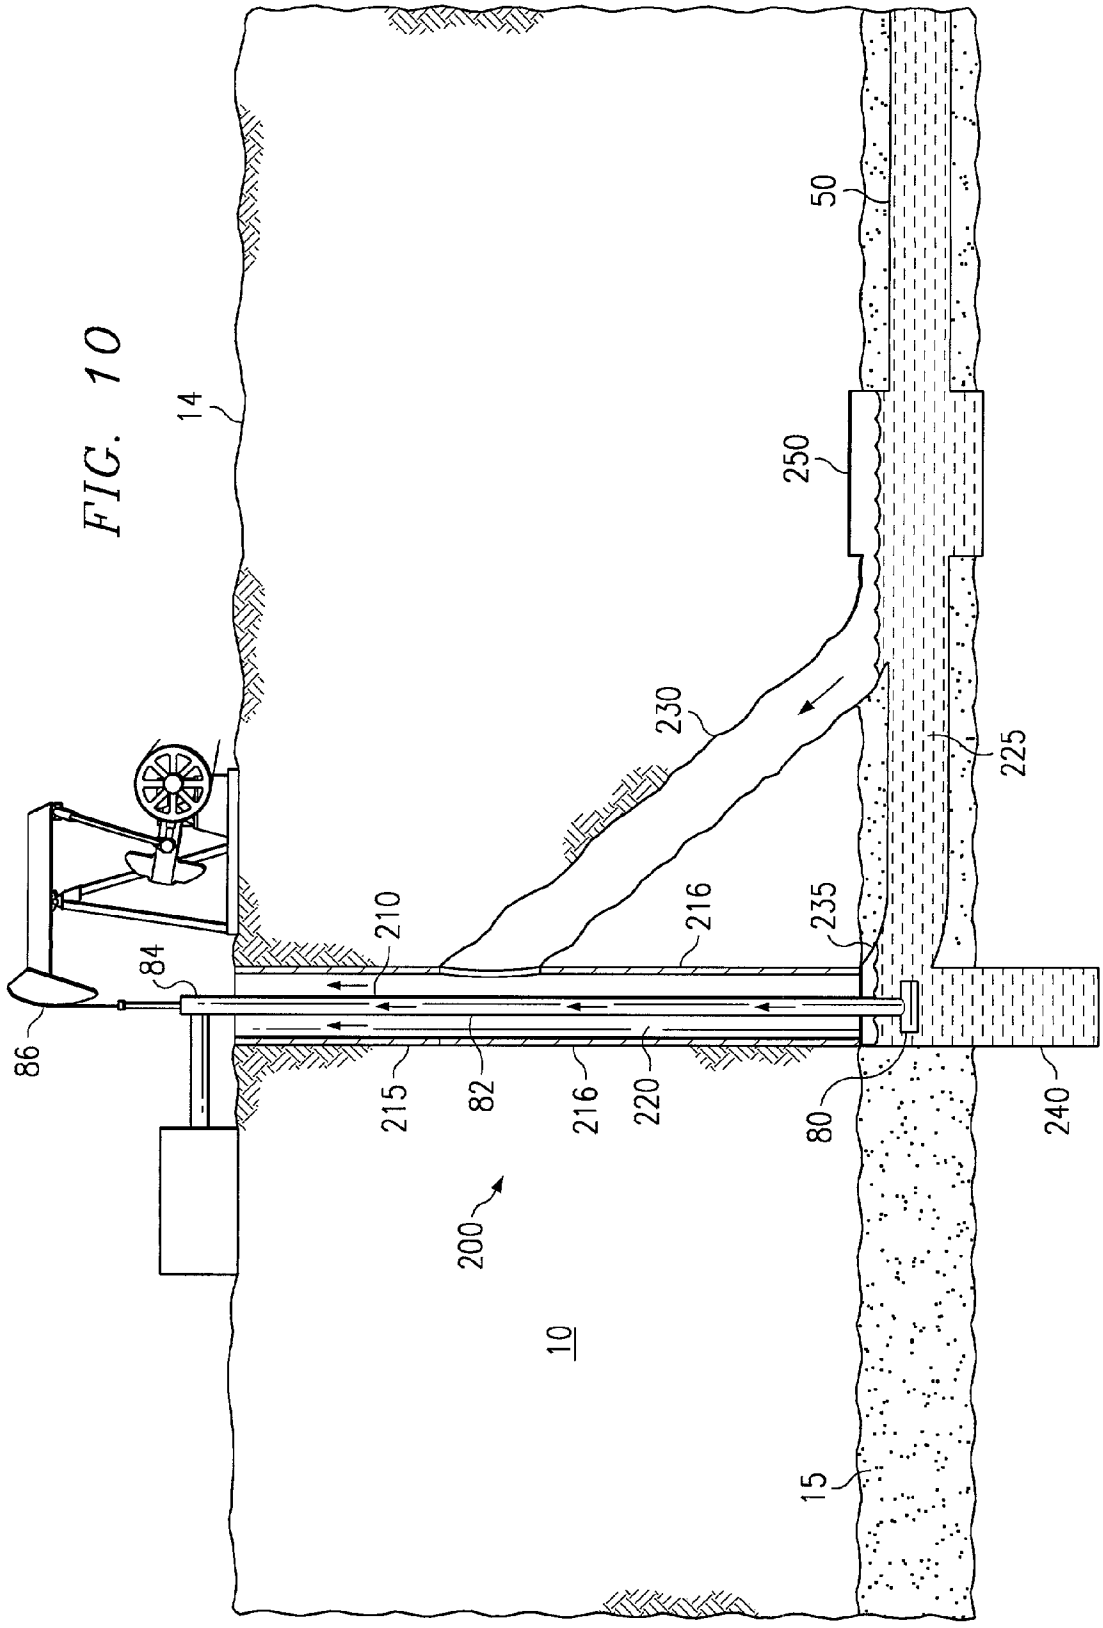
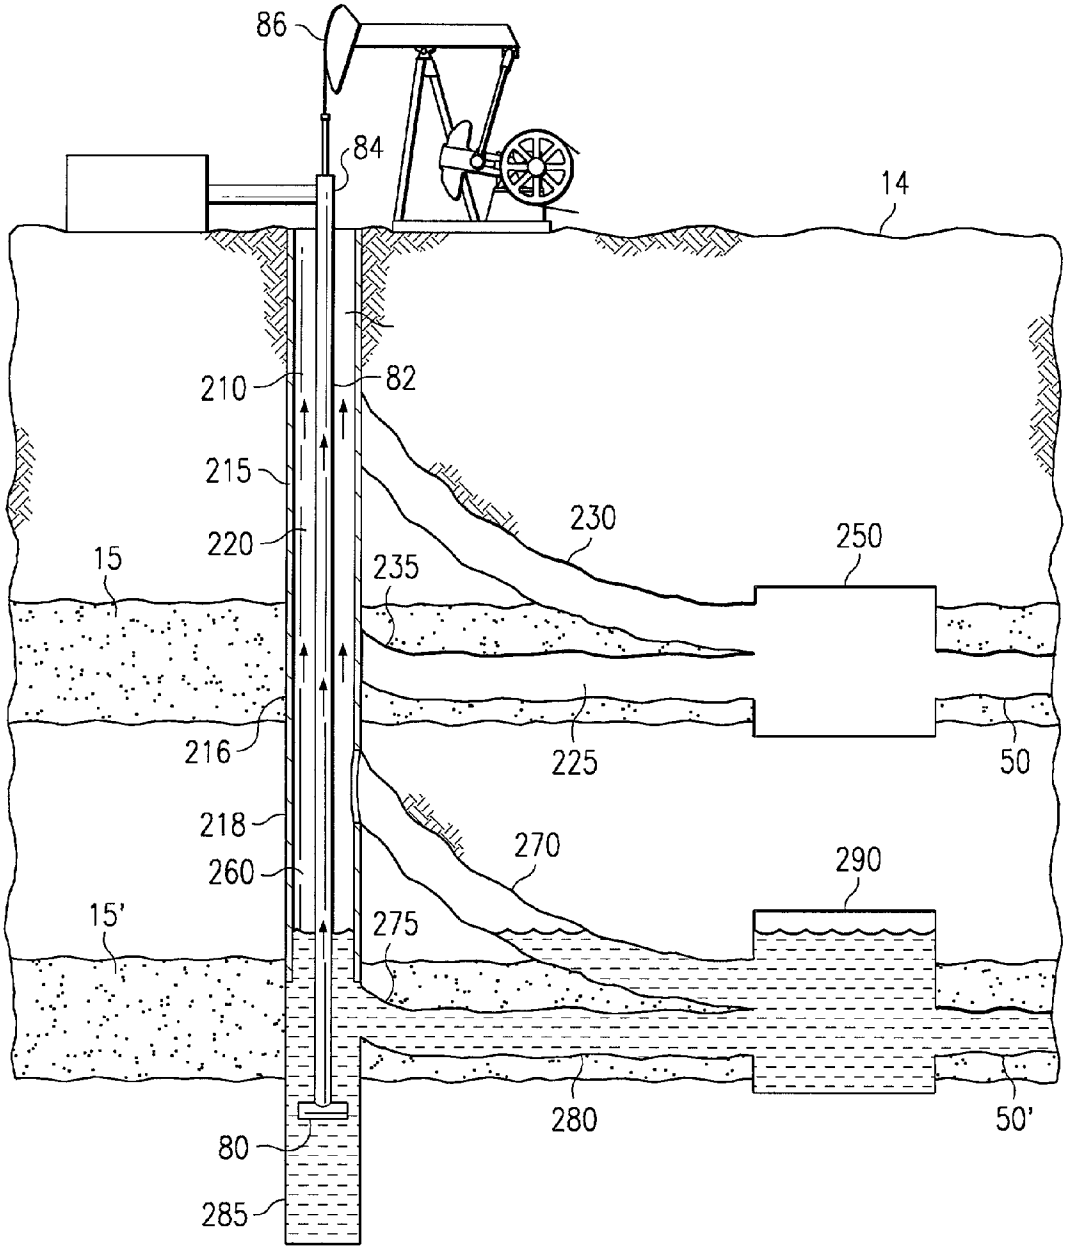


FIG. 11


86
84
14
210
82
215
230
250
220
15
235
216
225
50
218
270
290
260
15'
275
280
50'
80
285

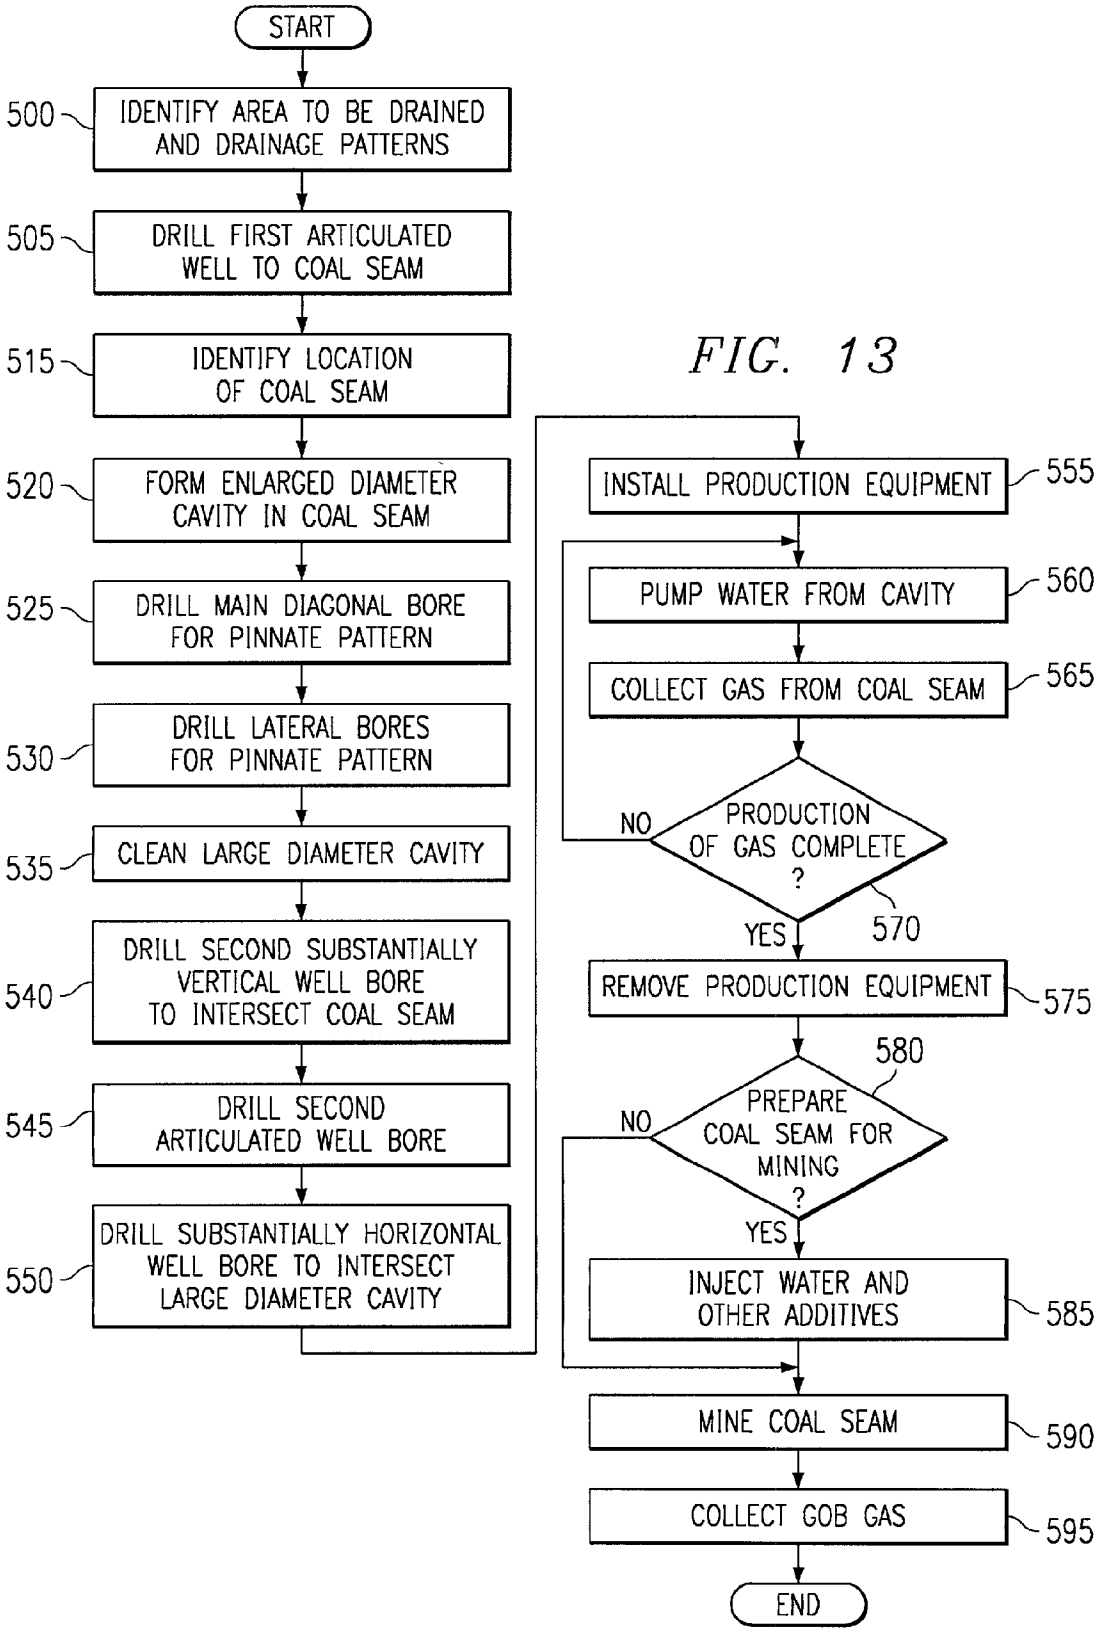

START
500
IDENTIFY AREA TO BE DRAINED AND DRAINAGE PATTERNS
505
DRILL FIRST ARTICULATED WELL TO COAL SEAM
515
IDENTIFY LOCATION OF COAL SEAM
520
FORM ENLARGED DIAMETER CAVITY IN COAL SEAM
525
DRILL MAIN DIAGONAL BORE FOR PINNATE PATTERN
530
DRILL LATERAL BORES FOR PINNATE PATTERN
535
CLEAN LARGE DIAMETER CAVITY
540
DRILL SECOND SUBSTANTIALLY VERTICAL WELL BORE TO INTERSECT COAL SEAM
545
DRILL SECOND ARTICULATED WELL BORE
550
DRILL SUBSTANTIALLY HORIZONTAL WELL BORE TO INTERSECT LARGE DIAMETER CAVITY
555
INSTALL PRODUCTION EQUIPMENT
560
PUMP WATER FROM CAVITY
565
COLLECT GAS FROM COAL SEAM
NO
PRODUCTION OF GAS COMPLETE ?
570
YES
575
REMOVE PRODUCTION EQUIPMENT
580
NO
PREPARE COAL SEAM FOR MINING ?
YES
585
INJECT WATER AND OTHER ADDITIVES
590
MINE COAL SEAM
595
COLLECT GOB GAS
END

FIG. 13

METHOD AND SYSTEM FOR ACCESSING SUBTERRANEAN ZONES FROM A LIMITED SURFACE AREA

BACKGROUND OF THE INVENTION

[0001] Subterranean deposits of coal, whether of "hard" coal such as anthracite or "soft" coal such as lignite or bituminous coal, contain substantial quantities of entrained methane gas. Limited production and use of methane gas from coal deposits has occurred for many years. Substantial obstacles have frustrated more extensive development and use of methane gas deposits in coal seams. The foremost problem in producing methane gas from coal seams is that while coal seams may extend over large areas, up to several thousand acres, the coal seams are fairly shallow in depth, varying from a few inches to several meters. Thus, while the coal seams are often relatively near the surface, vertical wells drilled into the coal deposits for obtaining methane gas can only drain a fairly small radius around the coal deposits. Further, coal deposits are not amenable to pressure fracturing and other methods often used for increasing methane gas production from rock formations. As a result, once the gas easily drained from a vertical well bore in a coal seam is produced, further production is limited in volume. Additionally, coal seams are often associated with subterranean water, which must be drained from the coal seam in order to produce the methane.

[0002] Horizontal drilling patterns have been tried in order to extend the amount of coal seam exposed to a drill bore for gas extraction. Traditional horizontal drilling techniques, however, require the use of a radiused well bore which presents difficulties in removing the entrained water from the coal seam. The most efficient method for pumping water from a subterranean well, a sucker rod pump, does not work well in horizontal or radiused bores.

[0003] Prior mining systems also generally require a fairly large and level surface area from which to work. As a result, prior mining systems and drilling technologies generally cannot be used in Appalachia or other hilly terrains. For example, in some areas the largest area of flat land may be a wide roadway. Thus, less effective methods must be used, leading to production delays that add to the expense associated with degasifying a coal seam.

SUMMARY OF THE INVENTION

[0004] The present invention provides a method and system for accessing subterranean zones from a limited surface area that substantially eliminates or reduces the disadvantages and problems associated with previous systems and methods. In particular, from a common bore an articulated well bore with a well bore pattern in a subterranean seam extends from or proximate to a cavity well in communication with the well bore pattern in the seam. The well bore patterns provide access to a large subterranean area while the cavity well allows entrained water, hydrocarbons, and other deposits collected by the well bore pattern to be efficiently removed and/or produced. The well bore pattern also provides access to the subterranean zone for treating material within the subterranean zone or introducing or injecting a substance into the subterranean zone.

[0005] In accordance with one embodiment of the present invention, a system for extracting resources from a subsurface formation includes a substantially vertical well bore extending from the surface to a target zone. The system also includes an articulated well bore extending from the substantially vertical well bore to the target zone. The articulated well bore diverges from the substantially vertical well bore between the surface and the target zone. The system also includes a drainage pattern extending from the articulated well bore in the target zone and operable to collect resources from the target zone. The system further includes a subsurface channel operable to communicate resources from the drainage pattern to the substantially vertical well bore. The system also includes a vertical pump disposed in the substantially vertical well bore and operable to lift resources collected in the substantially vertical well bore to the surface.

[0006] In accordance with another aspect of the present invention, the substantially horizontal drainage pattern may comprise a pinnate pattern including a substantially horizontal diagonal well bore extending from the substantially vertical well bore that defines a first end of an area covered by the drainage pattern to a distant end of the area. A first set of substantially horizontal lateral well bores extend in a spaced apart relationship relative to each other from the diagonal well bore to the periphery of the area on a first side of the diagonal well bore. A second set of substantially horizontal lateral well bores extend in a spaced apart relationship relative to each other from the diagonal well bore to the periphery of the area on a side of the diagonal opposite the first set. One or more of the substantially horizontal lateral well bores may further comprise a curved or radiused portion proximate to the diagonal well bore.

[0007] Technical advantages of the present invention include providing an improved method and system for accessing subterranean deposits from a limited area on the surface. In particular, a well bore pattern is drilled in a target zone from an articulated surface well at least in close proximity to a cavity well. The well bore pattern is interconnected to the cavity well by a channel through which entrained water, hydrocarbons, and other fluids may be drained from the target zone and efficiently removed and/or produced by a rod pumping unit. As a result, gas, oil, and other fluids from a large, low pressure or low porosity formation can be efficiently produced at a limited area on the surface. Thus, gas may be recovered from formations underlying rough topology. In addition, environmental impact is minimized as the area to be cleared and used is minimized.

[0008] Another technical advantage of the present invention includes providing an improved well bore pattern for accessing an increased area of a subterranean zone. In particular, a pinnate well bore structure with a main well bore and opposed laterals is used to maximize access to a subterranean zone from a single well bore. Length of the laterals is maximized proximate to an articulated well bore used to form the well bore pattern and decreases toward the end of the main well bore to provide uniform access to a quadrilateral or other grid area. The first set of laterals proximate to the articulated well bore may comprise a curved or radiused portion proximate to the main well bore, allowing greater spacing between the laterals and, therefore, greater coverage of the subterranean zone. This allows the well bore pattern to be aligned with longwall panels and other subsurface structures for more efficient degasification of a mine coal seam or other deposit.

[0009] Yet another technical advantage of the present invention includes providing an improved method and system for preparing a coal seam or other subterranean deposit for mining and for collecting gas from the seam after mining operations. In particular, a surface well, with a vertical portion, an articulated portion, and a cavity, is used to degasify a coal seam prior to mining operations. This reduces both needed surface area and underground equipment and activities. This also reduces the time needed to degasify the seam, which minimizes shutdowns due to high gas content. In addition, water and additives may be pumped into the degasified coal seam through the combined well prior to mining operations to minimize dust and other hazardous conditions, to improve efficiency of the mining process, and to improve the quality of the coal product. After mining, the combined well is used to collect gob gas. As a result, costs associated with the collection of gob gas are minimized to facilitate or make feasible the collection of gob gas from previously mined seams.

[0010] Still another technical advantage of the present invention includes an improved method and system for accessing multiple subterranean deposits from a limited area on the surface. In particular, a first well bore pattern is drilled in a first target zone from a first articulated surface well in close proximity to a cavity well bore. The first well bore pattern is interconnected to the first cavity well bore by a first channel. A second well bore pattern is drilled in a second target zone from a second articulated surface well in close proximity to the cavity well. The second well bore pattern is interconnected to the cavity well by a second channel. As a result, multiple subterranean formations may be accessed from a limited area on the surface. For example, gas may be recovered from multiple formations underlying rough topology. In addition, environmental impact is minimized as the area to be cleared and used is minimized. Furthermore, overall drilling time is minimized as multiple drainage patterns are drilled while the drilling equipment is still on site, eliminating the need to take down and set up the drilling equipment more than once.

[0011] In another embodiment of the present invention, an articulated well bore and cavity well bore each extend from a surface location generally within 100 feet or less of each other, minimizing the surface area needed for production and drilling equipment. In one embodiment, the articulated well bore and the cavity well bore comprise a common portion at or near the surface. A well casing extends from the surface to the end of the common portion distal to the surface. As a result, the cavity and articulated well bores can be formed from a roadway, steep hillside, or other limited surface area. When the articulated and cavity well bores comprise a common portion, all drilling equipment may be located within a **100** square foot area on the surface. Accordingly, environmental impact is minimized as less surface area must be cleared.

[0012] Other technical advantages of the present invention will be readily apparent to one skilled in the art from the following figures, description, and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] For a more complete understanding of the present invention and its advantages, reference is now made to the following description taken in conjunction with the accompanying drawings, wherein like numerals represent like parts, in which:

[0014] **FIG. 1** is a cross-sectional diagram illustrating formation of a well bore pattern in a subterranean zone through an articulated surface well intersecting a cavity well in accordance with one embodiment of the present invention;

[0015] **FIG. 2** is a cross-sectional diagram illustrating formation of the well bore pattern in the subterranean zone through the articulated surface well intersecting the cavity well in accordance with another embodiment of the present invention;

[0016] **FIG. 3** is a cross-sectional diagram illustrating production of fluids from a well bore pattern in a subterranean zone through a well bore in accordance with one embodiment of the present invention;

[0017] **FIG. 4** is a top plan diagram illustrating a pinnate well bore pattern for accessing a subterranean zone in accordance with one embodiment of the present invention;

[0018] **FIG. 5** is a top plan diagram illustrating a pinnate well bore pattern for accessing a subterranean zone in accordance with another embodiment of the present invention;

[0019] **FIG. 6** is a top plan diagram illustrating a quadrilateral pinnate well bore pattern for accessing a subterranean zone in accordance with still another embodiment of the present invention;

[0020] **FIG. 7** is a top plan diagram illustrating the alignment of pinnate well bore patterns within panels of a coal seam for degasifying and preparing the coal seam for mining operations in accordance with one embodiment of the present invention;

[0021] **FIG. 8** is a cross-sectional diagram illustrating production of fluids from well bore patterns in dual subterranean zones through a well bore in accordance with another embodiment of the present invention;

[0022] **FIG. 9A** is a cross-sectional diagram illustrating formation of a well bore pattern in a subterranean zone through an articulated surface well intersecting a cavity well at the surface in accordance with another embodiment of the present invention;

[0023] **FIG. 9B** is a top-plan diagram illustrating formation of multiple well bore patterns in a subterranean zone through multiple articulated surface wells intersecting a single cavity well at the surface in accordance with another embodiment of the present invention;

[0024] **FIG. 10** is a diagram illustrating production of fluids from a well bore pattern in a subterranean zone through a well bore in accordance with another embodiment of the present invention;

[0025] **FIG. 11** is a diagram illustrating the production of fluids from well bore patterns in dual subterranean zones through a well bore in accordance with another embodiment of the present invention;

[0026] **FIG. 12** is a top plan diagram illustrating a pinnate well bore pattern for accessing deposits in a subterranean zone in accordance with another embodiment of the present invention; and

[0027] **FIG. 13** is a flow diagram illustrating a method for preparing a coal seam for mining operations in accordance with another embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0028] **FIG. 1** illustrates a cavity and articulated well combination for accessing a subterranean zone from the surface in accordance with one embodiment of the present invention. In this embodiment, the subterranean zone is a coal seam. It will be understood that other subterranean formations and/or other low pressure, ultra-low pressure, and low porosity subterranean zones can be similarly accessed using the dual radius well system of the present invention to remove and/or produce water, hydrocarbons and other fluids in the zone, to treat minerals in the zone prior to mining operations, or to inject or introduce fluids, gases or other substances into the zone.

[0029] Referring to **FIG. 1, a** well bore **12** extends from the surface **14** to a target coal seam **15**. The well bore **12** intersects, penetrates and continues below the coal seam **15**. The well bore **12** may be lined with a suitable well casing **16** that terminates at or above the upper level of the coal seam **15**. In FIGS. **1-3** and **8**, well bore **12** is illustrated substantially vertical; however, it should be understood that well bore **12** may be formed at any suitable angle relative to the surface **14** to accommodate, for example, surface **14** geometries and attitudes and/or the geometric configuration or attitude of a subterranean resource.

[0030] The well bore **12** is logged either during or after drilling in order to locate the exact vertical depth of the coal seam **15**. As a result, the coal seam is not missed in subsequent drilling operations, and techniques used to locate the seam **15** while drilling need not be employed. An enlarged cavity **20** is formed in the well bore **12** at the level of the coal seam **15**. As described in more detail below, the enlarged cavity **20** provides a junction for intersection of the well bore **12** by an articulated well bore used to form a subterranean well bore pattern in the coal seam **15**. The enlarged cavity **20** also provides a collection point for fluids drained from the coal seam **15** during production operations.

[0031] In one embodiment, the enlarged cavity **20** has a radius of approximately eight feet and a vertical dimension which equals or exceeds the vertical dimension of the coal seam **15**. The enlarged cavity **20** is formed using suitable under-reaming techniques and equipment. A portion of the well bore **12** continues below the enlarged cavity **20** to form a sump **22** for the cavity **20**.

[0032] An articulated well bore **30** extends from the surface **14** to the enlarged cavity **20** of the well bore **12**. The articulated well bore **30** includes a portion **32**, a portion **34**, and a curved or radiused portion **36** interconnecting the portions **32** and **34**. In **FIG. 1**, the portion **32** is illustrated substantially vertical; however it should be understood that portion **32** may be formed at any suitable angle relative to the surface **14** to accommodate surface **14** geometric characteristics and attitudes and/or the geometric configuration or attitude of the coal seam **15**. The portion **34** lies substantially in the plane of the coal seam **15** and intersects the large diameter cavity **20** of the well bore **12**. In **FIG. 1**, the plane of the coal seam **15** is illustrated substantially horizontal, thereby resulting in a substantially horizontal portion **34**; however, it should be understood that portion **34** may be formed at any suitable angle relative to the surface **14** to accommodate the geometric characteristics of the coal seam **15**.

[0033] In the illustrated embodiment, the articulated well bore **30** is offset a sufficient distance from the well bore **12** at the surface **14** to permit the large radius curved portion **36** and any desired portion **34** to be drilled before intersecting the enlarged cavity **20**. In one embodiment, to provide the curved portion **36** with a radius of 100-150 feet, the articulated well bore **30** is offset a distance of about 300 feet from the well bore **12**. This spacing minimizes the angle of the curved portion **36** to reduce friction in the bore **30** during drilling operations. As a result, reach of the articulated drill string drilled through the articulated well bore **30** is maximized. As discussed below, another embodiment of the present invention includes locating the articulated well bore **30** significantly closer to the well bore **12** at the surface **14**.

[0034] The articulated well bore **30** is drilled using articulated drill string **40** that includes a suitable downhole motor and bit **42**. A measurement while drilling (MWD) device **44** is included in the articulated drill string **40** for controlling the orientation and direction of the well bore drilled by the motor and bit **42**. The portion **32** of the articulated well bore **30** may be lined with a suitable casing **38**.

[0035] After the enlarged cavity **20** has been successfully intersected by the articulated well bore **30**, drilling is continued through the cavity **20** using the articulated drill string **40** and appropriate drilling apparatus to provide a subterranean well bore pattern **50** in the coal seam **15**. In **FIG. 1**, the well bore pattern **50** is illustrated substantially horizontal corresponding to a substantially horizontally illustrated coal seam **15**; however, it should be understood that well bore pattern **50** may be formed at any suitable angle corresponding to the geometric characteristics of the coal seam **15**. The well bore pattern **50** and other such well bores include sloped, undulating, or other inclinations of the coal seam **15** or other subterranean zone. During this operation, gamma ray logging tools and conventional measurement while drilling devices may be employed to control and direct the orientation of the drill bit **42** to retain the well bore pattern **50** within the confines of the coal seam **15** and to provide substantially uniform coverage of a desired area within the coal seam **15**. Further information regarding the well bore pattern is described in more detail below in connection with FIGS. **4-7** and **12**.

[0036] During the process of drilling the well bore pattern **50**, drilling fluid or "mud" is pumped down the articulated drill string **40** and circulated out of the drill string **40** in the vicinity of the bit **42**, where it is used to scour the formation and to remove formation cuttings. The cuttings are then entrained in the drilling fluid which circulates up through the annulus between the drill string **40** and the walls of well bore **30** until it reaches the surface **14**, where the cuttings are removed from the drilling fluid and the fluid is then recirculated. This conventional drilling operation produces a standard column of drilling fluid having a vertical height equal to the depth of the well bore **30** and produces a hydrostatic pressure on the well bore corresponding to the well bore depth. Because coal seams tend to be porous and fractured, they may be unable to sustain such hydrostatic pressure, even if formation water is also present in the coal seam **15**. Accordingly, if the full hydrostatic pressure is allowed to act on the coal seam **15**, the result may be loss of drilling fluid and entrained cuttings into the formation. Such a circumstance is referred to as an "over-balanced" drilling operation in which the hydrostatic fluid pressure in the well

bore exceeds the ability of the formation to withstand the pressure. Loss of drilling fluids and cuttings into the formation not only is expensive in terms of the lost drilling fluids, which must be made up, but it also tends to plug the pores in the coal seam **15**, which are needed to drain the coal seam of gas and water.

[**0037**] To prevent over-balance drilling conditions during formation of the well bore pattern **50**, air compressors **60** are provided to circulate compressed air down the well bore **12** and back up through the articulated well bore **30**. The circulated air will admix with the drilling fluids in the annulus around the articulated drill string **40** and create bubbles throughout the column of drilling fluid. This has the effect of lightening the hydrostatic pressure of the drilling fluid and reducing the down-hole pressure sufficiently that drilling conditions do not become over-balanced. Aeration of the drilling fluid reduces down-hole pressure to approximately 150-200 pounds per square inch (psi). Accordingly, low pressure coal seams and other subterranean zones can be drilled without substantial loss of drilling fluid and contamination of the zone by the drilling fluid.

[**0038**] Foam, which may be compressed air mixed with water, may also be circulated down through the articulated drill string **40** along with the drilling mud in order to aerate the drilling fluid in the annulus as the articulated well bore **30** is being drilled and, if desired, as the well bore pattern **50** is being drilled. Drilling of the well bore pattern **50** with the use of an air hammer bit or an air-powered down-hole motor will also supply compressed air or foam to the drilling fluid. In this case, the compressed air or foam which is used to power the down-hole motor and bit **42** exits the articulated drill string **40** in the vicinity of the drill bit **42**. However, the larger volume of air which can be circulated down the well bore **12** permits greater aeration of the drilling fluid than generally is possible by air supplied through the articulated drill string **40**.

[**0039**] **FIG. 2** illustrates a method and system for drilling the well bore pattern **50** in the coal seam **15** in accordance with another embodiment of the present invention. In this embodiment, the well bore **12**, enlarged cavity **20** and articulated well bore **30** are positioned and formed as previously described in connection with **FIG. 1**.

[**0040**] Referring to **FIG. 2**, after intersection of the enlarged cavity **20** by the articulated well bore **30**, a pump **52** is installed in the enlarged cavity **20** to pump drilling fluid and cuttings to the surface **14** through the well bore **12**. This eliminates the friction of air and fluid returning up the articulated well bore **30** and reduces downhole pressure to nearly zero. Accordingly, coal seams and other subterranean zones having ultra low pressures, such as below 150 psi, can be accessed from the surface. Additionally, the risk of combining air and methane in the well is substantially eliminated.

[**0041**] **FIG. 3** illustrates production of fluids from the well bore pattern **50** in the coal seam **15** in accordance with one embodiment of the present invention. In this embodiment, after the well bores **12** and **30**, respectively, as well as desired well bore pattern **50**, have been drilled, the articulated drill string **40** is removed from the articulated well bore **30** and the articulated well bore **30** is capped. For multiple pinnate structures described below, the articulated well bore **30** may be plugged in the portion **34**. Otherwise, the articulated well **30** may be left unplugged.

[**0042**] Referring to **FIG. 3, a** down hole pump **80** is disposed in the well bore **12** in the enlarged cavity **20**. The enlarged cavity **20** provides a reservoir for accumulated fluids allowing intermittent pumping without adverse effects of a hydrostatic head caused by accumulated fluids in the well bore. The enlarged cavity **20** also provides a reservoir for water separation for fluids accumulated from the well bore pattern **50**.

[**0043**] The down hole pump **80** is connected to the surface **14** via a tubing string **82** and may be powered by sucker rods **84** extending down through the well bore **12** of the tubing string **82**. The sucker rods **84** are reciprocated by a suitable surface mounted apparatus, such as a powered walking beam **86** to operate the down hole pump **80**. The down hole pump **80** is used to remove water and entrained coal fines from the coal seam **15** via the well bore pattern **50**. Once the water is removed to the surface, it may be treated for separation of methane which may be dissolved in the water and for removal of entrained fines. After sufficient water has been removed from the coal seam **15**, pure coal seam gas may be allowed to flow to the surface **14** through the annulus of the well bore **12** around the tubing string **82** and removed via piping attached to a wellhead apparatus. At the surface **14**, the methane is treated, compressed and pumped through a pipeline for use as a fuel in a conventional manner. The down hole pump **80** may be operated continuously or as needed to remove water drained from the coal seam **15** into the enlarged cavity **22**.

[**0044**] FIGS. **4-7** illustrate well bore patterns **50** for accessing the coal seam **15** or other subterranean zone in accordance with one embodiment of the present invention. In this embodiment, the well bore patterns **50** comprise pinnate well bore patterns that have a central diagonal with generally symmetrically arranged and appropriately spaced laterals extending from each side of the diagonal. The pinnate pattern approximates the pattern of veins in a leaf or the design of a feather in that it has similar, substantially parallel, auxiliary drainage bores arranged in substantially equal and parallel spacing on opposite sides of an axis. The pinnate drainage pattern with its central bore and generally symmetrically arranged and appropriately spaced auxiliary drainage bores on each side provides a uniform pattern for draining fluids from a coal seam or other subterranean formation. As described in more detail below, the pinnate pattern provides substantially uniform coverage of a square, other quadrilateral, or grid area and may be aligned with longwall mining panels for preparing the coal seam **15** for mining operations. It will be understood that other suitable well bore patterns may be used in accordance with the present invention.

[**0045**] The pinnate and other suitable well bore patterns **50** drilled from the surface **14** provide surface access to subterranean formations. The well bore pattern **50** may be used to uniformly remove and/or insert fluids or otherwise manipulate a subterranean deposit. In non-coal applications, the well bore pattern **50** may be used initiating in-situ burns, "huff-puff" steam operations for heavy crude oil, and the removal of hydrocarbons from low porosity reservoirs. The well bore pattern **50** may also be used to uniformly inject or introduce a gas, fluid or other substance into a subterranean zone.

[**0046**] **FIG. 4** illustrates a pinnate well bore pattern **100** in accordance with one embodiment of the present invention.

In this embodiment, the pinnate well bore pattern **100** provides access to a substantially square area **102** of a subterranean zone. A number of the pinnate well bore patterns **100** may be used together to provide uniform access to a large subterranean region.

[**0047**] Referring to **FIG. 4**, the enlarged cavity **20** defines a first corner of the area **102**. The pinnate pattern **100** includes a main well bore **104** extending diagonally across the area **102** to a distant corner **106** of the area **102**. Preferably, the well bores **12** and **30** are positioned over the area **102** such that the main well bore **104** is drilled up the slope of the coal seam **15**. This will facilitate collection of water, gas, and other fluids from the area **102**. The well bore **104** is drilled using the articulated drill string **40** and extends from the enlarged cavity **20** in alignment with the articulated well bore **30**.

[**0048**] A plurality of lateral well bores **110** extend from opposites sides of well bore **104** to a periphery **112** of the area **102**. The lateral bores **110** may mirror each other on opposite sides of the well bore **104** or may be offset from each other along the well bore **104**. Each of the lateral bores **110** includes a radius curving portion **114** extending from the well bore **104** and an elongated portion **116** formed after the curved portion **114** has reached a desired orientation. For uniform coverage of the square area **102**, pairs of lateral bores **110** are substantially evenly spaced on each side of the well bore **104** and extend from the well bore **104** at an angle of approximately 45 degrees. The lateral bores **110** shorten in length based on progression away from the enlarged cavity **20** in order to facilitate drilling of the lateral bores **110**.

[**0049**] The pinnate well bore pattern **100** using a single well bore **104** and five pairs of lateral bores **110** may drain a coal seam area of approximately 150 acres in size. Where a smaller area is to be drained, or where the coal seam has a different shape, such as a long, narrow shape, other shapes or due to surface or subterranean topography, alternate pinnate well bore patterns may be employed by varying the angle of the lateral bores **110** to the well bore **104** and the orientation of the lateral bores **110**. Alternatively, lateral bores **110** can be drilled from only one side of the well bore **104** to form a one-half pinnate pattern.

[**0050**] The well bore **104** and the lateral bores **110** are formed by drilling through the enlarged cavity **20** using the articulated drill string **40** and an appropriate drilling apparatus. During this operation, gamma ray logging tools and conventional measurement while drilling (MWD) technologies may be employed to control the direction and orientation of the drill bit so as to retain the well bore pattern within the confines of the coal seam **15** and to maintain proper spacing and orientation of the well bores **104** and **110**.

[**0051**] In a particular embodiment, the well bore **104** is drilled with an incline at each of a plurality of lateral kick-off points **108**. After the well bore **104** is complete, the articulated drill string **40** is backed up to each successive lateral point **108** from which a lateral bore **110** is drilled on each side of the well bore **104**. It will be understood that the pinnate drainage pattern **100** may be otherwise suitably formed in accordance with the present invention.

[**0052**] **FIG. 5** illustrates a pinnate well bore pattern **120** in accordance with another embodiment of the present invention. In this embodiment, the pinnate well bore pattern **120** drains a substantially rectangular area **122** of the coal seam **15**. The pinnate well bore pattern **120** includes a main well bore **124** and a plurality of lateral bores **126** that are formed as described in connection with well bores **104** and **110** of **FIG. 4**. For the substantially rectangular area **122**, however, the lateral well bores **126** on a first side of the well bore **124** include a shallow angle while the lateral bores **126** on the opposite side of the well bore **124** include a steeper angle to together provide uniform coverage of the area **122**.

[**0053**] **FIG. 6** illustrates a quadrilateral pinnate well bore pattern **140** in accordance with another embodiment of the present invention. The quadrilateral well bore pattern **140** includes four discrete pinnate well bore patterns **100** each used to access a quadrant of a region **142** covered by the pinnate well bore pattern **140**.

[**0054**] Each of the pinnate well bore patterns **100** includes a well bore **104** and a plurality of lateral well bores **110** extending from the well bore **104**. In the quadrilateral embodiment, each of the well bores **104** and **110** is drilled from a common articulated well bore **141**. This allows tighter spacing of the surface production equipment, wider coverage of a well bore pattern, and reduces drilling equipment and operations.

[**0055**] **FIG. 7** illustrates the alignment of pinnate well bore patterns **100** with subterranean structures of a coal seam **15** for degasifying and preparing the coal seam **15** for mining operations in accordance with one embodiment of the present invention. In this embodiment, the coal seam **15** is mined using a longwall process. It will be understood that the present invention can be used to degasify coal seams for other types of mining operations.

[**0056**] Referring to **FIG. 7**, coal panels **150** extend longitudinally from a longwall **152**. In accordance with longwall mining practices, each panel **150** is subsequently mined from a distant end toward the longwall **152** and the mine roof allowed to cave and fracture into the opening behind the mining process. Prior to mining of the panels **150**, the pinnate well bore patterns **100** are drilled into the panels **150** from the surface to degasify the panels **150** well ahead of mining operations. Each of the pinnate well bore patterns **100** is aligned with the longwall **152** and panel **150** grid and covers portions of one or more panels **150**. In this way, a region of a mine can be degasified from the surface based on subterranean structures and constraints, allowing a subsurface formation to be degasified and mined at the same time.

[**0057**] **FIG. 8** illustrates a method and system for drilling the well bore pattern **50** in a second subterranean zone, located below the coal seam **15**, in accordance with another embodiment of the present invention. In this embodiment, the well bore **12**, enlarged cavity **20** and articulated well bore **32** are positioned and formed as previously described in connection with **FIG. 1**. In this embodiment, the second subterranean zone is also a coal seam. It will be understood that other subterranean formations and/or other low pressure, ultra-low pressure, and low porosity subterranean zones can be similarly accessed using the dual radius well system of the present invention to remove and/or produce water, hydrocarbons and other fluids in the zone, to treat minerals in the zone prior to mining operations, or to inject or introduce a gas, fluid or other substance into the zone.

[**0058**] In an alternative embodiment, the well bores **12** and **12'** are formed first, followed by the cavities **20** and **20'**.

Then, articulated well bores **36** and **36'** may be formed. It will be understood that similar modifications to the order of formation may be made, based on the production requirements and expected mining plan of the subsurface formations.

[**0059**] Referring to **FIG. 8**, after production and degasification is completed as to coal seam **15**, a second coal seam **15'** may be degasified following a similar method used to prepare coal seam **15**. Production equipment for coal seam **15** is removed and well bore **12** is extended below coal seam **15** to form well bore **12'** to the target coal seam **15'**. The well bore **12'** intersects, penetrates and continues below the coal seam **15'**. The well bore **12'** may be lined with a suitable well casing **16'** that terminates at or above the upper level of the coal seam **15'**. The well casing **16'** may connect to and extend from well casing **16**, or may be formed as a separate unit, installed after well casing **16** is removed, and extending from the surface **14** through well bores **12** and **12'**. Casing **16'** is also used to seal off cavity **20** from well bores **12** and **12'** during production and drilling operations directed toward coal seam **15'**.

[**0060**] The well bore **12'** is logged either during or after drilling in order to locate the exact vertical depth of the coal seam **15'**. As a result, the coal seam **15'** is not missed in subsequent drilling operations, and techniques used to locate the coal seam **15'** while drilling need not be employed. An enlarged cavity **20'** is formed in the well bore **12'** at the level of the coal seam **15'**. The enlarged cavity **201** provides a collection point for fluids drained from the coal seam **15'** during production operations and provides a reservoir for water separation of the fluids accumulated from the well bore pattern.

[**0061**] In one embodiment, the enlarged cavity **201** has a radius of approximately eight feet and a vertical dimension which equals or exceeds the vertical dimension of the coal seam **15'**. The enlarged cavity **20'** is formed using suitable under-reaming techniques and equipment. A portion of the well bore **12'** continues below the enlarged cavity **201** to form a sump **22'** for the cavity **201**.

[**0062**] An articulated well bore **30** extends from the surface **14** to both the enlarged cavity **20** of the well bore **12** and the enlarged cavity **20'** of the well bore **12'**. The articulated well bore **30** includes portions **32** and **34** and radiused portion **36** interconnecting the portions **32** and **34**. The articulated well bore also includes portions **321** and **34'** and a curved or radiused portion **36'** interconnecting the portions **32'** and **34'**. Portions **32'**, **34'** and **36'** are formed as previously described in connection with **FIG. 1** and portions **32**, **34** and **36**. The portion **34'** lies substantially in the plane of the coal seam **15'** and intersects the enlarged cavity **20'** of the well bore **12'**.

[**0063**] In the illustrated embodiment, the articulated well bore **30** is offset a sufficient distance from the well bore **12** at the surface **14** to permit the large radius curved portions **36** and **36'** and any desired portions **34** and **34'** to be drilled before intersecting the enlarged cavity **20** or **20'**. To provide the curved portion **36** with a radius of 100-150 feet, the articulated well bore **30** is offset a distance of about 300 feet from the well bore **12**. With a curved portion **36** having a radius of 100-150 feet, the curved portion **36'** will have a longer radius than that of curved portion **36**, depending on the vertical depth of coal seam **15'** below the coal seam **15**. This spacing minimizes the angle of the curved portion **36** to reduce friction in the bore **30** during drilling operations. As a result, reach of the articulated drill string drilled through the articulated well bore **30** is maximized. Because the shallower coal seam **15** is usually produced first, the spacing between articulated well bore **30** and well bore **12** is optimized to reduce friction as to curved portion **36** rather than curved portion **36'**. This may effect the reach of drill string **40** in forming well bore pattern **50'** within coal seam **15'**. As discussed below, another embodiment of the present invention includes locating the articulated well bore **30** significantly closer to the well bore **12** at the surface **14**, and thereby locating the articulated well bore **30** closer to well bore **12'**.

[**0064**] As described above, the articulated well bore **30** is drilled using articulated drill string **40** that includes a suitable down-hole motor and bit **42**. A measurement while drilling (MWD) device **44** is included in the articulated drill string **40** for controlling the orientation and direction of the well bore drilled by the motor and bit **42**. The portion **32** of the articulated well bore **30** is lined with a suitable casing **38**. A casing **38'** coupled to casing **38** may be used to enclose the portion **32'** of articulated well bore **30** formed by formed by drilling beyond the kickoff point for curved portion **36**. Casing **38'** is also used to seal off the curved radius portion **36** of the articulated well bore **30**.

[**0065**] After the enlarged cavity **20'** has been successfully intersected by the articulated well bore **30**, drilling is continued through the cavity **20'** using the articulated drill string **40** and an appropriate drilling apparatus to provide a well bore pattern **50'** in the coal seam **15'**. The well bore pattern **50'** and other such well bores include sloped, undulating, or other inclinations of the coal seam **15'** or other subterranean zone. During this operation, gamma ray logging tools and conventional measurement while drilling devices may be employed to control and direct the orientation of the drill bit to retain the well bore pattern **50'** within the confines of the coal seam **15'** and to provide substantially uniform coverage of a desired area within the coal seam **15'**. The well bore pattern **50'** may be constructed similar to well bore pattern **50** as described above. Further information regarding the well bore pattern is described in more detail above in connection with FIGS. **4-7** and below in connection with **FIG. 12**.

[**0066**] Drilling fluid or "mud" my be used in connection with drilling the drainage pattern **50'** in the same manner as described above in connection with **FIG. 1** for drilling the well bore pattern **50**. At the intersection of the enlarged cavity **20'** by the articulated well bore **30**, a pump **52** is installed in the enlarged cavity **20'** to pump drilling fluid and cuttings to the surface **14** through the well bores **12** and **12'**. This eliminates the friction of air and fluid returning up the articulated well bore **30** and reduces downhole pressure to nearly zero. Accordingly, coal seams and other subterranean zones having ultra low pressures below 150 psi can be accessed from the surface. Additionally, the risk of combining air and methane in the well is eliminated.

[**0067**] **FIG. 9A** illustrates a dual radius articulated well combination **200** for accessing a subterranean zone from the surface in accordance with another embodiment of the present invention. In this embodiment, the subterranean zone is a coal seam. It will be understood that other

subterranean formations and/or other low pressure, ultra-low pressure, and low porosity subterranean zones can be similarly accessed using the dual radius articulated well system of the present invention to remove and/or produce water, hydrocarbons and other fluids in the zone, to treat minerals in the zone prior to mining operations, or to inject or introduce a gas, fluid or other substance into the subterranean zone.

[0068] Referring to **FIG. 9A, a** well bore **210** extends from a limited drilling and production area on the surface **14** to a first articulated well bore **230**. The well bore **210** may be lined with a suitable well casing **215** that terminates at or above the level of the intersection of the articulated well bore **230** with the well bore **210**. A second well bore **220** extends from the intersection of the well bore **210** and the first articulated well bore **230** to a second articulated well bore **235**. The second well bore **220** is in substantial alignment with the first well bore **210**, such that together they form a continuous well bore. In FIGS. **9-11**, well bores **210** and **220** are illustrated substantially vertical; however, it should be understood that well bores **210** and **220** may be formed at any suitable angle relative to the surface **14** to accommodate, for example, surface **14** geometries and attitudes and/or the geometric configuration or attitude of a subterranean resource. An extension **240** to the second well bore **220** extends from the intersection of the second well bore **220** and the second articulated well bore **235** to a depth below the coal seam **15**.

[0069] The first articulated well bore **230** has a radius portion **232**. The second articulated well bore **235** has a radius portion **237**. The radius portion **232** may be formed having a radius of about one hundred fifty feet. The radius portion **237** is smaller than radius portion **232**, and may be formed having a radius of about fifty feet. However, other suitable formation radii may be used to form radius portions **232** and **237**.

[0070] The first articulated well bore **230** communicates with an enlarged cavity **250**. The enlarged cavity **250** is formed at the distal end of the first articulated well bore **230** at the level of the coal seam **15**. As described in more detail below, the enlarged cavity **250** provides a junction for intersection of a portion **225** of the articulated well bore **235**. Portion **225** of the well bore **235** is formed substantially within the plane of the coal seam **15** and extends from the radius portion **237** to the enlarged cavity **250**. In one embodiment, the enlarged cavity **250** has a radius of approximately eight feet and a vertical dimension which equals or exceeds the vertical dimension of the coal seam **15**. The enlarged cavity **250** is formed using suitable underreaming techniques and equipment.

[0071] The well bore **235** is formed generally at the intersection of the second well bore **220** and extends through the coal seam **15** and into the enlarged cavity **250**. In one embodiment, the well bores **210** and **220** are formed first, followed by the second articulated well bore **235**. Then, the enlarged cavity **250** is formed, and the second articulated well bore **230** is drilled to intersect the enlarged cavity **250**. However, other suitable drilling sequences may be used.

[0072] For example, after formation of well bore **210**, the first articulated well bore **230** may be drilled using articulated drill string **40** that includes a suitable downhole motor and bit **42**. A measurement while drilling (MWD) device **44** is included in the articulated drill string **40** for controlling the orientation and direction of the well bore drilled by the motor and bit **42**. After the first articulated well bore **230** is formed, the enlarged cavity **250** is formed in the coal seam. The enlarged cavity **250** may be formed by a rotary unit, an expandable cutting tool, a water-jet cutting tool, or other suitable methods of forming a cavity in a subsurface formation. After the enlarged cavity **250** has been formed, drilling is continued through the cavity **250** using the articulated drill string **40** and appropriate drilling apparatus to provide the well bore pattern **50** in the coal seam **15**. The well bore pattern **50** and other such well bores include sloped, undulating, or other inclinations of the coal seam **15** or other subterranean zone. During this operation, gamma ray logging tools and conventional measurement while drilling devices may be employed to control and direct the orientation of the drill bit to retain the well bore pattern **50** within the confines of the coal seam **15** and to provide substantially uniform coverage of a desired area within the coal seam **15**. Further information regarding the well bore pattern is described in more detail in connection with FIGS. **4-7**, above, and **FIG. 12**, below. Drilling mud and overbalance prevention operations may be conducted in the same manner as described above in connection with **FIG. 1**. After the well bore pattern **50** has been formed, the articulated drill string **40** is removed from the well bores and used to form the well bore **220**. As described above, the second well bore **220** shares a common portion with the articulated well portion **230**.

[0073] After the well bore **220** is drilled to the depth of the coal seam **15**, a subsurface channel is formed by the articulated well bore **235**. The second articulated well bore **235** is formed using conventional articulated drilling techniques and interconnects the second well bore **220** and the enlarged cavity **250**. As described in more detail in connection with **FIG. 10** below, this allows fluids collected through the well bore pattern **50** to flow through the enlarged cavity **250** and along the well bore **235** to be removed via the second well bore **220** and the first well bore **210** to the surface **14**. By drilling in this manner, a substantial area of a subsurface formation may be drained or produced from a small area on the surface.

[0074] **FIG. 9B** illustrates formation of multiple well bore patterns in a subterranean zone through multiple articulated surface wells intersecting a single cavity well at the surface in accordance with another embodiment of the present invention. In this embodiment, a single cavity well bore **210** is used to collect and remove to the surface resources collected from well bore patterns **50**. It will be understood that a varying number of multiple well bore patterns **50**, enlarged cavities **250**, and articulated wells **230** and **235** may be used, depending on the geology of the underlying subterranean formation, desired total drainage area, production requirements, and other factors.

[0075] Referring to **FIG. 9**B, well bores **210** and **220** are drilled at a surface location at the approximate center of a desired total drainage area. As described above, articulated well bores **230** are drilled from a surface location proximate to or in common with the well bores **210** and **220**. Well bore patterns **50** are drilled within the target subterranean zone from each articulated well bore **230**. Also from each of the articulated well bores **230**, an enlarged cavity **250** is formed to collect resources draining from the well bore patterns **50**.

Well bores **235** are drilled to connect each of the enlarged cavities **250** with the well bores **210** and **220** as described above in connection with **FIG. 9A**.

[**0076**] Resources from the target subterranean zone drain into well bore patterns **50**, where the resources are collected in the enlarged cavities **250**. From the enlarged cavities **250**, the resources pass through the well bores **235** and into the well bores **210** and **220**. Once the resources have been collected in well bores **210** and **220**, they may be removed to the surface by the methods as described above.

[**0077**] **FIG. 10** illustrates production of fluids and gas from the well bore pattern **50** in the coal seam **15** in accordance with another embodiment of the present invention. In this embodiment, after the well bores **210**, **220**, **230** and **235**, as well as desired well bore patterns **50**, have been drilled, the articulated drill string **40** is removed from the well bores. In one aspect of this embodiment, the first articulated well bore **230** is cased over and the well bore **220** is lined with a suitable well casing **216**. In the illustrated aspect of this embodiment, only the well bore **220** is cased by casing **216** and the first articulated well bore **230** is left in communication with the first well bore **210**.

[**0078**] Referring to **FIG. 10, a** down hole pump **80** is disposed in the lower portion of the well bore **220** above the extension **240**. The extension **240** provides a reservoir for accumulated fluids allowing intermittent pumping without adverse effects of a hydrostatic head caused by accumulated fluids in the well bore.

[**0079**] The down hole pump **80** is connected to the surface **14** via a tubing string **82** and may be powered by sucker rods **84** extending down through the well bores **210** and **220** of the tubing string **82**. The sucker rods **84** are reciprocated by a suitable surface mounted apparatus, such as a powered walking beam **86** to operate the down hole pump **80**. The down hole pump **80** is used to remove water and entrained coal fines from the coal seam **15** via the well bore pattern **50**. Once the water is removed to the surface, it may be treated for separation of methane which may be dissolved in the water and for removal of entrained fines. After sufficient water has been removed from the coal seam **15**, pure coal seam gas may be allowed to flow to the surface **14** through the annulus of the well bores **210** and **220** around the tubing string **82** and removed via piping attached to a wellhead apparatus. Alternatively or additionally, pure coal seam gas may be allowed to flow to the surface **14** through the annulus of the first articulated well bore **230**. At the surface, the methane is treated, compressed and pumped through a pipeline for use as a fuel in a conventional manner. The down hole pump **80** may be operated continuously or as needed to remove water drained from the coal seam **15** into the extension **240**.

[**0080**] **FIG. 11** illustrates a method and system for drilling the well bore pattern **50** in a second subterranean zone, located below the coal seam **15**, in accordance with another embodiment of the present invention. In this embodiment, the well bores **210** and **220**, the articulated well bores **230** and **235**, the enlarged cavity **250**, and the well bore pattern **50** are positioned and formed as previously described in connection with **FIG. 9A**. In this embodiment, the second subterranean zone is also a coal seam. It will be understood that other subterranean formations and/or other low pressure, ultra-low pressure, and low porosity subterranean zones can be similarly accessed using the dual radius well system of the present invention to remove and/or produce water, hydrocarbons and other fluids in the zone, to treat minerals in the zone prior to mining operations, or to inject or introduce a gas, fluid or other substance into the zone.

[**0081**] Referring to **FIG. 11**, after production and degasification is completed as to coal seam **15**, a second coal seam **15'** may be degasified following a similar method used to prepare coal seam **15**. Production equipment for coal seam **15** is removed and well bore **220** is extended below coal seam **15** to form a well bore **260** to the target coal seam **15'**. The well bore **260** intersects, penetrates and continues below the coal seam **15'**, terminating in an extension **285**. The well bore **260** may be lined with a suitable well casing **218** that terminates at or above the upper level of the coal seam **15'**. The well casing **218** may connect to and extend from well casing **216**, or may be formed as a separate unit, installed after well casing **216** is removed, and extending from the surface **14** through well bores **210**, **220**, and **260**. Casing **260** may also used to seal off articulated well bores **230** and **235** from well bores **210** and **220** during production and drilling operations directed towards coal seam **15'**. Well bore **260** is in substantial alignment with the well bores **210** and **220**, such that together they form a continuous well bore. In **FIG. 11**, well bore **260** is illustrated substantially vertical; however, it should be understood that well bore **260** may be formed at any suitable angle relative to the surface **14** and/or well bores **210** and **220** to accommodate, for example, the geometric configuration or attitude of a subterranean resource.

[**0082**] In a manner similar to that described in connection with **FIG. 9A** above, a first articulated well bore **270**, an enlarged cavity **290**, a well bore pattern **50'**, and a second articulated well bore **275** are formed in comparable relation to coal seam **15'**. Similarly, water, hydrocarbons, and other fluids are produced from coal seam **15'** in a manner substantially the same as described above in connection with **FIG. 10**. For example, resources from the target coal seam **15'** drain into well bore patterns **50'**, where the resources are collected in the enlarged cavities **290**. From the enlarged cavities **290**, the resources pass through a portion **280** of the well bore **275** and into the well bores **210**, **220**, and **260**. Once the resources have been collected in well bores **210**, **220**, and **260**, they may be removed to the surface by the methods as described above.

[**0083**] **FIG. 12** illustrates a pinnate well bore pattern **300** in accordance with another embodiment of the present invention. In this embodiment, the pinnate well bore pattern **300** provides access to a substantially square area **302** of a subterranean zone. A number of the pinnate patterns **300** may be used together in dual, triple, and quad pinnate structures to provide uniform access to a large subterranean region.

[**0084**] Referring to **FIG. 12**, the enlarged cavity **250** defines a first corner of the area **302**, over which a pinnate well bore pattern **300** extends. The enlarged cavity **250** defines a first corner of the area **302**. The pinnate pattern **300** includes a main well bore **304** extending diagonally across the area **302** to a distant corner **306** of the area **302**. Preferably, the well bores **210** and **230** are positioned over the area **302** such that the well bore **304** is drilled up the slope of the coal seam **15**. This will facilitate collection of

water, gas, and other fluids from the area **302**. The well bore **304** is drilled using the articulated drill string **40** and extends from the enlarged cavity **250** in alignment with the articulated well bore **230**.

[**0085**] A plurality of lateral well bores **310** extend from the opposites sides of well bore **304** to a periphery **312** of the area **302**. The lateral bores **310** may mirror each other on opposite sides of the well bore **304** or may be offset from each other along the well bore **304**. Each of the lateral well bores **310** includes a first radius curving portion **314** extending from the well bore **304**, and an elongated portion **318**. The first set of lateral well bores **310** located proximate to the cavity **250** may also include a second radius curving portion **316** formed after the first curved portion **314** has reached a desired orientation. In this set, the elongated portion **318** is formed after the second curved portion **316** has reached a desired orientation. Thus, the first set of lateral well bores **310** kicks or turns back towards the enlarged cavity **250** before extending outward through the formation, thereby extending the drainage area back towards the cavity **250** to provide uniform coverage of the area **302**. For uniform coverage of the square area **302**, pairs of lateral well bores **310** are substantially evenly spaced on each side of the well bore **304** and extend from the well bore **304** at an angle of approximately **45** degrees. The lateral well bores **310** shorten in length based on progression away from the enlarged cavity **250** in order to facilitate drilling of the lateral well bores **310**.

[**0086**] The pinnate well bore pattern **300** using a single well bore **304** and five pairs of lateral well bores **310** may drain a coal seam area of approximately 150 acres in size. Where a smaller area is to be drained, or where the coal seam has a different shape, such as a long, narrow shape, or other shapes due to surface or subterranean topography, alternate pinnate well bore patterns may be employed by varying the angle of the lateral well bores **310** to the well bore **304** and the orientation of the lateral well bores **310**. Alternatively, lateral well bores **310** can be drilled from only one side of the well bore **304** to form a one-half pinnate pattern.

[**0087**] The well bore **304** and the lateral well bores **310** are formed by drilling through the enlarged cavity **250** using the articulated drill string **40** and an appropriate drilling apparatus. During this operation, gamma ray logging tools and conventional measurement while drilling (MWD) technologies may be employed to control the direction and orientation of the drill bit so as to retain the well bore pattern within the confines of the coal seam **15** and to maintain proper spacing and orientation of the well bores **304** and **310**. In a particular embodiment, the well bore **304** is drilled with an incline at each of a plurality of lateral kick-off points **308**. After the well bore **304** is complete, the articulated drill string **40** is backed up to each successive lateral point **308** from which a lateral well bore **310** is drilled on each side of the well bore **304**. It will be understood that the pinnate well bore pattern **300** may be otherwise suitably formed in accordance with the present invention.

[**0088**] **FIG. 13** is a flow diagram illustrating a method for preparing the coal seam **15** for mining operations in accordance with another embodiment of the present invention. In this embodiment, the method begins at step **500** in which areas to be drained and well bore patterns **50** to provide drainage for the areas are identified.

[**0089**] Preferably, the areas are aligned with a grid of a mining plan for the region. Pinnate structures **100**, **120**, **140**, **144**, and **300** may be used to provide optimized coverage for the region. It will be understood that other suitable patterns may be used to degasify the coal seam **15**.

[**0090**] Proceeding to step **505**, the first articulated well **230** is drilled to the coal seam **15**. At step **515**, down hole logging equipment is utilized to exactly identify the location of the coal seam in the first articulated well bore **230**. At step **520**, the enlarged cavity **250** is formed in the first articulated well bore **230** at the location of the coal seam **15**. As previously discussed, the enlarged cavity **250** may be formed by under reaming and other conventional techniques. At step **525**, the well bore **104** for the pinnate well bore pattern **100** is drilled through the articulated well bore **30** into the coal seam **15**. After formation of the well bore **104**, lateral well bores **110** for the pinnate well bore pattern **100** are drilled at step **530**. As previously described, lateral kick-off points may be formed in the well bore **104** during its formation to facilitate drilling of the lateral well bores **110**.

[**0091**] Next, at step **535**, the enlarged cavity **250** is cleaned in preparation for installation of downhole production equipment. The enlarged cavity **250** may be cleaned by pumping compressed air down the well bores **210** and **230** or other suitable techniques. Next, at step **540**, the second well bore **220** is drilled from or proximate to the articulated well bore **230** to intersect the coal seam **15**. At step **545**, the second articulated well bore **235** and extension **240** are formed. Next, at step **550**, the well bore **225** is drilled to intersect the enlarged cavity **250**.

[**0092**] At step **555**, production equipment is installed in the well bores **210** and **220**. The production equipment includes a sucker rod pump extending down into the bottom portion of well bore **220**, above the extension **240** for removing water from the coal seam **15**. The removal of water will drop the pressure of the coal seam and allow methane gas to diffuse and be produced up the annulus of the well bores **210** and **220** and the articulated well bore **230**.

[**0093**] Proceeding to step **560**, water that drains from the well bore pattern **100** into the bottom portion of well bore **220** is pumped to the surface with the rod pumping unit. Water may be continuously or intermittently be pumped as needed to remove it from the bottom portion of well bore **220**. At step **565**, methane gas diffused from the coal seam **15** is continuously collected at the surface **14**. Next, at decisional step **570**, it is determined whether the production of gas from the coal seam **15** is complete. In one embodiment, the production of gas may be complete after the cost of the collecting the gas exceeds the revenue generated by the well. In another embodiment, gas may continue to be produced from the well until a remaining level of gas in the coal seam **15** is below required levels for mining operations. If production of the gas is not complete, the No branch of decisional step **570** returns to steps **560** and **565** in which water and gas continue to be removed from the coal seam **15**. Upon completion of production, the Yes branch of decisional step **570** leads to step **575** in which the production equipment is removed.

[**0094**] Next, at decisional step **580**, it is determined whether the coal seam **15** is to be further prepared for mining operations. If the coal seam **15** is to be further prepared for

mining operations, the Yes branch of decisional step **580** leads to step **585** in which water and other additives may be injected back into the coal seam **15** to re-hydrate the coal seam in order to minimize dust, to improve the efficiency of mining, and to improve the mined product.

[**0095**] Step **585** and the No branch of decisional step **580** lead to step **590** in which the coal seam **15** is mined. The removal of the coal from the seam causes the mined roof to cave and fracture into the opening behind the mining process. The collapsed roof creates gob gas which may be collected at step **595** through the well bores **210** and **220** and/or first articulated well bore **230**. Accordingly, additional drilling operations are not required to recover gob gas from a mined coal seam. Step **595** leads to the end of the process by which a coal seam is efficiently degasified from a minimum surface area. The method provides a symbiotic relationship with the mine to remove unwanted gas prior to mining and to re-hydrate the coal prior to the mining process. Furthermore, the method allows for efficient degasification in steep, rough, or otherwise restrictive topology.

[**0096**] Although the present invention has been described with several embodiments, various changes and modifications may be suggested to one skilled in the art. It is intended that the present invention encompass such changes and modifications as fall within the scope of the appended claims.

What is claimed is:

1. A method for accessing a subsurface formation from the surface, comprising:

providing a substantially vertical well bore from a surface to a target zone;

providing a first articulated well bore extending from the substantially vertical well bore to the target zone, the first articulated well bore diverging from the substantially vertical well bore between the surface and the target zone;

providing a second articulated well bore extending from the substantially vertical well bore and intersecting the first articulated well bore at a junction proximate the target zone; and

forming a well bore pattern extending from the junction into the target zone.

2. The method of claim 1, further comprising removing resources from the target zone through the substantially vertical well bore.

3. The method of claim 1, wherein forming the well bore pattern comprises forming the well bore pattern through the first articulated well bore.

4. The method of claim 1, wherein forming the well bore pattern comprises forming the well bore pattern through the second articulated well bore.

5. The method of claim 1, further comprising forming an enlarged cavity in the target zone at an end of the well bore pattern proximate to the first and second articulated well bores, the second articulated well bore communicating between the substantially vertical well bore and the enlarged cavity.

6. The method of claim 5, wherein forming the enlarged cavity comprises forming an enlarged diameter cavity.

7. The method of claim 5, wherein forming the enlarged cavity comprises forming the enlarged cavity substantially within a coal seam.

8. The method of claim 5, wherein forming the well bore pattern comprises:

forming a main well bore extending from the enlarged cavity into the target zone; and

forming a plurality of lateral well bores extending outwardly from opposite sides of the main well bore.

9. The method of claim 8, wherein forming the lateral well bores comprises forming the lateral well bores substantially equally spaced apart from each other.

10. The method of claim 1, wherein forming the well bore pattern comprises forming a pinnate well bore pattern.

11. The method of claim 10, wherein forming the pinnate well bore pattern comprises forming a plurality of lateral well bores extending from a main well bore into the target zone.

12. The method of claim 1, further comprising:

disposing a vertical pump in the substantially vertical well bore; and

removing resources collected in the substantially vertical well bore to the surface using the vertical pump.

13. The method of claim 12, wherein disposing the vertical pump comprises providing a sucker-rod pump.

14. A method for extracting resources from a subsurface formation, comprising:

providing a substantially vertical well bore from a surface to a first target zone and a second target zone;

providing a first articulated well bore extending from the substantially vertical well bore to the first target zone, the first articulated well bore diverging from the substantially vertical well bore between the surface and the first target zone;

providing a second articulated well bore extending from the substantially vertical well bore and intersecting the first articulated well bore at a first junction proximate the first target zone;

providing a first well bore pattern extending from the first junction into the first target zone;

removing resources from the first target zone through the substantially vertical well bore;

providing a third articulated well bore extending from the substantially vertical well bore to the second target zone, the third articulated well bore diverging from the substantially vertical well bore between the surface and the second target zone;

providing a fourth articulated well bore extending from the substantially vertical well bore and intersecting the third articulated well bore at a second junction proximate the second target zone;

providing a second well bore pattern extending from the second junction into the second target zone; and

removing resources from the second target zone through the substantially vertical well bore.

15. The method of claim 14, wherein providing the first and second well bore patterns comprises forming the first and second well bore patterns through the respective first and third articulated well bores.

16. The method of claim 14, further comprising:

providing a first cavity in the first target zone at an end of the first well bore pattern proximate to the first junction, the second articulated well bore communicating between the substantially vertical well bore and the first cavity; and

providing a second cavity in the second target zone at an end of the second well bore pattern proximate to the second junction, the fourth articulated well bore communicating between the substantially vertical well bore and the second cavity.

17. The method of **16**, wherein providing the first and second cavities comprises providing the first and second cavities disposed substantially within the respective first and second target zones.

18. The method of claim 14, wherein providing the second and fourth articulated well bores comprises providing the second and fourth articulated well bores disposed substantially within the respective first and second target zones.

19. The method of claim 14, wherein providing the first and second well bore patterns comprise providing pinnate well bore patterns.

20. A system for accessing a subsurface formation from the surface, comprising:

a first well bore extending downwardly from the surface;

a second well bore extending from the first well bore to a target zone, the second well bore diverging from the first well bore between the surface and the target zone;

a third well bore extending from the first well bore and intersecting the second well bore at a junction proximate the target zone; and

a well bore pattern extending from the junction into the target zone.

21. The system of claim 20, further comprising a cavity disposed within the target zone at an end of the well bore pattern proximate to the junction, the third well bore providing communication between the cavity and the first well bore.

22. The system of claim 20, further comprising a pump disposed in the first well bore and operable to lift resources collected in the first well bore to the surface.

23. The system of claim 22, wherein the pump comprises a sucker-rod pump.

24. The system of claim 20, wherein the third well bore is disposed substantially within the target zone.

25. The system of claim 20, wherein the well bore pattern comprises a pinnate well bore pattern.

26. The system of claim 20, wherein the well bore pattern comprises:

a main well bore extending from the junction; and

a plurality of lateral well bores extending outwardly from the main well bore.

27. The system of claim 26, wherein the plurality of lateral well bores are disposed substantially equally spaced apart from each other.

28. A system for extracting resources from a subsurface formation, comprising:

a substantially vertical well bore extending from a surface to a first target zone and a second target zone;

a first articulated well bore extending from the substantially vertical well bore to the first target zone, the first articulated well bore diverging from the substantially vertical well bore between the surface and the first target zone;

a first well bore pattern extending from the first articulated well bore in the first target zone operable to collect resources from the first target zone;

a second articulated well bore operable to communicate resources from the first well bore pattern to the substantially vertical well bore;

a third articulated well bore extending from the substantially vertical well bore to the second target zone, the third articulated well bore diverging from the substantially vertical well bore between the surface and the second target zone;

a second well bore pattern extending from the third articulated well bore in the second target zone operable to collect resources from the second target zone;

a fourth articulated well bore operable to communicate resources from the second well bore pattern to the substantially vertical well bore; and

a vertical pump disposed in the substantially vertical well bore and operable to lift the resources collected in the substantially vertical well bore to the surface.

29. The system of claim 28, further comprising:

a first cavity disposed within the first target zone at an end of the first well bore pattern proximate to the first articulated well bore, the second articulated well bore operable to communicate the resources from the first cavity to the substantially vertical well bore; and

a second cavity disposed within the second target zone at an end of the second well bore pattern proximate to the third articulated well bore, the fourth articulated well bore operable to communicate the resources from the second cavity to the substantially vertical well bore.

30. The system of claim 28, wherein the second and fourth articulated well bore are disposed substantially within the respective first and second target zones.

31. The system of claim 28, wherein the first and second well bore patterns comprise pinnate well bore patterns.

32. The system of claim 31, wherein each pinnate well bore pattern comprises a plurality of lateral well bores extending from a respective main well bore disposed substantially within a respective target zone.

33. The system of claim 28, wherein the vertical pump comprises a sucker-rod pump.

34. The system of claim 28, wherein each of the first and second well bore patterns comprise:

a substantially horizontal diagonal well bore extending from a first end of an area of a subterranean zone to a second end of the area of the subterranean zone; and

a plurality of lateral well bores extending in spaced apart relation to each other from the diagonal well bore to a periphery of the area.

35. The system of claim 34, wherein the first end of the area is disposed proximate the respective first and third articulated well bores, and wherein a length of the lateral well bores progressively decreases as a distance between the lateral well bore and the first end increases.

36. A method for accessing a subsurface formation from the surface, comprising:

forming a first well bore extending downwardly from the surface;

forming a second well bore spaced apart from the first well bore at the surface, the second well bore having a first portion intersecting the first well bore at a first location and a second portion intersecting the first well bore at a second location;

forming a first well bore pattern extending from the first portion into a first target zone; and

forming a second well bore pattern extending from the second portion into a second target zone.

37. The method of claim 36, further comprising forming a first cavity and a second cavity in the first well bore, the first cavity disposed in the first target zone and the second cavity disposed in the second target zone.

38. The method of claim 36, wherein providing the first and second well bore patterns comprises providing first and second pinnate well bore patterns.

39. The method of claim 36, wherein forming the first and second portions comprises forming the first and second portions substantially within the respective first and second target zones.

40. The method of claim 36, further comprising removing the resources from the first and second target zones through the first well bore.

41. The method of claim 36, further comprising providing a vertical pump disposed in the first well bore to lift the resources collected in the first well bore to the surface.

42. A substantially horizontal subterranean drainage pattern for accessing an area of a subterranean zone from the surface, comprising:

a substantially horizontal diagonal well bore extending from a surface well bore defining a first end of the area in the subterranean zone to a distant end of the area;

a first set of substantially horizontal lateral well bores extending in a spaced apart relation to each other from the diagonal well bore to a periphery of the area on a first side of the diagonal well bore and comprising a short reversal of radius proximate to the substantially horizontal diagonal well bore; and

a second set of substantially horizontal lateral well bores extending in a spaced apart relation to each other from the diagonal well bore to a periphery of the area on aside of the diagonal well bore opposite the first set of lateral well bores.

43. The subterranean drainage pattern of claim 42, wherein a length of the lateral well bores progressively decreases as a distance from the lateral well bores to the surface well bore increases.

44. The subterranean drainage pattern of claim 42, wherein the lateral well bores each substantially extend at an angle of between 40 and 50 degrees from the diagonal well bore.

45. The subterranean drainage pattern of claim 42, wherein the lateral well bores each substantially extend at an angle of approximately 45 degrees from the diagonal well bore.

46. The subterranean drainage pattern of claim 42, wherein the area comprises a substantially quadrilateral area, and wherein the first and second ends comprise distant corners of the substantially quadrilateral area.

47. The subterranean drainage pattern of claim 42, wherein the area comprises a substantially square area, and wherein the first and second ends comprise distant corners of the square area.

48. The subterranean drainage pattern of claim 42, wherein the substantially horizontal diagonal well bore and the first and second sets of lateral well bores provide substantially uniform coverage of the area.

49. The subterranean drainage pattern of claim 42, wherein each of the lateral well bores of the first and second sets are disposed in a substantially uniform spaced apart relationship to each other.

50. A method for accessing a subterranean zone from the surface, comprising:

forming a first well bore extending from the surface to the subterranean zone;

forming a second well bore extending from the surface to the subterranean zone, the second well bore intersecting the first well bore at a junction proximate to the subterranean zone; and

forming, through the second well bore, a well bore pattern from the junction into the subterranean zone.

51. The method of claim 50, further comprising:

forming an enlarged cavity in the first well bore proximate to the subterranean zone;

forming the second well bore to intersect the enlarged cavity; and

forming the well bore pattern extending from the enlarged cavity.

52. The method of claim 50, wherein forming the well bore pattern comprises:

forming a third well bore extending from the junction into the subterranean zone; and

forming a plurality of lateral well bores extending outwardly from opposite sides of the third well bore.

53. The method of claim 52, wherein a length of each of the lateral well bores decreases as a distance between the corresponding lateral well bore and the junction increases.

54. The method of claim 50, wherein forming the well bore pattern comprises:

forming the well bore pattern using an articulated drill string extending through the second well bore and the junction;

supplying drilling fluid through the articulated drill string to remove cuttings generated by the drill string; and

pumping the drilling fluid with the cuttings to the surface through the first well bore to minimize hydrostatic pressure on the subterranean zone during drilling of the drainage pattern.

55. The method of claim 50, wherein forming the well bore pattern comprises forming a pinnate well bore pattern.

56. The method of claim 50, further comprising injecting a substance into the subterranean zone through the well bore pattern.

57. The method of claim 50, further comprising removing a resource from the subterranean zone through the first well bore.

58. A system for accessing a subterranean zone from the surface, comprising:

a first well bore extending from the surface to the subterranean zone;

a second well bore extending from the surface to the subterranean zone, the second well bore intersecting the first well bore at a junction proximate the subterranean zone; and

a well bore pattern extending from the junction into the subterranean zone.

59. The system of claim 58, wherein the well bore pattern comprises a pinnate well bore pattern.

60. The system of claim 58, wherein the well bore pattern comprises:

a third well bore extending from the junction into the subterranean zone; and

a plurality of lateral well bores extending outwardly from opposite sides of the third well bore.

61. The system of claim **60**, wherein a length of each of the lateral well bores decreases as a distance from a respective lateral well bore to the junction increases.

62. The system of claim 58, further comprising an enlarged cavity formed at the junction proximate the subterranean zone.

63. The system of claim 58, wherein the well bore pattern comprises:

a third well bore extending from the junction;

a first set of lateral well bores extending outwardly from a first side of the third well bore; and

a second set of lateral well bores extending outwardly from a second side of the third well bore.

64. The system of claim **63**, wherein each of the lateral well bores of the first and second sets are substantially evenly spaced from each other.

* * * * *