

(19)



(11)

EP 2 043 089 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

01.04.2009 Bulletin 2009/14

(51) Int Cl.:

G10H 1/42 (2006.01)**G10H 1/00** (2006.01)(21) Application number: **07117541.8**(22) Date of filing: **28.09.2007**

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE SI SK TR

Designated Extension States:

AL BA HR MK RS• **Fleischmann, Ragnar****37081 Göttingen (DE)**• **Theis, Fabian****93073 Neutraubling (DE)**• **Geisel, Theo****37075 Göttingen (DE)**(71) Applicant: **Max-Planck-Gesellschaft zur****Förderung der****Wissenschaften e.V.****80539 München (DE)**(74) Representative: **Bach, Alexander et al****Mitscherlich & Partner****Patent- und Rechtsanwälte****Sonnenstraße 33****80331 München (DE)**

(72) Inventors:

• **Hennig, Holger****37073 Göttingen (DE)**Remarks:

Amended claims in accordance with Rule 137(2) EPC.

(54) Method and device for humanizing music sequences

(57) A method for humanizing a music sequence (S), the music sequence (S) comprising a multitude of sounds ($s_1, \dots, s_n$) occurring on times ($t_1, \dots, t_n$), comprises the steps


- generating, for each time (t_i) a random offset (o_i),
- adding the random offset (o_i) to the time (t_i) in order to obtain a modified time ($t_i + o_i$); and
- outputting a humanized music sequence (S') wherein each sound (s_i) occurs on the modified time ($t_i + o_i$).

According to the invention, the power spectral density of the random offsets has the form

$$\frac{1}{f^\alpha}$$

wherein $0 < \alpha < 2$.

Fig. 1

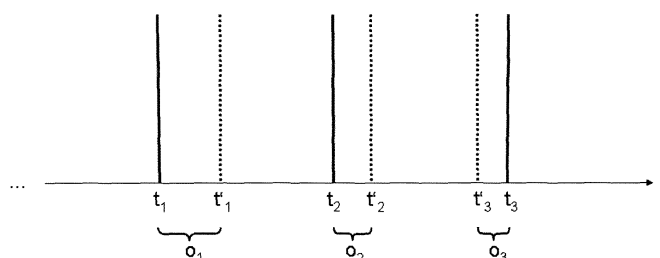

Description

[0001] The present invention relates to a method and a device for humanizing music sequences. In particular, it relates to humanizing drum sequences.

TECHNICAL BACKGROUND AND PRIOR ART

[0002] Large parts of existing music are characterized by a sequence of stressed and unstressed beats (often called "strong" and "weak"). Beats divide the time axis of a piece of music or a musical sequence by impulses or pulses. The beat is intimately tied to the meter (metre) of the music as it designates that level of the meter (metre) that is particularly important, e.g. for the perceived tempo of the music.

[0003] A well-known instrument for determining the beat of a musical sequence is a metronome. A metronome is any device that produces a regulated audible and/or visual pulse, usually used to establish a steady beat, or tempo, measured in beats-per-minute (BPM) for the performance of musical compositions. Ideally, the pulses are equidistant.

[0004] However, humans performing music will never exactly match the beat given by a metronome. Instead, music performed by humans will always exhibit a certain amount of fluctuations compared with the steady beat of a metronome. Machine-generated music on the other hand, such as an artificial drum sequence, has no difficulty in always keeping the exact beat, as synthesizers and computers are equipped with ultra precise clocking mechanisms.

[0005] But machine-generated music, an artificial drum sequence in particular, is often recognizable just for this perfection and frequently devalued by audiences due to a perceived lack of human touch. The same holds true for music performed by humans which is recorded and then undergoes some kind of analogue or digital editing. Post-processing is a standard procedure in contemporary music production, e.g. for the purpose of enhancing human performed music having shortcomings due to a lack of performing skills or inadequate instruments, etc. Here also, even music originally performed by humans may acquire an undesired artificial touch.

[0006] Therefore, there exists a desire to generate or modify music on a machine that sounds more natural.

SUMMARY OF THE INVENTION

[0007] It is therefore an object of the present invention to provide a method and a device for generating or modifying music sequences having a more human touch.

[0008] This object is achieved according to the invention of by a method and a device according to the independent claims. Advantageous embodiments are defined in the dependent claims.

[0009] The term sound to which the claims refer is defined herein as a subsequence of a music sequence. In

some embodiments, a sound may correspond to a note or a beat played by an instrument. Each sound has a temporal occurrence t within the music sequence.

[0010] Preliminary results of empirical experiments carried out by the inventors strongly indicate that a rhythm comprising a natural random fluctuation as generated according to the invention sounds much better or more natural to people than the same rhythm comprising a fluctuation due to Gaussian or uniformly distributed white noise with the same standard deviation, even when using Gaussian instead of uniform white noise.

BRIEF DESCRIPTION OF THE FIGURES

[0011] These and further aspect and advantages of the present invention will become more apparent when studying the following detailed description of the invention, in connection with the attached drawing in which

Fig. 1 shows a plot of a natural drum signal or beat compared with a metronome signal;

Fig. 2 shows the spectrum of pink noise graphed double logarithmically;

Fig. 3 shows a flowchart of a method according to an embodiment of the invention;

Fig. 4 shows a block diagram of a device for humanizing music sequences according to an embodiment of the invention; and

Fig. 5 shows another block diagram of a device for humanizing music sequences according to another embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0012] **Figure 1** shows a plot of a natural drum signal or beat compared with a metronome signal. Compared to a real audio signal, the plot is stylized for the purpose of describing the present invention, which only pertains to the temporal occurrence patterns of sounds. The skilled person will immediately recognize that in reality, each beat or note played is composed of an onset, an attack and a decay phase from which the present description abstracts.

[0013] The beats of the metronome occur on times t_1 , t_2 and t_3 and constitute a regular sequence of the form

$$t_n = t_0 + nT, \quad (1)$$

wherein t_n is the temporal occurrence or time of the n-th beat, t_0 is the time of the initial beat and T denotes the time between metronome clicks.

[0014] The human drummer's beats occur on times t'_1 , t'_2 and t'_3 and constitute an irregular sequence. The offsets o_i between the beats may be calculated as

$$o_n = t_n - t'_n. \quad (2)$$

[0015] Alternatively, the above definitions may also be generalized in order to track deviations of a sequence from a given metric pattern instead from a metronome. In other words, instead of taking regular distances T for the metronome clicks, a more complex metronome signal can be generated wherein distances between clicks are not equal but are distributed according to a more complex pattern. In particular, the pattern may correspond to a particular rhythm.

[0016] Now, according to empirical investigations of the inventors, the offsets of human drum sequences may be described by Gaussian distributed $1/f^\alpha$ noise, where f is a frequency and α is a shape parameter of the spectrum.

[0017] Figure 2 shows an example of a random signal whose power spectral density is equal to $1/f^\alpha$, wherein $\alpha = 1$, graphed double logarithmically. Within the scientific literature, this kind of noise is also referred to as 'pink noise'. The parameter α is then equivalent to the absolute value of the slope of the graph.

[0018] With regard to the invention, in particular with respect to human drumming, the parameter α may be estimated empirically by comparing the beat sequence generated by a human drum player (or several of them) with a metronome. More particularly, the temporal differences between the human and the artificial beats correspond to the off sets o_i of figure 1 and the estimation of α may be carried out by performing a linear regression on the offsets' power spectral frequency plot, wherein the frequency axis has been transformed by two logarithmic transformations for linearization.

[0019] Experiments carried out by the inventors using own recordings of the inventors as well as recordings of drummers provided by professional recording studios revealed that the exponent α appears to be widely independent of the drummer. The parameter α also clearly appears to be greater than zero (0). Also, it appears to be smaller than 2.0 in general. For drumming, it has been determined as being smaller than 1.5 in general. However, the offsets of different human drummers may differ in standard deviation and mean.

[0020] For the empirical analysis, drums have been chosen because in the analysis, the distinction between accentuation and errors is easiest when analyzing sequences that contain time-periodic structures, such as drum sequences. However, in principle, the methods according to the invention may also be applied to other instruments played by humans. For example, for a piano player playing a song on the piano, it is expectable that after removal of accentuation, the relevant noise obeys the same $1/f^\alpha$ -law as discussed above with respect to drums.

[0021] Based on these empirically determined facts

and figures, a method and a device for humanizing music, in particular drum sequences may now be described as follows.

[0022] Figure 3 shows a flowchart of a method for humanizing music sequences according to a first embodiment of the invention. The music sequence is assumed to comprise a series of sounds, which may be notes, played by an instrument such as a drum, each occurring on a distinct time t . When humanizing real audio signals, the time t may be taken as the onset of the note, which may automatically be detected by a method in the prior art (cf. e.g. Bello et al., A Tutorial on Onset Detection In Music Signals, IEEE Transactions on Speech and Audio Processing, Vol. 13, No. 5, September 2005).

[0023] In step 310, the method is initialized. In particular, the algorithm may be set to the first time to ($i = 0$).

[0024] In step 320, a random offset o_i is generated for the present sound or note at time t_i .

[0025] In step 330, the random offset o_i is added to the time t_i in order to obtain a modified time t'_i . Hereby, it is understood that the offset o_i may also be negative.

[0026] In step 340, the present sound s_i is output at the modified time t'_i . The outputting step may comprise playing the sound in an audio device. It may also comprise storing the sound on a medium, at the modified time t'_i for later playing.

[0027] In step 350, the procedure loops back to step 320 in order to repeat the procedure for the remaining sounds.

[0028] According to the invention, the random offsets are generated such that their power spectral density obeys the law

$$\frac{1}{f^\alpha}.$$

wherein $\alpha > 0$.

[0029] The parameter α may be set according to the empirical estimates obtained as described in relation to figure 2.

[0030] Figure 4 shows a block diagram of a device 400 for humanizing a music sequence according to an embodiment of the invention.

[0031] Again, it is assumed that the music sequence (S) comprises a multitude of sounds ($s_1 \dots s_n$) occurring on times ($t_1, \dots, t_n$). According to one embodiment of the invention, the device may comprise means 410 for generating, for each time (t_i) a random offset (o_i).

[0032] The device may further comprise means 420 for adding the random offset (o_i) to the time (t_i) in order to obtain a modified time ($t_i + o_i$).

[0033] Finally, the device may also comprise means 430 for outputting a humanized music sequence (S') wherein each sound (s_i) occurs on the modified time ($t_i + o_i$).

[0034] According to the invention, the power spectral density of the random offsets has the form

$$\frac{1}{f^\alpha},$$

wherein $0 < \alpha < 2$. Generators for $1/2^\alpha$ - or 'pink' noise are commercially available.

[0035] **Figure 5** shows another block diagram of a device for humanizing music sequences according to another embodiment of the invention. The device comprises a metronome 510, a noise generator 520, a module 530 for adding the random offsets to obtain a modified time sequence, a module 540 for outputting the sounds at the modified times, a module 550 for receiving an input sequence and a module 560 for analyzing the input sequence in order to automatically identify the relevant sounds.

SUMMARY

[0036] The deviation of human drum sequences from a given metronome may be well described by Gaussian distributed $1/f^\alpha$ noise, wherein the exponent α is distinct from 0. In principle, the results do also apply to other instruments played by humans. In conclusion, the method and device for humanizing musical sequence may very well be applied in the field of electronic music as well as for post processing real recordings. In other words, $1/f^\alpha$ -noise is the natural choice for humanizing a given music sequence.

Claims

1. Method for humanizing a music sequence (S), the music sequence (S) comprising a multitude of sounds ($s_1, \dots, s_n$) occurring on times ($t_1, \dots, t_n$), comprising the steps

- generating, for each time (t_i) a random offset (o_i),
- adding the random offset (o_i) to the time (t_i) in order to obtain a modified time ($t_i + o_i$); and
- outputting a humanized music sequence (S') wherein each sound (s_i) occurs on the modified time ($t_i + o_i$),

characterised in that the power spectral density of the random offsets has the form

$$\frac{1}{f^\alpha}.$$

wherein $0 < \alpha < 2$.

2. Method according to claim 1, wherein the sounds correspond to drum beats.

3. Method according to claim 1, wherein the sounds correspond to notes played by a piano.

4. Method according to claim 1, wherein the music sequence (S) is obtained from editing a human-generated music sequence.

5. Method according to claim 1, wherein the mean and/or the standard deviation of the offsets (o_i) is set according to empirical estimates.

6. Music sequence (S), comprising a multitude of sounds ($s_1, \dots, s_n$) occurring on times ($t'_1, \dots, t'_n$), wherein the times are offset with offsets ($o_1, \dots, o_n$) against the clicks ($c_1, \dots, c_n$) of a metronome, wherein the power spectral density of the offsets ($o_1, \dots, o_n$) has the form

$$\frac{1}{f^\alpha}.$$

wherein $0 < \alpha < 2$.

7. Machine readable medium, comprising a humanized music sequence according to claim 5.

8. Device for humanizing a music sequence (S), the music sequence (S) comprising a multitude of sounds ($s_1, \dots, s_n$) occurring on times ($t_1, \dots, t_n$), comprising:

- means for generating, for each time (t_i) a random offset (o_i),
- means for adding the random offset (o_i) to the time (t_i) in order to obtain a modified time ($t_i + o_i$); and
- means for outputting a humanized music sequence (S') wherein each sound (s_i) occurs on the modified time ($t_i + o_i$),

characterised in that the power spectral density of the random offsets has the form

$$\frac{1}{f^\alpha}.$$

wherein $0 < \alpha < 2$.

Amended claims in accordance with Rule 137(2) EPC.

1. Method for humanizing a music sequence (S), the music sequence (S) comprising a multitude of sounds ($s_1, \dots, s_n$) occurring on times ($t_1, \dots, t_n$), comprising the steps

- generating, for each time (t_i) a random offset (o_i),
- adding the random offset (o_i) to the time (t_i) in order to obtain a modified time ($t_i + o_i$); and
- outputting a humanized music sequence (S') wherein each sound (s_i) occurs on the modified time ($t_i + o_i$),

characterised in that the power spectral density of the random offsets has the form

$$\frac{1}{f^\alpha}.$$

wherein $0 < \alpha < 2$.

2. Method according to claim 1, wherein the sounds correspond to drum beats.

3. Method according to claim 1, wherein the sounds correspond to notes played by a piano.

4. Method according to claim 1, wherein the music sequence (S) is obtained from editing a human-generated music sequence.

5. Method according to claim 1, wherein the mean and/or the standard deviation of the offsets (o_i) is set according to empirical estimates.

6. Music sequence (S), generated by a method according to claim 1.

7. Machine readable medium, comprising a humanized music sequence according to claim 6.

8. Device for humanizing a music sequence (S), the music sequence (S) comprising a multitude of sounds ($s_1, \dots, s_n$) occurring on times ($t_1, \dots, t_n$), comprising:

- means for generating, for each time (t_i) a random offset (o_i),
- means for adding the random offset (o_i) to the time (t_i) in order to obtain a modified time ($t_i + o_i$); and
- means for outputting a humanized music sequence (S') wherein each sound (s_i) occurs on

the modified time ($t_i + o_i$),

characterised in that the power spectral density of the random offsets has the form

$$\frac{1}{f^\alpha}.$$

wherein $0 < \alpha < 2$.

Fig. 1

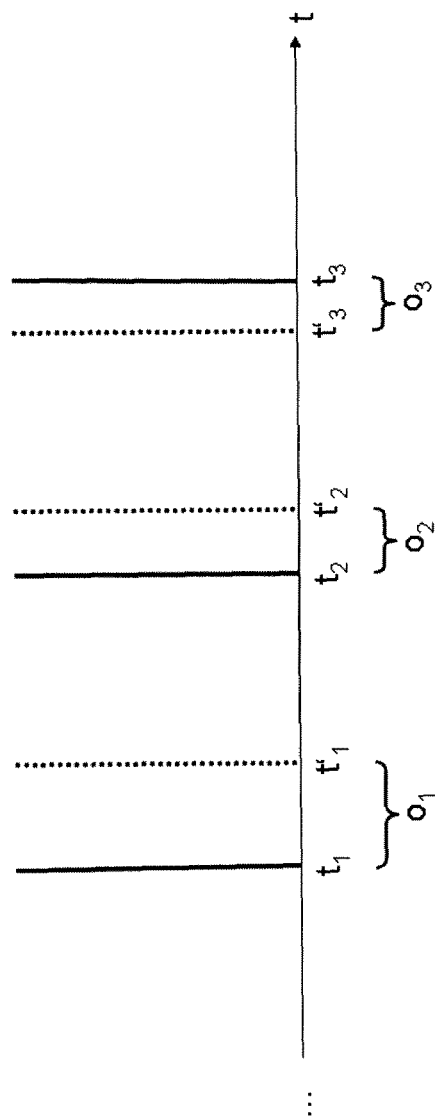


Fig. 2

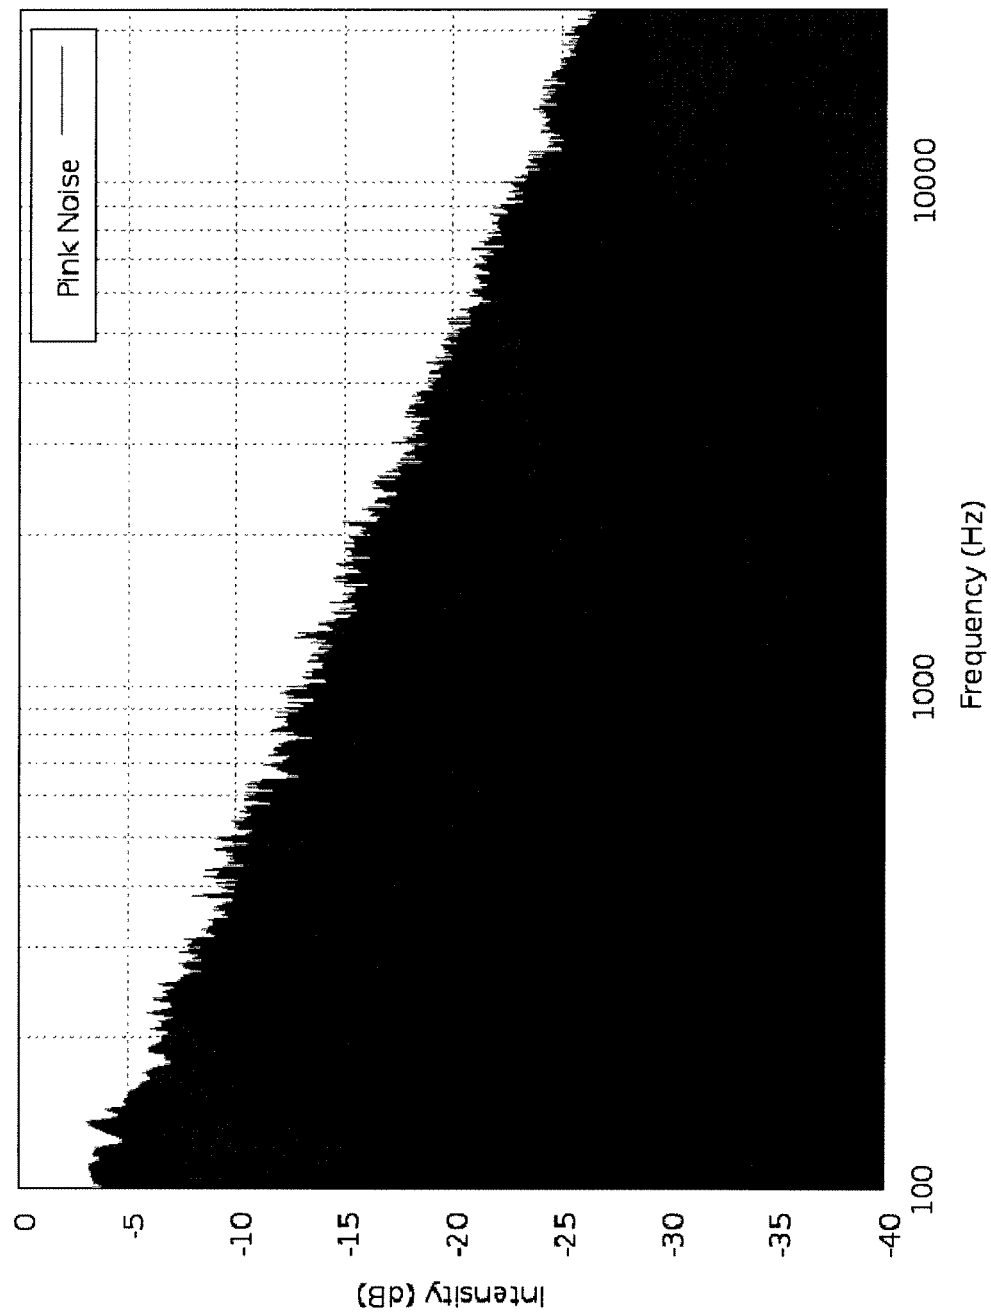


Fig. 3

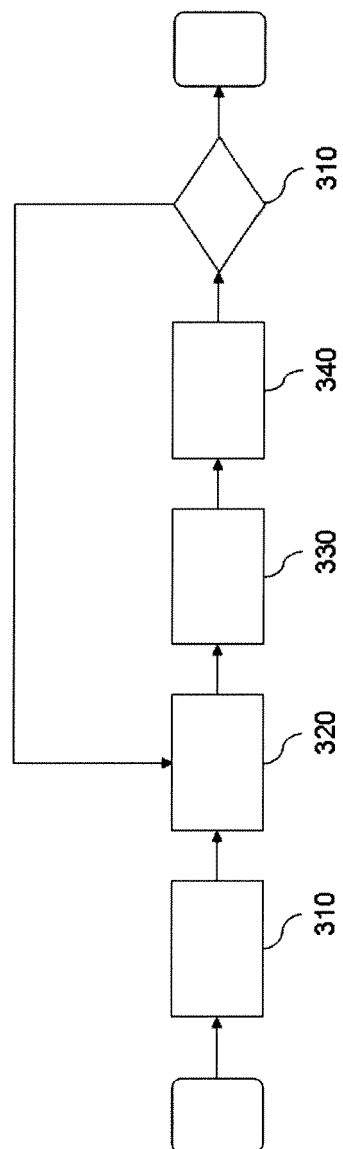


Fig. 4


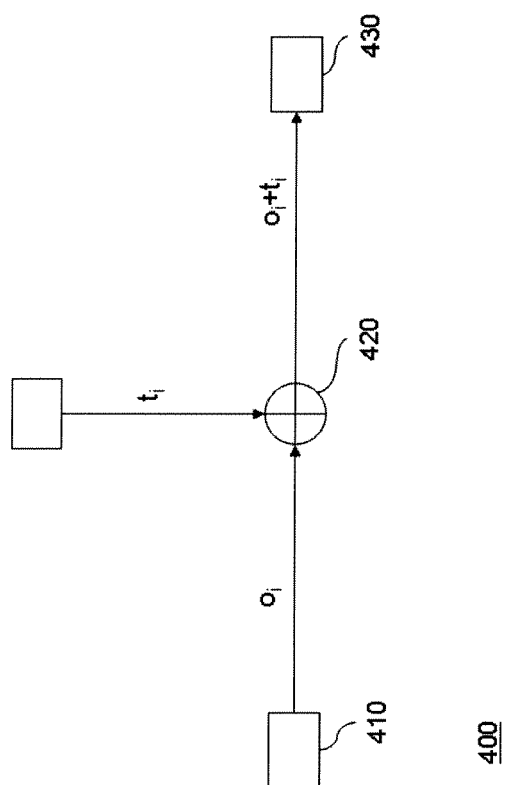


Fig. 5



500

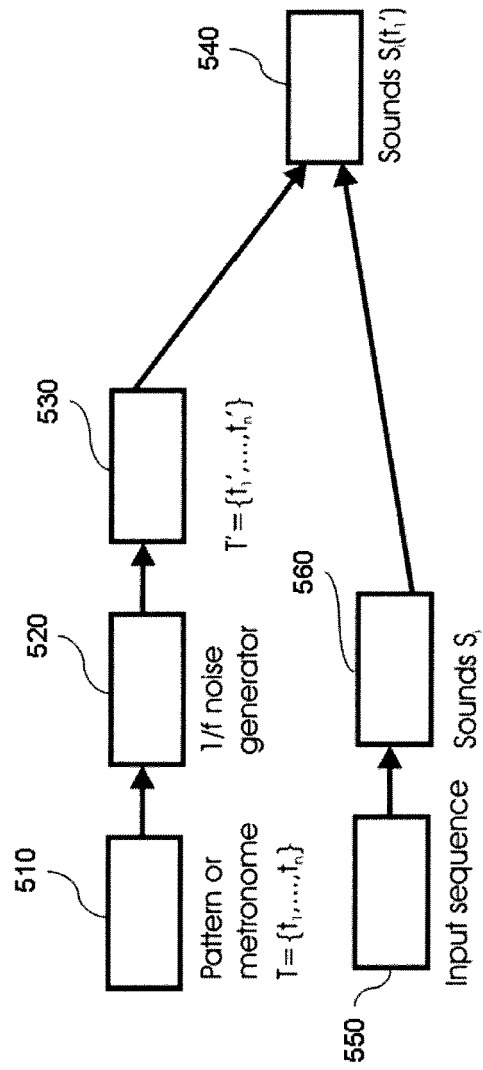

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 07 11 7541

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	US 3 974 729 A (KOIKE MASAHIKO) 17 August 1976 (1976-08-17) * abstract; figures 1-3 * * column 1, lines 30-58 * -----	1,6-8	INV. G10H1/42 G10H1/00
A	US 6 066 793 A (OGAI YOICHIRO [JP] ET AL) 23 May 2000 (2000-05-23) * abstract; figure 2 * * column 3, line 25 - column 5, line 13 * -----	1,6-8	
A	US 6 506 969 B1 (BARON RENE LOUIS [FR]) 14 January 2003 (2003-01-14) * abstract; figures 1-4 * * column 9, line 44 - column 12, line 19 * * column 14, lines 7-36 * -----	1,6-8	
			TECHNICAL FIELDS SEARCHED (IPC)
			G10H G04F
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 8 January 2008	Examiner Lecoïnte, Michael
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 07 11 7541

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-01-2008

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3974729 A	17-08-1976	NONE	
US 6066793 A	23-05-2000	JP 3293515 B2 JP 10288985 A	17-06-2002 27-10-1998
US 6506969 B1	14-01-2003	AT 243875 T AU 757577 B2 AU 5632199 A BR 9914057 A CA 2345316 A1 CN 1328679 A DE 69909107 D1 DE 69909107 T2 EP 1116213 A1 WO 0017850 A1 FR 2785438 A1 JP 2002525688 T MX PA01003089 A	15-07-2003 27-02-2003 10-04-2000 19-06-2001 30-03-2000 26-12-2001 31-07-2003 29-04-2004 18-07-2001 30-03-2000 05-05-2000 13-08-2002 15-05-2003

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Non-patent literature cited in the description

- **BELLO et al.** A Tutorial on Onset Detection In Music Signals. *IEEE Transactions on Speech and Audio Processing*, September 2005, vol. 13 (5 [0022]