

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 September 2006 (08.09.2006)

PCT

(10) International Publication Number
WO 2006/092800 A2

(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/IL2006/000292

(22) International Filing Date: 2 March 2006 (02.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/657,705 3 March 2005 (03.03.2005) US

(71) Applicant (for all designated States except US): CADENT LTD. [IL/IL]; 14 Hamelacha Street, 60372 Or Yehuda (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KOPELMAN, Avi [IL/IL]; 41 Hadekel Street, 55900 Ganei Tikva (IL). TAUB, Eldad [IL/IL]; 11 Topaz Street, 71908 Reut (IL). BABAY-OFF, Noam [IL/IL]; 25 Neviot Street, 75670 Rishon Le Zion (IL).

(74) Agent: REINHOLD COHN AND PARTNERS; P.O. Box 4060, 61040 Tel Aviv (IL).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM AND METHOD FOR SCANNING AN INTRAORAL CAVITY

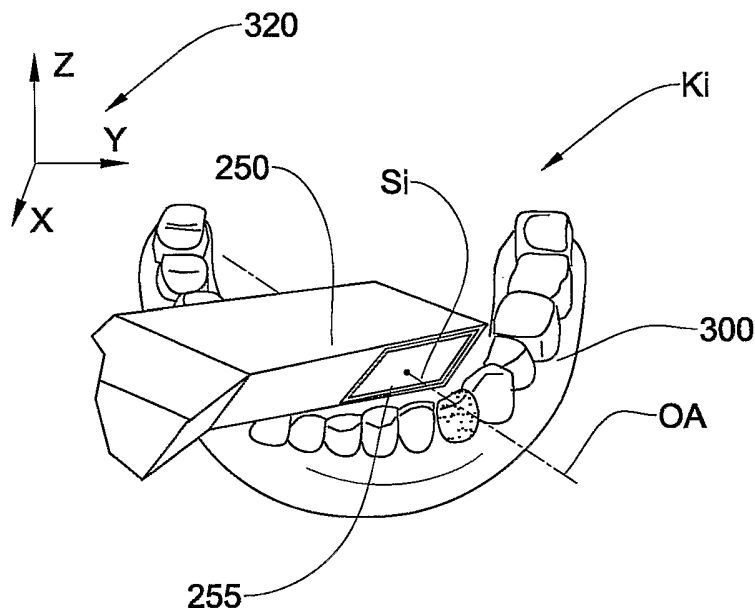

(57) Abstract: According to the invention, a method and system are provided for scanning, and for facilitating scanning of, an intraoral cavity. The target parts of the intraoral cavity that it is desired to have scanned are identified, and the spatial relationships between a scanning device and the target parts of the intraoral cavity suitable for enabling said target parts to be scanned by said scanning device, are also identified or otherwise determined. These relationships are then displayed, and the displayed relationships are used as a guide for scanning the intraoral cavity.

WO 2006/092800 A2

SYSTEM AND METHOD FOR SCANNING AN INTRAORAL CAVITY

FIELD OF THE INVENTION

This invention relates to a system and method for providing guidance for scanning the intra oral cavity to provide three dimensional data that may be subsequently used in prosthodontic and orthodontic procedures in the intra oral cavity. In particular, the invention relates to such systems and methods that are computerized.

BACKGROUND OF THE INVENTION

In prosthodontic procedures designed to implant a dental prosthesis in the intra oral cavity, the dental site at which the prosthesis is to be implanted in many cases needs to be measured accurately and studied carefully, so that a prosthesis such as a crown or bridge, for example, can be properly designed and dimensioned to fit in place. A good fit is of the highest importance to enable mechanical stresses to be properly transmitted between the prosthesis and the jaw, and to prevent infection of the gums and so on via the interface between the prosthesis and the dental site, for example.

In the prior art, the dental site is prepared by the dental practitioner, and a positive physical model of the site is constructed using known methods. Alternatively, the dental site may be scanned to provide 3D data of the site. In either case, the virtual or real model of the site is sent to the dental lab, which manufactures the prosthesis based on the model. However, if the model is deficient or undefined in certain areas, or if the preparation was not optimally configured for receiving the prosthesis, the dental technician has a more difficult job ahead than otherwise, and the design of the prosthesis may be less than optimal. For example, if the insertion path implied by the preparation for a closely-fitting coping would result in the prosthesis colliding with adjacent teeth,

- 2 -

the coping geometry has to be altered to avoid the collision, but this may result in the coping design being less optimal. Further, if the area of the preparation containing the finish line lacks definition, it may not be possible to properly determine the finish line and thus the lower edge of the coping may not be properly designed. Indeed, in some circumstances, the model is rejected and the dental practitioner must re-scan the dental site, or must rework the preparation, so that a suitable prosthesis may be produced.

In orthodontic procedures it is also necessary to provide a model of one or both jaws. Where such orthodontic procedures are designed virtually (herein also referred to as "numerically"), a virtual model of the intraoral cavity is also required, and this may be obtained, inter alia, by scanning the intraoral cavity directly, or by producing a physical model of the dentition, and then scanning the model with a suitable scanner.

Thus, in both prosthodontic and orthodontic procedures, obtaining a three-dimensional (3D) model of at least a part of the intraoral cavity is an initial requirement. When the 3D model is a virtual model, the more complete and accurate the scans of the intraoral cavity are, the higher the quality of the virtual model, and thus the greater the ability to design an optimal prosthesis or orthodontic treatment.

Prior art methods of scanning the intraoral cavity do not provide guidance to the dental practitioner on how to ensure full and accurate scanning of parts of the cavity of interest for a particular orthodontic or prosthodontic procedure. Rather, the dental practitioner uses his or her judgment on site, and it is often the case that the scans of some areas of interest may be defective, while other unimportant areas may be scanned to great accuracy with details, which is wasteful of the practitioner's and the patient's time.

- 3 -

SUMMARY OF THE INVENTION

Herein, "dental material" refers to any material associated with dental structures of the intra oral cavity, including but not limited to natural dental materials such as for example enamel, dentine, pulp, dental roots, and non-
5 natural dental materials such as for example metallic and non-metallic filings, restorations, crowns, bridges, copings, preparations, and so on.

Herein, "dental clinic" refers to the interface between a dental practitioner and a patient, and thus includes any physical entity, in particular a clinic, in which there is interaction between a dental patient and a dental practitioner. While
10 "dental practitioner" typically refers to a dentist, doctor or dental technician, it also includes herein all other caregivers that may interact with a dental patient during the course of a dental treatment. While "dental patient" typically refers to a person requiring the dental services of a dental practitioner, it also includes herein any person regarding whom it is desired to create a 3D numerical model
15 of the intra oral cavity thereof, for example for the purpose of practicing the same or for carrying out research.

The term "prosthesis" is herein taken to include any restoration and any onlays, such as crowns and bridges, for example, and inlays, such as caps, for example, and any other artificial partial or complete denture.

20 While the term "preparation" typically refers to the stump (including the finish line and optionally the shoulder) that is left of the tooth that is to be replaced by the prosthesis - typically a crown - and on which the crown is to be mounted, the term herein also includes artificial stumps, pivots, cores and posts, or other devices that may be implanted in the intraoral cavity in such a position
25 or in a position that is optimal for implanting the crown.

The term "prosthodontic procedure" refers, inter alia, to any procedure involving the intraoral cavity and directed to the design, manufacture or installation of a dental prosthesis at a dental site within the intraoral cavity, or a real or virtual model thereof, or directed to the design and preparation of the
30 dental site to receive such a prosthesis.

- 4 -

The term "orthodontic procedure" refers, inter alia, to any procedure involving the intraoral cavity and directed to the design, manufacture or installation of orthodontic elements at a dental site within the intraoral cavity, or a real or virtual model thereof, or directed to the design and preparation of the dental site to receive such orthodontic elements.

The term "numerical entity" is used herein synonymously with virtual model, 3D model, and other such terms, and relates to a virtual representation in a computer environment of a real object, typically a dentition or at least a part of intraoral cavity, or of a real model thereof, for example.

The term "scanning" and its analogues refer to any procedure directed at obtaining 3D topographic data of a surface, particularly of a dental surface, and thus includes mechanical methods, typically based on 3D probes for example, optical methods, including for example confocal methods, for example as disclosed in WO 00/08415, the contents of which are incorporated herein in their entirety by reference, or indeed any other method.

The term "display" and its analogues refer to any means or method for delivering a presentation, which may include any information, data, images, sounds, etc, and thus the delivery may be in visual and/or audio form.

The present invention is directed to a method for scanning an intraoral cavity, and thus to a corresponding method for facilitating scanning of an intraoral cavity, the method comprising

- (a) identifying target parts of the intraoral cavity that it is desired to have scanned;
- (b) identifying spatial relationships between a scanning device and said target parts of the intraoral cavity suitable for enabling said target parts to be scanned by said scanning device;
- (c) displaying said relationships; and
- (d) using said displayed relationships as a guide for scanning the intraoral cavity.

- 5 -

The method further comprises the step of scanning said intraoral cavity in a manner substantially conforming to said relationships.

The scanning substantially provides 3D data of said target parts for use in a predetermined procedure. Step (a) may include identifying ancillary parts in
5 said intraoral cavity associated with said target parts, wherein 3D data of said ancillary parts is also required for use in said predetermined dental procedure. Step (b) may comprise, for each said target part and each said ancillary part, determining for said scanning device a series of spatial parameters, each comprising a scanning station data sufficient for enabling said scanner to fully
10 scan said corresponding target part or ancillary part. Optionally, the scanning station data of said series include a proximity and a relative orientation of said scanner with respect to said target part or ancillary part such as to enable said scanner to obtain 3D topographical data of an area of said target part or ancillary part. The series provide 3D topographical data for a corresponding plurality of
15 said areas, wherein said spatial parameters of said series are determined such at least some adjacent said areas overlap one another.

In one embodiment, step (c) comprises displaying a nominal image comprising an image of at least a portion of an nominal intraoral cavity, comprising corresponding said target parts and said ancillary parts, and an image
20 of a nominal scanner in a spatial relationship with respect to one another corresponding to the spatial relationship as determined in step (b) for at least one parameter of said series of parameters. A series of said nominal images may be provided, each image in said series corresponding to a different one of said parameters of said series of parameters. The series of images can be displayed in
25 any predetermined sequence. Optionally, the nominal image comprises 3D attributes. The image may comprise said nominal intraoral cavity at any desired orientation with respect to a predetermined coordinate system. The coordinate system may comprise, for example, an orthogonal Cartesian axes system. The orientation may optionally correspond to a real life view of the intraoral cavity of

- 6 -

a patient from the vantage point of a dental practitioner. Optionally, an audio and/or visual cue is provided for prompting the user to proceed to the next image.

In another embodiment, step (c) comprises displaying indicia on a viewfinder capable of providing a video image of the field of view of said scanner, said indicia being indicative of a desired position for associating a predetermined portion of said target parts or ancillary parts in a particular manner with respect therewith. The indicia may comprise, for example, an "+" or an "X" or any other suitable symbol, which may be, for example, geometrical, alphanumeric and so on.

10 In a variation of this embodiment, the indicia comprise a symbol representative of a profile corresponding to an expected view of said target part or ancillary part in said viewfinder. Optical or image recognition methods can be applied to said video image for providing a profile of the image, said symbol comprising said profile. For example, the profile comprises a shaped line shaped as an outline of a tooth as seen via said viewfinder. The symbol may comprise a shaped line shaped as an outline of a tooth seen in any one of top view, buccal view or lingual view, for example.

Optionally, a series of indicia are provided, each indicia in said series corresponding to a different one of said parameters of said series of parameters. 20 said series of indicia may be displayed in a predetermined sequence, a next indicia being displayed after the intraoral cavity has been scanned according to the previous said parameter and corresponding indicia. Said next indicia may be displayed together with the immediately preceding indicia. Optionally, indicia relating to different said parameters may be displayed in different colors one 25 from another.

The aforesaid procedure may be, for example, a prosthodontic procedure for a crown with respect to a preparation, said target parts comprising said preparation, and said ancillary parts comprising at least a portion of the teeth adjacent to said preparation and facing said preparation from the opposed jaw.

- 7 -

The aforesaid procedure may be, for example, a procedure is a prosthodontic procedure for a bridge with respect to a plurality of preparations, said target parts comprising said preparations, and said ancillary parts comprising at least a portion of the teeth adjacent to a furthestmost distal preparation and adjacent a furthestmost mesial preparation, and at least a portion of the teeth facing said preparations from the opposed jaw.

The aforesaid procedure may be, for example, a procedure is an orthodontic procedure, and said target parts comprise the full dentition of at least one jaw of said intraoral cavity.

Typically the method of the invention is a computerized method, i.e., executed partly or fully with the aid of a processing unit such as a computer. Nevertheless, at least some embodiments may be executed without the need of a computer.

The present invention also relates to a computer readable medium that embodies in a tangible manner a program executable for guiding the scanning of the intraoral cavity of a patient, comprising:

(a) a first set of data representative of target parts of the intraoral cavity that it is desired to have scanned;

(b) a second set of data representative of spatial relationships between a scanning device and said target parts of the intraoral cavity suitable for enabling said target parts to be scanned by said scanning device.

The computer readable medium may further comprise means such as manipulation routines, computer instructions, and so on, for example, for manipulating said second set of data for enabling displaying said second data.

The medium may comprise any one of optical discs, magnetic discs, magnetic tapes, and so on, for example.

The present invention is also directed to a system for guiding the scanning of an intraoral cavity, comprising:

(A) input module for identifying target parts of the intraoral cavity that it is desired to have scanned;

- 8 -

(B) processing module for generating spatial relationships between a scanning device and said target parts of the intraoral cavity suitable for enabling said target parts to be scanned by said scanning device;

(C) display module for displaying said relationships.

5 The system preferably also comprises a suitable scanner for scanning according to said relationships

BRIEF DESCRIPTION OF THE DRAWINGS

In order to understand the invention and to see how it may be carried out in practice, a number of embodiments will now be described, by way of non-
10 limiting example only, with reference to the accompanying drawings, in which:

Fig. 1 shows a block diagram of a scanning process according to an embodiment of the invention.

Fig. 2 shows a block diagram of a scanning system according to an embodiment of the invention.

15 **Fig. 3** shows a virtual representation of a dentition enabling target areas to be chosen interactively.

Fig. 4 illustrates target parts and ancillary parts of an intraoral cavity associated with a crown prosthodontic procedure.

Fig. 5 shows a buccal view of an idealised virtual model of a nominal
20 intraoral cavity showing a plurality of scanning stations.

Fig. 6 shows a top view of an idealised virtual model of a nominal intraoral cavity showing a plurality of scanning stations.

Fig. 7 shows the relationship between an scanning station and a dental surface being scanned thereat.

25 **Figs 8a** and **8b** illustrate examples of display output using the system of Fig. 2 according to one embodiment.

Figs 9a and **9b** illustrate examples of display output using the system of Fig. 2 according to another embodiment.

Figs 10a, 10b, 10c illustrate the embodiment of Figs 9a, 9b, used for guiding scanning from one scanning station to a next scanning station.

Figs 11a and 11b illustrate examples of display output according to a variation of the embodiment of Figs. 9a, 9b.

5

DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 illustrates a block diagram of the **3D** data acquisition process **100** according to an embodiment of the invention, and Fig. 2 illustrates the main elements of a system **200** for carrying out the method according to an embodiment of the invention. The system **200** typically comprises a
10 microprocessor or any other suitable computer, having an input interface or module **210** such as a keyboard, mouse, tablet, and so on, an output device or display means or module **220**, typically a screen or monitor but may additionally or alternatively include a printer, or any other display system, a processing unit
15 or module **230** such as for example a CPU, and a memory **240**. In some embodiments, a suitable scanner **250** for obtaining **3D** data of the intraoral cavity is also operatively connected to the system **200** and interacts therewith, while in other embodiments the scanner **250** may provide the **3D** data to another system not necessarily connected in any way with system **200**. Advantageously, a probe
20 for determining three dimensional structure by confocal focusing of an array of light beams may be used, for example as manufactured under the name of CB-CAD or as disclosed in WO **00/08415**, the contents of which are incorporated herein in their entirety. Alternatively, scanning of the dental cavity to provide the **3D** data may be accomplished using any suitable apparatus typically comprising
25 a hand held probe.

At step **110**, the target parts of the intraoral cavity are identified. The target parts are the parts (also referred to herein as zones or areas) of the intraoral cavity which form the focus of a particular dental procedure for a particular patient and regarding which it is desired to obtain the **3D** topographical or

- 10 -

surface data thereof. The target parts typically include the part of the tooth or the teeth, or other dental material on which the particular procedure is to be performed, and in some cases may include the full mandibular or maxillary arches, or both arches. For example, the procedure may be a prosthodontic procedure involving a crown prosthesis to be designed and fabricated for fitting onto a preparation at a particular dental site. In such a case, the dental practitioner inputs into processing unit **230** the tooth which has been targeted for the procedure, identified according to any suitable convention. For example, and referring to Fig. **3**, the display **220** may be used to display a standard image or graphical representation **211** of a nominal intraoral cavity, either with three-dimensional (**3D**) attributes or a simple two dimensional (**2D**) representation. Alternatively, though, a non graphical (for example alphanumeric) representation of the intraoral cavity may be provided. Thus, and referring to the example illustrated in Fig. **3**, the representation **211** includes a plurality of icons or images or symbols **212**, one each corresponding to the teeth in a normal adult or child (the age of the patient having first been input to the processing unit **230**). The tooth which is to be the target of the procedure may be identified by "clicking" with the aid of a mouse, for example, on the appropriate symbol **212**. Alternatively, any other interactive method may be used for choosing the target tooth, for example by means of a touch screen arrangement. In another example, the identity of the target tooth may be manually input to the processing unit **230** using any conventional nomenclature, a unique coding convention, by selection on a drop-down menu or the like, or in any other suitable manner, the processing unit **230** having been suitably programmed to recognise the choice made by the user.

Alternatively, for a prosthodontics procedure involving a bridge, the two or more teeth that are to be worked on to provide preparations to receive the bridge are identified, for example in a similar to that described above, *mutatis mutandis*. For orthodontic procedures typically all of the teeth in one or both jaws are required. In such a case, all of the teeth of the upper jaw, lower jaw or

- 11 -

both jaws may be chosen by means on a single appropriate symbol, for example as indicated at **213**, **214**, **215**, respectively, in Fig. **3**.

The manner in which the intraoral cavity needs to be scanned may depend on the procedure to be applied thereto, as will become clearer as the description proceeds. Thus, the dental practitioner also inputs to the processing unit **230** the identity of the actual procedure. For this purpose, the dental practitioner may choose the procedure from a number of preset options on a drop-down menu or the like, from icons or via any other suitable graphical input interface. Alternatively, the identity of the procedure may be input in any other suitable way, for example by means of preset code, notation or any other suitable manner, the processing unit **230** having been suitably programmed to recognise the choice made by the user. By way of non-limiting example, the procedures may be broadly divided into prosthodontic and orthodontic procedures, and then further subdivided into specific forms of these procedures, as known in the art.

The type of scanner **250** to be used is also input to the processing unit, typically by choosing one among a plurality of options. If the scanner that is being used is not recognisable by the processing unit **230**, it may nevertheless be possible to input operating parameters of the scanner thereto instead. For example, the optimal spacing between the scanner head and the tooth surface can be provided, as well as the capture area (and shape thereof) of the dental surface capable of being scanned at this distance. Alternatively, other suitable scanning parameters may be provided. In any case, it may be desired that the virtual model of the dentition, provided using the scanners, may be dimensionally related to the real dentition in a known manner, so that dimensional measurements of the virtual model may be made.

In the next step **120**, the processing unit **230** identifies the required spatial relationships that are required for scanning the appropriate parts of the intraoral cavity so that complete and accurate **3D** data may be obtained for the procedure in question. This step utilises the data already provided in step **110** for establishing the optimal manner for scanning the intraoral cavity, and thus will

- 12 -

depend on the nature of the aforesaid data. Further, according to the method of the invention, additional or ancillary parts of the intraoral cavity that need to be scanned for the particular procedure are also identified, and the spatial relationship between the scanner and these parts are identified or determined.

5 Having identified the target parts and ancillary parts, a scanning protocol is identified or determined by relating the type of scanner, resolution thereof, capture area at an optimal spacing between the scanner head and the dental surface to the target parts and the ancillary parts, either separately or together. The scanning protocol typically comprises a series of scanning stations spatially
10 associated with the dental surfaces of the target part and the ancillary part. Preferably, significant overlapping of the images or scans capable of being obtained at adjacent scanning stations is designed into the scanning protocol to enable good registration, and the **3D** data obtained at each scanning station is stitched together to provide a composite **3D** virtual model, as is known in the art.
15 A number of examples will now be described.

Fig. 4 illustrates an idealised portion **300** of the intraoral cavity of a patient requiring a crown prosthesis on a preparation **P** having teeth **A**, **B**, adjacent thereto, and teeth **A'**, **P'** and **B'** in opposed relationship thereto from the other jaw. This idealised portion **300** is typically a **3D** virtual model of an
20 idealised full dentition of an adult that is stored in the memory **240** of the system **200**. By idealised is simply meant that the idealised dentition comprises **3D** models of all of the teeth of an adult in their normal relative positions, the **3D** models typically being standardised according to the statistical norm regarding size, shape and so on as commonly found in the population. Of course, for the
25 purpose of the invention, any **3D** virtual model may be suitable, so long as it includes the **3D** virtual models of the teeth corresponding to the teeth of the patient in the required target part and ancillary part. The memory **240** may also comprise idealised virtual models of the teeth of children or of special population groups, and thus the user typically specifies (and may optionally be prompted to
30 do so by the system **200**) the age of the patient, or other attribute that best decides

- 13 -

the closest idealised virtual model with respect thereto. The memory 240 also comprises, for each virtual tooth model of the 3D virtual model 300, an idealised virtual preparation model, and according to the prosthodontics procedure required by the patient, one or more of the virtual teeth may be replaced with the
5 corresponding one or more virtual preparations.

The target area or part to be scanned is represented by the dotted line **T**, and includes the preparation **P**, including the finish line **LT**, and part of the original tooth above the gumline. When the target area is scanned very accurately, it is possible for the internal surface of a corresponding coping or
10 prosthesis to be accurately designed. Ancillary parts of the intraoral cavity are included in dotted line **AT**, and comprise parts of the adjacent and opposed teeth, principally teeth **A**, **B**, **P'**, and often to a lesser extent teeth **A'** and **B'** or parts thereof. Typically, but not necessarily, the resolution of the scanned data for the ancillary parts **AT** may be less than for the target part **T**, since the manufacturing
15 accuracy for the external surfaces of the crown prosthesis (the design of which is dependent on the dental surfaces of the ancillary parts) may be substantially less than for the internal surface of the coping or prosthesis. According to the specific nature or properties of the scanner, including the resolution thereof, capture area at an optimal spacing between the scanner head and the dental surface to the
20 target parts and the ancillary parts, the scanning protocol may be designed as follows.

Referring to Fig. 7, for example, at each scanning station S_i (also referred to herein as an image capture station), 3D data within an area I_i' of the dental surface **X** of a tooth or preparation, for example, may be captured by the scanner
25 250, and this area may be represented at the scanning station S_i by a projection I_i of area I_i' on a plane orthogonal to the scanning axis **OA** of the scanner, and displaced from the dental surface by a dimension **t**. This dimension **t** is typically the optimal spacing of the particular scanner with respect to the dental surface **X** for providing a scan area equivalent to I_i , but may be any other suitable spacing.
30 The shape of the area I_i will generally depend on the scanner, and is herein

- 14 -

represented by a rectangle. The orientation of the scanning axis **OA** can be related to a reference coordinate system, for example orthogonal Cartesian axes **320** defined with respect to the model **300**, and which are typically easily identified in the real intraoral cavity.

5 Referring to Figs. **5** and **6**, the processing unit **230** determines a plurality of scanning stations S_i surrounding the target part **T** and the ancillary part **AT** (referring also to Fig. **4**) such that the corresponding areas I_i' , in which **3D** data is obtained, together cover the full extent of the dental surfaces of interest therein (wherein $i = 1, 2, 3, \dots, 10, 11, 12, 13, 14, \dots$). For example, in Fig. **5**, areas I_1, I_2, I_3
10 and areas I_4, I_5, I_6 represent two sets of three overlapping zones each at approximately two different heights with respect to the gum **G** which may be sufficient to define a buccal portion of the target part **T** and the ancillary part **AT** of the lower jaw of Fig. **4**. Similar areas may be required from the lingual side. In Fig. **6**, areas I_4, I_5, I_6 are represented by U-shaped symbols, wherein the arms of
15 the U represent the direction along which the scan is taken, i.e., the spatial position of the scanning axis **OA** of the scanner, and the middle portion of the U represents the corresponding projection I_i as seen edge-on. Thus, exemplary additional areas I_{10} and I_{11} represent additional scanning stations not coplanar with the scans at areas I_4, I_5, I_6 . Similarly, the areas $I_7, I_8, I_9, I_{12}, I_{13}, I_{14}$, in Figs.
20 **5** and **6** represent additional scanning areas taken from above the tooth, with greater overlap between areas being provided in the vicinity of the target part **T**. For example, areas I_{13}, I_{14} , being more face-on with respect to parts of the finish line may provide greater accuracy thereof. The location and orientation of scanning stations S_i are determined such that the areas I_i' of the idealised model
25 corresponding to these stations adequately cover the corresponding target parts **T** and ancillary parts **AT** thereof. Thus, by reproducing these locations and orientations of the scanner **250** with respect to the real intraoral cavity, the required **3D** data of the target part **T** and ancillary part **AT** may be obtained, as will be described in greater detail hereinbelow.

- 15 -

The scanning protocol for the dental surfaces of the opposed jaw that are included in the target part **T** and the ancillary part **AT** may be obtained in a similar manner to that described above for the lower jaw, *mutatis mutandis*.

Typically, the scanning protocol will differ when different scanners are used for the same target area, depending on the capture characteristics of the scanner used. Thus, a scanner capable of scanning a larger dental area with each scan (e.g., having a larger field of view) will require less scanning stations to be defined in the scanning protocol than a scanner that is only capable of capturing **3D** data of a relatively smaller dental surface. Similarly, the number and disposition of scanning stations for a scanner having a rectangular scanning grid (and thus providing projected scanning areas I_i in the form of corresponding rectangles) will typically be different from those for a scanner having a circular or triangular scanning grid (which would provide projected scanning areas I_i in the form of corresponding circles or triangles, respectively).

In another example (not illustrated) relating to a prosthodontic procedure for a bridge having a single or a plurality of pontics, there are generally two target parts, relating to one or the other of the two preparations on which the bridge is to be anchored, and the ancillary parts to be scanned include at least part of the teeth adjacent to the furthestmost distal preparation and adjacent the furthestmost mesial preparation, and at least a portion of the teeth facing the preparations from the opposed jaw.

In another example (not illustrated) relating to a prosthodontics procedure requiring a restoration on the buccal or lingual part of a particular tooth, only this target part may need to be scanned in the patient together with the occlusal surfaces of the some of the teeth of the opposite jaw as ancillary parts.

In yet another example (not illustrated) relating to an orthodontic procedure for one or both jaws, the target part may comprise the full dentition of one or both jaws, respectively.

According to the invention, the system **200** may calculate each time a new idealised scanning protocol based on the parameters of the scanner, the

- 16 -

procedure, the dental site of the procedure, age of the patient, and so on, and as applied to the idealised virtual model **300**.

Alternatively, all the necessary scanning protocols are previously calculated for every type of scanner, procedure, age group and so on, and stored
5 in memory **240**, the most suitable protocol being retrieved therefrom when identified according to the particular patient/procedure/scanner parameters that are provided. In this case, the virtual model **300** may not be needed for the purpose of determining customised scanning protocols. Thus, it is possible to provide all the necessary guidance for a particular procedure in printed form, a
10 printed book or pamphlet, for example, by means of a movie or video clip, or in any other communication medium, wherein the user would search for the appropriate guidance images or the like according to the particular parameters of the patient in question, via an index or the like for example, and then open the book/movie and so on at the relevant pages/scene etc., to obtain the guidance
15 required.

Alternatively, the memory **240** comprises a standard scanning protocol for each different type of procedure, and this protocol is modified by the processing unit **230** to take account of at least one of the parameters including: age of dental patient, dental target part, scanner characteristics, and so on.

20

In step **130**, the spatial relationship between the scanning stations S_i and the intraoral cavity are displayed, so that in step **140** these displayed relationships may be used as a guide by the dental practitioner for scanning the intraoral cavity in a manner suitable for obtaining **3D** data appropriate for the particular
25 procedure being considered. There are many ways of displaying the aforesaid spatial relationships, some examples of which will now be described.

Referring to Figs. **8a** and **8b**, for example, a pair of perspective view images K_i may be displayed, on a screen **220** or as printed material, for example,
30 corresponding to the spatial relationship of the scanner **250** with respect to the

- 17 -

idealised intraoral cavity **300** at a particular scanning station **S_i**. Additionally or alternatively, a plurality of images showing the relationship at any other desired vantage point (viewpoint) may be provided, including for example the vantage point as would be seen by a dental practitioner with respect to a real intraoral cavity, either by default or by being chosen by the user by interacting with processing unit **230**. Optionally, a dynamic image may be provided, in which the user can change the vantage point of the image interactively, in a manner known in the art. Alternatively, a video clip or the like may be provided for providing the user with a sequence of operations of the scanner etc.

10 Images **K_i** may be composites of virtual models of the scanner **250** and of the intraoral cavity **300** (typically the aforesaid idealised virtual model) stored in memory **240**. These virtual models are manipulated by the processing unit **230** to provide the correct spatial relationship, in virtual space, according to the particular scanning station **S_i** previously determined, and can be displayed as two dimensional images in a manner known in the art. Optionally, the position of the scanning station **S_i** and the direction of the scanning axis **OA** can be displayed with respect to the intraoral cavity **300**, additionally or alternatively to the scanner. The scanning axis **OA** is typically defined as orthogonal to the scanning face **255** of the scanner, but may be defined according to any other preknown suitable geometric or other parameter of the scanner. The images **K_i** can optionally comprise a representation of the coordinate system, for example orthogonal axes **320**, in the orientation appropriate to the vantage point being viewed.

25 For the purpose of images **K_i**, it may be possible to display the image of the dental surfaces as having **3D** attributes and realistic dental morphologies, for example as illustrated in Figs. 8a and 8b, or alternatively, each dental surface may be represented, for example, by a geometrical form – for example simple wedges representing incisors, cones representing canines, and cylinders representing molars.

- 18 -

Optionally, a summary composite image may be first provided (not shown) illustrating the full protocol, for example as a plurality of symbols (e.g. indicia such as "X" or "+", or frames representing the projected areas I_i , and so on) may be superposed over one or more images of the idealised dentition – for example, in a manner similar to that illustrated in Figs. 5 and 6.

Further optionally, the idealised virtual model appearing in images K_i may be custom-modified to show a virtual preparation at each corresponding dental site where a real preparation is to be found, and also virtual teeth may be removed from the model where none are to be found in the real intraoral cavity – for example where teeth have been removed for accommodating a pontic. These features can further facilitate identification of the positions and orientations of the scanner at each of the scanning stations S_i .

Further optionally, non-image data may be provided identifying the position and orientation of the scanner at each scanning station S_i , and this data may be provided, for example, in the form of a table listing suitable corresponding geometric data, and also including, for example the spacing between the scanner scanning face 255 and the dental surface of interest, an identification of the particular surface being scanned, and so on. Alternatively, the relationships in step 130 may be displayed in alphanumeric form, as a set of instructions or statements describing the relative positions of the scanner and teeth, for example. Alternatively, the relationships in step 130 may be displayed in audible form, wherein for example such instructions or statements are broadcast by a speaker or the like, either from a prerecording, or synthetically created by the system 200.

25

Further optionally, the scanning stations S_i may be successively displayed in any desired order, for example in an order such as to minimise displacement of the scanner between each successive scan.

In this embodiment of step 130 is followed by the step 140 of using the displayed relationships as a scanning guide, and step 150 of scanning the

30

- 19 -

intraoral cavity in a manner substantially conforming to said relationships. To facilitate the dental practitioner's work, the images corresponding to a next scanning station are, optionally, not displayed until the practitioner is confident that he/she has properly scanned the intraoral cavity as required by the current scanning station. This may be accomplished by operatively connecting the scanner **250** to the processing unit **230**, and prompting the user whether to display the next scanning station every time a scan is taken (and which is detected by the unit **230**). Alternatively, it may be possible, after each scan, to display a video image as taken by the scanner with an idealised **2D** virtual image of the idealised virtual model as seen from the vantage point of the scanner for this scanning station, and the user can compare the two images and decide whether or not the particular scan is likely to have sufficiently conformed with the desired relationship.

A second embodiment of step **130** is illustrated in Figs. **9a** and **9b**, and in this embodiment, use is made of the video image capturing capabilities of the scanner **250**, which is configured with such capabilities, for guiding the same. A suitable symbol, such as cross-hairs **400**, occlusal line **410**, and so on may be superimposed on the viewfinder of the scanner **250**, typically displayed on the screen **220** (or printed for example). In this embodiment, the spatial relationships of step **120** are displayed from the vantage point of the scanner **250**, and takes the form of providing a reference marker, such as the aforesaid cross-hairs **400**, for example, on the screen where a particular part of the dental surface (e.g., the centre of a tooth viewed in the particular direction of the scanning axis) being viewed should be centred. For example, in Fig. **9a**, the appropriate scan for the scanning station may be taken when the upper tooth **405** and the lower tooth **406** (previously identified by the system as being the subject of the scan) as imaged from a buccal direction by the scanner are each centralised with respect to the upper and lower cross-hairs **400**. Similarly, in Fig. **9b**, the tooth **407** being imaged from above is centralised with respect to cross-hairs **400**. The cross-hairs

- 20 -

400 may further comprise a ring **401** which further facilitates centering the tooth **407** as viewed via the scanner **250** with respect to the cross-hairs **400**.

Proceeding to and identifying the next scanning station is facilitated by displacing the cross-hairs **400** to a position on the screen where the last position
5 of the cross-hairs **400** appears in the next (now current) position of the scanning station. This is accomplished automatically by the processing unit **230** when the user is satisfied that the previous scan was properly taken, for example as described earlier in connection with the embodiment of Figs. **8a**, **8b**, *mutatis mutandis*. The scanner is then moved so that the cross-hairs **400** (still associated
10 in virtual space with the previous scanning station, and now appearing at the relocated position on the viewfinder) is again centralised with the previous dental surface, which has been effectively displaced from the central position of the screen to a position once again associated with the now-displaced cross-hairs **400**. This automatically aligns the scanner with the next scanning station. For
15 example, referring to Figs **10a** to **10c**, Fig. **10a** illustrates an image **L** in buccal view of a series of teeth, with the cross-hairs **400** centralised over one particular tooth **410**, the adjacent teeth **411** and **412** being partially visible. When the user is satisfied that a suitable scan was taken at this scanning station, this is made known to the system **200** in any suitable manner, and the cross-hairs **400** is
20 moved from the previous position at the centre of the screen to the right, such that only the left hand portion **401** of the cross-hairs **400** is now visible. The user then moves the scanner such as to renew the relative position of tooth **410** with respect to cross-hairs **400** in the viewfinder, to for example as illustrated in the image of Fig. **10b**, which now brings the next dental surface to be scanned, in
25 this case tooth **411**, into the main part of the viewfinder to provide image **L'**. The relative position of the elements in the previous image **L** is shown as a dotted box. When this is accomplished to the satisfaction of the user, the old position of the cross-hairs **400** is removed from the screen, and repositioned at the centre of the screen, as shown at the dotted lines **400'**. A scan can now be performed at this
30 position, which corresponds to a scanning station. To move to the next scanning

- 21 -

station illustrated in Fig. 10c, the new position of the cross-hairs 400 is relocated, for example to the lower part of the viewfinder, and the user correspondingly translates the scanner so as to re-locate tooth 411 to maintain the previous relative position with respect to the cross-hairs 400, providing image L", and the position of the previous image L' is shown in the dotted box in this figure. This process is repeated until all the scanning stations have been passed. It may be necessary to change to direction of the scanning entirely, for example from buccal (Fig. 9a) to upper (Fig. 9b), and this can be done by guiding the user to a particular tooth where the transition is required, and then for example changing the form of the reference marker – for example, from the "+" indicia to one also including a circle 409 (e.g. as illustrated in Fig. 9b) – signifying that an upper view should now be taken of the current tooth (or preparation or whatever dental surface is being considered). Additionally or alternatively, written, or graphic prompts may be provided in the screen, or vocal or other audio prompts provide via a speaker (not shown) urging the user to change position, and/or to move to a different dental site, specified according to the next scanning station.

In a variation of the second embodiment of steps 130 and 140 described above, optical recognition (also known as image recognition) methods may be employed for identifying features of the dental surface being scanned at the current scanning station for guiding the user to the next scanning station. For example, and referring to Figs. 11a and 11b, image M is a video image corresponding to the latest scan, obtained at the current scanning station. Image M shows the relative positions of various dental surfaces such as a tooth 430 in lingual view, flanked by adjacent teeth 431, 432. Suitable optical or image recognition means are applied to image M, which is first isolated in processing unit 230 by means of a suitable frame grabber, and a profile of interest, MP, is determined. Such a profile MP typically comprises an external edge of one or more of teeth 430, 431, 432 as seen from the vantage point of scanner 250, and thus typically comprises a fictitious line separating two zones that are optically different – the teeth and the background, for example. The profile MP is then

- 22 -

reproduced as an image in the viewfinder in its original relative position in image **M**. Then the processing unit **230** calculates the movement of the scanner required to move to the next scanning station, and applies this movement, in a virtual manner to the profile **MP**, repositioning the profile **MP** to position **MP'**, or at
5 last a part thereof, in the viewfinder, as illustrated in Fig. **11b**. (This is how the new position of cross-hairs **400** described above may in practice be calculated as well, for example.) The user then moves the scanner **250**, mimicking the virtual movement previously calculated, until the image seen by the viewfinder is brought into alignment with the repositioned profile **MP'**. Fig. **11b** shows image
10 **M'** obtained prior to full alignment – the scanner **250** having to be moved in the direction of arrow **450** until the profile **MP'** is superposed on part of the edges **MP''** of the teeth as seen via the viewfinder.

The guiding of the dental practitioner between the different scanning
15 stations has been described above in graphical terms. Optionally or alternatively, the guiding may take any suitable form. For example, oral commands may be provided, asking the practitioner to now move the scanner to the left 3mm and upwards 2mm, for example, using any suitable speech software operating on scanning station data inputs provided by the processing unit **230**. Alternatively,
20 non-oral audio commands may be provided, for example coded bells or beeps, the pattern and intensity thereof being capable of being interpreted by the user in terms of the required movement in a number of directions, for example.

Additionally or alternatively, non-graphical means may be used for guiding the user between scanning stations. For example, suitable LED's may be
25 provided in the viewfinder, or images of arrows, for example, for guiding the user in the required directions to the next scanning station.

Advantageously, the scanner **250** comprises an inertial system or a suitable tracking system, that is capable of determining a change of position and/or orientation thereof relative to a datum position/orientation. Thus, the
30 actual position/orientation of the scanner **250** can be checked automatically

- 23 -

against the desired position for the next scan, and any suitable means – audio and/or visual for example - may be used for guiding the user to the correct position based on the difference between the current position and the desired position. For example, a beep may be sounded the frequency of which increases
5 the closer the scanner 250 is to the desired position. Optionally, a second inertial or tracking system may be coupled to the head or jaws of the patient, so that any movement thereof may be compensated for.

Optionally, a series of indicia may be provided, each indicia in the series
10 corresponding to a different scanning station. The series of indicia may be displayed in a predetermined sequence, a next indicia being displayed after the intraoral cavity has been scanned at the previous scanning station with its corresponding indicia. Optionally, the next indicia may be displayed together with the current, i.e., the immediately preceding indicia. The indicia relating to
15 different said parameters are displayed in different colors one from another. Thus, these indicia help to identify which scanning station the user is at, and which is the next station, for example. The indicia may comprise a series of numbers (for example "1/4", "2/4", "3/4", "4/4") or symbols, for example.

20 In another aspect of the present invention, a computer readable medium is provided that embodies in a tangible manner a program executable for guiding the scanning of the intraoral cavity of a patient. The computer readable medium comprises:

(a) a first set of data representative of target parts of the intraoral cavity
25 that it is desired to have scanned;

(b) a second set of data representative of spatial relationships between a scanning device and said target parts of the intraoral cavity suitable for enabling said target parts to be scanned by said scanning device;

(c) means for displaying said second data.

- 24 -

The medium may comprise, for example, optical discs, magnetic discs, magnetic tapes, and so on.

According to some aspects of the invention, a method and system are provided for scanning, and for facilitating scanning of, an intraoral cavity. The target parts of the intraoral cavity that it is desired to have scanned are identified, and the spatial relationships between a scanning device and the target parts of the intraoral cavity suitable for enabling said target parts to be scanned by said scanning device, are also identified or otherwise determined. These relationships are then displayed, and the displayed relationships are used as a guide for scanning the intraoral cavity.

In the method claims that follow, alphanumeric characters and Roman numerals used to designate claim steps are provided for convenience only and do not imply any particular order of performing the steps.

Finally, it should be noted that the word "comprising" as used throughout the appended claims is to be interpreted to mean "including but not limited to".

While there has been shown and disclosed exemplary embodiments in accordance with the invention, it will be appreciated that many changes may be made therein without departing from the spirit of the invention.

CLAIMS:

1. Method for scanning an intraoral cavity or for facilitating scanning an intraoral cavity, comprising
 - (a) identifying target parts of the intraoral cavity that it is desired to have
5 scanned;
 - (b) identifying spatial relationships between a scanning device and said target parts of the intraoral cavity suitable for enabling said target parts to be scanned by said scanning device;
 - (c) displaying said relationships; and
10 (d) using said displayed relationships as a guide for scanning the intraoral cavity.
2. Method according to claim 1, further comprising the step of scanning said intraoral cavity in a manner substantially conforming to said relationships.
3. Method according to any one of claims 1 to 2, wherein said scanning
15 provides 3D data of said target parts for use in a predetermined procedure.
4. Method according to claim 3, wherein step (a) includes identifying ancillary parts in said intraoral cavity associated with said target parts, wherein 3D data of said ancillary parts is also required for use in said predetermined dental procedure.
- 20 5. Method according to any one of claims 1 to 4, wherein said step (b) comprises, for each said target part and each said ancillary part, determining for said scanning device a series of spatial parameters, each comprising a scanning station data sufficient for enabling said scanner to fully scan said corresponding target part or ancillary part.
- 25 6. Method according to claim 5, wherein said scanning station data of said series include a proximity and a relative orientation of said scanner with respect to said target part or ancillary part such as to enable said scanner to obtain 3D topographical data of an area of said target part or ancillary part.

- 26 -

7. Method according to any one of claims 5 to 6, wherein said series provide 3D topographical data for a corresponding plurality of said areas, wherein said spatial parameters of said series are determined such at least some adjacent said areas overlap one another.
- 5 8. Method according to any one of claims 5 to 7, wherein step (c) comprises displaying a nominal image comprising an image of at least a portion of an nominal intraoral cavity, comprising corresponding said target parts and said ancillary parts, and an image of a nominal scanner in a spatial relationship with respect to one another corresponding to the spatial relationship as
10 determined in step (b) for at least one parameter of said series of parameters.
9. Method according to claim 8, wherein a series of said nominal images are provided, each image in said series corresponding to a different one of said parameters of said series of parameters.
10. Method according to claim 9, wherein said series of images are displayed
15 in a predetermined sequence.
11. Method according to claim 8, wherein said nominal image comprises 3D attributes.
12. Method according to claim 9 wherein said nominal image may comprise said nominal intraoral cavity at any desired orientation with respect to a
20 predetermined coordinate system.
13. Method according to claim 9, wherein said coordinate system comprises an orthogonal Cartesian axes system.
14. Method according to claim 12, wherein said orientation corresponds to a real life view of the intraoral cavity of a patient from the vantage point of a
25 dental practitioner.
15. Method according to claim 9, wherein an audio and/or visual cue is provided for prompting the user to proceed to the next image.
16. Method according to any one of claims 5 to 7, wherein step (c) comprises displaying indicia on a viewfinder capable of providing a video image
30 of the field of view of said scanner, said indicia being indicative of a desired

- 27 -

position for associating a predetermined portion of said target parts or ancillary parts in a particular manner with respect therewith.

17. Method according to claim 16, wherein said indicia comprise an "+" or an "X".

5 18. Method according to claim 16, wherein said indicia comprise a symbol representative of a profile corresponding to an expected view of said target part or ancillary part in said viewfinder.

19. Method according to claim 18, wherein optical recognition methods are applied to said video image for providing a profile of the image, said symbol
10 comprising said profile.

20. Method according to claim 19, wherein said profile comprises a shaped line shaped as an outline of a tooth as seen by said viewfinder.

21. Method according to claim 18, wherein said symbol comprises a shaped line shaped as an outline of a tooth seen in any one of top view, buccal view or
15 lingual view.

22. Method according to claim 16, wherein a series of indicia are provided, each indicia in said series corresponding to a different one of said parameters of said series of parameters.

23. Method according to claim 22, wherein said series of indicia are
20 displayed in a predetermined sequence, a next indicia being displayed after the intraoral cavity has been scanned according to the previous said parameter and corresponding indicia.

24. Method according to claim 23 wherein said next indicia may be displayed together with the immediately preceding indicia.

25 25. Method according to claim 24, wherein indicia relating to different said parameters are displayed in different colors one from another.

26. Method according to any one of claims 3 to 25, wherein said procedure is a prosthodontic procedure for a crown with respect to a preparation, said target parts comprising said preparation, and said ancillary parts comprising at least a

- 28 -

portion of the teeth adjacent to said preparation and facing said preparation from the opposed jaw.

27. Method according to any one of claims 3 to 25, wherein said procedure is a prosthodontic procedure for a bridge with respect to a plurality of
5 preparations, said target parts comprising said preparations, and said ancillary parts comprising at least a portion of the teeth adjacent to a furthestmost distal preparation and adjacent a furthestmost mesial preparation, and at least a portion of the teeth facing said preparations from the opposed jaw.

28. Method according to any one of claims 3 to 25, wherein said procedure
10 is an orthodontic procedure, and said target parts comprise the full dentition of at least one jaw of said intraoral cavity.

29. Method according to any one of claims 1 to 28, wherein said method is computerized.

30. A computer readable medium that embodies in a tangible manner a
15 program executable for guiding the scanning of the intraoral cavity of a patient, comprising:

(a) a first set of data representative of target parts of the intraoral cavity that it is desired to have scanned;

(b) a second set of data representative of spatial relationships between a
20 scanning device and said target parts of the intraoral cavity suitable for enabling said target parts to be scanned by said scanning device.

31. Medium according to claim 30, further comprising means for enabling said second data to be displayed.

25 32. Medium according to claim 30, wherein said medium comprises any one of optical discs, magnetic discs, magnetic tapes, and so on.

33. A system for guiding the scanning of an intraoral cavity, comprising:
input module for identifying target parts of the intraoral cavity that it is
30 desired to have scanned;

- 29 -

processing module for generating spatial relationships between a scanning device and said target parts of the intraoral cavity suitable for enabling said target parts to be scanned by said scanning device;

display module for displaying said relationships.

- 5 34. System according to claim 33, further comprising a suitable scanner for scanning according to said relationships.

1/9

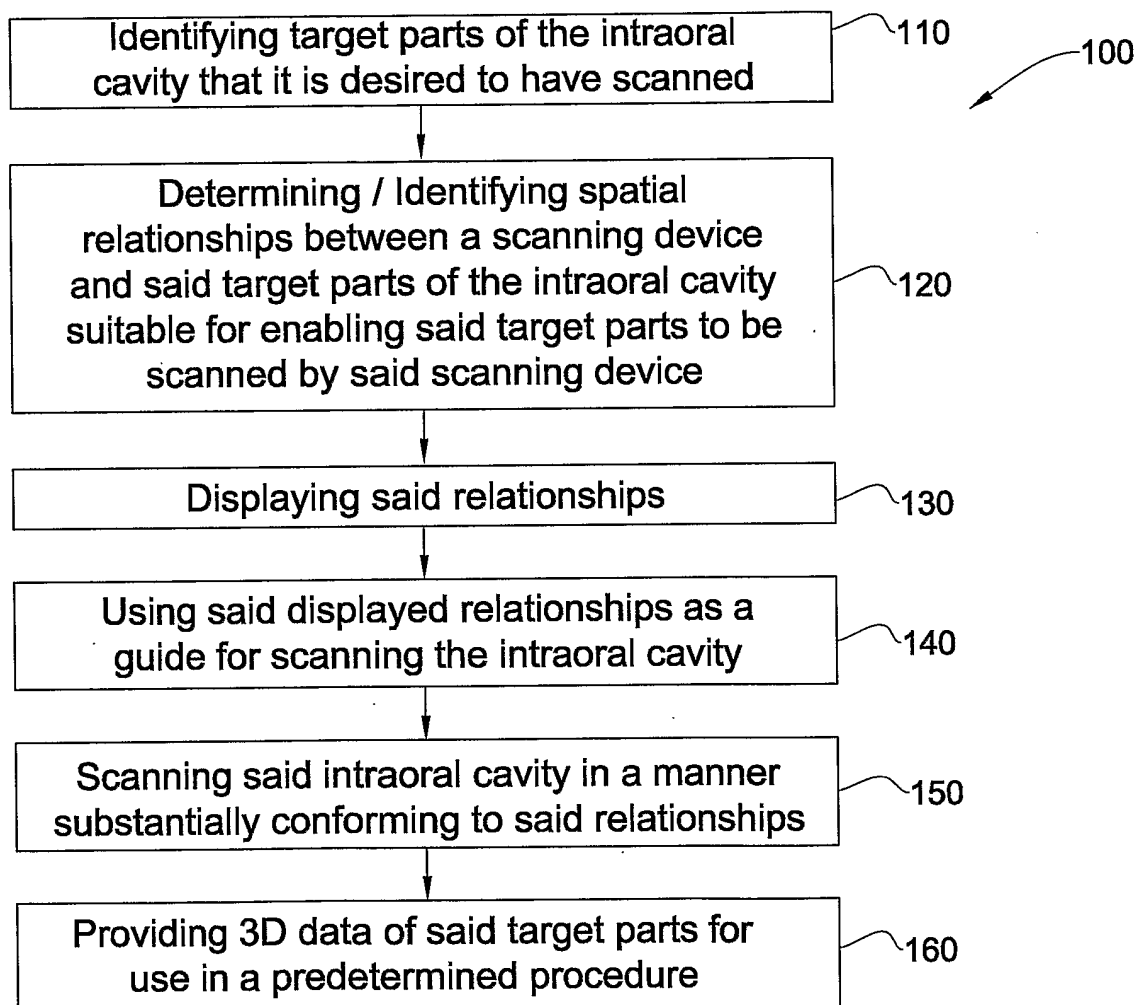


FIG. 1

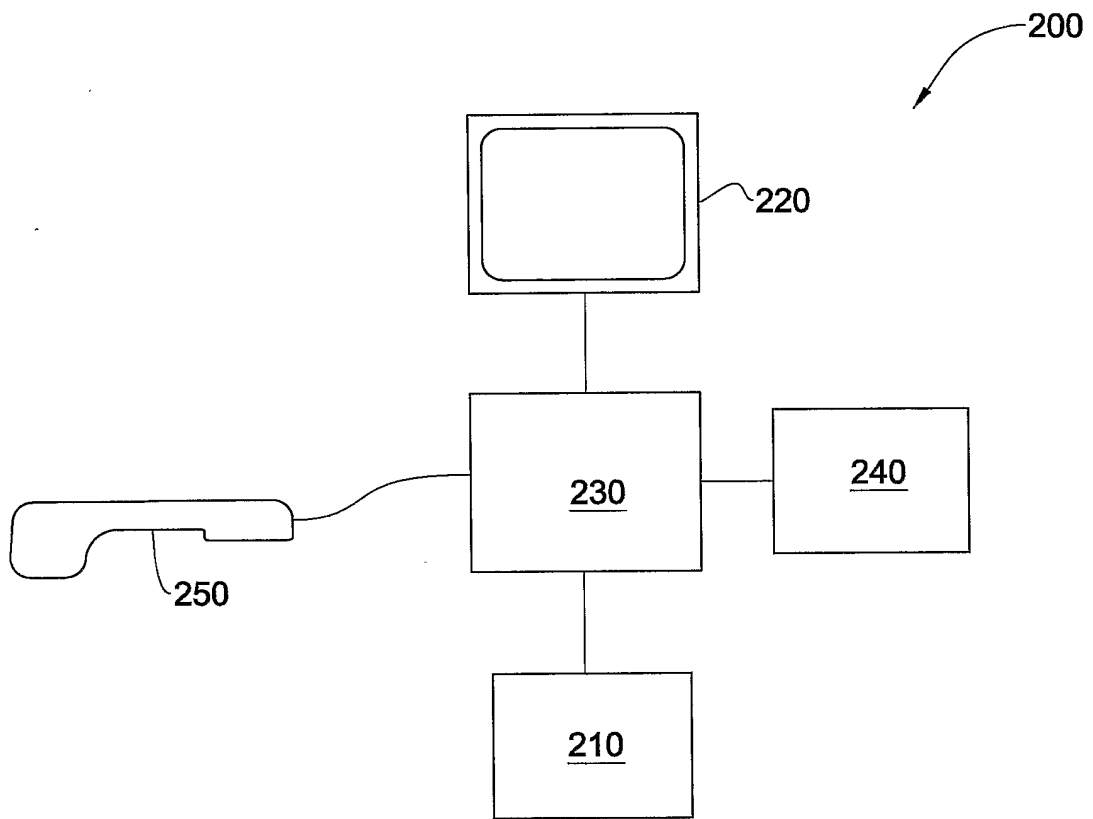


FIG. 2

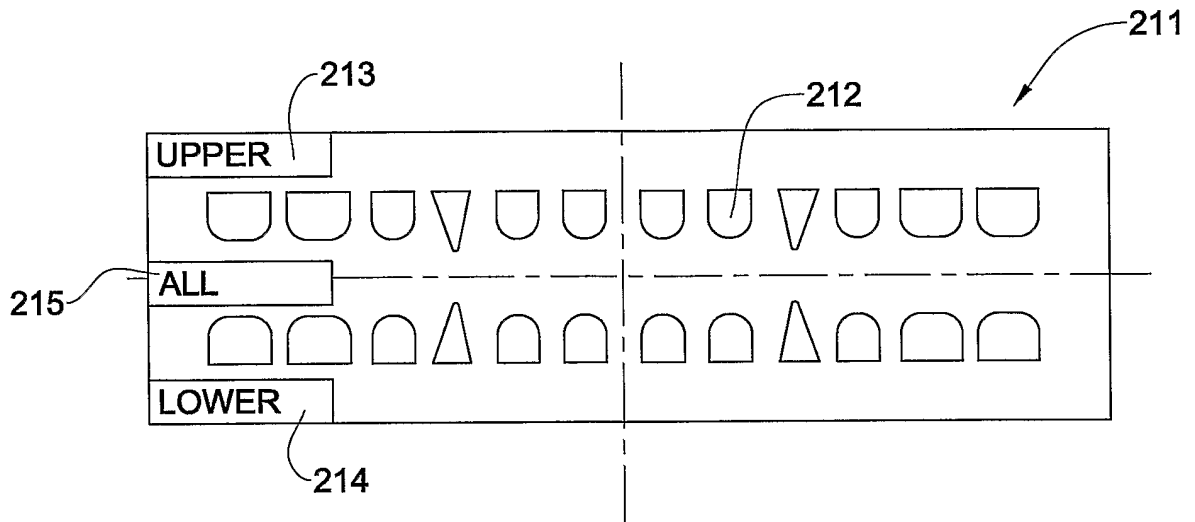


FIG. 3

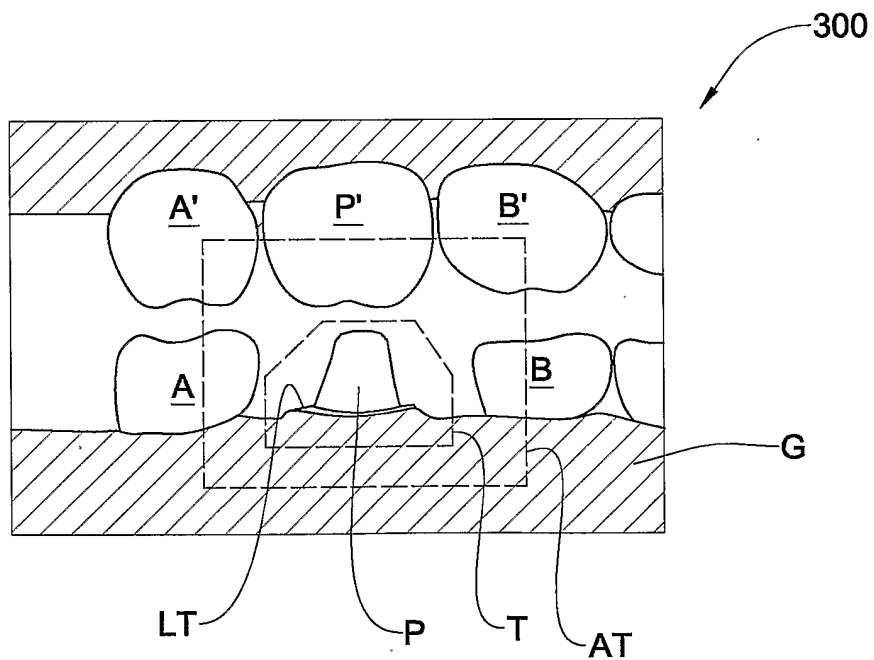


FIG. 4

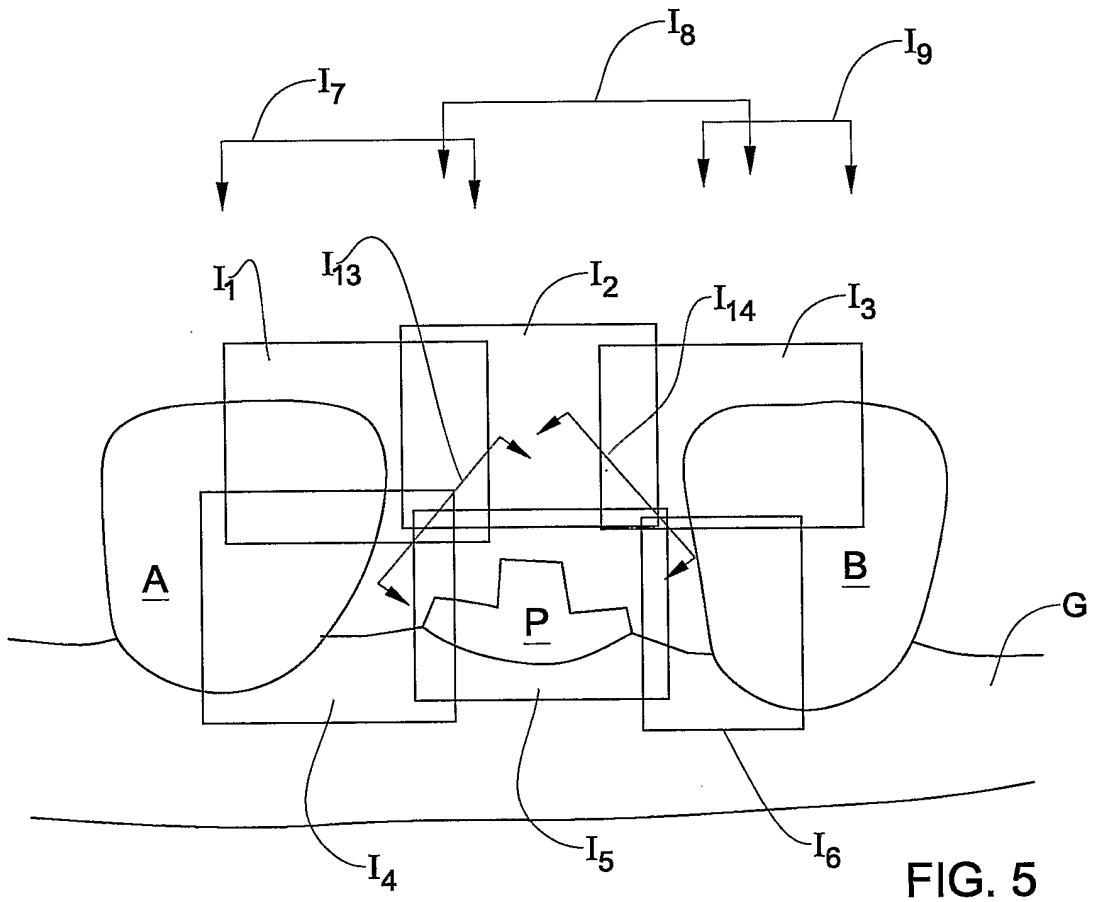


FIG. 5

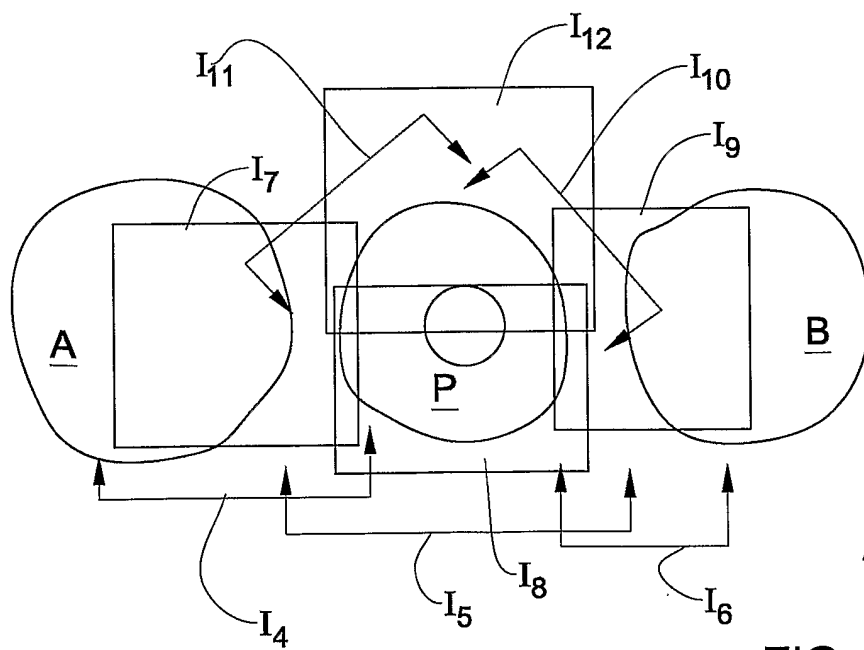


FIG. 6

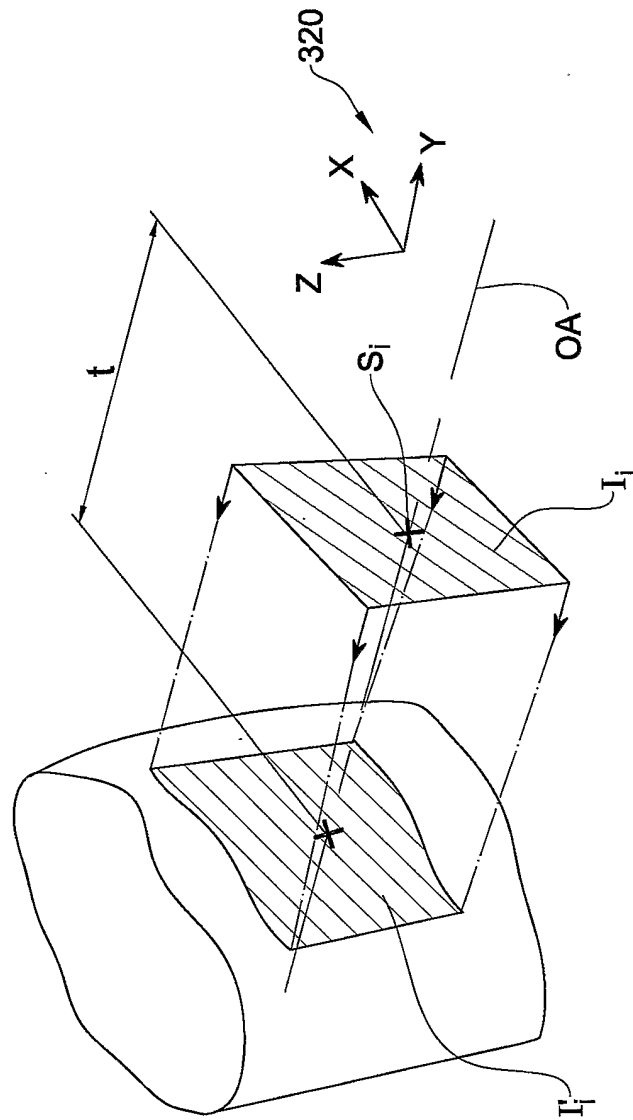


FIG. 7

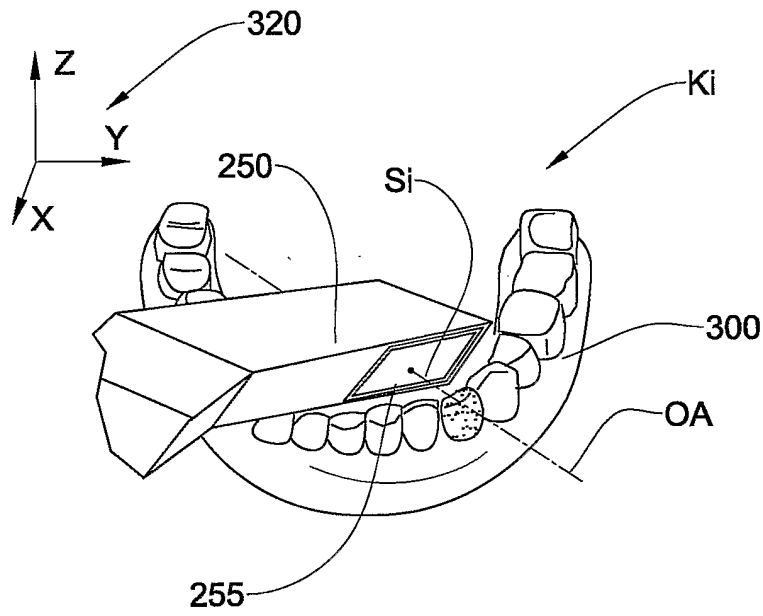


FIG. 8a

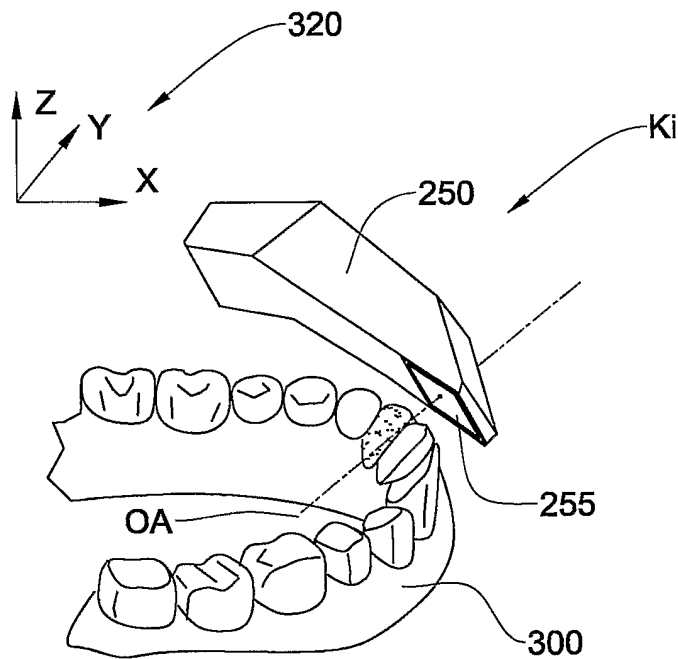


FIG. 8b

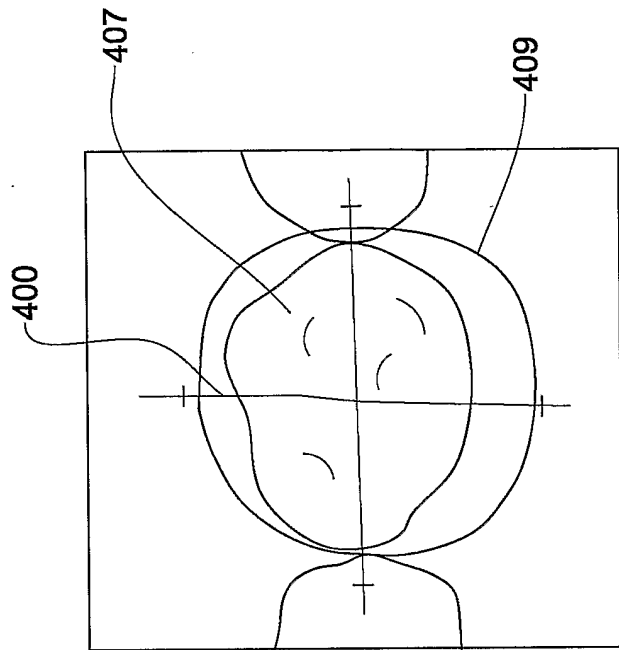


FIG. 9a

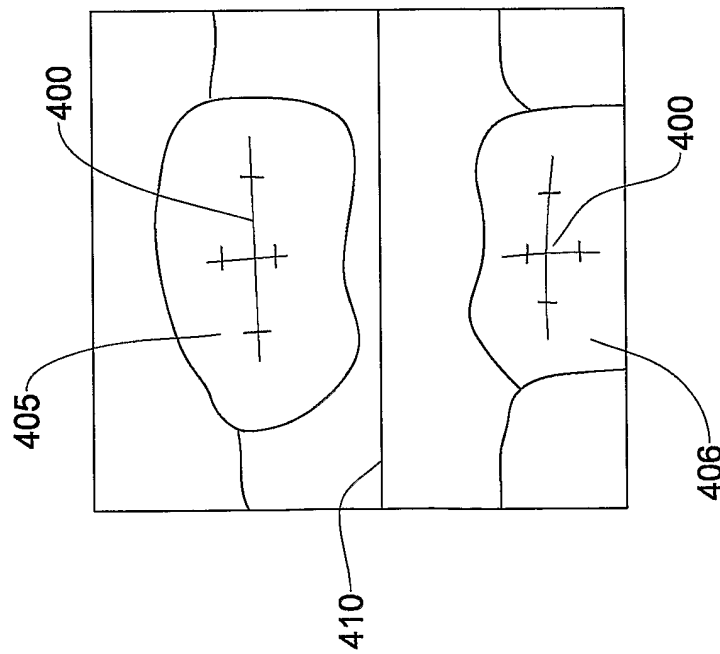


FIG. 9b

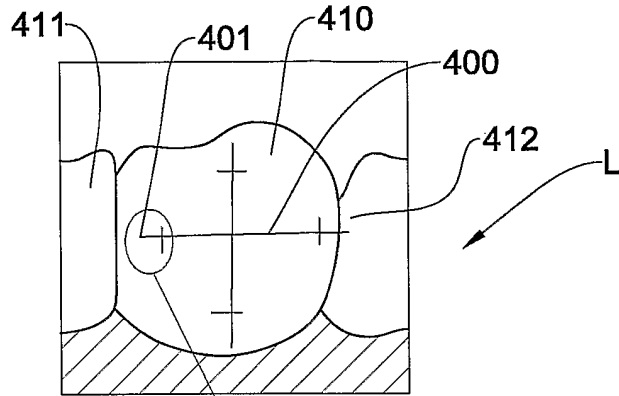


FIG. 10a

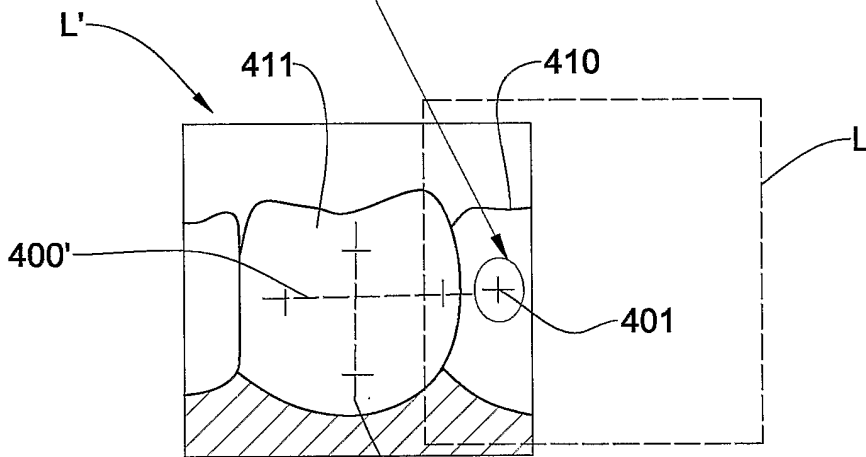


FIG. 10b

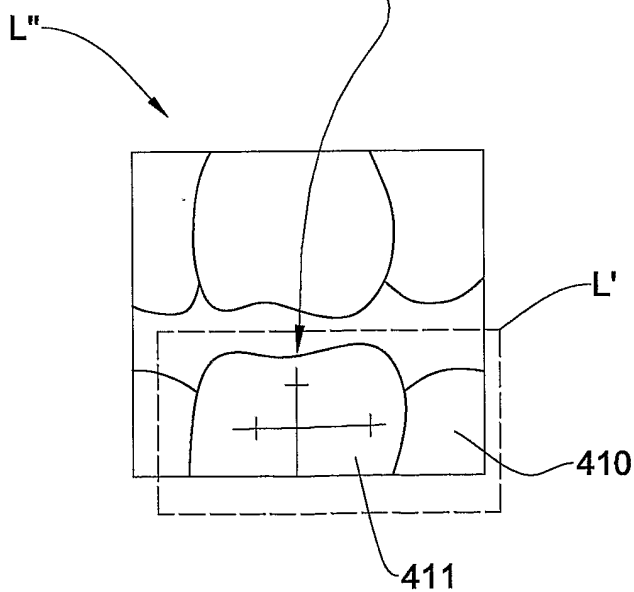


FIG. 10c

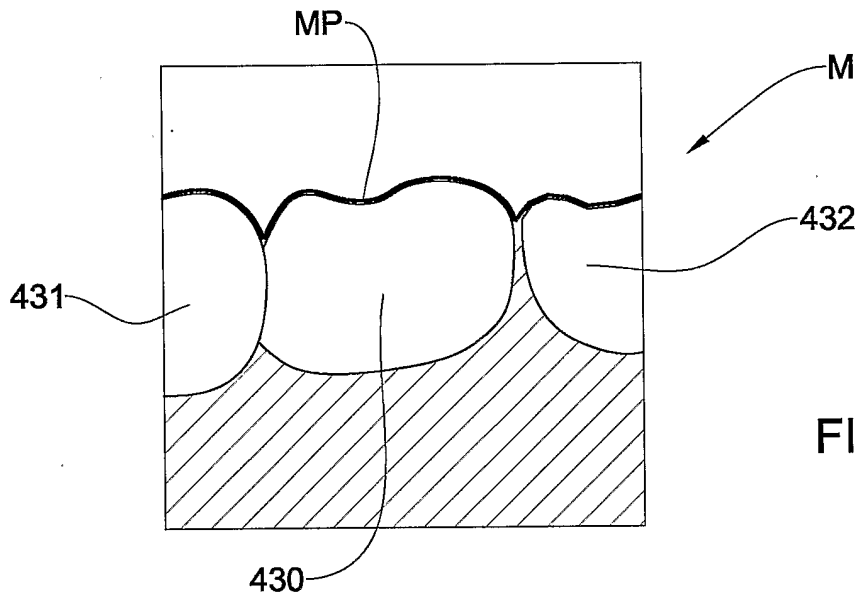


FIG. 11a

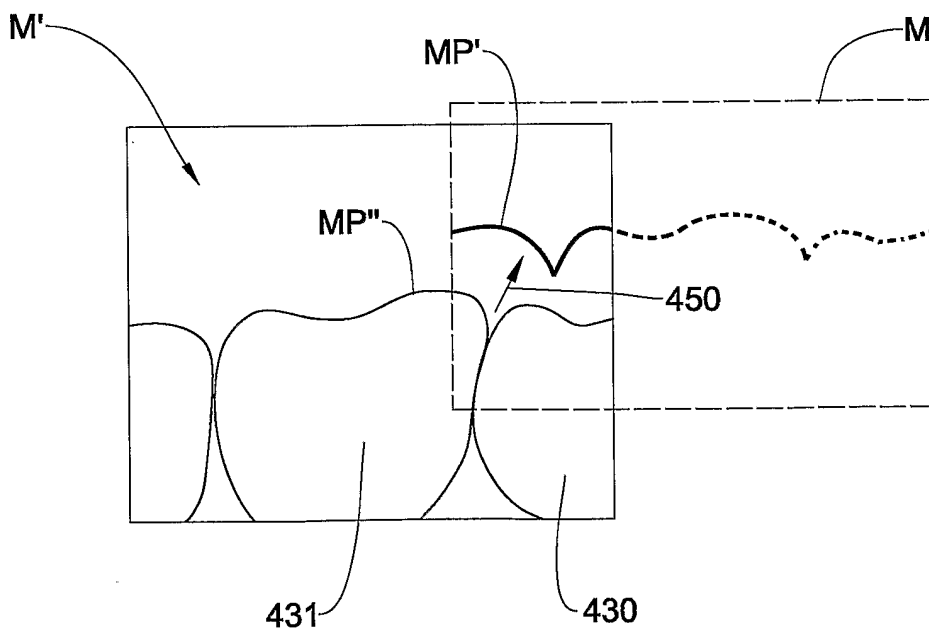


FIG. 11b