

(19)



(11)

EP 2 948 029 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
22.08.2018 Bulletin 2018/34

(21) Application number: **14705591.7**

(22) Date of filing: **22.01.2014**

(51) Int Cl.:
A47G 21/18 (2006.01) B65D 77/28 (2006.01)

(86) International application number:
PCT/NL2014/000004

(87) International publication number:
WO 2014/116104 (31.07.2014 Gazette 2014/31)

(54) **CONTAINER ASSEMBLY**

BEHÄLTERANORDNUNG

ENSEMBLE RÉCIPIENT

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **22.01.2013 NL 2010159**

(43) Date of publication of application:
02.12.2015 Bulletin 2015/49

(73) Proprietor: **Breek, Reinier
1862 DN Bergen (NH) (NL)**

(72) Inventor: **Breek, Reinier
1862 DN Bergen (NH) (NL)**

(74) Representative: **De Vries & Metman
Overschiestraat 180
1062 XK Amsterdam (NL)**

(56) References cited:
**JP-A- 2000 095 272 US-A- 5 071 019
US-A1- 2009 065 605**

EP 2 948 029 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

[0001] The present disclosure relates to packaging material and consumption utensils, in particular to (containers with) straws for drink containers.

BACKGROUND

[0002] Straws and sealed drink containers are commonly known. Generally, both are provided together as an assembly, wherein the straw is formed to puncture (a predetermined portion of) the container for obtaining access to its contents for consumption. Similar arrangements may be provided for other flowable media such as oils, powders etc. The resultant opened assembly may however leak and/or lead to spilling of the contents, which are undesired.

[0003] E.g., EP 1 362 800 discloses a straw adapted to be removably inserted into a press deformable container through a straw insert opening of the container, which is characterized by having a stopping part for stopping itself from being inserted through the straw insert opening, and an inlet hole at a position distant from the position of the stopping part by a distance substantially equal to the thickness of the container-forming material having the straw insert opening. The straw may comprise two tubes slidably fitted into each other so that the inlet hole can be opened and closed.

[0004] WO 03/049583 also discloses a straw having an inner tube provided with a bellows within an outer tube, one end of the inner tube being terminated as a valve, whereby the suction force from the user provides a pressure difference across the bellows, causing the bellows to move the valve with sufficient force to open. When the suction force ceases, the valve closes, and it remains closed, even when the liquid in the drinking container is pressurized with pressure.

[0005] US 2009/0065605 discloses an extensible straw for incorporation as an integral component of a disposable or collapsible beverage container, which has telescoping tubes extensible from the container, a screw cap and multiple seals preventing inadvertent leakage from the container whether the container is maintained upright or not.

[0006] Such multi-part and telescoping straws consume much material, are prone to malfunctioning and leaking, and they are relatively complex and expensive to manufacture. Also, the movable tube may become detached from the rest of the assembly, undoing the desired benefits.

[0007] Another strategy is provided in US 2006/0196895 (and WO 2005/092780), which relates generally to a sealable straw and ventable closure assembly which provides multiple dispensing techniques designed to be attached to the opening of a variety of known sealable containers and container closures. Here,

the straw is closed by folding the straw and anchoring or biasing the straw in/towards the folded state. This weakens and possibly damages the straw so that it may lead to leaking after all. Also, the corners of the fold tend to become sharp and thus unsuitable for young children. Further, the easy opening of the embodiment of Figs. 4 and 9 (pars. 81-86) causes a risk of accidental opening and subsequent leaking. The straw also causes easy leaking between the wall of the straw and the wall of the container.

[0008] A further known option is a cap over the free end (drinking end) of the straw, e.g. see Fig. 19 of US 2006/0196895, US 2009/0065605 and JP 2000-095272. Such cap is generally cumbersome to apply and it may fall off, inadvertently re-opening the straw so that it may leak.

[0009] Improvements are therefore desired.

SUMMARY

[0010] Inter alia view of the above, a device, a connector and an assembly according to the appended claims is provided herewith.

[0011] The assembly comprises a container for a fluid and the device. The container has a wall to be penetrated by the device.

[0012] The device is for dispensing fluid to or from the container for a fluid having a wall to be penetrated by the device. The device comprises a tube with a first end, a second end and a lumen, a connector, and a closure, and the device is configured to penetrate the wall of the container to transfer the fluid to or from the container through the tube: The closure and the first end of the tube are configured to open and sealingly close the tube reversibly. The connector is configured to be inserted into and/or through the wall of the container forming a seal between the tube and the container and attaching the device substantially irreversibly to the container, with the device penetrating the wall and the first end of the tube extending out of the container.

[0013] The tube facilitates accessing the contents of the container, e.g. for drinking a beverage contained in the container from the free first end of the tube. The second end of the tube may be sharpened, e.g. cut obliquely, to pierce the container wall. The closure prevents accidental leaking and/or spilling from the tube. The seal between the device and the container prevents leaking and/or spilling from an aperture in the wall through which the device extends. The substantially irreversible attachment of the device, in particular the connector thereof, i.e. detachment being only possible by application of significant force and/or (at least partial) destruction of the device and/or the container, prevents accidental disconnection of the device and the container, which could result in leaks and spilling. The latter aspect is particularly relevant for use of the device as a drinking straw for young children, as it withstands their tendency to play and withdraw straws from drink containers and thus cause spills.

[0014] Further, the connector may engage and at least partly close against a relatively firm portion of the container wall when that has a weakened portion for facilitating penetration by the device. This reduces chances of leaking along the tube due to a damaged weakened wall portion.

[0015] The connector may comprise a snapping arrangement for snap-fixing the device to, and in particular through, the container wall. Such snapping arrangement may comprise latches, barbs, flanges, etc., which may extend radially from the tube with respect to a direction of longitudinal extension of the tube. Such latches, barbs, flanges, may, but need not necessarily, fully encircle the tube; one or two opposite radial barbs may suffice. This reduces material consumption and facilitates manufacture, transport and storage etc.

[0016] The connector may comprise a screw thread for fixing the device to the container wall. The thread may have a varying thread pitch, a blind end and/or a gap towards the first end of the tube, such that the device may be screwed into and through the container wall, but cannot be screwed back out again.

[0017] The connector may comprise an at least partially conical body, in particular flaring out towards the first end of the tube, allowing tightening the connection with increasing insertion depth of the device into the container. The conical body may be provided with the aforementioned screw thread.

[0018] The connector may comprise a flange for abutting the container wall, to limit an insertion depth of the device into and/or through the container wall, and/or to provide the seal of the device to the container.

[0019] The tube may be insertable into the connector and attachable thereto, to be fixed to each other or such that the tube is movable within the connector over a restricted distance in a longitudinal direction of extension of the tube. This facilitates manufacture, transport and/or assembly of the device. Fixation increases robustness and reliability. Freedom of motion may facilitate closing the first end of the tube.

[0020] The closure comprises a plug that is insertable into the lumen of the tube to seal the tube and block fluid egress from it. This facilitates closing of the tube. A plug is generally easier to use for sealing an orifice such as the open end of a tube than a cap since a cap must fit around the tube whereas a plug may benefit from a rounded, tapered, conical and/or otherwise self-seeking shape. Further, a cap tends to be larger, to require more material and to be more difficult to manufacture than a plug that may be a solid body and/or comprise one or more deformable flanges. Also, a hollow tube tends to be more robust against outward forces than inward forces, whereas (relatively) significant forces against the tube wall may be required to provide a fluid-tight seal; a cap or a clamp having a such sealing inward force component is likely to deform and possibly buckle the tube which may result in losing the locking effect and leaking of the tube. A plug provides an outward force and assists main-

taining shape of the tube.

[0021] The closure and the connector are configured to open and sealingly close the connector reversibly with the closure. If the connector comprises no tube or if the first end of the tube is located within the connector and not extending out of it, the connector would provide an opening to the interior of the container and liquid may leak and/or be spilled from it. Such leaking and/or spilling from the connector may be prevented by closing the connector with the closure.

[0022] The closure may be attached to a portion of the connector, which facilitates manufacture and use of the device and prevents loss of the closure, which may itself be only a small part. The closure may be substantially rigidly attached to a portion of the connector, which provides a well defined shape and therewith provides or at least conveys a notion of stability and robustness.

[0023] At least two of the tube, the connector, and the closure may form an integral object, in particular being a unitary object. In particular, all three parts may form one integral, possibly unitary, object. This increases robustness and security of the device and it can facilitate manufacture of the integral portion. In case the connector and the closure form a unitary object, but separate from the tube, the separate objects may easily comprise different material properties, e.g. the tube being generally rigid and the closure and connector being generally elastic, so that they may close off and seal reliably against appropriate portions of the tube. E.g., the connector and closure may comprise or be of (silicone) rubber, whereas the tube comprises or is of polyethylene.

[0024] The first end of the tube may have a predetermined bending portion, e.g. harmonica section, and the tube and the closure may be arranged so that the tube must be bent at the bending portion to be closed by the closure. A bent tube reduces size (e.g. height) of an assembly of a container and the device. A harmonica section facilitates bending without folding and prevents protruding sharp objects. By bending a resilient tube the tube is urged towards the unbent state, which may be employed to urge the tube and the closure together for reliable closing. Further, a bent tube may clearly signal an open or closed state of the device.

[0025] In an embodiment, at least part of the tube, in particular the first end, has a longitudinal direction of extension out of and away from the connector portion in a first direction, and the closure extends in a direction for closing the tube that is substantially parallel to the direction of extension of the tube. Thus, the tube must make a U-turn to be closed, which can be readily done on purpose, but is hard to (un)do by accident, providing user friendliness and anti-leaking at the same time. A U-bent device also has a smaller volume.

[0026] In other aspects a device and a connector for a device disclosed herein are provided, the connector comprising a lumen, with an inner size, for sealingly receiving at least part of a correspondingly sized, with respect to its outer size, tube and comprising a plug that is insertable

into the lumen of the tube to seal the tube and block fluid egress from it. In an embodiment the plug protrudes from the connector.

[0027] Thus, an aspect is an assembly comprising a container for a fluid and a device as provided herein, the container having a wall to be penetrated by the device, possibly in a predetermined perforation portion such as foil section in a drink carton.

[0028] The assembly may comprise a sealed container comprising a fluid, in particular a beverage.

BRIEF DESCRIPTION OF THE DRAWINGS

[0029] The above-described aspects will hereafter be more explained with further details and benefits with reference to the drawings showing an embodiment of the invention by way of example.

Fig. 1 is a perspective view of an assembly comprising a container for a fluid and a device as disclosed herein in the form of a drinking straw;

Fig. 2 is a partial cross section view of an assembly comprising a container and a drinking straw device;

Fig. 3 is a side view of another embodiment of a device;

Fig. 4 is a partial side view of a further embodiment of a device;

Figs. 5A-5C are different views of a different embodiment of a device;

Fig. 6 is a partial cross section view of an assembly comprising a container and yet another drinking straw device;

Figs 7 and 8 are top and perspective views, respectively, of a unitary connector and closure assembly.

DETAILED DESCRIPTION OF EMBODIMENTS

[0030] It is noted that the drawings are schematic, not necessarily to scale and that details that are not required for understanding the present invention may have been omitted. The terms "upward", "downward", "below", "above", and the like relate to the embodiments as oriented in the drawings, unless otherwise specified. Further, elements that are at least substantially identical or that perform an at least substantially identical function are denoted by the same numeral, where useful increased by 100, 200, etc, and/or individualised with alphabetic suffices.

[0031] Fig. 1 is a perspective view of an assembly 1 comprising a container 3 and a drinking straw device 5, in inoperable configuration, e.g. ready for sale. The device 5 has a tube 7, a connector 9 and a closure 11. The shown container 3 is in the form of a brick-shape carton, having liquid tight walls defining an interior volume containing a beverage (not indicated), here having film-coated cardboard walls. The container has a penetration portion 4 with an opening in the cardboard wall but being sealed by a film for penetration by the tube 7.

[0032] Fig. 2 is a partial cross section view of an assembly 100 comprising a container 103 having a wall 113 coated with a film 114 on the interior side and a drinking straw device 105 attached by a connector 109 to the container 103 in operable configuration, i.e. the device 105 extends through the wall 113 of the container 103 with a first end 115 extending out of the container 103 and a second end 117 located within the container 103, so that fluid can be transferred to or from the interior volume V of the container 103 through a lumen 119 of the tube 105.

[0033] The tube 107 is cylindrical with a longitudinal direction of extension A. The second end 117 of the tube 107 is sharply pointed, for punctuating the wall 113 of the container 103 and inserting the device 105 through it 103. The connector 109 comprises a plurality of barbs 121 extending from the tube 107 generally radially with respect to the direction of extension A and a flange 123. The free ends 125 of the barbs 121 and the flange 123 are separated by a distance comparable to the thickness of the container wall 113, wherein the barbs 121 have an outwardly curved surface towards the flange 123. Thus, the device may be inserted into and through the container wall 113 until the flange 123 abuts the outside of the wall 113, and the barbs 121 snap outwards behind the wall 113 so that the device is fixed, at least in the direction of extension A, to the container wall 113 and cannot be removed from it without force and/or damage. The device 105 may also be rotationally fixed, which further reduces chances of leaking between the container wall 113 and the connector 109.

[0034] The closure 111 comprises a plug with flanges 127 encircling a main body 128 that is attached to the flange 123 by a connection in the form of a flexible beam 129, arranged so that the closure 111 can be inserted into the lumen 119 of the first end 115. The outer cross sectional shape of the closure 111 corresponds with the interior cross sectional shape of (the lumen 119 of) the tube 107 to provide a reliable seal (not shown). The flexible beam 129 may be provided with symbols, e.g. advertisement and/or brand indicia.

[0035] Fig. 3 is a side view of a straw device 205 generally comparable to the embodiments of Figs. 1-2. Here, however, the connector 209 comprises a generally round conical main body 231 with increasing diameter from the second end 217 towards the first end 215 of the tube 107 terminating on a flange 223 and outwardly provided with a screw thread 221 for attachment to the wall of a container (not shown). The screw thread 221 has an upper end 225 at a distance d from the flange 223, which may be comparable to the thickness of the container wall through which the device is to extend. Here, the upper end 225 of the screw thread 221 extends at a smaller angle to the flange 223 than the remainder of the screw thread 223 so that the connector may be screwed into and through the container wall, but once the upper end 225 has passed the container wall it does not extend towards the interior surface of the container wall at a noticeable angle, so that the upper end 225 does not en-

gage readily engage the container wall and the connector cannot readily be screwed back out of the wall again. The conical body 231 ensures an increasing deformation pressure against the container wall, so that a tight seal is provided between the connector and the container wall, preventing leakage there.

[0036] Instead of one screw thread 221, plural coaxial screw threads with more or less than 360 degrees turn may be provided, e.g. down to a general bayonet-like connection.

[0037] This embodiment 205 comprises a closure 211 in the form of a cap with a skirt wall 233 to be put over the first end 215 of the tube 207 for sealing that. The cap comprises an internal plug body 228 for insertion into the lumen of the tube 207 for easy closing and counteracting radially inwards forces by the cap onto the tube walls. The skirt wall 233 of the cap covers, in closed configuration, the very end of the tube 207, protecting it, e.g. to increase hygiene in the case of use as a drinking straw.

[0038] The first end 215 of the tube comprises a flexible section 235, here formed as a bellows, for easily bending the tube 207 without kinking or folding it. This increases user friendliness of the tube 207 and facilitates (arranging the tube 207 and cap 211 for) closing the tube 207 with the closure 211.

[0039] Fig. 4 is a side view of a detail of another embodiment 305 of a tube device, comprising a connector 309 with a main body 331 with varying diameter, here comprising a plurality of separate generally radially extending flanges 321 facilitating attachment of the device 205 into and through the container wall by simple straight insertion.

[0040] Figs. 5A and 5B are perspective (partial) views of a further embodiment of a device 405. Generally comparable to the embodiment Fig. 2, the connector 409 comprises barbs 421. Here, the barbs 421 extend somewhat tangential to the axis A of the tube 407, as shown in cross section view in Fig. 5C (see indications "VC" in Fig. 5B). This facilitates both straight insertion and insertion with a screwing motion through the container wall, the latter being found to be a natural movement for insertion, but not a straightforward motion for detachment, in particular not for children.

[0041] The connector 409 has a flange 423 which is relatively elongated in one lateral direction with respect to the tube axis A, and relatively narrow in a perpendicular direction, reducing bulk and material consumption of the device 405. On the flange 425 an upwardly tapering closure plug 428 is fixed, extending generally parallel to the tube axis A adjacent the plug 428 towards the first end 415 of the tube 407. The tubes first end 415 is provided with a bending portion 435, here a harmonica section, for bending the tube 407. The bending portion 435 is made so long and resilient that (the aperture of) the first end 415 can be arranged over the plug 428 as shown in Fig. 5B and is urged towards a sealed position. To facilitate closing the tube 407, the tube 407 and the connector 409 may be movable in a direction along A for small dis-

tance, e.g. about the height of the connector.

[0042] Fig 6 shows, similar to Fig. 2, an embodiment of a device 500, wherein a connector 509 on a tube 505 is provided with a flange 523 (like the device of Fig. 2), to engage the wall 513 of a container 503. The flange 523 is adhered to the wall 503. Here, an amount of adhesive 537 is provided around the tube 507. Suitable adhesion techniques are providing the container 503 and/or the bottom side of the flange 523 with an adhesive layer, possibly protected with a peel-off layer. A two-component adhesive, with a first component on the container 503 and a second component on (the connector 509 of) the device 505 forming an adhesive layer on contacting together are also conceivable and may provide a securer seal than an adhesive layer on a single side.

[0043] Fig. 7 shows an embodiment, generally similar to that of Figs. 2 and 3, of a connector 609 and a plug closure 611 with plug body 628 attached together as a unitary device by a connection in the form of a flexible beam 629, arranged so that the closure 611 can be inserted into a lumen 637 of the connector 609. Fig. 8 is a top view of the embodiment of Fig. 7 with the flexible beam 629 unbent. The outer cross sectional shape of the closure 611 corresponds with the interior cross sectional shape of (the lumen 637 of) the connector 609 to provide a reliable seal (not shown), further, the outer cross sectional shape of the closure 611 corresponds with the interior cross sectional shape of (the lumen of) a tube (not shown) to be inserted through the connector 609 to complete a device 605. Thus, the closure 611 may close either aperture (connector and/or tube) and thereby close the container. This may be facilitated by providing at least part of (the lumen 637 of) the connector 609 and/or the plug closure 611 tapered and/or deformable, e.g. being elastically deformable and/or having flanges, like the closure 111 of Fig. 2, providing a particularly reliable seal (not shown). A pull tab 639 facilitates removing the plug 611 when inserted in an aperture and opening the connector or tube, respectively.

[0044] The disclosure is not restricted to the above described embodiments which can be varied in a number of ways within the scope of the claims. For instance, instead of a connector as a relatively bulky portion distinct from the tube 407, the tube wall may be provided with local outward and/or inward diameter variations, similar to formation of a harmonica portion for a bending portion.

[0045] A flange may be larger, smaller, or absent altogether. It is noted that sealing foils in common containers tends to be flexible up to a degree that a seal may be readily provided against a generally straight and constant-diameter tube. Opposite oriented barbs and/or flanges (cf. Fig. 4 but without a varying-diameter core) may serve to fix the tube (at least in longitudinal direction of extension) to the container wall, a seal being provided by the container wall material. The device may comprise more than one bending portion. A connector portion, e.g. a flange, may be provided with an adhesive to attach and seal the device to the container, e.g. an adhesive with a

tear-off tab. Preferably the tab remains attached to the device so that loose trash is prevented.

[0046] The container may be shaped as a cup with a lid or a pouch, e.g. containing a soft drink or a fruit juice.

[0047] Elements and aspects discussed for or in relation with a particular embodiment may be suitably combined with elements and aspects of other embodiments, unless explicitly stated otherwise.

Claims

1. An assembly (1) comprising a container (3) for a fluid and a device (5), the container having a wall to be penetrated by the device, wherein the device (100, 200, 300, 400, 500) is for dispensing a fluid to or from the container (3, 103, 503), wherein the device comprises a tube (7, 107, 207, 307, 407, 507) with a first end (115, 215, 415), a second end (117, 217, 417) and a lumen (119, 419), a connector (109, 209, 309, 409, 509, 609), and a closure (11, 111, 211, 311, 411, 511, 611), and the device is configured to penetrate the wall of the container to transfer fluid to or from the container through the tube, wherein the closure and the first end of the tube are configured to open and sealingly close the tube reversibly, and wherein the connector is configured to be inserted into and/or through the wall of the container forming a seal between the tube and the container and attaching the device substantially irreversibly to the container, with the device penetrating the wall and the first end of the tube extending out of the container, the connector comprising a lumen, with an inner size, for sealingly receiving at least part of the correspondingly sized, with respect to its outer size, tube,
characterised in that the closure comprises a plug (611) that is insertable into the lumen (119, 419) of the tube and into the lumen (637) of the connector (609) to seal the tube or the connector, respectively, and block fluid egress from it.
2. The assembly of claim 1, wherein the connector comprises a snapping arrangement (121, 321) for snap-fixing the device to the container wall.
3. The assembly of any preceding claim, wherein the connector comprises a screw thread (221) for fixing the device to the container wall.
4. The assembly of any preceding claim, wherein the connector comprises a flange (123, 223, 423, 523, 623) for abutting the container wall.
5. The assembly of any preceding claim, wherein the tube is insertable into the connector and attachable thereto, to be fixed to each other or such that the tube is movable within the connector over a restricted

distance in a longitudinal direction of extension of the tube.

6. The assembly of any preceding claim, wherein the closure is attached to a portion of the connector.
7. The assembly of any preceding claim, wherein at least two of the tube, the connector, and the closure form an integral object.
8. The assembly of any preceding claim, wherein the first end of the tube has a predetermined bending portion (235, 435) and wherein the tube and the closure are arranged so that the tube must be bent at the bending portion to be closed by the closure.
9. The assembly of claim 8, wherein at least part of the tube has a longitudinal direction of extension out of and away from the connector portion in a first direction (A) and the closure extends in a direction for closing the tube that is substantially parallel to the direction of extension of the tube.
10. The assembly of any preceding claim, wherein at least one of the container and the device comprises an adhesive layer and/or a portion of the container comprises a first component and the connector comprises a second component of a two-component adhesive for forming an adhesive layer on contact of the first and second components.
11. The assembly of any preceding claim, wherein the container is a sealed container comprising a fluid, in particular a beverage.

Patentansprüche

1. Anordnung (1), die einen Behälter (3) für ein Fluid und eine Vorrichtung (5) aufweist, wobei der Behälter eine durch die Vorrichtung zu penetrierende Wand hat, wobei die Vorrichtung (100, 200, 300, 400, 500) zum Abgeben eines Fluids in den oder aus dem Behälter (3, 103, 503) dient, wobei die Vorrichtung eine Röhre (7, 107, 207, 307, 407, 507) mit einem ersten Ende (115, 215, 415), einem zweiten Ende (117, 217, 417) und einem Lumen (119, 419), einen Verbinder (109, 209, 309, 409, 509, 609) und einen Verschluss (11, 111, 211, 311, 411, 511, 611) aufweist und die Vorrichtung dafür konfiguriert ist, die Wand des Behälters zu penetrieren, um Fluid in den oder aus dem Behälter durch die Röhre zu überführen, wobei der Verschluss und das erste Ende der Röhre dafür konfiguriert sind, die Röhre reversibel zu öffnen und abdichtend zu verschließen, und wobei der Verbinder dafür konfiguriert ist, in und/oder durch die Wand des Behälters eingesetzt zu werden, was eine Dichtung zwischen der Röhre

und dem Behälter bildet und die Vorrichtung am Behälter im Wesentlichen irreversibel anbringt, wobei die Vorrichtung die Wand penetriert und sich das erste Ende der Röhre aus dem Behälter erstreckt, wobei der Verbinder ein Lumen mit einer Innengröße zum abdichtenden Aufnehmen mindestens eines Teils der im Hinblick auf seine Außengröße entsprechend bemessenen Röhre aufweist,

dadurch gekennzeichnet, dass der Verschluss einen Stopfen (611) aufweist, der in das Lumen (119, 419) der Röhre und in das Lumen (637) des Verbinders (609) einsetzbar ist, um die Röhre bzw. den Verbinder abzudichten und Fluidsaustritt daraus zu verhindern.

2. Anordnung nach Anspruch 1, wobei der Verbinder eine Schnappanordnung (121, 321) zur Schnappbefestigung der Vorrichtung an der Behälterwand aufweist.
3. Anordnung nach einem der vorstehenden Ansprüche, wobei der Verbinder ein Schraubengewinde (221) zum Befestigen der Vorrichtung an der Behälterwand hat.
4. Anordnung nach einem der vorstehenden Ansprüche, wobei der Verbinder einen Flansch (123, 223, 423, 523, 623) zum Anliegen an der Behälterwand hat.
5. Anordnung nach einem der vorstehenden Ansprüche, wobei die Röhre in den Verbinder einsetzbar und daran anbringbar ist, um aneinander befestigt zu sein, oder so dass die Röhre im Verbinder über eine begrenzte Distanz in Längsverlaufsrichtung der Röhre beweglich ist.
6. Anordnung nach einem der vorstehenden Ansprüche, wobei der Verschluss an einem Abschnitt des Verbinders angebracht ist.
7. Anordnung nach einem der vorstehenden Ansprüche, wobei mindestens zwei Bestandteile ausgewählt aus der Röhre, dem Verbinder und dem Verschluss einen einteiligen Gegenstand bilden.
8. Anordnung nach einem der vorstehenden Ansprüche, wobei das erste Ende der Röhre einen vorbestimmten Biegeabschnitt (235, 435) hat und wobei die Röhre und der Verschluss so angeordnet sind, dass die Röhre am Biegeabschnitt gebogen werden muss, um durch den Verschluss verschlossen zu werden.
9. Anordnung nach Anspruch 8, wobei mindestens ein Teil der Röhre eine Längsverlaufsrichtung aus dem Verbinderabschnitt und davon weg in einer ersten Richtung (A) hat und sich der Verschluss in einer





Richtung zum Verschließen der Röhre erstreckt, die im Wesentlichen parallel zur Verlaufsrichtung der Röhre ist.

10. Anordnung nach einem der vorstehenden Ansprüche, wobei der Behälter und/oder die Vorrichtung eine Klebeschicht aufweist und/oder ein Abschnitt des Behälters eine erste Komponente aufweist und der Verbinder eine zweite Komponente eines Zweikomponentenklebers zur Bildung einer Klebeschicht bei Kontakt der ersten und zweiten Komponente aufweist.
11. Anordnung nach einem der vorstehenden Ansprüche, wobei der Behälter ein abgedichteter Behälter mit einem Fluid, insbesondere einem Getränk, ist.

Revendications

1. Ensemble (1) comprenant un récipient (3) pour un fluide et un dispositif (5), le récipient ayant une paroi destinée à être pénétrée par le dispositif, dans lequel le dispositif (100, 200, 300, 400, 500) est prévu pour distribuer un fluide à ou depuis le récipient (3, 103, 503), dans lequel le dispositif comprend un tube (7, 107, 207, 307, 407, 507) avec une première extrémité (115, 215, 415), une seconde extrémité (117, 217, 417) et une lumière (119, 419), un connecteur (109, 209, 309, 409, 509, 609), et une fermeture (11, 111, 211, 311, 411, 511, 611), et le dispositif est configuré pour pénétrer dans la paroi du récipient afin de transférer le fluide vers ou depuis le récipient par le biais du tube, dans lequel la fermeture et la première extrémité du tube sont configurées pour ouvrir et fermer hermétiquement le tube de manière réversible, et dans lequel le connecteur est configuré pour être inséré dans et/ou à travers la paroi du récipient en formant un joint d'étanchéité entre le tube et le récipient et en fixant le dispositif de manière sensiblement irréversible sur le récipient, avec le dispositif qui pénètre dans la paroi et la première extrémité du tube qui s'étend hors du récipient, le connecteur comprenant une lumière, avec une taille interne, pour recevoir, de manière étanche, au moins une partie du tube dimensionné de manière correspondante par rapport à sa taille externe, **caractérisé en ce que** la fermeture comprend un bouchon (611) qui peut être inséré dans la lumière (119, 419) du tube et dans la lumière (637) du connecteur (609) pour sceller le tube ou le connecteur, respectivement, et empêcher que le fluide ne sorte de ce dernier.
2. Ensemble selon la revendication 1, dans lequel le connecteur comprend un agencement d'encliquetage (121, 321) pour fixer par encliquetage le dispositif sur la paroi de récipient.

3. Ensemble selon l'une quelconque des revendications précédentes, dans lequel le connecteur comprend un filetage de vis (221) pour fixer le dispositif sur la paroi de récipient. 5
4. Ensemble selon l'une quelconque des revendications précédentes, dans lequel le connecteur comprend une bride (123, 223, 423, 523, 623) pour venir en butée contre la paroi de récipient. 10
5. Ensemble selon l'une quelconque des revendications précédentes, dans lequel le tube peut être inséré dans le connecteur et fixé à ce dernier, pour qu'ils soient fixés entre eux ou de sorte que le tube est mobile à l'intérieur du connecteur sur une distance limitée dans une direction longitudinale d'extension du tube. 15
6. Ensemble selon l'une quelconque des revendications précédentes, dans lequel la fermeture est fixée à une partie du connecteur. 20
7. Ensemble selon l'une quelconque des revendications précédentes, dans lequel au moins deux parmi le tube, le connecteur et la fermeture forment un objet solidaire. 25
8. Ensemble selon l'une quelconque des revendications précédentes, dans lequel la première extrémité du tube a une partie de pliage prédéterminée (235, 435) et dans lequel le tube et la fermeture sont agencés de sorte que le tube doit être plié au niveau de la partie de pliage pour être fermé par la fermeture. 30
9. Ensemble selon la revendication 8, dans lequel au moins une partie du tube a une direction longitudinale d'extension hors de et à distance de la partie de connecteur dans une première direction (A) et la fermeture s'étend dans une direction pour fermer le tube qui est sensiblement parallèle à la direction d'extension du tube. 35
40
10. Ensemble selon l'une quelconque des revendications précédentes, dans lequel au moins l'un parmi le récipient et le dispositif comprend une couche adhésive et/ou une partie du récipient comprend un premier composant et le connecteur comprend un second composant d'un adhésif à deux composants pour former une couche adhésive suite au contact des premier et second composants. 45
50
11. Ensemble selon l'une quelconque des revendications précédentes, dans lequel le récipient est un récipient étanche comprenant un fluide, en particulier une boisson. 55

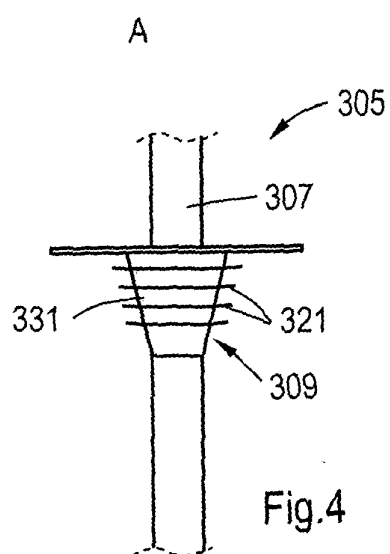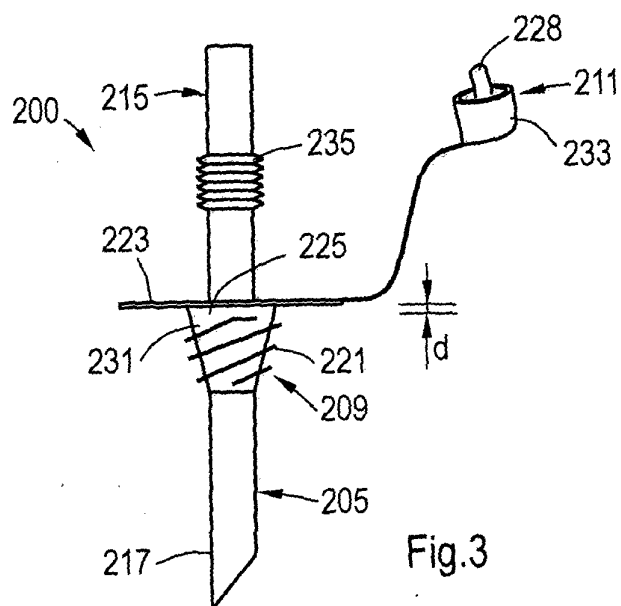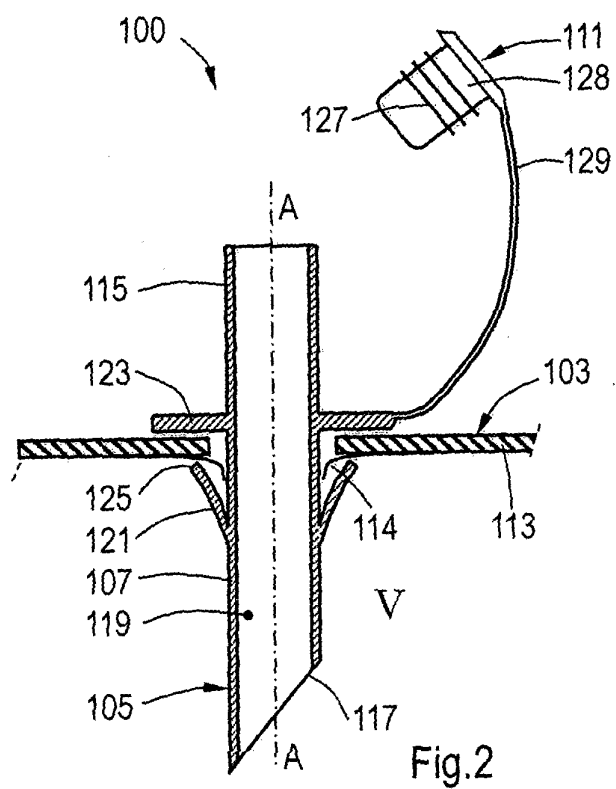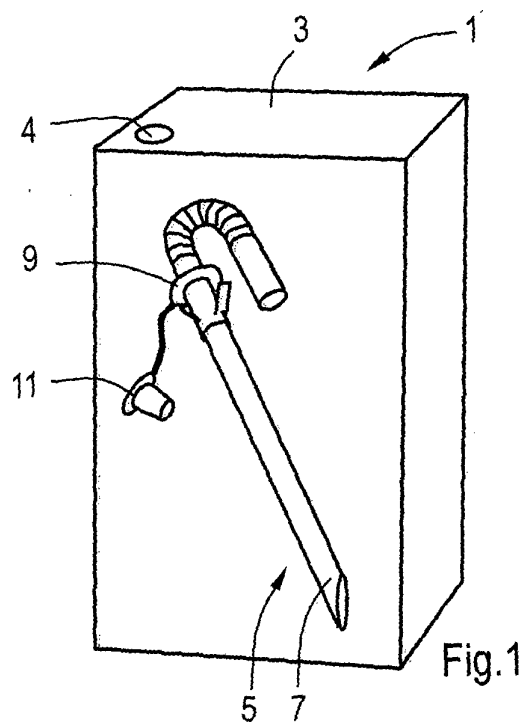

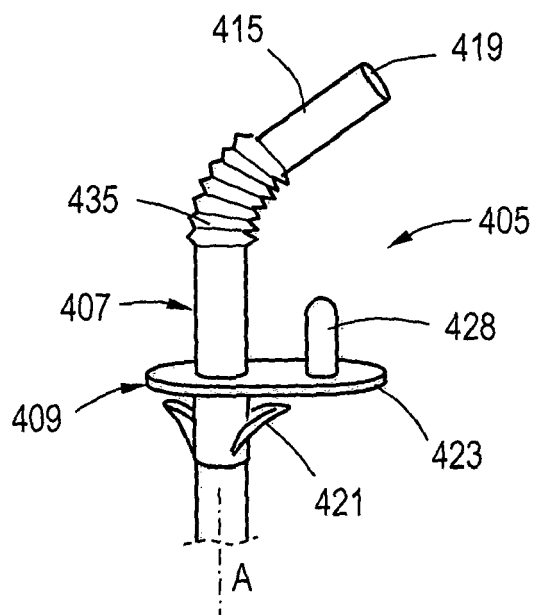


Fig. 5A

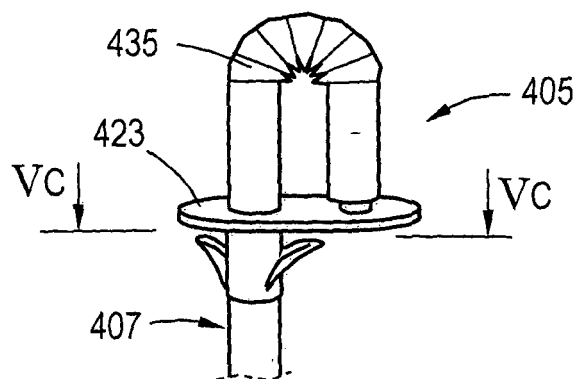


Fig. 5B




Fig. 5C

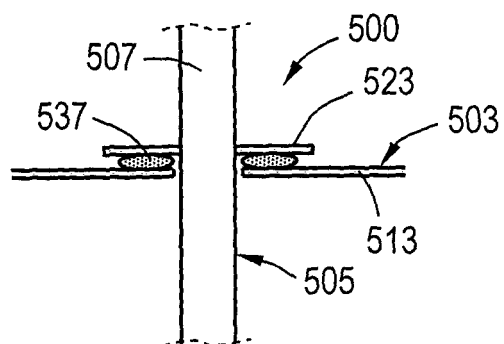


Fig. 6

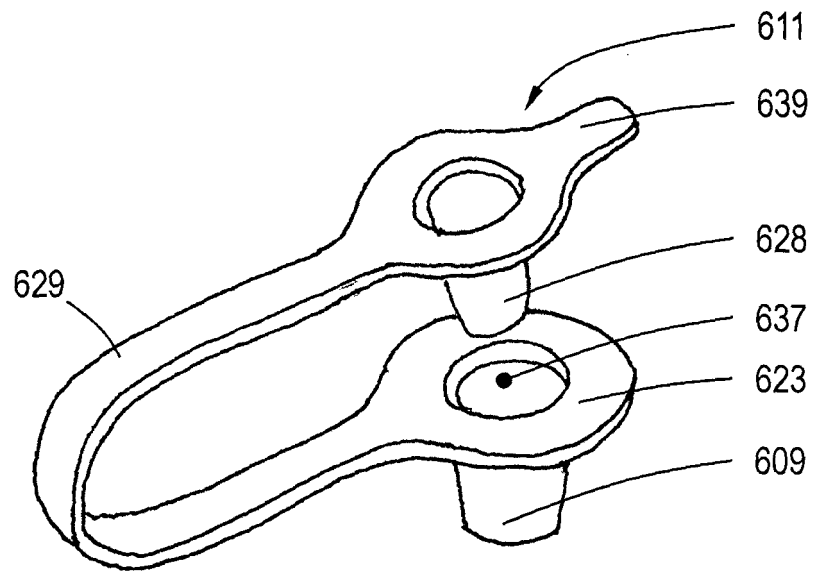


Fig.7

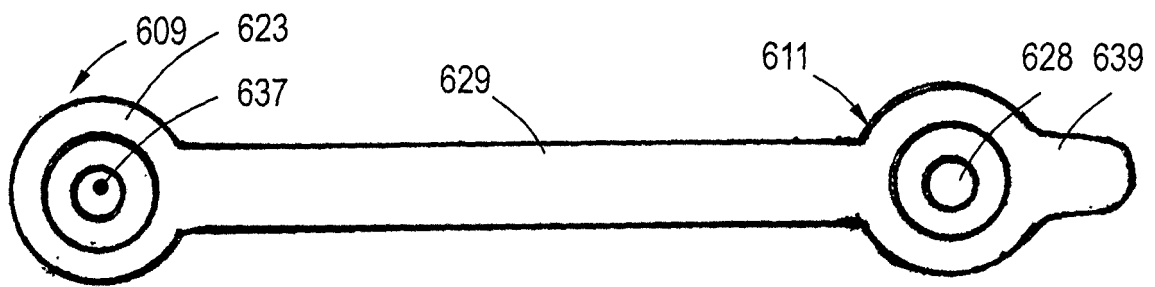


Fig.8

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1362800 A [0003]
- WO 03049583 A [0004]
- US 20090065605 A [0005] [0008]
- US 20060196895 A [0007] [0008]
- WO 2005092780 A [0007]
- JP 2000095272 A [0008]