

COMMONWEALTH OF AUSTRALIA
Patents Act 1952

DECLARATION IN SUPPORT OF AN APPLICATION FOR A PATENT OR
PATENT OF ADDITION

INSTRUCTIONS

In support of the Application made by

(a) Technology Applications Company Limited

(hereinafter called "applicant(s)" for a patent (b)

for an invention entitled

(c) Improved Method For Making Printed Circuits

I/~~We~~ (d)

Khaled Costandi Sifri

Kirch Strasse Number 1, P.O. Box 129,
Vaduz 9490, Liechtenstein.

do solemnly and sincerely declare as follows:

~~1. I am/We are the applicant(s)~~

(or, in the case of an application by a body corporate)

1. I am/~~We are~~ authorized to make this declaration on behalf of the applicant(s).

~~2. I am/We are the actual inventor(s) of the invention.~~

(or, where the applicant(s) is/are not the actual inventor(s))

2. (e)

John Michael Lowe
7 The Heights
Market Harborough
Leicester LE16 8BQ
United Kingdom

Joseph Devonport
16 Churchill Way
Upper Bruntingthorpe
Leicestershire
United Kingdom

~~is/are~~ are the actual inventor(s) of the invention and the facts upon which the applicant(s)
~~is/are~~ are entitled to make the application are as follows:—

(f)

The applicants are the assignees of the actual inventors

Declared at (g) Washington D.C.

Dated (h) 27 September 1990

(i)

Khaled C. Sifri (Director)

on behalf of Technology Applications

Company Limited

(a) Insert FULL names
of applicant(s)

(b) Insert "of addition"
if applicable

(c) Insert TITLE
of invention

(d) Insert FULL name
and address(es) of
declarant(s) (See
Note 1)

(e) Insert FULL names
and addresses of
Actual inventor(s)

(f) Reite manner in
which applicant(s)
derive(s) title from
actual inventor(s)
(See Note 2)

(g) Insert PLACE
of signing

(h) the latest DATE
of signing

(i) Signature(s)
of declarant(s)

NOTE
No legalization or
other witness
required

TO: The Commissioner of Patents

(12) PATENT ABRIDGMENT (11) Document No. AU-B-48250/90
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 631595

(54) Title
IMPROVED METHOD FOR MAKING PRINTED CIRCUITS

International Patent Classification(s)
(51)⁵ H05K 003/46

(21) Application No. : 48250/90

(22) Application Date : 22.12.89

(87) PCT Publication Number : WO90/07858

(30) Priority Data

(31) Number	(32) Date	(33) Country
8830251	24.12.88	GB UNITED KINGDOM
8928563	18.12.89	GB UNITED KINGDOM

(43) Publication Date : 01.08.90

(44) Publication Date of Accepted Application : 03.12.92

(71) Applicant(s)
TECHNOLOGY APPLICATIONS COMPANY LIMITED

(72) Inventor(s)
JOHN MICHAEL LOWE; JOSEPH DEVONPORT

(74) Attorney or Agent
WATERMARK PATENT & TRADEMARK ATTORNEYS, Locked Bag 5, HAWTHORN VIC 3122

(56) Prior Art Documents
GB 2181303
GB 2078448
EP 100144

(57) Claim

1. A method of producing a contact pad for a printed-circuit board characterised by the steps of:

(a) printing a pattern of the contact pad in a conductive ink in a desired location on the printed-circuit board;

(b) curing the conductive ink;

(c) printing the pattern in a carbon ink over the cured conductive ink; and

(d) curing the carbon ink.

3. A method of manufacturing circuit boards by applying a layer in a desired pattern to a substrate for a printed circuit, the layer being such that a number of identical or substantially identical boards are printed on the substrate and subsequently separated, the boards being positioned such that the same pattern may be applied to the substrate when the substrate is presented to a pattern applying

portion of a coating apparatus in any of a number of orientations each separated from the next by a fixed angle of rotation about an axis at right angles to the substrate at a centre of the substrate in one such orientation, the method comprising presenting the substrate to the pattern applying portion of the coating apparatus and applying a first coating in the desired pattern to the substrate, relatively rotating the substrate and pattern applying portion through said fixed angle (or a multiple thereof other than 360°) so that the substrate and pattern applying portion are again in register and thereafter applying a second coating in the desired pattern to the substrate.

11. A printed circuit on a substrate comprising at least one set of electrical conductors carried on a surface of the substrate, a layer of an insulating polymer applied on a portion of said surface and bridging a first electrical conductor, a bridging electrical conductor carried on the surface of said bridging layer of insulating polymer so that it is insulated from said first electrical conductor but in electrical contact with at least a second electrical conductor and a third electrical conductor at opposite sides of said first electrical conductor, resistors formed by depositing a controlled amount of resistive ink and capacitors produced by printing conductive layers separated by insulating layers.

631595

42250/90

**PCT**

**ANNOUNCEMENT OF THE LATER PUBLICATION
OF INTERNATIONAL SEARCH REPORTS**

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : H05K 3/46	A3	(11) International Publication Number: WO 90/07858 (43) International Publication Date: 12 July 1990 (12.07.90)
(21) International Application Number: PCT/GB89/01536 (22) International Filing Date: 22 December 1989 (22.12.89) (30) Priority data: 8830251.8 24 December 1988 (24.12.88) GB 8928563.9 18 December 1989 (18.12.89) GB (71) Applicant (for all designated States except US): TECHNOLOGY APPLICATIONS COMPANY LIMITED [GB/GB]; 24 Ridgeway Street, Douglas, Isle of Man (GB). (72) Inventors; and (75) Inventors/Applicants (for US only) : LOWE, John, Michael [GB/GB]; 7 The Heights, Market Harborough, Leicester LE16 8BQ (GB). DEVONPORT, Joseph [GB/GB]; 16 Churchill Way, Upper Bruntingthorpe, Leicestershire LE17 5QX (GB).		(74) Agent: GILDING, Martin; Eric Potter & Clarkson, 14 Oxford Street, Nottingham NG1 5BP (GB). (81) Designated States: AT (European patent), AU, BE (European patent), BR, CH (European patent), DE (European patent), DK, ES (European patent), FI, FR (European patent), GB (European patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), SE (European patent), SU, US. Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> (88) Date of publication of the international search report: 9 August 1990 (09.08.90)
(54) Title: IMPROVED METHOD FOR MAKING PRINTED CIRCUITS (57) Abstract Printed circuits are produced by screen printing or the like to deposit conductors, resistors, capacitors and insulators. Crossover connections are made by covering the conducting portions to be crossed with an insulating material that serves as a base for a printed crossing conductor. The equivalent of multilayer boards can be achieved by printing repeated layers of conductors, components and insulators on the same side of the board, or by printing on two sides of a board. Interconnection between adjacent layers can be made as a part of the printing process. A method of making a printed circuit board comprises applying a first and second coating in a desired pattern to a substrate, the substrate (12) being disposed in a different relationship to coating apparatus used in applying a second coating from the relationship in which it is disposed in applying the first coating. Preferably a number of identical boards are printed on a substrate (12) from which they are subsequently separated. The individual boards are positioned such that the same pattern may be applied when the substrate (12) is presented to coating means in any of a number of orientations each separated from the next by a fixed angle of rotation about an axis (A) at right angles to the substrate (12), the first coating being applied in one such orientation and the second after the screen and substrate respectively have been rotated in opposite directions, (S, B) each through 90°.		

- 1 -

IMPROVED METHOD FOR MAKING PRINTED CIRCUITS

BACKGROUND OF THE INVENTION

This invention is related to printed circuits for use in electrical and electronic equipment. In particular, it is an improved method of making printed-circuit boards and of producing printed circuits on surfaces other than conventional printed-circuit boards. This invention is also concerned with making printed circuits and is especially concerned with a method of making a printed circuit in which a layer is applied in a desired pattern to a substrate.

An element that is common to almost all electronic equipment is the printed circuit, typically in the form of a printed-circuit board (PCB). A PCB is generally made by laminating copper foil to a board. A desired pattern that includes conductors in the plane of at least one surface of the board is placed upon the board, and holes are drilled or punched for the mounting of components. This pattern is typically realized by placing a photosensitive resist on the board, exposing a photograph of the desired pattern on the resist, and developing the resist to produce a protective coating over the pattern. The remainder of

- 2 -

the resist is treated to remove undeveloped resist from portions where it is desired to remove the copper. The board is then treated with a process that removes the exposed copper. When the remaining resist is then removed, the desired pattern remains in the copper. Mounting holes for components are drilled or punched at desired locations somewhere in the course of this process, either before or after the removal step.

The materials most commonly used for PCBs are either polymerized epoxy materials containing glass fibers or paper bound by impregnated synthetic resins such as phenolic materials. The latter group is often referred to generically as synthetic-resin-bonded paper (SRBP). Boards made of either of these types of materials are clad with copper on one side or both sides, with the heat and pressure of the cladding or laminating process helping to cure the resin. The material cost of an SRBP PCB is typically about half as much as that of an epoxy fiberglass board of the same surface area, so there is a potential cost advantage when the SRBP board can be used. There are various bases for the selection between epoxy fiberglass and SRBP material. For example, the epoxy fiberglass boards are generally higher in strength and are preferred for use in equipment that may be subject to vibration.

A particular problem of circuit design that leads to complication in PCBs is the fact that not all electronic circuits can be made with their connections in a single plane. It is sometimes necessary to make bridging connections between different portions of a circuit. A considerable amount of ingenuity goes into the design and layout of PCBs to minimize such bridging connections. However, sometimes it is impossible to avoid them. In such a case, it is possible to solder

- 3 -

jumper wires between the portions of the circuit that are to be connected. This is especially undesirable for long runs, and it is better avoided even for short runs. A better solution is to use PCBs that have more than one conducting layer. The simplest of these is a two-sided PCB. This is a board that has copper laminated to both sides. Separate patterns are etched on the two sides to effect the desired circuit layout and cross-connections. However, in order to make such cross-connections, and to complete the connection between the two sides of the board, it is normally necessary to use epoxy fiberglass because of the necessity of plating holes through the board to connect the top layer to the bottom layer. Holes that are drilled in an SRBP board are adequate to support the leads of components that are placed in the board for soldering, but they are not normally clean enough when drilled or punched to permit satisfactory electroplating of connections between layers of the board. There is thus a long-felt need in the PCB industry for a way of making PCBs with crossover connections on single-sided SRBP boards without using soldered jumper wires.

The same considerations apply equally as much to boards having more than two layers. These boards, referred to as multilayer boards, are often used in more complicated circuits where one set of bridging connections is not enough. As with the two-sided board, it is normally necessary to use epoxy fiberglass for such PCBs. It can be seen that the result of a need for crossed connections in the typical etched copper PCB leads to an increased cost because of the need for epoxy fiberglass in the PCB instead of the less-expensive SRBP boards.

The problems just described become extreme in the

SUBSTITUTE SHEET

- 4 -

case of PCBs for keyboards. A keyboard for a typewriter, computer or the like typically generates an electrical signal when a key is depressed to make an electrical contact or an inductive or capacitive coupling. Such a coupling is made directly or indirectly between two separated conductors on the board or on a flexible plastic membrane that is spaced apart from the board and makes a conductive or field contact when pressed toward the board. When the keyboard is the typical typewriter or computer keyboard, it is impossible or nearly impossible to avoid crossed connections. The physical size of the hands of an operator also sets a limit to the minimum size of a PCB for a keyboard, since it is necessary to place a keyboard switch on the PCB at a location directly beneath the key to be depressed. As a result, the typical PCB for a keyboard is of the order of ten to eighteen inches by four to seven inches (25-45 cm. by 10-18 cm.). This size requirement has caused the PCB to become a significant part of the cost of a typewriter or computer keyboard. It is not normally possible to use an SRBP PCB because of the need for crossovers and the attendant plated connecting holes. The result is a relatively expensive epoxy fiberglass PCB, laminated and etched on both sides. This cost could be greatly reduced if it were possible to use an SRBP board that contained a circuit on only one side.

A second problem in the manufacture of PCBs for keyboards is the fact that keyboards either have pairs of exposed electrical conductors that are bridged by another conductor or coupled capacitively or inductively to make an electrical connection when a key is depressed, or else have flexible membranes that couple to the board when pressed. It is necessary to apply some form of protection to the exposed electrical

SUBSTITUTE SHEET

conductor so as to minimize the buildup of corrosion that would interfere with the making of the electrical connection. This is most commonly done by etching a copper pattern of interlaced combs, parallel conductors or the like and plating gold to the combs to provide a contact surface that is conductive electrically and that is not readily corroded by exposure to the atmosphere. Gold may be plated to the copper either by electroplating or by electroless plating. Either of these represents an additional element that contributes to the cost of preparing a PCB for a keyboard.

The usual intended use of a PCB is to serve as a mount for components such as resistors, capacitors, diodes and transistors. Any of these components is typically inserted by placing its leads into holes in the PCB which is then passed through a wave-soldering process to attach the components physically and electrically to the PCB. During the process of manufacturing the PCB, the board is typically coated in part with an organic polymer solder resist to prevent solder from adhering to the covered regions. If the PCB is one designed for a keyboard, the resist is typically deposited so as to cover conductors on the keyboard surface but is masked to leave the comb or other keyboard switches exposed for operation.

A use that is analogous to that of PCBs is the manufacture of electrical cables or the like by depositing conducting material on flexible plastics such as mylar. This is often done by some form of printing process such as screen printing. Most, if not all, of the materials, typically plastics, that are used for flexible cables or flexible flat conductors are not adapted for wave-soldering, and it is therefore necessary to make compression connections or the like at the ends of the cable or flat conductor. As a

- 6 -

result, there is no way to attach resistors or capacitors to flexible material, and a rigid PCB is therefore used with the flexible material to serve as a component mount.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an alternative method of making electrical interconnections.

It is a further object of the present invention to provide a better way of making printed circuits.

It is a further object of the present invention to provide a better way of making printed-circuit boards..

It is a further object of the present invention to provide a method of making crossed electrical connections on a single side of printed-circuit board.

It is a further object of the present invention to provide a method of producing resistors by a printing process on the printed-circuit board.

It is a further object of the present invention to provide a method of producing capacitors by a printing process on a printed-circuit board.

It is a further object of the present invention to provide a method of producing a printed circuit on a flexible substrate.

It is a further object of the present invention to produce a printed circuit including resistors and capacitors on a substantially planar solid surface.

It is a further object of the present invention to produce a printed circuit including resistors and capacitors on a curved surface.

It is a further object of the present invention to enable the use of synthetic-resin-bonded paper printed-circuit boards by effecting multilayer printing on one side of the board.

- 7 -

Other objects will become apparent in the course of a detailed description of the invention.

Printed circuits are produced by screen printing or the like to deposit conductors, resistors, capacitors and insulators. Crossover connections are made by covering the conducting portions to be crossed with an insulating material that serves as a base for a printed crossing conductor. Exposed conductors, as for keyboards and compression connections, are protected from the development of high-resistance corrosion products by printing or overprinting them with an ink that deposits a carbon layer. The method permits the use of rigid printed-circuit boards having crossed connections without requiring the use of a two-sided board. The equivalent of multilayer boards can be achieved by printing repeated layers of conductors, components and insulators on the same side of the board, or by printing on two sides of a board. Interconnection between adjacent layers can be made as a part of the printing process. Resistors can be printed by screening or otherwise depositing a controlled amount of a resistive ink. Capacitors can be produced by printing conductive layers separated by insulating layers. The process may produce printed-circuit boards containing resistors and capacitors without the necessity for inserting and wave-soldering components. If such a board is to contain components in addition to those printed by the process of the present invention, a printed carbon layer can be used as a solder resist to protect printed conductors during the wave-soldering process, and to protect exposed contacts, as for keyboards, during wave-soldering and in use. The process also permits the printing of a conducting layer as a shield against radio-frequency interference or as a ground plane to

SUBSTITUTE SHEET

- 8 -

provide electrical isolation of portions of a circuit from each other.

A method in accordance with the invention permits production of a printed circuit on a flexible substrate. Resistors, capacitors, conductors and insulators may be produced on a substantially planar solid surface or on a curved surface.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagrammatic plan view of a screen with a corner broken away revealing a substrate above which the screen is positioned, in a position for applying a first coating; and

Fig. 2 is a similar plan view showing the screen and substrate in position for applying a second coating.

DETAILED DESCRIPTION OF THE INVENTION

The examples that follow represent particular applications of the invention. In the case of those applications to keyboards for typewriters or computers or the like, the scale is fixed by the size of the hands of an operator, and the resulting necessity to separate the keys physically. These dimensions fix the size of such a circuit board. Some of the examples relate to conventional printed-circuit boards in which components will be inserted and wave-soldered. The possibility of limiting the printing to one side of a board also makes it possible to print a circuit on any surface on which it can be printed and on any substance that is compatible with the printing process. Thus, the plastic of a car dashboard, the case of a radio, a flexible plastic or paper transfer medium, or a heat sink could be used as a substrate on which to print a circuit according to the present invention. The

- 9 -

examples shown here were also produced by a screen printing process, which represents a preferred method, but it is clear that any method of printing that will handle the conducting, resistive, carbon and solder-resist inks will be adaptable for the present process and for products produced by the process. The other possibilities for doing this include transfer printing, lithography, air brush, hand brush, and the like. The examples that included the printing of resistors and capacitors produced such components having values that were repeatable within tolerance ranges of five to ten per cent. These values are thus comparable to those achieved with ordinary discrete components.

Example 1

An SRBP board approximately 14 inches by 4 inches by 1/16 inch contained a laminated layer of copper that had been etched to produce conducting paths and appropriately placed comb connectors to be bridged by conducting pills when a key was depressed. The combs were plated with gold. In order to function properly, this board needed connections that would cross certain conductors without making electrical contact with them. The crossing connections were achieved by screen printing with an ink containing a polymer resist at the crossings. The resist was cured using ultraviolet radiation. A conducting path connecting the desired points was then printed by a screen process over the cured resist, and the printed conductor was then cured at an elevated temperature. This produced a functioning printed-circuit board for a keyboard that was printed on only one side of the PCB and that had no bridging wire connections.

Example 2

An SRBP board approximately 14 inches by 7 inches by 1/16 inch had been laminated with copper and the copper had been etched to leave an appropriate pattern of electrical connections for a keyboard. This pattern was placed on a single side of the phenolic board. Each of the contact pads for the keys was formed by a screen printing of a conductive ink. This ink was then cured by heating. The contact pads and also exposed conductors for compression connectors at an edge of the board were then covered by screen printing with an ink containing carbon, and the ink was cured by heating it. A screen printing was then made to apply an insulating polymer resist to all areas of the board except the exposed conductors for the key pads and for compression connections at an edge of the board and at those areas where components were to be inserted and wave-soldered. The cured carbon ink functioned as a solder resist that protected the contact pads from solder during the wave-soldering process. If the board had been subjected to hand soldering, the carbon ink would have protected the contact pads from damage by heat.

Example 3

A keyboard of FR-4 epoxy fiberglass having dimensions of approximately 14 inches by 7 inches by 1/16 inch had been laminated and etched on one side to leave copper conductors in a pattern appropriate for a keyboard. Layers of insulating resist were screened in desired crossover patterns on the side of the board that carried the copper and were cured by ultraviolet radiation. A screen printing was then made with a conducting ink to apply conducting strips on the crossovers and also print the contact areas for keys.

- 11 -

This was cured by heating. The areas of screened conductors were then subjected to a further screening process to cover the screened conductors with ink containing carbon. This was then cured by heat. The board was then equipped with resistors by screen printing with resistive ink in desired locations. After the printed resistors were cured by heat, a protective layer of solder resist was applied and was then cured by ultraviolet radiation. The solder resist left open areas for the application of solder. Because of the carbon covering, this board could be subjected to flow soldering without damaging the screened connectors and components.

Example 4

An SRBP board approximately 1 inch by 2 inches by 1/16 inch had been laminated with copper foil on one side, and the foil was etched to leave a desired circuit pattern. A portion of the board was covered with a screened resist which was then cured by ultraviolet light. A conducting ink was printed by a screen process over the resist to make a conducting crossover. The conducting ink was also placed over an area approximately 1/4 inch square to form one plate of a capacitor. The conducting ink was cured by heat. Resistors were deposited in desired locations by screening resistive ink which was then cured by heat. A layer of resist was deposited over the conducting area to provide a dielectric material for the capacitor. This was then cured by exposure to ultraviolet light. A second conducting layer was printed by screening to cover the resist and form the second plate of the capacitor and also to connect the capacitor at a desired point on the copper lamination, and the conducting ink was cured by heating it. The

- 12 -

result was a circuit board with connections and components. A protective layer of solder resist was applied with holes for solder points, and the resist was cured by ultraviolet radiation.

Example 5

An SRBP board of dimensions approximately 2 inches by 1 inch by 1/16 inch received a screened pattern of conducting ink which was then cured by heat. A pattern of screen resistive inks was placed by a screen printing process in desired locations, and the resistive ink was cured by heat. Selected locations of the screened conductor were then plated with copper in an electroless plating tank. A protective resist was then screened over all but those portions of the board that were to be exposed for contact. This included the areas that were given the copper plate, which readied that region of the board for soldered contact, either manual or automatic soldering. As an alternative, nickel could equally as well have been plated to provide an appropriate soldering surface. The conductors formed by conducting ink will not generally withstand the heat associated with hand soldering, although they may stand up under wave-soldering.

Example 6

An SRBP board 14 inches by 7 inches by 1/16 inch was screen-printed with a conducting ink in a pattern appropriate to a keyboard. The ink was cured by heat, and crossing connectors were placed by the process described above. Resistive ink in controlled patterns was printed and cured by heat to produce desired resistors as described above. A layer of solder resist was then screened on the board in a pattern that left substantially square openings at the locations of the

- 13 -

typewriter keys. The resist was cured by exposure to ultraviolet light. The cured resist served as a mechanical spacer for a membrane with appropriately placed conductors that was laid over the resist. This provided a method of making a membrane-switched keyboard without the necessity of tooling to cut openings in a piece of plastic to space the membrane from its mating electrical connection. The connections made here were capacitive, but they could equally as well have been conductive or inductive. The process could also have been applied to make switches using two parallel membranes that were spaced apart by screened and cured resist rather than using a rigid board as one connector support.

All of the boards described in the examples above have in common the fact that all of their printing is done on one side of the board. Some boards have been made in the past with jumper wires that are wave-soldered as a part of the process of making the board, but this is seldom a good solution to the problem of bridging connectors and it is often unfeasible if the run of conductors to be bridged is of any length. Another problem that can be overcome much more simply than the present practice is that of providing shielding against radio-frequency interference (RFI shielding). One reason for the use of multilayer boards is to place a shielding layer protecting portions of the circuit. This is done much more simply on a single layer board on one side by depositing and curing a conducting layer over a layer of resist.

The process of the present invention is adaptable to print as many as thirty to fifty layers, one on top of the other. The practical minimum spacing between adjacent conductors is of the order of 0.01 inch. A

- 14 -

screened layer after curing can typically be controlled in thickness to plus or minus 5 microns. Capacitors of various values ranging up to 1000 picofarads may be made as described in the examples, with tolerances to 5 per cent.

In some circumstances, pinholes in one of the applied layers may cause problems, especially in an insulation layer where pinholes may cause unintentional and catastrophic connection between conducting layers. In order to reduce the risks of this problem arising, the or each insulating layer may be applied in two stages, so that two coatings are applied with variation of coating direction or slightly positional variation between the coatings. For example, when applying an insulating layer using screen printing the first stage comprises applying a screened coating with the direction of application along the X-axis of the screen and work-piece. The second stage comprises applying a further screened coating with a variation from the original coating, for example either by rotating both the screen and the work-piece through 90°, relative to the coating direction, and/or with the screen offset relative to the work-piece, e.g. in the X and/or Y direction, by a minimal amount e.g. a small part of a millimetre.

The Table is a listing of the inks that were used in a screen printing process to produce the examples above.

TABLE

SCREEN PRINTING PROCESS INKS

1. Resist. This is a cross-linking polymer sold under the trademark "Photocoat." The examples used type 2G which is not flexible, although a style 3G is available that is flexible. The examples used a resist that was curable by ultraviolet radiation. A heat-curable resist could equally as well have been used.
 2. Resistive Ink. All of the examples used a polymer thick-film ink sold under the trade name "Matthey Lec" R-4000 series. This is available in a range of resistivities and is cured by heat.
 3. Carbon Ink. This is a polymer thick-film ink containing carbon black. It is cured by exposure to heat.
 4. Conductive Ink. This is a polymer thick-film ink containing silver flakes. It is cured by exposure to heat.
-

In the manufacture of printed circuits it is known to apply a number of layers in desired patterns to the surface of a substrate, commonly an insulating board. The layers may be applied in a variety of ways, for example by first applying a sheet of copper material to the board and then etching away unrequired regions to leave a desired pattern or by applying coatings of suitable material to the surface of the board in a desired pattern to achieve the required effect. It is with this latter operation that the invention is concerned. The layers which are applied may be in the form of a conductive material or may be a resist which may be an electrically insulating material and/or a material which resists damage, e.g. by etching fluid or other operations, for example soldering. Solder is non-adherent to most resists and such resists are commonly unaffected by temperatures encountered during soldering.

In some circumstances pinholes in one or more of the applied layers may cause problems, especially in an insulation area where pinholes may cause unintentional and, potentially, catastrophic connection between conducting layers.

It has been found that the risks of pinholes arising may be reduced by applying the, or each, insulating layer in two stages with the substrate disposed in a different relationship to coating apparatus in each stage, so that two coatings are applied with, for example, variation of coating direction or slight positional variation between coatings. This substantially reduces the risk that pinholes will cause a problem.

In one aspect the invention may be considered to provide a method of applying a layers in a desired

- 17 -

pattern to a substrate for a printed circuit comprising applying a first coating in the desired pattern to the substrate and applying a second coating in the desired pattern to the substrate, the substrate being disposed in a different relationship to coating apparatus used in applying the second coating from the relationship in which it is disposed to coating apparatus used in applying the first coating.

Preferably, in methods in accordance with the invention the coating apparatus used is a screen printing apparatus. In one methods the relationship of the board to the apparatus is changed by moving the position of the screen of the apparatus relative to the substrate through a very small distance e.g. a small part of the millimetre e.g. 0.05 mm. However, although this technique is satisfactory for some applications, the various conductors and other applied layers of many modern printed circuits are so close to one another that even this very small positional adjustment is unacceptable.

In another method in accordance with the invention which is, in some circumstances, an improvement over the method outlined in the last preceding paragraph, two separate but identical screens each having the same pattern are used. The first coating is applied using one of the screens and then this screen is removed and the other screen positioned in registration with the substrate and the second coating applied. The cost of production of suitable screens is very high and this method requires two screens. From an accuracy point of view the use of more than one screen can lead to added problems, for example distortion of the two screens may differ e.g. if the screens are of slightly different tensions. Thus, while this method using two screens

SUBSTITUTE SHEET

- 18 -

may be preferable to that described in the last preceding paragraph, it is still desirable to achieve further improvements in accuracy for some uses, as well as to avoid the expense of two screens, if possible.

In another preferred method in accordance with the invention where the coating apparatus is a screen printing apparatus, the relationship of the substrate to the 1 apparatus is changed by rotating both the substrate and the screen through an angle, suitably 90° , relative to the coating direction of the apparatus.

In carrying out the preferred method in accordance with the invention, preferably a number of identical circuit patterns are printed on a substrate; the circuit patterns are suitably printed to provide a corresponding number of individual circuit boards which are subsequently separated from the remainder of the substrate. Suitably the substrate is provided by an insulating sheet material on which the circuits are printed and from which the individual circuit boards are severed after printing. In this preferred method the regions to which the desired pattern is to be applied are positioned such that the same pattern may be applied to the substrate when the substrate is presented to a pattern applying portion of the coating apparatus in any of a number of orientations, each separated from the next by a fixed angle of rotation about an axis at right angles to the substrate a centre of the substrate. The first coating is applied with the substrate in one such orientation, the substrate and pattern applying portion are thereafter relatively rotated through said fixed angle (or a multiple thereof other than 360°), and then the second coating is applied. Suitably the fixed angle is 180° .

and four regions to which a pattern is to be applied are present. By making this change in position of the pattern applying portion relative to the substrate, the second coating is applied to each region using a different pattern applying portion from that used to apply the first coating to the same region; the chance of a damaging pinhole appearing in precisely the same position of two different applying portions is very small.

In the preferred method in accordance with the invention this risk is reduced even further by not only ensuring that the second coating is applied to each region by a different pattern applying portion from the first coating but also that the second coating is applied in a different coating direction. In this preferred method, which uses a screen printing apparatus, the screen and substrate are rotated in opposite directions, each being rotated through an angle of 90°.

There now follows a detailed description to be read with reference to the accompanying drawings of a method of making a printed circuit board embodying the invention. It will be realized this method has been selected for description to illustrate the invention by way of example.

In the accompanying drawings: -

Figure 1 is a diagrammatic plan view of a screen with a corner broken away revealing a substrate above which the screen is positioned, in a position for applying a first coating; and

Figure 2 is a similar plan view showing the screen and substrate in position for applying a second coating.

A screen 10 of a screen printing apparatus is positioned above a substrate provided by a rigid

insulating sheet material 12 in contact with a surface of the sheet material 12, forming a base on which printed circuit boards are to be formed. The screen 10 and sheet material 12 are positioned for the first coating in register with one another as shown in Figure 1, that is with datums D1 and L1 in alignment and with datums D2 (not shown) and L2 in alignment. In register for the second coating (Figure 2) the datum D1 overlies the datum L2 whilst the datum D2 overlies datum L1. Desired patterns P1 - P4 to be printed are shown in the drawings. The patterns are produced by multiple image photographic techniques and are, therefore, basically identical, although arranged in appropriate positions and orientations to enable the carrying out of the illustrative method.

In carrying out the illustrative method, with the screen 10 positioned relative to the sheet material 12 as shown in Figure 1, coating means of the screen printing apparatus is moved relative to the screen in a coating direction C to apply a first coating of material, for example a resist, through the screen 10 to deposit the desired pattern P1 - P4 onto the base sheet material 12; material M1 deposited on the sheet material 12 is indicated in Figure 1. After the first coating has been applied, the screen 10 is separated from the sheet material 12 and the screen 10 and sheet material 12 are rotated about an axis A at the centre of the base and perpendicular to the base and to the screen 10. The screen 10 is rotated in the direction indicated by the arrow S in Figure 1 and the base sheet material 12 is rotated through an angle of 90° as indicated by the arrows A, B about the axis A until they occupy the positions in which they are shown in Figure 2. The screen 10 and sheet material 12 are put

- 21 -

into register by ensuring that the datums are appropriately aligned. In this instance, however, the datum D1 is aligned with the datum L2 whilst the datum D2 (not shown) is aligned with the datum L1 (see Figure 2). After the screen 10 and sheet material 12 have been moved into register, they are again moved into contact with one another and a second coating is applied by moving the coating means (e.g. a squeegee) in the coating direction indicated by the arrow C in Figure 2. The second coating is applied over the first coating but the second coating is applied by means of different ones of the patterns P1 - P4 formed in the screen. For example, the second coating applied over the material M1 shown in Figure 1 is applied by the pattern P1 in the screen 10 whilst pattern P3 in the screen 10 applies a second coating over material M2, the first coating of which was applied by the pattern P1. Thus, not only is the second coating applied by coating means travelling in a coating direction C across the screen at an orientation of 90° to that in which the first coating is applied but also the actual patterns through which the second coating is applied are different. By this means it is ensured that the risk that any pinholes will occur in the applied material is practically zero.

After all the necessary layers have been applied to the sheet material 12 individual circuit boards are severed from the sheet material 12 by a suitable means such as, for example, routing. Each of the boards carries material applied by one of the patterns P1 - P4, there being four separate boards manufactured in this method.

SUBSTITUTE SHEET

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS

1. A method of producing a contact pad for a printed-circuit board characterised by the steps of:

- 5 (a) printing a pattern of the contact pad in a conductive ink in a desired location on the printed-circuit board;
- (b) curing the conductive ink;
- (c) printing the pattern in a carbon ink over the
10 cured conductive ink; and
- (d) curing the carbon ink.

2. The method of Claim 1 wherein the steps of printing comprise screen printing the conductive ink and screen
15 printing the carbon ink.

3. A method of manufacturing circuit boards by applying a layer in a desired pattern to a substrate for a printed circuit, the layer being such that a number of identical or
20 substantially identical boards are printed on the substrate and subsequently separated, the boards being positioned such that the same pattern may be applied to the substrate when the substrate is presented to a pattern applying portion of a coating apparatus in any of a number of
25 orientations each separated from the next by a fixed angle of rotation about an axis at right angles to the substrate at a centre of the substrate in one such orientation, the method comprising presenting the substrate to the pattern



applying portion of the coating apparatus and applying a first coating in the desired pattern to the substrate, relatively rotating the substrate and pattern applying portion through said fixed angle (or a multiple thereof other than 360°) so that the substrate and pattern applying portion are again in register and thereafter applying a second coating in the desired pattern to the substrate.

4. A method according to Claim 3 wherein the fixed angle is 180°.

5. A method according to Claim 4 wherein the apparatus is a screen printing apparatus and the screen and substrate are rotated in opposite directions each through 90°.

15

6. A method according to Claim 3 wherein the substrate is a sheet material on which the circuits are printed and from which the individual circuit boards are severed after printing.

20

7. A method of making a multi-layer printed circuit comprising procuring a substrate and forming conductors on a surface of said substrate characterised by, thereafter, applying over said surface by a printing technique alternating layers of insulating material and conductive material, each of said layers being applied in a preselected pattern for that layer, the patterns of some, at least, of the insulating material layers having openings

25



therein through which material of subsequently applied
conductive material layers makes electrical contact with
said conductors or with previously applied layers of
conductive material at predetermined locations whereby to
5 effect circuit connections and wherein regions of two
layers of conductive material are applied with a
corresponding region of a layer of insulating material
disposed between said regions of two layers of conductive
material whereby to provide a capacitor of said printed
10 circuit, and further wherein the conductive material of at
least one said layer of conductive material is a resistive
ink which is deposited in a controlled amount to serve as
a circuit resistor.

15 8. A method of making a multi-layer printed circuit
comprising forming a pattern of conductors and insulators
by printing conductive ink, and insulating material on a
substrate, leaving exposed parts of said conductors to
provide electrical contact or connection regions and
20 protecting said exposed parts by over-printing them with an
ink that deposits a carbon layer whereby said exposed parts
remain electrically conductive.

25 9. A printed circuit produced on a single side of a
substrate comprising a first set of electrical conductors
carried on a surface of the substrate, a layer of an
insulating polymer applied on a portion of said surface of
the substrate and bridging a first of said electrical

conductors on the surface of the substrate, a bridging electrical conductor carried on the surface of said layer of insulating polymer opposite said surface of the substrate so that it is insulated from said first electrical conductor and in electrical contact with at least a second and a third of said electrical conductors on said surface at opposite sides of said first electrical conductors, a second layer of insulating polymer applied on portions of said surface but which leaves exposed parts of said first set of electrical conductors, and a second set of electrical conductors carried partly on said second layer of insulating polymer but making electrical contact with some of said first set of electrical conductors at said exposed portions, and at least one further layer of insulating polymer applied on said surface and/or on parts at least of previously applied insulating layers and conductors, which leaves exposed parts of at least one set of previously applied electrical conductors.

10. A printed circuit on a single side of a substrate comprising a set of electrical conductors carried on a surface of the substrate or on a layer of insulating polymer applied on the substrate, a layer of insulating polymer applied over said set of electrical conductors and a conducting layer applied over the second-mentioned layer of insulating polymer as a shield against radio-frequency interference or as a ground plane to provide electrical isolation of portions of a circuit from

each other.

11. A printed circuit on a substrate comprising at least one set of electrical conductors carried on a surface of the substrate, a layer of an insulating polymer applied on a portion of said surface and bridging a first electrical conductor, a bridging electrical conductor carried on the surface of said bridging layer of insulating polymer so that it is insulated from said first electrical conductor but in electrical contact with at least a second electrical conductor and a third electrical conductor at opposite sides of said first electrical conductor, resistors formed by depositing a controlled amount of resistive ink and capacitors produced by printing conductive layers separated by insulating layers.



12. A multi-layer printed circuit comprising a pattern of conductors and insulators on a substrate with parts of said conductors exposed to provide electrical contact or connection regions, said exposed parts being covered by a carbon layer to protect the exposed parts but ensuring that the exposed parts remain electrically conductive.

Dated this 11th day of September 1992

TECHNOLOGY APPLICATIONS COMPANY LIMITED

WATERMARK PATENT & TRADEMARK ATTORNEYS
2nd FLOOR, THE ATRIUM
290 BURWOOD ROAD, HAWTHORN VIC 3122



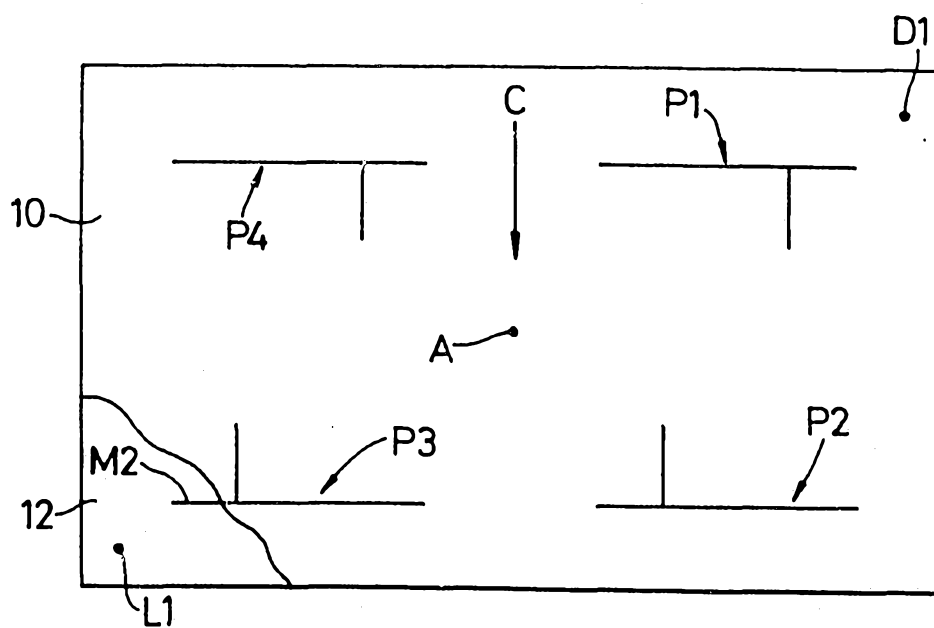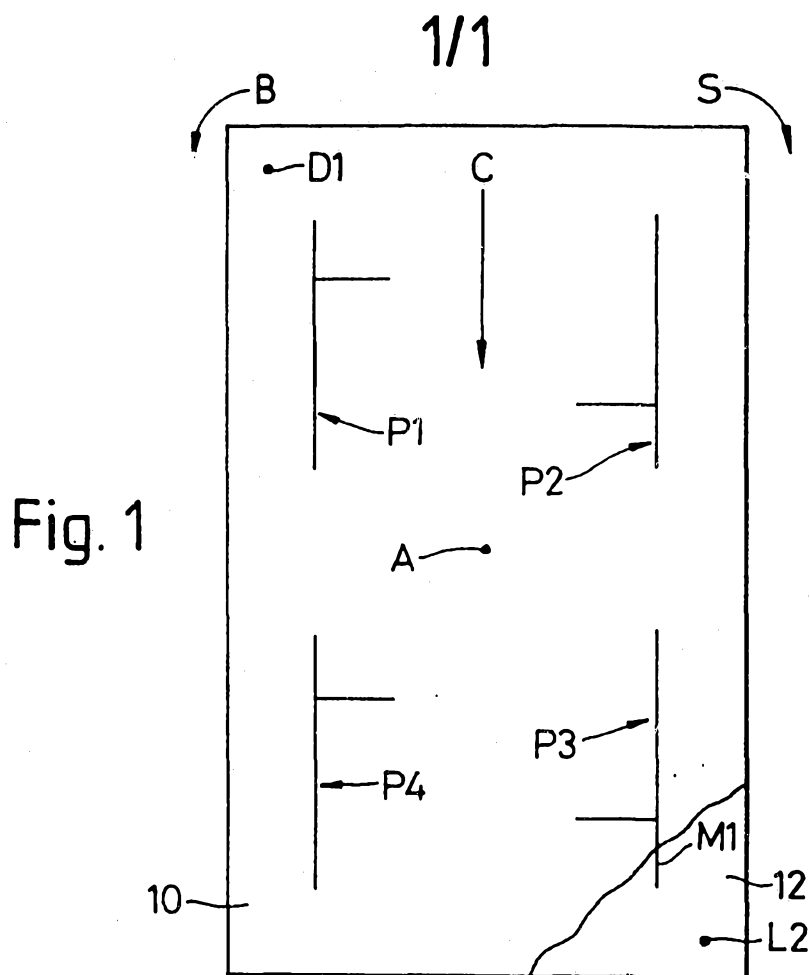

INTERNATIONAL SEARCH REPORT

International Application No PCT/GB 89/01536

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC ⁵ : H 05 K 3/46		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC ⁵	H 05 K 3/46	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹		
Category ¹⁰	Citation of Document, ¹¹ with Indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X	GB, A, 2078448 (STANDARD TELEPHONES & CABLES LTD) 6 January 1982 see page 1, line 40 - page 2, line 72; figures	1-4,7,14-15, 21-26
	--	
X	GB, A, 2181303 (ASAHI CHEMICAL RESEARCH LABORATORY CO. LTD) 15 April 1987 see page 3, lines 1-92	1-4,7,14-15, 24
	--	
A	US, A, 3981761 (NIPPON TOKI K.K.) 21 September 1976 see claim 1	5,8,12
	--	
A	EP, A, 0164921 (MURRAY, JOHN) 18 December 1985 see page 4, line 27 - page 5, line 14; ./.	5-6,8-13,16
¹⁰ Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "Z" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
26th June 1989	16 JUL 1990	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	MISS T. TAZELAAR	

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, " with indication, where appropriate, of the relevant passages	Relevant to Claim No.
	page 6, lines 1-5; page 6, line 11 - page 7, line 11 --	
X	EP, A, 0100144 (TEXAS INSTRUMENTS INC.) 8 February 1984 see page 26, paragraph 3 - page 29, paragraph 2 --	18-19
X	EP, A, 0078935 (PREH ELEKTROFEINMECHANISCHE WERKE JAKOB PREH. NACHF. GmbH) 18 May 1983 see claims 17,22,24 --	20,27,29
X	DE, A, 1791233 (IBM) 9 March 1972 see claim 3; column 6, lines 51-21; figure 7 --	27-28
X	GB, A, 2078448 (STANDARD TELEPHONES & CABLES LTD) 6 January 1982 see page 2, lines 65-71	30,32,37
A	-----	33

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

GB 8901536
SA 33515

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 09/07/90
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A- 2078448	06-01-82	None	
GB-A- 2181303	15-04-87	JP-A- 62076600	08-04-87
		DE-A- 3631632	02-04-87
		FR-A- 2588146	03-04-87
		NL-A- 8602455	16-04-87
		US-A- 4734156	29-03-88
US-A- 3981761	21-09-76	None	
EP-A- 0164921	18-12-85	None	
EP-A- 0100144	08-02-84	JP-A- 59033565	23-02-84
		US-A- 4635354	13-01-87
		US-A- 4736190	05-04-88
EP-A- 0078935	18-05-83	DE-A- 3143995	19-05-83
		JP-A- 58180013	21-10-83
		US-A- 4555745	26-11-85
DE-A- 1791233	09-03-72	BE-A- 651581	01-12-64
		DE-A- 1465736	06-03-69
		FR-E- 89790	
		FR-A- 1414836	
		US-A- 3456158	15-07-69
		US-A- 3547604	15-12-70
GB-A- 2078448	06-01-82	None	