



- (51) International Patent Classification:
G01S 11/02 (2010.01) *G01S 5/14* (2006.01)
H04W 64/00 (2009.01)
- (21) International Application Number: PCT/FI2015/050353
- (22) International Filing Date: 22 May 2015 (22.05.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant: **NOKIA TECHNOLOGIES OY** [FI/FI];
Karaportti 3, FI-02610 Espoo (FI).
- (72) Inventors: **KNECKT, Jarkko**; Rakentajainrinne 6, FI-02330 Espoo (FI). **ALANEN, Olli**; Aatelitie 3 A 1, FI-01520 Vantaa (FI). **KASSLIN, Mika**; Seljamäki 6 A, FI-02770 Espoo (FI). **MARIN, Janne**; Arvelanniitty 5 J 20, FI-02770 Espoo (FI).
- (74) Agents: **NOKIA TECHNOLOGIES OY** et al.; Ari Aarnio, IPR Department, Karakaari 7, FI-02610 Espoo (FI).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DETERMINING DISTANCES

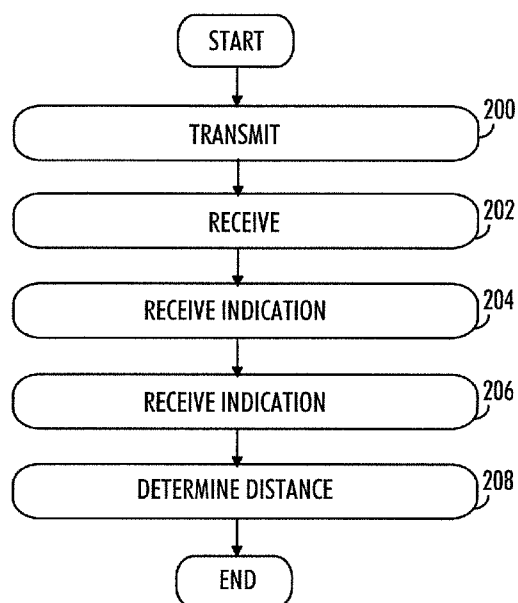


FIG. 2

(57) Abstract: This document discloses a solution for determining distances. In the solution, a first frame is transmitted (200) to a second apparatus; a second frame is received (202) from the second apparatus, as response to the first frame; an indication of the duration between the reception time of the first frame and transmission of the second frame is received (204); an indication whether the duration is constant or variable is received (206); and in case the duration is constant, the distance between the first apparatus and the second apparatus is determined (208) based at least partly on the indication of the duration.



Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

DETERMINING DISTANCES

Technical Field

The invention relates to the field of wireless communications.

Background

5 In wireless communication systems there may be situations for a transceiver when it might be useful to be able to know the location of another transceiver or distance to the transceiver. Some applications work with nearby devices. For example, a printer device supporting wireless communications might be present for devices which are geographically close to it. In another example, a
10 device might transmit information to devices which are within a given distance from it but ignore other devices.

Brief description

According to an aspect of the invention, there is provided an apparatus comprising at least one processor and at least one memory including computer
15 program code, the at least one memory and the computer program code configured to, with the at least one processor, cause the apparatus at least to: transmit a first frame to a second apparatus; receive a second frame from the second apparatus, as response to the first frame; receive an indication of the duration between the reception time of the first frame and transmission of the
20 second frame; receive an indication whether the duration is constant or variable; and in case the duration is constant, determine the distance between the apparatus and the second apparatus based at least partly on the indication of the duration.

According to an aspect of the invention, there is provided an apparatus
25 comprising at least one processor and at least one memory including computer program code, the at least one memory and the computer program code configured to, with the at least one processor, cause the apparatus at least to: receive a first frame from a first apparatus; receive a second frame from the second apparatus, as response to the first frame; receive an indication of the
30 duration between the reception time of the first frame and transmission of the second frame; receive an indication whether the duration is constant or variable; and in case the duration is constant, determine the a parameter related to the distance between the apparatus and first apparatus and the second apparatus based at least partly on the indication of the duration.

According to another aspect of the invention, there is provided a method in a first apparatus, comprising: transmitting a first frame to a second apparatus; receiving a second frame from the second apparatus, as response to the first frame; receiving an indication of the duration between the reception time
5 of the first frame and transmission of the second frame; receiving an indication whether the duration is constant or variable; and in case the duration is constant, determining the distance between the first apparatus and the second apparatus based at least partly on the indication of the duration.

According to another aspect of the invention, there is provided a
10 method in an apparatus, comprising: receiving a first frame from a first apparatus; receiving a second frame from the second apparatus, as response to the first frame; receiving an indication of the duration between the reception time of the first frame and transmission of the second frame; receiving an indication whether the duration is constant or variable; and in case the duration is constant,
15 determining the a parameter related to the distance between the apparatus and first apparatus and the second apparatus based at least partly on the indication of the duration.

Some embodiments of the invention are defined in dependent claims.

Brief description of the drawings

20 Embodiments of the present invention are described below, by way of example only, with reference to the accompanying drawings, in which

Figures 1A and 1B illustrate examples of wireless communication scenarios to which embodiments of the invention may be applied;

Figure 2 is a flow chart illustrating an example of an embodiment;

25 Figures 3 and 4 are signaling charts illustrating examples of some embodiments;

Figure 5 illustrates a block diagram of an apparatus according to some embodiments.

Detailed description of some embodiments

30 The following embodiments are examples. Although the specification may refer to “an”, “one”, or “some” embodiment(s) in several locations, this does not necessarily mean that each such reference is referring to the same embodiment(s), or that the feature only applies to a single embodiment. Single features of different embodiments may also be combined to provide other
35 embodiments. Furthermore, words “comprising” and “including” should be

understood as not limiting the described embodiments to consist of only those features that have been mentioned and such embodiments may contain also features/structures that have not been specifically mentioned.

A general wireless communication scenario to which embodiments of the invention may be applied is illustrated in Figure 1A. Figure 1A illustrates an example of wireless communication devices comprising a plurality of access points (AP) 100, 102 and a plurality of wireless terminal devices (STA) 110, 112, 114, 116, 118. Each base station may be associated with a basic service set (BSS) which is a basic building block of an IEEE 802.11 wireless local area network (WLAN). The most common BSS type is an infrastructure BSS that includes a single AP together with all STAs associated with the AP. The AP may be a fixed AP or it may be a mobile AP. The APs 100, 102 may also provide access to other networks, e.g. the Internet. In another embodiment, the BSS may comprise a plurality of APs to form an extended service set (ESS). While embodiments of the invention are described in the context of the above-described topologies of IEEE 802.11 based networks, it should be appreciated that these or other embodiments of the invention may be applicable to networks based on other specifications, e.g. different versions of the IEEE 802.11, WiMAX (Worldwide Interoperability for Microwave Access), UMTS LTE (Long-term Evolution for Universal Mobile Telecommunication System), and other networks having cognitive radio features, e.g. transmission medium sensing features and adaptiveness to coexist with radio access networks based on different specifications and/or standards.

Let us consider an infrastructure BSS that includes an access point together with terminal devices. The access point may be configured to utilize one or more radio channels or frequencies in communication with the terminal devices. The access point 100, 102 is configured to inform terminal devices its presence by transmitting a beacon signal or a beacon frame at predetermined intervals on each channel it uses for communication. The beacon frame comprises information on the access point, its network, and other networks. Typically the predetermined interval is 100 time units (TU). The duration of one TU is 1,024 ms. A terminal device may tune to a channel and look for beacon frames. The process is denoted passive scanning. Upon finding a beacon frame the terminal device may attempt a connection with the access point by transmitting an authentication message. After receiving an authentication response message from the access point, the terminal device and the access point may exchange association messages after which the terminal device is said to be associated to the access point. The association

messages may comprise at least one of the following messages: association request, association response, reassociation request, and reassociation response. The association may be followed by 802.1X authentication, IP address allocation and other application specific setup signaling.

5 Another wireless communication scenario to which embodiments of the invention may be applied is illustrated in Figure 1B. Figure 1B illustrates a plurality of wireless devices 120, 122, 124, 126 that form a cluster 128 of devices. The cluster may comply with neighbour awareness networking (NAN) principles. NAN provides a mechanism for wireless devices to synchronize the time and channel
10 on which they converge to facilitate the discovery of services that the devices may offer to other devices. The time period and channel on which NAN Devices converge is called the Discovery Window (DW). The wireless devices of a NAN cluster share a common set of NAN parameters that may comprise the time period between consecutive Discovery Windows, the time duration of the Discovery
15 Windows, a beacon interval, and NAN Channel(s). The devices in a cluster may transmit multicast NAN Service Discovery frames directly to other devices within range in the same cluster during the Discovery Window. Devices may also communicate one to one with each other. A wireless device may belong to more than one cluster. In addition, a device may operate concurrently in a cluster and in
20 a different WiFi network such as an infrastructure BSS of Figure 1A.

In wireless communication systems there may be situations for a transceiver when it might be useful to be able to know the distance to another transceiver. Fine Time Measurement (FTM) is a ranging mechanism which has been proposed to be used in 802.11 based wireless systems.

25 In FTM, at least three frame pairs are required to complete the ranging process. First the initiating apparatus transmits a request to initiate distance measurement. The responding apparatus acknowledges the request. Then follow the actual ranging messages between the apparatuses. Both stations time stamp the transmission and reception times of these messages. The time stamps may be
30 denoted as t1, t2, t3, and t4. The responding apparatus is configured to transmit at time instant t1 an FTM_1 message. The initiating apparatus receives the message at time instant t2 and transmits acknowledgement message at time instant t3. The responding apparatus receives the ACK transmitted by the initiating apparatus at time instant t4.

35 Finally, the responding apparatus transmits an FTM_2 message to inform the initiating apparatus on the transmission time t1 of the FTM_1 message

and the reception time t_4 of the corresponding ACK. After this message exchange, the initiating apparatus can determine distance to the responding apparatus.

If the wireless system comprises a large number of stations, the proposed currently specified FTM ranging solution is not optimum from spectrum efficiency viewpoint.

Figure 2 is a flow chart illustrating an example of an embodiment of the invention. The flowchart illustrates the operation of an apparatus which may be a wireless terminal device (STA) 110, for example.

In step 200, the apparatus is configured to transmit a first frame to a second apparatus. The second apparatus may be another wireless terminal device, for example.

In step 202, the apparatus is configured to receive a second frame from the second apparatus, as response to the first frame.

In step 204, the apparatus is configured to receive an indication of the duration between the reception time of the first frame and transmission of the second frame.

In step 206, the apparatus is configured to receive an indication whether the duration is constant or variable.

In case the duration is constant, the apparatus is configured in step 208 to determine the distance between the apparatus and the second apparatus based at least partly on the indication of the duration.

The above steps may also be in different order. For example, the reception of the indication whether the duration is constant or variable may occur before other steps. Further, the reception of the indication of the duration between the reception time of the first frame and transmission of the second frame may occur before transmitting the first frame and the second frame, since the duration may be constant and not dependent on any specific transmissions of the first frame and the second frame.

In prior art, the assumption is that the duration between the time instant t_2 receiving a message such as FTM_1 message and the time instance t_3 transmitting corresponding ACK varies. Thus, the assumption has been that only the initiating apparatus can calculate distance because it measures and knows t_2 and t_3 .

However, in this proposal the assumption is that the t_2 - t_3 duration can be constant in many cases. If an apparatus is able to respond with constant delay and willing other stations to calculate distance to it, it may inform the constant t_3 - t_2

duration to other apparatuses. The constant t_3-t_2 duration can be included in the ACK frame or it may be included in some earlier message, for example. Such an earlier message may be a beacon, probe response, association response in infrastructure mode, for example. In non-infrastructure mode, other control, management, or data frames may disclose such an earlier message. If the apparatus is not able or willing to use constant delay, it may inform this shall inform that in the same message.

In an embodiment, the t_3-t_2 duration is determined to be constant if the variation of the duration is below a predetermined margin. For example, duration may be considered constant if it is a certain value $\pm$ some margin, e.g. $\pm 1\%$, 5% , 10% or 20% , as an example.

In an embodiment, the t_3-t_2 duration may be variable, as discussed above. In an embodiment, the duration may be variable due to processing load or other non-intentional reason. In an embodiment, the duration may be variable to make it difficult for other devices to determine distance to the second apparatus 112. In such case, the t_3-t_2 duration may be randomized.

In an embodiment, it is possible to determine distance to another apparatus (having constant t_2-t_3) with single frame pair exchange (FTM-ACK).

Further, this enables passive stations (not participating to frame exchanges) to determine distances to at least one of the participating apparatus (having constant t_2-t_3).

Figure 3 is a signalling chart illustrating an example of an embodiment. The figure illustrates exchange of frames between two wireless apparatuses. In this example, the apparatuses are wireless stations 110, 112. The apparatuses may as well be devices of a NAN cluster.

The apparatus 110 may be denoted as first apparatus and the apparatus 112 as second apparatus.

The first apparatus 110 transmits a first frame 300 to a second apparatus 112. The first apparatus 110 stamps the time instant t_1 of the transmission. The second apparatus may be another wireless terminal device, for example. The second apparatus 112 receives the first frame at time instant t_2 .

At time instant t_3 , the second apparatus transmits a second frame 302 to the first apparatus as response to the first frame. The second frame may be an acknowledgement frame. The second apparatus receives the second frame and the apparatus stamps the time instant t_4 of the reception.

The first apparatus knows the time instants t_1 and t_4 . In an

embodiment, the second apparatus has indicated that duration t_3-t_2 is constant. It may have indicated the value of the duration t_3-t_2 to other apparatuses.

Thus, the first apparatus may compute the flight time over-the air of messages 300, 302 as $RTT = (t_4-t_1) - (t_3-t_2)$. The distance between the apparatuses may be determined from $RTT/2*c$ where c is the speed of light.

In an embodiment, the second apparatus 112 has signalled 306 the constant value of the duration t_3-t_2 to the first apparatus 110 (and possibly other apparatuses as well). In an embodiment, the first apparatus requested 304 the information from the second apparatus. This exchange of messages may be performed prior to the messages 300, 302.

In an embodiment, the second apparatus may apply a time varying t_3-t_2 duration. The total duration t_3-t_2 may comprise a constant part and a varying part. The second apparatus may include the varying part to the duration when it is desired that only a given recipient may determine the distance to the apparatus. The varying part may be an additional random delay. The second apparatus may have published the constant part of the t_3-t_2 delay but transmits information about the random delay only to the desired recipient.

The second apparatus may inform the first apparatus (and other apparatuses) the duration t_3-t_2 in various ways.

In an embodiment, the apparatus may indicate the duration between times t_2 and t_3 in a broadcast or unicast frame. The apparatus may provide the constant duration and the time varying or random information. This information may be provided to all wireless apparatuses (STAs) in proximity. The STAs in proximity may use the duration to range the distance from the measured STA to the passively ranging device.

In infrastructure mode, the AP may indicate its duration between T_2 and T_3 times in Association Response, Probe Response or in Beacon frame.

In an embodiment, second apparatus may add a field to the Acknowledgement message 306 to indicate that the $t_3 - t_2$ delay is Short Interframe Space (SIFS) duration within a predefined granularity (± 50 picoseconds). Alternatively the field may contain an unsigned integer that indicates the $t_3 - t_2$ preciseness in units of ± 5 picoseconds. The overhearing devices that are performing passive FTM can use this information to estimate its distance between ranged devices and the preciseness of the estimation.

In an embodiment, a $t_3 - t_2$ Duration field may be a signed integer that contains the difference of the $t_3 - t_2$ duration to the SIFS duration in picoseconds.

In an embodiment, a Variation $t_3 - t_2$ Duration field indicates the variation of the $t_3 - t_2$ time in an unsigned integer in units of pico seconds.

If the second apparatus adds a random delay to the $t_3 - t_2$ interval, the apparatus may indicate the random delay in ACK frame 306.

5 In an embodiment, the apparatuses that are not able to know or are unwilling to reveal their $t_3 - t_2$ delay at the time of the frame transmission may indicate that they have a random $t_3 - t_2$ delay. This indication may help the receiving apparatuses to avoid the FTM measurement of such frames.

10 In an embodiment, the signalled information may contain an uniform resource locator URL or IP address through which the duration between times $t_3 - t_2$ may be obtained. The information may consider the temperature, device type and other related parameters to provide the most accurate estimation of duration between $t_3 - t_2$

15 As mentioned, also those wireless apparatuses not participating in the frame exchange may obtain location information on the basis of the suggested procedure. Figure 4 illustrates this example. An apparatus 114 may for example overhear the message 300 transmitted by first apparatus 110 and the ACK transmission 302 by second apparatus 112. This apparatus 114 may be denoted as a Passive FTM STA. The passive FTM STA may obtain the time of arrival t_2' of the frame 300' and the time of arrival t_4' of the ACK frame 302' to its location. It may be noted that the t_2 and t_2' as well as t_4 and t_4' have different values depending on the positions of the second apparatus and Passive FTM STA.

20 In an embodiment, the message 300 may be an FTM message. In another embodiment, the message 300 may be any message that needs to be acknowledged by the message 302.

25 As Figure 4 shows, t_2' indicates the time when Passive FTM STA receives the frame 300' transmitted by the first apparatus. The t_4' is the time when the Passive FTM STA 114 receives the frame 302' from second apparatus. If the Passive FTM STA obtains both values t_2' and t_4' , it may calculate a distance $((t_4' - t_2') - (t_3 - t_2)) * c$. The STA 114 may calculate roughly estimate for differential distance D which is the difference in STA 114's distance to STA 110 and STA 112. If at a different time instant STA 114 receives distance determination related signalling between STA 110 and some other apparatus and between STA 112 and the other apparatus, TSA 114 may apply hyperbolic navigation methods (for
35 example) to calculate absolute distances between STA 114 and the other apparatuses.

Figure 5 illustrates an embodiment of an apparatus comprising means for carrying out the above-mentioned functionalities. In an embodiment, the apparatus is an access point or a part of an access point. The apparatus may be a wireless device which complies with specifications of an IEEE 802.11 network or another wireless network. The wireless apparatus may also be a cognitive radio apparatus capable of adapting its operation to a changing radio environment, e.g. to changes in parameters of another system on the same frequency band. The wireless apparatus may be or may be comprised in a computer (PC), a laptop, a tablet computer, a cellular phone, a palm computer, a base station with routing functionalities, or any other apparatus provided with radio communication capability. In an embodiment, the apparatus carrying out the above-described functionalities of the access point is comprised in such a wireless device, e.g. the apparatus may comprise a circuitry, e.g. a chip, a processor, a micro controller, or a combination of such circuitries in the wireless device.

Referring to Figure 5, the apparatus may comprise a communication controller circuitry 500 configured to control wireless communications in the wireless device. The communication controller circuitry 500 may comprise a control part 502 handling control signalling communication with respect to transmission, reception, and extraction of control or management frames including the beacon frames, fast initial link setup frames, measurement pilot frames, and probe response messages, for example. The communication controller circuitry 500 may further comprise a data part 504 that handles transmission and reception of payload data during transmission opportunities of the wireless device (transmission) or transmission opportunities of other wireless devices (reception).

The communication controller circuitry 500 may further comprise a locationing part 506 configured to control operations related to locationing messages and determining distances to nearby apparatuses on the basis of messages. In an embodiment, the control part 502 forwards information related to locationing messages to the locationing part 506. The locationing part may be responsible for maintaining information on t_3-t_2 delays of nearby apparatuses that the apparatuses have indicated to be constant.

In an embodiment, the communication channel utilized by the apparatus is a wireless local area network channel. In an embodiment, the communication channel is defined by a center frequency and a channel width. In an embodiment, the communication channel has a 20Mhz channel width. In an embodiment, the

communication channel is a primary channel according to IEEE 802.11 specs, e.g. IEEE 802.11-2012.

If the apparatus is an access point, the apparatus may further comprise a communication part 508 configured to communicate 510 with other network elements such as other access points, network controllers and networks.

The circuitries 502 to 506 of the communication controller circuitry 500 may be carried out by the one or more physical circuitries or processors. In practice, the different circuitries may be realized by different computer program modules. Depending on the specifications and the design of the apparatus, the apparatus may comprise some of the circuitries 502 to 506 or all of them.

The apparatus may further comprise the memory 512 that stores computer programs (software) configuring the apparatus to perform the above-described functionalities of the access point. The memory 512 may also store communication parameters and other information needed for the wireless communications within a wireless network of the access point and with other wireless networks.

The apparatus may further comprise radio interface components 514 providing the apparatus with radio communication capabilities within its wireless network and/or with other wireless networks. The radio interface components 514 may comprise standard well-known components such as an amplifier, filter, frequency-converter, (de)modulator, and encoder/decoder circuitries and one or more antennas. The apparatus may further comprise a user interface enabling interaction with the user of the communication device. The user interface may comprise a display, a keypad or a keyboard, a loudspeaker, etc.

As used in this application, the term 'circuitry' refers to all of the following: (a) hardware-only circuit implementations, such as implementations in only analogue and/or digital circuitry, and (b) to combinations of circuits and software (and/or firmware), such as (as applicable): (i) a combination of processor(s) or (ii) portions of processor(s)/software including digital signal processor(s), software, and memory(ies) that work together to cause an apparatus to perform various functions, and (c) to circuits, such as a microprocessor(s) or a portion of a microprocessor(s), that require software or firmware for operation, even if the software or firmware is not physically present. This definition of 'circuitry' applies to all uses of this term in this application. As a further example, as used in this application, the term "circuitry" would also cover an implementation of merely a processor (or multiple processors) or portion of a processor and its (or

their) accompanying software and/or firmware. The term “circuitry” would also cover, for example and if applicable to the particular element, a baseband integrated circuit or applications processor integrated circuit for a wireless device.

The processes or methods described in Figures 2 to 4 may also be carried out in the form of a computer process defined by a computer program. The computer program may be in source code form, object code form, or in some intermediate form, and it may be stored in a transitory or a non-transitory carrier, which may be any entity or device capable of carrying the program. Such carriers include a record medium, computer memory, read-only memory, electrical carrier signal, telecommunications signal, and software distribution package, for example. Depending on the processing power needed, the computer program may be executed in a single electronic digital processing unit or it may be distributed amongst a number of processing units.

The present invention is applicable to wireless networks defined above but also to other suitable wireless communication systems. The protocols used, the specifications of wireless networks, their network elements and terminals, develop rapidly. Such development may require extra changes to the described embodiments. Therefore, all words and expressions should be interpreted broadly and they are intended to illustrate, not to restrict, the embodiment. It will be obvious to a person skilled in the art that, as technology advances, the inventive concept can be implemented in various ways. The invention and its embodiments are not limited to the examples described above but may vary within the scope of the claims.

Claims

1. A method in a first apparatus, comprising:
transmitting a first frame to a second apparatus;
receiving a second frame from the second apparatus, as response to
5 the first frame;
receiving an indication of the duration between the reception time of the
first frame and transmission of the second frame;
receiving an indication whether the duration is constant or variable; and
in case the duration is constant,
10 determining the distance between the first apparatus and the second
apparatus based at least partly on the indication of the duration.
2. The method of claim 1, further comprising:
deciding not to determine the distance between the first apparatus and
15 the second apparatus, in case the duration is variable.
3. The method of claim 1 or 2, further comprising:
determining the distance between the first apparatus and the second
apparatus based at least partly on the transmission time of the first frame and the
20 reception time of the second frame.
4. The method of any preceding claim, wherein the indication of the
duration and the indication whether the duration is constant or variable is received
in the second frame or in an third frame.
25
5. The method of claim 4, wherein the third frame is at least one of a
beacon, a probe response, and an association response.
6. The method of claim 4 or 5, wherein the third frame is received prior
30 to the transmission of the first frame.
7. The method of any preceding claim, wherein the second frame is an
acknowledgement frame.
8. The method of any preceding claim, further comprising:
35

receiving from the second apparatus prior transmitting the first frame a request to transmit the first frame.

9. The method of any preceding claim, further comprising:

5 determining the distance between the first apparatus and the second apparatus if the variation of the duration is below a predetermined margin.

10. A method in an apparatus, comprising:

receiving a first frame from a first apparatus;

10 receiving a second frame from the second apparatus, as response to the first frame;

receiving an indication of the duration between the reception time of the first frame and transmission of the second frame;

15 receiving an indication whether the duration is constant or variable; and in case the duration is constant,

determining the a parameter related to the distance between the apparatus and first apparatus and the second apparatus based at least partly on the indication of the duration.

20 11. An apparatus comprising at least one processor and at least one memory including computer program code, the at least one memory and the computer program code configured to, with the at least one processor, cause the apparatus at least to:

transmit a first frame to a second apparatus;

25 receive a second frame from the second apparatus, as response to the first frame;

receive an indication of the duration between the reception time of the first frame and transmission of the second frame;

30 receive an indication whether the duration is constant or variable; and in case the duration is constant,

determine the distance between the apparatus and the second apparatus based at least partly on the indication of the duration.

35 12. The apparatus of claim 11, the at least one memory and the computer program code, with the at least one processor, further configured to:

decide not to determine the distance between the first apparatus and

the second apparatus, in case the duration is variable.

13. The apparatus of claim 11 or 12, the at least one memory and the computer program code, with the at least one processor, further configured to:

5 determine the distance between the first apparatus and the second apparatus based at least partly on the transmission time of the first frame and the reception time of the second frame.

10 14. The apparatus of any preceding claim 11 to 13, wherein the indication of the duration and the indication whether the duration is constant or variable is received in the second frame or in an third frame.

15 15. The apparatus of claim 14, wherein the third frame is at least one of a beacon, a probe response, and an association response.

 16. The apparatus of claim 14 or 15, wherein the third frame is received prior to the transmission of the first frame.

20 17. The apparatus of any preceding claim 11 to 16, wherein the second frame is an acknowledgement frame.

 18. The apparatus of any preceding claim 11 to 17, the at least one memory and the computer program code, with the at least one processor, further configured to:

25 receive from the second apparatus prior transmitting the first frame a request to transmit the first frame.

30 19. The apparatus of any preceding claim 11 to 18, the at least one memory and the computer program code, with the at least one processor, further configured to:

 determine the distance between the first apparatus and the second apparatus if the variation of the duration is below a predetermined margin.

35 20. An apparatus comprising at least one processor and at least one memory including computer program code, the at least one memory and the computer program code configured to, with the at least one processor, cause the

apparatus at least to:

receive a first frame from a first apparatus;

receive a second frame from the second apparatus, as response to the first frame;

5 receive an indication of the duration between the reception time of the first frame and transmission of the second frame;

receive an indication whether the duration is constant or variable; and in case the duration is constant,

10 determine the a parameter related to the distance between the apparatus and first apparatus and the second apparatus based at least partly on the indication of the duration.

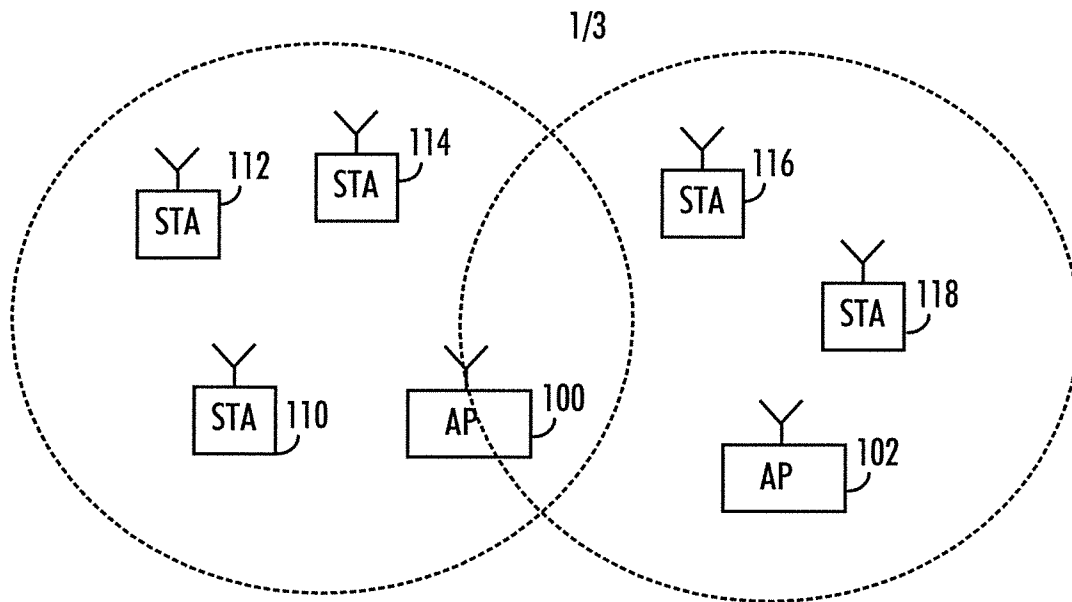


FIG. 1A

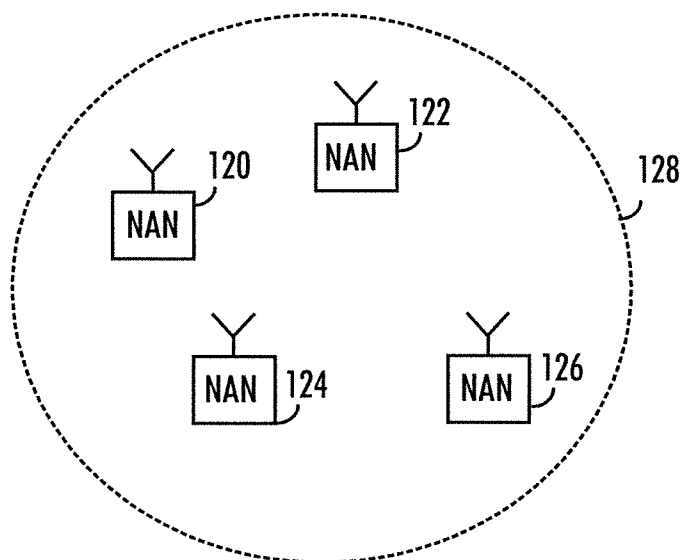


FIG. 1B

2/3

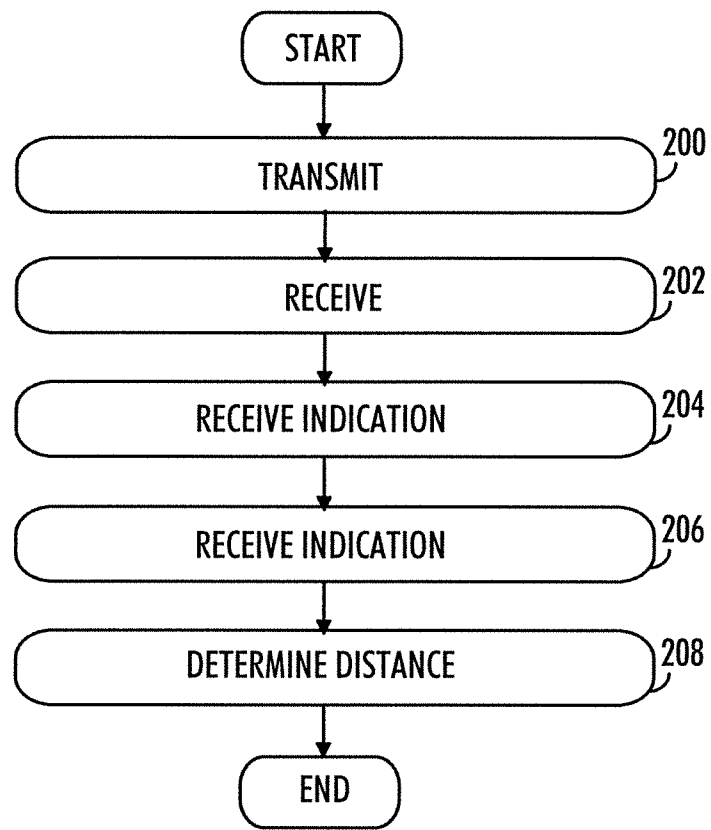


FIG. 2

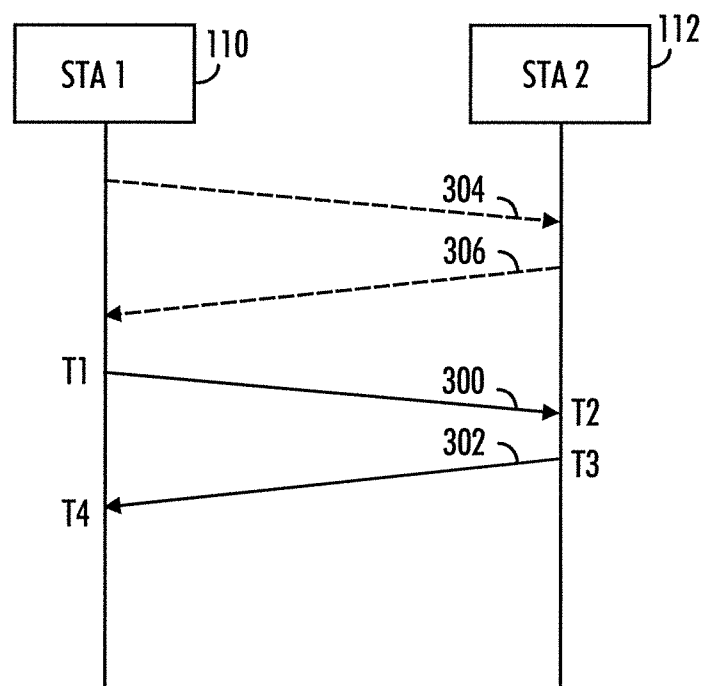


FIG. 3

3/3

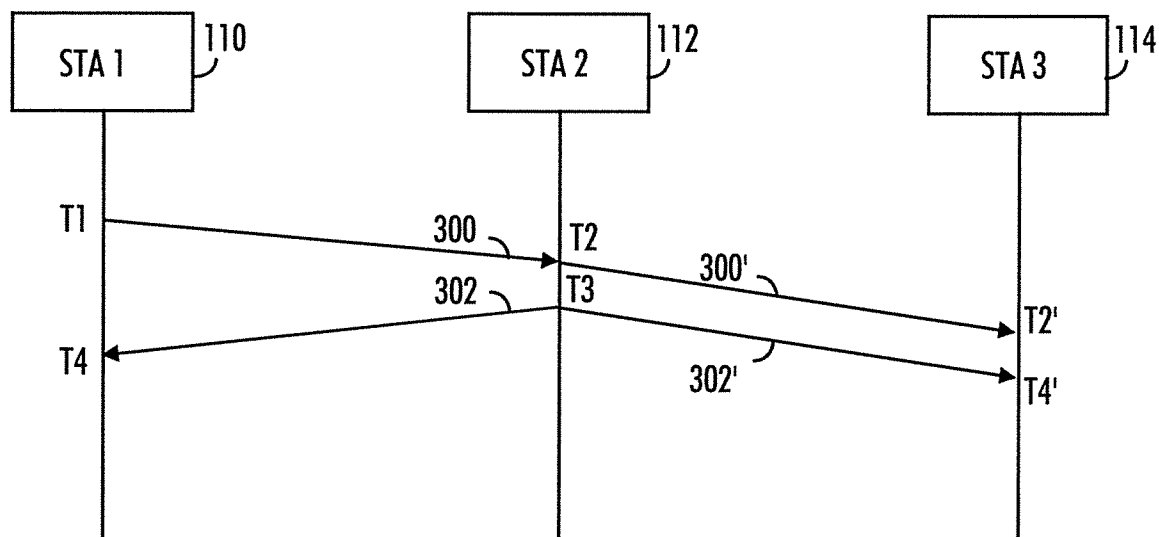


FIG. 4

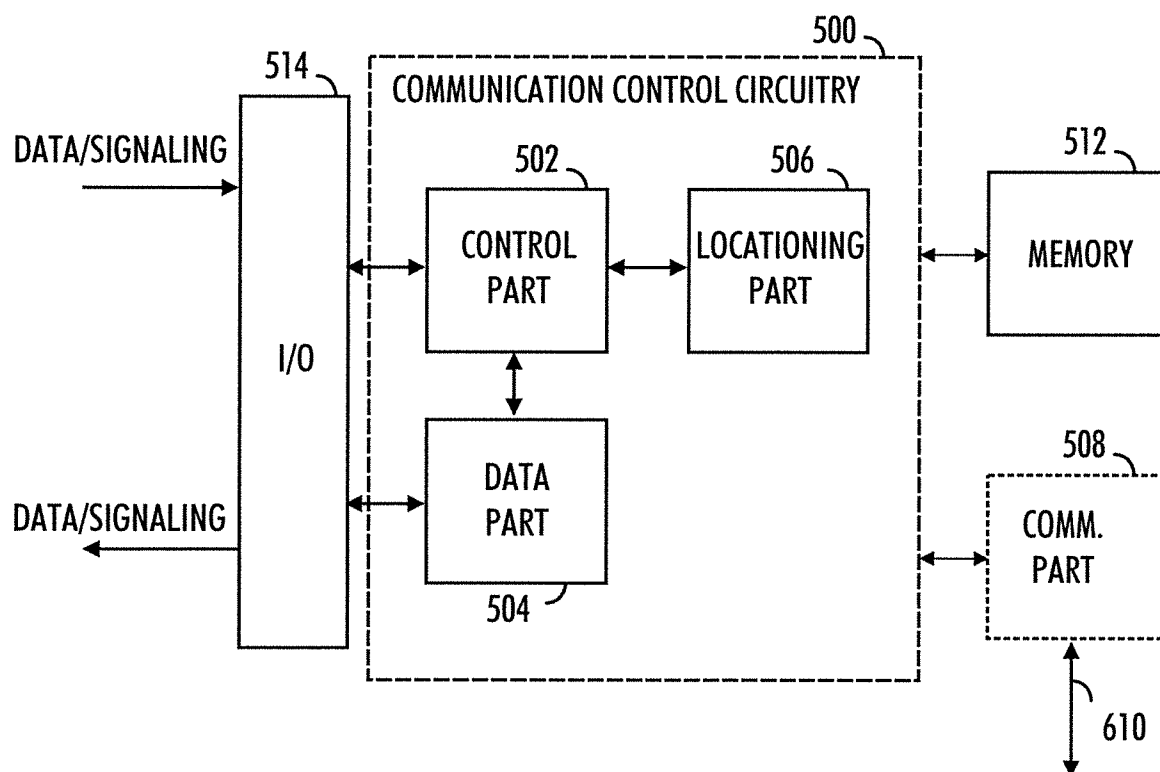


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2015/050353

A. CLASSIFICATION OF SUBJECT MATTER

See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: G01S, H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

FI, SE, NO, DK

Electronic data base consulted during the international search (name of data base, and, where practicable, search terms used)

EPO-Internal, WPI, INSPEC, COMPDX, XPIEE, XPI3E, XPESP, IEEE Xplore, Google Scholar

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 2014253295 A1 (ROBERTS, R. D. et al.) 11 September 2014 (11.09.2014) paragraphs [0029]-[0033], [0063], [0081], [0104], [0105]; Fig. 2 as above	1-9, 11-19 10, 20
Y	HOENE, C. et al.: "Four-way TOA and software-based trilateration of IEEE 802.11 devices", IEEE Int. Symp. on Personal, Indoor and Mobile Radio Communications, 15-18 September, 2008, Cannes, France, 6 pages. section III	10, 20
A	US 2005265503 A1 (ROFHEART, M. et al.) 01 December 2005 (01.12.2005) the whole document	1-20
A	US 2010128617 A1 (AGGARWAL, A. et al.) 27 May 2010 (27.05.2010) the whole document	1-20

☒ Further documents are listed in the continuation of Box C.
☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

17 September 2015 (17.09.2015)

Date of mailing of the international search report

21 September 2015 (21.09.2015)

Name and mailing address of the ISA/FI
Finnish Patent and Registration Office
P.O. Box 1160, FI-00101 HELSINKI, Finland
Facsimile No. +358 9 6939 5328

Authorized officer
Ari Viholainen
Telephone No. +358 9 6939 500

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2015/050353

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2008259896 A1 (SAHINOGLU, Z. et al.) 23 October 2008 (23.10.2008) the whole document	1-20

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2015/050353

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
US 2014253295 A1	11/09/2014	TW 201503737 A WO 2014164598 A1	16/01/2015 09/10/2014
.....			
US 2005265503 A1	01/12/2005	US 7574219 B2 AU 1157102 A AU 5882200 A AU 6127701 A AU 6127801 A AU 6300701 A AU 6300801 A AU 6457301 A AU 6457401 A AU 6457501 A AU 7481901 A AU 7482001 A AU 9453701 A AU 9454001 A AU 9698201 A CA 2456915 A1 CN 1555608 A CN 1311645 C EP 1284049 A1 EP 1295405 A1 EP 1302001 A2 EP 1415406 A1 JP 2003535557 A JP 4810050 B2 JP 2003535552 A JP 2005518111 A KR 20040047789 A KR 100910071 B1 US 6505032 B1 US 6700939 B1 US 6735238 B1 US 6834073 B1 US 2003054764 A1 US 6850733 B2 US 6859506 B1 US 2003053554 A1 US 6901112 B2 US 2003162498 A1 US 6909877 B2 US 2003096578 A1 US 6912372 B2 US 6925108 B1	11/08/2009 22/04/2002 11/12/2001 11/12/2001 11/12/2001 11/12/2001 11/12/2001 11/12/2001 11/12/2001 11/12/2001 11/12/2001 11/12/2001 22/04/2002 22/04/2002 22/04/2002 20/02/2003 15/12/2004 18/04/2007 19/02/2003 26/03/2003 16/04/2003 06/05/2004 25/11/2003 09/11/2011 25/11/2003 16/06/2005 05/06/2004 30/07/2009 07/01/2003 02/03/2004 11/05/2004 21/12/2004 20/03/2003 01/02/2005 22/02/2005 20/03/2003 31/05/2005 28/08/2003 21/06/2005 22/05/2003 28/06/2005 02/08/2005

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2015/050353

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		US 2003053555 A1	20/03/2003
		US 6931078 B2	16/08/2005
		US 6937646 B1	30/08/2005
		US 6965630 B1	15/11/2005
		US 6967993 B1	22/11/2005
		US 6975665 B1	13/12/2005
		US 7010056 B1	07/03/2006
		US 2004203600 A1	14/10/2004
		US 7039392 B2	02/05/2006
		US 7058414 B1	06/06/2006
		US 7079604 B1	18/07/2006
		US 2003067963 A1	10/04/2003
		US 7110473 B2	19/09/2006
		US 2002064245 A1	30/05/2002
		US 7177341 B2	13/02/2007
		US 2003161411 A1	28/08/2003
		US 7280607 B2	09/10/2007
		US 2006179311 A1	10/08/2006
		US 7289790 B2	30/10/2007
		US 2003174048 A1	18/09/2003
		US 7346120 B2	18/03/2008
		US 2004156445 A1	12/08/2004
		US 7394866 B2	01/07/2008
		US 2006029138 A1	09/02/2006
		US 7400669 B2	15/07/2008
		US 2005259720 A1	24/11/2005
		US 7408973 B2	05/08/2008
		US 2005129153 A1	16/06/2005
		US 7505538 B2	17/03/2009
		US 2005175076 A1	11/08/2005
		US 7508865 B2	24/03/2009
		US 2008136644 A1	12/06/2008
		US 7616676 B2	10/11/2009
		US 2005265428 A1	01/12/2005
		US 7643533 B2	05/01/2010
		US 2008247486 A1	09/10/2008
		US 7697630 B2	13/04/2010
		US 2010135358 A1	03/06/2010
		US 7903778 B2	08/03/2011
		US 2011122921 A1	26/05/2011
		US 8311074 B2	13/11/2012
		US 2010046586 A1	25/02/2010
		US 8451936 B2	28/05/2013
		US 2012320946 A1	20/12/2012
		US 8743927 B2	03/06/2014
		US 2006193372 A1	31/08/2006
		WO 0193434 A2	06/12/2001

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2015/050353

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		WO 0193441 A1	06/12/2001
		WO 0193442 A1	06/12/2001
		WO 0193443 A2	06/12/2001
		WO 0193444 A1	06/12/2001
		WO 0193445 A2	06/12/2001
		WO 0193446 A2	06/12/2001
		WO 0193482 A2	06/12/2001
		WO 0193519 A1	06/12/2001
		WO 0193520 A2	06/12/2001
		WO 0231986 A2	18/04/2002
		WO 0231988 A2	18/04/2002
		WO 0231998 A2	18/04/2002
		WO 0232066 A2	18/04/2002
		WO 03015302 A1	20/02/2003
.....			
US 2010128617 A1	27/05/2010	US 9125153 B2	01/09/2015
		CN 102217393 A	12/10/2011
		CN 102217393 B	10/12/2014
		EP 2368395 A1	28/09/2011
		EP 2368395 B1	24/07/2013
		JP 2012510056 A	26/04/2012
		JP 5619018 B2	05/11/2014
		KR 20110091879 A	16/08/2011
		KR 101262536 B1	08/05/2013
		TW 201027107 A	16/07/2010
		WO 2010065327 A1	10/06/2010
.....			
US 2008259896 A1	23/10/2008	US 7995644 B2	09/08/2011
		JP 2009505060 A	05/02/2009
		JP 4814324 B2	16/11/2011
		WO 2007021292 A2	22/02/2007
.....			

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2015/050353

CLASSIFICATION OF SUBJECT MATTER

IPC

G01S 11/02 (2010.01)

H04W 64/00 (2009.01)

G01S 5/14 (2006.01)