

645549

FORM 1

SPRUSON & FERGUSON

COMMONWEALTH OF AUSTRALIA
PATENTS ACT 1952
APPLICATION FOR A STANDARD PATENT

Canon Kabushiki Kaisha, of 3-30-2 Shimomaruko, Ohta-ku, Tokyo, JAPAN, hereby apply for the grant of a standard patent for an invention entitled:

A Recording Apparatus

which is described in the accompanying complete specification.

Details of basic application(s):-

<u>Basic Applic. No:</u>	<u>Country:</u>	<u>Application Date:</u>
095408/1990	JP	11 April 1990

The address for service is:-

Spruson & Ferguson
Patent Attorneys
Level 33 St Martins Tower
31 Market Street
Sydney New South Wales Australia

DATED this TENTH day of APRIL 1991

Canon Kabushiki Kaisha

By:



Registered Patent Attorney

REPRINT OF RECEIPT

3021060 10/04/91

TO: THE COMMISSIONER OF PATENTS
OUR REF: 160300
S&F CODE: 63055

SPRUSON & FERGUSON

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

DECLARATION IN SUPPORT OF A CONVENTION
APPLICATION FOR A PATENT

In support of the convention application made for a patent for an invention entitled:

A Recording Apparatus

I, Giichi Marushima, Managing Director, of Canon Kabushiki Kaisha, 3-30-2 Shimomaruko, Ohta-ku, Tokyo, Japan do solemnly and sincerely declare as follows:

1. I am authorised by Canon Kabushiki Kaisha, the applicant for the patent to make this declaration on its behalf.
2. The basic application as defined by Section 141 of the Act was made in Japan on 11 April 1990 by Canon Kabushiki Kaisha.
3. Kentaro Yano, Noribumi Koitabashi, Naoji Otsuka, Miyuki Matsubara, Hitoshi Sugimoto, Atsuchi Arai, Hiroshi Tajika and Hiromitsu Hirabayashi, of 1-26-1-104 Shitanoyacho, Tsurumi-ku, Yokohama-shi, Kanagawa-ken; 1-15-S-303 Higashiterao, Tsurumi-ku, Yokohama-shi, Kanagawa-ken; 1-7-12-201 Kodai, Miyamae-ku, Kawasaki-shi, Kanagawa-ken; 3-13-13 Asahicho, Nerima-ku, Tokyo; Canon-ryo, 1-5 Moegino, Midori-ku, Yokohama-shi, Kanagawa-ken; 4-10-31-104 Minamikase, Saiwai-ku, Kawasaki-shi, Kanagawa-ken; 119-4B Takatacho, Kohoku-ku, Yokohama-shi, Kanagawa-ken; 3-12-15 Hinominami, Konan-ku, Yokohama-shi, Kanagawa-ken all in Japan, respectively, are the actual inventors of the invention and the facts upon which the applicant is entitled to make the application are as follows:-

The said applicant is the assignee of the actual inventors.

4. The basic application referred to in paragraph 2 of this Declaration was the first application made in a Convention country in respect of the invention(s) the subject of the application.

DECLARED at Tokyo this 20th day of May 1991



 Giichi Marushima
 Managing Director
 CANON KABUSHIKI KAISHA

TO: THE COMMISSIONER OF PATENTS
 AUSTRALIA
 SZF REF:160300



AU9174331

(12) PATENT ABRIDGMENT (11) Document No. AU-B-74331/91
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 645549

- (54) Title
A RECORDING APPARATUS
- (51)⁵ International Patent Classification(s)
B41J 002/05
- (21) Application No. : 74331/91 (22) Application Date : 10.04.91
- (30) Priority Data
- (31) Number (32) Date (33) Country
2-95408 11.04.90 JP JAPAN
- (43) Publication Date : 26.03.92
- (44) Publication Date of Accepted Application : 20.01.94
- (71) Applicant(s)
CANON KABUSHIKI KAISHA
- (72) Inventor(s)
KENTARO YANO; HIROMITSU HIRABAYASHI; HIROSHI TAJIKA; ATSUSHI ARAI; HITOSHI
SUGIMOTO; MIYUKI MATSUBARA; NAOJI OTSUKA; NORIBUMI KOITABASHI
- (74) Attorney or Agent
SPRUSON & FERGUSON, GPO Box 3898, SYDNEY NSW 2001
- (56) Prior Art Documents
US 4910528
US 4544931
- (57) Claim
1. A recording apparatus using a recording head with a plurality of energy generating elements for generating heat for ejecting ink through a plurality of ejection outlets, the apparatus comprising:
- detecting means for detecting temperature of a plurality of regions of said recording head;
- means for calculating a difference of the detected temperatures;
- and
- control means for controlling a recording speed of said recording head responsive to an output of said calculating means.
32. A method of controlling recording on a recording material, the recording using an ink jet recording head having thermal energy generating elements for generating heat for discharging ink, said method comprising the steps of:
- detecting temperatures of a plurality of regions of the recording head;
- calculating a difference of the detected temperatures;
- discriminating whether to continue recording by said recording head or to interrupt recording in accordance with a result of the calculation by said calculating means; and
- resuming the recording operation after an interruption occurring as a result of said continuation or interruption discriminating step.

645549

FORM 10

S & F Ref: 160300

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

COMPLETE SPECIFICATION

(ORIGINAL)

FOR OFFICE USE:

Class Int Class

Complete Specification Lodged:
Accepted:
Published:

Priority:

Related Art:

Name and Address
of Applicant:

Canon Kabushiki Kaisha
3-30-2 Shimomaruko
Ohta-ku
Tokyo
JAPAN

Address for Service:

Spruson & Ferguson, Patent Attorneys
Level 33 St Martins Tower, 31 Market Street
Sydney, New South Wales, 2000, Australia

Complete Specification for the invention entitled:

A Recording Apparatus

The following statement is a full description of this invention, including the best method of performing it known to me/us

ABSTRACT OF THE DISCLOSURE

A recording apparatus having a recording head provided with plural ink discharging outlets for discharging ink includes a detector for detecting
5 temperature distribution in the recording head relating to recording operation of the recording head; and a controller responsive to an output of the detector to control a recording speed of the recording head.

10

15

20

25

A RECORDING APPARATUS

FIELD OF THE INVENTION AND RELATED ART

The present invention relates to a recording
5 apparatus having a recording head provided with plural
heat generating elements and for controlling the
recording apparatus in accordance with a temperature
distribution of the recording head, more particularly
to a recording apparatus such as printer, copying
10 machine or facsimile machine or other office equipment
using an ink jet recording process in which ink
discharging or ejection is decisive for the quality of
the record.

A thermal energy recording system using film
15 boiling of liquid is advantageous over the recording
system using piezoelectric elements and other thermal
energy recording using light energy or the like, and
therefore, is now put into practice. In a conventional
recording head not using heat generating elements, such
20 as a wire dot printer or other impact printers,
responsive of the recording head becomes slow due to
the heat generation by the solenoid or electromagnetic
coil for driving the wires or the like even to such an
extent of incapability of the recording. Solutions to
25 this problem have been proposed. For example, Japanese
Laid-Open Utility Model Application No. 70256/1980
proposes as a solution that bidirectional printing

operation is switched to a monodirectional printing to provide a longer heat emitting period, thus recovering the solenoid. Japanese Laid-Open Patent Application No. 157781/1982 proposes the same switching for the purpose of emitting the heat due to the exciting current to the coil for the driving wire.

The heat generation by the solenoid or the coil of this kind is due to the accumulation of the heat produced in a long period. The recording speed is not so high. Therefore, the temperature detected relates to the abnormally high temperature resulting in the incapability of the recording, not the temperature distribution.

As for the ink jet recording system, U.S. Patent NO. 4,544,931 has proposed that the recording speed, recording frequency and the carriage moving speed are controlled in accordance with the ambient temperature in order to avoid the influence of the ink viscosity change which depends on the external ambient temperature. U.S. Patent No. 4,910,528 proposes the recording conditions are determined on the basis of the temperature of the recording head using a heat generating element. For the detection of the recording head temperature, only one temperature sensor is used, and therefore, the temperature of a part of the recording head is used as a representative head temperature.

The present invention is directed to the variation in the ink ejections in an ink jet recording head having plural ink discharging outlets, and, in some cases, in which heat generating elements are disposed in liquid passages of the recording head. The variation is
5 caused by accumulation of thermal energy in the ink or the parts constituting the liquid passage with the result of different temperature regions. Generally, the thermal head used in a thermal transfer type recording system does not have an ink passage, and therefore, the heat accumulation is not a problem. However, it will be
10 a problem if a high quality and high cone gradation images are produced using small temperature differences.

Any case, the conventional temperature control of the recording head using a single temperature sensor is effective to prevent such a serious malfunction as to prevent the ejection can be avoided.
15 However, it is not effective to prevent non-uniform volumes of the liquid ejected from plural liquid passages in a so-called multi-nozzle head having plural ejection outlets and corresponding liquid passages. The description will be made as to one of the causes of the non-uniformity.

20 Referring first to Figure 6, there is shown the number of ejections from the respective ejection outlets when usual English sentences having 1500



characters are recorded in an ink jet recording apparatus having an ink jet recording head with 48 ejection outlet with the resolution of 360 dpi (dot per inch). As will be understood from this graph, the numbers of ejections are remarkably different in the usual English sentences. As will be understood from the principle of the ink jet ejection, the difference in the ejection numbers are the difference in the number of thermal energy applications. The difference results in the difference in the temperature of the ink in the liquid passages. Because of the temperature differences, the sizes of the bubbles produced by the heat becomes different even if the same voltages having the same pulse width are applied. As a result, the volume of the ejected liquid is different depending on the individual ejection outlets.

If the volume of the ejections are different, the following problems arise. The volume of the ejection concerns the size of the dot recorded on the recording material.

As shown in Figure 7, if there are large volume ejection outlets and small volume ejection outlets simultaneously, the degree of overlapping between adjacent dots are different. When, for example, the tone gradation is expressed as the number of dots, the uniform density area may be recorded as non-uniform area, or a partial dark stripe will result,

or on the contrary, light stripe will be conspicuous.

SUMMARY OF THE INVENTION

Accordingly, it is a principal object of the present invention to provide an ink jet recording apparatus and method which overcomes, or
5 at least reduces, the abovementioned disadvantages of the prior art.

12
8
6

According to a first aspect of the present invention, there is provided a recording apparatus using a recording head with a plurality of energy generating elements for generating heat for ejecting ink through a plurality of ejection outlets, the apparatus comprising:

- 5 detecting means for detecting temperature of a plurality of regions of said recording head;
 means for calculating a difference of the detected temperatures;
 and
 control means for controlling a recording speed of said recording
10 head responsive to an output of said calculating means.

According to a second aspect of the invention, there is provided a recording apparatus using a recording head provided with a plurality of energy generating elements for generating heat for discharging ink through corresponding outlets, the apparatus comprising:

- 15 detecting means for detecting temperatures of a plurality of regions of the recording head from duties of driving signals supplied to the energy generating elements in said plurality of regions of the recording head;
 means for calculating a difference of the detected temperatures
20 of different regions of the recording head; and
 control means responsive to an output of said calculating means to provide uniform temperature distribution of the recording head by controlling the said duties of the driving signals.



According to a third aspect of the present invention, there is provided a method of controlling recording on a recording material, the recording using an ink jet recording head having thermal energy generating elements for generating heat for discharging ink, said

5 method comprising the steps of:

detecting temperatures of a plurality of regions of the recording head;

calculating a difference of the detected temperatures;

10 discriminating whether to continue recording by said recording head or to interrupt the recording in accordance with a result of the calculation by said calculating means; and

resuming the recording operation after an interruption occurring as a result of said continuation or interruption discriminating step.

BRIEF DESCRIPTION OF THE DRAWINGS

15 Embodiments of the invention will now be described with reference to the accompanying drawings, in which:

Figure 1 is a perspective view of an example of an ink jet recording apparatus to which the present invention is applicable.

20 Figure 2 is a block diagram of a control system for an ink jet recording apparatus according to an embodiment of the present invention.

Figure 3 is a flow chart illustrating an example of recording operation control process steps.

Figures 4 and 5 are perspective views of a recording head according to another embodiment of the present invention.

Figure 6 is a graph showing variation in the
5 ejection numbers.

Figure 7 illustrates the dot pattern formation when the ejection volume are different.

Figure 8 illustrates the temperature distribution discrimination on the basis of record
10 information.

Figure 9 is a flow chart responsive to the data from a host apparatus of Figure 2.

Figure 10 shows a sub-routine for discriminating duty ratio in the flow chart of Figure
15 9.

Figure 11 shows a sub-routine for discriminating total duty in the flow chart of Figure
9.

20 DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to the accompanying drawings, the embodiments of the present invention will be described.

Embodiment 1

Referring to Figure 1, there is shown an ink
25 jet recording apparatus to which the present invention is applicable. The description will be made first as to the entire structure of the recording apparatus.

Reference numeral 1 designates a recording material (recording sheet) of paper or plastic sheet or the like. Plural recording sheets 1 are accommodated in a cassette or the like and are fed out by a feeding roller not shown in Figure 1, one-by-one. Fed out sheet is conveyed in a direction indicated by an arrow A by a first pair of rollers and a second pair of rollers which are driven by respective stepping motors (not shown), the first and second pairs of rollers being disposed at a predetermined interval.

An ink jet recording head 5 effects recording on the recording sheet 1. The ink is supplied from an ink cartridge 10 and is discharged or ejected through ejection outlets of the ink jet recording head in accordance with image signals. The recording head 5 and the ink cartridge 10 are carried on a carriage 6 which is connected with a carriage motor 23 through a belt 7 and pulleys 8a and 8b. Therefore, the carriage motor 23 reciprocates the carriage 6 along a guide shaft 9.

The recording head 5 moves in the direction B, during which it ejects the ink onto the recording sheet 1 in accordance with the image signal. As required, the recording head 5 returns to its home position and is subjected to a recovery operation by recovery system means 2 so that the clogging of the ejection outlets or the like is removed, thus improving the ejection

condition. The feeding rollers 3 and 4 are driven to feed the recording sheet 1 by one line in the direction A. By repeating these operations, a desired recording is effected on the recording sheet 1. The recovery system 2 includes a cap engageable with the ejection outlet side surface of the recording head 5 and a pump communicating with the cap to apply sucking force to the ejection side surface.

The description will be made as to the control system for driving the above-described parts.

Figure 2 shows an example of the control system, which comprises CPU 20a in the form of a microprocessor or the like, a ROM 20b for storing a control program for the CPU 20a or various data, a RAM 20c used as a working area of the CPU 20a and for temporarily storing various data. They are included in a controller 20. The control system further includes an interface 21, an operation panel 22, various motors (carriage driving motor 23, sheet feeder driving motor 24, a first pair roller driving motor 25 and a second pair roller driving motor 26), drivers 27 for driving the motors and a recording head driver 28.

The controller 20 receives various information (character pitch, character font or the like) from the operation panel 22 through the interface 21 and receives the image signal from an external apparatus 29. The controller 20 outputs on and off signals for

driving various motors 23 - 26 and the image signals through the interface 21, so that various parts are driven in accordance with the image signals.

Information of number of ejections through
5 each of the ejection outlets per unit time is detected by a cooperation of a timer 30 and a counter 32, and is supplied to the controller 20 through the interface 21.

In the above structures, the increase of the ink in the liquid passage and adjacent thereto is
10 significantly different depending on the number of ejections per unit type. In this embodiment, however, the control is carried out so that the temperature rise is within a predetermined limit. The control for the suppression of the temperature rise will be described
15 together with experimental data.

A recording head having the resolution power of 400 dpi (dot per inch) and having 128 ejection outlet was operated at the recording speed of 4000 dot per sec for each of ejection outlets. The following
20 has been found:

(1) When all of the ejection outlets are driven throughout one line (approximately 200 mm), the temperature of the ink adjacent the liquid passage rises by approximately 10 °C ($\Delta T = 10$ °C).

25 This results in approximately 10 % increase in the reflection image density on the recorded image as compared with the reflection image density when the

temperature does not rise.

(2) When the temperature-raised head (ink) is left undriven, the temperature returns to the original level (equivalent to the external temperature).

5 (3) If the recording operation is continued with the increased temperature, the recording head (ink) temperature saturates on the basis of the balance between the rising factor by the recording and the lowering factor due to the heat emission to the
10 ambience.

It is assumed that the change in the reflection density of the record is to be within 10 %. Then, ejection interval N (dot per unit time) resulting in $\Delta T \leq 10^\circ \text{C}$ is determined in consideration of the
15 balance between the raising factor and the lowering factor. The interval N is stored in the ROM 20b. Then, the comparison is made between the interval N and the ejection number data for each of the nozzles supplied from the counter 32 for every unit times. If
20 one or more ejection outlets is such that the ejection numbers per unit time exceeds the interval N, the recording speed is lowered. By carrying out such a control, that is, by controlling the ejection intervals, the temperature rise adjacent the liquid
25 passages can be suppressed.

Figure 3 shows an example of recording steps of the recording apparatus having the above-described

structure. First, the recording instruction is produced to step S1. Then, the timer 30 and the counter 32 are reset at step S2, and the recording operation is started at step S3. During the operation, the counter 32 counts the number of ejections for each of the ejection outlets at step S4. The controller 20 receives information from the timer 30 to monitor passage of the unit time (step S5). If not, and if the recording instructions for the next line is produced (step S6), the operation returns to step S3, by which the recording operation is carried out again. If the recording instructions are not produced, the operation returns to step S5, by which whether the unit time is passed or not is checked continuously.

15 If the unit time elapses, the comparison is made at step S7 between the predetermined reference ejection interval N and the ejection numbers for each of the ejection outlet. If no ejection outlet ejects more than N, the operation returns to step S1 and waits for the recording instruction. If there is an ejection outlet ejected more than N times, the recording speed is lowered (step S8) in accordance with a predetermined table (interruption not longer than 500 msec) in order to avoid the difference in the ejection volumes from respective ejection outlets as a result of increase of the temperature rise. Then, the operation returns to step S1 and waits for the recording

instructions.

The lowering of the recording speed is effected actually by reducing the recording ejection frequency (longer ejection intervals) and by lowering
5 the scanning speed of the recording head in the serial type printer as in this embodiment. If, however, the present invention is applied to a so-called full-multi-type recording head having ejection outlets covering the entire recording width, the lowering of the
10 recording speed is effected by reducing the ejection frequency and by decreasing the recording material feeding speed.

Because of the above-described control, no ejection outlet ejects at the intervals resulting in
15 the temperature rise, and therefore, the variation in the bubble formation or the bubble size becomes uniform over the entire liquid passages. Accordingly, the image density non-uniformity such as black or white striped can be prevented thus providing the high
20 quality image.

The ejection interval N for balancing the temperature rise and the temperature lowering may be influenced by the temperature of the ambience in which the recording apparatus is installed. In consideration
25 of this, the interval N may be set as a function of external temperature t ($f(t) = Nt$).

Referring back to Figure 2, the recording

signal supplied from the external apparatus 29 is supplied to the RAM 20c (receiving buffer) of the controller 20 through the interface 21. The recording signal (code signal) is converted to heating signals
5 for the electrothermal transducer corresponding to each of the liquid passages. In this embodiment, the control is started after the temperature of the ink rises adjacent the liquid passage as a result of ejections. However, it is a possible alternative that
10 the counting operation is effected when the record signal is converted to the heating signals, and the proper recording speed is selected before the temperature rise actually occurs. In addition, the previous ejection data per unit time or the further
15 previous ejection number data may be taken into account for the recording speed control.

In any case, on the basis of the data relating to the number of recorded dots or ejections, the temperature distribution of the ink adjacent the liquid
20 passage is detected. In accordance with the detection, the recording speed is controlled so as to control the ejection intervals. By doing so, the degree of the temperature rise of the ink adjacent the liquid passages. Thus, the difference in the volume of the
25 ejections among the ejection outlets can be reduced.

As a result, irrespective of the pattern of the record, the density non-uniformity such as black stripes, white

stripes or the like on the recorded image can be prevented, thus accomplishing a high quality image record.

According to this embodiment, the control
5 system is responsive to such a small non-uniformity of the temperature distribution as is lower than the conventional abnormal temperature, and therefore, the long non-recording period required for the temperature to return to the normal temperature is not required.
10 In addition, the non-uniformity in the record which has conventionally been produced until the abnormal temperature is reached, can be significantly improved. Therefore, the good images can be produced.

Embodiment 2

15 Another embodiment having different ink temperature distribution in the head is detected, will be described.

In the first embodiment, the ink temperature in the passage is predicted on the basis of the count
20 of ejection numbers for each of the ejection outlets per unit time, but the temperature may be directly detected for each of the liquid passages.

Figure 4 illustrates the liquid passages in a multi-nozzle type recording head. When a driving
25 signal is applied between points X and Y in Figure 4, the electrothermal transducer 34 generates heat, and the generated thermal energy is transferred to the ink

I in the passage 33 through a protection coating 36. Then, a film boiling occurs to produce a bubble B, upon which a droplet of ink D is ejected through the ejection or discharge outlet. A temperature sensor 35 of resistance change detection type is disposed at a position sufficiently close to the liquid passage but without thermal influence from the electrothermal transducer 34. The voltage drop through the temperature sensor 35 is detected between the points Y and Z, so that the ink temperature is detected. This structure is provided for each of the liquid passages, and therefore more accurate information on the temperature can be obtained. On the basis of the detections, the temperature distribution of the head can be correctly discriminated. On the basis of the detected temperature distribution, the recording speed is controlled in the same manner as described above. With the conventional temperature detection using a single temperature sensor, the temperature change of only apart of the passage or passages of a great number of passages, and on the basis of that, the entirety is controlled in the same manner. Therefore, the control error was rather significant. Although the very significant malfunction such as improper ejection can be avoided, but the density non-uniformity or the like due to the difference in the ejection volumes is not dealt with.

According to this embodiment, however, the recording head is divided into the minimum areas to detect the temperatures, more particularly, to each of the liquid passages for the temperature detection.

- 5 Therefore, the difference in the ejection volume of the ink can be minimized, thus accomplishing the high quality image record.

In this embodiment, the temperature detection is effected for all of the respective liquid passages.

- 10 However, depending on the use of the recording apparatus, more particularly, if, for example, the recording apparatus is used to record a list of a program, or the recording apparatus is a character mainly recording documents, the ejection outlets
15 through which the ejections are effected at high frequency and the ejection outlets through which the ejections are effected at lower frequency can be easily predicted, as will be understood from Figure 6.

- Therefore, the temperature may be detected at only
20 proper parts such as two or more positions representative of the temperature distribution. In this case, the detection of the temperature is not inevitable, but the duty of the signal pulses may replace. As a further alternative, if the main purpose
25 of the control is directed to provide better connection between dots, the comparison may be made between the ejection outlets numbers 1 - 8 and the ejection outlets

numbers 41 - 48 in Figure 6. As for the entire image density, the comparison may be made between the ejection outlets numbers 13 - 16 and the ejection outlets numbers 35 - 38. What are compared are not
5 limited to the above-mentioned.

When the recording operation is effected for each of a recording width by serial scans, there is a tendency that the density non-uniformity is particularly conspicuous at the connection between the
10 recording widths. This is because in the serial scan, there exists a connection line on the recorded image between the line recorded by the bottom ejection outlet in the (n)th scan and the line recorded by the top ejection outlet of the (n+1)th scan. If there is a
15 temperature difference between the bottom ejection outlet and the top ejection outlet, the density non-uniformity occurs for the reasons described hereinbefore. In consideration of this, as shown in Figure 5, two temperature sensors (temperature sensor
20 35 of a resistance change detecting type) at the opposite ends of the array of the liquid passages 33 on the base plate 37, and the voltage drop of the temperature sensor is detected by the voltage between the points Y' and Z'. If the temperature difference
25 detected exceeds a predetermined level, the above-described control is carried out.

It is a possible alternative that the

temperature distribution is detected by a combination of temperature detector using the ejection number per unit time according to the first embodiment and the temperature detection by the temperature sensor. This is particularly advantageous when, for example, it is difficult to dispose the temperature sensor adjacent to the liquid passages because of limitations resulting from the structure of the head or the like. Further, it is possible that the temperature of a particular region may be correctly detected by using both of the temperature sensor and the ejection number.

Embodiment 3

A further embodiment for further effectively preventing the temperature rise of the ink temperature in the nozzles, will be described. In the second embodiment, the temperature raising factor relating to the ejection and the temperature lowering factor resulting from the heat emission are balanced by changing the recording speed, thus controlling the ejection volume through the ejection outlets. The control is particularly effective under the abnormal temperature. However, the abnormal temperature is exceeded, the recording operation can be resumed after a period of time which is shorter than in the conventional apparatus. However, it may exceeds 500 msec as the case may be. the third embodiment relates to the mode when the abnormal temperature is exceeded.

This embodiment uses the recovery system 2 shown in Figure 1.

Temperature rise due to the ejection is usually limited within the neighborhood of the liquid passage, and it is very seldom that the temperature rise extends to the ink within the ink cartridge 10. In consideration of the fact, when the necessity for the measure against temperature rise is detected by the temperature detecting means on the basis of the data relating to the number of ejections as in the first embodiment and the temperature detecting means as in the second embodiment, the carriage 4 is returned to the recover position, and the sucking operation is carried out, by which the high temperature ink is sucked out from the recording head, thus refreshing the liquid passage. Then, the temperature is quickly lowered with certainty.

Therefore, foregoing embodiment system and the third embodiment system may be both used with proper switching system to control the temperature of the ink adjacent the ink passage.

The recovery system may be the one provided in the ink jet recording apparatus for the purpose of recovering the recording head from clogging of the ejection outlets or the like. In an example of such a recovery system, the recovery system 2 is movable toward and away from the recording head 5. It

comprises capping means for hermetically covering the front surface of the recording head at its front position and pump means for sucking the ink out of the ink ejection outlets through the capping means. By
5 operating the pump while the recording head is hermetically covered by the capping means, a vacuum is produced within the capping means, thus sucking the ink out through the nozzle.

Figure 8 is a block diagram of a drive control
10 system 200 having a different structure. It comprises a usual central processing unit 204. In this embodiment, two regions of the recording head 5, that is a first region 51 and a second region 52 are the objects on the basis of which the temperature
15 distributions are discriminated. In this example, the first and second portions are determined for the respective blocks in the block driving type system. By selecting the block unit as the control object, the accuracy of the duty ratio is assured, and therefore,
20 preferable. The control objects may be selected for every two or three blocks.

Duty discriminating means 201 discriminates the drive signals supplied to the first recording region 51, it detects the duty per unit type and the
25 total duty. Similarly, a discriminating means 202 discriminates the driving signal supplied to the second recording region 52. A stopping period discrimination

means 203 receives from the central control means 204 the data relating to the discrimination of the duty determined by the means 201 and 202 and determines the stop period in accordance with the total duty and the
5 duty ratio. The duty discriminating means are provided exclusively for the first and second recording regions, respectively, and therefore, the data required can be read in as desired. It is possible to supply the temperature data by the respective sensors for the
10 first and second recording regions to the duty discriminating means. The stopping or interruption period is extremely small as compared with the normal ink jet recording speed of 200 mm/sec - 400mm/sec.

Referring to Figures 2, 9, 10 and 11, more
15 particular embodiments will be described. In this embodiment, the control is carried out to avoid the connection stripe between adjacent main scans in a serial printer. More particularly, the temperature difference between the top ejection outlet and the
20 bottom ejection outlet which is a main cause of the stripe at the connection.

	duty ratio	<1.5	≥ 1.5	≥ 2.0
	total-duty		<2.0	
5	<10 %	-	100 msec	200 msec
	≥ 10 % <50 %	100 msec	200 msec	300 msec
	≥ 50 %	200 msec	300 msec	400 msec

In operation, when the printing code is supplied at step St1, the code is converted to a binary ejection codes at step St2. Referring to Figure 2, this will be described in detail. The printing code supplied from the external apparatus 100 such as a personal computer or the like is stored in a signal receiving buffer 103 in a gate array 101 for duty calculation. The print codes stored in the receiving buffer 103 is converted to binary ejection codes representing ejection/non-ejection for each of the nozzles, and the converted codes are supplied to the print buffer 102. At this time, the ejection duty (du) for the top half nozzles is stored in a line duty input buffer 105 in Figure 2, whereas the ejection duty (dd) for the bottom half nozzles is stored in a line input buffer 2 (104) of Figure 2 (at steps St3 and St4). Then, the printing operation is started at step St5. The CPU 20a can access to the two line input buffers 1 and 2 at any timing so that the ejection duty for the



top half nozzles and the ejection duty for the bottom half nozzles can be detected.

After printing one line, a duty ratio calculating routine makes its calculation (x_1), and a
5 total-duty calculating routine makes calculation (x_2),
at steps St6 and St7. On the basis of the
calculations, the carriage resting period (t) is
calculated. On the basis of this, the scanning
operation of the carriage is controlled. More
10 particularly, in this embodiment, the carriage resting
period (t) is calculated by the double regression
function:
$$t = ax_1 + bx_2 + c$$

where a , b and c are constants, and $a = b = 100$ and $c =$
15 0, in this embodiment; and x_1 and x_2 are variables.

The duty ratio (x_1) is calculated in the
following manner by the duty ratio calculating routine.
If the duty ratio between the top half nozzle and the
bottom half nozzle is less than 1.5, $x_1 = 0$; when the
20 duty ratio is not less than 2.0, $x_1 = 2$; otherwise, x_1
 $= 1$. In other words,

when $du > dd$, and $du/dd < 1.5$, or
 $dd > du$, and $dd/du < 1.5$
 $x_1 = 0$;
25 when $du > dd$, and $du/dd \geq 2.0$, or
 $dd > du$, and $dd/du \geq 2.0$,
 $x_1 = 2$;

when $dd > du$, and $1.5 \leq dd/du < 2.0$,

$x1 = 1$.

The total duty ($x2$) is calculated by the total-duty calculating routine in the following manner.

5 If a sum of the duty for the top half nozzle and the duty for the bottom half nozzle is not more than 10 %, $x2 = 0$; if it is not less than 50 %, $x2 = 2$; and otherwise, $x2 = 1$. In other words,

when $du + dd < 0.1$, $x2 = 0$

10 when $du + dd \geq 0.5$, $x2 = 2$

when $0.1 \leq du + dd < 0.5$, $x2 = 1$

In the serial type ink jet recording apparatus wherein the recording head scans in the main scan direction, the carriage resting period (t) for

15 suppressing the connection stripe between scanning lines increases with the duty ratio between the upper nozzles and the lower nozzles, since then the difference in the ejection volumes from the upper nozzles and lower nozzles is larger. Therefore, the
20 longer time is required for decreasing the temperature.

If the total duty is large, the heat accumulation in the head increases with the result of larger ejection volume. If a long print rest period occurs after large heat accumulation (transfer of the
25 image or the like), the non-uniform print occurs between before and after the rest.

In the regression function, the carriage

resting period (t) is determined. The constants a and b represents the weighing of the variables, in this embodiment, they are equivalent (=100).

In the description of the embodiment, the
5 temperature of the head is controlled using the rest
period of the carriage. However, the temperature may
be controlled by one or more of the head driving
frequency, the printing direction, the sucking recovery
operation or the like. In addition, in the foregoing
10 description, the duty detection is carried out for the
top half nozzles and the bottom half nozzles. It is a
possible alternative that a part of the top half nozzle
and a part of the bottom half nozzle may be used. In
addition, three or more nozzles may be detected for the
15 duty detection. In the description, the carriage
resting period is calculated by the regression function.

The present invention is particularly suitably
usable in an ink jet recording head and recording
apparatus wherein thermal energy by an electrothermal
20 transducer, laser beam or the like is used to cause a
change of state of the ink to eject or discharge the
ink. This is because the high density of the picture
elements and the high resolution of the recording are
possible.

25 The typical structure and the operational
principle are preferably the ones disclosed in U.S.
Patent Nos. 4,723,129 and 4,740,796. The principle and

structure are applicable to a so-called on-demand type recording system and a continuous type recording system. Particularly, however, it is suitable for the on-demand type because the principle is such that at least one driving signal is applied to an electrothermal transducer disposed on a liquid (ink) retaining sheet or liquid passage, the driving signal being enough to provide such a quick temperature rise beyond a departure from nucleation boiling point, by which the thermal energy is provided by the electrothermal transducer to produce film boiling on the heating portion of the recording head, whereby a bubble can be formed in the liquid (ink) corresponding to each of the driving signals. By the production, development and contraction of the the bubble, the liquid (ink) is ejected through an ejection outlet to produce at least one droplet. The driving signal is preferably in the form of a pulse, because the development and contraction of the bubble can be effected instantaneously, and therefore, the liquid (ink) is ejected with quick response. The driving signal in the form of the pulse is preferably such as disclosed in U.S. Patents Nos. 4,463,359 and 4,345,262. In addition, the temperature increasing rate of the heating surface is preferably such as disclosed in U.S. Patent No. 4,313,124.

The structure of the recording head may be as

shown in U.S. Patent Nos. 4,558,333 and 4,459,600 wherein the heating portion is disposed at a bent portion, as well as the structure of the combination of the ejection outlet, liquid passage and the

5 electrothermal transducer as disclosed in the above-mentioned patents. In addition, the present invention is applicable to the structure disclosed in Japanese Laid-Open Patent Application No. 123670/1984 wherein a common slit is used as the ejection outlet for plural

10 electrothermal transducers, and to the structure disclosed in Japanese Laid-Open Patent Application No. 138461/1984 wherein an opening for absorbing pressure wave of the thermal energy is formed corresponding to the ejecting portion. This is because the present

15 invention is effective to perform the recording operation with certainty and at high efficiency irrespective of the type of the recording head.

The present invention is effectively applicable to a so-called full-line type recording head

20 having a length corresponding to the maximum recording width. Such a recording head may comprise a single recording head and plural recording head combined to cover the maximum width.

In addition, the present invention is

25 applicable to a serial type recording head wherein the recording head is fixed on the main assembly, to a replaceable chip type recording head which is connected

electrically with the main apparatus and can be supplied with the ink when it is mounted in the main assembly, or to a cartridge type recording head having an integral ink container.

5 The provisions of the recovery means and/or the auxiliary means for the preliminary operation are preferable, because they can further stabilize the effects of the present invention. As for such means, there are capping means for the recording head,
10 cleaning means therefor, pressing or sucking means, preliminary heating means which may be the electrothermal transducer, an additional heating element or a combination thereof. Also, means for effecting preliminary ejection (not for the recording
15 operation) can stabilize the recording operation.

As regards the variation of the recording head mountable, it may be a single corresponding to a single color ink, or may be plural corresponding to the plurality of ink materials having different recording
20 color or density. The present invention is effectively applicable to an apparatus having at least one of a monochromatic mode mainly with black, a multi-color mode with different color ink materials and/or a full-color mode using the mixture of the colors, which may
25 be an integrally formed recording unit or a combination of plural recording heads.

Furthermore, in the foregoing embodiment, the

irk has been liquid. It may be, however, an ink material which is solidified below the room temperature but liquefied at the room temperature. Since the ink is controlled within the temperature not lower than 30
5 °C and not higher than 70 °C to stabilize the viscosity of the ink to provide the stabilized ejection in usual recording apparatus of this type, the ink may be such that it is liquid within the temperature range when the recording signal is the present invention is applicable
10 to other types of ink. In one of them, the temperature rise due to the thermal energy is positively prevented by consuming it for the state change of the ink from the solid state to the liquid state. Another ink material is solidified when it is left, to prevent the
15 evaporation of the ink. In either of the cases, the application of the recording signal producing thermal energy, the ink is liquefied, and the liquefied ink may be ejected. Another ink material may start to be solidified at the time when it reaches the recording
20 material. The present invention is also applicable to such an ink material as is liquefied by the application of the thermal energy. Such an ink material may be retained as a liquid or solid material in through holes or recesses formed in a porous sheet as disclosed in
25 Japanese Laid-Open Patent Application No. 56847/1979 and Japanese Laid-Open Patent Application No. 71260/1985. The sheet is faced to the electrothermal

transducers. The most effective one for the ink materials described above is the film boiling system.

The ink jet recording apparatus may be used as an output terminal of an information processing
5 apparatus such as computer or the like, as a copying apparatus combined with an image reader or the like, or as a facsimile machine having information sending and receiving functions.

As described in the foregoing, according to
10 the present invention, the temperature distribution of the recording head is predicted, discriminated or detected, and in response thereto, the recording speed is controlled. Therefore, the variation in the volume of the ink droplet per one dot ejected from an ejection
15 outlet can be reduced, and therefore, the uniform and therefore high quality images can be produced.

While the invention has been described with reference to the structures disclosed herein, it is not confined to the details set forth and this application
20 is intended to cover such modifications or changes as may come within the purposes of the improvements or the scope of the following claims.

The claims defining the invention are as follows:

1. A recording apparatus using a recording head with a plurality of energy generating elements for generating heat for ejecting ink through a plurality of ejection outlets, the apparatus comprising:

detecting means for detecting temperature of a plurality of regions of said recording head;

means for calculating a difference of the detected temperatures; and

control means for controlling a recording speed of said recording head responsive to an output of said calculating means.

2. An apparatus according to Claim 1, wherein said plurality of regions include at least end-most regions of said recording head.


3. An apparatus according to Claim 1, wherein said detecting means detects the temperatures by predicting them on the basis of duties of driving signals for each energy generating element of the recording head per unit time in respective regions thereof.

4. An apparatus according to Claim 1, wherein said detecting means detects the temperatures by predicting them on the basis of duties of total driving signals for the plurality of energy generating elements of the recording head in all the regions thereof.

5. An apparatus according to Claim 1, wherein said detecting means detects the temperatures by predicting them on the basis of duties of total driving signals for the plurality of energy generating elements of the recording head and driving signals for each energy generating element of the recording head per unit time in respective regions thereof.

6. An apparatus according to Claim 1, wherein said detecting means detects the temperature distribution on the basis of the number of ink ejections in a recording operation for the outlets of each region.

7. An apparatus according to Claim 1, wherein said detecting means detects a temperature distribution by detecting temperatures in each of the regions.



rhk/0914E

8. An apparatus according to Claim 1, wherein said detecting means includes means for detecting the temperature distribution on the basis of the number of ink ejections in a recording operation for the outlets of each region, and on the basis of temperatures in the respective regions.

9. An apparatus according to Claim 1, further comprising discharging means for forcibly discharging the ink through the ejection outlets by application of pressure, and second control means for driving said discharging means in response to an output of said calculating means.

10. An apparatus according to Claim 1, wherein said recording head has electrothermal transducers for the respective discharging outlets, the electrothermal transducers producing thermal energy to produce film boiling of the ink to discharge the ink for the recording operation.

11. An apparatus according to Claim 1, wherein said control means interrupts the recording operation for not more than 500 msec in accordance with an output of said calculating means.

12. An apparatus according to Claim 1, wherein said control means interrupts recording operation to control recording speed.

13. An apparatus according to Claim 1, wherein said control means controls a driving frequency to control recording speed.

14. An apparatus according to Claim 1, wherein said control means controls a recording direction to control recording speed.

15. An apparatus according to Claim 1, wherein said recording apparatus is used as an output terminal of an information processing apparatus.

16. An apparatus according to Claim 1, wherein said recording apparatus is used in a copying apparatus having an image reader.

17. An apparatus according to Claim 1, wherein said recording apparatus is used as a facsimile machine having information sending and receiving functions.

18. A recording apparatus using a recording head provided with a plurality of energy generating elements for generating heat for discharging ink through corresponding outlets, the apparatus comprising:



detecting means for detecting temperatures of a plurality of regions of the recording head from duties of driving signals supplied to the energy generating elements in said plurality of regions of the recording head;

means for calculating a difference of the detected temperatures of the recording head; and

control means responsive to an output of said calculating means to provide uniform temperature distribution of the recording head by controlling the said duties of the driving signals.

19. An apparatus according to Claim 18, wherein said plurality of regions include at least end-most regions of said recording head.

20. An apparatus according to Claim 18, wherein said detecting means detects the duties of driving signals for each energy generating element of the recording head per unit time in respective regions thereof.

21. An apparatus according to Claim 18, wherein said detecting means detects the duties of total driving signals for the plurality of energy generating elements of the recording head in all regions thereof.

22. An apparatus according to Claim 18, wherein said detecting means detects the duties of total driving signals for the plurality of energy generating elements of the recording head and driving signals for each energy generating element of the recording head per unit time in respective regions thereof.

23. An apparatus according to Claim 18, wherein said recording head has electrothermal transducers for the respective discharging outlets, the electrothermal transducers producing thermal energy to produce film boiling of the ink to discharge the ink for the recording operation.

24. An apparatus according to Claim 18, wherein said control means interrupts the recording operation to control the temperature distribution.

25. An apparatus according to Claim 18, wherein said control means controls a driving frequency to control the temperature distribution.

26. An apparatus according to Claim 18, wherein said control means controls a recording direction to control the temperature distribution.



27. An apparatus according to Claim 18, wherein said control means discharges ink through said outlets by pressure application to control the temperature distribution.

28. An apparatus according to Claim 18, wherein the temperature distribution is controlled by combination of interrupting recording operation, controlling a driving frequency, controlling a recording direction and discharging ink through said outlets by pressure application to control the temperature distribution.

29. An apparatus according to Claim 18, wherein said recording apparatus is used as an output terminal of an information processing apparatus.

30. An apparatus according to Claim 18, wherein said recording apparatus is used in a copying apparatus having an image reader.

31. An apparatus according to Claim 18, wherein said recording apparatus is used as a facsimile machine having information sending and receiving functions.

32. A method of controlling recording on a recording material, the recording using an ink jet recording head having thermal energy generating elements for generating heat for discharging ink, said method comprising the steps of:

detecting temperatures of a plurality of regions of the recording head;

calculating a difference of the detected temperatures;

discriminating whether to continue recording by said recording head or to interrupt recording in accordance with a result of the calculation by said calculating means; and

resuming the recording operation after an interruption occurring as a result of said continuation or interruption discriminating step.

33. A method according to Claim 32, wherein said thermal energy generating elements are electrothermal transducer elements for producing bubbles of ink in response to recording signals.

34. A method according to Claim 32, said continuation or interruption discriminating step is performed on the basis of duty ratio per unit type of the recording signals supplied to the predetermined plurality of regions of the recording head and a total duty supplied to the plurality of regions.

35. A method according to Claim 32, the interruption period is not more than 500 msec.

36. A recording apparatus substantially as hereinbefore described with reference to the drawings.

37. A method of controlling recording on a recording material substantially as hereinbefore described with reference to the drawings.

DATED this TWELFTH day of NOVEMBER 1993

Canon Kabushiki Kaisha

Patent Attorneys for the Applicant
SPRUSON & FERGUSON

0914E

0914E

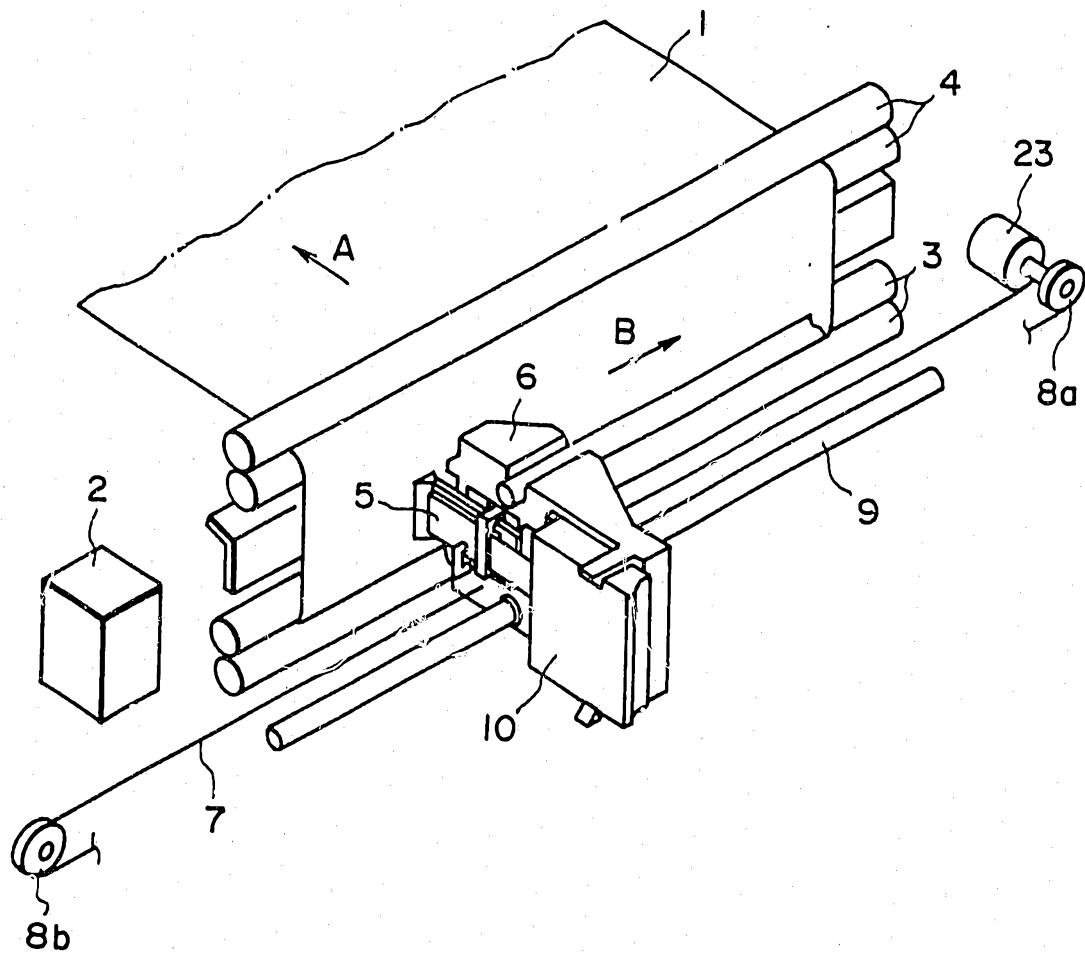


FIG. 1

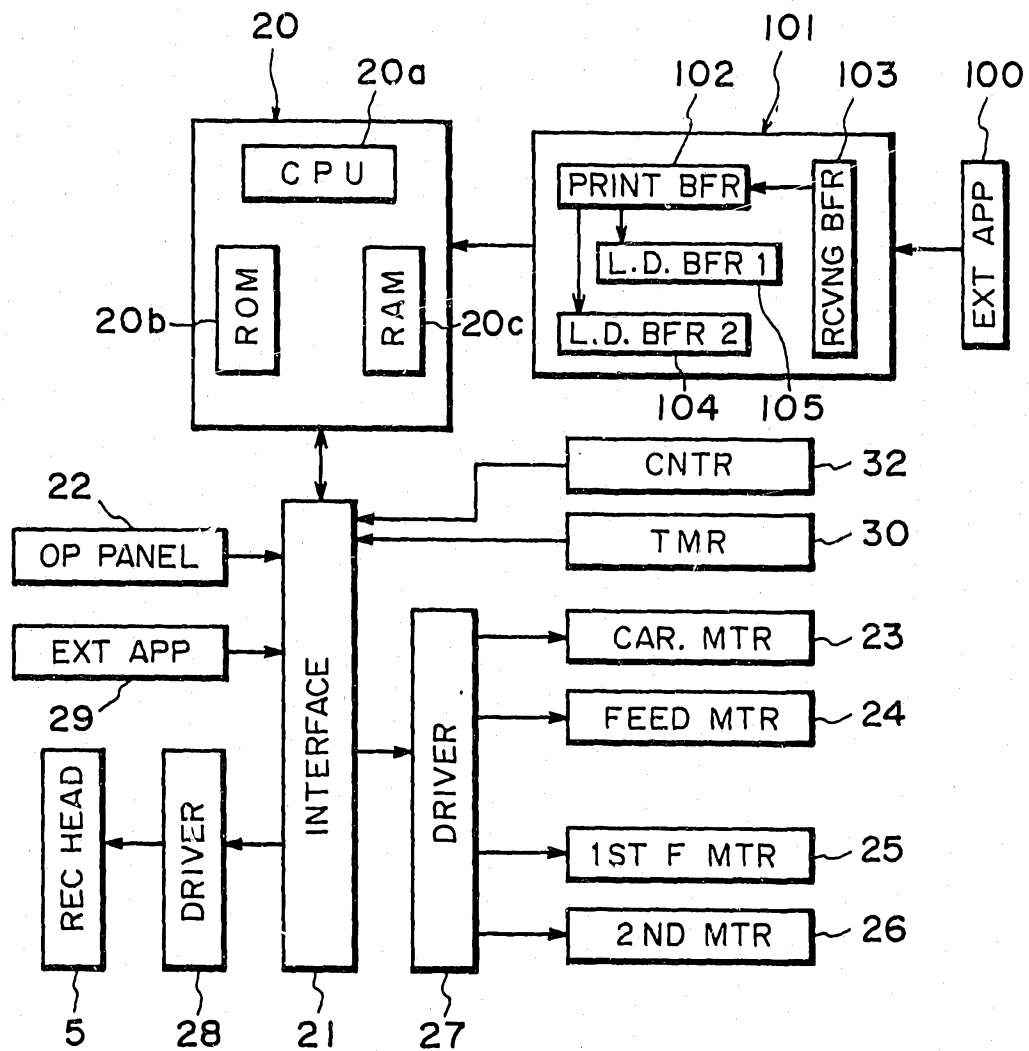


FIG. 2

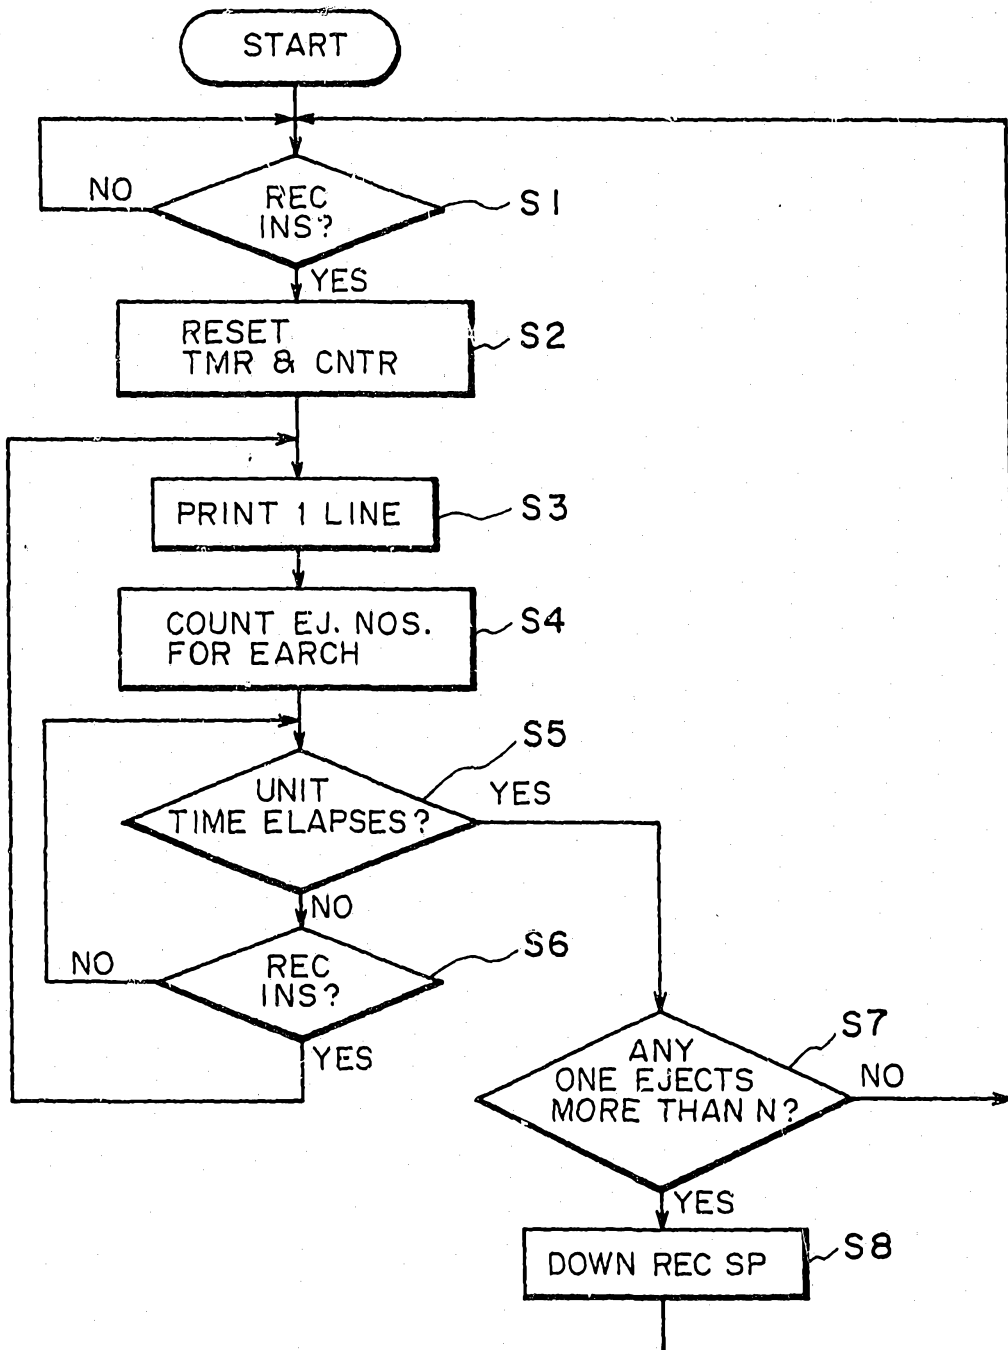


FIG. 3

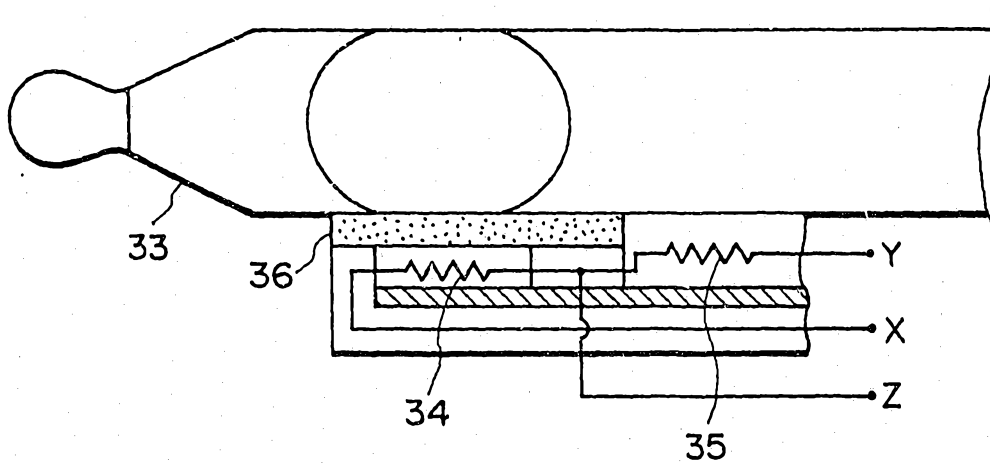


FIG. 4

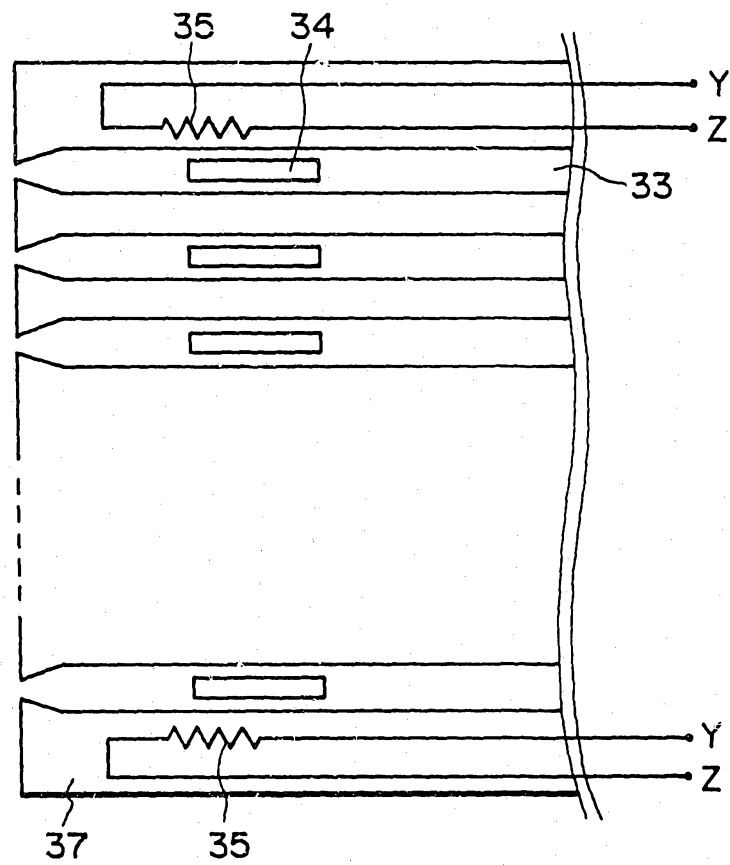


FIG. 5

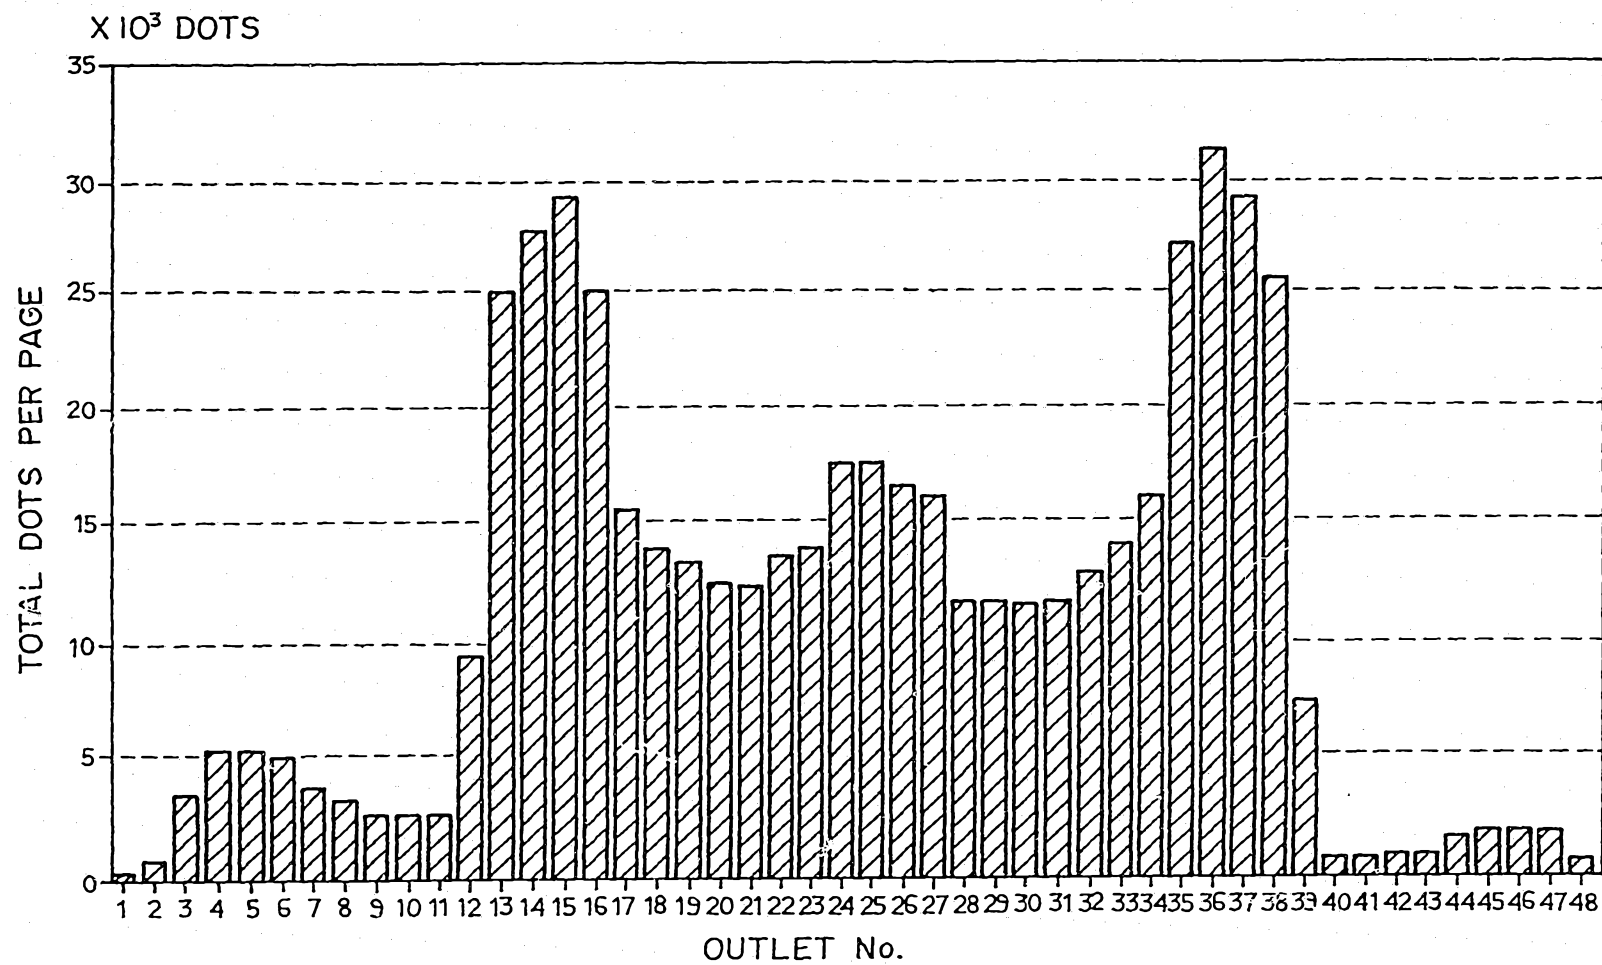


FIG. 6

74331/91

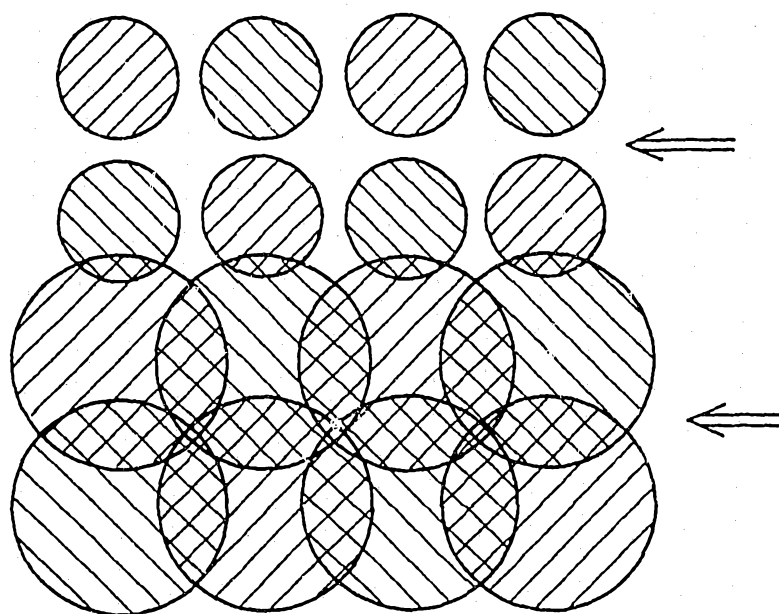


FIG. 7

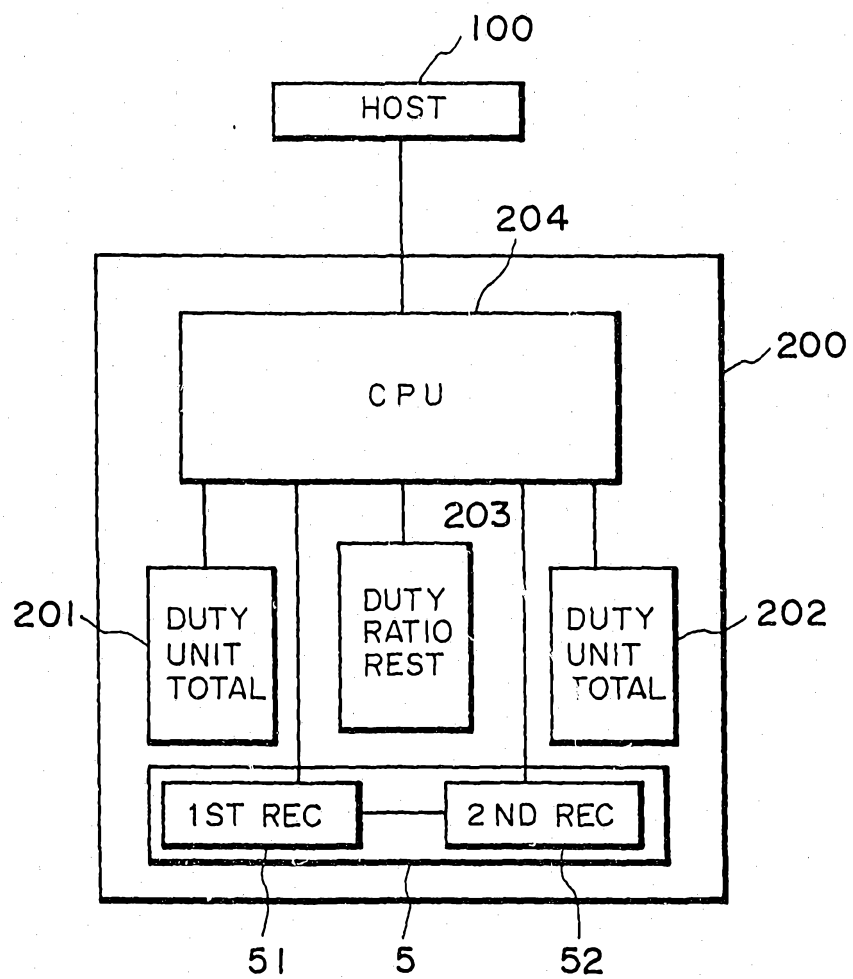


FIG. 8

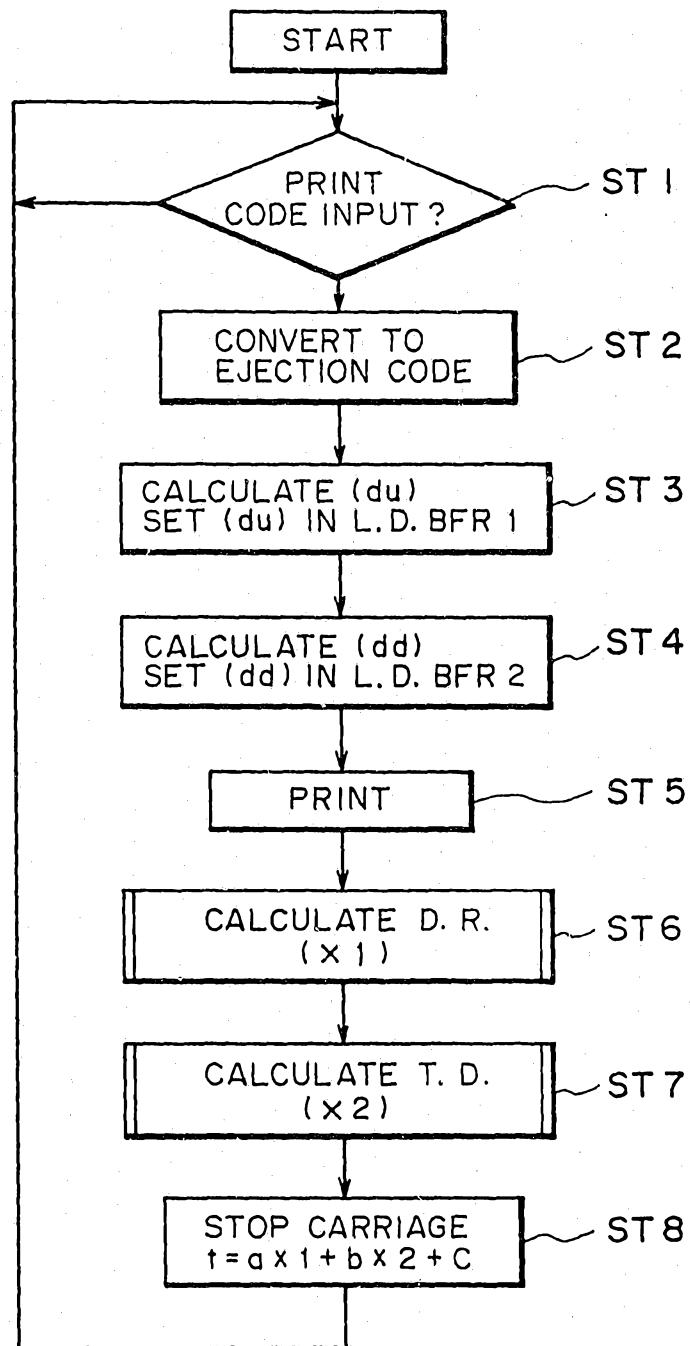


FIG. 9

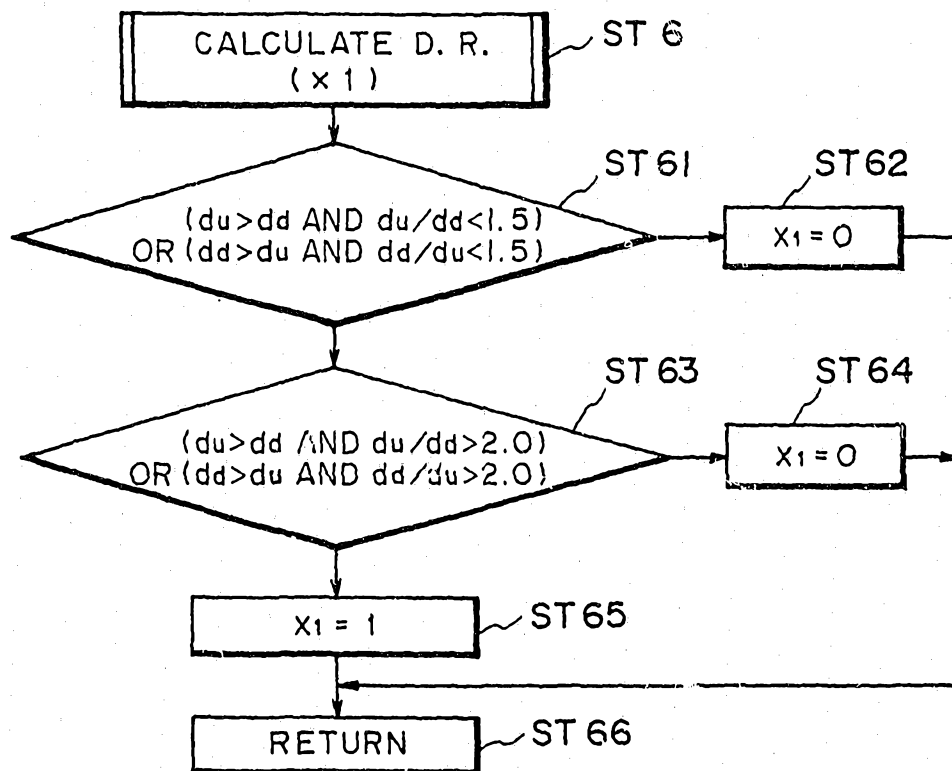


FIG. 10

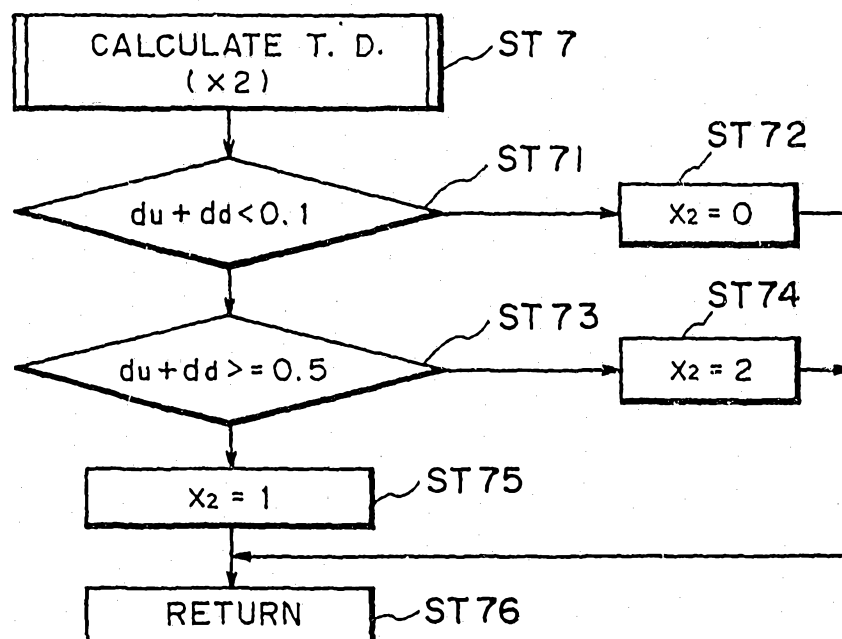


FIG. 11