



US 20120175074A1

(19) **United States**

(12) **Patent Application Publication**
Gupta et al.

(10) **Pub. No.: US 2012/0175074 A1**

(43) **Pub. Date: Jul. 12, 2012**

(54) **NONWOVEN ARTICLE WITH RIBBON FIBERS**

(75) Inventors: **Rakesh Kumar Gupta**, Kingsport, TN (US); **Melvin Glenn Mitchell**, Penrose, NC (US); **Daniel William Klosiewicz**, Kingsport, TN (US); **Mark Dwight Clark**, Kingsport, TN (US); **Chris Delbert Anderson**, Perrysburg, OH (US); **Marvin Lynn Mitchell**, Parker, CO (US); **Paula Hines Mitchell**, Parker, CO (US); **Amber Layne Wolfe**, Landrum, SC (US)

(73) Assignee: **EASTMAN CHEMICAL COMPANY**, Kingsport, TN (US)

(21) Appl. No.: **13/273,720**

(22) Filed: **Oct. 14, 2011**

Related U.S. Application Data

(60) Provisional application No. 61/405,306, filed on Oct. 21, 2010.

Publication Classification

(51) **Int. Cl.**
D21H 13/24 (2006.01)
D21H 13/08 (2006.01)
D21H 13/14 (2006.01)
D21H 13/06 (2006.01)

(52) **U.S. Cl.** **162/146; 162/157.3**

(57) **ABSTRACT**

Ribbon fibers, nonwoven articles derived therefrom, and their process of manufacture are provided. The ribbon fibers are derived from multicomponent fibers having a striped configuration and have a length of less than 25 millimeters, a minimum transverse dimension of less than 5 microns, and a transverse aspect ratio of at least 2:1. The ribbon fibers are formed from a water non-dispersible synthetic polymer. The nonwoven articles containing the ribbon fibers may be used for a wide array of products.

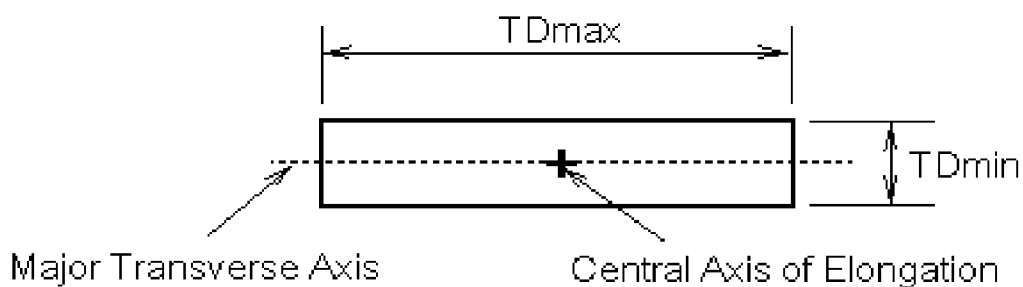


FIG. 1a

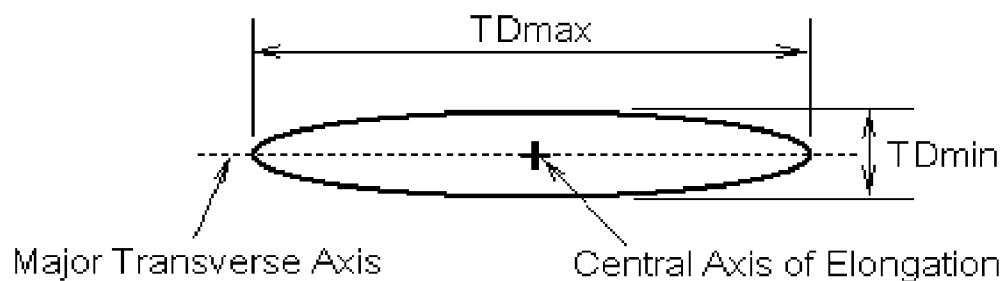


FIG. 1b

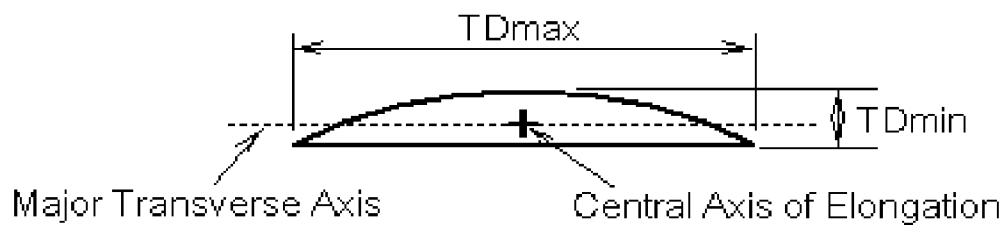


FIG. 1c

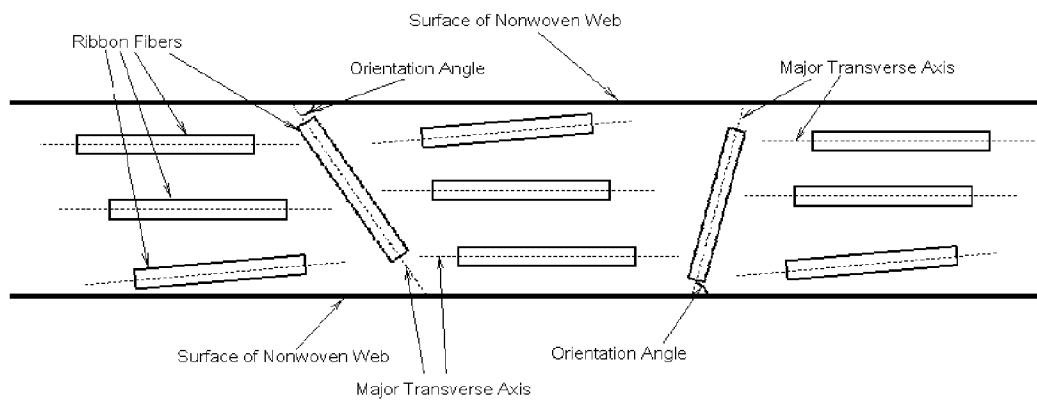


FIG. 2

NONWOVEN ARTICLE WITH RIBBON FIBERS

RELATED APPLICATIONS

[0001] This application claims priority from U.S. Provisional Application Ser. No. 61/405,306 filed on Oct. 21, 2010, the disclosure of which is incorporated herein by reference.

BACKGROUND

[0002] 1. Field of the Invention

[0003] The present invention pertains to ribbon fibers and nonwoven articles derived therefrom.

[0004] 2. Description of the Related Art

[0005] Polymeric materials that can be processed to form microfibrils and microfibril-entangled products have been readily identified throughout the art. Such polymeric materials can be selected and processed using various techniques to produce nonwoven articles.

[0006] However, there continues to exist a need for new and creative product constructions that can be prepared by combining microfibril materials with other microfibril materials, or by combining microfibril materials with other non-microfibril materials, in different ways, and methods to prepare such product constructions.

SUMMARY

[0007] In one embodiment of the present invention, there is provided a nonwoven article that comprises a binder and a plurality of ribbon fibers. The ribbon fibers can have a length of less than 25 millimeters, a minimum transverse dimensions of less than 5 microns, a transverse aspect ratio of at least 2:1, and are formed from a synthetic polymer. Furthermore, less than 50 weight percent of said ribbon fibers are directly joined to a base member having the same composition as the ribbon fibers.

[0008] In another embodiment of the present invention, there is provided a nonwoven article that comprises a binder and a plurality of ribbon fibers. The ribbon fibers can have a length of less than 25 millimeters, a minimum transverse dimensions of less than 5 microns, a transverse aspect ratio of at least 2:1, and are formed from a synthetic polymer. Additionally, the major transverse axis of at least 50 weight percent of the ribbon fibers is oriented at an angle of less than 30 degrees from the nearest surface of the nonwoven article.

[0009] In another embodiment of the present invention, there is provided a wet lap composition that comprises water and a plurality of ribbon fibers. The water makes up in the range of from 50 to 90 weight percent of the wet lap composition, whereas the ribbon fibers make up in the range of from 10 to 50 weight percent of the wet lap composition. The water and ribbon fibers, in combination, make up of at least 95 weight percent of the wet lap composition. Furthermore, the ribbon fibers have a length of less than 25 millimeters, a minimum transverse dimension of less than 5 microns, a transverse aspect ratio of at least 2:1, and formed from a water non-dispersible synthetic polymer.

[0010] In another embodiment of the present invention, there is a process is provided for producing a nonwoven article. The process includes a first step of (a) providing a plurality of multicomponent fibers having a striped configuration and an as-spun denier of less than 15 dpf, wherein each of the multicomponent fibers comprises a plurality of ribbon fiber segments substantially isolated from one another by a

plurality removable segments. The ribbon fiber segments are formed of a water non-dispersible material, whereas the removable segments are formed of a water dispersible material. The ribbon fiber segments have a minimum transverse dimension of less than 5 microns and a transverse aspect ratio of at least 2:1. The second step (b) involves cutting a plurality of the multicomponent fibers into lengths of less than 25 millimeters, thereby providing a plurality of short-cut multicomponent fibers. In step (c), the short-cut multicomponent fibers are contacted with a wash water to disperse substantially all of the removable segments in the wash water and to disassociate each of the ribbon fiber segments from one other, thereby forming a wash slurry comprising the disassociated ribbon fiber segments and an aqueous dispersion of the wash water and the water dispersible material. Step (d) involves removing a portion of the aqueous dispersion from the wash slurry to thereby provide a wet lap composition, wherein the ribbon fiber segments make up in the range of from 10 to 50 weight percent of the wet lap composition and the aqueous dispersion makes up in the range of from 50 to 90 weight percent of the wet lap composition. Finally, step (e) involves using the wet lap composition in a wet-laid process to produce the nonwoven article.

BRIEF DESCRIPTION OF THE FIGURES

[0011] Embodiments of the present invention are described herein with reference to the following drawing figures, wherein:

[0012] FIGS. 1a, 1b, and 1c are cross-sectional views of three differently-configured fibers, particularly illustrating how various measurements relating to the size and shape of the fibers are determined;

[0013] FIG. 2 is a cross-sectional view of nonwoven article containing ribbon fibers, particularly illustrating the orientation of the ribbon fibers contained therein;

DETAILED DESCRIPTION

[0014] The present invention provides nonwoven articles made from short-cut ribbon fibers comprised of water non-dispersible synthetic polymers. The nonwoven articles containing ribbon fibers exhibit enhanced tensile strength, flexibility, and durability that can be used in a large number of end products. Furthermore, the present invention is also directed to the process of producing the nonwoven articles made from ribbon fibers. Also, the present invention also provides a ribbon-fiber-containing wet lap composition that may be utilized in wet-laid processes.

[0015] A “nonwoven article” is defined herein is a web made directly from fibers without weaving or knitting operations. The term “ribbon fiber” describes a fiber having a somewhat flattened shape in cross-section. In certain embodiments of the present invention, the ribbon fibers can have a minimum transverse dimension (thickness) of at least 0.1, 0.5, or 0.75 microns and/or not more than 10, 5, or 2 microns, and the ribbon fibers can have a transverse aspect ratio (width: thickness) of at least 2:1, 6:1, or 10:1 and/or not more than 100:1, 50:1, or 20:1.

[0016] As used herein, “minimum transverse dimension” denotes the minimum dimension of a fiber measured perpendicular to the axis of elongation of the fiber by an external caliper method. As used herein, “maximum transverse dimension” is the maximum dimension of a fiber measured perpendicular to the axis of elongation of the fiber by the

external caliper. FIGS. 1*a*, 1*b*, and 1*c* depict how these dimensions may be measured in various fiber cross-sections. In FIGS. 1*a*, 1*a*, and 1*c*, “TDmin” is the minimum transverse dimension and “TDmax” is the maximum transverse dimension.

[0017] As used herein, “transverse aspect ratio” denotes the ratio of a fiber’s maximum transverse dimension (width) to the fiber’s minimum transverse dimension (thickness). As used herein, “external caliper method” denotes a method of measuring an outer dimension of a fiber where the measured dimension is the distance separating two coplanar parallel lines between which the fiber is located and where each of the parallel lines touches the external surface of the fiber on generally opposite sides of the fiber.

[0018] The ribbon fibers utilized and produced herein are formed from a water non-dispersible synthetic polymer. As is described below in further detail, the ribbon fibers of the present invention can be derived from multicomponent fibers having a striped configuration with at least 4, 8, or 12 stripes and/or less than 50, 35, or 20 stripes and an average denier per filament (dpf) of at least 1, 3, or 5, and/or not more than 10, 20, or 30. In addition to the minimum transverse dimension and the transverse aspect ratio discussed above, the ribbon fibers of the present invention can have a length of at least 0.1, 0.25, 0.5, or 1.0 millimeters and/or not more than 25, 10, 6.5, or 2.0 millimeters. All fiber dimensions provided herein (e.g., length, minimum transverse dimension, maximum transverse dimension, and transverse aspect ratio) are the average dimensions of the fibers belonging to the specified group.

[0019] Although it is known in the art that fibers having a transverse aspect ratio of 1.5:1 or greater can be produced by fibrillation of a base member (e.g., a sheet or a root fiber), the ribbon fibers provided in accordance with one embodiment of the present invention are not made by fibrillating a sheet or root fiber to produce a “fuzzy” sheet or root fiber having microfibers appended thereto. In one embodiment of the present invention, less than 50, 20, or 5 weight percent of ribbon fibers employed in the nonwoven article are joined to a base member having the same composition as said ribbon fibers.

[0020] When the nonwoven article of the present invention comprises short-cut ribbon fibers, the major transverse axis of at least 50, 75, or 90 weight percent of the ribbon microfibers in the nonwoven article can be oriented at an angle of less than 30, 20, 15, or 10 degrees from the nearest surface of the nonwoven article. As used herein, “major transverse axis” denotes an axis perpendicular to the direction of elongation of a fiber and extending through the centermost two points on the outer surface of the fiber between which the maximum transverse dimension of the fiber is measured by the external caliper method described above. Such orientation of the ribbon fibers in the nonwoven article can be facilitated by enhanced dilution of the fibers in a wet-laid process and/or by mechanically pressing the nonwoven article after its formation. FIG. 2 illustrates how the angle of orientation of the ribbon fibers relative to the major transverse axis is determined.

[0021] The ribbon fibers can be processed to produce nonwoven articles that show tensile strength, absorptivity, flexibility, and fabric integrity. In particular, the ribbon fibers produced from this process may be used to produce a wide variety of nonwoven articles including filter media (e.g., HEPA filters, ULPA filters, coalescent filters, liquid filters, desalination filters, automotive filters, coffee filters, tea bags,

and vacuum dust bags), battery separators, personal hygiene articles, sanitary napkins, tampons, diapers, disposable wipes (e.g., automotive wipes, baby wipes, hand and body wipes, floor cleaning wipes, facial wipes, toddler wipes, dusting and polishing wipes, and nail polish removal wipes), flexible packaging (e.g., envelopes, food packages, multiwall bags, and terminally sterilized medical packages), geotextiles (e.g., weed barriers, irrigation barriers, erosion barriers, and seed support media), building and construction materials (e.g., housing envelopes, moisture barrier film, gypsum board, wall paper, asphalt, papers, roofing underlayment, and decorative materials), surgical and medical materials (e.g., surgical drapes and gowns, bone support media, and tissue support media), security papers (e.g., currency paper, gaming and lottery paper, bank notes, and checks), cardboard, recycled cardboard, synthetic leather and suede, automotive headliners, personal protective garments, acoustical media, concrete reinforcement, flexible perform for compression molded composites, electrical materials (e.g., transformer boards, cable wrap and fillers, slot insulations, capacitor papers, and lampshade), catalytic support membranes, thermal insulation, labels, food packaging materials (e.g., aseptic, liquid packaging board, tobacco, release, pouch and packet, grease resistant, ovenable board, cup stock, food wrap, and coated one side), and printing and publishing papers (e.g., water and tear resistant printing paper, trade book, banners, map and chart, opaque, and carbonless). In one embodiment, the nonwoven article is selected from the group consisting of a battery separator, a high efficiency filter, and a high strength paper.

[0022] Additional nonwoven articles and the processes to produce such nonwoven articles are disclosed in U.S. Pat. No. 6,989,193, US Patent Application Publication No. 2005/0282008, US Patent Application Publication No. 2006/0194047, U.S. Pat. No. 7,687,143, US Patent Application No. 2008/0311815, and US Patent Application Publication No. 2008/0160859, the disclosures of which are incorporated herein by reference.

[0023] Filter media produce from the water non-dispersible microfibers can be utilized to filter air or liquids. Filter media for liquids include, but are not limited to, water, bodily fluids, solvents, and hydrocarbons. The above nonwoven articles may be produced by a process selected from the group consisting of a dry-laid process and a wet-laid process.

[0024] In one embodiment of the invention, a process is provided for producing a nonwoven article comprising the ribbon fibers. The process can comprise the following steps:

[0025] (a) spinning at least one water dispersible sulfopolyester and one or more water non-dispersible synthetic polymers immiscible with the sulfopolyester into multicomponent fibers having a striped configuration, wherein the multicomponent fibers have a plurality of segments comprising the water non-dispersible synthetic polymers whereby the segments are substantially isolated from each other by the sulfopolyester intervening between the segments; wherein the multicomponent fiber has an as-spun denier of less than about 15 denier per filament; wherein the water dispersible sulfopolyester exhibits a melt viscosity of less than about 12,000 poise measured at 240° C. at a strain rate of 1 rad/sec; and wherein the sulfopolyester comprises less than about 25 mole percent of residues of at least one sulfomonomer, based on the total moles of diacid or diol residues;

[0026] (b) cutting the multicomponent fibers of step a) to a length of less than 25, 10, or 2 millimeters, but greater than 0.25, 0.5, or 1.0 millimeters to produce cut multicomponent fibers;

[0027] (c) contacting the cut multicomponent fibers with water to remove the sulfopolyester thereby forming a wet lap of ribbon fibers comprising the water non-dispersible synthetic polymer;

[0028] (d) subjecting the wet lap of ribbon fibers to a wet-laid process to produce the nonwoven article; and

[0029] (e) optionally, applying a binder dispersion to the nonwoven article and drying the nonwoven article and binder dispersion thereon.

[0030] In another embodiment of the invention, in step b, the multicomponent fibers of step a) are cut to a length of less than 10, 5, or 2 millimeters, but greater than 0.1, 0.25, or 0.5 millimeters.

[0031] In one embodiment of the invention, at least 10, 20, 30, 40, or 50 weight percent and/or not more than 90, 85, 80, or 75 weight percent of the nonwoven article is made up of the ribbon fibers. In another embodiment, when the nonwoven article contains at least 10, 20, 30, 40, or 50 weight percent and/or not more than 90, 85, 80, or 75 weight percent ribbon fibers, the nonwoven article can be selected from the group consisting of a battery separator, a high efficiency filter, and a high strength paper.

[0032] In one embodiment of the invention, at least 0.1, 0.5, 1, or 2 weight percent and/or not more than 20, 15, or 10 weight percent of the nonwoven article is made up of the ribbon fibers. In this embodiment, when the nonwoven article contains at least 0.1, 0.5, 1, or 2 weight percent and/or not more than 20, 15, or 10 weight percent ribbon fibers, the nonwoven article can be selected from the group consisting of a paperboard and a cardboard.

[0033] The binder dispersion may be applied to the nonwoven article by any method known in the art. In one embodiment, the binder dispersion is applied as an aqueous dispersion to the nonwoven article by spraying or rolling the binder dispersion onto the nonwoven article. Subsequent to the applying the binder dispersion, the nonwoven article and the binder dispersion can be subjected to a drying step in order to allow the binder to set.

[0034] The binder dispersion may comprise a synthetic resin binder and/or a phenolic resin binder. The synthetic resin binder is selected from the group consisting of acrylic copolymers, styrenic copolymers, styrene-butadiene copolymers, vinyl copolymers, polyurethanes, sulfopolyesters, and combinations thereof. In one embodiment, the binder can comprise a blend of different sulfopolyesters having different sulfomonomer contents. For example, at least one of the sulfopolyesters comprises at least 15 mole percent of sulfomonomer and at least 45 mole percent of CHDM and/or at least one of the sulfopolyesters comprises less than 10 mole percent of sulfomonomer and at least 70 mole percent of CHDM. The amount of sulfomonomer present in a sulfopolyester greatly affects its water-permeability. In another embodiment, the binder can be comprised of a sulfopolyester blend comprising at least one hydrophilic sulfopolyester and at least one hydrophobic sulfopolyester. An example of a hydrophilic sulfopolyester that can be useful as a binder is Eastek 1100® by EASTMAN. Likewise, an example of a hydrophobic sulfopolyester useful as a binder includes Eastek 1200® by EASTMAN. These two sulfopolyesters may be blended accordingly to optimize the water-permeabil-

ity of binder. Depending on the desired end use for the nonwoven article, the binder may be either hydrophilic or hydrophobic.

[0035] The use of a binder may enhance multiple properties of the nonwoven article, especially when a sulfopolyester is included in the binder composition. For example, when a sulfopolyester binder is utilized, the nonwoven article can exhibit a dry tensile strength greater than 1.5, 2.0, 3.0, or 3.5 kg/15 mm and/or a wet tensile strength greater than 1.0, 1.5, 2.0, or 2.5 kg/15 mm. Similarly, when a sulfopolyester binder is used, the nonwoven article can exhibit a tear force greater than 420, 460, or 500 grams and/or a burst strength greater than 50, 60, or 70 psig. Furthermore, depending on the nature of the binder used (e.g., hydrophobic or hydrophilic), the nonwoven article can exhibit a Hercules Size of less than 20, 15, or 10 seconds and/or greater than 5, 50, 100, 120, or 140 seconds. Typically, the binder dispersion can make up at least 1, 2, 3, 4, 5, or 7 weight percent of the nonwoven article and/or not more than 40, 30, 20, 15, or 12 weight percent of the nonwoven article.

[0036] Undissolved or dried sulfopolyesters are known to form strong adhesive bonds to a wide array of substrates, including, but not limited to fluff pulp, cotton, acrylics, rayon, lyocell, PLA (polylactides), cellulose acetate, cellulose acetate propionate, poly(ethylene)terephthalate, poly(butylene)terephthalate, poly(trimethylene)terephthalate, poly(cyclohexylene)terephthalate, copolyesters, polyamides (e.g., nylons), stainless steel, aluminum, treated polyolefins, PAN (polyacrylonitriles), and polycarbonates. Thus, sulfopolyesters function as excellent binders for the nonwoven article. Therefore, our novel nonwoven articles may have multiple functionalities when a sulfopolyester binder is utilized.

[0037] The nonwoven article may further comprise a coating. After the nonwoven article and the binder dispersion are subjected to drying, a coating may be applied to the nonwoven article. The coating can comprise a decorative coating, a printing ink, a barrier coating, an adhesive coating, and a heat seal coating. In another example, the coating can comprise a liquid barrier and/or a microbial barrier.

[0038] After producing the nonwoven article, adding the optional binder, and/or after adding the optional coating, the nonwoven article may undergo a heat setting step comprising heating the nonwoven article to a temperature of at least 100° C., and more preferably to at least about 120° C. The heat setting step relaxes out internal fiber stresses and aids in producing a dimensionally stable fabric product. It is preferred that when the heat set material is reheated to the temperature to which it was heated during the heat setting step that it exhibits surface area shrinkage of less than about 10, 5, or 1 percent of its original surface area. However, if the nonwoven article is subjected to heat setting, then the nonwoven article may not be repulpable and/or recycled by repulping the nonwoven article after use.

[0039] The term "repulpable," as used herein, refers to any nonwoven article that has not been subjected to heat setting and is capable of disintegrating at 3,000 rpm at 1.2 percent consistency after 5,000, 10,000, or 15,000 revolutions according to TAPPI standards.

[0040] In another aspect of the invention, the nonwoven article can further comprise at least one or more additional fibers. The additional fibers can have a different composition and/or configuration (e.g., length, minimum transverse dimension, maximum transverse dimension, cross-sectional shape, or combinations thereof) than the ribbon fibers and can

be of any type of fiber that is known in the art depending on the type of nonwoven article to be produced. In one embodiment of the invention, the additional fiber can be selected from the group consisting of cellulosic fiber pulp, inorganic fibers (e.g., glass, carbon, boron, ceramic, and combinations thereof), polyester fibers, nylon fibers, polyolefin fibers, rayon fibers, lyocell fibers, cellulose ester fibers, post consumer recycled fibers, and combinations thereof. The nonwoven article can comprise additional fibers in an amount of at least 10, 15, 20, 25, 30, 40, or 60 weight percent of the nonwoven article and/or not more than 99, 98, 95, 90, 85, 80, 70, 60, or 50 weight percent of the nonwoven article. In one embodiment, the additional fiber is a cellulosic fiber that comprises at least 10, 25, or 40 weight percent and/or no more than 80, 70, 60, or 50 weight percent of the nonwoven article. The cellulosic fibers can comprise hardwood pulp fibers, softwood pulp fibers, and/or regenerated cellulose fibers. In another embodiment, at least one of the additional fibers is a glass fiber that has a minimum transverse dimension of less than 30, 25, 10, 8, 6, 4, 2, or 1 microns.

[0041] In one embodiment, the nonwoven article can comprise additional fibers in amount of at least 10, 15, or 20 weight percent and/or not more than 80, 60, or 50 weight percent and the ribbon fibers in an amount of at least 20, 40, or 50 weight percent and/or not more than 90, 85, or 80 weight percent. In this embodiment, the nonwoven article may be a battery separator, a high efficiency filter, or a high strength paper.

[0042] In one embodiment, the nonwoven article can comprise additional fibers in amount of at least 20, 40, or 60 weight percent and/or not more than 95, 90, or 85 weight percent and the ribbon fibers in an amount of at least 0.1, 0.5, 1, or 2 weight percent and/or not more than 20, 15, or 10 weight percent. In this embodiment, the nonwoven article may be a paperboard or cardboard.

[0043] In one embodiment, a combination of the ribbon fibers, at least one or more additional fibers, and a binder make up at least 75, 85, 95, or 98 weight percent of the nonwoven article.

[0044] The nonwoven article can further comprise one or more additives. The additives may be added to the wet lap of water non-dispersible microfibers prior to subjecting the wet lap to a wet-laid or dry-laid process. Additives include, but are not limited to, starches, fillers, light and heat stabilizers, anti-static agents, extrusion aids, dyes, anticounterfeiting markers, slip agents, tougheners, adhesion promoters, oxidative stabilizers, UV absorbers, colorants, pigments, opacifiers (delustrants), optical brighteners, fillers, nucleating agents, plasticizers, viscosity modifiers, surface modifiers, antimicrobials, antifoams, lubricants, thermostabilizers, emulsifiers, disinfectants, cold flow inhibitors, branching agents, oils, waxes, and catalysts. The nonwoven article can comprise at least 0.05, 0.1, or 0.5 weight percent and/or not more than 10, 5, or 2 weight percent of one or more additives.

[0045] Generally, manufacturing processes to produce nonwoven articles from ribbon fibers derived from multicomponent fibers can be split into the following groups: dry-laid webs, wet-laid webs, combinations of these processes with each other, or other nonwoven processes.

[0046] Generally, dry-laid nonwoven articles are made with staple fiber processing machinery that is designed to manipulate fibers in a dry state. These include mechanical processes, such as carding, aerodynamic, and other air-laid routes. Also included in this category are nonwoven articles

made from filaments in the form of tow, fabrics composed of staple fibers, and stitching filaments or yards (i.e., stitch-bonded nonwovens). Carding is the process of disentangling, cleaning, and intermixing fibers to make a web for further processing into a nonwoven article. The process predominantly aligns the fibers which are held together as a web by mechanical entanglement and fiber-fiber friction. Cards (e.g., a roller card) are generally configured with one or more main cylinders, roller or stationary tops, one or more doffers, or various combinations of these principal components. The carding action is the combing or working of the water non-dispersible microfibers between the points of the card on a series of interworking card rollers. Types of cards include roller, woolen, cotton, and random cards. Garnetts can also be used to align these fibers.

[0047] The ribbon fibers in the dry-laid process can also be aligned by air-laying. These fibers are directed by air current onto a collector which can be a flat conveyor or a drum.

[0048] Wet laid processes involve the use of papermaking technology to produce nonwoven articles. These nonwoven articles are made with machinery associated with pulp fiberizing (e.g., hammer mills) and paperforming (e.g., slurry pumping onto continuous screens which are designed to manipulate short fibers in a fluid).

[0049] In one embodiment of the wet laid process, ribbon fibers are suspended in water, brought to a forming unit wherein the water is drained off through a forming screen, and the fibers are deposited on the screen wire.

[0050] In another embodiment of the wet laid process, ribbon fibers are dewatered on a sieve or a wire mesh which revolves at high speeds of up to 1,500 meters per minute at the beginning of hydraulic formers over dewatering modules (e.g., suction boxes, foils, and curatures). The sheet is dewatered to a solid content of approximately 20 to 30 percent. The sheet can then be pressed and dried.

[0051] In another embodiment of the wet-laid process, a process is provided comprising:

[0052] (a) optionally, rinsing the ribbon fibers comprising a water non-dispersible synthetic polymer with water;

[0053] (b) adding water to the ribbon fibers to produce a ribbon fiber slurry;

[0054] (c) optionally, adding other fibers and/or additives to the ribbon fiber slurry; and

[0055] (d) transferring the ribbon fiber slurry to a wet-laid nonwoven zone to produce the nonwoven article.

[0056] In step (a), the number of rinses depends on the particular use chosen for the ribbon fibers. In step (b), sufficient water is added to the ribbon fibers to allow them to be routed to the wet-laid nonwoven zone.

[0057] The wet-laid nonwoven zone in step (d) comprises any equipment known in the art that can produce wet-laid nonwoven articles. In one embodiment of the invention, the wet-laid nonwoven zone comprises at least one screen, mesh, or sieve in order to remove the water from the ribbon fiber slurry.

[0058] In another embodiment of the invention, the water non-dispersible microfiber slurry is mixed prior to transferring to the wet-laid nonwoven zone.

[0059] The nonwoven article can be held together by 1) mechanical fiber cohesion and interlocking in a web or mat; 2) various techniques of fusing of fibers, including the use of binder fibers and/or utilizing the thermoplastic properties of certain polymers and polymer blends; 3) use of a binding resin such as a starch, casein, a cellulose derivative, or a

synthetic resin, such as an acrylic copolymer latex, a styrenic copolymer, a vinyl copolymer, a polyurethane, or a sulfopolyester; 4) use of powder adhesive binders; or 5) combinations thereof. The fibers are often deposited in a random manner, although orientation in one direction is possible, followed by bonding using one of the methods described above. In one embodiment, the microfibers can be substantially evenly distributed throughout the nonwoven article.

[0060] The nonwoven articles also may comprise one or more layers of water-dispersible fibers, multicomponent fibers, or microdenier fibers.

[0061] The nonwoven articles may also include various powders and particulates to improve the absorbency nonwoven article and its ability to function as a delivery vehicle for other additives. Examples of powders and particulates include, but are not limited to, talc, starches, various water absorbent, water-dispersible, or water swellable polymers (e.g., super absorbent polymers, sulfopolyesters, and poly(vinylalcohols)), silica, activated carbon, pigments, and microcapsules. As previously mentioned, additives may also be present, but are not required, as needed for specific applications.

[0062] The nonwoven article may further comprise a water-dispersible film comprising at least one second water-dispersible polymer. The second water-dispersible polymer may be the same as or different from the previously described water-dispersible polymers used in the fibers and nonwoven articles of the present invention. In one embodiment, for example, the second water-dispersible polymer may be an additional sulfopolyester which, in turn, can comprise:

[0063] (a) at least 50, 60, 70, 75, 85, or 90 mole percent and no more than 95 mole percent of one or more residues of isophthalic acid or terephthalic acid, based on the total acid residues;

[0064] (b) at least 4 to about 30 mole percent, based on the total acid residues, of a residue of sodiosulfoisophthalic acid;

[0065] (c) one or more diol residues, wherein at least 15, 25, 50, 70, or 75 mole percent and no more than 95 mole percent, based on the total diol residues, is a poly(ethylene glycol) having a structure $\text{H}-(\text{OCH}_2-\text{CH}_2)_n-\text{OH}$ wherein n is an integer in the range of 2 to about 500;

[0066] (d) 0 to about 20 mole percent, based on the total repeating units, of residues of a branching monomer having three or more functional groups wherein the functional groups are hydroxyl, carboxyl, or a combination thereof.

[0067] The additional sulfopolyester may be blended with one or more supplemental polymers, as described hereinabove, to modify the properties of the resulting nonwoven article. The supplemental polymer may or may not be water-dispersible depending on the application. The supplemental polymer may be miscible or immiscible with the additional sulfopolyester.

[0068] The additional sulfopolyester also may include the residues of ethylene glycol and/or 1,4-cyclohexanedimethanol (CHDM). The additional sulfopolyester may further comprise at least 10, 20, 30, or 40 mole percent and/or no more than 75, 65, or 60 mole percent CHDM. The additional sulfopolyester may further comprise ethylene glycol residues in the amount of at least 10, 20, 25, or 40 mole percent and no more than 75, 65, or 60 mole percent ethylene glycol residues. In one embodiment, the additional sulfopolyester comprises is at about 75 to about 96 mole percent of the residues of isophthalic acid and about 25 to about 95 mole percent of the residues of diethylene glycol.

[0069] According to the invention, the sulfopolyester film component of the nonwoven article may be produced as a monolayer or multilayer film. The monolayer film may be produced by conventional casting techniques. The multilayered films may be produced by conventional lamination methods or the like. The film may be of any convenient thickness, but total thickness will normally be between about 2 and about 50 millimeters.

[0070] A major advantage inherent to the water dispersible sulfopolyesters of the present invention relative to caustic-dissipatable polymers (including sulfopolyesters) is the facile ability to remove or recover the polymer from aqueous dispersions via flocculation and precipitation by adding ionic moieties (i.e., salts). Other methods, such as pH adjustment, adding nonsolvents, freezing, and so forth may also be employed. The recovered water dispersible sulfopolyester may find use in applications including, but not limited to, the aforementioned sulfopolyester binder for wet-laid nonwovens comprising the water non-dispersible microfibers of the invention.

[0071] The present invention provides a microfiber-generating multicomponent fiber that includes at least two components, a water-dispersible component and a water non-dispersible component. As is discussed below in further detail, the water-dispersible component can comprise a sulfopolyester fiber and the water non-dispersible component can comprise a water non-dispersible synthetic polymer.

[0072] The term "multicomponent fiber" as used herein, is intended to mean a fiber prepared by melting at least two or more fiber-forming polymers in separate extruders, directing the resulting multiple polymer flows into one spinneret with a plurality of distribution flow paths, and spinning the flow paths together to form one fiber. Multicomponent fibers are also sometimes referred to as conjugate or bicomponent fibers. The polymers are arranged in distinct segments or configurations across the cross-section of the multicomponent fibers and extend continuously along the length of the multicomponent fibers. The configurations of such multicomponent fibers may include, for example, sheath core, side by side, segmented pie, striped, or islands-in-the-sea. For example, a multicomponent fiber may be prepared by extruding the sulfopolyester and one or more water non-dispersible synthetic polymers separately through a spinneret having a shaped or engineered transverse geometry such as, for example, a striped configuration.

[0073] The terms "segment," and/or "domain," when used to describe the shaped cross section of a multicomponent fiber refer to the area within the cross section comprising the water non-dispersible synthetic polymers. These domains or segments are substantially isolated from each other by the water-dispersible sulfopolyester, which intervenes between the segments or domains. The term "substantially isolated," as used herein, is intended to mean that the segments or domains are set apart from each other to permit the segments or domains to form individual fibers upon removal of the sulfopolyester. Segments or domains can be of similar shape and size or can vary in shape and/or size. Furthermore, the segments or domains can be "substantially continuous" along the length of the multicomponent fiber. The term "substantially continuous" means that the segments or domains are continuous along at least 10 cm length of the multicomponent fiber. These segments or domains of the multicomponent fiber produce the ribbon fibers when the water dispersible sulfopolyester is removed.

[0074] The term “water-dispersible,” as used in reference to the water-dispersible component and the sulfopolyesters is intended to be synonymous with the terms “water-dissipatable,” “water-disintegratable,” “water-dissolvable,” “water-dispellable,” “water soluble,” “water-removable,” “hydro-soluble,” and “hydrodispersible” and is intended to mean that the sulfopolyester component is sufficiently removed from the multicomponent fiber and is dispersed and/or dissolved by the action of water to enable the release and separation of the water non-dispersible fibers contained therein. The terms “dispersed,” “dispersible,” “dissipate,” or “dissipatable” mean that, when using a sufficient amount of deionized water (e.g., 100:1 water: fiber by weight) to form a loose suspension or slurry of the sulfopolyester fibers at a temperature of about 60° C., and within a time period of up to 5 days, the sulfopolyester component dissolves, disintegrates, or separates from the multicomponent fiber, thus leaving behind a plurality of ribbon fibers from the water non-dispersible segments.

[0075] In the context of this invention, all of these terms refer to the activity of water or a mixture of water and a water-miscible cosolvent on the sulfopolyesters described herein. Examples of such water-miscible cosolvents includes alcohols, ketones, glycol ethers, esters and the like. It is intended for this terminology to include conditions where the sulfopolyester is dissolved to form a true solution as well as those where the sulfopolyester is dispersed within the aqueous medium. Often, due to the statistical nature of sulfopolyester compositions, it is possible to have a soluble fraction and a dispersed fraction when a single sulfopolyester sample is placed in an aqueous medium.

[0076] The term “polyester,” as used herein, encompasses both “homopolyesters” and “copolyesters” and means a synthetic polymer prepared by the polycondensation of difunctional carboxylic acids with a difunctional hydroxyl compound. Typically, the difunctional carboxylic acid is a dicarboxylic acid and the difunctional hydroxyl compound is a dihydric alcohol such as, for example, glycols and diols. Alternatively, the difunctional carboxylic acid may be a hydroxy carboxylic acid such as, for example, p-hydroxybenzoic acid, and the difunctional hydroxyl compound may be an aromatic nucleus bearing two hydroxy substituents such as, for example, hydroquinone. As used herein, the term “sulfopolyester” means any polyester comprising a sulfomonomer. The term “residue,” as used herein, means any organic structure incorporated into a polymer through a polycondensation reaction involving the corresponding monomer. Thus, the dicarboxylic acid residue may be derived from a dicarboxylic acid monomer or its associated acid halides, esters, salts, anhydrides, or mixtures thereof. Therefore, the term dicarboxylic acid is intended to include dicarboxylic acids and any derivative of a dicarboxylic acid, including its associated acid halides, esters, half-esters, salts, half-salts, anhydrides, mixed anhydrides, or mixtures thereof, useful in a polycondensation process with a diol to make high molecular weight polyesters.

[0077] The water-dispersible sulfopolyesters generally comprise dicarboxylic acid monomer residues, sulfomonomer residues, diol monomer residues, and repeating units. The sulfomonomer may be a dicarboxylic acid, a diol, or hydroxycarboxylic acid. The term “monomer residue,” as used herein, means a residue of a dicarboxylic acid, a diol, or a hydroxycarboxylic acid. A “repeating unit,” as used herein, means an organic structure having 2 monomer residues bonded through a carbonyloxy group. The sulfopolyesters of

the present invention contain substantially equal molar proportions of acid residues (100 mole percent) and diol residues (100 mole percent), which react in substantially equal proportions such that the total moles of repeating units is equal to 100 mole percent. The mole percentages provided in the present disclosure, therefore, may be based on the total moles of acid residues, the total moles of diol residues, or the total moles of repeating units. For example, a sulfopolyester containing 30 mole percent of a sulfomonomer, which may be a dicarboxylic acid, a diol, or hydroxycarboxylic acid, based on the total repeating units, means that the sulfopolyester contains 30 mole percent sulfomonomer out of a total of 100 mole percent repeating units. Thus, there are 30 moles of sulfomonomer residues among every 100 moles of repeating units. Similarly, a sulfopolyester containing 30 mole percent of a sulfonated dicarboxylic acid, based on the total acid residues, means the sulfopolyester contains 30 mole percent sulfonated dicarboxylic acid out of a total of 100 mole percent acid residues. Thus, in this latter case, there are 30 moles of sulfonated dicarboxylic acid residues among every 100 moles of acid residues.

[0078] In addition, our invention also provides a process for producing the multicomponent fibers and the ribbon fibers derived therefrom, the process comprising (a) producing the multicomponent fiber and (b) generating the ribbon fibers from the multicomponent fibers.

[0079] The process begins by (a) spinning a water dispersible sulfopolyester having a glass transition temperature (T_g) of at least 36° C., 40° C., or 57° C. and one or more water non-dispersible synthetic polymers immiscible with the sulfopolyester into multicomponent fibers. The multicomponent fibers can have a plurality of segments comprising the water non-dispersible synthetic polymers that are substantially isolated from each other by the sulfopolyester, which intervenes between the segments. The sulfopolyester comprises:

[0080] (i) about 50 to about 96 mole percent of one or more residues of isophthalic acid and/or terephthalic acid, based on the total acid residues;

[0081] (ii) about 4 to about 30 mole percent, based on the total acid residues, of a residue of sodiosulfisophthalic acid;

[0082] (iii) one or more diol residues, wherein at least 25 mole percent, based on the total diol residues, is a poly(ethylene glycol) having a structure $\text{H}-(\text{OCH}_2-\text{CH}_2)_n-\text{OH}$ wherein n is an integer in the range of 2 to about 500; and

[0083] (iv) 0 to about 20 mole percent, based on the total repeating units, of residues of a branching monomer having 3 or more functional groups wherein the functional groups are hydroxyl, carboxyl, or a combination thereof. Ideally, the sulfopolyester has a melt viscosity of less than 12,000, 8,000, or 6,000 poise measured at 240° C. at a strain rate of 1 rad/sec.

[0084] The ribbon fibers are generated by (b) contacting the multicomponent fibers with water to remove the sulfopolyester thereby forming the ribbon fibers comprising the water non-dispersible synthetic polymer. Typically, the multicomponent fiber is contacted with water at a temperature of about 25° C. to about 100° C., preferably about 50° C. to about 80° C., for a time period of from about 10 to about 600 seconds whereby the sulfopolyester is dissipated or dissolved.

[0085] The ratio by weight of the sulfopolyester to water non-dispersible synthetic polymer component in the multicomponent fiber of the invention is generally in the range of about 98:2 to about 2:98 or, in another example, in the range

of about 25:75 to about 75:25. Typically, the sulfopolyester comprises 50 percent by weight or less of the total weight of the multicomponent fiber.

[0086] The shaped cross section of the multicomponent fibers is striped having alternating water dispersible segments and water non-dispersible segments. The striped configuration can have at least 8, 10, or 12 stripes and/or less than 50, 35, or 20 stripes.

[0087] As some water-dispersible sulfopolyesters are generally resistant to removal during subsequent hydroentangling processes, it is preferable that the water used to remove the sulfopolyester from the multicomponent fibers be above room temperature, more preferably the water is at least about 45° C., 60° C., or 85° C.

[0088] In another embodiment of this invention, another process is provided to produce ribbon fibers. The process comprises:

[0089] (a) cutting a multicomponent fiber into cut multicomponent fibers having a length of less than 25 millimeters;

[0090] (b) contacting a fiber-containing feedstock comprising the cut multicomponent fibers with a wash water for at least 0.1, 0.5, or 1 minutes and/or not more than 30, 20, or 10 minutes to produce a fiber mix slurry, wherein the wash water can have a pH of less than 10, 8, 7.5, or 7 and can be substantially free of added caustic;

[0091] (c) heating said fiber mix slurry to produce a heated fiber mix slurry;

[0092] (d) optionally, mixing said fiber mix slurry in a shearing zone;

[0093] (e) removing at least a portion of the sulfopolyester from the multicomponent fiber to produce a slurry mixture comprising a sulfopolyester dispersion and the ribbon fibers;

[0094] (f) removing at least a portion of the sulfopolyester dispersion from the slurry mixture to thereby provide a wet lap comprising the ribbon fibers, wherein the wet lap is comprised of at least 5, 10, 15, or 20 weight percent and/or not more than 70, 55, or 40 weight percent of the ribbon fibers and at least 30, 45, or 60 weight percent and/or not more than 90, 85, or 80 weight percent of the sulfopolyester dispersion, wherein the sulfopolyester dispersion is an aqueous dispersion comprised of water and water dispersible sulfopolyesters; and

[0095] (g) optionally, combining the wet lap with a dilution liquid to produce a dilute wet-lay slurry or "fiber furnish" comprising the ribbon fibers in an amount of at least 0.001, 0.005, or 0.01 weight percent and/or not more than 1, 0.5, or 0.1 weight percent.

[0096] In another embodiment of the invention, the wet lap is comprised of at least 5, 10, 15, or 20 weight percent and/or not more than 50, 45, or 40 weight percent of the water non-dispersible microfiber and at least 50, 55, or 60 weight percent and/or not more than 90, 85, or 80 weight percent of the sulfopolyester dispersion.

[0097] The multicomponent fiber can be cut into any length that can be utilized to produce nonwoven articles. In one embodiment of the invention, the multicomponent fiber is cut into lengths ranging of at least 0.1, 0.25, or 0.5 millimeter and/or not more than 25, 10, 5, or 2 millimeter. In one embodiment, the cutting ensures a consistent fiber length so that at least 75, 85, 90, 95, or 98 percent of the individual fibers have an individual length that is within 90, 95, or 98 percent of the average length of all fibers.

[0098] The fiber-containing feedstock can comprise any other type of fiber that is useful in the production of nonwoven

articles. In one embodiment, the fiber-containing feedstock further comprises at least one fiber selected from the group consisting of cellulosic fiber pulp, inorganic fibers including glass, carbon, boron and ceramic fibers, polyester fibers, lyocell fibers, nylon fibers, polyolefin fibers, rayon fibers, and cellulose ester fibers.

[0099] The fiber-containing feedstock is mixed with a wash water to produce a fiber mix slurry. Preferably, to facilitate the removal of the water-dispersible sulfopolyester, the water utilized can be soft water or deionized water. The wash water can have a pH of less than 10, 8, 7.5, or 7 and can be substantially free of added caustic. The wash water can be maintained at a temperature of at least 140° F., 150° F., or 160° F. and/or not more than 210° F., 200° F., or 190° F. during contacting of step (b). In one embodiment, the wash water contacting of step (b) can disperse substantially all of the water-dispersible sulfopolyester segments of the multicomponent fiber, so that the dissociated ribbon fibers have less than 5, 2, or 1 weight percent of residual water dispersible sulfopolyester disposed thereon.

[0100] The fiber mix slurry can be heated to facilitate removal of the water dispersible sulfopolyester. In one embodiment of the invention, the fiber mix slurry is heated to at least 50° C., 60° C., 70° C., 80° C. or 90° C. and no more than 100° C.

[0101] Optionally, the fiber mix slurry can be mixed in a shearing zone. The amount of mixing is that which is sufficient to disperse and remove a portion of the water dispersible sulfopolyester from the multicomponent fiber. During mixing, at least 90, 95, or 98 weight percent of the sulfopolyester can be removed from the ribbon fibers. The shearing zone can comprise any type of equipment that can provide a turbulent fluid flow necessary to disperse and remove a portion of the water dispersible sulfopolyester from the multicomponent fiber and separate the ribbon fibers. Examples of such equipment include, but is not limited to, pulpers and refiners.

[0102] After contacting the multicomponent fiber with water, the water dispersible sulfopolyester dissociates with the ribbon fibers to produce a slurry mixture comprising a sulfopolyester dispersion and the ribbon fibers. The sulfopolyester dispersion can be separated from the ribbon fibers by any means known in the art in order to produce a wet lap, wherein the sulfopolyester dispersion and the ribbon fibers in combination can make up at least 95, 98, or 99 weight percent of the wet lap. For example, the slurry mixture can be routed through separating equipment such as, for example, screens and filters. Optionally, the ribbon fibers may be washed once or numerous times to remove more of the water dispersible sulfopolyester.

[0103] The wet lap can comprise up to at least 30, 45, 50, 55, or 60 weight percent and/or not more than 90, 86, 85, or 80 weight percent water. Even after removing some of the sulfopolyester dispersion, the wet lap can comprise at least 0.001, 0.01, or 0.1 and/or not more than 10, 5, 2, or 1 weight percent of water dispersible sulfopolyesters. In addition, the wet lap can further comprise a fiber finishing composition comprising an oil, a wax, and/or a fatty acid. The fatty acid and/or oil used for the fiber finishing composition can be naturally-derived. In another embodiment, the fiber finishing composition comprises mineral oil, stearate esters, sorbitan esters, and/or neatsfoot oil. The fiber finishing composition can make up at least 10, 50, or 100 ppmw and/or not more than 5,000, 1000, or 500 ppmw of the wet lap.

[0104] The removal of the water-dispersible sulfopolyester can be determined by physical observation of the slurry mixture. The water utilized to rinse the ribbon fibers is clear if the water-dispersible sulfopolyester has been mostly removed. If the water dispersible sulfopolyester is still present in noticeable amounts, then the water utilized to rinse the water ribbon fibers can be milky in color. Further, if water-dispersible sulfopolyester remains on the ribbon fibers, the ribbon fibers can be somewhat sticky to the touch.

[0105] The dilute wet-lay slurry of step (g) can comprise the dilution liquid in an amount of at least 90, 95, 98, 99, or 99.9 weight percent. In one embodiment, an additional fiber can be combined with the wet lay and dilution liquid to produce the dilute wet-lay slurry. The additional fibers can have a different composition and/or configuration than the water non-dispersible microfiber and can be any that is known in the art depending on the type of nonwoven article to be produced. In one embodiment of the invention, the other fiber can be selected from the group consisting cellulose fiber pulp, inorganic fibers (e.g., glass, carbon, boron, ceramic, and combinations thereof), polyester fibers, nylon fibers, polyolefin fibers, rayon fibers, lyocell fibers, cellulose ester fibers, and combinations thereof. The dilute wet-lay slurry can comprise additional fibers in an amount of at least 0.001, 0.005, or 0.01 weight percent and/or not more than 1, 0.5, or 0.1 weight percent.

[0106] In one embodiment of this invention, at least one water softening agent may be used to facilitate the removal of the water-dispersible sulfopolyester from the multicomponent fiber. Any water softening agent known in the art can be utilized. In one embodiment, the water softening agent is a chelating agent or calcium ion sequestrant. Applicable chelating agents or calcium ion sequestrants are compounds containing a plurality of carboxylic acid groups per molecule where the carboxylic groups in the molecular structure of the chelating agent are separated by 2 to 6 atoms. Tetrasodium ethylene diamine tetraacetic acid (EDTA) is an example of the most common chelating agent, containing four carboxylic acid moieties per molecular structure with a separation of 3 atoms between adjacent carboxylic acid groups. Sodium salts of maleic acid or succinic acid are examples of the most basic chelating agent compounds. Further examples of applicable chelating agents include compounds which have multiple carboxylic acid groups in the molecular structure wherein the carboxylic acid groups are separated by the required distance (2 to 6 atom units) which yield a favorable steric interaction with di- or multi-valent cations such as calcium which cause the chelating agent to preferentially bind to di- or multi valent cations. Such compounds include, for example, diethylenetriaminepentaacetic acid; diethylenetriamine-N,N,N',N',N''-pentaacetic acid; pentetic acid; N,N-bis(2-(bis-(carboxymethyl)amino)ethyl)-glycine; diethylenetriamine pentaacetic acid; [[(carboxymethyl)imino]bis(ethylenetrilo)]-tetraacetic acid; edetic acid; ethylenedinitrilotetraacetic acid; EDTA, free base; EDTA, free acid; ethylenediamine-N,N,N',N'-tetraacetic acid; hampene; versene; N,N'-1,2-ethane diyl-bis-(N-(carboxymethyl)glycine); ethylenediamine tetra-acetic acid; N,N-bis(carboxymethyl)glycine; triglycollamic acid; trilon A; α,α',α'' -5 trimethylaminetricarboxylic acid; tri(carboxymethyl)amine; aminotriacetic acid; hampshire NTA acid; nitrilo-2,2',2''-tri-acetic acid; titriplex i; nitrilotri-acetic acid; and mixtures thereof.

[0107] The water dispersible sulfopolyester can be recovered from the sulfopolyester dispersion by any method known in the art.

[0108] The sulfopolyesters described herein can have an inherent viscosity, abbreviated hereinafter as "I.V.", of at least about 0.1, 0.2, or 0.3 dL/g, preferably about 0.2 to 0.3 dL/g, and most preferably greater than about 0.3 dL/g, as measured in 60/40 parts by weight solution of phenol/tetrachloroethane solvent at 25° C. and at a concentration of about 0.5 g of sulfopolyester in 100 mL of solvent.

[0109] The sulfopolyesters of the present invention can include one or more dicarboxylic acid residues. Depending on the type and concentration of the sulfomonomer, the dicarboxylic acid residue may comprise at least 60, 65, or 70 mole percent and no more than 95 or 100 mole percent of the acid residues. Examples of dicarboxylic acids that may be used include aliphatic dicarboxylic acids, alicyclic dicarboxylic acids, aromatic dicarboxylic acids, or mixtures of two or more of these acids. Thus, suitable dicarboxylic acids include, but are not limited to, succinic, glutaric, adipic, azelaic, sebacic, fumaric, maleic, itaconic, 1,3-cyclohexanedicarboxylic, 1,4-cyclohexanedicarboxylic, diglycolic, 2,5-norbornanedicarboxylic, phthalic, terephthalic, 1,4-naphthalenedicarboxylic, 2,5-naphthalenedicarboxylic, diphenic, 4,4'-oxydibenzoic, 4,4'-sulfonyldibenzoic, and isophthalic. The preferred dicarboxylic acid residues are isophthalic, terephthalic, and 1,4-cyclohexanedicarboxylic acids, or if diesters are used, dimethyl terephthalate, dimethyl isophthalate, and dimethyl-1,4-cyclohexanedicarboxylate with the residues of isophthalic and terephthalic acid being especially preferred. Although the dicarboxylic acid methyl ester is the most preferred embodiment, it is also acceptable to include higher order alkyl esters, such as ethyl, propyl, isopropyl, butyl, and so forth. In addition, aromatic esters, particularly phenyl, also may be employed.

[0110] The sulfopolyesters can include at least 4, 6, or 8 mole percent and no more than about 40, 35, 30, or 25 mole percent, based on the total repeating units, of residues of at least one sulfomonomer having 2 functional groups and one or more sulfonate groups attached to an aromatic or cycloaliphatic ring wherein the functional groups are hydroxyl, carboxyl, or a combination thereof. The sulfomonomer may be a dicarboxylic acid or ester thereof containing a sulfonate group, a diol containing a sulfonate group, or a hydroxy acid containing a sulfonate group. The term "sulfonate" refers to a salt of a sulfonic acid having the structure " $-\text{SO}_3\text{M}$," wherein M is the cation of the sulfonate salt. The cation of the sulfonate salt may be a metal ion such as Li^+ , Na^+ , K^+ , and the like. When a monovalent alkali metal ion is used as the cation of the sulfonate salt, the resulting sulfopolyester is completely dispersible in water with the rate of dispersion dependent on the content of sulfomonomer in the polymer, temperature of the water, surface area/thickness of the sulfopolyester, and so forth. When a divalent metal ion is used, the resulting sulfopolyesters are not readily dispersed by cold water but are more easily dispersed by hot water. Utilization of more than one counterion within a single polymer composition is possible and may offer a means to tailor or fine-tune the water-responsivity of the resulting article of manufacture. Examples of sulfomonomers residues include monomer residues where the sulfonate salt group is attached to an aromatic acid nucleus, such as, for example, benzene, naphthalene, diphenyl, oxydiphenyl, sulfonyldiphenyl, methylenediphenyl, or cycloaliphatic rings (e.g., cyclopentyl,

cyclobutyl, cycloheptyl, and cyclooctyl). Other examples of sulfomonomer residues which may be used in the present invention are the metal sulfonate salts of sulfophthalic acid, sulfoterephthalic acid, sulfoisophthalic acid, or combinations thereof. Other examples of sulfomonomers which may be used include 5-sodiosulfoisophthalic acid and esters thereof.

[0111] The sulfomonomers used in the preparation of the sulfopolyesters are known compounds and may be prepared using methods well known in the art. For example, sulfomonomers in which the sulfonate group is attached to an aromatic ring may be prepared by sulfonating the aromatic compound with oleum to obtain the corresponding sulfonic acid and followed by reaction with a metal oxide or base, for example, sodium acetate, to prepare the sulfonate salt. Procedures for preparation of various sulfomonomers are described, for example, in U.S. Pat. No. 3,779,993; U.S. Pat. No. 3,018,272; and U.S. Pat. No. 3,528,947, the disclosures of which are incorporated herein by reference.

[0112] The sulfopolyesters can include one or more diol residues which may include aliphatic, cycloaliphatic, and aralkyl glycols. The cycloaliphatic diols, for example, 1,3- and 1,4-cyclohexanedimethanol, may be present as their pure cis or trans isomers or as a mixture of cis and trans isomers. As used herein, the term "diol" is synonymous with the term "glycol" and can encompass any dihydric alcohol. Examples of diols include, but are not limited to, ethylene glycol, diethylene glycol, triethylene glycol, polyethylene glycols, 1,3-propanediol, 2,4-dimethyl-2-ethylhexane-1,3-diol, 2,2-dimethyl-1,3-propanediol, 2-ethyl-2-butyl-1,3-propanediol, 2-ethyl-2-isobutyl-1,3-propanediol, 1,3-butanediol, 1,4-butanediol, 1,5-pentanediol, 1,6-hexanediol, 2,2,4-trimethyl-1,6-hexanediol, thiodiethanol, 1,2-cyclohexanedimethanol, 1,3-cyclohexanedimethanol, 1,4-cyclohexanedimethanol, 2,2,4,4-tetramethyl-1,3-cyclobutanediol, p-xylylenediol, or combinations of one or more of these glycols.

[0113] The diol residues may include from about 25 mole percent to about 100 mole percent, based on the total diol residues, of residues of a poly(ethylene glycol) having a structure $\text{H}-(\text{OCH}_2-\text{CH}_2)_n-\text{OH}$, wherein n is an integer in the range of 2 to about 500. Non-limiting examples of lower molecular weight polyethylene glycols (e.g., wherein n is from 2 to 6) are diethylene glycol, triethylene glycol, and tetraethylene glycol. Of these lower molecular weight glycols, diethylene and triethylene glycol are most preferred. Higher molecular weight polyethylene glycols (abbreviated herein as "PEG"), wherein n is from 7 to about 500, include the commercially available products known under the designation CARBOWAX®, a product of Dow Chemical Company (formerly Union Carbide). Typically, PEGs are used in combination with other diols such as, for example, diethylene glycol or ethylene glycol. Based on the values of n , which range from greater than 6 to 500, the molecular weight may range from greater than 300 to about 22,000 g/mol. The molecular weight and the mole percent are inversely proportional to each other; specifically, as the molecular weight is increased, the mole percent will be decreased in order to achieve a designated degree of hydrophilicity. For example, it is illustrative of this concept to consider that a PEG having a molecular weight of 1,000 g/mol may constitute up to 10 mole percent of the total diol, while a PEG having a molecular weight of 10,000 g/mol would typically be incorporated at a level of less than 1 mole percent of the total diol.

[0114] Certain dimer, trimer, and tetramer diols may be formed in situ due to side reactions that may be controlled by

varying the process conditions. For example, varying amounts of diethylene, triethylene, and tetraethylene glycols may be derived from ethylene glycol using an acid-catalyzed dehydration reaction which occurs readily when the polycondensation reaction is carried out under acidic conditions. The presence of buffer solutions, well known to those skilled in the art, may be added to the reaction mixture to retard these side reactions. Additional compositional latitude is possible, however, if the buffer is omitted and the dimerization, trimerization, and tetramerization reactions are allowed to proceed.

[0115] The sulfopolyesters of the present invention may include from 0 to less than 25, 20, 15, or 10 mole percent, based on the total repeating units, of residues of a branching monomer having 3 or more functional groups wherein the functional groups are hydroxyl, carboxyl, or a combination thereof. Non-limiting examples of branching monomers are 1,1,1-trimethylol propane, 1,1,1-trimethylolethane, glycerin, pentaerythritol, erythritol, threitol, dipentaerythritol, sorbitol, trimellitic anhydride, pyromellitic dianhydride, dimethylol propionic acid, or combinations thereof. The presence of a branching monomer may result in a number of possible benefits to the sulfopolyesters, including but not limited to, the ability to tailor rheological, solubility, and tensile properties. For example, at a constant molecular weight, a branched sulfopolyester, compared to a linear analog, will also have a greater concentration of end groups that may facilitate post-polymerization crosslinking reactions. At high concentrations of branching agent, however, the sulfopolyester may be prone to gelation.

[0116] The sulfopolyester used for the multicomponent fiber can have a glass transition temperature, abbreviated herein as "Tg," of at least 25° C., 30° C., 36° C., 40° C., 45° C., 50° C., 55° C., 57° C., 60° C., or 65° C., as measured on the dry polymer using standard techniques well known to persons skilled in the art, such as differential scanning calorimetry ("DSC"). The Tg measurements of the sulfopolyesters are conducted using a "dry polymer," that is, a polymer sample in which adventitious or absorbed water is driven off by heating the polymer to a temperature of about 200° C. and allowing the sample to return to room temperature. Typically, the sulfopolyester is dried in the DSC apparatus by conducting a first thermal scan in which the sample is heated to a temperature above the water vaporization temperature, holding the sample at that temperature until the vaporization of the water absorbed in the polymer is complete (as indicated by a large, broad endotherm), cooling the sample to room temperature, and then conducting a second thermal scan to obtain the Tg measurement.

[0117] In one embodiment, our invention provides a sulfopolyester having a glass transition temperature (Tg) of at least 25° C., wherein the sulfopolyester comprises:

[0118] (a) at least 50, 60, 75, or 85 mole percent and no more than 96, 95, 90, or 85 mole percent of one or more residues of isophthalic acid and/or terephthalic acid, based on the total acid residues;

[0119] (b) about 4 to about 30 mole percent, based on the total acid residues, of a residue of sod iosulfoisophthalic acid;

[0120] (c) one or more diol residues wherein at least 25, 50, 70, or 75 mole percent, based on the total diol residues, is a poly(ethylene glycol) having a structure $\text{H}-(\text{OCH}_2-\text{CH}_2)_n-\text{OH}$ wherein n is an integer in the range of 2 to about 500;

[0121] (d) 0 to about 20 mole percent, based on the total repeating units, of residues of a branching monomer having 3

or more functional groups wherein the functional groups are hydroxyl, carboxyl, or a combination thereof.

[0122] The sulfopolyesters of the instant invention are readily prepared from the appropriate dicarboxylic acids, esters, anhydrides, salts, sulfomonomer, and the appropriate diol or diol mixtures using typical polycondensation reaction conditions. They may be made by continuous, semi-continuous, and batch modes of operation and may utilize a variety of reactor types. Examples of suitable reactor types include, but are not limited to, stirred tank, continuous stirred tank, slurry, tubular, wiped-film, falling film, or extrusion reactors. The term "continuous" as used herein means a process wherein reactants are introduced and products withdrawn simultaneously in an uninterrupted manner. By "continuous" it is meant that the process is substantially or completely continuous in operation and is to be contrasted with a "batch" process. "Continuous" is not meant in any way to prohibit normal interruptions in the continuity of the process due to, for example, start-up, reactor maintenance, or scheduled shut down periods. The term "batch" process as used herein means a process wherein all the reactants are added to the reactor and then processed according to a predetermined course of reaction during which no material is fed or removed from the reactor. The term "semicontinuous" means a process where some of the reactants are charged at the beginning of the process and the remaining reactants are fed continuously as the reaction progresses. Alternatively, a semicontinuous process may also include a process similar to a batch process in which all the reactants are added at the beginning of the process except that one or more of the products are removed continuously as the reaction progresses. The process is operated advantageously as a continuous process for economic reasons and to produce superior coloration of the polymer as the sulfopolyester may deteriorate in appearance if allowed to reside in a reactor at an elevated temperature for too long a duration.

[0123] The sulfopolyesters can be prepared by procedures known to persons skilled in the art. The sulfomonomer is most often added directly to the reaction mixture from which the polymer is made, although other processes are known and may also be employed, for example, as described in U.S. Pat. No. 3,018,272, U.S. Pat. No. 3,075,952, and U.S. Pat. No. 3,033,822. The reaction of the sulfomonomer, diol component, and the dicarboxylic acid component may be carried out using conventional polyester polymerization conditions. For example, when preparing the sulfopolyesters by means of an ester interchange reaction, i.e., from the ester form of the dicarboxylic acid components, the reaction process may comprise two steps. In the first step, the diol component and the dicarboxylic acid component, such as, for example, dimethyl isophthalate, are reacted at elevated temperatures of about 150° C. to about 250° C. for about 0.5 to 8 hours at pressures ranging from about 0.0 kPa gauge to about 414 kPa gauge (60 pounds per square inch, "psig"). Preferably, the temperature for the ester interchange reaction ranges from about 180° C. to about 230° C. for about 1 to 4 hours while the preferred pressure ranges from about 103 kPa gauge (15 psig) to about 276 kPa gauge (40 psig). Thereafter, the reaction product is heated under higher temperatures and under reduced pressure to form a sulfopolyester with the elimination of a diol, which is readily volatilized under these conditions and removed from the system. This second step, or polycondensation step, is continued under higher vacuum conditions and a temperature which generally ranges from

about 230° C. to about 350° C., preferably about 250° C. to about 310° C., and most preferably about 260° C. to about 290° C. for about 0.1 to about 6 hours, or preferably, for about 0.2 to about 2 hours, until a polymer having the desired degree of polymerization, as determined by inherent viscosity, is obtained. The polycondensation step may be conducted under reduced pressure which ranges from about 53 kPa (400 torr) to about 0.013 kPa (0.1 torr). Stirring or appropriate conditions are used in both stages to ensure adequate heat transfer and surface renewal of the reaction mixture. The reactions of both stages are facilitated by appropriate catalysts such as, for example, alkoxy titanium compounds, alkali metal hydroxides and alcoholates, salts of organic carboxylic acids, alkyl tin compounds, metal oxides, and the like. A three-stage manufacturing procedure, similar to that described in U.S. Pat. No. 5,290,631 may also be used, particularly when a mixed monomer feed of acids and esters is employed.

[0124] To ensure that the reaction of the diol component and dicarboxylic acid component by an ester interchange reaction mechanism is driven to completion, it is preferred to employ about 1.05 to about 2.5 moles of diol component to one mole of dicarboxylic acid component. Persons of skill in the art will understand, however, that the ratio of diol component to dicarboxylic acid component is generally determined by the design of the reactor in which the reaction process occurs.

[0125] In the preparation of sulfopolyester by direct esterification, i.e., from the acid form of the dicarboxylic acid component, sulfopolyesters are produced by reacting the dicarboxylic acid or a mixture of dicarboxylic acids with the diol component or a mixture of diol components. The reaction is conducted at a pressure of from about 7 kPa gauge (1 psig) to about 1,379 kPa gauge (200 psig), preferably less than 689 kPa (100 psig) to produce a low molecular weight, linear or branched sulfopolyester product having an average degree of polymerization of from about 1.4 to about 10. The temperatures employed during the direct esterification reaction typically range from about 180° C. to about 280° C., more preferably ranging from about 220° C. to about 270° C. This low molecular weight polymer may then be polymerized by a polycondensation reaction.

[0126] As noted hereinabove, the sulfopolyesters are advantageous for the preparation of bicomponent and multicomponent fibers having a shaped cross section. We have discovered that sulfopolyesters or blends of sulfopolyesters having a glass transition temperature (T_g) of at least 35° C. are particularly useful for multicomponent fibers for preventing blocking and fusing of the fiber during spinning and take up. Further, to obtain a sulfopolyester with a T_g of at least 35° C., blends of one or more sulfopolyesters may be used in varying proportions to obtain a sulfopolyester blend having the desired T_g. The T_g of a sulfopolyester blend may be calculated by using a weighted average of the T_g's of the sulfopolyester components. For example, sulfopolyesters having a T_g of 48° C. may be blended in a 25:75 weight: weight ratio with another sulfopolyester having T_g of 65° C. to give a sulfopolyester blend having a T_g of approximately 61° C.

[0127] In another embodiment of the invention, the water dispersible sulfopolyester component of the multicomponent fiber presents properties which allow at least one of the following:

[0128] (a) the multicomponent fibers to be spun to a desired low denier,

[0129] (b) the sulfopolyester in these multicomponent fibers to be resistant to removal during hydroentangling of a web formed from the multicomponent fibers but is efficiently removed at elevated temperatures after hydroentanglement, and

[0130] (c) the multicomponent fibers to be heat settable so as to yield a stable, strong fabric. Surprising and unexpected results were achieved in furtherance of these objectives using a sulfopolyester having a certain melt viscosity and level of sulfomonomer residues.

[0131] As previously discussed, the sulfopolyester or sulfopolyester blend utilized in the multicomponent fibers or binders can have a melt viscosity of generally less than about 12,000, 10,000, 6,000, or 4,000 poise as measured at 240° C. and at a 1 rad/sec shear rate. In another aspect, the sulfopolyester or sulfopolyester blend exhibits a melt viscosity of between about 1,000 to 12,000 poise, more preferably between 2,000 to 6,000 poise, and most preferably between 2,500 to 4,000 poise measured at 240° C. and at a 1 rad/sec shear rate. Prior to determining the viscosity, the samples are dried at 60° C. in a vacuum oven for 2 days. The melt viscosity is measured on a rheometer using 25 mm diameter parallel-plate geometry at a 1 mm gap setting. A dynamic frequency sweep is run at a strain rate range of 1 to 400 rad/sec and 10 percent strain amplitude. The viscosity is then measured at 240° C. and at a strain rate of 1 rad/sec.

[0132] The level of sulfomonomer residues in the sulfopolyester polymers is at least 4 or 5 mole percent and less than about 25, 20, 12, or 10 mole percent, reported as a percentage of the total diacid or diol residues in the sulfopolyester. Sulfomonomers for use with the invention preferably have 2 functional groups and one or more sulfonate groups attached to an aromatic or cycloaliphatic ring wherein the functional groups are hydroxyl, carboxyl, or a combination thereof. A sodiosulfo-isophthalic acid monomer is particularly preferred.

[0133] In addition to the sulfomonomer described previously, the sulfopolyester preferably comprises residues of one or more dicarboxylic acids, one or more diol residues wherein at least 25 mole percent, based on the total diol residues, is a poly(ethylene glycol) having a structure $H-(OCH_2-CH_2)_n-OH$ wherein n is an integer in the range of 2 to about 500, and 0 to about 20 mole percent, based on the total repeating units, of residues of a branching monomer having 3 or more functional groups wherein the functional groups are hydroxyl, carboxyl, or a combination thereof.

[0134] In a particularly preferred embodiment, the sulfopolyester comprises from about 60 to 99, 80 to 96, or 88 to 94 mole percent of dicarboxylic acid residues, from about 1 to 40, 4 to 20, or 6 to 12 mole percent of sulfomonomer residues, and 100 mole percent of diol residues (there being a total mole percent of 200 percent, i.e., 100 mole percent diacid and 100 mole percent diol). More specifically, the dicarboxylic portion of the sulfopolyester comprises between about 50 to 95, 60 to 80, or 65 to 75 mole percent of terephthalic acid, about 0.5 to 49, 1 to 30, or 15 to 25 mole percent of isophthalic acid, and about 1 to 40, 4 to 20, or 6 to 12 mole percent of 5-sodiosulfoisophthalic acid (5-SSIPA). The diol portion comprises from about 0 to 50 mole percent of diethylene glycol and from about 50 to 100 mole percent of ethylene glycol. An exemplary formulation according to this embodiment of the invention is set forth subsequently.

	Approximate Mole percent (based on total moles of diol or diacid residues)
Terephthalic acid	71
Isophthalic acid	20
5-SSIPA	9
Diethylene glycol	35
Ethylene glycol	65

[0135] The water dispersible component of the multicomponent fibers or the binders of the nonwoven article may consist essentially of or, consist of, the sulfopolyesters described hereinabove. In another embodiment, however, the sulfopolyesters of this invention may be blended with one or more supplemental polymers to modify the properties of the resulting multicomponent fiber or nonwoven article. The supplemental polymer may or may not be water-dispersible depending on the application and may be miscible or immiscible with the sulfopolyester. If the supplemental polymer is water non-dispersible, it is preferred that the blend with the sulfopolyester is immiscible.

[0136] The term “miscible,” as used herein, is intended to mean that the blend has a single, homogeneous amorphous phase as indicated by a single composition-dependent Tg. For example, a first polymer that is miscible with second polymer may be used to “plasticize” the second polymer as illustrated, for example, in U.S. Pat. No. 6,211,309. By contrast, the term “immiscible,” as used herein, denotes a blend that shows at least two randomly mixed phases and exhibits more than one Tg. Some polymers may be immiscible and yet compatible with the sulfopolyester. A further general description of miscible and immiscible polymer blends and the various analytical techniques for their characterization may be found in Polymer Blends Volumes 1 and 2, Edited by D. R. Paul and C. B. Bucknall, 2000, John Wiley & Sons, Inc, the disclosure of which is incorporated herein by reference.

[0137] Non-limiting examples of water-dispersible polymers that may be blended with the sulfopolyester are polymethacrylic acid, polyvinyl pyrrolidone, polyethyleneacrylic acid copolymers, polyvinyl methyl ether, polyvinyl alcohol, polyethylene oxide, hydroxy propyl cellulose, hydroxypropyl methyl cellulose, methyl cellulose, ethyl hydroxyethyl cellulose, isopropyl cellulose, methyl ether starch, polyacrylamides, poly(N-vinyl caprolactam), polyethyl oxazoline, poly(2-isopropyl-2-oxazoline), polyvinyl methyl oxazolidone, water-dispersible sulfopolyesters, polyvinyl methyl oxazolidimone, poly(2,4-dimethyl-6-triazinyl-ethylene), and ethylene oxide-propylene oxide copolymers. Examples of polymers which are water non-dispersible that may be blended with the sulfopolyester include, but are not limited to, polyolefins, such as homo- and copolymers of polyethylene and polypropylene; poly(ethylene terephthalate); poly(butylene terephthalate); and polyamides, such as nylon-6; polylactides; caprolactone; Eastar Bio® (poly(tetramethylene adipate-co-terephthalate), a product of Eastman Chemical Company); polycarbonate; polyurethane; and polyvinyl chloride.

[0138] According to our invention, blends of more than one sulfopolyester may be used to tailor the end-use properties of the resulting multicomponent fiber or nonwoven article. The blends of one or more sulfopolyesters will have Tg's of at least 25° C. for the binder compositions and at least 35° C. for the multicomponent fibers.

[0139] The sulfopolyester and supplemental polymer may be blended in batch, semicontinuous, or continuous processes. Small scale batches may be readily prepared in any high-intensity mixing devices well known to those skilled in the art, such as Banbury mixers, prior to melt-spinning fibers. The components may also be blended in solution in an appropriate solvent. The melt blending method includes blending the sulfopolyester and supplemental polymer at a temperature sufficient to melt the polymers. The blend may be cooled and pelletized for further use or the melt blend can be melt spun directly from this molten blend into fiber form. The term "melt" as used herein includes, but is not limited to, merely softening the polyester. For melt mixing methods generally known in the polymers art, see *Mixing and Compounding of Polymers* (I. Manas-Zloczower & Z. Tadmor editors, Carl Hanser Verlag Publisher, 1994, New York, N.Y.).

[0140] The water non-dispersible components of the multicomponent fibers and the nonwoven articles of this invention also may contain other conventional additives and ingredients which do not deleteriously affect their end use. For example, additives include, but are not limited to, starches, fillers, light and heat stabilizers, antistatic agents, extrusion aids, dyes, anticounterfeiting markers, slip agents, tougheners, adhesion promoters, oxidative stabilizers, UV absorbers, colorants, pigments, opacifiers (delustrants), optical brighteners, fillers, nucleating agents, plasticizers, viscosity modifiers, surface modifiers, antimicrobials, antifoams, lubricants, thermostabilizers, emulsifiers, disinfectants, cold flow inhibitors, branching agents, oils, waxes, and catalysts.

[0141] In one embodiment of the invention, the multicomponent fibers and nonwoven articles will contain less than 10 weight percent of anti-blocking additives, based on the total weight of the multicomponent fiber or nonwoven article. For example, the multicomponent fiber or nonwoven article may contain less than 10, 9, 5, 3, or 1 weight percent of a pigment or filler based on the total weight of the multicomponent fiber or nonwoven article. Colorants, sometimes referred to as toners, may be added to impart a desired neutral hue and/or brightness to the water non-dispersible polymer. When colored fibers are desired, pigments or colorants may be included when producing the water non-dispersible polymer or they may be melt blended with the preformed water non-dispersible polymer. A preferred method of including colorants is to use a colorant having thermally stable organic colored compounds having reactive groups such that the colorant is copolymerized and incorporated into the water non-dispersible polymer to improve its hue. For example, colorants such as dyes possessing reactive hydroxyl and/or carboxyl groups, including, but not limited to, blue and red substituted anthraquinones, may be copolymerized into the polymer chain. As previously discussed, the segments or domains of the multicomponent fibers may comprise one or more water non-dispersible synthetic polymers. Examples of water non-dispersible synthetic polymers which may be used in segments of the multicomponent fiber include, but are not limited to, polyolefins, polyesters, copolyesters, polyamides, polylactides, polycaprolactone, polycarbonate, polyurethane, acrylics, cellulose ester, and/or polyvinyl chloride. For example, the water non-dispersible synthetic polymer may be polyester such as polyethylene terephthalate, polyethylene terephthalate homopolymer, polyethylene terephthalate copolymer, polybutylene terephthalate, polycyclohexylene cyclohexanedicarboxylate, polypropylene terephthalate, polycyclohexylene terephthalate, polytrimethylene tereph-

thalate, and the like. As In another example, the water non-dispersible synthetic polymer can be biodistintegratable as determined by DIN Standard 54900 and/or biodegradable as determined by ASTM Standard Method, D6340-98. Examples of biodegradable polyesters and polyester blends are disclosed in U.S. Pat. No. 5,599,858; U.S. Pat. No. 5,580,911; U.S. Pat. No. 5,446,079; and U.S. Pat. No. 5,559,171.

[0142] The term "biodegradable," as used herein in reference to the water non-dispersible synthetic polymers, is understood to mean that the polymers are degraded under environmental influences such as, for example, in a composting environment, in an appropriate and demonstrable time span as defined, for example, by ASTM Standard Method, D6340-98, entitled "Standard Test Methods for Determining Aerobic Biodegradation of Radiolabeled Plastic Materials in an Aqueous or Compost Environment." The water non-dispersible synthetic polymers of the present invention also may be "biodisintegratable," meaning that the polymers are easily fragmented in a composting environment as defined, for example, by DIN Standard 54900. For example, the biodegradable polymer is initially reduced in molecular weight in the environment by the action of heat, water, air, microbes, and other factors. This reduction in molecular weight results in a loss of physical properties (tenacity) and often in fiber breakage. Once the molecular weight of the polymer is sufficiently low, the monomers and oligomers are then assimilated by the microbes. In an aerobic environment, these monomers or oligomers are ultimately oxidized to CO₂, H₂O, and new cell biomass. In an anaerobic environment, the monomers or oligomers are ultimately converted to CO₂, H₂, acetate, methane, and cell biomass.

[0143] Additionally, the water non-dispersible synthetic polymers may comprise aliphatic-aromatic polyesters, abbreviated herein as "AAPE." The term "aliphatic-aromatic polyester," as used herein, means a polyester comprising a mixture of residues from aliphatic dicarboxylic acids, cycloaliphatic dicarboxylic acids, aliphatic diols, cycloaliphatic diols, aromatic diols, and aromatic dicarboxylic acids. The term "non-aromatic," as used herein with respect to the dicarboxylic acid and diol monomers of the present invention, means that carboxyl or hydroxyl groups of the monomer are not connected through an aromatic nucleus. For example, adipic acid contains no aromatic nucleus in its backbone (i.e., the chain of carbon atoms connecting the carboxylic acid groups), thus adipic acid is "non-aromatic." By contrast, the term "aromatic" means the dicarboxylic acid or diol contains an aromatic nucleus in its backbone such as, for example, terephthalic acid or 2,6-naphthalene dicarboxylic acid. "Non-aromatic," therefore, is intended to include both aliphatic and cycloaliphatic structures such as, for example, diols and dicarboxylic acids, which contain as a backbone a straight or branched chain or cyclic arrangement of the constituent carbon atoms which may be saturated or paraffinic in nature, unsaturated (i.e., containing non-aromatic carbon-carbon double bonds), or acetylenic (i.e., containing carbon-carbon triple bonds). Thus, non-aromatic is intended to include linear and branched, chain structures (referred to herein as "aliphatic") and cyclic structures (referred to herein as "alicyclic" or "cycloaliphatic"). The term "non-aromatic," however, is not intended to exclude any aromatic substituents which may be attached to the backbone of an aliphatic or cycloaliphatic diol or dicarboxylic acid. In the present invention, the difunctional carboxylic acid typically is a aliphatic dicarboxylic acid such as, for example, adipic acid, or an aromatic dicar-

boxylic acid such as, for example, terephthalic acid. The difunctional hydroxyl compound may be cycloaliphatic diol such as, for example, 1,4-cyclohexanedimethanol, a linear or branched aliphatic diol such as, for example, 1,4-butanediol, or an aromatic diol such as, for example, hydroquinone.

[0144] The AAPE may be a linear or branched random copolyester and/or chain extended copolyester comprising diol residues which comprise the residues of one or more substituted or unsubstituted, linear or branched, diols selected from aliphatic diols containing 2 to 8 carbon atoms, polyalkylene ether glycols containing 2 to 8 carbon atoms, and cycloaliphatic diols containing about 4 to about 12 carbon atoms. The substituted diols, typically, will comprise 1 to 4 substituents independently selected from halo, C₆-C₁₀ aryl, and C₁-C₄ alkoxy. Examples of diols which may be used include, but are not limited to, ethylene glycol, diethylene glycol, propylene glycol, 1,3-propanediol, 2,2-dimethyl-1,3-propanediol, 1,3-butanediol, 1,4-butanediol, 1,5-pentanediol, 1,6-hexanediol, polyethylene glycol, diethylene glycol, 2,2,4-trimethyl-1,6-hexanediol, thiodiethanol, 1,3-cyclohexanedimethanol, 1,4-cyclohexanedimethanol, 2,2,4,4-tetramethyl-1,3-cyclobutanediol, triethylene glycol, and tetraethylene glycol. The AAPE also comprises diacid residues which contain about 35 to about 99 mole percent, based on the total moles of diacid residues, of the residues of one or more substituted or unsubstituted, linear or branched, non-aromatic dicarboxylic acids selected from aliphatic dicarboxylic acids containing 2 to 12 carbon atoms and cycloaliphatic acids containing about 5 to 10 carbon atoms. The substituted non-aromatic dicarboxylic acids will typically contain 1 to about 4 substituents selected from halo, C₆-C₁₀ aryl, and C₁-C₄ alkoxy. Non-limiting examples of non-aromatic diacids include malonic, succinic, glutaric, adipic, pimelic, azelaic, sebacic, fumaric, 2,2-dimethyl glutaric, suberic, 1,3-cyclopentanedicarboxylic, 1,4-cyclohexanedicarboxylic, 1,3-cyclohexanedicarboxylic, diglycolic, itaconic, maleic, and 2,5-norbornane-dicarboxylic. In addition to the non-aromatic dicarboxylic acids, the AAPE comprises about 1 to about 65 mole percent, based on the total moles of diacid residues, of the residues of one or more substituted or unsubstituted aromatic dicarboxylic acids containing 6 to about 10 carbon atoms. In the case where substituted aromatic dicarboxylic acids are used, they will typically contain 1 to about 4 substituents selected from halo, C₆-C₁₀ aryl, and C₁-C₄ alkoxy. Non-limiting examples of aromatic dicarboxylic acids which may be used in the AAPE of our invention are terephthalic acid, isophthalic acid, salts of 5-sulfoisophthalic acid, and 2,6-naphthalenedicarboxylic acid. More preferably, the non-aromatic dicarboxylic acid will comprise adipic acid, the aromatic dicarboxylic acid will comprise terephthalic acid, and the diol will comprise 1,4-butanediol.

[0145] Other possible compositions for the AAPE are those prepared from the following diols and dicarboxylic acids (or polyester-forming equivalents thereof such as diesters) in the following mole percentages, based on 100 mole percent of a diacid component and 100 mole percent of a diol component:

[0146] (1) glutaric acid (about 30 to about 75 mole percent), terephthalic acid (about 25 to about 70 mole percent), 1,4-butanediol (about 90 to 100 mole percent), and modifying diol (0 to about 10 mole percent);

[0147] (2) succinic acid (about 30 to about 95 mole percent), terephthalic acid (about 5 to about 70 mole percent), 1,4-butanediol (about 90 to 100 mole percent), and modifying diol (0 to about 10 mole percent); and

[0148] (3) adipic acid (about 30 to about 75 mole percent), terephthalic acid (about 25 to about 70 mole percent), 1,4-butanediol (about 90 to 100 mole percent), and modifying diol (0 to about 10 mole percent).

[0149] The modifying diol preferably is selected from 1,4-cyclohexanedimethanol, triethylene glycol, polyethylene glycol, and neopentyl glycol. The most preferred AAPEs are linear, branched, or chain extended copolyesters comprising about 50 to about 60 mole percent adipic acid residues, about 40 to about 50 mole percent terephthalic acid residues, and at least 95 mole percent 1,4-butanediol residues. Even more preferably, the adipic acid residues comprise about 55 to about 60 mole percent, the terephthalic acid residues comprise about 40 to about 45 mole percent, and the diol residues comprise about 95 mole percent 1,4-butanediol residues. Such compositions are commercially available under the trademark EASTAR BIO® copolyester from Eastman Chemical Company, Kingsport, Tenn., and under the trademark ECOFLEX® from BASF Corporation.

[0150] Additional, specific examples of preferred AAPEs include a poly(tetra-methylene glutarate-co-terephthalate) containing (a) 50 mole percent glutaric acid residues, 50 mole percent terephthalic acid residues, and 100 mole percent 1,4-butanediol residues, (b) 60 mole percent glutaric acid residues, 40 mole percent terephthalic acid residues, and 100 mole percent 1,4-butanediol residues, or (c) 40 mole percent glutaric acid residues, 60 mole percent terephthalic acid residues, and 100 mole percent 1,4-butanediol residues; a poly(tetramethylene succinate-co-terephthalate) containing (a) 85 mole percent succinic acid residues, 15 mole percent terephthalic acid residues, and 100 mole percent 1,4-butanediol residues or (b) 70 mole percent succinic acid residues, 30 mole percent terephthalic acid residues, and 100 mole percent 1,4-butanediol residues; a poly(ethylene succinate-co-terephthalate) containing 70 mole percent succinic acid residues, 30 mole percent terephthalic acid residues, and 100 mole percent ethylene glycol residues; and a poly(tetramethylene adipate-co-terephthalate) containing (a) 85 mole percent adipic acid residues, 15 mole percent terephthalic acid residues, and 100 mole percent 1,4-butanediol residues; or (b) 55 mole percent adipic acid residues, 45 mole percent terephthalic acid residues, and 100 mole percent 1,4-butanediol residues.

[0151] The AAPE preferably comprises from about 10 to about 1,000 repeating units and preferably, from about 15 to about 600 repeating units. The AAPE may have an inherent viscosity of about 0.4 to about 2.0 dL/g, or more preferably about 0.7 to about 1.6 dL/g, as measured at a temperature of 25° C. using a concentration of 0.5 g copolyester in 100 ml of a 60/40 by weight solution of phenol/tetrachloroethane.

[0152] The AAPE, optionally, may contain the residues of a branching agent. The mole percent ranges for the branching agent are from about 0 to about 2 mole percent, preferably about 0.1 to about 1 mole percent, and most preferably about 0.1 to about 0.5 mole percent based on the total moles of diacid or diol residues (depending on whether the branching agent contains carboxyl or hydroxyl groups). The branching agent preferably has a weight average molecular weight of about 50 to about 5,000, more preferably about 92 to about 3,000, and a functionality of about 3 to about 6. The branching agent, for example, may be the esterified residue of a polyol having 3 to 6 hydroxyl groups, a polycarboxylic acid having 3 or 4 carboxyl groups (or ester-forming equivalent groups), or a hydroxy acid having a total of 3 to 6 hydroxyl and

carboxyl groups. In addition, the AAPE may be branched by the addition of a peroxide during reactive extrusion.

[0153] The water non-dispersible component of the multi-component fiber may comprise any of those water non-dispersible synthetic polymers described previously. Spinning of the fiber may also occur according to any method described herein. However, the improved rheological properties of the multicomponent fibers in accordance with this aspect of the invention provide for enhanced drawings speeds. When the sulfopolyester and water non-dispersible synthetic polymer are extruded to produce multicomponent extrudates, the multicomponent extrudate is capable of being melt drawn to produce the multicomponent fiber, using any of the methods disclosed herein, at a speed of at least about 2,000, 3,000, 4,000, or 4,500 m/min. Although not intending to be bound by theory, melt drawing of the multicomponent extrudates at these speeds results in at least some oriented crystallinity in the water non-dispersible component of the multicomponent fiber. This oriented crystallinity can increase the dimensional stability of nonwoven materials made from the multicomponent fibers during subsequent processing.

[0154] Another advantage of the multicomponent extrudate is that it can be melt drawn to a multicomponent fiber having an as-spun denier of less than 15, 10, 5, or 2.5 deniers per filament.

[0155] Therefore, in another embodiment of the invention, a multicomponent extrudate having a shaped cross section, comprising:

[0156] (a) at least one water dispersible sulfopolyester; and

[0157] (b) a plurality of domains comprising one or more water non-dispersible synthetic polymers immiscible with the sulfopolyester, wherein the domains are substantially isolated from each other by the sulfopolyester intervening between the domains, wherein the extrudate is capable of being melt drawn at a speed of at least about 2000 m/min.

[0158] Optionally, the drawn fibers may be textured and wound-up to form a bulky continuous filament. This one-step technique is known in the art as spin-draw-texturing. Other embodiments include flat filament (non-textured) yarns, or cut staple fiber, either crimped or uncrimped.

[0159] This invention can be further illustrated by the following examples of embodiments thereof, although it will be understood that these examples are included merely for the purposes of illustration and are not intended to limit the scope of the invention unless otherwise specifically indicated.

EXAMPLES

Example 1

[0160] A sulfopolyester polymer was prepared with the following diacid and diol composition: diacid composition (71 mole percent terephthalic acid, 20 mole percent isophthalic acid, and 9 mole percent 5-(sodiumsulfo) isophthalic acid) and diol composition (60 mole percent ethylene glycol and 40 mole percent diethylene glycol). The sulfopolyester was prepared by high temperature polyesterification under a vacuum. The esterification conditions were controlled to produce a sulfopolyester having an inherent viscosity of about 0.31. The melt viscosity of this sulfopolyester was measured to be in the range of about 3,000 to 4,000 poise at 240° C. and 1 rad/sec shear rate.

Example 2

[0161] The sulfopolyester polymer of Example 1 was spun into bicomponent segmented pie fibers and formed into a

nonwoven web according to the procedure described in Example 9 of U.S. 2008/0311815, herein incorporated by reference. During the process, the primary extruder (A) fed Eastman F61HC PET polyester melt to form the larger segment slices into the segmented pie structure. The extrusion zones were set to melt the PET entering the spinnerette die at a temperature of 285° C. The secondary extruder (B) processed the sulfopolyester polymer of Example 1, which was fed at a melt temperature of 255° C. into the spinnerette die. The melt throughput rate per hole was 0.6 gm/min. The volume ratio of PET to sulfopolyester in the bicomponent extrudates was set at 70/30, which represents the weight ratio of about 70/30. The cross-section of the bicomponent extrudates had wedge shaped domains of PET with sulfopolyester polymer separating these domains.

[0162] The bicomponent extrudates were melt drawn using the same aspirator assembly used in Comparative Example 8 of U.S. 2008/0311815, herein incorporated by reference. The maximum available pressure of the air to the aspirator without breaking the bicomponent fibers during drawing was 45 psi. Using 45 psi air, the bicomponent extrudates were melt drawn down to bicomponent fibers with as-spun denier of about 1.2 with the bicomponent fibers exhibiting a diameter of about 11 to 12 microns when viewed under a microscope. The speed during the melt drawing process was calculated to be about 4,500 m/min.

[0163] The bicomponent fibers were laid down into nonwoven webs having weights of 140 gsm and 110 gsm. The shrinkage of the webs was measured by conditioning the material in a forced-air oven for five minutes at 120° C. The area of the nonwoven webs after shrinkage was about 29 percent of the webs' starting areas.

[0164] Microscopic examination of the cross section of the melt drawn fibers and fibers taken from the nonwoven web displayed a very good segmented pie structure where the individual segments were clearly defined and exhibited similar size and shape. The PET segments were completely separated from each other so that they would form eight separate PET monocomponent fibers having a pie-slice shape after removal of the sulfopolyester from the bicomponent fiber.

[0165] The nonwoven web, having a 110 gsm fabric weight, was soaked for eight minutes in a static deionized water bath at various temperatures. The soaked nonwoven web was dried and the percent weight loss due to soaking in deionized water at the various temperatures was measured as shown in Table 1.

TABLE 1

	Soaking Temperature					
	36° C.	41° C.	46° C.	51° C.	56° C.	72° C.
Nonwoven Web Weight Loss	1.1	2.2	14.4	25.9	28.5	30.5

[0166] The sulfopolyester polymer dissipated very readily into deionized water at temperatures above about 46° C., with the removal of the sulfopolyester polymer from the fibers being very extensive or complete at temperatures above 51° C. as shown by the weight loss. A weight loss of about 30 percent represented complete removal of the sulfopolyester from the bicomponent fibers in the nonwoven web. If hydroentanglement is used to process this nonwoven web of

bicomponent fibers comprising this sulfopolyester, it would be expected that the polymer would not be extensively removed by the hydroentangling water jets at water temperatures below 40° C.

Example 3

[0167] The nonwoven webs of Example 2 having basis weights of both 140 gsm and 110 gsm were hydroentangled using a hydroentangling apparatus manufactured by Fleissner, GmbH, Egelsbach, Germany. The machine had five total hydroentangling stations wherein three sets of jets contacted the top side of the nonwoven web and two sets of jets contacted the opposite side of the nonwoven web. The water jets comprised a series of fine orifices about 100 microns in diameter machined in two-foot wide jet strips. The water pressure to the jets was set at 60 bar (Jet Strip #1), 190 bar (Jet Strips #2 and 3), and 230 bar (Jet Strips #4 and 5). During the hydroentanglement process, the temperature of the water to the jets was found to be in the range of about 40 to 45° C. The nonwoven fabric exiting the hydroentangling unit was strongly tied together. The continuous fibers were knotted together to produce a hydroentangled nonwoven fabric with high resistance to tearing when stretched in both directions.

[0168] Next, the hydroentangled nonwoven fabric was fastened onto a tenter frame comprising a rigid rectangular frame with a series of pins around the periphery thereof. The fabric was fastened to the pins to restrain the fabric from shrinking as it was heated. The frame with the fabric sample was placed in a forced-air oven for three minutes at 130° C. to cause the fabric to heat set while being restrained. After heat setting, the conditioned fabric was cut into a sample specimen of measured size and the specimen was conditioned at 130° C. without restraint by a tenter frame. The dimensions of the hydroentangled nonwoven fabric after this conditioning were measured and only minimal shrinkage (<0.5 percent reduction in dimension) was observed. It was apparent that heat setting of the hydroentangled nonwoven fabric was sufficient to produce a dimensionally stable nonwoven fabric.

[0169] The hydroentangled nonwoven fabric, after being heat set as described above, was washed in 90° C. deionized water to remove the sulfopolyester polymer and leave the PET monocomponent fiber segments remaining in the hydroentangled fabric.

[0170] After repeated washings, the dried fabric exhibited a weight loss of approximately 26 percent. Washing the nonwoven web before hydroentangling demonstrated a weight loss of 31.3 percent. Therefore, the hydroentangling process removed some of the sulfopolyester from the nonwoven web, but this amount was relatively small. In order to lessen the amount of sulfopolyester removed during hydroentanglement, the water temperature of the hydroentanglement jets should be lowered to below 40° C.

[0171] The sulfopolyester of Example 1 was found to produce segmented pie fibers having good segment distribution wherein the water non-dispersible polymer segments formed individual fibers of similar size and shape after removal of the sulfopolyester polymer. The rheology of the sulfopolyester was suitable to allow the bicomponent extrudates to be melt drawn at high rates to achieve fine denier bicomponent fibers with as-spun denier as low as about 1.0. These bicomponent fibers are capable of being laid down into a nonwoven web, which could be hydroentangled without experiencing significant loss of sulfopolyester polymer to produce the nonwoven fabric. The nonwoven fabric produced by hydroentangling

the nonwoven web exhibited high strength and could be heat set at temperatures of about 120° C. or higher to produce a nonwoven fabric with excellent dimensional stability. The sulfopolyester polymer was removed from the hydroentangled nonwoven fabric in a washing step. This resulted in a strong nonwoven fabric product with a lighter fabric weight, greater flexibility, and softer hand. The PET microfibers in this nonwoven fabric product were wedge shaped and exhibited an average denier of about 0.1.

Example 4

[0172] A sulfopolyester polymer was prepared with the following diacid and diol composition: diacid composition (69 mole percent terephthalic acid, 22.5 mole percent isophthalic acid, and 8.5 mole percent 5-(sodiumsulfo) isophthalic acid) and diol composition (65 mole percent ethylene glycol and 35 mole percent diethylene glycol). The sulfopolyester was prepared by high temperature polyesterification under a vacuum. The esterification conditions were controlled to produce a sulfopolyester having an inherent viscosity of about 0.33. The melt viscosity of this sulfopolyester was measured to be in the range of about 6000 to 7000 poise at 240° C. and 1 rad/sec shear rate.

Example 5

[0173] The sulfopolyester polymer of Example 4 was spun into bicomponent fibers having an islands-in-sea cross-section configuration with 16 islands on a spunbond line. The primary extruder (A) fed Eastman F61HC PET polyester melt to form the islands in the islands-in-sea structure. The extrusion zones were set to melt the PET entering the spinnerette die at a temperature of about 290° C. The secondary extruder (B) processed the sulfopolyester polymer of Example 4, which was fed at a melt temperature of about 260° C. into the spinnerette die. The volume ratio of PET to sulfopolyester in the bicomponent extrudates was set at 70/30, which represents the weight ratio of about 70/30. The melt throughput rate through the spinneret was 0.6 g/hole/minute. The cross-section of the bicomponent extrudates had round shaped island domains of PET with sulfopolyester polymer separating these domains.

[0174] The bicomponent extrudates were melt drawn using an aspirator assembly. The maximum available pressure of air to the aspirator without breaking the bicomponent fibers during melt drawing was 50 psi. Using 50 psi air, the bicomponent extrudates were melt drawn down to bicomponent fibers with an as-spun denier of about 1.4 with the bicomponent fibers exhibiting a diameter of about 12 microns when viewed under a microscope. The speed during the drawing process was calculated to be about 3,900 m/min.

Example 6

[0175] The sulfopolyester polymer of Example 4 was spun into bicomponent islands-in-the-sea cross-section fibers with 64 islands fibers using a bicomponent extrusion line. The primary extruder (A) fed Eastman F61HC PET polyester melt to form the islands in the islands-in-the-sea fiber cross-section structure. The secondary extruder (B) fed the sulfopolyester polymer melt to form the sea in the islands-in-sea bicomponent fiber.

[0176] The inherent viscosity of polyester was 0.61 dL/g while the melt viscosity of the dry sulfopolyester was about 7,000 poise measured at 240° C. and 1 rad/sec strain rate

using the melt viscosity measurement procedure described earlier. These islands-in-sea bicomponent fibers were made using a spinneret with 198 holes and a throughput rate of 0.85 gms/minute/hole. The polymer ratio between "islands" polyester and "sea" sulfopolyester was 65 percent to 35 percent. These bicomponent fibers were spun using an extrusion temperature of 280° C. for the polyester component and 260° C. for the sulfopolyester component. The bicomponent fiber contains a multiplicity of filaments (198 filaments) and was melt spun at a speed of about 530 meters/minute, forming filaments with a nominal denier per filament of about 14. A finish solution of 24 weight percent PT 769 finish from Goulston Technologies was applied to the bicomponent fiber using a kiss roll applicator. The filaments of the bicomponent fiber were then drawn in line using a set of two godet rolls, heated to 90° C. and 130° C. respectively, and the final draw roll operating at a speed of about 1,750 meters/minute, to provide a filament draw ratio of about 3.3× forming the drawn islands-in-sea bicomponent filaments with a nominal denier per filament of about 4.5 or an average diameter of about 25 microns. These filaments comprised the polyester microfiber "islands" having an average diameter of about 2.5 microns.

Example 7

[0177] The drawn islands-in-sea bicomponent fibers of Example 6 were cut into short length fibers of 3.2 millimeters and 6.4 millimeters cut lengths, thereby producing short length bicomponent fibers with 64 islands-in-sea cross-section configurations. These short cut bicomponent fibers comprised "islands" of polyester and a "sea" of water dispersible sulfopolyester polymer. The cross-sectional distribution of islands and sea was essentially consistent along the length of these short cut bicomponent fibers.

Example 8

[0178] The drawn islands-in-sea bicomponent fibers of Example 6 were soaked in soft water for about 24 hours and then cut into short length fibers of 3.2 millimeters and 6.4 millimeters cut lengths. The water dispersible sulfopolyester was at least partially emulsified prior to cutting into short length fibers. Partial separation of islands from the sea component was therefore effected, thereby producing partially emulsified short length islands-in-sea bicomponent fibers.

Example 9

[0179] The short cut length islands-in-sea bicomponent fibers of Example 8 were washed using soft water at 80° C. to remove the water dispersible sulfopolyester "sea" component, thereby releasing the polyester microfibrils which were the "islands" component of the bicomponent fibers. The washed polyester microfibrils were rinsed using soft water at 25° C. to essentially remove most of the "sea" component. The optical microscopic observation of the washed polyester microfibrils showed an average diameter of about 2.5 microns and lengths of 3.2 and 6.4 millimeters.

Comparative Example 10

[0180] Wet-laid hand sheets were prepared using the following procedure: 7.5 gms of Albacel Southern Bleached Softwood Kraft (SBSK) from International Paper, Memphis, Tenn., U.S.A., and 188 gms of room temperature water were placed in a 1,000 ml pulper and pulped for 30 seconds at 7,000 rpm to produce a pulped mixture. This pulped mixture was

transferred into an 8 liter metal beaker along with 7,312 grams of room temperature water to make about 0.1 percent consistency (7,500 gms water and 7.5 gms fibrous material) pulp slurry. This pulp slurry was agitated using a high speed impeller mixer for 60 seconds. Procedure to make the hand sheet from this pulp slurry was as follows. The pulp slurry was poured into a 25 centimeters×30 centimeters hand sheet mold while continuing to stir. The drop valve was pulled, and the pulp fibers were allowed to drain on a screen to form a hand sheet. 750 grams per square meter (gsm) blotter paper was placed on top of the formed hand sheet, and the blotter paper was flattened onto the hand sheet. The screen frame was raised and inverted onto a clean release paper and allowed to sit for 10 minutes. The screen was raised vertically away from the formed hand sheet. Two sheets of 750 gsm blotter paper were placed on top of the formed hand sheet. The hand sheet was dried along with the three blotter papers using a Norwood Dryer at about 88° C. for 15 minutes. One blotter paper was removed leaving one blotter paper on each side of the hand sheet. The hand sheet was dried using a Williams Dryer at 65° C. for 15 minutes. The hand sheet was then further dried for 12 to 24 hours using a 40 kg dry press. The blotter paper was removed to obtain the dry hand sheet sample. The hand sheet was trimmed to 21.6 centimeters by 27.9 centimeters dimensions for testing.

Comparative Example 11

[0181] Wet-laid hand sheets were prepared using the following procedure: 7.5 gms of Albacel Southern Bleached Softwood Kraft (SBSK) from International Paper, Memphis, Tenn., U.S.A., 0.3 gms of Solivitose N pre-gelatinized quaternary cationic potato starch from Avebe, Foxhol, the Netherlands, and 188 gms of room temperature water were placed in a 1,000 ml pulper and pulped for 30 seconds at 7,000 rpm to produce a pulped mixture. This pulped mixture was transferred into an 8 liter metal beaker along with 7,312 gms of room temperature water to make about 0.1 percent consistency (7,500 gms water and 7.5 gms fibrous material) to produce a pulp slurry. This pulp slurry was agitated using a high speed impeller mixer for 60 seconds. The rest of procedure for making hand sheet from this pulp slurry was same as in Comparative Example 10.

Example 12

[0182] Wet-laid hand sheets were prepared using the following procedure. 6.0 gms of Albacel Southern Bleached Softwood Kraft (SBSK) from International Paper, Memphis, Tenn., U.S.A., 0.3 gms of Solivitose N pre-gelatinized quaternary cationic potato starch from Avebe, Foxhol, the Netherlands, 1.5 gms of 3.2 millimeter cut length islands-in-sea fibers of Example 7 and 188 gms of room temperature water were placed in a 1,000 ml pulper and pulped for 30 seconds at 7,000 rpm to produce a fiber mix slurry. This fiber mix slurry was heated to 82° C. for 10 seconds to emulsify and remove the water dispersible sulfopolyester component in the islands-in-sea fibers and release the polyester microfibrils. The fiber mix slurry was then strained to produce a sulfopolyester dispersion comprising the sulfopolyester and a microfiber-containing mixture comprising pulp fibers and polyester microfiber. The microfiber-containing mixture was further rinsed using 500 gms of room temperature water to further remove the water dispersible sulfopolyester from the microfiber-containing mixture. This microfiber-containing mixture

was transferred into an 8 liter metal beaker along with 7,312 gms of room temperature water to make about 0.1 percent consistency (7,500 gms water and 7.5 gms fibrous material) to produce a microfibrer-containing slurry. This microfibrer-containing slurry was agitated using a high speed impeller mixer for 60 seconds. The rest of procedure for making hand sheet from this microfibrer-containing slurry was same as in Comparative Example 10.

Comparative Example 13

[0183] Wet-laid hand sheets were prepared using the following procedure. 7.5 gms of MicroStrand 475-106 micro glass fiber available from Johns Manville, Denver, Colo., U.S.A., 0.3 gms of Solivitose N pre-gelatinized quaternary cationic potato starch from Avebe, Foxhol, the Netherlands, and 188 gms of room temperature water were placed in a 1,000 ml pulper and pulped for 30 seconds at 7,000 rpm to produce a glass fiber mixture. This glass fiber mixture was transferred into an 8 liter metal beaker along with 7,312 gms of room temperature water to make about 0.1 percent consistency (7,500 gms water and 7.5 gms fibrous material) to produce a glass fiber slurry. This glass fiber slurry was agitated using a high speed impeller mixer for 60 seconds. The rest of procedure for making hand sheet from this glass fiber slurry was same as in Comparative Example 10.

Example 14

[0184] Wet-laid hand sheets were prepared using the following procedure. 3.8 gms of MicroStrand 475-106 micro glass fiber available from Johns Manville, Denver, Colo., U.S.A., 3.8 gms of 3.2 millimeter cut length islands-in-sea fibers of Example 7, 0.3 gms of Solivitose N pre-gelatinized quaternary cationic potato starch from Avebe, Foxhol, the Netherlands, and 188 gms of room temperature water were placed in a 1,000 ml pulper and pulped for 30 seconds at 7,000 rpm to produce a fiber mix slurry. This fiber mix slurry was heated to 82° C. for 10 seconds to emulsify and remove the water dispersible sulfopolyester component in the islands-in-sea bicomponent fibers and release polyester microfibrers. The fiber mix slurry was then strained to produce a sulfopolyester

dispersion comprising the sulfopolyester and a microfibrer-containing mixture comprising glass microfibrers and polyester microfibrer. The microfibrer-containing mixture was further rinsed using 500 gms of room temperature water to further remove the sulfopolyester from the microfibrer-containing mixture. This microfibrer-containing mixture was transferred into an 8 liter metal beaker along with 7,312 gms of room temperature water to make about 0.1 percent consistency (7,500 gms water and 7.5 gms fibrous material) to produce a microfibrer-containing slurry. This microfibrer-containing slurry was agitated using a high speed impeller mixer for 60 seconds. The rest of procedure for making hand sheet from this microfibrer-containing slurry was same as in Comparative Example 10.

Example 15

[0185] Wet-laid hand sheets were prepared using the following procedure. 7.5 gms of 3.2 millimeter cut length islands-in-sea fibers of Example 7, 0.3 gms of Solivitose N pre-gelatinized quaternary cationic potato starch from Avebe, Foxhol, the Netherlands, and 188 gms of room temperature water were placed in a 1,000 ml pulper and pulped for 30 seconds at 7,000 rpm to produce a fiber mix slurry. This fiber mix slurry was heated to 82° C. for 10 seconds to emulsify and remove the water dispersible sulfopolyester component in the islands-in-sea fibers and release polyester microfibrers. The fiber mix slurry was then strained to produce a sulfopolyester dispersion and polyester microfibrers. The sulfopolyester dispersion was comprised of water dispersible sulfopolyester. The polyester microfibrers were rinsed using 500 gms of room temperature water to further remove the sulfopolyester from the polyester microfibrers. These polyester microfibrers were transferred into an 8 liter metal beaker along with 7,312 gms of room temperature water to make about 0.1 percent consistency (7,500 gms water and 7.5 gms fibrous material) to produce a microfibrer slurry. This microfibrer slurry was agitated using a high speed impeller mixer for 60 seconds. The rest of procedure for making hand sheet from this microfibrer slurry was same as in Comparative Example 10.

[0186] The hand sheet samples of Examples 10-15 were tested and properties are provided in Table 2.

TABLE 2

Ex. No.	Basis Weight (gsm)	Hand Sheet Thickness (mm)	Density (gm/cc)	Porosity Greiner (seconds/100 cc)	Tensile Strength (kg/15 mm)	Elongation to Break (%)	Tensile x Elongation
10	100% SBSK	94	0.45	0.22	4	1.0	7
11	SBSK + 4% Starch	113	0.44	0.22	4	1.5	7
12	80 SBSK + 20% 3.2 mm polyester microfibrers of Example 9	116	0.30	0.33	4	2.2	9
13	100% Glass MicroStrand 475-106 + Starch	103	0.68	0.15	4	0.2	15

TABLE 2-continued

Ex. No.	Composition	Basis Weight (gsm)	Hand Sheet Thickness (mm)	Density (gm/cc)	Porosity Greiner (seconds/100 cc)	Tensile Strength (kg/15 mm)	Elongation to Break (%)	Tensile × Elongation
14	50% Glass Microstand 475-106 + 50% 3.2 mm polyester microfibrils of Example 9 + Starch	104	0.45	0.22	4	1.4	7	10
15	100% 3.2 mm polyester microfibrils of Example 9	80	0.38	0.26	4	3.0	15	44

[0187] The hand sheet basis weight was determined by weighing the hand sheet and calculating weight in grams per square meter (gsm). Hand sheet thickness was measured using an Ono Sokki EG-233 thickness gauge and reported as thickness in millimeters. Density was calculated as weight in grams per cubic centimeter. Porosity was measured using a Greiner Porosity Manometer with 1.9×1.9 cm² opening head and 100 cc capacity. Porosity is reported as average time in seconds (4 replicates) for 100 cc of water to pass through the sample. Tensile properties were measured using an Instron Model TM for six 30 mm×105 mm test strips. An average of six measurements is reported for each example. It can be observed from these test results that significant improvement in tensile properties of wet-laid fibrous structures is obtained by the addition of polyester microfibrils of the current invention.

Example 16

[0188] The sulfopolyester polymer of Example 4 was spun into bicomponent islands-in-the-sea cross-section fibers with 37 islands using a bicomponent extrusion line. The primary extruder (A) fed Eastman F61HC PET polyester to form the “islands” in the islands-in-the-sea cross-section structure. The secondary extruder (B) fed the water dispersible sulfopolyester polymer to form the “sea.” The inherent viscosity of the polyester was 0.61 dL/g while the melt viscosity of the dry sulfopolyester was about 7,000 poise measured at 240° C. and 1 rad/sec strain rate using the melt viscosity measurement procedure described previously. These islands-in-the-sea bicomponent fibers were made using a spinneret with 72 holes and a throughput rate of 1.15 gms/minute/hole. The polymer ratio between “islands” polyester and “sea” sulfopolyester was 2 to 1. These bicomponent fibers were spun using an extrusion temperature of 280° C. for the polyester component and 255° C. for the water dispersible sulfopolyester component. This bicomponent fiber contained a multiplicity of filaments (198 filaments) and was melt spun at a speed of about 530 meters/minute forming filaments with a nominal denier per filament of 19.5. A finish solution of 24 percent by weight PT 769 finish from Goulston Technologies was applied to the bicomponent fiber using a kiss roll applicator. The filaments of the bicomponent fiber were then drawn in line using a set of two godet rolls, heated to 95° C. and 130° C., respectively, and the

final draw roll operating at a speed of about 1,750 meters/minute, to provide a filament draw ratio of about 3.3× forming the drawn islands-in-the-sea bicomponent filaments with a nominal denier per filament of about 5.9 or an average diameter of about 29 microns. These filaments comprising the polyester microfibrils islands had an average diameter of about 3.9 microns.

Example 17

[0189] The drawn islands-in-the-sea bicomponent fibers of Example 16 were cut into short length bicomponent fibers of 3.2 millimeters and 6.4 millimeters cut length, thereby, producing short length fibers with 37 islands-in-the-sea cross-section configurations. These fibers comprised “islands” of polyester and a “sea” of water dispersible sulfopolyester polymers. The cross-sectional distribution of “islands” and “sea” was essentially consistent along the length of these bicomponent fibers.

Example 18

[0190] The short cut length islands-in-the-sea fibers of Example 17 were washed using soft water at 80° C. to remove the water dispersible sulfopolyester “sea” component, thereby releasing the polyester microfibrils which were the “islands” component of the bicomponent fibers. The washed polyester microfibrils were rinsed using soft water at 25° C. to essentially remove most of the “sea” component. The optical microscopic observation of the washed polyester microfibrils had an average diameter of about 3.9 microns and lengths of 3.2 and 6.4 millimeters.

Example 19

[0191] The sulfopolyester polymer of Example 4 was spun into bicomponent islands-in-the-sea cross-section fibers with 37 islands using a bicomponent extrusion line. The primary extruder (A) fed polyester to form the “islands” in the islands-in-the-sea fiber cross-section structure. The secondary extruder (B) fed the water dispersible sulfopolyester polymer to form the “sea” in the islands-in-the-sea bicomponent fiber. The inherent viscosity of the polyester was 0.52 dL/g while the melt viscosity of the dry water dispersible sulfopolyester was about 3,500 poise measured at 240° C. and 1 rad/sec strain rate using the melt viscosity measurement procedure

described previously. These islands-in-sea bicomponent fibers were made using two spinnerets with 175 holes each and a throughput rate of 1.0 gms/minute/hole. The polymer ratio between the "islands" polyester and "sea" sulfopolyester was 70 percent to 30 percent. These bicomponent fibers were spun using an extrusion temperature of 280° C. for the polyester component and 255° C. for the sulfopolyester component. The bicomponent fibers contained a multiplicity of filaments (350 filaments) and were melt spun at a speed of about 1,000 meters/minute using a take-up roll heated to 100° C. forming filaments with a nominal denier per filament of about 9 and an average fiber diameter of about 36 microns. A finish solution of 24 weight percent PT 769 finish was applied to the bicomponent fiber using a kiss roll applicator. The filaments of the bicomponent fiber were combined and were then drawn 3.0x on a draw line at draw roll speed of 100 m/minute and temperature of 38° C. forming drawn islands-in-sea bicomponent filaments with an average denier per filament of about 3 and average diameter of about 20 microns. These drawn island-in-sea bicomponent fibers were cut into short length fibers of about 6.4 millimeters length. These short length islands-in-sea bicomponent fibers were comprised of polyester microfiber "islands" having an average diameter of about 2.8 microns.

Example 20

[0192] The short cut length islands-in-sea bicomponent fibers of Example 19 were washed using soft water at 80° C. to remove the water dispersible sulfopolyester "sea" component, thereby releasing the polyester microfibrils which were the "islands" of the fibers. The washed polyester microfibrils were rinsed using soft water at 25° C. to essentially remove most of the "sea" component. The optical microscopic observation of washed fibers showed polyester microfibrils of average diameter of about 2.8 microns and lengths of about 6.4 millimeters.

Example 21

[0193] Wet-laid microfiber stock hand sheets were prepared using the following procedure. 56.3 gms of 3.2 millimeter cut length islands-in-sea bicomponent fibers of Example 6, 2.3 gms of Solivitose N pre-gelatinized quaternary cationic potato starch from Avebe, Foxhol, the Netherlands, and 1,410 gms of room temperature water were placed in a 2 liter beaker to produce a fiber slurry. The fiber slurry was stirred. One quarter amount of this fiber slurry, about 352 ml, was placed in a 1,000 ml pulper and pulped for 30 seconds at 7,000 rpm. This fiber slurry was heated to 82° C. for 10 seconds to emulsify and remove the water dispersible sulfopolyester component in the islands-in-sea bicomponent fibers and release the polyester microfibrils. The fiber slurry was then strained to produce a sulfopolyester dispersion and polyester microfibrils. These polyester microfibrils were rinsed using 500 gms of room temperature water to further remove the sulfopolyester from the polyester microfibrils. Sufficient room temperature water was added to produce 352 ml of microfiber slurry. This microfiber slurry was re-pulped for 30 seconds at 7,000 rpm. These microfibrils were transferred into an 8 liter metal beaker. The remaining three quarters of the fiber slurry were similarly pulped, washed, rinsed, re-pulped, and transferred to the 8 liter metal beaker. 6,090 gms of room temperature water was then added to make about 0.49 percent consistency (7,500 gms water and 36.6 gms of

polyester microfibrils) to produce a microfiber slurry. This microfiber slurry was agitated using a high speed impeller mixer for 60 seconds. The rest of procedure for making hand sheet from this microfiber slurry was same as in Comparative Example 10. The microfiber stock hand sheet with the basis weight of about 490 gsm was comprised of polyester microfibrils of average diameter of about 2.5 microns and average length of about 3.2 millimeters.

Example 22

[0194] Wet-laid hand sheets were prepared using the following procedure. 7.5 gms of polyester microfiber stock hand sheet of Example 21, 0.3 gms of Solivitose N pre-gelatinized quaternary cationic potato starch from Avebe, Foxhol, the Netherlands, and 188 gms of room temperature water were placed in a 1,000 ml pulper and pulped for 30 seconds at 7,000 rpm. The microfibrils were transferred into an 8 liter metal beaker along with 7,312 gms of room temperature water to make about 0.1 percent consistency (7,500 gms water and 7.5 gms fibrous material) to produce a microfiber slurry. This microfiber slurry was agitated using a high speed impeller mixer for 60 seconds. The rest of procedure for making hand sheet from this slurry was same as in Comparative Example 10. A 100 gsm wet-laid hand sheet of polyester microfibrils was obtained having an average diameter of about 2.5 microns.

Example 23

[0195] The 6.4 millimeter cut length islands-in-sea bicomponent fibers of Example 19 were washed using soft water at 80° C. to remove the water dispersible sulfopolyester "sea" component, thereby releasing the polyester microfibrils which were the "islands" component of the bicomponent fibers. The washed polyester microfibrils were rinsed using soft water at 25° C. to essentially remove most of the "sea" component. The optical microscopic observation of the washed polyester microfibrils showed an average diameter of about 2.5 microns and lengths of 6.4 millimeters.

Example 24

[0196] The short cut length islands-in-sea bicomponent fibers of Example 6, Example 16, and Example 19 were washed separately using soft water at 80° C. containing about 1 percent by weight based on the weight of the bicomponent fibers of ethylene diamine tetra acetic acid tetra sodium salt (Na₄ EDTA) from Sigma-Aldrich Company, Atlanta, Ga., to remove the water dispersible sulfopolyester "sea" component, thereby releasing the polyester microfibrils which were the "islands" of the bicomponent fibers. The addition of at least one water softener, such as Na₄ EDTA, aids in the removal of the water dispersible sulfopolyester polymer from the islands-in-sea bicomponent fibers. The washed polyester microfibrils were rinsed using soft water at 25° C. to essentially remove most of the "sea" component. The optical microscopic observation of washed polyester microfibrils showed excellent release and separation of polyester microfibrils. Use of a water softening agent such as Na₄ EDTA in the water prevents any Ca⁺⁺ ion exchange on the sulfopolyester, which can adversely affect the water dispersibility of sulfopolyester. Typical soft water may contain up to 15 ppm of Ca⁺⁺ ion concentration. It is desirable that the soft water used in the processes described here should have essentially zero concentration of Ca⁺⁺ and other multi-valent ions, or alter-

nately, use sufficient amount of water softening agent, such as Na_4EDTA , to bind the Ca^{++} ions and other multi-valent ions. These polyester microfibrils can be used in preparing the wet-laid sheets using the procedures of examples disclosed previously.

Example 25

[0197] The short cut length islands-in-sea bicomponent fibers of Example 6 and Example 16 were processed separately using the following procedure: 17 grams of Solivitose N pre-gelatinized quaternary cationic potato starch from Avebe, Foxhol, the Netherlands, were added to distilled water. After the starch was fully dissolved or hydrolyzed, then 429 grams of short cut length islands-in-sea bicomponent fibers were slowly added to the distilled water to produce a fiber slurry. A Williams Rotary Continuous Feed Refiner (5 inch diameter) was turned on to refine or mix the fiber slurry in order to provide sufficient shearing action for the water dispersible sulfopolyester to be separated from the polyester microfibrils. The contents of the stock chest were poured into a 24 liter stainless steel container and the lid was secured. The stainless steel container was placed on a propane cooker and heated until the fiber slurry began to boil at about 97°C . in order to remove the sulfopolyester component in the island-in-sea fibers and release polyester microfibrils. After the fiber slurry reached boiling, it was agitated with a manual agitating paddle. The contents of the stainless steel container were poured into a 27 inx15 inx6 in deep False Bottom Knuche with a 30 mesh screen to produce a sulfopolyester dispersion and polyester microfibrils. The sulfopolyester dispersion comprised water and water dispersible sulfopolyester. The polyester microfibrils were rinsed in the Knuche for 15 seconds with 10 liters of soft water at 17°C ., and squeezed to remove excess water.

[0198] After removing excess water, 20 grams of polyester microfibril (dry fiber basis) was added to 2,000 ml of water at 70°C . and agitated using a 2 liter 3000 rpm $\frac{3}{4}$ horse power hydropulper manufactured by Hermann Manufacturing Company for 3 minutes (9,000 revolutions) to make a microfibril slurry of 1 percent consistency. Handsheets were made using the procedure described previously in Comparative Example 10.

[0199] The optical and scanning electron microscopic observation of these handsheets showed excellent separation and formation of polyester microfibrils.

Example 26

[0200] The sulfopolyester polymer of Example 4 was spun into bicomponent islands-in-the-sea cross-section fibers with 37 islands using a bicomponent extrusion line. The primary extruder (A) fed Eastman F61HC PET polyester to form the "islands" in the islands-in-the-sea cross-section structure. The secondary extruder (B) fed the water dispersible sulfopolyester polymer to form the "sea" in the islands-in-sea bicomponent fiber. The inherent viscosity of the polyester was 0.61 dL/g while the melt viscosity of the dry sulfopolyester was about 7,000 poise measured at 240°C . and 1 rad/sec strain rate using the melt viscosity measurement procedure described previously. These islands-in-sea bicomponent fibers were made using a spinneret with 72 holes. The polymer ratio between "islands" polyester and "sea" sulfopolyester was 2.33 to 1.

[0201] These bicomponent fibers were spun using an extrusion temperature of 280°C . for the polyester component and 255°C . for the water dispersible sulfopolyester component. This bicomponent fiber contained a multiplicity of filaments (198 filaments) and was melt spun at a speed of about 530 meters/minute, forming filaments with a nominal denier per filament of 19.5. A finish solution of 18 percent by weight PT 769 finish from Goulston Technologies was applied to the bicomponent fiber using a kiss roll applicator. The filaments of the bicomponent fiber were then drawn in line using a set of two godet rolls, heated to 95°C . and 130°C ., respectively, and the final draw roll operating at a speed of about 1,750 meters/minute to provide a filament draw ratio of about 3.3x, thus forming the drawn islands-in-sea bicomponent filaments with a nominal denier per filament of about 3.2. These filaments comprised the polyester microfibril islands having an average diameter of about 2.2 microns.

Example 27

[0202] The drawn islands-in-sea bicomponent fibers of Example 26 were cut into short length bicomponent fibers of 1.5 millimeters cut length, thereby producing short length fibers with 37 islands-in-sea cross-section configurations. These fibers comprised "islands" of polyester and a "sea" of water dispersible sulfopolyester polymers. The cross-sectional distribution of "islands" and "sea" was essentially consistent along the length of these bicomponent fibers.

Example 28

[0203] The short cut length islands-in-sea fibers of Example 27 were washed using soft water at 80°C . to remove the water dispersible sulfopolyester "sea" component, thereby releasing the polyester microfibrils which were the "islands" component of the bicomponent fibers. The washed polyester microfibrils were rinsed using soft water at 25°C . to essentially remove most of the "sea" component. The optical microscopic observation of the washed polyester microfibrils had an average diameter of about 2.2 microns and a length of 1.5 millimeters.

Example 29

[0204] Wet-laid hand sheets were prepared using the following procedure. Two grams total of a mixture of MicroStrand 475-106 glass fiber and the polyester microfibril of Example 28 were added to 2,000 ml of water and agitated using a modified blender for 1 to 2 minutes in order to make a microfibril slurry of 0.1 percent consistency. The pulp slurry was poured into a 25 centimetersx30 centimeters hand sheet mold while continuing to stir. The drop valve was pulled, and the pulp fibers were allowed to drain on a screen to form a hand sheet. 750 grams per square meter (gsm) blotter paper was placed on top of the formed hand sheet, and the blotter paper was flattened onto the hand sheet. The screen frame was raised and inverted onto a clean release paper and allowed to sit for 10 minutes. The screen was raised vertically away from the formed hand sheet. Two sheets of 750 gsm blotter paper were placed on top of the formed hand sheet. The hand sheet was dried along with the three blotter papers using a Norwood Dryer at about 88°C . for 15 minutes. One blotter paper was removed leaving one blotter paper on each side of the hand sheet. The hand sheet was dried using a Williams Dryer at 65°C . for 15 minutes. The hand sheet was then further dried for 12 to 24 hours using a 40 kg dry press. The blotter paper was

removed to obtain the dry hand sheet sample. The hand sheet was trimmed to 21.6 centimeters by 27.9 centimeters dimensions for testing. Table 3 describes the physical characteristics of the resulting wet-laid nonwoven media. Coresta porosity and average pore size when reported in these examples were determined using a QuantaChrome Porometer 3G Micro obtained from QuantaChrome Instruments located in Boynton Beach, Fla.

TABLE 3

Sample ¹	wt % synthetic microfiber ²	wt % glass microfiber ³	Tensile strength (kg/15 mm)	Coresta porosity	Pressure drop (mm H ₂ O)	Average pore size (microns)	Filtration efficiency
1	100	0	0.88	388	8	7.4	71.0%
2	60	40	0.77	288	32	5.0	99.97%
3	40	60	0.71	176	44	3.8	99.999%
4	0	100	0.58	132	55	3.2	99.999%

¹80 gram per square meter

²2.2 micron in diameter, 1.5 mm in length synthetic microfibers of Example 28

³Johns-Manville Microstrand 106X (0.65 micron BET average diameter)

Example 30

[0205] Wet-laid hand sheets were prepared using the following procedure: 1.2 grams of MicroStrand 475-106 glass fiber and 0.8 grams of the polyester microfiber of Example 28 (dry fiber basis) were added to 2,000 ml of water and agitated using a modified blender for 1 to 2 minutes to make a microfiber slurry of 0.1 percent consistency. Handsheets were made using the procedure described previously in Comparative Example 10. The resulting handsheets were evaluated for filtration efficiency by exposing the substrate to an aerosol of sodium chloride particles (number average diameter 0.075 micron, mass average diameter 0.26 micron). A filtration efficiency of 99.999 percent was measured. This data indicates that ULPA filtration efficiency can be obtained by utilizing the polymeric microfibers of the invention.

Comparative Example 31

[0206] Wet-laid hand sheets were prepared using the following procedure: 1.2 grams of MicroStrand 475-106 glass fiber and 0.8 grams of MicroStrand 475-110x glass fiber (both available from Johns Manville, Denver, Colo., USA) were added to 2,000 ml of water and agitated using a modified blender for 1 to 2 minutes to make a glass microfiber slurry of 0.1 percent consistency. Handsheets were made using the procedure described previously in Example 29.

Example 32

[0207] The wet-laid handsheets of Samples 2 and 3 from Example 29 and Comparative Example 31 were subjected to a calendaring process which involved passing the handsheets between two stainless steel rolls with a nip pressure of 300 pounds per linear inch. Due to the fragile nature of its 100 percent glass composition, the handsheets of Comparative Example 31 were destroyed in the calendaring process with the remaining sheet fragments turning essentially to glass powder with even minimal physical handling. The glass/polyester microfiber blends of Samples 2 and 3 from Example 29, when calendared, yielded very uniform nonwoven sheets with significant mechanical integrity and flexibility. It was observed that the calendared nonwoven sheet of Sample 2 of

Example 29 was somewhat stronger than the calendared nonwoven sheet of Sample 3 of Example 29. These data suggests that very durable, high efficiency filtration media can be enabled by the polymeric microfibers of the invention.

Example 33

[0208] Handsheets of Sample 1 of Example 29 were mechanically densified by subjecting them to different pres-

ures via a calendaring process. The effect of this densification is demonstrated below in Table 4 and clearly indicates that significant improvements to pore size and porosity can be made when the wet-laid substrates are calendared, which is a design feature which Example 32 indicates cannot be accomplished with media comprised of 100 percent glass fibers.

TABLE 4

Sample	Calendar Pressure (psig)	Average pore size (microns)	Coresta porosity
1	0	9.3	— ²
2	100	7.6	— ²
3	200	7.3	— ²
4	400	4.5	268
5	500	3.9	176
HEPA ¹	—	3.9	255

¹commercial HEPA filtration media

²could not be measured as samples did not fit test unit

Example 34

[0209] Wet-laid hand sheets were prepared using the following procedure: 0.4 grams of 3 denier per filament PET fibers cut to 12.7 millimeters and 1.6 grams of the polyester microfiber of Example 28 (dry fiber basis) were added to 2,000 ml of water and agitated using a modified blender for 1 to 2 minutes to make a microfiber slurry of 0.1 percent consistency. Handsheets were made using the procedure described previously in Comparative Example 10. A series of polymeric binders (as described in the table below) were applied to these handsheets at a rate of 7 percent binder based on the dry weight of nonwoven sheet. The binder-containing nonwoven sheets were dried in a forced air oven at 63° C. for 7 to 12 minutes and then heat-set at 120° C. for 3 minutes. The final basis weight of the binder-containing nonwoven sheets was 90 g/m². The data indicates the significant strength benefits to be obtained by combining a polymeric binder with the polymeric microfibers of the invention.

TABLE 5

Sample	Polymer Binder	Dry Tensile (kg/15 mm)	Wet Tensile (kg/15 mm)	Tear Force ³ (grams)	Burst ⁴ (psig)	Hercules Size ⁵ (seconds)
A	none	0.6	0.6	201	5	4
B	Synthomer 7100 ¹	1.3	0.8	411	47	2
C	Eastek 1100 ²	3.8	2.9	521	76	9
D	Eastek 1200 ²	3.5	3.2	516	82	150

¹Synthomer 7100 is a styrenic latex binder supplied by Synthomer GmbH, Frankfurt, Germany

²Eastek 1100 and Eastek 1200 are sulfopolyester binder dispersions supplied by Eastman Chemical Company, Kingsport, TN, USA

³as measured by INDA/EDANA test method WSP 100.15

⁴as measured by INDA/EDANA test method WSP 110.5

⁵as measured by TAPPI test method T 530 OM07

Example 35

[0210] Samples C and D of Example 34 were reproduced with the addition to the sulfopolyester binder dispersion of triethyl citrate (TEC) as a plasticizer. The amount of TEC added to the sulfopolyester binder dispersion was 7.5 and 15 weight percent plasticizer based on total weight of sulfopolyester.

TABLE 6

Sample	Polymer Binder	Dry Tensile (kg/15 mm)	Wet Tensile (kg/15 mm)	Tear Force ³ (grams)	Average Pore Size (microns)	Porosity
A	Eastek 1100	3.8	2.9	521	12	596
B	Eastek 1100 with 7.5% TEC	2.7	2.5	641	6.4	660
C	Eastek 1100 with 15% TEC	2.3	2.6	546	8.8	664
D	Eastek 1200	3.5	3.2	516	10	480
E	Eastek 1200 with 7.5% TEC	2.7	2.7	476	7.1	588
F	Eastek 1200 with 15% TEC	2.8	3.2	601	6.4	568

Example 36

[0211] Wet-laid handsheets were prepared as described for Sample D of Example 34 with the exception that the handsheets were not subjected to the heat-setting condition of 120° C. for three minutes.

Example 37

[0212] The handsheets of Example 35 and Sample D of Example 34 were subjected to the following test procedure in order to simulate a paper repulping process. Two liters of room temperature tap water were added to a 2 liter 3,000 rpm ¾ Hp hydropulper tri-rotor with 6 in diameter×10 in height brass pulper (manufactured by Hermann Manufacturing Company according to TAPPI 10 Standards). Two one-inch square samples of the nonwoven sheet to be tested were added to the water in the hydropulper. The squares were pulped for 500 revolutions at which time the hydropulper was stopped

and the status of the squares of nonwoven sheet evaluated. If the squares were not completely disintegrated to their constituent fibers, the squares were pulped for an additional 500 revolutions, and re-evaluated. This process was continued until the squares had completely disintegrated to their constituent fibers at which time the test was concluded and the total number of revolutions was recorded. The nonwoven squares from Sample D of Example 34 had not completely disintegrated after 15,000 revolutions. The nonwoven squares of Example 34 were completely disintegrated to their constituent fibers after 5,000 revolutions. This data suggests that readily repulpable/recyclable nonwoven sheets can be prepared from the polymeric microfibers of the invention with the appropriate binder selection and heat treatment.

Example 38

[0213] The processes outlined in Examples 26-28 were modified by increasing the nominal denier of the bicomponent fiber of Example 26 such that the end result following the process steps of Examples 27 and 28 was a short-cut polyester microfiber with a diameter of 4.0 microns and a length of 1.5 mm. These short-cut microfibers were blended at varying ratios with the 2.2 micron diameter and 1.5 mm in length short cut microfibers described in Example 28. 80 gram per square meter handsheets were prepared from these microfiber blends as outlined in Example 29. The ability to predictably control both pore size and porosity of a wet-laid nonwoven by blending synthetic microfibers with different diameters is clearly demonstrated in the table below.

TABLE 7

Sample ¹	Wt % 2.2 micron synthetic fiber ²	Porosity	Average Pore Size (microns)
1	20	1548	6.5
2	40	1280	8.2
3	60	1080	8.6
4	80	760	10.3
5	100	488	10.8

¹80 gram per square meter handsheets with no binder

²synthetic microfibers of Example 28

Example 39

[0214] Following the procedure as outlined in Example 29, handsheets were prepared which comprised ternary mixtures of the synthetic polyester microfibers of Example 28, Lyocell nano-fibrillated cellulosic fibers, and T043 polyester fiber (a 7 micron diameter 5.0 mm in length PET fiber). The characteristics of these wet-laid nonwovens are described below.

TABLE 8

Sample ¹	wt % synthetic microfiber	wt % Lyocell nano-fibrillated cellulosic fiber ²	wt % T043 polyester fiber ³	Tensile strength (kg/15 mm)	Burst (psig)
1	40	60	0	15	2.0
2	40	55	5	15	2.6
3	40	40	20	38	3.1

¹80 gram per square meter, 7percentSynthomer 7100 binder supplied by Synthomer GmbH, Frankfurt, Germany

²2.2 micron in diameter, 1.5 mm in length synthetic microfibers of Example 28

³Lenzing

Example 40

[0215] A sulfopolyester polymer was prepared with the following diacid and diol composition: diacid composition (69 mole percent terephthalic acid, 22.5 mole percent isophthalic acid, and 8.5 mole percent 5-(sodiosulfo) isophthalic acid) and diol composition (65 mole percent ethylene glycol and 35 mole percent diethylene glycol). The sulfopolyester was prepared by high temperature polyesterification under a vacuum. The esterification conditions were controlled to produce a sulfopolyester having an inherent viscosity of about 0.33. The melt viscosity of this sulfopolyester was measured to be in the range of about 6000 to 8000 poise at 240° C. and 1 rad/sec shear rate.

Example 41

[0216] The sulfopolyester polymer of Example 40 was spun into bicomponent islands-in-the-sea cross-section fibers with 37 islands using a bicomponent extrusion line. The primary extruder (A) fed Eastman F61HC PET polyester to form the "islands" in the islands-in-the-sea cross-section structure. The secondary extruder (B) fed the water dispersible sulfopolyester polymer to form the "sea" in the islands-in-sea bicomponent fiber. The inherent viscosity of the polyester was 0.61 dL/g while the melt viscosity of the dry sulfopolyester was about 7,000 poise measured at 240° C. and 1 rad/sec strain rate using the melt viscosity measurement procedure described previously. These islands-in-sea bicomponent fibers were made using a spinneret with 72 holes. The polymer ratio between "islands" polyester and "sea" sulfopolyester was 2.33 to 1. These bicomponent fibers were spun using an extrusion temperature of 280° C. for the polyester component and 255° C. for the water dispersible sulfopolyester component. This bicomponent fiber contained a multiplicity of filaments (198 filaments) and was melt spun at a speed of about 530 meters/minute, forming filaments with a nominal denier per filament of 19.5. The filaments of the bicomponent fiber were then drawn in line using a set of two godet rolls, heated to 95° C. and 130° C., respectively, and the final draw roll operating at a speed of about 1,750 meters/minute to provide a filament draw ratio of about 3.3×, thus forming the drawn islands-in-sea bicomponent filaments with a nominal denier per filament of about 3.2. These filaments comprised the polyester microfibrils islands having an average diameter of about 2.2 microns. The drawn bicomponent fibers were then cut into short length bicomponent fibers of 1.5 millimeters cut length which comprised the same island-in-the-sea cross-section consistently along the length of the short-cut bicomponent fibers. The short cut length islands-in-sea fibers were washed using soft water at 80° C. to remove the water dispersible sulfopolyester component, thereby releasing the polyester microfibrils component of the bicomponent fibers. The resulting microfibrils were rinsed using soft water at 25° C. to essentially remove most of the "sea" component. The optical microscopic observation of the washed polyester microfibrils had an average diameter of about 2.5 microns and a length of 1.5 millimeters.

Example 42

[0217] The sulfopolyester polymer of Example 40 and Eastman F61HC PET described in Example 2 were spun into bicomponent "striped" cross-section fibers with 10 total stripes present in the cross-section. The polymer ratio between polyester and sulfopolyester was 1 to 1. These bicomponent fibers were spun using an extrusion temperature of 280° C. for the polyester component and 255° C. for the

water dispersible sulfopolyester component. This bicomponent fiber contained a multiplicity of filaments (198 filaments) and was melt spun at a speed of about 530 meters/minute, forming filaments with a nominal denier per filament of 7.6. The filaments of the bicomponent fiber were then drawn in line using a set of two godet rolls, heated to 95° C. and 130° C., respectively, and the final draw roll operating at a speed of about 1,750 meters/minute to provide a filament draw ratio of about 3.3×, thus forming the drawn islands-in-sea bicomponent filaments with a nominal denier per filament of about 2.3. The drawn bicomponent fibers were then cut into short length bicomponent fibers of 1.5 millimeters cut length which comprised the same "striped" cross-section consistently along the length of the short-cut bicomponent fibers. The short cut length "striped" fibers were washed using soft water at 80° C. to remove the water dispersible sulfopolyester component, thereby releasing the "flat" or ribbon-shaped polyester microfibrils component of the bicomponent fibers. The resulting microfibrils were rinsed using soft water at 25° C. to essentially remove most of the water-dispersible sulfopolyester component. These filaments comprised essentially "flat" polyester microfibrils having a transverse thickness of about 1.5 microns and an average transverse width of 10-12 microns.

Example 43

[0218] The sulfopolyester polymer of Example 40 and Eastman F61HC PET described in Example 2 were spun into bicomponent "striped" cross-section fibers with 10 total stripes present in the cross-section. The polymer ratio between polyester and sulfopolyester was 1 to 1. These bicomponent fibers were spun using an extrusion temperature of 280° C. for the polyester component and 255° C. for the water dispersible sulfopolyester component. This bicomponent fiber contained a multiplicity of filaments (198 filaments) and was melt spun at a speed of about 530 meters/minute, forming filaments with a nominal denier per filament of 20.6. The filaments of the bicomponent fiber were then drawn in line using a set of two godet rolls, heated to 95° C. and 130° C., respectively, and the final draw roll operating at a speed of about 1,750 meters/minute to provide a filament draw ratio of about 3.3×, thus forming the drawn islands-in-sea bicomponent filaments with a nominal denier per filament of about 6.8. The drawn bicomponent fibers were then cut into short length bicomponent fibers of 1.5 millimeters cut length which comprised the same "striped" cross-section consistently along the length of the short-cut bicomponent fibers. The short cut length "striped" fibers were washed using soft water at 80° C. to remove the water dispersible sulfopolyester component, thereby releasing the "flat" or ribbon-shaped polyester microfibrils component of the bicomponent fibers. The resulting microfibrils were rinsed using soft water at 25° C. to essentially remove most of the water-dispersible sulfopolyester component. These filaments comprised essentially "flat" polyester microfibrils having a transverse thickness of about 2.6 microns and an average transverse width of 17-19 microns.

Example 44

[0219] The sulfopolyester polymer of Example 40 and nylon 6 (Ultramid B27 E, BASF) were spun into bicomponent "striped" cross-section fibers with 10 total stripes present in the cross-section. The polymer ratio between nylon and sulfopolyester was 1 to 1. These bicomponent fibers were spun using an extrusion temperature of 280° C. for the nylon com-

ponent and 255° C. for the water dispersible sulfopolyester component. This bicomponent fiber contained a multiplicity of filaments (198 filaments) and was melt spun at a speed of about 530 meters/minute, forming filaments with a nominal denier per filament of 7.6. The filaments of the bicomponent fiber were then drawn in line using a set of two godet rolls, heated to 95° C. and 130° C., respectively, and the final draw roll operating at a speed of about 1,750 meters/minute to provide a filament draw ratio of about 3.3×, thus forming the drawn islands-in-sea bicomponent filaments with a nominal denier per filament of about 2.3. The drawn bicomponent fibers were then cut into short length bicomponent fibers of 1.5 millimeters cut length which comprised the same “striped” cross-section consistently along the length of the short-cut bicomponent fibers. The short cut length “striped” fibers were washed using soft water at 80° C. to remove the water dispersible sulfopolyester component, thereby releasing the “flat” or ribbon-shaped nylon microfiber component of the bicomponent fibers. The resulting microfibers were rinsed using soft water at 25° C. to essentially remove most of the water-dispersible sulfopolyester component. These filaments comprised essentially “flat” nylon 6 microfibers having a transverse thickness of about 1.5 microns and an average transverse width of 10-12 microns.

Example 45

[0220] Wet-laid hand sheets were prepared using the following procedure. 2.0 grams of synthetic microfiber as described above in Example 44 was added to 2,000 ml of water and agitated using a modified blender for 1 to 2 minutes in order to make a microfiber slurry of 0.1 percent consistency. The pulp slurry was poured into a 25 centimeters×30 centimeters hand sheet mold while continuing to stir. The drop valve was pulled, and the pulp fibers were allowed to drain on a screen to form a hand sheet. 750 grams per square meter (gsm) blotter paper was placed on top of the formed hand sheet, and the blotter paper was flattened onto the hand sheet. The screen frame was raised and inverted onto a clean release paper and allowed to sit for 10 minutes. The screen was raised vertically away from the formed hand sheet. Two sheets of 750 gsm blotter paper were placed on top of the formed hand sheet. The hand sheet was dried along with the three blotter papers using a Norwood Dryer at about 88° C. for 15 minutes. One blotter paper was removed leaving one blotter paper on each side of the hand sheet. The hand sheet was dried using a Williams Dryer at 65° C. for 15 minutes. The hand sheet was then further dried for 12 to 24 hours using a 40 kg dry press. The blotter paper was removed to obtain the dry hand sheet sample. The hand sheet was then trimmed for binder application.

[0221] The binding material was then added as follows. A powder-coated steel coating board (with dried latex layer) having greater than 45-dyne surface energy was used. One side of the formed handsheet was coated with binding material (Eastek 1100 dispersion from Eastman Chemical Company), and then the other side was coated with binding material. Using a syringe, dilution water was added to the area on the steel coating board corresponding to the size of the handsheet. Dilution water in an amount sufficient to fully but not excessively wet the first side of the handsheet was added to the steel coating board. Using a syringe, binding material in an amount based on the dry weight desired was added to the dilution water on the steel coating board. The amount of binding material added is a function of the density of the sheet. A lower density non-woven sheet generally requires a

greater percentage of binding material than a higher density non-woven sheet. The total amount of binding material to be added was split, and fifty percent of the amount was added to the dilution water for the first side.

[0222] The dilution water and the binding material were then spread out to completely pool the correct-size area on the steel coating board. The handsheet was positioned over the correct size area and allowed to gently settle in the liquid to coat the first side. After 30-60 seconds of settling into the liquid, the handsheet was removed from the liquid.

[0223] Using a syringe, dilution water in an amount sufficient to fully but not excessively wet the second side of the handsheet was added to the correct size area on the steel coating board. Using a syringe, the remaining fifty percent of the binding material was added to the dilution water for the second side on the steel coating board. The dilution water and the binding material were then spread out to completely pool the correct size area on the steel coating board. The handsheet was inverted, positioned over the correct size area and allowed to gently settle in the liquid to coat the second side. After 60-180 seconds of settling into the liquid, the handsheet was removed from the liquid. A 12 mm glass lab rod was used to roll the binding material into the handsheet interior, as needed.

[0224] The coated handsheet was then placed on a sheet of foil-backed release paper on a tray. The coated handsheet, the foil-backed release paper and the tray were placed in a forced air oven at 145° F. for two minutes. The handsheet was then flipped and returned to the forced air oven at 145° F. The handsheet was then removed from the forced air oven, and a sheet of foil-backed release paper was placed on each side (i.e., the top and bottom) of the handsheet. The handsheet with a sheet of foil-backed release paper on each of the top and bottom was then placed in a Norwood handsheet dryer. The screen was locked and the handsheet with a sheet of foil-backed release paper on each of the top and bottom was dried at 250° F. for three minutes Utilizing the procedure outlined above, nonwoven handsheets comprising the synthetic microfibers of Examples 41-44 above were prepared and their characteristics are described in Table 9 below.

TABLE 9

Example ¹	Tensile Strength (kg/15 mm)		Tear Strength	Burst	Avg. Pore Size	Porosity
	Dry	Wet	(grams)	(psig)	(microns)	
2	3.0	2.2	225	54	7.0	490
3	2.4	2.3	115	45	10.4	824
4	4.6	2.9	138	45	11.2	554
5	6.6	1.3	240	94	7.7	213

¹84 gram per square meter handsheets comprised of approximately 85 wt % fiber and 15 wt % Eastek 1100 binder

Example 46

[0225] Following the procedure outlined in Example 45, 80 gram per square meter handsheets which were comprised of approximately 81 wt % fiber and 19 wt % binder (Eastek 1200 from Eastman Chemical Company and Dow 275 SBR from Dow Chemical Company) were prepared from 50/50 blends of the 1.5 mm cut length “flat” polyester microfiber of Example 3 and other select fibers as designated in Table 10.

TABLE 10

Sample	Blended Fiber	Binder ¹	Tensile Strength (kg/15 mm)		Average Pore Size	Porosity	Hercules Size Test	abrasion resistance	opacity
			Dry	Wet	(microns)		(seconds)		
1	none (100% Example 3)	Eastek 1200	2.7	2.9	11.5	723	420	4	84
2	"	Dow 275 SBR	1.5	0.5	10.7	851	0	1	85
3	microfiber of Example 2	Eastek 1200	3.4	2.4	8.2	672	>600	5	93
4	"	Dow 275 SBR	1.6	1.0	8.2	647	0	2	95
5	NBSK 25 SR wood pulp ²	Eastek 1200	5.6	3.0	11.2	418	>600	4	80
6	"	Dow 275 SBR	2.9	0.5	9.5	485	0	3	84
7	Lyocell L101-4 ³	Eastek 1200	3.4	2.3	4.0	87	>600	6	91
8	"	Dow 275 SBR	2.2	0.8	3.3	74	0	5	95
9	EFT T043 polyester pulp ³	Eastek 1200	5.3	4.8	11.4	1717	>600	7	81
10	"	Dow 275 SBR	3	0.8	12.1	2593	0	3	81

¹binder comprises approximately 19 wt % of total handsheet weight

²Weyerhaeuser, Raleigh, NC

³Engineered Fiber Technologies, LLC, Shelton, CT

Example 47

[0226] Following the procedure outlined in Example 46, 80 gram per square meter handsheets which were comprised of approximately 93 wt % fiber and 7 wt % binder were prepared from 40/60 blends of the 1.5 mm cut length "flat" nylon microfiber of Example 5 and other select fibers as designated in Table 11.

(a) providing a plurality of multicomponent fibers having a striped configuration and an as-spun denier of less than 15 dpf, wherein each of said multicomponent fibers comprises a plurality of ribbon fiber segments substantially isolated from one another by a plurality removable segments, wherein said ribbon fiber segments are formed of a water non-dispersible material, wherein said

TABLE 11

Sample	Blended Fiber	Binder ¹	Tensile Strength (kg/15 mm)		Average Pore Size	Porosity	Hercules Size Test	abrasion resistance	Stiffness
			Dry	Wet	(microns)		(seconds)		
1	none (100% Example 5)	Eastek 1100	2.6	1.1	6.9	460	43	2	176
2	"	Eastek 1200	2.1	1.4	7.3	576	>600	2	113
3	"	Dow 275 SBR	0.9	1.1	5.9	410	0	1	52
4	"	Acrylic ⁴	0.8	0.5	7.3	500	0	1	37
5	NBSK 25 SR wood pulp ²	Eastek 1100	5.4	2.8	4.9	99	44	5	246
6	"	Eastek 1200	5.1	2.6	5.7	116	304	4	233
7	"	Dow 275 SBR	3.6	1.0	6.0	135	0	3	146
8	"	Acrylic ⁴	3.2	1.2	4.6	107	2	4	136
9	Microstrand 106X glass ³	Eastek 1100	1.0	0.7	3.0	144	4	1	164
10	"	Eastek 1200	0.7	0.8	3.0	157	4	1	194
11	"	Dow 275 SBR	0.6	0.4	3.0	148	0	1	66
12	"	Acrylic ⁴	0.6	0.4	3.0	155	0	1	59

¹binder comprises approximately 7 wt % of total handsheet weight

²Weyerhaeuser, Raleigh, NC

³Johns-Manville, Denver, CO

⁴Lubrizon 26469 acrylic binder from The Lubrizol Corporation, Wickliffe, OH

[0227] The preferred forms of the invention described above are to be used as illustration only, and should not be used in a limiting sense to interpret the scope of the present invention. Modifications to the exemplary embodiments, set forth above, could be readily made by those skilled in the art without departing from the spirit of the present invention.

[0228] The inventors hereby state their intent to rely on the Doctrine of Equivalents to determine and assess the reasonably fair scope of the present invention as it pertains to any apparatus not materially departing from but outside the literal scope of the invention as set forth in the following claims.

What is claimed is:

1. A process for producing a nonwoven article, said process comprising:

removable segments are formed of a water dispersible material, wherein said ribbon fiber segments have a minimum transverse dimension of less than 5 microns and a transverse aspect ratio of at least 2:1;

(b) cutting a plurality of said multicomponent fibers into lengths of less than 25 millimeters, thereby providing a plurality of short-cut multicomponent fibers;

(c) contacting said short-cut multicomponent fibers with a wash water to disperse substantially all of said removable segments in said wash water and to disassociate each of said ribbon fiber segments from one other, thereby forming a wash slurry comprising the disassociated ribbon fiber segments and an aqueous dispersion of said wash water and said water dispersible material;

- (d) removing a portion of said aqueous dispersion from said wash slurry to thereby provided a wet lap composition, wherein said ribbon fiber segments make up in the range of from 10 to 50 weight percent of said wet lap composition, wherein said aqueous dispersion makes up in the range of from 50 to 90 weight percent of said wet lap composition; and
- (e) using said wet lap composition in a wet-laid process to produce said nonwoven article.
- 2. The process of claim 1, wherein said multi-component fibers have an average denier per filament (dpf) of at least 1, 3, or 5 and/or not more than 10, 20, or 30.
- 3. The process of claim 1, wherein said multi-component fibers have at least 4, 8, or 12 stripes and/or less than 50, 35, or 20 stripes.
- 4. The process of claim 1, wherein said wash water has a pH of less than 10, 8, 7.5, or 7.
- 5. The process of claim 1, wherein said wash water is substantially free of added caustic.
- 6. The process of claim 1, wherein said wash water is maintained at a temperature of at least 140, 150, or 160° F. and/or not more than 210, 200, or 190° F. during said contacting of step (c).
- 7. The process of claim 1, wherein said contacting of step (c) is carried out for a wash time of at least 0.1, 0.5, or 1 minutes and/or not more than 30, 20, or 10 minutes.
- 8. The process of claim 1, wherein said contacting of step (c) disperses substantially all of said removable segments so that the resulting dissociated ribbon fibers segments have less than 5, 2, or 1 weight percent of residual water dispersible material disposed thereon.
- 9. The process of claim 1, wherein said aqueous dispersion makes up at least 50, 55, or 60 weight percent and/or not more than 90, 85, or 80 weight percent of said wet lap composition.

- 10. The process of claim 1, wherein said ribbon fiber segments make up at least 10, 15, or 20 weight percent and/or not more than 50, 45, or 40 weight percent of said wet lap composition.
- 11. The process of claim 1, wherein said aqueous dispersion and said ribbon fiber segments in combination make of at least 95, 98, or 99 weight percent of said wet lap composition.
- 12. The process of claim 1, wherein said water dispersible material is a sulfopolyester.
- 13. The process of claim 1, wherein said using of step (e) includes combining said wet lap composition with a dilution liquid to produce a dilute wet-lay slurry.
- 14. The process of claim 13, wherein said dilute wet-lay slurry comprises said ribbon fiber segments in an amount of at least 0.0001, 0.001, or 0.005 weight percent and/or not more than 1, 0.5, or 0.1 weight percent.
- 15. The process of claim 13, wherein said dilute wet-lay slurry comprises said dilution liquid in an amount of at least 90, 95, or 98 weight percent.
- 16. The process of claim 13, wherein said wet laid process includes combining additional fibers with said wet lap composition and said dilution liquid to produce said dilute wet-lay slurry, wherein said additional fibers have a different composition and/or configuration than said ribbon fiber segments.
- 17. The process of claim 16, wherein said additional fibers are selected from the group consisting of cellulosic fiber pulp, inorganic fibers, polyester fibers, nylon fibers, polyolefin fibers, rayon fibers, lyocell fibers, cellulose ester fibers, and combinations thereof.
- 18. The process of claim 16, wherein said dilute wet-lay slurry comprises said additional fibers in an amount of at least 0.0001, 0.001, or 0.005 weight percent and/or not more than 1, 0.5, or 0.1 weight percent.

* * * * *