



(51) International Patent Classification:

B41F 30/02 (2006.01)

B41F 16/00 (2006.01)

B41F 31/16 (2006.01)

(21) International Application Number:

PCT/IB2020/052448

(22) International Filing Date:

18 March 2020 (18.03.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1903768.8

19 March 2019 (19.03.2019)

GB

(71) Applicant: LANDA LABS (2012) LTD. [IL/IL]; P.O. Box

2418, 7612301 Rehovot (IL).

(72) Inventor: LANDA, Benzion; 35 Itamar Ben-Avi Street, 7405135 Nes Ziona (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) Title: ARRANGEMENTS FOR SECURING CYLINDER JACKETS

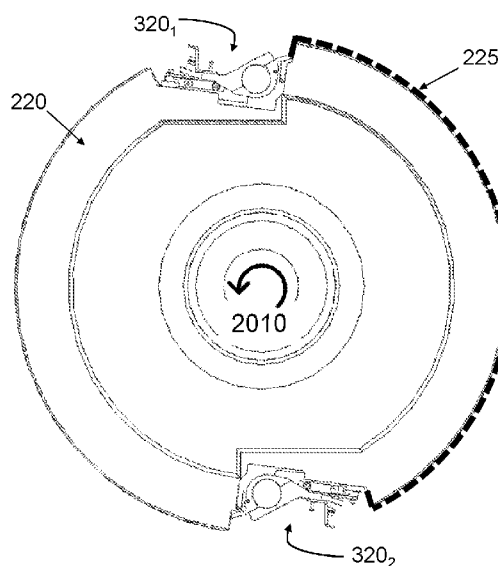


FIG. 4

(57) Abstract: A jacket-securing arrangement is disclosed for mounting in a cylinder, which cylinder (220) has an outer surface and at least one recess (320) in the outer surface for receiving an inwardly turned edge of a replaceable jacket (225) overlying at least part of the outer surface of the cylinder. The jacket-securing arrangement is mountable within the recess so as not to project beyond the outer surface of the cylinder when the jacket is secured thereto, and includes a clamping lever pivotable about a shaft located within the recess between a clamping position in which the edge of the replaceable jacket is clamped between the lever and a side wall of the recess and a release position in which the lever is spaced from the side wall of the recess. A magnet is provided to retain the lever in the clamping position. The clamping lever is formed of two or more members assembled around the shaft and defining between them a bearing surface engaging an outer surface of the shaft. The shaft may be a gripper shaft including a plurality of grippers for securing



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

ARRANGEMENTS FOR SECURING CYLINDER JACKETS

CROSS-RELATED APPLICATION

This application claims Paris Convention priority from GB patent application No. 1903768.8, filed on March 19, 2019, the entire contents of which are hereby incorporated by
5 reference as if fully set forth herein.

FIELD

The present invention relates to devices and methods for securing cylinder jackets to cylinders, such as used in printing systems.

BACKGROUND

10 Printing can be divided into direct and indirect processes, depending on the surface upon which an ink image is first deposited. In the former printing method, the ink image is directly deposited on a printing substrate, whereas in the latter process the ink image is first formed on an intermediate surface. Conventional offset printing processes include lithography, flexography, gravure and screen printing. But the ink image can also be digitally created by a
15 number of techniques. Printing devices can, for instance, use an indirect inkjet printing process in which an inkjet print head is used to deposit ink droplets forming an ink image onto the surface of an intermediate transfer member, which is then used to transfer the image onto a substrate. The intermediate transfer member (ITM) may be any suitable plate, drum or endless flexible belt. This latter type of indirect printing may lead to several problems, such as the
20 abrasion of a surface as a result of repeated contact with another or dirt and detritus accumulating, with time, on the ITM and on surfaces contacting it. Such problems can be aggravated when a relatively high pressure is applied to urge contact between the different surfaces, for instance the outer surface of an impression cylinder at the image transfer location may experience an increased rate of deterioration. Moreover, if the printing system performs
25 duplex printing, so-called back transfer can cause dried ink and/or other unwanted materials to transfer from the previously printed image to the surface of the 'perfecting' impression cylinder, adding one more cause for decline in the properties of the cylinder surface.

It has long been known in the printing industry that foil-based jackets can protect the surfaces of impression and/or transport cylinders, and these are commonly used, for example
30 in offset printing presses, whether digital or not. To this end, many printing cylinders are

provided with the necessary attachment arrangements for attaching new cylinder jackets. Printing cylinders may include more than one cylinder jacket along a circumferential direction of the cylinder.

GB 764,560 discloses a device for clamping a printing plate to a printing cylinder that employs a lever mounted in a recess in the printing cylinder and a magnet to retain the lever in a position in which it clamps an end of the printing plate against the cylinder.

OBJECT

- 5 An aim of the invention is *inter alia* to enable quick and effective attachment of jackets to cylinders which have no such jacket attachment arrangements provided.

SUMMARY

According to a first aspect of the present invention, there is provided a jacket-securing arrangement for mounting in a cylinder, which cylinder has an outer surface and at least one recess in the outer surface for receiving an inwardly turned edge of a replaceable jacket overlying at least part of the outer surface of the cylinder, wherein the jacket-securing arrangement is mountable within the recess so as not to project beyond the outer surface of the cylinder when the jacket is secured thereto, and includes a clamping lever pivotable about a shaft located within the recess between a clamping position in which the edge of the replaceable jacket is clamped between the lever and a side wall of the recess and a release position in which the lever is spaced from the side wall of the recess, a magnet being provided to retain the lever in the clamping position, wherein the clamping lever is formed of two or more members assembled around the shaft and defining between them a bearing surface engaging an outer surface of the shaft.

- 10 In some embodiments, the cylinder in which the jacket securing arrangement can be advantageously implemented is a cylinder of a printing system, such as a cylinder for transporting a printing substrate between stations of a printing system, the transported substrate being optionally subjected to a step of the printing process while being displaced by the cylinder. In the latter case, the cylinder may alternatively be named after the printing step performed therewith, for instance, a cylinder transporting a substrate during impression of an ink image to the substrate can be termed an impression cylinder or a perfecting cylinder, if the
15 impression is to be made on a rear side of a substrate previously printed on its front side.

Impression cylinders, perfecting cylinders and mere transport cylinders (*e.g.*, simply ensuring motion of a substrate along a path from a feeding stack to a delivery pile) often include an arrangement for gripping a leading or trailing edge of a substrate sheet as it is being transported. Therefore, the illustrative foregoing cylinders of a printing system, can be individually or collectively referred to as substrate transport cylinders. The substrate gripping arrangement each such cylinder may include, may comprise a plurality of grippers mounted on a gripper shaft located within a recess in the cylinder. Individual grippers can be fixedly mounted at spaced intervals along the gripper shaft and can be moved between positions in which they grip and release the substrate.

In some embodiments of the invention, the shaft about which the clamping levers of the jacket-securing arrangement are pivotable may be the gripper shaft of an arrangement for gripping an end of substrate sheets transported by the cylinder. In such an embodiment, the clamping levers may be disposed in spaces on the gripper shaft between the substrate grippers. Because the clamping levers are formed of two (or possibly more) members that can be assembled around the shaft while the shaft remains *in situ*, enables the clamping levers to be retrofitted in existing impression cylinders.

In some embodiments of the invention, the shaft about which the clamping levers of the jacket-securing arrangement are pivotable may be a dual coaxial shaft. In such an embodiment, the grippers may be mounted on one of the coaxial shaft and the clamping levers on the other, the clamping levers being disposed on their shaft in regions corresponding to spaces on the gripper shaft between the substrate grippers.

According to a second aspect, there is provided a cylinder, the cylindrical surface of the cylinder including a recess for receiving an inwardly turned edge of a replaceable jacket overlying at least part of the outer surface of the cylinder, and a shaft located in the recess, wherein the cylinder is further provided with a jacket-securing arrangement as briefly described above and further detailed herein. In some embodiments, the cylinder is for a printing system, optionally for transporting a printing substrate.

According to a third aspect, there is provided a printing system comprising a cylinder having a cylindrical surface, a recess in the cylindrical surface for receiving an inwardly turned edge of a replaceable jacket overlying at least part of the outer surface of the cylinder, a shaft located in the recess, wherein the cylinder is further provided with a jacket-securing

arrangement as briefly described above and further detailed herein. In some embodiments, the cylinder of the printing system is for transporting a printing substrate.

According to a fourth aspect, there is provided a kit, the parts of which can be mounted around a shaft to form a jacket-securing arrangement as briefly described above and further detailed herein. In some embodiments, the kit can be used for mounting the jacket-securing arrangement around the shaft of cylinder of a printing system, the cylinder optionally serving for transporting a printing substrate.

According to a fifth aspect, there is provided a method of mounting a jacket-securing arrangement as briefly described above and further detailed herein around a shaft in a recess of a cylindrical surface, the surface optionally being of a cylinder of a printing system, and the method further optionally enabling retrofitting of printing systems, so as to permit use of jacket cylinders.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described further, by way of example, with reference to the accompanying drawings, in which the dimensions of components and features shown in the figures are chosen for convenience and clarity of presentation and not necessarily to scale. Also, in some drawings the relative sizes of objects, and the relative distances between objects, may be exaggeratedly large or small for the sake of convenience and clarity of presentation. In the drawings:

Figure 1 is an elevation-view schematic illustration of a printing system according to embodiments of the present invention.

Figure 2 is a perspective view of an impression cylinder having cylinder gaps, according to embodiments of the present invention.

Figures 3A and 3B are, respectively, a schematic cross-section (elevation) view and a partial top (plan) view of an impression cylinder with gripper shaft and grippers, according to embodiments of the present invention.

Figure 4 is an end (elevation) projection view of the impression cylinder and associated equipment of Figure 2, with a cylinder jacket mounted and secured to the cylinder, according to embodiments of the present invention.

Figures 5A and 5B are, respectively, a top (plan) view and an end (elevation) view of a cylinder jacket according to embodiments of the present invention.

Figure 5C shows an alternative partial end view of the trailing portion of a cylinder jacket according to embodiments of the present invention.

Figure 6 is schematic illustration of jacket tabs of the jacket of Figure 5A, and corresponding gripper shaft, grippers and inter-gripper regions of an impression cylinder,
5 according to embodiments of the present invention.

Figure 7 is an annotated illustration of the jacket tabs of Figure 6.

Figure 8 is an annotated illustration of the gripper shaft, grippers and inter-gripper regions of Figure 6.

Figures 9A and 9B, are, respectively, side and top views of a jacket-securing arrangement
10 according to embodiments of the present invention, in an assembled state on a gripper shaft.

Figures 9C and 9D are, respectively, elevation views of the jacket-securing arrangement of Figure 9A, in a first disassembled state showing complete disassembly, and in a second disassembled state using a linkage arrangement.

Figures 10A and 10C are, respectively, elevation views of a jacket-securing arrangement
15 that is magnetically securing a jacket tab to a surface of a cylinder gap of the impression cylinder of Figure 2, according to preferred and alternative embodiments of the present invention.

Figure 10B is a detail view of a jacket tab with an affixing element on one side and a friction pad on the other side, according to embodiments of the present invention.

Figures 11A and 11B are, respectively, elevation views of a jacket-securing arrangement
20 in an assembled state on a gripper shaft, in a first rotated position and a second rotated position, according to embodiments of the present invention.

Figure 12 is an elevation view of a jacket-securing arrangement in the assembled state and in the first rotated position, showing the location of a force on a force-receiving surface of the jacket-securing arrangement, said force being effective for rotating the jacket-securing
25 arrangement away from the first rotated position and in the direction of the second rotated position, according to embodiments of the present invention.

Figure 13 is a partial perspective view of the cylinder of Figure 2, including a bracket provided for applying the force of Figure 12 to a plurality of jacket-securing arrangements, according to embodiments of the present invention.

Figure 14A is a schematic illustration of thickness options for force-receiving portion of a jacket-securing arrangement according to embodiments of the present invention.

Figure 14B is an illustration of the integration of the thickness options of Figure 14A with the elevation view of Figure 12.

5 Figure 14C is an illustration of respective rotation angles associated with two of the thickness options of Figures 14A and 14B.

Figure 15 shows the elevation view of Figure 3 with two cylinder jackets mounted and secured thereto, according to embodiments of the present invention.

10 Figure 16 is a partial view of one of the two cylinder gaps of the impression cylinder of Figure 15, showing arrangements for securing the end of the jacket that is not the end secured by the jacket-securing arrangement of Figure 10A, according to embodiments of the present invention.

15 Figure 17 is an end (elevation) view of a perfecting cylinder suitable for use in a printing system configured for duplex printing, with a cylinder jacket mounted and secured thereto, according to embodiments of the present invention.

Figure 18 is an elevation view of a jacket-securing arrangement for use with the perfecting cylinder of Figure 17, according to embodiments of the present invention.

Figure 19 shows a flowchart of a method for installing a jacket-securing arrangement and a cylinder jacket, according to embodiments of the present invention.

20 Figure 20 shows a flowchart of a method for replacing a cylinder jacket on a cylinder, according to embodiments of the present invention.

DETAILED DESCRIPTION

Embodiments of the invention are herein described, by way of example only, with reference to the accompanying drawings. With specific reference now to the drawings in detail,
25 it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of the preferred embodiments of the present invention only, and are presented in the cause of providing what is believed to be the most useful and readily understood description of the principles and conceptual aspects of the invention. In this regard, no attempt is made to show structural details of the invention in more detail than is necessary for a fundamental
30 understanding of the invention, the description taken with the drawings making apparent to

those skilled in the art how the several forms of the invention may be embodied in practice. Throughout the drawings, like-referenced characters are generally used to designate like elements.

For convenience, in the context of the description herein, various terms are presented here. To the extent that definitions are provided, explicitly or implicitly, here or elsewhere in this application, such definitions are understood to be consistent with the usage of the defined terms by those of skill in the pertinent art(s). Furthermore, such definitions are to be construed in the broadest possible sense consistent with such usage.

Note: Throughout this disclosure, subscripted reference numbers (*e.g.*, 10₁ or 10_A) may be used to designate multiple separate appearances of elements of a single species, when in a drawing or not; for example: 10₁ is a single appearance (out of a plurality of appearances) of element 10. The same elements can alternatively be referred to without subscript (*e.g.*, 10 and not 10₁) when not referring to a specific one of the multiple separate appearances, *i.e.*, to the species in general.

In various embodiments, an ink image is first formed (*e.g.*, selectively deposited or activated) on a surface of an intermediate transfer member (ITM), and transferred from the surface of the intermediate transfer member to a substrate (*i.e.* sheet substrate or web substrate). The location in the printing system at which the ink is deposited or the image otherwise formed (*e.g.*, by application of energy) on the ITM is referred to as the “image forming station”. In many embodiments described in more details, the ITM comprises a flexible or endless “belt” and the terms “belt” and “ITM” are used interchangeably in such descriptions. However, this should not be construed as limiting, the ITM being, as mentioned, additionally able to include a more rigid body, the ITM being an outer surface of a plate or a drum. Regardless of the type of ITM, the surface upon which the ink image is deposited or formed can also be referred to as the “release surface”, in view of its ability to transfer the ink image at an impression station.

The area or region of the printing press at which the ink image is transferred from the ITM to a substrate is an “impression station”. It is appreciated that for some printing systems, there may be a plurality of impression stations. In some embodiments of the invention, the intermediate transfer member is formed as a belt comprising a reinforcement or support layer coated with a release layer forming the release surface. In other embodiments, the ITM is formed of a plate or a drum coated at their outermost surface with a release layer, so as to form the release surface.

Referring now to the figures, **Figure 1** is a schematic diagram of an example of a printing system **100** for indirect printing according to some embodiments of the present invention. The system of Fig. 1 comprises an intermediate transfer member (ITM) **210** comprising a flexible endless belt mounted over a plurality of guide rollers **232, 240, 260, 253, 255, 242**. This figure shows aspects of a specific configuration relevant to discussion of the invention, and the shown configuration is not limited to the presented number and disposition of the rollers, nor is it limited to the shape and relative dimensions, all of which are shown here for convenience of illustrating the system components in a clear manner. In the example of Fig. 1, the ITM **210** rotates in the clockwise direction relative to the drawing, as indicated by arrow **2012**. This direction can also be referred to as the “printing direction”.

The printing system **100** can further comprise:

(a) an image forming station **212** comprising print bars, in the number of four in the present illustration: **222A-222D** (each designated one of C – for Cyan, M – for Magenta, Y – for Yellow and K – for black). The image forming station **212** is configured to form ink images **50** (only a few being shown the figure) upon a surface of the ITM **210** (*e.g.*, by droplet deposition thereon);

(b) a drying station **214** for drying the ink images; and

(c) an impression station **216** where the ink images **50** are transferred from the surface of the ITM **210** to a substrate **231**. The substrate **231** is shown as sheet-fed substrate, such as paper or carton product, but it can alternatively be a continuous-feed (web) substrate. The substrate transport system conveying the substrate from a feeding end to a delivery end via the impression station is not shown in the figure.

In the particular non-limiting example of Fig. 1, the impression station **216** comprises an impression cylinder **220** and a pressure cylinder assembly **318** which includes a pressure cylinder **218** and an optional compressible blanket **219** disposed at least around a large portion of the circumference of the pressure cylinder. The impression cylinder **220** is rotatable in the direction indicated by arrow **2010**, so as to transport sheets of substrate **231** from a supply stack to a delivery one. The pressure cylinder **218** can rotate synchronously with the impression cylinder **220** but in the opposite direction, as shown by arrow **2011**. As is known in the art, the respective rotation of the cylinders forming the impression station (*e.g.*, **218** and **220**) can be synchronized through the use of gears and/or bearers on the corresponding cylinders. When the cylinders of the impression station are engaged with one another (urged one against the other),

the line of contact between the two may be referred to as the “impression nip”. Disengagement may be achieved by increasing the distance between the axes of rotation of the cylinders, for instance, by lifting-up the pressure assembly **318**. Alternatively, the axes of rotation of the cylinders may remain at a same spacing enabling contact, however at least one of the cylinders
5 include a gap, so that as the gap reaches the nip, contact cannot be made with the circumference of the facing cylinder.

The skilled artisan will appreciate that not every component illustrated in Fig. 1 is required. Also, it can be appreciated that such a printing system can include additional features and components such as, for example, a different number of components in the previously
10 described stations (*e.g.*, a different number of print bars in the imaging station), a conditioning station, a cooling station or a cleaning station, to respectively condition (*e.g.*, chemically and/or physically treat), cool or clean the surface of the ITM, if desired. In some embodiments, the printing system can include arrangements for performing duplex printing (*i.e.* printing a second image on the second side of a substrate printed on its first side), the printing system including
15 an additional substrate transport system allowing to feed the other side of the substrate to the impression station or including a second (‘perfecting’) impression cylinder for that purpose.

Referring now to **Figure 2**, an example of impression cylinder **220** is shown with additional detail. The cylinder **220** has a first cylinder gap **320₁** and a second cylinder gap **320₂**. A cylinder gap, as is known in the printing industry, is a recess in the circumference of a printing
20 cylinder for housing and/or anchoring ancillary equipment within the gap. Typically, the remainder of the cylinder circumference - from the trailing edge of a first cylinder gap (*e.g.*, **320₁**) to the leading edge of a second cylinder gap (*e.g.*, **320₂**) – is smooth. Terms such as ‘leading edge’ and ‘trailing edge’ wherever used herein are used within a reference framework having a specific direction of movement during operation of the printing system; in this case,
25 the terms are used with reference to cylinder rotation direction **2010**, which is indicated in Fig. 2 by an arrow and which corresponds with the rotation direction indicated in Fig. 1. The smooth surface between the cylinder gaps **320** carries the substrate **231** which receives the ink-images transferred from the ITM.

As is known in the printing industry, grippers can be used to grip sheets of substrate **231**
30 on impression cylinders (and on some other types of cylinders, which are not relevant to this disclosure). Grippers serve to releasably engage the sheets on the impression cylinder and to maintain them thereon, often by way of gripper pads at one end of gripper fingers pivotably mounted on an axis. **Figures 3A** and **3B** schematically illustrate an impression cylinder **220**

wherein a plurality of grippers **350** attached to gripper shaft **351** are substantially recessed (meaning, in this disclosure: either completely recessed, or at least 90% recessed, or at least 80% recessed) inside the impression cylinder gap **320** so as to substantially not extend (meaning: either the grippers **350** do not extend at all, or at most of the grippers **350** extend by 10% or 20%) beyond the circumference of the impression cylinder, *i.e.*, the virtual cylinder where the cylindrical circumference would be without the discontinuity of the impression cylinder gap **320**. One of the reasons for selecting a design with recessed grippers can be so as to avoid damage or excessive wear of the ITM **210** as it traverses the impression station **216**. Another reason can be to avoid damage or misalignment of the grippers from the same encounter (during every rotation) with the ITM **210**. While Fig. 3A is a cross-sectional view showing only a single gripper **350**, Fig. 3B is a partial top view showing a plurality of grippers **350** spaced along the length of gripper shaft **351**. As can be seen in Fig. 3B, the grippers **350** are not necessarily evenly spaced along the length of the shaft **351**. The number and spacing of grippers are illustrative and there can be different numbers of grippers and/or different spacing of grippers in other examples. The grippers **350** extend from the gripper shaft **351** and overlap the trailing edge of the cylinder gap **320** (in the direction of rotation **2010**). The grippers **350** can be seen, in both Figs. 3A and 3B, to overlap a part of the surface of the impression cylinder **220** beyond the edge of the cylinder gap **320**.

As is known in the printing industry, cylinder jackets can be provided to cover a surface of a cylinder, including, by way of example, impression cylinders. Advantageously, such jackets should be easy to mount on or remove from the cylinder the cylindrical surface of which they are due to at least partly envelop. In view of this desired capacity, the cylinder jackets can also be referred to as being “releasable jacket(s)” and to the extent they are optionally changed or discarded they may also be referred to as “replaceable jacket(s)”.

Figure 4 shows another view of an impression cylinder with a jacket **225** attached on one side of the cylinder, covering the cylinder surface on one smooth circumferential surface between cylinder gaps **320**. Although not shown in Fig. 4, the plurality of grippers **350** shown in Fig. 3B may tend to interfere with the attachment of the jacket **225** at its leading edge, *i.e.*, at the edge where grippers **350** are extended from the cylinder gap **320** and cover a small part of the cylinder surface.

Details of the jacket **225**, illustrating an example of how the potential blockage by grippers **350** at the edge of the cylinder gap **320** can be overcome, can be seen in **Figures 5A** and **5B**. An examination of Fig. 5B will reveal that the jacket **225** is the same as the one mounted

on the cylinder **220** in Fig. 4, but rotated here for convenience. On the leading edge of the jacket **225** (*i.e.*, the leading edge in cylinder rotation direction **2010**), a plurality of folded or foldable tabs **229** is provided. The tabs are shown in an unfolded state in Fig. 5A and in a folded state in Fig. 5B. The tabs **229** can be folded at first folding line **226₁** so as to facilitate mounting and
5 securing of the jacket **225** on the cylinder **220**. Depending on the materials used in fabricating the jacket **225**, as well as the geometry of the edge of the cylinder gap **320**, the ‘folding’ may in some embodiments be more like ‘bending,’ *i.e.*, with a larger radius that does not crease or create a distinct corner. On the trailing edge of the jacket **225**, a trailing portion **227** is folded (or bent) at a second folding line **226₂** for purposes of mounting and securing on the cylinder
10 **220**. The folding of a flat jacket trailing edge shall preferably be by more than 90°, so that the angle resulting in the folded angle of the jacket be of 90° or less, facilitating the retention in the recess of a jacket being “tensioned” at its leading edge by a jacket securing arrangement according to the present teachings.

The foldable trailing portion **227** on the trailing edge of the jacket **225** need not be a solid
15 strip as illustrated, and in some examples of suitable jackets **225**, the foldable portion **227** can comprise multiple portions including, for example, tabs similar to tabs **229**. As illustrated in Fig. 5C, the foldable portion **227** can include multiple foldable portions that may be designed in accordance with a surface of a specific cylinder gap **320**, or of equipment therein, to which the foldable portion conforms when mounted on a cylinder **220**.

It is not important where, when and how the folding of the tabs **229** and the trailing portion **227** is performed. In some embodiments, the folding of the tabs **229** and the trailing portion **227** can be factory-performed or supplier-performed, *i.e.*, a jacket **225** is provided with tabs **229** and trailing portion **227** already folded. In other embodiments, the jacket **225** can be provided unfolded, and the folding is performed, *e.g.*, by a jacket installer, whether *in situ* by placing the
25 jacket **225** on a cylinder **220** and folding the tabs **229** and trailing portion **227** around the edges of the cylinder gaps **320**, or as part of preparing a jacket **225** for installation by using a folding jig.

Figure 6 illustrates schematically how the provision of tabs on the leading edge of a jacket can help to overcome the partial and intermittent ‘blocking’ of the edge of the cylinder gap by
30 the grippers extending from the cylinder gap so as to cover part of the cylinder surface. The underlying concept is that a folded tab **229** can be inserted between each pair of adjacent grippers **350**. On the left side of the diagram of Fig. 6, the gripper shaft **351** and fourteen grippers **350** of Fig. 3B are shown. Between each pair of grippers is a region of space, such that

there are thirteen spaces defined by the fourteen grippers. Three of these regions are marked as “other inter-gripper space.” These spaces are so marked because, according to a non-limiting example, the presence of other equipment (not shown) in the spaces prevent the insertion of a jacket tab. A common type of equipment present in such cases is a shaft bearing that secures the gripper shaft and allows it to rotate through at least the rotation range necessary for opening and closing grippers when gripping and ‘un-gripping’ sheets of substrate on the surface of the impression cylinder 220. The other ten between-gripper spaces constitute inter-gripper regions 353 which can be used to accommodate jacket tabs 229. Speaking generally, there can be N inter-gripper regions 353 in which each $REGION(n)$, for every integer value of n from 1 to N , has a set of parameter values. In the non-limiting example of Fig. 6, N is equal to 10, and the $N=10$ inter-gripper regions 353 are labeled accordingly from $REGION(1)$ to $REGION(10)$. The efficacy of this notation is illustrated when considering the leading edge of jacket 225 having tabs 229 extending therefrom, on the right side of the diagram of Fig. 6. It can be seen that, in this example, ten tabs 229 corresponding to the ten inter-gripper regions 353 are provided, and that for every $REGION(n)$ from $REGION(1)$ to $REGION(10)$, there is a corresponding $TAB(n)$, i.e., from $TAB(1)$ to $TAB(10)$. In this example, the value of N is the same for inter-gripper regions and for tabs. In other examples, there can be more inter-gripper regions 353 than tabs 229, as long as there are enough tabs 229 to enable proper securing of a jacket 225 to a cylinder 220. Conversely, there cannot be more tabs 229 than inter-gripper regions 353, other than by using a ‘trick’ such as having two ‘narrow’ tabs instead of one wide one, where of course any such set of ‘narrow’ tabs in a single inter-gripper region is equivalent for purposes of the invention to a single tab. It will be obvious to the skilled artisan that having more tabs than inter-gripper regions, when the width of the tabs and the spaces between the grippers is such that an inter gripper region can only accommodate a single tab, would mean that ‘extra’ tabs would be ‘blocked’ by grippers 350 at the edge of a cylinder gap 320 when mounting a jacket 225 on a cylinder 220.

We refer now to **Figure 7**. For the set of N jacket tabs $TAB(n)$ described in the foregoing discussion, $TAB-WIDTH(n)$ is a one-dimensional array of values of widths corresponding to respective tabs $TAB(n)$. If a tab 229 has a substantially rectangular shape (‘substantially’ meaning except as modified for manufacturing purposes, e.g., because of cutting radiuses) as per preferred embodiments and as illustrated throughout this disclosure, then the value of $TAB-WIDTH(n)$ is obviously the width of $TAB(n)$ as shown in Fig. 7. In alternative embodiments in which the width is irregular, then $TAB-WIDTH(n)$ can equal the maximum value of the width

at any point on the $TAB(n)$. Nonetheless, a substantially rectangular shape can be preferable so as to best facilitate use of the tabs in securing a jacket to the cylinder.

Similarly, $TAB-SPACING(n)$ is a one-dimensional array of values of spacing corresponding to respective tabs $TAB(n)$. Spacing of tabs can be assessed in different ways. In the example of Fig. 7, $TAB-SPACING(n)$ is assessed as the distance from a lateral edge of the jacket **225** to the ‘beginning’ of the respective tab, *i.e.*, to the ‘bottom’ of the tab in the plan view of Fig. 7. Alternatively, spacing can be from tab to tab (beginning-to-beginning, ending-to-ending or centerline to centerline), from jacket lateral edge to centerline of tab, from jacket lateral edge to ending of tab, and so on. It is obviously important that the same approach be taken for all tabs and, with reference to Fig. 8, for inter-gripper regions as well. **Figure 8** illustrates one-dimensional arrays $REGION-SPACING(n)$ and $REGION-WIDTH(n)$ respective of the set of inter-gripper regions $REGION(n)$ described earlier in the discussion of Fig. 6.

As long as the spacing values of $REGION-SPACING(n)$ are assessed in the same manner as were the spacing values of $TAB-SPACING(n)$, it is possible to link the width and spacing parameters of tabs **229** to those of inter-gripper regions **353**. For each integer value of n from 1 to N , it is preferable that $TAB-SPACING(n)$ be substantially equal to $REGION-SPACING(n)$, and it is also preferable that $TAB-WIDTH(n)$ be no larger than $REGION-WIDTH(n)$. It is especially preferable that each $TAB-WIDTH(n)$ be smaller than the corresponding $REGION-WIDTH(n)$. These conditions allow respective tabs **229** to fit (and, preferably, fit easily without interference or friction) within corresponding respective inter-gripper regions **353** when a tabbed jacket **225** is mounted on a cylinder **220**. The phrase ‘substantially equal to’ earlier in this paragraph should be understood to mean that the combination of tab and region spacings and widths is such that each of the tabs **229** fits properly in the corresponding inter-gripper region **353**. It should be obvious from the foregoing that if the tolerance or imprecision of the respective spacing variables is large, then it is likely that the difference between tab widths and corresponding region widths (*i.e.*, extra space between grippers **350**) for any values of n needs to be larger in order to ensure proper fit of the tabs **229** in the corresponding inter-gripper regions **353**. On the other hand, if the spacings of the tabs and corresponding regions are exactly equal, then the difference in the respective widths of tabs and corresponding regions can be very small.

The foregoing discussion dealt primarily with the provision of tabs of appropriate widths and spacings so as to allow a jacket to be mounted on a cylinder with the tabs inserted into the inter-gripper regions at the trailing edge (in the rotation direction) of a cylinder gap. The

following paragraphs discuss apparatus and methods for magnetically securing the jacket tabs to a surface of the cylinder gap and thereby reversibly securing the leading edge of a mounted cylinder jacket to the cylinder.

Printing cylinders commonly include a ferromagnetic material such that it is possible to
5 secure a jacket to the cylinder using magnets. However, in the present embodiments, the area of a cylinder gap in which such magnetic securing is likely to take place is also used to house the gripper shaft and set of grippers. Thus, there is little or no access for an operator's hand or tool to accurately place a magnet, or forcefully remove a magnet from the surface of the cylinder gap to which a jacket tab may be magnetically secured. And even if there were enough access
10 for a tool, it would be difficult to find the leverage necessary to remove the magnet from the cylinder gap surface, as the magnet may have a magnetic pull strength of more than 5 kg or more than 10 kg or more than 20 kg.

Referring now to **Figures 9A and 9B**, a jacket-securing arrangement **270** according to some embodiments of the present invention comprises a two-armed bell-crank clamping lever
15 formed of first and second members **272, 274**. In other embodiments, not illustrated, a jacket-securing arrangement **270** may include more than two members. For instance, first member **272** may itself be formed of two sub-members, which may, by way of example, facilitate the attachment of a magnet **280** to one of the sub-members prior to securing it to the other sub-member, so as to form the shape sought for the first member. Regardless of the number of
20 members (including sub-members), or of the presence of magnets on any of the members or on a wall of the recess, such members and elements of the jacket securing arrangement can constitute a pivotable clamping lever. The jacket-securing arrangement **270** of Fig. 9A is shown in an assembled state. The assembled state of jacket-securing arrangement **270** according to some embodiments satisfies the following features:

- 25 - The two members **272, 274** are releasably attached to each other. This can be accomplished effectively, for example, by providing one or more pre-drilled holes **267**, *e.g.*, for screws or bolts, passing through the second member **274**, and corresponding receiving portion(s) (not shown - they are obscured in Fig. 9B by second member **274**), *e.g.*, threaded receptacles in the first member **272** for receiving the screws or bolts. In one
30 embodiment, the screws are captive screws. Two holes **267** are shown so as to accommodate two respective screws, which are disposed one on each side of the shaft, but there can be any number.

- The assembled jacket-securing arrangement **270** is rotatably mounted around gripper shaft **351**. The jacket-securing arrangement must be able to freely rotate (in terms of the gripper shaft **351**) although the range of its rotation may be otherwise limited by the confines of the cylinder gap **320**. The members **272**, **274** are each formed with part of a bearing surface to permit the clamping lever to rotate about the axis of the gripper shaft **351**. In the non-limiting example of Fig. 9A and subsequent figures, each of the members **272**, **274** has a part-cylindrical surface for engaging the circumference of the gripper shaft **351**.
- The assembled jacket-securing arrangement **270** is disposed in an inter-gripper region, such as in any *REGION(n)* as discussed in connection with Fig. 6. The skilled artisan will understand that in the embodiments illustrated, the jacket-securing arrangement **270** can only be disposed in an inter-gripper region **353** because otherwise a gripper **350** or other equipment (e.g., shaft bearing **269**) will preclude such disposition.

The jacket-securing arrangement also includes a magnet **280**, such as a neodymium magnet. The magnet **280**, in the example of Fig. 9A, is fixedly attached to the first member **272**, although in alternative embodiments the magnet **280** can be attached to another part of the clamping lever. The magnet **280** can be attached directly to a member of the jacket-securing arrangement **270** or, alternatively, it can be installed in a magnet holder (not shown) which is fixedly attached to the member.

In some embodiment, a magnet **280** may alternatively or additionally be secured to the wall of the recess and the clamping lever may be made of a ferromagnetic material. Such a configuration may be adopted in a situation where the material of the wall of the recess in the cylinder is not strongly ferromagnetic.

The jacket assembly **270** cannot be mounted on a gripper shaft **351** when in the assembled state. Rather, it must be in an unassembled state. **Figure 9C** shows a jacket-securing arrangement **270** in a first unassembled state – the members **272**, **274** are completely disassembled and are not connected in any way. **Figure 9D** shows a jacket-securing arrangement **270** in a second unassembled state according to an alternative embodiment – the members **272**, **274** are connected by a linking arrangement **273**. Linking arrangement **273** can comprise a hinge, as shown in Fig. 9D, or it can comprise any other mechanical arrangement, such as a cable, for connecting the two members in the unassembled state. Using a linking arrangement can be beneficial, for example, where the possibility of dropping one of the

members into the cylinder gap during installation or removal of the jacket-securing arrangement 270 might be a concern.

Referring now to **Figure 10A**. The jacket-securing arrangement of Fig. 9A, in the assembled state (*i.e.*, rotatably mounted around the gripper shaft 351 and disposed in an inter-gripper region 353), secures a tab 229 of jacket 225 to a surface of the cylinder gap 320. Specifically, the magnet 280 holds the jacket-securing assembly 270 in place, by the force of its magnetic attraction to the surface of the cylinder gap at a first location 321; 'in place' can mean, for example, that the jacket-securing assembly 270 is not easily rotatable when in this position. This magnetic force is effective to cause the securing of an upper portion 275 of first member 272 to the surface of the cylinder gap at a second location 322, with a portion of the jacket tab 229 being 'clamped' or 'trapped' between the upper portion 275 and the surface of the cylinder gap. In other words, the force of the magnetic attraction at the first location 321 causes the 'indirect' [magnetic] securing of the jacket tab 229 at the second location 322. As used herein, the magnetic securing provided by the jacket-securing arrangement, unless otherwise stated or clear from context, encompasses the 'direct' securing of the first magnet on a first part of the cylinder gap (*e.g.*, at a first location 321) and the 'indirect' securing of a portion of the jacket of the impression cylinder to a second part of the cylinder gap (*e.g.*, at a second location 322), for instance by reversible, quick release, mechanical clamping.

In some embodiments, an adjustment mechanism 281 is provided to facilitate manual adjustment (*e.g.*, tightening or loosening) of the connection between the first member 272 and the magnet 280. This can be a useful feature to have available when, for example, imperfections in the surface of the cylinder gap 320 at the first location are such that the magnet is not disposed at the optimal angle when the upper portion 275 contacts the tab 229 at the second location 322 during installation of the jacket-securing arrangement 270. In one non-limiting example, the surface of the cylinder gap 320 at the second location 322 may be machined, while the surface at the first location 321 may be the result of a less precise casting process, the 'step' between the two locations being one artefact of such a two-step manufacturing process.

In some embodiments one or more additional elements can be fastened to a jacket tab 229 for improving the installation process on a cylinder 220 and for otherwise increasing the effectiveness of the use of jacket-securing arrangements 270.

In one example, it can be desirable to affix a jacket tab 229 or multiple jacket tabs 229 lightly to the surface of the cylinder gap 320 before rotating respective jacket-securing

arrangements **270** into the first rotated position for long-term magnetic securing of the tabs **229**. The folding or bending of the tab(s) **229** may cause ‘springiness’ in the folds or bends that prevents the tabs **229** from sitting properly in place before the long-term magnetic securing. The tabs **229** are relatively small extensions on a much larger jacket **225**, such that properly
5 seating the jacket **225** on the cylinder **220** may leave one or more tabs **229** somewhat ‘up in the air’ rather than exactly where they need to be, folded down snugly in place against the surface of the cylinder gap **320**. Therefore, in some embodiments the jacket installation process can be made more efficient by lightly affixing the jacket tabs **225** to the cylinder gap surface, using sufficient adhesion to temporarily keep the tabs **229** in place long enough to complete the
10 installation process.

In a second example, it can be desirable to increase a frictional resistance force between the upper portion **275** of first member **272** of jacket-securing arrangement **270** – the portion of the jacket-securing arrangement **270** most likely to contact the tab **229** – and the surface of the tab **229**. This may provide some additional security to the attachment of jacket **225** to the
15 cylinder **220** during operation of the printing system **100**, when high speeds and high centrifugal forces may otherwise cause slippage of the tabs between the jacket-securing arrangement **270** and the surface of the cylinder gap **320**.

Referring now to **Figure 10B**, an affixing element **81** is caused to adhere to the cylinder-facing side of a jacket tab. In one example, affixing element **81** comprises a small, thin magnet with sufficient force to hold a respective jacket tab **229** in place during installation – but which
20 does not require undue force or special tooling for disconnecting the tab from the cylinder gap surface when the jacket **225** is eventually removed and the jacket-securing arrangement **270** is rotated out of the first rotated position. In another example, affixing element **81** comprises an adhesive tape or film, which can be a two-sided adhesive tape or film, for example a reusable
25 tape or film.

Also illustrated in Fig. 10B is friction pad **79**, which can be provided so as to increase a frictional resistance force between the upper portion **275** of first member **272** of jacket-securing arrangement **270**, and the surface of the tab **229**. Friction pad **79** can comprise a cloth, a rubber, a plastic or any combination of such materials that increases the frictional resistance and can
30 help reduce possible centrifugal slippage of the tab **229** during operation of the printing system **100**.

Any number of tabs **229** on a jacket **225**, from zero to N (all the tabs) can be equipped with friction pads **79** and/or affixing elements **81**. For example, it can be that none are so equipped, or that some tabs **229** are equipped with one or both of a friction pad **79** and an affixing element **81**, or even that all tabs **229** are equipped with one or both of a friction pad **79** and an affixing element **81**.

In an alternative embodiment illustrated in **Figure 10C**, the magnet **280** can be attached elsewhere, for example to the upper portion **275**, such that the magnet directly secures the jacket tab **229** to the surface of the cylinder gap **320** at the 'second' (only) location **322**.

In some embodiments, the magnet **280** is attached to, and at other times removed from, the surface of the cylinder gap **320** at the first location **321** by rotating the jacket-securing arrangement **270** around the gripper shaft **351**. In **Figure 11A**, the jacket-securing arrangement is in a first rotated position where, as in Fig. 10A, the magnet is in place at the first location **321** on the surface of the cylinder gap **320**, and the jacket tab **229** is secured by the upper portion **275** at the second location **322**. The first rotation position is thus the 'jacket-securing position'. The rotation of the jacket-securing arrangement **270** to the first rotation position is in the direction indicated by arrow **2020**. As shown in Fig. 11A, the jacket-securing arrangement **270** can comprise a second magnet **285** attached to a portion of the jacket-securing arrangement **270** displaced from the first magnet **280**. The second magnet can be attached directly or, as shown in Fig. 11A by a bracket **287** that holds the second magnet **285** at a more favorable angle for its purpose. In **Figure 11B**, the jacket-securing arrangement **270** is shown in the second rotated position. The rotation of the jacket-securing arrangement **270** to the second rotation position is in the direction indicated by arrow **2030**, and is opposite to the direction of rotation to the first rotated position which is indicated in Fig. 11A by arrow **2020**. In the second rotated position, as shown in Fig. 11B, the first magnet is displaced from the first location **321** on the surface of the cylinder gap **320**. A magnetic attraction between the second magnet **285** and a second surface portion **323** of the cylinder gap **320** holds the jacket-securing arrangement **270** in the second rotated position, the second surface portion **323** being therefore also referred to as the second position surface portion or as a third location of the gap surface. In some embodiments (not illustrated), the second magnet **285** is not provided, and if necessary, other methods of preventing the magnet **280** from 'snapping back' to its regular target of the first location **321** on the surface of the cylinder gap **320** can be used, such as providing a mechanical restraint.

A preferred method for rotating a jacket-securing arrangement to the second rotated position is to apply a force to the second arm of the bell-crank clamping lever (*e.g.*, on the side

of second member **274** distal from magnet **280**) that will translate to sufficient moment to remove the magnet **280** from where it adheres magnetically to the first location **321** on the surface of the cylinder gap **320**. Referring now to **Figure 12**, a force F can be applied effectively to a force-receiving surface **277** of the jacket-securing arrangement **270**. The force-receiving surface **277** in Fig. 12 is an upward-facing surface of a force-receiving portion **278** of the jacket-securing arrangement **270**. The force-receiving portion **278** is provided so as to be diametrically opposite the first location **321** where the magnet **280** is disposed when in the first rotated position – or within $\pm 30^\circ$ of being diametrically opposed, or within $\pm 15^\circ$ of being diametrically opposite. The force F can be applied in a downward direction relative to the cylinder gap, meaning roughly parallel to the surface of the cylinder gap **320** at the first location **321**. By ‘roughly parallel’ we mean within 15° either way of being parallel, or within 30° either way of being parallel. The force-receiving surface at the time of applying the force F is roughly perpendicular to the surface of the cylinder gap **320** at the first location **321**. By ‘roughly perpendicular’ we mean within 15° either way of being perpendicular, or within 30° either way of being perpendicular. In this manner, the magnet **280** can be removed relatively more easily and also without direct access by fingers or tool to the magnet **280**. The moment removes the magnet **280** by rotating the jacket-securing arrangement **270** away from the first rotated position (and towards the second rotated position) and thereby releases the jacket tab **229** (not shown in Fig. 12) clamped by the upper portion **275** against the surface of the cylinder gap **320** at the second location **322**. Neither the second magnet **285** nor its corresponding bracket **287** is shown in Fig. 12, solely for convenience, so that the position of the force F on the force-receiving surface **277** could be illustrated.

As described in the foregoing paragraphs, the release of the jacket tabs **229** coincident with the release of the magnet **280** from the surface of the cylinder gap **320** is effectively accomplished by leveraging the rotatability of the jacket-securing arrangement **270** around the gripper shaft **351**. In this method, applying a moderate force F to the force-receiving portion on the opposite side of the jacket-securing arrangement **270** (*i.e.*, the side of the jacket-securing arrangement **270** that is on the opposite side of the gripper shaft **351**) makes it possible to accomplish the release of the magnet **280** with less force than would be necessary to pull it directly off with a force applied at the first location **321**. However, removing a jacket **225** from a cylinder **220** involves releasing multiple magnets **280** from the surface of the cylinder gap **320** and rotating multiple jacket-securing arrangements **270** away from the first rotated position. As shown in **Figure 13**, there can be more than 5, or more than 10 or more than 15 jacket-

securing arrangements 270 provided in a single cylinder gap 320, and there is a like number of magnets 280 to be pulled off the surface of the cylinder gap 320. An elongated, rigid bar or bracket 369 can be provided to apply a force (*e.g.*, F) at each of the force-receiving surfaces 277 of all of the jacket-securing arrangements 270. In some embodiments, even the moderate
5 force F , when multiplied by the number of jacket-securing arrangements 270 present, may prove to be too great a force for an operator to apply all at once to the plurality of jacket-securing arrangements 270. In such embodiments, a method of releasing the jacket tabs 229 can be performed which includes using a bracket 369 to apply a force simultaneously to all of the force-receiving surfaces 277, but without simultaneous rotation of all of the plurality of jacket-
10 securing arrangements 270. According to the method, a thickness of the force-receiving portion 278 can vary among different, and especially adjacent, jacket-securing arrangements. Referring now to **Figure 14A**, a schematic illustration of a force-receiving portion 278 (of a jacket-securing arrangement 270) is shown with multiple possible thicknesses and corresponding possible dispositions (or versions) of the upward-facing force-receiving surface 277. Each
15 force-receiving portion 278 can have a variable thickness along its length, but the variable thickness is nonetheless different in each of the thickness possibilities shown in Fig. 14A. For example, the force-receiving portion 278 shown in all previous figures in this disclosure has the maximum thickness possibility of all the possibilities illustrated in Fig. 14A and includes the uppermost force-receiving surface 277A. The second-thickest possible force-receiving portion
20 278 in Fig. 14A includes force-receiving surface 277B. The third-thickest possible force-receiving portion 278 in Fig. 14A includes force-receiving surface 277C, and so on until the thinnest possible force-receiving portion 278 of the possibilities illustrated in Fig. 14 includes force-receiving surface 277G. The efficacy of this solution can be understood from **Figure 14B**, which integrates the illustration of multiple force-receiving portion thicknesses of Fig. 14A
25 with the elevation view of Fig. 12. When disposed in the first rotated position, all of the jacket-securing arrangements 270 are parallel to each other: (a) respective magnets 280 are disposed against the surface of the cylinder gap 320 at respective first locations 321 and therefore are parallel to each other; and (b) the bottom or downward-facing surfaces of the respective force-receiving portions 278 are also parallel to each other.

30 In some embodiments, the relative disposition of different upward-facing force-receiving surfaces 277A, 277B, *etc.*, can be defined by rotation angles with respect to the gripper shaft 351. In **Figure 14C**, a force-receiving surface 277A is at a first rotation angle indicated by the arrow 2040A, and a force-receiving surface 277B is at a second rotation angle indicated by the

arrow **2040B**. Each possible receiving surface **277** can have a different corresponding rotation angle **2040**. The rotational difference between the two consecutive rotation angles **2040A** and **2040B** can be, for example 1° . In some examples, all pairs of respective rotation angles **2040** corresponding to consecutive thickness options are separated by substantially the same 1° angle.

- 5 In other examples, the separation can involve larger or smaller angles of rotational differences, and not all angles of rotational differences between consecutive thickness options of force-receiving portions need be the same.

When a force F' is applied by a bracket **369** (not shown in Fig. 14B), the following occurs:

- 10 - At a first time, only those jacket-securing arrangements with 'highest' force-receiving surfaces **277A** are contacted by the bracket **369** and are rotated away from the first position by the resulting moment.
- At a second time, only those jacket-securing arrangements with force-receiving surfaces **277B** are contacted by the bracket **369** and are rotated away from the first position by the resulting moment.
- 15 - At a third time, only those jacket-securing arrangements with force-receiving surfaces **277C** are contacted by the bracket **369** and are rotated away from the first position by the resulting moment.

This continues until the thinnest force-receiving portions **278** (those with the 'lowest' force-receiving surfaces **277**, *e.g.*, **277G**) are contacted.

- 20 The interval between the 'first time' and the 'second time', or between the 'second time' and the 'third time' can be less than a second, less than half a second, or less than one tenth of one second. In some embodiments, the total time elapsed between contacting the highest force-receiving surface **277** (**277A**) and contacting the lowest force-receiving surface **277** (*e.g.*, **277G** or **277F**, or **277E**, *etc.*, depending on how many different thicknesses of force-receiving
- 25 portions **278** are deployed) can be less than two seconds or less than one second. Despite the very short time intervals between the contacting of different thickness, the intervals are sufficient to distribute the work of applying forces F' among the different time intervals, and thereby allow the release of all of the respective magnets **280** from the surface of the cylinder gap **320** with a single downward force-application of bracket **369**. In some embodiments, no
- 30 more than two jacket-securing arrangements **270** share the same force-receiving portion thickness. In some embodiments, no more than three jacket-securing arrangements **270** share the same force-receiving portion thickness. In some embodiments, jacket-securing

arrangements **270** are arranged so that the distribution of force-receiving portion thicknesses is symmetrical. In one implementation of a symmetrical distribution of force-receiving portion thicknesses, jacket-securing arrangements **270** with force-receiving surfaces **277A** are placed as the outermost jacket-securing arrangements **270**, *i.e.*, closest to the opposite ends of the cylinder gap **320**. Adjacent to them (inter-gripper region **353** closer to the center of the array of jacket-securing arrangements **270**) are those with force-receiving surfaces **277B**, and then those with force-receiving surfaces **277C**, and so on. When such a symmetrical arrangement is deployed, the bracket **369** can be positioned such that a protrusion (not shown) included near each end of the bracket **369** can be fitted to a matching receptacle (**265** in Fig. 9B) provided on the force-receiving surfaces **277** (*e.g.*, **277A**) of the outermost jacket-securing arrangements **270**, which are the first ones contacted during the application of force by the bracket **369**. The protrusion-receptacle fitting can be useful in firmly positioning the bracket for the application of the force that rotates the jacket-securing arrangements **270** away from the first rotated position and thereby releases the jacket tabs **229**.

Referring now to Figs. 15 and 16. In some embodiments, a printing system **100** can be designed such that an impression cylinder **220** completes one rotation for every two ink-images transferred to substrate **231**. In such embodiments, there can be two cylinder gaps and two smooth surfaces therebetween on a cylinder **220**, each of the surfaces allowing transfer of one of the ink images from the ITM to each substrate and the surfaces being suitably protected by a cylinder jacket **225**. **Figure 15** illustrates an example of such a case, wherein tabs **229₁** of first jacket **225₁** are secured by first jacket-securing arrangements **270₁** in first cylinder gap **320₁**, and tabs **229₂** of second jacket **225₂** are secured by second jacket-securing arrangements **270₂** in second cylinder gap **320₂**. Similarly, a first trailing portion **227₁** of first jacket **225₁** is secured in second cylinder gap **320₂**, and a second trailing portion **227₂** of second jacket **225₂** is secured in first cylinder gap **320₁**.

Figure 16 shows in greater detail (with the second jacket-securing arrangement **270₂** removed from the drawing) the securing of first trailing portion **227₁** within second cylinder gap **320₂**. The trailing portion does not encounter grippers and grippers shafts and therefore can be simply secured to a surface of the cylinder gap without special arrangements. For instance, a trailing edge of the jacket can be inwardly turned to follow an undercut segment of the gap, the undercut wall being recessed with respect to the outer surface of the cylinder. In such case, the folded angle formed by the trailing edge and the jacket shall be of less than 90°. Alternatively, in some embodiments, a trailing edge magnet holder **290** for applying and

removing a trailing-portion magnet **223** (or a plurality of trailing-portion magnets **223**) is provided for securing the first trailing portion **227**.

Referring now to **Figures 17 and 18**, a printing system **100** adapted to enable printing on both sides of a substrate **231** (perfecting) can include a second impression cylinder **520** for that purpose. A jacket **225** according to the various embodiments disclosed herein can be mounted on the perfecting cylinder **520** in the same manner as described for mounting on the ‘simplex’ impression cylinder **220**: a jacket-securing arrangement **270** rotatably mounted on a gripper shaft **351** in cylinder gap **620** magnetically secures a jacket tab **229** to a surface of the cylinder gap **620** using a magnet **280**. In the second rotated position, the jacket-securing arrangement **270** of the perfecting cylinder **520** can be positioned with magnet **280** removed from the surface of the cylinder gap **620** (and jacket tab **229** released) by the use of second magnet **285** and its magnetic attraction to opposite cylinder gap surface **624**. The arrangement of the second magnet **285** here can be different than the arrangement in the simplex cylinder (Fig. 11B) because of structural differences between the cylinder gaps. This minor difference does not change the underlying concept of using a second magnet **285** to hold the jacket-securing arrangement **270** in the second rotated position, *e.g.*, for replacement of a jacket **225**.

Referring now to **Figure 19**, a method is disclosed for installing a jacket-securing arrangement **270** and a cylinder jacket **225** on a cylinder **220** (or **520**). The method comprises:

- a) Step **S01** assembling a plurality of jacket-securing arrangements **270**, each jacket-securing arrangement **270** comprising (i) a magnet **280**, (ii) a first member **272** holding the magnet, and (iii) a second member **274** that is reversibly attachable to the first member **272**, such that each assembled jacket-securing arrangement **270** is disposed in a respective inter-gripper region **353** and rotatably mounted around the gripper shaft **351**.
 - b) Step **S02** arranging, on the cylinder **220** (or **520**), a jacket **225** having a plurality of tabs **229** extending therefrom, such that each of the tabs **229** is disposed in a corresponding inter-gripper region **353**.
 - c) Step **S03** causing each of the jacket-securing arrangements **270** to rotate around the gripper shaft **351** to the first rotated position, so as to magnetically secure each of the jacket tabs **229** to a surface portion of the cylinder gap **320** (or **620**).
- In some embodiments, the method additionally comprises the following optional step:
- d) Step **S04** when the assembled jacket-securing arrangements **270** are in the first rotated position, and the corresponding jacket tabs **229** are secured to the surface of the cylinder

gap 320 (or 520), manually adjusting a connecting arrangement 281 between a magnet 280 and a respective jacket-securing arrangement 270 so as to improve the contact between the magnet 280 and the surface of the cylinder gap 320 (or 620) at a respective first location 321.

5 Referring now to **Figure 20**, a method is disclosed for replacing a cylinder jacket 225 on a cylinder 220 (or 520) on which jacket-securing arrangements 270 are installed according to any of the embodiments disclosed herein. The method comprises:

- a) Step S11 applying a force F (or F') at a respective force-receiving surface 277 of each of the jacket-securing arrangements 270, so as to rotate the jacket-securing arrangements
10 270 to the second rotated position and thereby release the jacket tabs 229 from being magnetically secured to the surface of the cylinder gap 320 (or 620).
- b) Step S12 removing the used jacket 225 from the cylinder 220 (or 520).
- c) Step S13 arranging a replacement jacket 225 on the cylinder 220 (or 520), such that each of the tabs 229 is disposed in a corresponding inter-gripper region 353.
- 15 d) Step S14 causing each of the jacket-securing arrangements 270 to rotate around the gripper shaft 351 to the first rotated position, so as to magnetically secure each of the tabs 229 of the replacement jacket 225 to the surface of the cylinder gap 320 (or 620).

The present invention has been described using detailed descriptions of embodiments thereof that are provided by way of example and are not intended to limit the scope of the
20 invention. The described embodiments comprise different features, not all of which are required in all embodiments of the invention. Some embodiments of the present invention utilize only some of the features or possible combinations of the features. Variations of embodiments of the present invention that are described and embodiments of the present invention comprising different combinations of features noted in the described embodiments will occur to persons
25 skilled in the art to which the invention pertains. Accordingly, the present invention is intended to embrace all such alternatives, modifications and variations and to be bound only by the spirit and scope of the disclosure and any change which come within their meaning and range of equivalency.

It is appreciated that certain features of the disclosure, which are, for clarity, described in
30 the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the disclosure, which are, for brevity, described in the context of a single embodiment, may also be provided separately or in any suitable sub-

combination or as suitable in any other described embodiment of the disclosure. Certain features described in the context of various embodiments are not to be considered essential features of those embodiments, unless the embodiment is inoperative without those elements.

5 The word “exemplary” is used herein to mean “serving as an example, instance or illustration”. Any embodiment described as “exemplary” is not necessarily to be construed as preferred or advantageous over other embodiments and/or to exclude the incorporation of features from other embodiments.

10 As used herein, the terms “configured to”, “adapted to”, “operative to”, “suitable for”, “made to”, and “designed to” may be used interchangeably to indicate the ability or capability of an element or structure to perform its recited function.

15 In the description and claims of the present disclosure, each of the verbs, “comprise”, “include” and “have”, and conjugates thereof, are used to indicate that the object or objects of the verb are not necessarily a complete listing of features, members, steps, components, elements or parts of the subject or subjects of the verb. As used herein, the singular form “a”, “an” and “the” include plural references unless the context clearly dictates otherwise.

20 Parts of GB patent application No. 1903768.8, filed on March 19, 2019, from which the present application claims convention priority, have been omitted from the present specification only in the interest of brevity and not on account of their contents being disclaimed. In view of the incorporation of GB 1903768.8 herein by reference, its entire contents should be deemed to form part of the present specification.

CLAIMS

1. A jacket-securing arrangement for mounting in a cylinder, which cylinder has an outer surface and at least one recess in the outer surface for receiving an inwardly turned edge of a replaceable jacket overlying at least part of the outer surface of the cylinder, wherein the jacket-securing arrangement is mountable within the recess so as not to project beyond the outer surface of the cylinder when the jacket is secured thereto, and includes a clamping lever pivotable about a shaft located within the recess between a clamping position in which the edge of the replaceable jacket is clamped between the lever and a side wall of the recess and a release position in which the lever is spaced from the side wall of the recess, a magnet being provided to retain the lever in the clamping position, wherein the clamping lever is formed of two or more members assembled around the shaft and defining between them a bearing surface engaging an outer surface of the shaft.
2. A jacket-securing arrangement as claimed in claim 1, wherein the magnet is mounted on the lever and is magnetically attracted to a wall of the recess when the lever is in the clamping position
3. A jacket-securing arrangement as claimed in claim 2, wherein the magnet is mounted on the lever at a first position on the lever and wherein clamping of the jacket occurs between a wall of the recess and a second position on the lever.
4. A jacket-securing arrangement as claimed in any one of the preceding claims, wherein two members of the two or more members forming the clamping lever are separable from one another and held against the shaft by threaded fasteners connecting said two members to one another.
5. A jacket-securing arrangement as claimed in any one of the preceding claims, wherein two members of the two or more members forming the clamping lever are connected to one another by a pivot and are further secured to one another by at least one threaded fastener after the clamping lever has been assembled around the shaft.
6. A jacket-securing arrangement as claimed in any one of the preceding claims, wherein a second magnet is provided to retain the clamping lever in the release position.

7. A jacket-securing assembly for mounting in a cylinder, which cylinder has an outer surface and at least one recess in the outer surface for receiving an inwardly turned edge of a replaceable jacket overlying at least part of the outer surface of the cylinder, the assembly comprising a plurality of jacket-securing arrangements as claimed in any one of claim 1 to claim 6, wherein the clamping levers are mounted for rotation about the axis of a common shaft and are spaced from one another along the axis of the shaft, and wherein a respective magnet is provided to retain each of the clamping levers in the clamping position.

8. A cylinder having a cylindrical surface, a recess in the cylindrical surface for receiving an inwardly turned edge of a replaceable jacket overlying at least part of the outer surface of the cylinder, and a shaft located in the recess, wherein the cylinder is further provided with a jacket-securing arrangement as claimed in any one of claim 1 to claim 6 or with a jacket-securing assembly as claimed in claim 7, that is located within the recess.

9. A cylinder as claimed in claim 8, wherein the cylinder serves as a substrate transport cylinder of a printing system wherein a gripper shaft is located within the recess, which gripper shaft is fitted with grippers that are spaced along the length of the gripper shaft, the grippers being pivotable about a longitudinal axis of the gripper shaft between a gripping position in which tips of the grippers serve to trap an edge of a substrate sheet against the outer surface of the cylinder and a release position in which the grippers project beyond the outer surface of the cylinder, and wherein the clamping levers of the jacket-securing assembly are pivotably mounted on the gripper shaft and are located in spaces between the grippers.

10. A cylinder as claimed in claim 8 or claim 9, wherein a bracket is provided to apply a force to all the clamping levers to force the clamping levers away from their respective clamping positions.

11. A cylinder as claimed in claim 10, wherein the bracket and the clamping levers are configured in such a manner that the clamping levers are released from their clamping positions in a sequential manner in response to a continuous movement of the bracket.

12. A cylinder as claimed in any one of claim 8 to claim 11, in combination with a replaceable jacket overlying the surface of the cylinder, wherein the jacket has a first inwardly turned edge to be clamped against a wall of a recess by means of the one or more jacket-securing arrangements and a second inwardly turned edge at an opposite end of the jacket that engages an undercut wall of the, or another, recess in the surface of the cylinder.

13. A cylinder as claimed in any one of claim 8 to claim 11, in combination with a replaceable jacket overlying the surface of the cylinder, wherein the jacket has a first inwardly turned edge to be clamped against a wall of a recess by means of the one or more jacket-securing arrangements and a second inwardly turned edge at an opposite end of the jacket to be clamped against a different wall of the, or another, recess in the surface of the cylinder by means of a magnetically actuated mechanism.

14. A printing system comprising a cylinder having a cylindrical surface, a recess in the cylindrical surface for receiving an inwardly turned edge of a replaceable jacket overlying at least part of the outer surface of the cylinder, a shaft located in the recess, wherein the cylinder is as claimed in any one of claim 8 to claim 13.

15. A printing system comprising:

- a. an intermediate transfer member (ITM) operable to have ink images formed thereupon at an image-forming station; and
- b. an impression station configured to transfer the ink images from the ITM to a substrate by pressing the ITM and the substrate one against the other, the impression station comprising:
 - i. a rotatable impression cylinder for contacting a surface of the substrate opposite that in contact with the ITM, and
 - ii. at least one replaceable jacket disposed around a portion of the circumference of the impression cylinder and having inwardly turned edges,

the impression cylinder being as claimed in any one of claim 8 to claim 13.

16. A printing system as claimed in claim 15, wherein the image-forming station is able to deposit a liquid ink on selected regions of said ITM, the printing system further comprising a drying station configured to evaporate the liquid of the ink-image before said image is transferred at the impression station, the ITM being one of a plate, a drum and an endless continuous belt.

17. A printing system as claimed in claim 15, wherein the image-forming station is able to activate a dry ink on selected regions of said ITM, the image-forming station optionally including an imaging element configured to selectively apply electromagnetic radiation to the dry ink on the ITM, the ITM being selected from a group consisting of a plate, a drum and an endless continuous belt.

18. A kit for assembling a jacket-securing arrangement around a shaft disposed in a cylinder recess, the kit comprising one or more of a respective first member, a respective magnet and a respective second member collectively forming in an assembled state a respective jacket-securing arrangement, the first member optionally being configured for holding the magnet directly or owing to a magnet holder, and the second member being detachably attachable to the first member, the first member and the second member being configured to be rotatably mounted around the shaft, wherein when in the assembled state, the respective jacket-securing arrangement is configured to provide reversible magnetic securing of a portion of a replaceable cylinder jacket to at least part of a surface of the cylinder or cylinder recess when the respective jacket-securing arrangement is in a first rotated clamping position and not in a second rotated release position, each jacket-securing arrangement being optionally as claimed in any one of claim 1 to claim 6, the cylinder optionally serving as a substrate transport cylinder of a printing system.

19. A method for installing a replaceable cylinder jacket on a cylinder, the cylinder having at least one recess in an outer surface and a shaft disposed in said at least one recess, the method comprising:

a- mounting about the shaft located within the recess one or more jacket-securing arrangements, each jacket-securing arrangement of the one or more jacket securing arrangements comprising (i) a respective magnet, (ii) a respective first member, and (iii) a respective second member that is detachably attachable to the respective first member, such that each attached first and second member of the jacket-securing arrangement form a pivotable clamping lever rotatably mounted around the shaft and disposed in a respective distinct region of the recess, the respective magnet being positioned to retain the lever in a clamping position;

b- arranging, on the cylinder, a jacket having one or more tabs extending therefrom, the tabs being inwardly turned to the recess such that each of the one or more tabs is disposed in one of the respective distinct regions of the recess; and

c- rotating each of the jacket-securing arrangements around the shaft so as to secure each of the one or more tabs to the recess in the clamping position;

wherein each of the one or more jacket-securing arrangements is optionally as claimed in any one of claim 1 to claim 6.

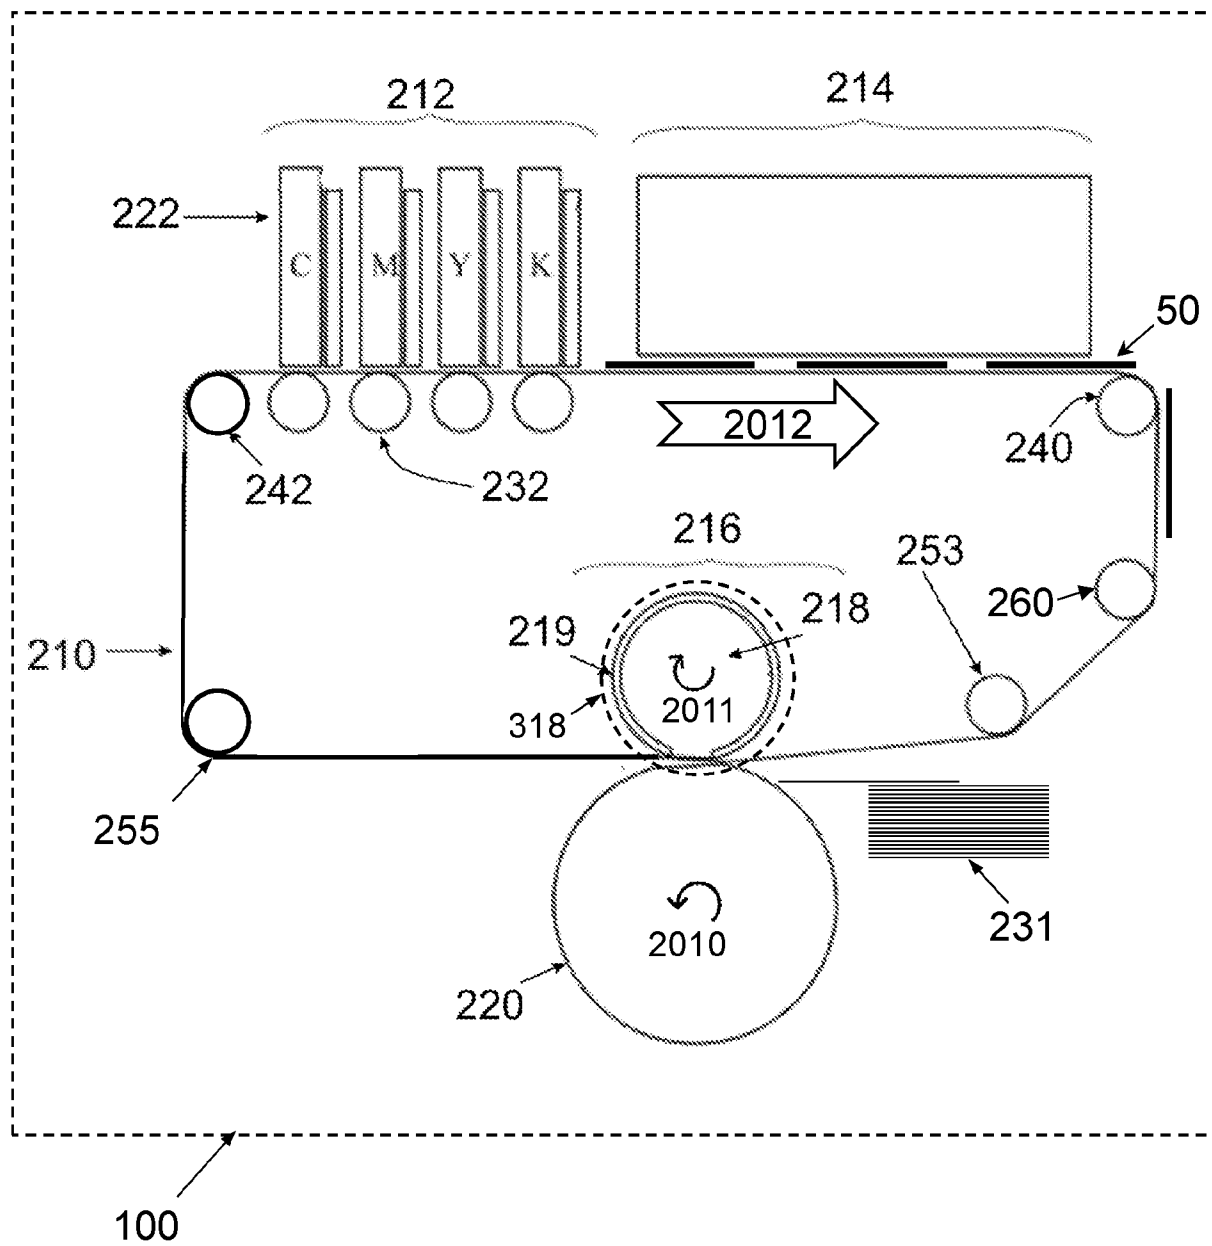


FIG. 1

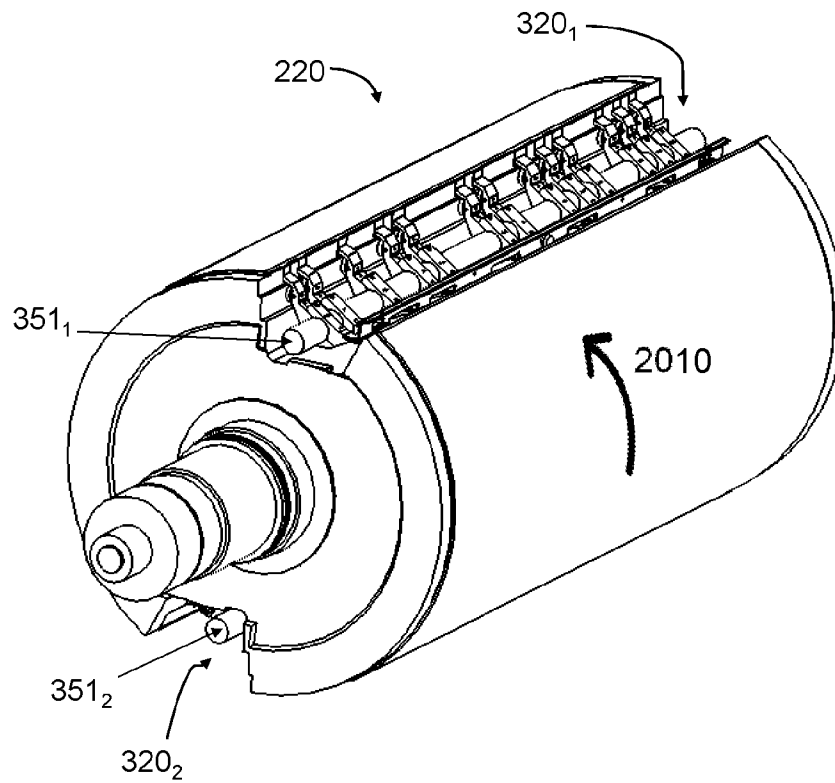


FIG. 2

CROSS-SECTION
ELEVATION VIEW

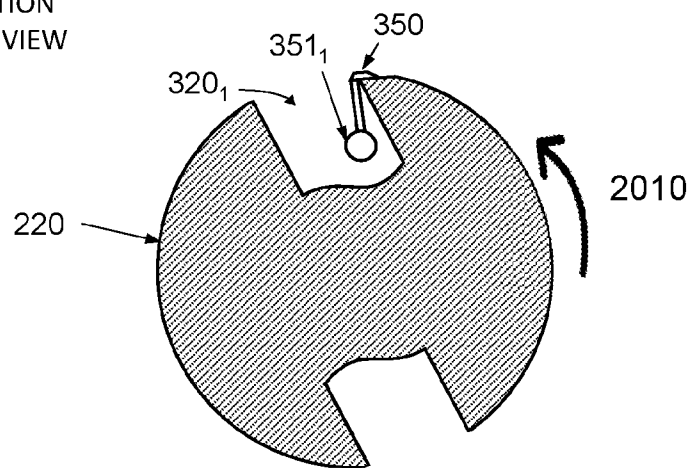


FIG. 3A

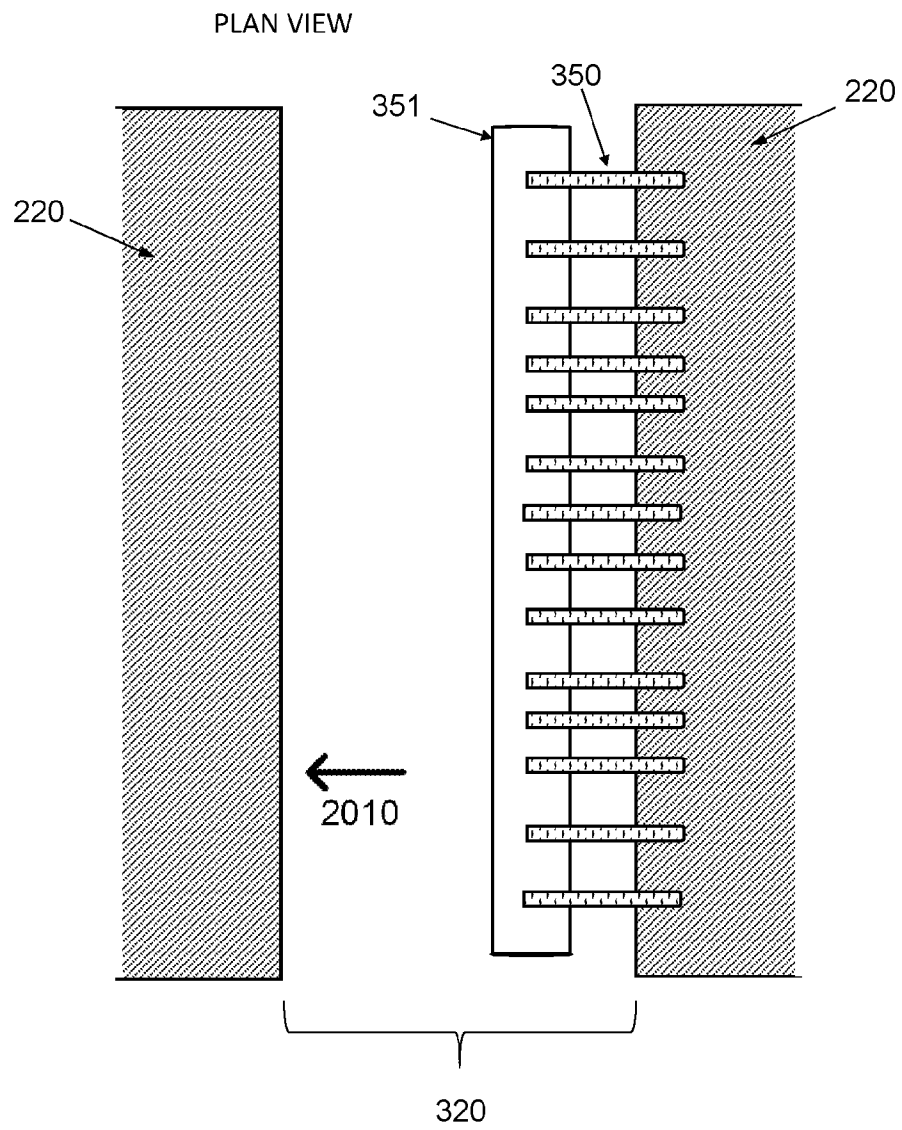


FIG. 3B

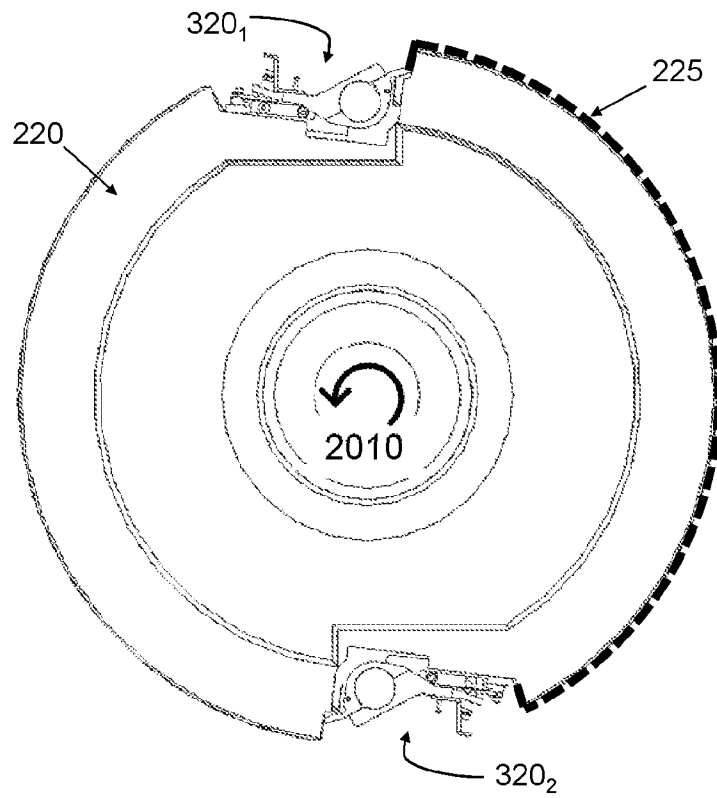


FIG. 4

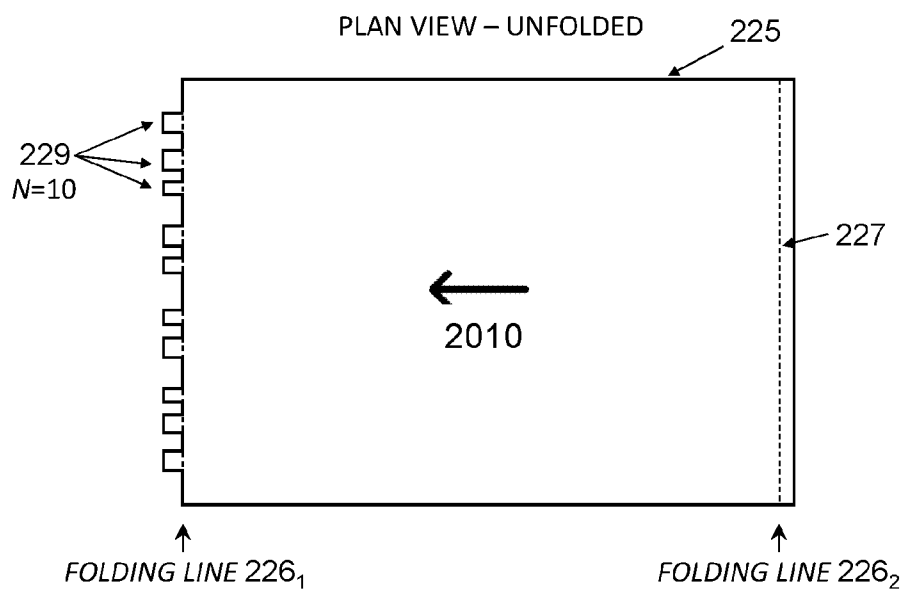


FIG. 5A


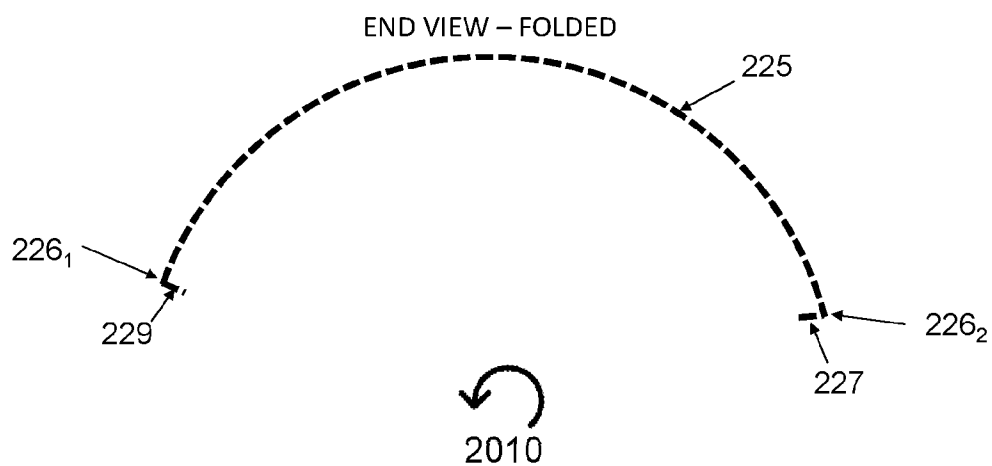


FIG. 5B

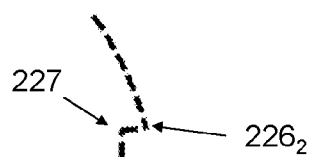

ALTERNATIVE PARTIAL END VIEW

FIG. 5C

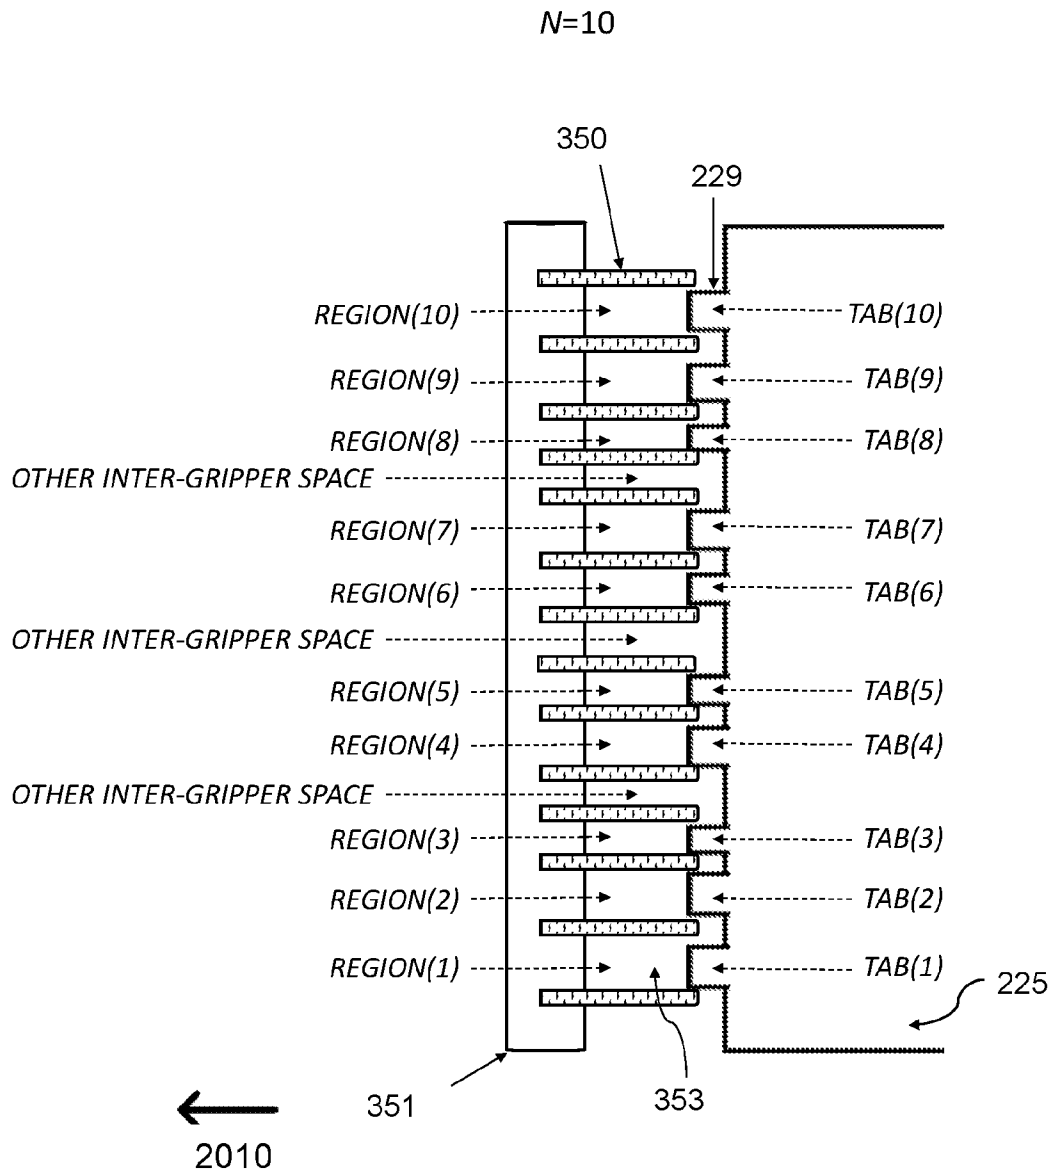


FIG. 6

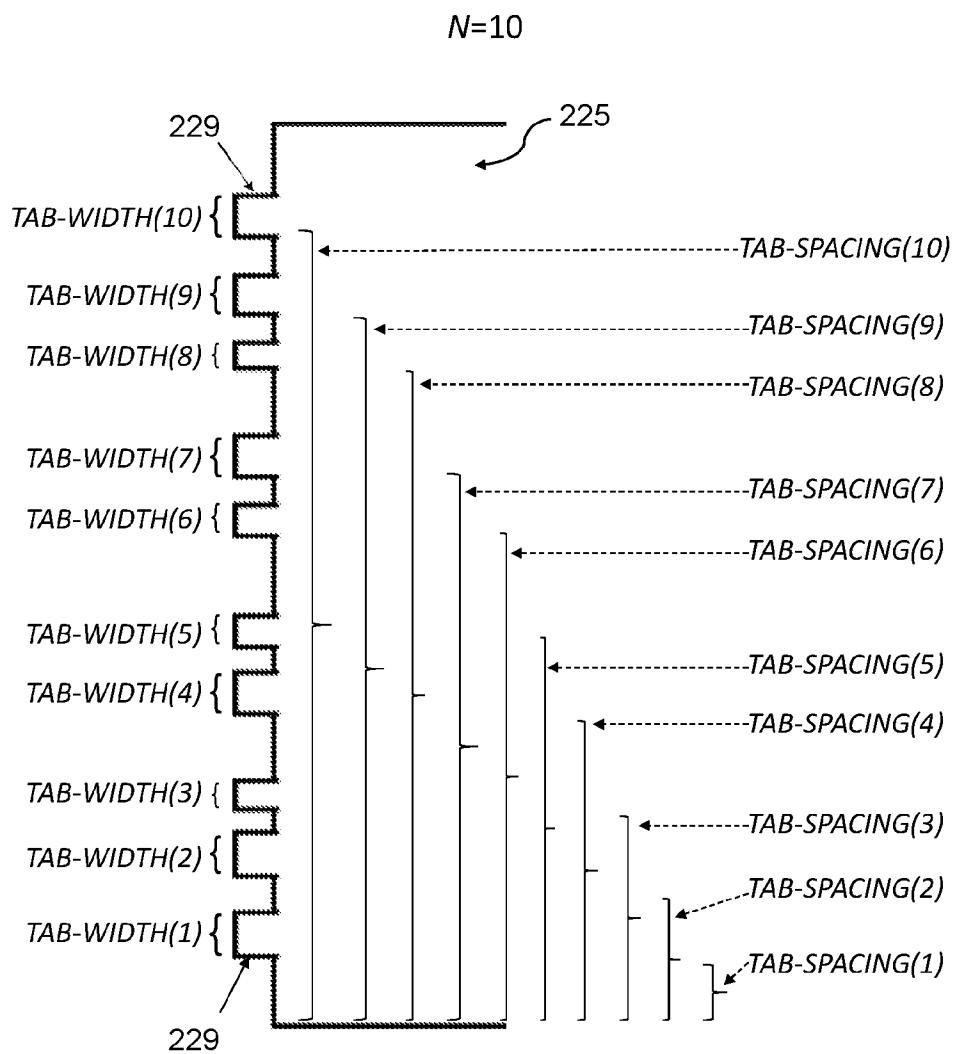


FIG. 7

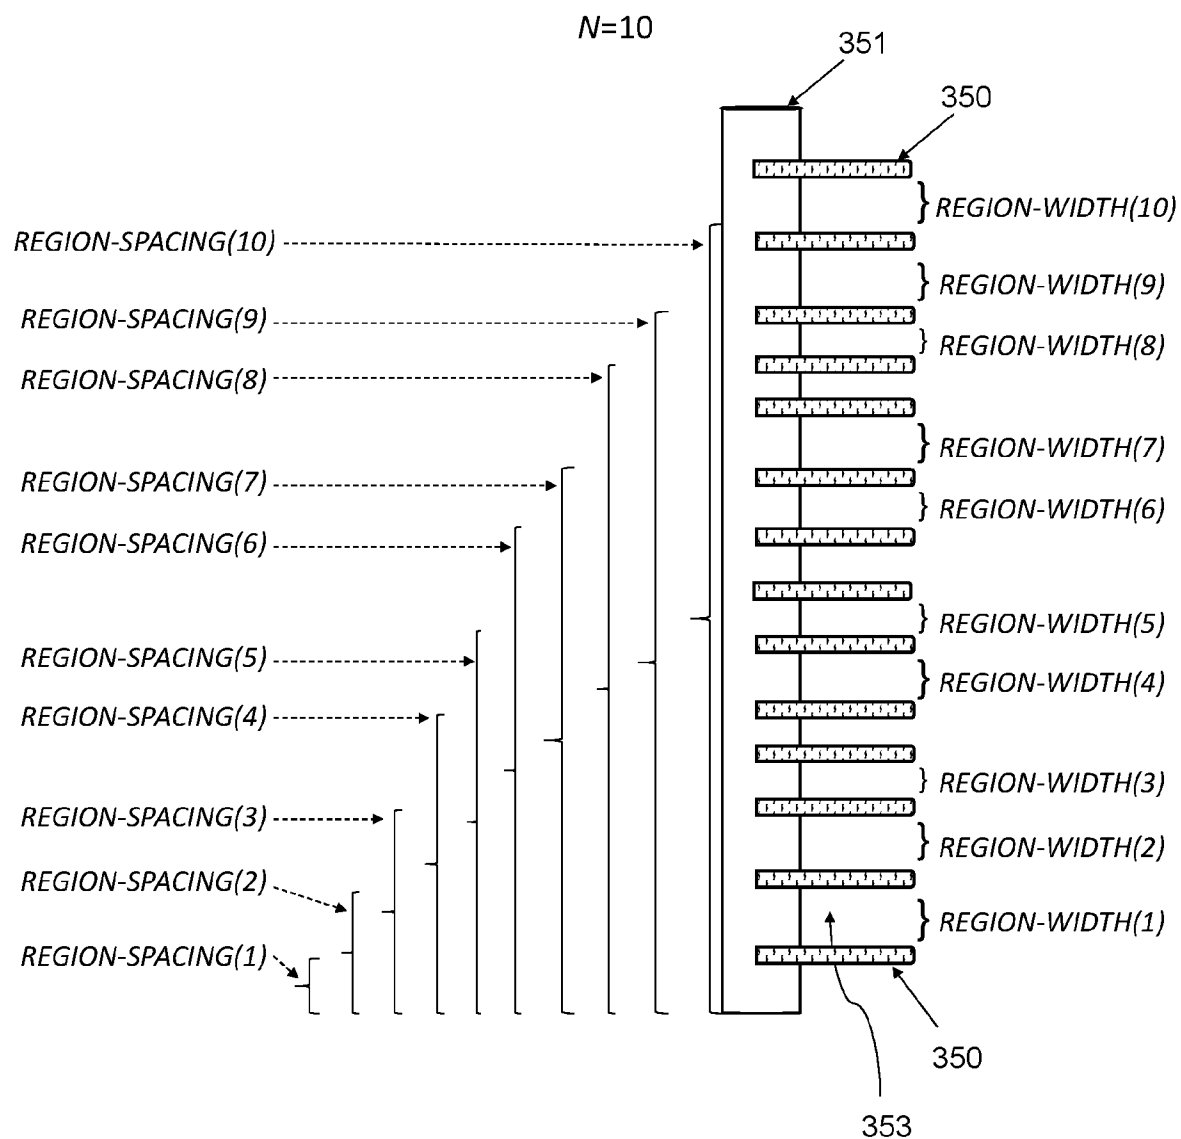
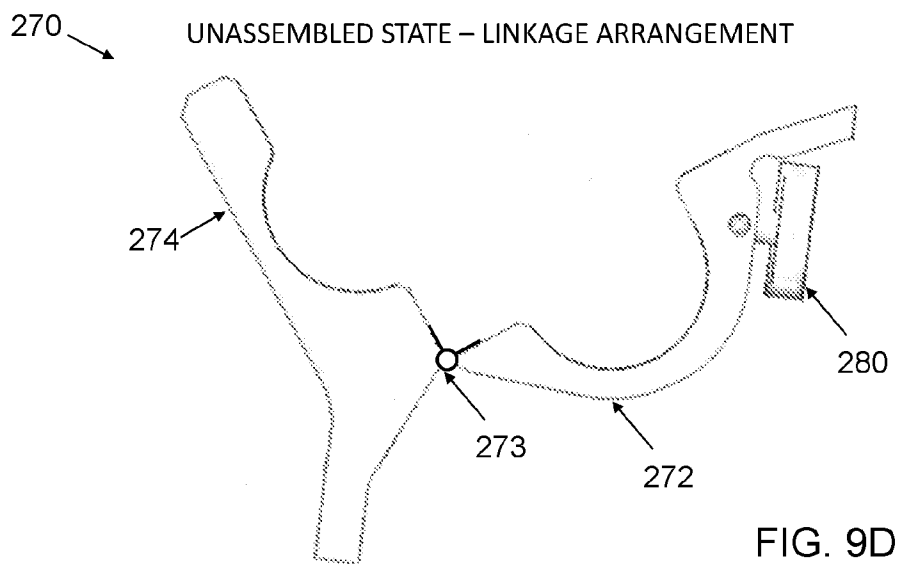
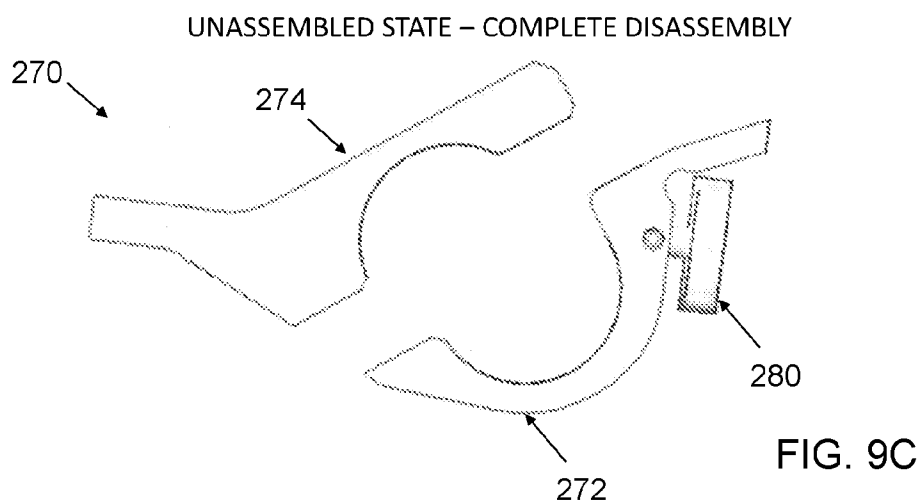
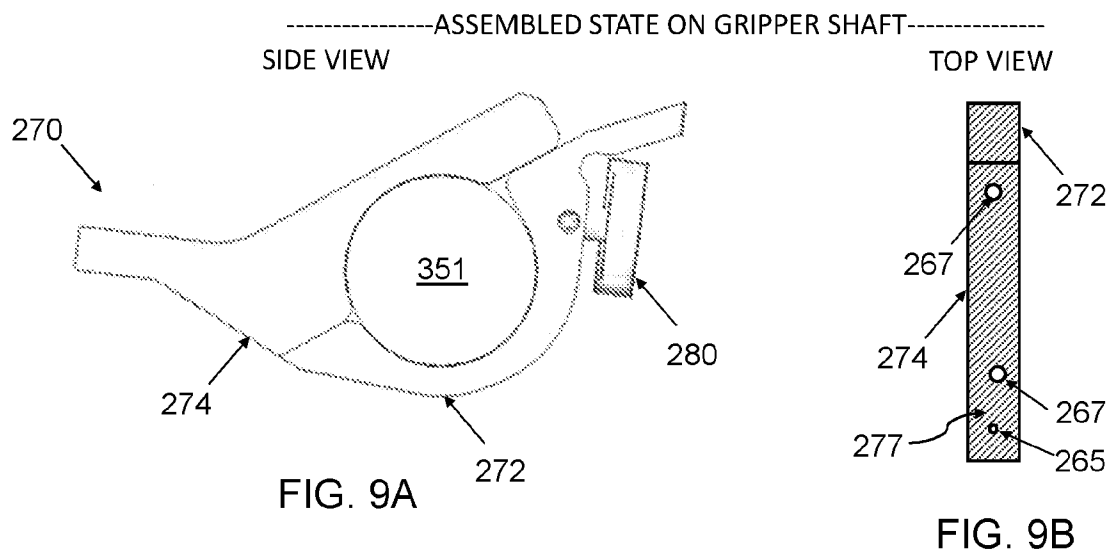


FIG. 8



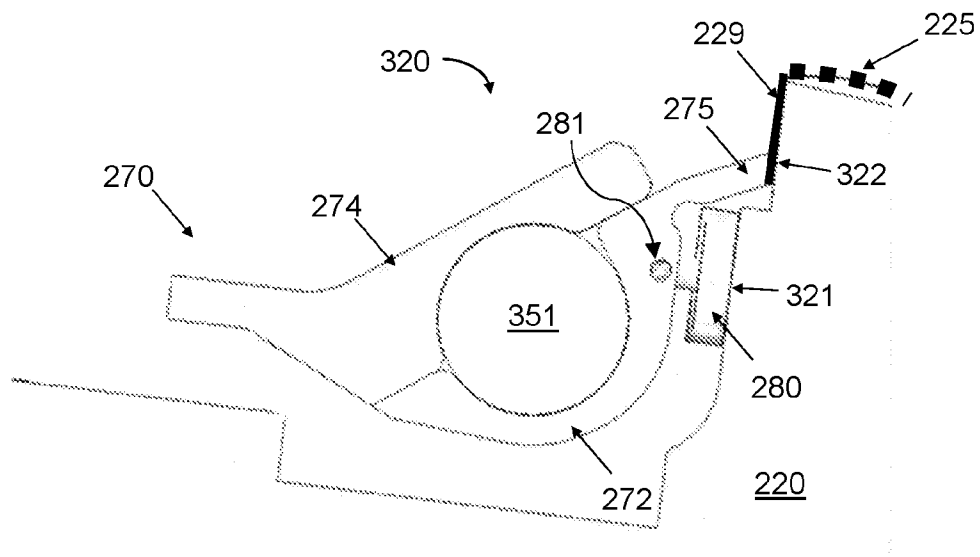


FIG. 10A

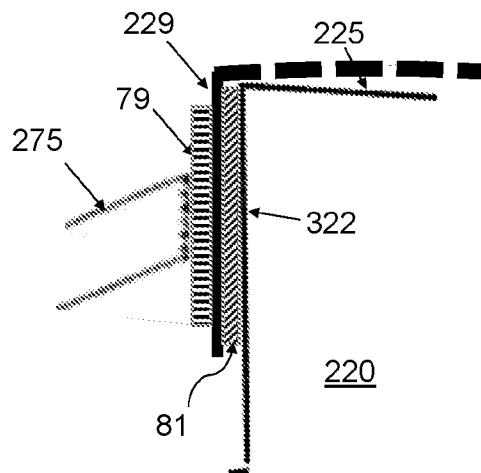


FIG. 10B

ALTERNATIVE EMBODIMENT

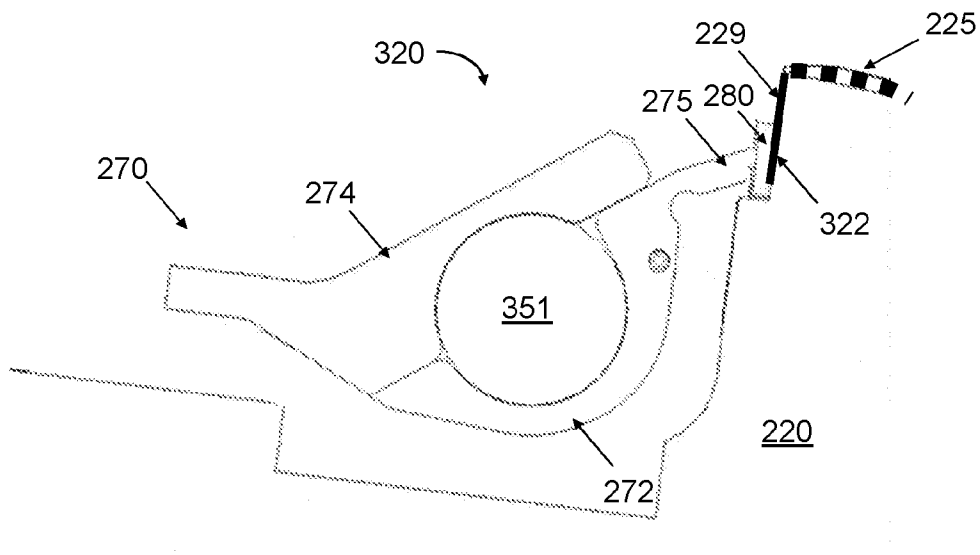


FIG. 10C

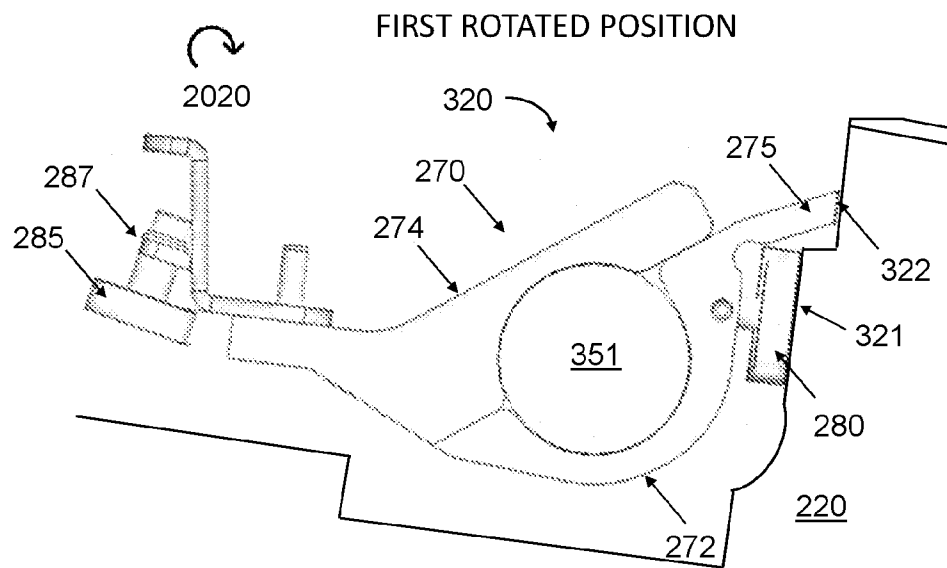


FIG. 11A

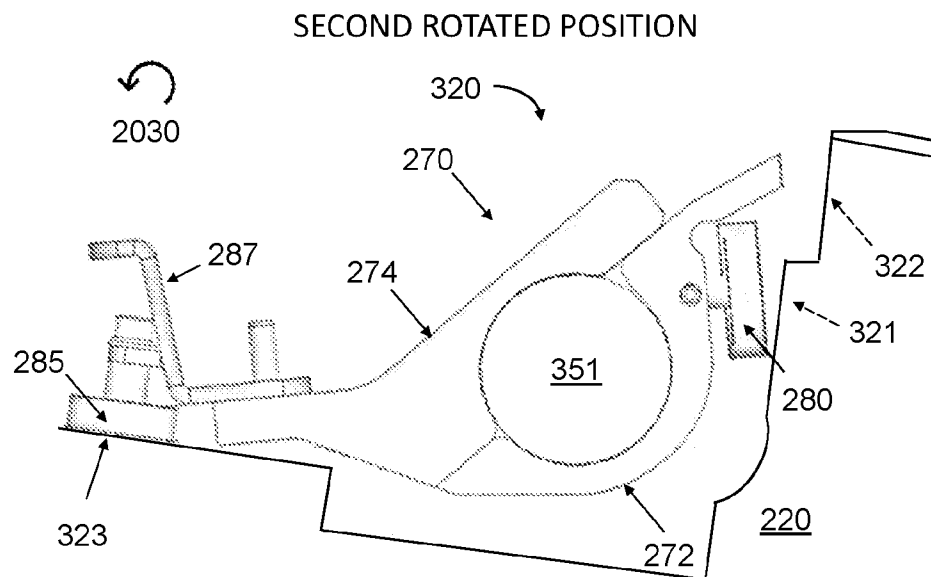


FIG. 11B

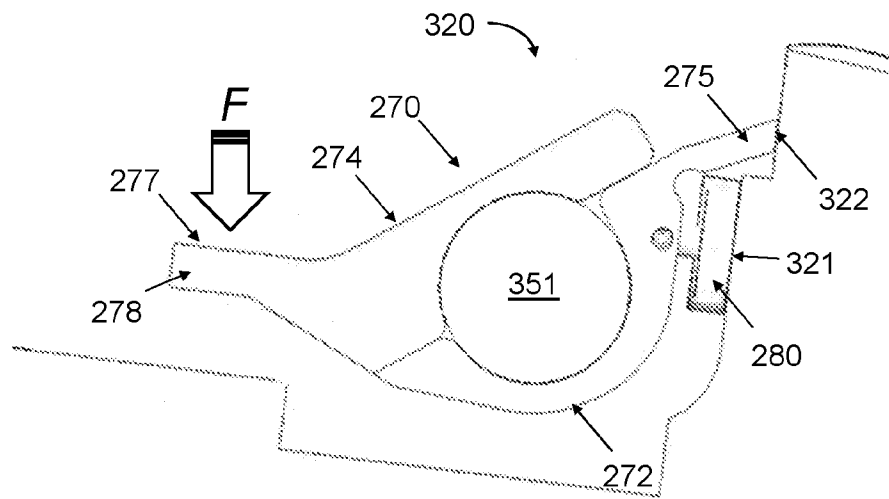


FIG. 12

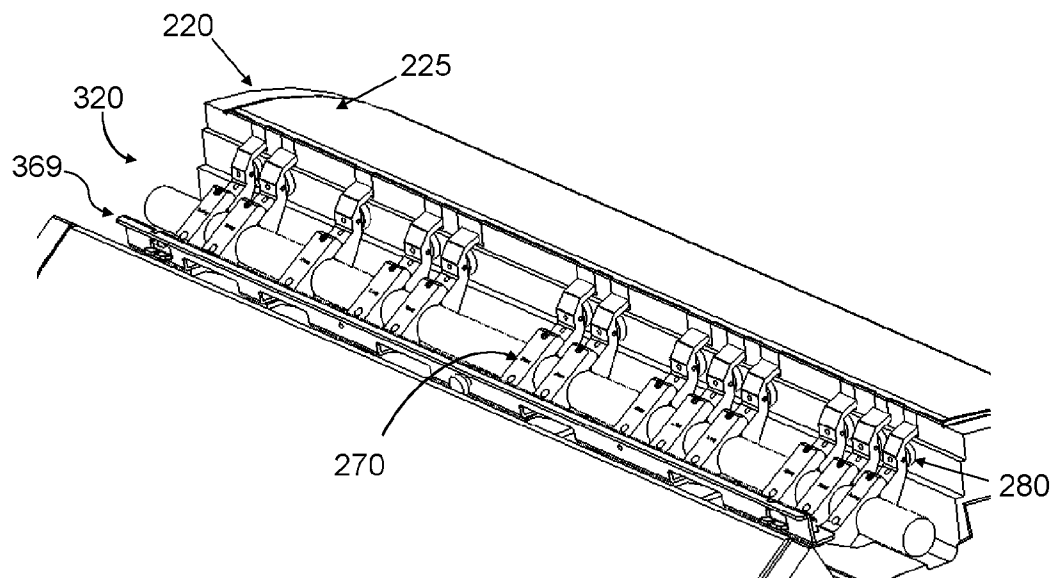


FIG. 13

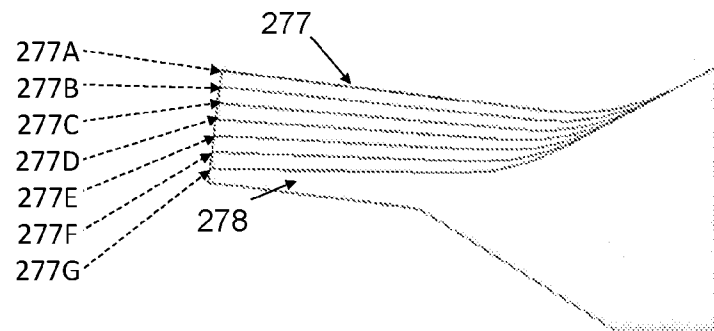


FIG. 14A

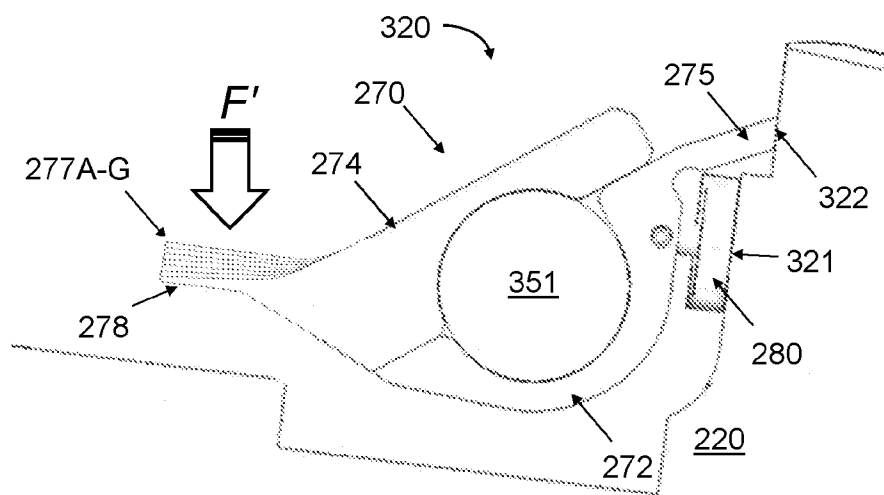


FIG. 14B

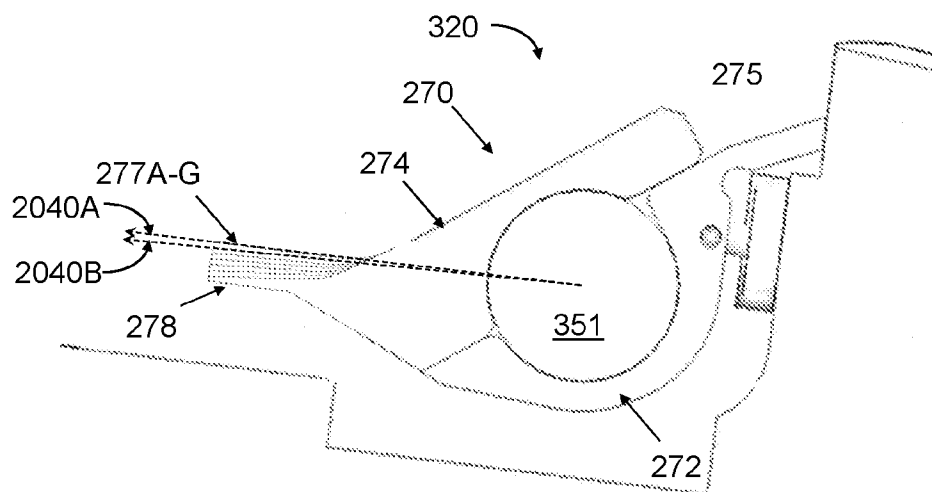


FIG. 14C

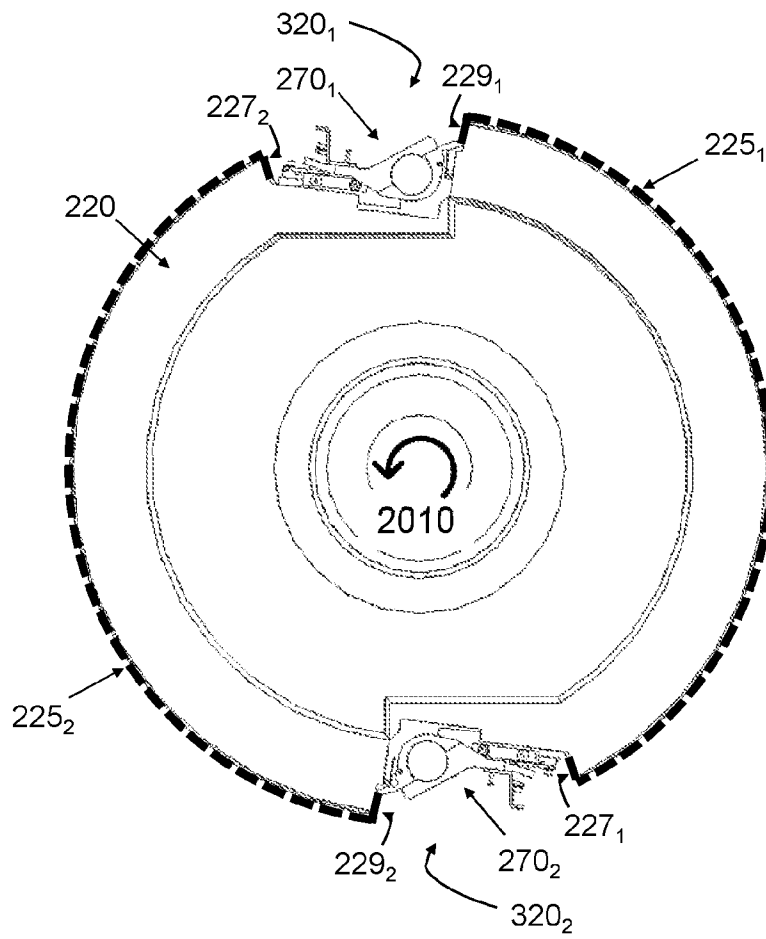


FIG. 15

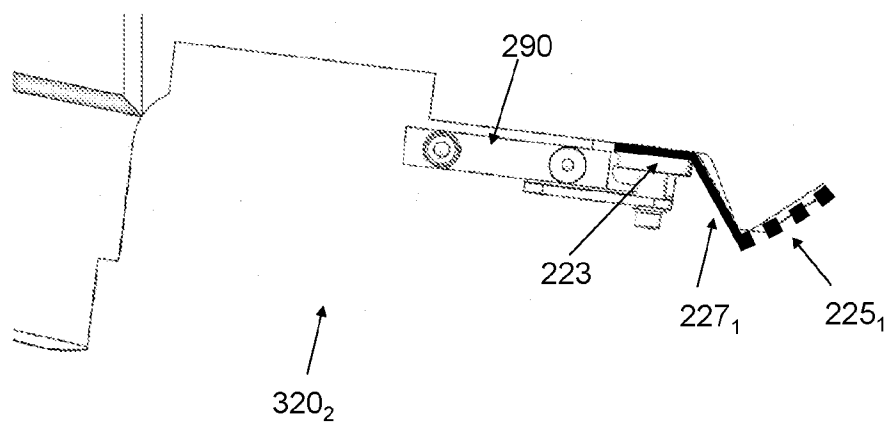


FIG. 16

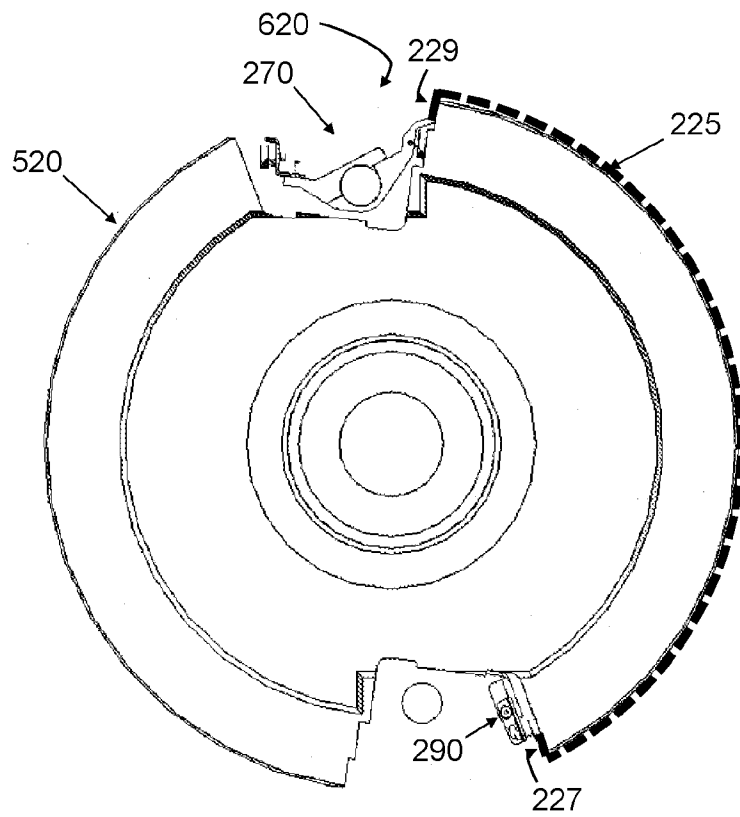


FIG. 17

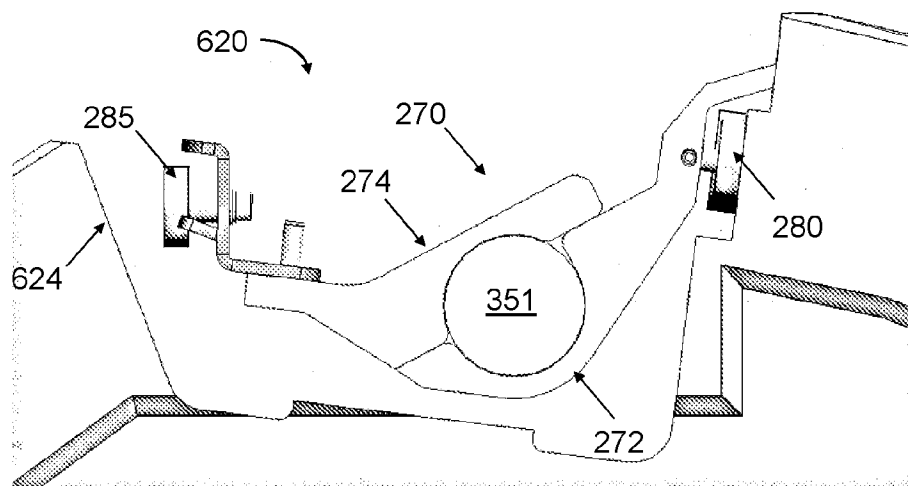


FIG. 18

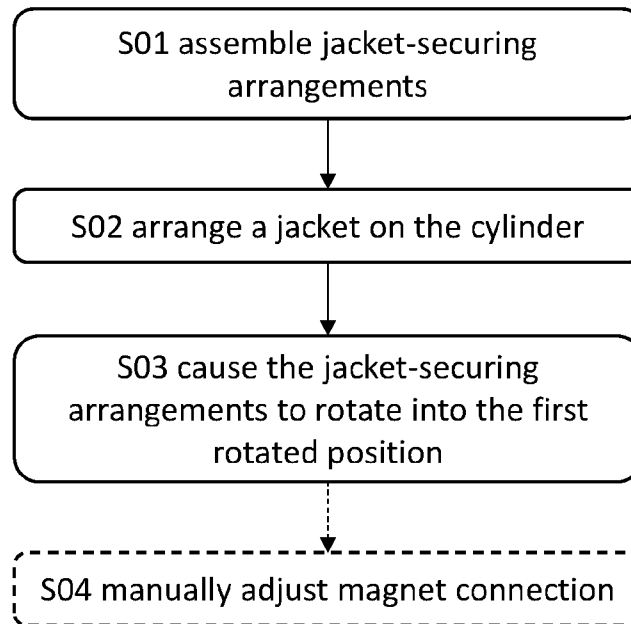


FIG. 19

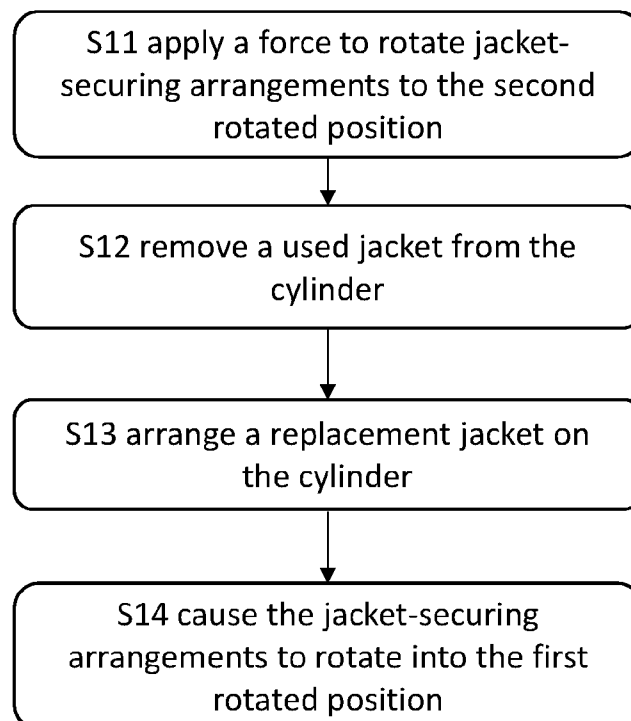


FIG. 20

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2020/052448

A. CLASSIFICATION OF SUBJECT MATTER

INV. B41F30/02 B41F31/16 B41F16/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B41F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 764 560 A (ADDRESSOGRAPH MULTIGRAPH) 28 December 1956 (1956-12-28) cited in the application	1-8,10, 11,18,19
Y	figures 1-7,8-10 page 2, lines 1-117 page 3, lines 85-124	9,12-17
Y	----- EP 2 823 362 A1 (LANDA CORP LTD [IL]) 14 January 2015 (2015-01-14) figure 1 paragraphs [0026] - [0029], [0045]	9,12-17
A	----- DE 10 2016 209344 A1 (KOENIG & BAUER AG [DE]) 24 May 2017 (2017-05-24) the whole document ----- -/-	1-19



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 July 2020

Date of mailing of the international search report

14/07/2020

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Hajji, Mohamed-Karim

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2020/052448

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 10 2004 031767 A1 (ROLAND MAN DRUCKMASCH [DE]) 26 January 2006 (2006-01-26) the whole document	1-19
A	----- DE 10 2008 060557 A1 (HEIDELBERGER DRUCKMASCH AG [DE]) 10 June 2010 (2010-06-10) the whole document -----	1-19

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2020/052448

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 764560	A	28-12-1956	NONE
EP 2823362	A1	14-01-2015	CN 104220934 A 17-12-2014
			EP 2823362 A1 14-01-2015
			JP 6564571 B2 21-08-2019
			JP 6655106 B2 26-02-2020
			JP 2015514606 A 21-05-2015
			JP 2018103627 A 05-07-2018
			JP 2020097239 A 25-06-2020
			US 2015022602 A1 22-01-2015
			WO 2013132420 A1 12-09-2013
DE 102016209344 A1	24-05-2017	DE 102016209337 A1	24-05-2017
		DE 102016209339 A1	24-05-2017
		DE 102016209340 A1	24-05-2017
		DE 102016209342 A1	24-05-2017
		DE 102016209344 A1	24-05-2017
		DE 102016209345 A1	24-05-2017
		DE 102016209346 A1	24-05-2017
		DE 102016209347 A1	24-05-2017
DE 102004031767 A1	26-01-2006	NONE	
DE 102008060557 A1	10-06-2010	NONE	