

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
7 September 2007 (07.09.2007)

PCT

(10) International Publication Number  
WO 2007/100495 A1

## (51) International Patent Classification:

H04L 12/56 (2006.01)

## (21) International Application Number:

PCT/US2007/003853

## (22) International Filing Date:

12 February 2007 (12.02.2007)

## (25) Filing Language:

English

## (26) Publication Language:

English

## (30) Priority Data:

11/364,698 28 February 2006 (28.02.2006) US

(71) Applicant (for all designated States except US): LUCENT TECHNOLOGIES INC. [US/US]; 600 Mountain Avenue, Murray Hill, NJ 07974-0636 (US).

## (72) Inventors; and

(75) Inventors/Applicants (for US only): ANDERSON, Thomas, Wayne [US/US]; 1101 Brighton Road, Naperville, IL 60563 (US). FAYNBERG, Igor [US/US]; 225 Bromley Place, East Brunswick, NJ 08816 (US).

(74) Agent: HODULIK, Matthew, J.; Lucent Technologies Inc., Docket Administrator - Room 2F-190, 600 Mountain Avenue, Murray Hill, NJ 07974-0636 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR REAL-TIME APPLICATION-DRIVEN RESOURCE MANAGEMENT IN NEXT GENERATION NETWORKS

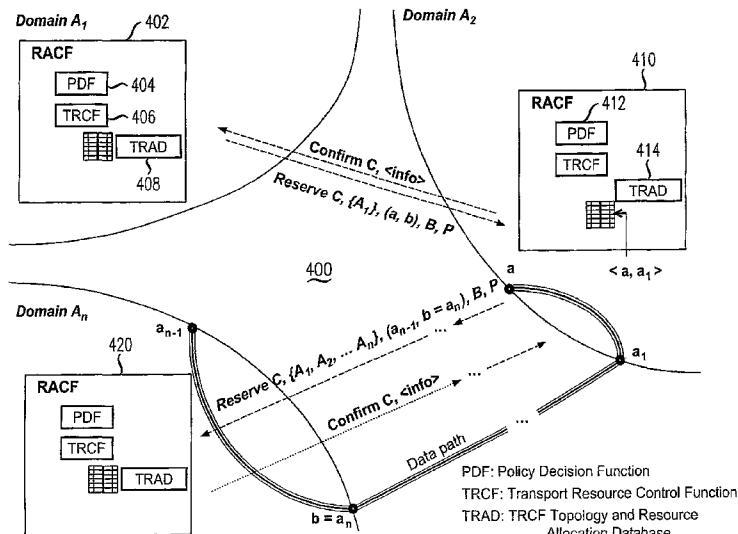

(57) Abstract: The present invention specifies the mechanism for supporting end-to-end quality of service (QoS) reservations for an implicit reservations model using a Resource and Admission Control Function (RACF) apparatus. The invention teaches how to implement implicit resource reservations using the open-standard Resource and Admission Control Function (RACF), which is being standardized in ITU-T. Several methods are covered: 1) With a first method, a general distributed approach has been specified. 2) For a second method, the terminating RACF keeps the state of the reservations, so the resulting protocol is relatively simple, robust, and easy to implement. 3) A third method, which can be based on either of the above methods or their combination, starts reservations at both, the terminating and originating RACF ends and works toward the meet-me point.

WO 2007/100495 A1

## **METHOD AND APPARATUS FOR REAL-TIME APPLICATION-DRIVEN RESOURCE MANAGEMENT IN NEXT GENERATION NETWORKS**

### **5 TECHNICAL FIELD**

This invention relates generally to the field of telecommunications and in particular to resource management in Next Generation Networks.

### **10 BACKGROUND OF THE INVENTION**

The Next Generation Network (NGN) is characterized, among other things, by the prevalent use of the Internet Protocol (IP) for end-to-end packet transfer. But the main mission of the NGN is flawless support of a wide range of applications, including real-time multimedia, over the packet infrastructure. This requirement and 15 those for security and reliability together are so broad and diversified that one can envision the NGN as a distributed general-purpose computing engine. Here, the early Internet model of the network as a “best-effort” pipe is converging with the modern combined Information Technology and Telecommunications model of the network as a super-large computer. Consequently, the responsibilities of the NGN expand—from 20 merely supporting connectivity—toward assuring the quality of services comprehensively.

The key to fulfilling this expanded duty is dynamic resource management. Indeed, among the most active topics in the present research and development on the NGN is real-time application-driven resource management. The resources that need to 25 be managed include

1. Bandwidth;
2. IP addresses;
3. Transport (TCP and UDP) ports;
4. Various database records; and

5. MPLS label-switched-paths,

among many others. In fact, the very multitude of these “others” is what necessitates an abstraction of the resource concept and the development of the appropriate mechanisms based on this abstraction.

5 There is a need to concentrate on the application-driven and real-time aspects of resource management that are of particular importance in the NGN because of the need for *coupling* the service control and transport resource control. First, such coupling enables the fast introduction of new services (such as IP telephony, IP TV, and IP gaming) for which performance is a key differentiator. Second, it allows the  
10 services to evolve independently of the packet transport technology.

15 The IETF RFC 2753 specifies a framework for policy-based admission control. This framework underpins the IP Multimedia Subsystem (IMS) service-based local policy control, as specified in 3GPP TS 23.207. That, in turn, has become the basis for the resource- and policy-based admission control mechanisms being  
15 standardized in both the ETSI (or rather ETSI *TISPAN* project, to be specific) and ITU-T Study Groups 11 and 13.

20 The emerging standard mechanisms have been designed to allow the admission decision for a service request (IMS- or non-IMS-supported) to take into consideration both policy and transport resource availability. They enable performance assurance and border control (e.g., NAPT, NAT traversal, and gating) through *bridging* service control and transport resource management. The mechanisms are defined as part of the Resource and Admission Control Subsystem (RACS) in the ETSI TISPAN project and the Resource and Admission Control Functions (RACF) in the ITU-T, however, functionalities for Real-Time Application-  
25 Driven Resource Management in Next Generation Networks have yet to be developed.

**SUMMARY OF THE INVENTION**

An advance is made over the prior art in accordance with the principles of the present invention that the present invention specifies a mechanism for supporting end-to-end quality of service (QoS) reservations for an implicit reservations model using a

5 Resource and Admission Control Function (RACF) apparatus. In one exemplary embodiment a method for resource management in a communications network having multiple domains is taught comprising the steps of receiving a request for resources for a given reservation between an originating and a terminating point in said network and processing said request for a given domain by a central controller for that domain

10 to determine whether routes for said reservation are available and whether necessary bandwidth for said reservation is available. If the routes and bandwidth are available, confirming said reservation in said given domain is confirmed and said reservation request is passed to another central controller for a next domain having resources required to satisfy said reservation request. In one embodiment of the invention, each

15 central controller in a path between the originating point and the terminating point of the reservation keeps state for the reservation request. In another embodiment, only one end central controller in a path between the originating point and the terminating point of the reservation keeps state for the reservation request. In a further embodiment, each end central controller in a path between the originating point and

20 the terminating point of the reservation keeps state for the reservation request, the reservation request converging toward a point between the originating and terminating

point of said request, wherein state information of each central controller is then shared.

An apparatus for resource management in a communications network having multiple domains is also described. The resource management is accomplished on a domain wide basis, and said apparatus comprises a controller operable to receive a request for resources for a given reservation between an originating and a terminating point in said network. The controller is further operable for a given domain to determine whether routes for said reservation are available and whether necessary bandwidth for said reservation is available. If the routes and bandwidth are available, said apparatus confirms said reservation in said given domain and passes said reservation request to another controller for a next domain having resources required to satisfy said reservation request.

15 **BRIEF DESCRIPTION OF THE DRAWING**

The teachings of the present invention can be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

20 FIG. 1 shows in simplified block diagram the position of RACF and RACS in an NGN.

FIG. 2 is an exemplary RACF Architecture;

FIG. 3 shows an exemplary network having a communication between multiple domains therein

FIG. 4 shows an exemplary network utilizing the present invention to reserve resources for a given reservation ; and

FIG. 5 shows another exemplary embodiment of the present invention for reserving resources for a given reservation.

5

### **DETAILED DESCRIPTION**

The present invention specifies the mechanism for supporting end-to-end quality of service (QoS) reservations for an implicit reservations model using a Resource and Admission Control Function (RACF) apparatus. Although the invention is described with respect to the RACF, it would be understood that other apparatus that include like functionality, may also be utilized in connection with the present invention.

Implicit resource reservations rely on stored information about available (provisioned or previously reserved) fat pipes. In such cases the system must keep track of the used and available bandwidth through accounting (by keeping the state of the active sessions) or auditing the involved network elements.

The invention teaches how to implement implicit resource reservations using the open-standard Resource and Admission Control Function (RACF), which is being standardized in ITU-T.

Several methods are covered:

- 1) With a first method, a general distributed approach has been specified.
- 2) For a second method, the terminating RACF keeps the state of the reservations, so the resulting protocol is relatively simple, robust, and easy to implement.
- 25 3) A third method, which can be based on either of the above methods or their combination, starts reservations at both, the terminating and originating RACF ends and works toward the meet-me point.

The present invention is an advance over the prior art in that a central controller for a given domain or part of a domain keeps track of the allocation of resources in that domain for given reservation requests. More specifically, a controller is able to guarantee that certain routes are available within a domain and that the bandwidth associated with those routes is also available. Many prior art methods utilized individual routers along a path to track such information, which as would be understood, has become quite cumbersome and, more important, non-scalable. In addition, whereas previous art methods supported uni-directional flow reservations; in contrast, the present invention supports both uni- and bi-directional reservations.

As shown in Figure 1, RACS and RACF 101 have the same position in the overall next generation network architecture 103. Because RACF is more general, we examine resource management mechanisms in the context of RACF.

As depicted in Figure 2, RACF 201 as shown with other functional entities in a NGN contains two major functional entities: a Policy Decision Function (PDF) 203 and Transport Resource Control Function (TRCF) 205.

At a high level, the PDF 203 is responsible for authorizing a resource request based on policy as well as resource availability and applying a variety of controls to transport entities. The controls include opening and closing of ports, NAPT, NAT traversal, and packet marking.

The TRCF 205 has access to the transport resource usage and network topology information, and thus it can check the resource availability on the request of the PDF. The PDF interacts with TRCF through the Rq' reference point.

RACF has relationships with service control functional entities at the service stratum 207 (such as the Service Control Proxy Function 209, of which the IMS Proxy Call State Control Function [P-CSCF] is one example) and functional entities at the transport stratum 211 (such as border gateway function) through various reference points, including Gq' and Go'.

Additionally, admission control is a fundamental RACF capability for preventing and containing network congestion. As a result the network can always operate within its engineered capacity with the desired performance. An admission decision can depend on a variety of factors, such as network resource availability or 5 policy rules for administering, managing and controlling access to network resources. The policy rules can be specific to the needs of the service provider or they can reflect the agreement between the customer and service provider. The latter agreement may specify reliability and availability requirements over a period of time. To satisfy the reliability and availability needs for certain services (e.g., emergency 10 communications), the associated traffic can be given a higher than normal priority for admission to the network.

In an application-driven environment, to guarantee quality of service, it is essential that admission control be coupled with service control (or session management in the case session-oriented applications) such that resource availability 15 is part of the decision making for granting an application request. Care should be given to the accuracy of the resource availability information (i.e., how close it needs to reflect the current load of a node, link or path). There needs to be a balance between the optimal use of resources and computational cost for achieving that. Similarly, because reliability and security requirements usually create additional 20 resource demands, it is important to understand where to strike the balance. The ICIN'04 paper Houck D., and H. Uzunalioglu, *An Architecture and Admission Control Algorithm for Multi-Priority Voice over IP (VoIP) Calls*. Proceedings of the 9th International Conference on Intelligence in Service Delivery Networks, October, 2004. Bordeaux, France, on the Call Admission Control/Call Admission Management 25 has addressed this subject in much detail.

### **Resource Allocation**

In the context of describing the present invention, we concentrate on the 30 case—particularly essential to the IMS environment—where it is the application

request that triggers resource allocation. The request is delivered via the service control function (such as the IMS P-CSCF); RACF is its recipient.

The types of the resources managed by RACF include public IP addresses and port numbers (assigned to the outbound traffic at the border of a network), and bandwidth. Assignment of the IP addresses and port numbers is relatively straightforward because it only involves one particular network, which has one pool of these types of resources. The major issues here include transaction control and prevention of deadlocks and authorization.

Bandwidth allocation across multiple domains imposes additional requirements because of the distributed nature of the problem. Some of these additional requirements include: 1) assignment of differentiated services (*diffserv*) code points, for indicating traffic priority; and 2) selection and assignment of multi-protocol label switching (MPLS) label-switched paths (LSPs). Second, the very decision of whether to *admit* a particular flow into the network is a matter of bandwidth management, too, because network congestion can negatively affect the performance of all ongoing flows, not just the newly created one. For this reason, we treated admission control separately in the previous section.

## **Deadlock prevention**

A simple example of a deadlock is when each of the two service processes competing for the same set of two resources (say an IP address and the last available amount of bandwidth). If one process issues the requests in the opposite order than the other one does and each process holds the resource already allocated, neither process will progress (and nor will any other process waiting for any of these processes). In general, deadlocks may occur because processes request resources held by other processes while holding their own resources.

There are three classes of strategies for dealing with the deadlocks:

1. Detection and recovery;

2. Avoidance (in real time); and
3. Prevention; and

Of these, in a general case, only prevention is practical, and it is achieved by denying at least one of the four necessary conditions for a deadlock: mutual exclusion, non-

5 preemption, indefinite waiting, and partial allocations (i.e., holding some resources while requesting others). In the case of RACF, mutual exclusion may not be pre-empted—in fact, it must be enforced in all cases. Denying partial allocation would inevitably degrade utilization of the resources. Thus a combination of a *collective-requests* method (where all the resources are requested in one initial reservation, and

10 no other reservation may be made until these resources are released) with limitation of waiting (which should be achieved by a careful choice of timer values) seems to be the only sensible strategy in most cases.

### **Bandwidth allocation**

15 Bandwidth reservations may be *explicit* or *implicit*. Explicit reservations typically rely on signaling protocols (such as Resource Reservation Protocol (RFC 2505) or Next Step in Signaling (NSIS) protocols RFC 4080) through which resources are reserved dynamically across network elements. In contrast, implicit resource reservations rely on stored information about available (provisioned or previously

20 reserved) fat pipes. In such cases the bandwidth manager keeps track of the used and available bandwidth through accounting (by keeping the state of the active sessions) or auditing the involved network elements.

We now examine the applicability of two implicit resource reservation approaches and their variants. It is interesting that even though the subject of explicit reservations appears, on the surface, to be much narrower than that of the implicit reservations, the protocol design problems in support of the former across multiple domains are about as complex as those in support of the latter. Consider the situation depicted in Figure

3. For making a bandwidth reservation in Domain X for a flow in its simplest form, one needs to specify

1. Bandwidth, and

5

2. Two points (represented by their IP addresses), of which the first point, a, identifies the ingress border gateway of the adjacent Domain Y, and the second point, b, identifies the egress border gateway of Domain Z.

10 Domain Y, upon receiving such request, has to find its own suitable egress border gateway on the way to Domain Z, as well as a suitable ingress border gateway in that Domain. The mechanisms for bandwidth-guaranteed ingress/egress router selection have been addressed in [RFC 3272] and Ho, K., N. Wang, P. Trimintzios and G. Pavlou, *Multi-objective Egress Router Selection Policies for Inter-domain Traffic with Bandwidth Guarantees*. Proceedings of the IFIP Networking Conference (Networking'2004), Athens, Greece, May 2004, the contents of each of which are incorporated by reference herein.

15

We now discuss the mechanism for the implicit reservations employing RACF. We consider two approaches. The first approach is fully distributed, and it requires significant amount of state to be kept in all the domains. The second approach results in a much simpler protocol, but most of the state is kept in one domain. (We propose that it be kept in the terminating domain, and we explain the reason.) In both cases, the implicit reservation and the release of the bandwidth are respectively accomplished with four messages: Reserve, Confirm, Reject, and Release.

25 Although in both cases that we consider the reservations are initiated only by the terminating RACF (i.e., RACF that belongs to the domain where the terminating party resides), both methods can be used for initiating reservations by the terminating

RACF or both the originating and terminating RACFs (a dual RACF approach) at the same time. Overall, the terminating RACF approach is highly desirable because the terminating party often knows the complete address and bandwidth information before the originating party does and therefore can start the reservation process 5 sooner, lowering signaling delay. The dual approach can further lower the call-set-up delay.

Note that for some intelligent-network-supported converged services, the originating party may be a network server that does not interact with RACF.

10 With regard to a dual approach, the following problems should additionally be considered:

1. Carrying dual reservations in a straight-forward, naïve, way may result in partial allocations; hence, a potential danger of a deadlock: One side might complete a reservation, while the other would fail;
- 15 2. It may also double the amount of state to be kept in the network.

One solution to both problems is to progress both reservations toward one another until they reach a common point in the network. We also note that we have intentionally simplified that model by assuming that the domains (of Figure 3) all 20 *trust* one another in that they know one another's RACF addresses. In practice, it is highly likely that many domains would not share such addresses with all other domains. In each such case, careful considerations must be made on *interworking* with other solutions.

### **Distributed approach**

25

In the general case, depicted in Figure 4, we consider reservations that span  $n$  domains,  $A_1$  to  $A_n$  in network 400. The RACF 402 in the first domain,  $A_1$ , when it receives the request from the terminating State Control Function SCF, first consults

its PDF 404 and obtains the authorization. Then it checks its TRCF's 406 Topology and Resource Allocation Database (TRAD) 408 to find a suitable network segment ( $a$ ,  $b$ ) to find that  $a$  is located in Domain  $A_2$ . RACF updates the TRAD (by, among other actions, decreasing the available bandwidth and linking it to the reservation) and 5 issues the *Reserve* request with the following parameters:

1. Request identification,  $C$ , which serves as reference to this particular reservation;
2. List of the domains on the way to the sink  $b$  (which initially contains only  $A_1$ );
3. Segment endpoints,  $a$  and  $b$ ;
4. Bandwidth  $B$ ; and
5. Set of policy requests (which may include traffic priority, set of domains to be avoided, etc.)

On receiving this reservation request, the RACF 410 in Domain  $A_2$

- 15 1. Examines its database, consults its own PDF 412 and TRAD 414, and ensures that there is a feasible path in which the next domain is not present in the domain list (thus avoiding cycles); and either
2. Rejects the request (by sending back a *Reject* message which specifies the cause of rejection—such as insufficient bandwidth or impossibility of meeting 20 the policy requirements contained in  $P$ ); or
3. Determines the appropriate egress and ingress points involved, updates TRAD, and propagates the *Reserve* request.

If any reservation is rejected, then it is passed back across all the domains involved in the reservation, so that each RACF can destroy the record of the reservation and 25 update its TRAD accordingly.

If all is well, the RACF 420 in Domain  $A_n$  completes the reservation. The confirmation (which may also contain certain information specific to the reservation) is sent back along the path .

5 While the pipe is being used, the RACF can determine that it might want to use another egress router. As long as no change of the ingress router is involved, it only needs to update its TRAD. In a more complex scenario, another set of domains will need to be traversed. Otherwise, it will need to re-send *Reserve* with the new segment parameter but with the same reservation id. With that, the bandwidth for the unused part of the will be released.

10 To support this approach, each RACF needs to keep full state information (including the list of all domains traversed by the path). When only a segment of the path is changed, Release needs to be propagated along the old segment after a new one has been established.

15 This, as well as the general case of releasing the resources make this approach somewhat complex (i.e., about as complex as BGP-TE). For the dual RACF reservations, both the terminating and originating RACFs would keep the state information.

### Terminating- and dual-RACF-control approaches

20 With the terminating RACF approach, depicted in Figure 5, the same path, (a, b), as before, which happens to span a set of  $n$  domains,  $A_1$  to  $A_n$ , is considered for network 500. As in the former case, the originating RACF 502 is initially unaware of all but the neighboring domain,  $A_2$ . The originating RACF 502 also follows the same initial steps as before, but the protocol is simpler. The *Reserve* request still contains the request identification,  $C$ ; segment endpoints,  $a$  and  $b$ ; bandwidth  $B$ ; and the set of policy requests (which may include traffic priority, set of domains to be avoided, etc.); One parameter omitted is the domain list, because the request is *not* going to be propagated.

Instead, on receiving this reservation request and finding that it can satisfy it the RACF 508 in Domain  $A_2$ , determines the appropriate egress and ingress nodes involved, updates TRAD 510, and responds with the *Confirm* message, whose parameter list now contains, in addition to the request identification,  $C$ , the address of 5 the egress router,  $a_1$  ; the next domain,  $A_3$  ; the address of the next domain's ingress router,  $a_2$  ; and additional information,  $\langle info \rangle$ . (This may contain, for example, RACFs *handle* to the reservation—to simplify future references.)

10 The terminating RACF uses these parameters to obtain the reservation for the next segment by sending the *Reserve* request to  $A_3$ , and so on. Thus only the terminating RACF keeps the state of the reservation. In the traversed domains, each RACF only needs to store the amount of bandwidth associated with the request  $C$  along with the address of the originating RACF. (Although the current embodiment suggests the desirability of keeping state at a terminating RACF, it would be understood that the present invention contemplates that the originating RACF may 15 also be chosen to keep state.)

If the RACF in any domain cannot allocate bandwidth, it sends back *Reject*; then the originating RACF can retry (by first releasing one or more previous reservations along the path and then attempting an alternative set of reservations) or release all reservations along the path.

20 The terminating approach requires as many messages as the distributed approach; however, it makes many tasks (including releasing the resources and path restoration) much simpler. Specifically, consider the case when a particular connection is lost (or a router is overloaded). Once TRCF receives this information, RACF can check TRAD and send a *Reject* message to the RACFs in all the affected 25 domains.

With the dual-RACF approach, the same procedure is started at both the originating and terminating RACFs, which work toward one another until they reach a *meet-me* point. This can significantly improve the call set-up time. (A distributed

approach to keeping state, as has been previously described, may also be utilized in the dual RACF approach.)

We finally note that all the above approaches can interwork with explicit reservations. In other words, they can be used even when one or more of the 5 intermediate domains does not have a provisioned pipe. In this case, a RACF can apply—as the originating host—RSVP or NSIS protocols at the domain's ingress router, and terminate it at an egress router, to establish (and maintain) such a pipe for the duration of the reservation. This hybrid approach may introduce timing problems, which must be carefully considered in the deployment.

10

The foregoing description merely illustrates the principles of the invention. It will thus be appreciated that those skilled in the art will be able to devise various arrangements, which, although not explicitly described or shown herein, embody the principles of the invention, and are included within its spirit and scope. Furthermore, 15 all examples and conditional language recited are principally intended expressly to be only for instructive purposes to aid the reader in understanding the principles of the invention and the concepts contributed by the inventor to furthering the art, and are to be construed as being without limitation to such specifically recited examples and conditions. Moreover, all statements herein reciting principles, aspects, and 20 embodiments of the invention, as well as specific examples thereof, are intended to encompass both structural and functional equivalents thereof. Additionally, it is intended that such equivalents include both currently known equivalents as well as equivalents developed in the future, i.e., any elements developed that perform the same function, regardless of structure.

25

In the claims hereof any element expressed as a means for performing a specified function is intended to encompass any way of performing that function including, for example, a) a combination of circuit elements which performs that function or b) software in any form, including, therefore, firmware, microcode or the like, combined with appropriate circuitry for executing that software to perform the

function. The invention as defined by such claims resides in the fact that the functionalities provided by the various recited means are combined and brought together in the manner which the claims call for. Applicant thus regards any means which can provide those functionalities as equivalent as those shown herein. Many 5 other modifications and applications of the principles of the invention will be apparent to those skilled in the art and are contemplated by the teachings herein. Accordingly, the scope of the invention is limited only by the claims.

What is claimed is:

1. A method for resource management in a communications network having multiple domains comprising the steps of:
  - 5 receiving a request for resources for a given reservation between an originating and a terminating point in said network;
  - processing said request for a given domain by a central controller for that domain to determine whether routes for said reservation are available and whether necessary bandwidth for said reservation is available;
  - 10 if said routes and bandwidth are available, confirming said reservation in said given domain and passing said reservation request to another central controller for a next domain having resources required to satisfy said reservation request.
- 15 2. The method of Claim 1, wherein a reservation request includes an identification for the request, originating and terminating endpoint for said reservation, required bandwidth and a set of policy request for said reservation.
- 20 3. The method of Claim 1, wherein each central controller in a path between said originating point and said terminating point of said reservation keeps state for said reservation request.

4. The method of Claim 1, wherein only one end central controller in a path between said originating point and said terminating point of said reservation keeps state for said reservation request.

5 5 The method of Claim 5, wherein each end central controller in a path between said originating point and said terminating point of said reservation keeps state for said reservation request, said reservation request converging toward a point between said originating and terminating point of said request, wherein state information of each central controller is then shared.

10

6. An apparatus for resource management in a communications network having multiple domains, said resource management being accomplished on a domain wide basis, said apparatus comprising:

15 a controller operable to receive a request for resources for a given reservation between an originating and a terminating point in said network; said controller being further operable for a given domain to determine whether routes for said reservation are available and whether necessary bandwidth for said reservation is available;

20 wherein, if said routes and bandwidth are available, said apparatus confirms said reservation in said given domain and passes said reservation request to another controller for a next domain having resources required to satisfy said reservation request.

7. The apparatus of Claim 6, wherein said controller is operable to process a reservation request that includes an identification for the request, originating and terminating endpoint for said reservation, required bandwidth and a set of policy request for said reservation.

8. The apparatus of Claim 6, wherein each central controller in a path between said originating point and said terminating point of said reservation keeps state for said reservation request.

10

9. The apparatus of Claim 6, wherein only one end central controller in a path between said originating point and said terminating point of said reservation keeps state for said reservation request.

15

10. The apparatus of Claim 9, wherein each end central controller in a path between said originating point and said terminating point of said reservation keeps state for said reservation request, said reservation request converging toward a point between said originating and terminating point of said request, wherein state information of each central controller is then shared.

20

1/5


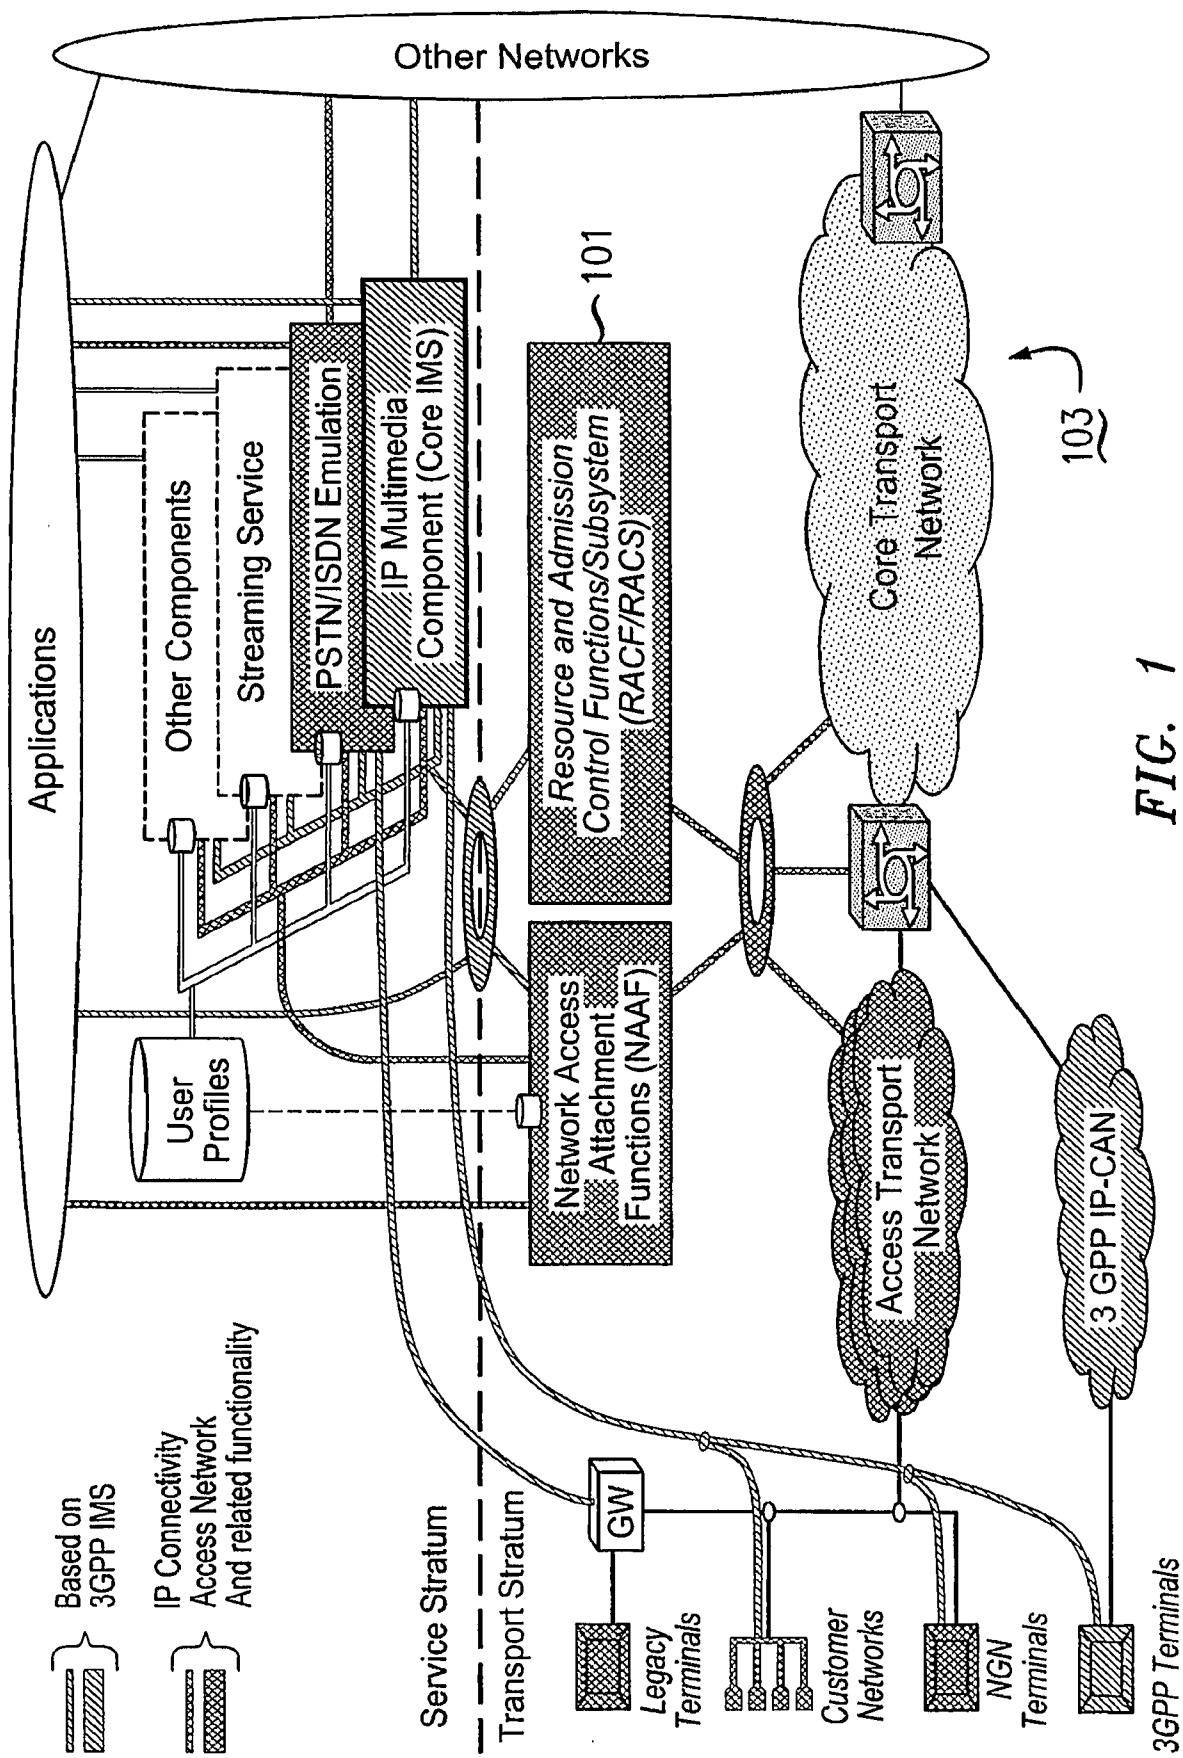


FIG. 1

Position of RACF and RACS in the NGN

2/5

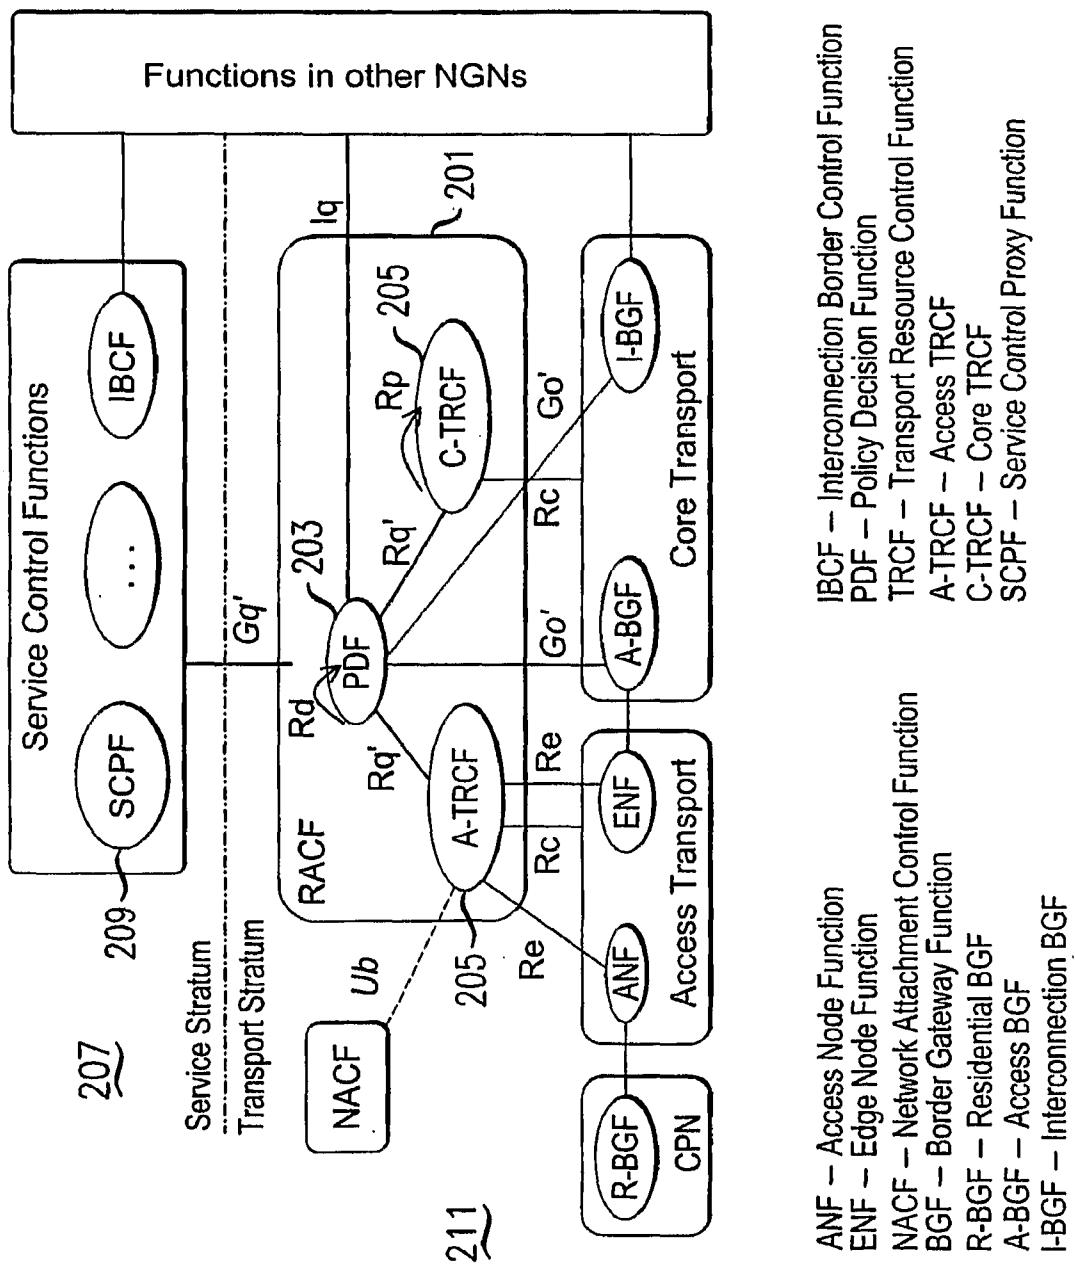


IBCF – Interconnection Border Control Function  
 PDF – Policy Decision Function  
 TRCF – Transport Resource Control Function  
 A-TRCF – Access TRCF  
 C-TRCF – Core TRCF  
 SCPF – Service Control Proxy Function

ANF – Access Node Function  
 ENF – Edge Node Function  
 NACF – Network Attachment Control Function  
 BGF – Border Gateway Function  
 R-BGF – Residential BGF  
 A-BGF – Access BGF  
 I-BGF – Interconnection BGF

FIG. 2

RACF Architecture

3/5

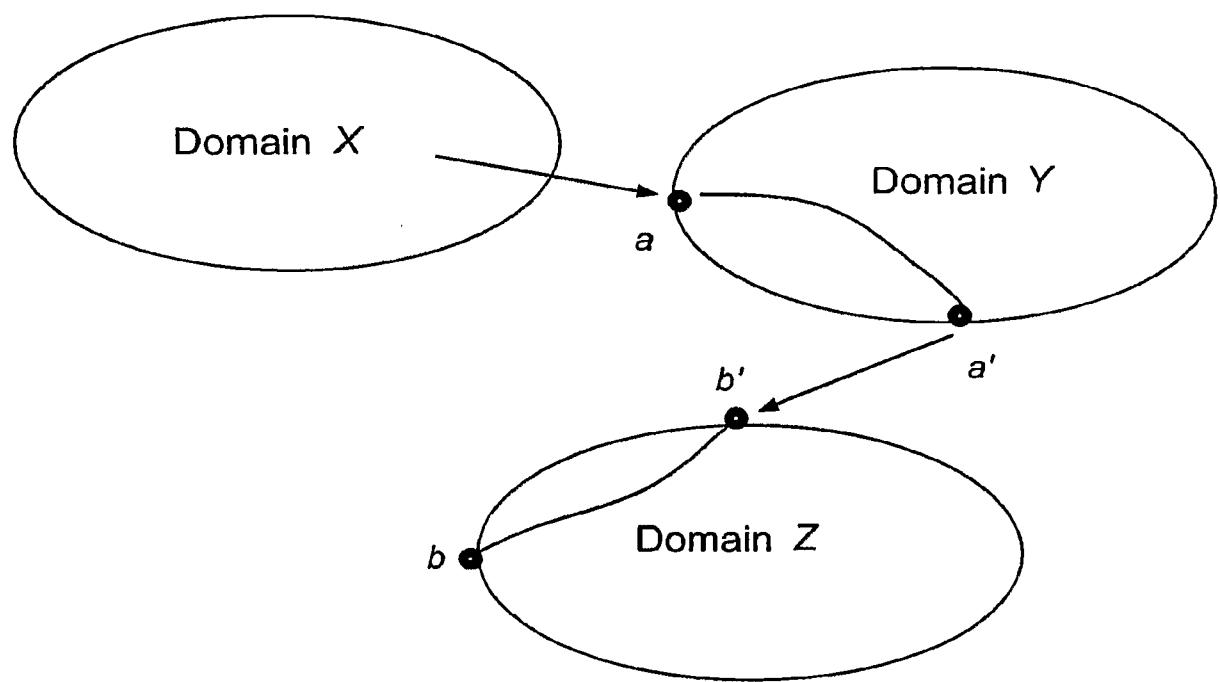

**FIG. 3**

4/5

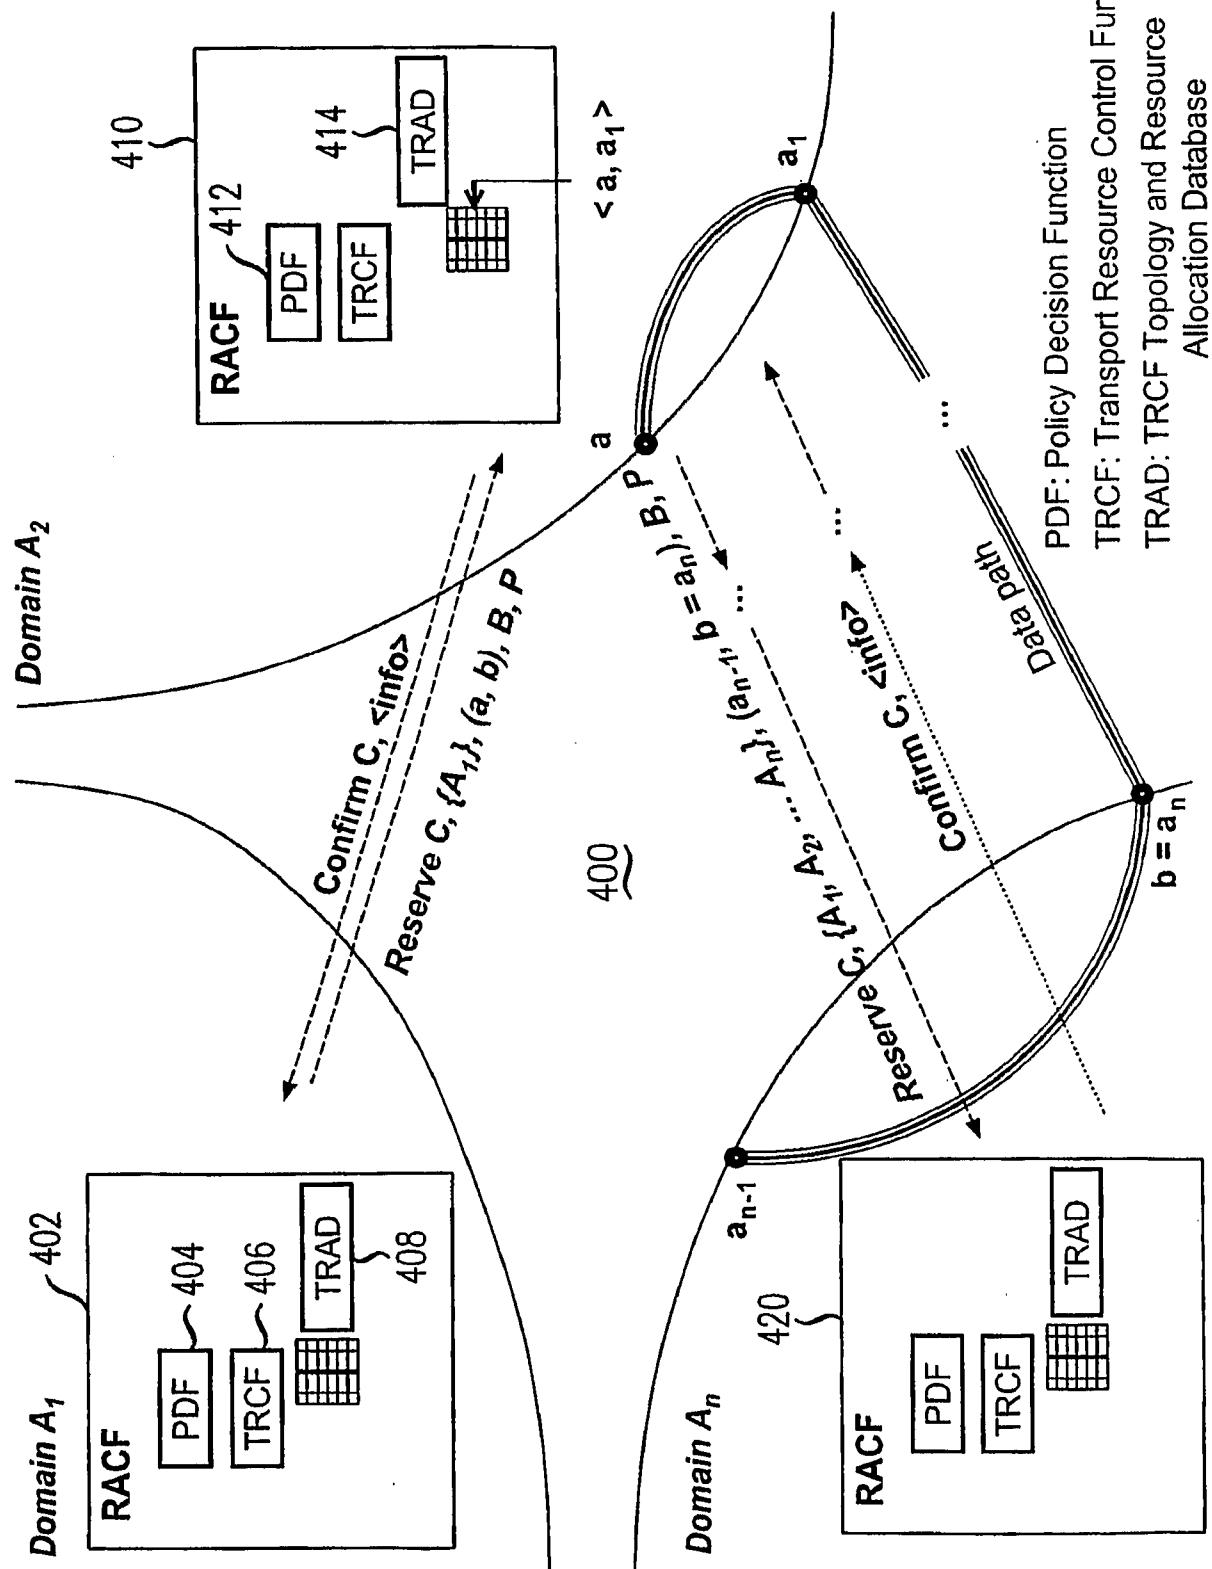


FIG. 4

5/5

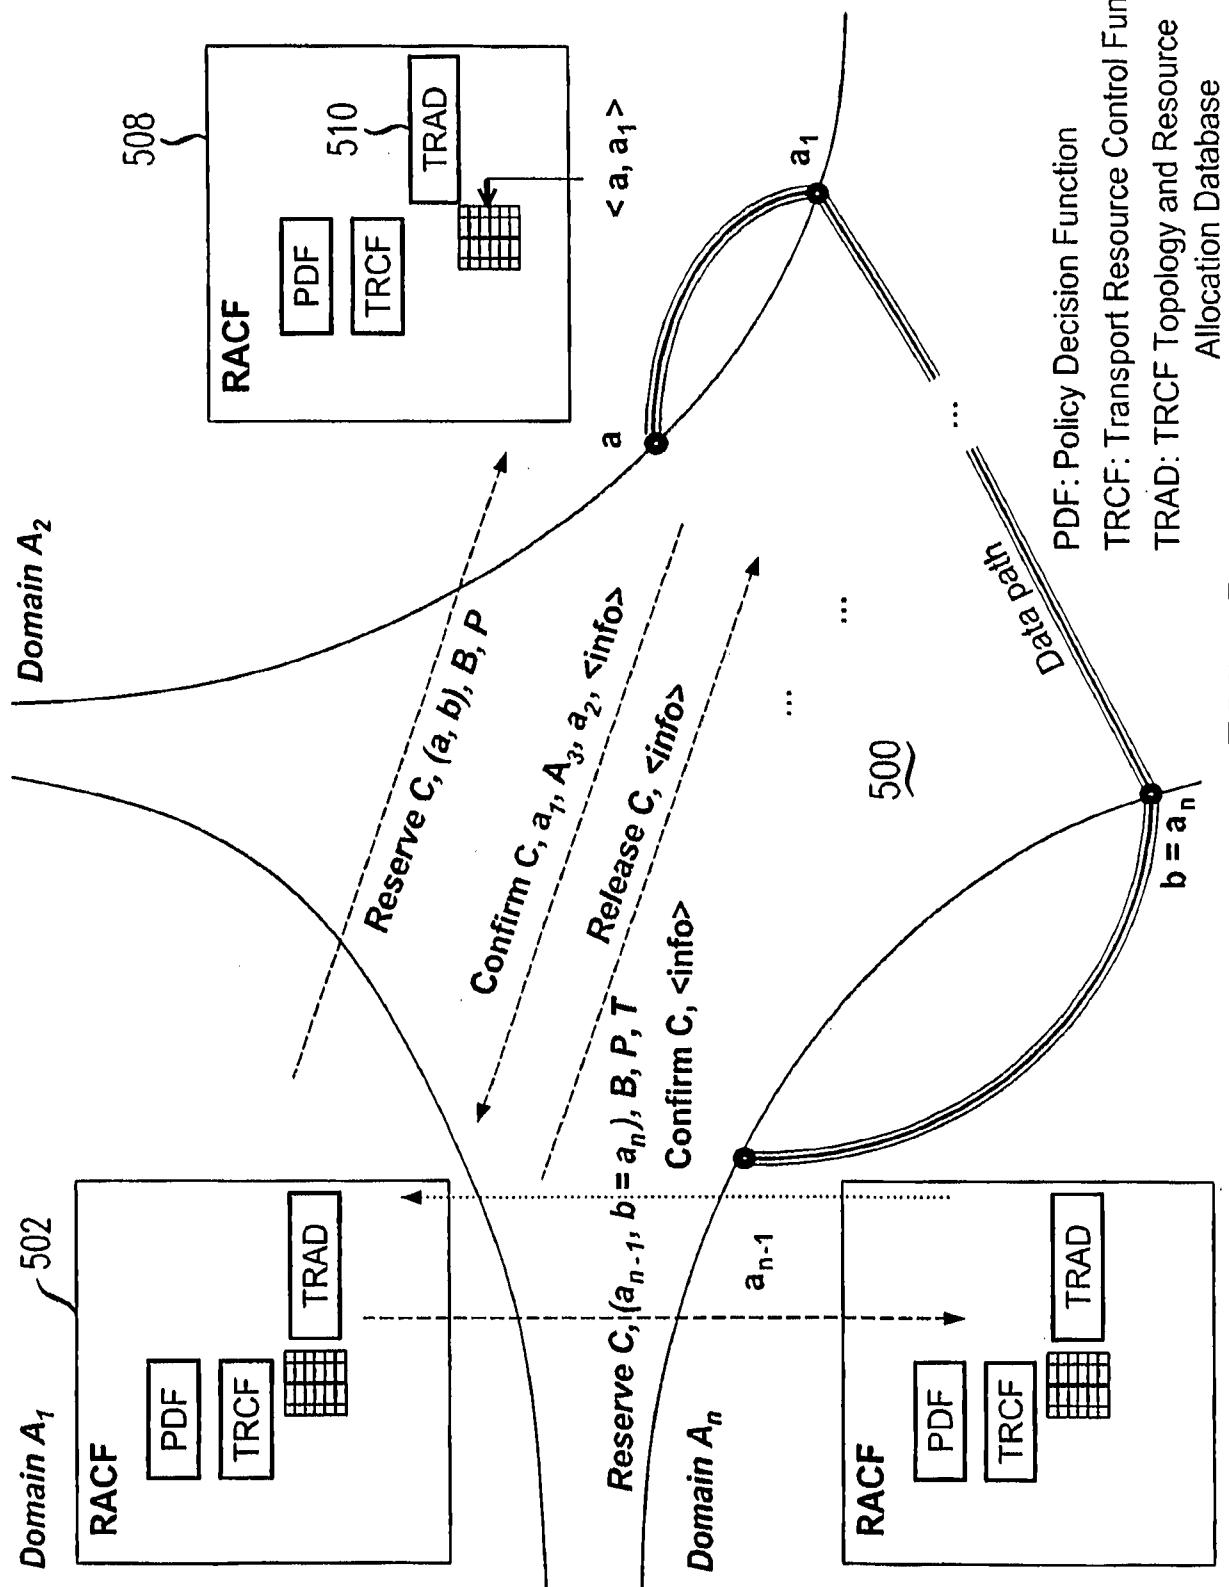


FIG. 5

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2007/003853

A. CLASSIFICATION OF SUBJECT MATTER  
INV. H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
**H04L**

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>TROMPARENT M -M: "Communication protocol for interdomain resource reservation"          SERVICE ASSURANCE WITH PARTIAL AND          INTERMITTENT RESOURCES. FIRST          INTERNATIONAL WORKSHOP, SAPIR 2004.          PROCEEDINGS (LECTURE NOTES IN COMPUT. SCI.          VOL.3126),          vol. 3126, 1 August 2004 (2004-08-01), - 6          August 2004 (2004-08-06) pages 255-266,          XP002437974          Berlin, Germany          abstract          page 255, line 1 - page 256, line 12          page 257, line 28 - line 40          page 264, line 14 - page 265, line 21;          figure 7</p>	1,6
A		2-5,7-10

**X** Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- A** document defining the general state of the art which is not considered to be of particular relevance
- E** earlier document but published on or after the international filing date
- L** document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- O** document referring to an oral disclosure, use, exhibition or other means
- P** document published prior to the international filing date but later than the priority date claimed

- T** later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- X** document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- Y** document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*** document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
18 June 2007	27/06/2007
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Lastoria, Gianluca

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2007/003853

## C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	BLESS R ET AL: "Quality-of-service signaling in wireless IP-based mobile networks" VEHICULAR TECHNOLOGY CONFERENCE, 2003. VTC 2003-FALL. 2003 IEEE 58TH ORLANDO, FL, USA 6-9 OCT. 2003, PISCATAWAY, NJ, USA, IEEE, US, 6 October 2003 (2003-10-06), pages 3527-3531, XP010702441 ISBN: 0-7803-7954-3 page 3528, left-hand column -----	1-10
A	EP 1 589 696 A1 (HUAWEI TECH CO LTD [CN]) 26 October 2005 (2005-10-26) column 17, line 8 - column 19, line 14; figures 4,5 column 19, line 31 - column 20, line 11; figure 6 -----	1-10

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No

PCT/US2007/003853

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
EP 1589696	A1 26-10-2005	AU	2003264320	A1	10-08-2004
		WO	2004064325	A1	29-07-2004
		CN	1518278	A	04-08-2004
		JP	2006513612	T	20-04-2006
		US	2006182119	A1	17-08-2006