

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number

WO 2018/222295 A1

(43) International Publication Date
06 December 2018 (06.12.2018)

(51) International Patent Classification:
A61B 5/00 (2006.01) *A61M 25/10* (2013.01)
A61B 5/03 (2006.01) *A61M 39/10* (2006.01)
A61B 5/20 (2006.01)

(21) International Application Number:
PCT/US2018/028687

(22) International Filing Date:
20 April 2018 (20.04.2018)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
 62/514,793 03 June 2017 (03.06.2017) US
 62/544,680 11 August 2017 (11.08.2017) US
 62/590,513 24 November 2017 (24.11.2017) US
 62/622,871 27 January 2018 (27.01.2018) US
 15/949,005 09 April 2018 (09.04.2018) US

(71) Applicant: SENTINEL MEDICAL TECHNOLOGIES, LLC [US/US]; 872 NE 35th Street, Boca Raton, FL 33431 (US).

(72) Inventors: MCKINNEY, Timothy; 872 NE 35th Street, Boca Raton, FL 33431 (US). LEVINE, Marc-Alan; 1294 St. Peters Road, Pottstown, PA 19465 (US).

(74) Agent: GERSHON, Neil, D.; 1011 High Ridge Road, Stamford, CT 06905 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: CATHETER FOR MONITORING INTRA-ABDOMINAL PRESSURE

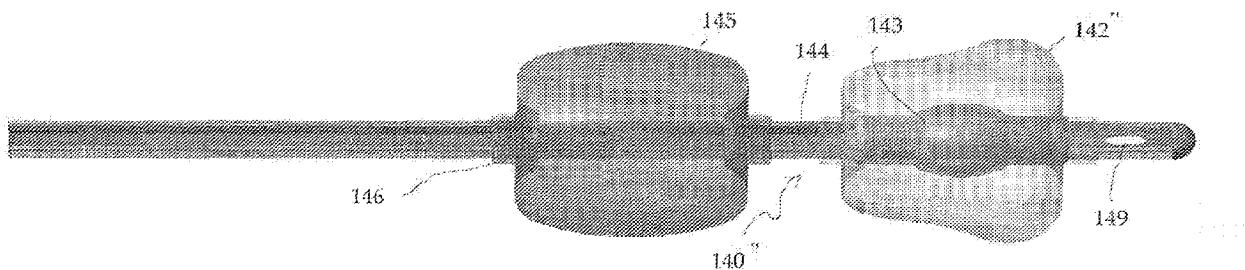


Figure 17A

(57) Abstract: A multi-lumen catheter for monitoring intra-abdominal pressure, the catheter including an expandable outer balloon and an expandable inner balloon positioned within the outer balloon. A first lumen communicates with the inner balloon and the outer balloon and first lumen are filled with gas to form a gas filled chamber to monitor pressure within the bladder to thereby monitor pressure within an abdomen of the patient. A second lumen communicates with the bladder to remove fluid from the bladder. The catheter is configured for attachment of an external pressure transducer communicating with the gas filled chamber for measuring bladder pressure based on gas compression caused by deformation of the expanded inner balloon deformed by the expanded outer balloon.



Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

CATHETER FOR MONITORING INTRA-ABDOMINAL PRESSURE

5 BACKGROUND OF THE INVENTION

This application claims the benefit of provisional application serial no. 62/514,793, filed June 3, 2017, provisional application serial no. 62/544,680, filed August 11, 2017, provision application serial no. 62/590,513, filed November 24, 2017, provisional application 62/622,871, filed January 27, 2018 and utility application serial no. 15/949,005, filed April 09, 2018. The entire contents of each of these applications are 10 incorporated herein by reference.

1. Field of the Invention

This application relates to a device and method for monitoring intra-abdominal pressure through the urinary bladder.

15 2. Background

Traditionally, physicians relied on visual cues or physical examination to detect increase in intra-abdominal pressure (IAP). More recently Dr. Kirkpatrick and colleagues, in an article “Is Clinical Examination an Accurate Indicator of Raised Intra-Abdominal Pressure in Critically Injured Patients,” CJS, June 2000, 43, No. 3, 207-211, showed that 20 IAP measured through the patient’s bladder was significantly more accurate than physical examination. That is, it was demonstrated that the clinical abdominal examination was insensitive and inaccurate when compared with urinary bladder pressure measurements.

Various tools for measuring IAP have been developed over the years. Many researchers have documented IAP measurements through almost every natural or manmade 25 orifice in the body. Earlier crude forms of measuring IAP used bladder catheters, nasogastric tubes, and rectal tubes attached to a manometer. The nasogastric or the rectal route was better suited in rare cases of bladder rupture or situations where bladder catheters were contraindicated. However, due to local interferences, the nasogastric and the rectal tube measurements were neither reproducible nor logical as were the bladder catheters.

Thus, measuring of IAP through the bladder became more suitable. In 1989 Iberti and colleagues in an article entitled, "Determination of Intra-abdominal Pressure Using a Transurethral Bladder Catheter: Clinical Validation of the Technique," *Anesthesiology*, January 1989, 70(1), 47-50, validated the correlation of IAP using a catheter inserted in the bladder. Their study was key in using bladder pressure as the gold standard for measuring IAP. In 1995, Kron and colleagues published a study in "The Measurement of Intra-Abdominal Pressure as a Criterion for Abdominal Re-exploration, 1984 Ann Surg., 199, 28-30, comparing catheters in various body locations for measuring IAP. They measured IAP from the stomach using a nasogastric tube, from the rectum using a modified rectal tube, from the bladder using a modified bladder catheter, and direct abdominal pressure using a laparoscopic insufflator needle. They found that the bladder catheter had the best measurement of IAP and that the gastric and the rectal catheter measurements were less reliable due to dependence on the position of the catheter. Thus, clinicians generally agreed that the urinary bladder is the best-suited location for measurement of IAP.

The need for measuring IAP has become more important as physicians increasingly realized that organ failure and death were directly related to increase in IAP in certain high-risk patients. High abdominal pressure has been found to cause a decrease in function of the intestines, liver and blood vessels resulting in adverse consequences for the patients. Consequently, accurate measurement of IAP can help decrease patient morbidity and mortality. It has also been more recently discovered that pediatric and neonate population may also have need for IAP measurement to determine specific conditions.

Currently, there are few products available on the market to measure the IAP through the bladder. One device, the Bard IAP device, has a "valve clamp" which diverts urine from the main catheter drainage channel to measure IAP via converting hydrostatic pressure to a readable pressure gauge. This mechanism of IAP measurements is archaic and does not provide continuous pressure measurement when used with the standard 2-channel bladder drainage catheter. Two other manufacturers, Holtech and Convatec, also use a column of urine by connecting their kit to an existing bladder catheter. Their systems are cumbersome and the IAP readings are also not continuous. Biometrix has developed an

IAP monitoring device which like other manufacturers relies on tapping into the main bladder drainage catheter, using a valve to measure the hydrostatic pressure. In 2008 Sugrue and colleagues, in an article "Prospective Study of Intra-Abdominal Hypertension and Renal Function after Laparotomy, British Journal of Surgery, 1999, 82, 235-238, 5 suggested the use of 3-channel bladder drainage catheter so that the smaller channel, which was used for bladder irrigation, could be used to attach a pressure-monitoring device. The use of an extra channel made it possible to have continuous bladder drainage while measuring the bladder pressure. However, this bladder catheter did not provide a continuous pressure read because intermittently the operator needed to add 50ml of water 10 or saline to the bladder to record the IAP pressure. Thus, the pressure reading at best was intermittent since pressure readings were not performed when fluid was being added to the bladder. Consequently, although this was a step toward increasing the amount of pressure readings/recordings, it still was unable to conduct continuous pressure monitoring. Furthermore, it was still the same cumbersome IAP device set up which required a skilled 15 person to add water before each IAP reading. Control of the amount of water added is critical since adding too much water to the bladder can falsely increase the pressure readings and also increase infection risk, thus further complicating the use.

It has also been recognized that most patients that have a need for measurement of IAP also need to have continuous drainage of the urinary bladder and thus devices need to 20 account for this process.

Consequently, current devices placed in the bladder for measuring pressure require a continuous water column to maintain pressure readings. Thus, they fail to measure IAP continuously but only measure pressure intermittently. They also all rely on tapping into an existing bladder drainage catheter, which adds complications. Furthermore, they do not 25 reduce the complexity of the procedure since they require constant retrograde insertion of a relatively large amount of fluid into the bladder, e.g., 50cc, which increases the ICU workload. Still further, these devices increase the risk of complications and infections associated with fluid injection into the bladder. Fluid injection is also complicated since it needs to be closely monitored since too much fluid in the bladder can give false elevation

of IAP readings, causing clinicians to take unnecessary steps in response to what is mistakenly believed is excess IAP.

It would therefore be advantageous to provide a device insertable into the bladder that accurately measures abdominal pressure without requiring adding water to the bladder 5 to obtain such pressure readings. Such device would advantageously avoid the complications and risks associated with such fluid insertion. Furthermore, it would be advantageous if such device could continuously measure bladder pressure without interruption. This would advantageously enable a constant monitoring of IAP so critical time periods are not missed. It would further be advantageous to provide a device that 10 improves the accuracy of the pressure reading in the bladder to more accurately determine IAP so necessary steps can be taken to address IAP only when warranted. Still further, it would be advantageous if such device could satisfy the foregoing needs and provide these enumerated advantages while being simple to use so that so that any of clinical staff with basic knowledge of bladder catheter insertion will be able to insert the device without 15 relying on specially trained staff members.

SUMMARY

The present invention overcomes the deficiencies and disadvantages of the prior art. The present invention advantageously provides a multi-lumen catheter insertable into the bladder in the same manner as a regular bladder drainage catheter to determine intra- 20 abdominal pressure without requiring insertion of water into the bladder. The catheters of the present invention utilize a gas-charged chamber to measure bladder pressure across a large surface area, and thus, accurately determine intra-abdominal pressure, and enable pressure to be measured continuously without interrupting urine flow and without interruptions to add water to the bladder.

25 Some embodiments of the catheter of the present invention utilize a stabilizing balloon to help retain the catheter in the bladder during the procedure.

In accordance with one aspect of the present invention, a multi-lumen catheter for monitoring pressure in a patient is provided comprising an expandable outer balloon at a distal portion of the catheter. An expandable inner balloon is positioned within the outer

balloon. A first lumen communicates with the inner balloon and the inner balloon and first lumen form a gas filled chamber to monitor pressure within the bladder. The outer balloon has a circumferential area greater than a circumferential area of the inner balloon, wherein in response to pressure within the bladder exerted on the first outer wall of the expanded 5 outer balloon, the outer balloon deforms and exerts a pressure on the second outer wall of the expanded inner balloon to deform the inner balloon and compress the gas within the inner balloon and the first lumen to provide a finer measurement. A second lumen communicates with the bladder to remove fluid from the bladder. A pressure transducer communicates with the gas filled chamber for measuring bladder pressure based on gas 10 compression caused by deformation of the expanded inner balloon deformed by the expanded outer balloon.

In some embodiments, the gas filled chamber monitors pressure within the bladder to thereby monitor pressure within an abdomen of the patient.

In some embodiments, the pressure transducer measures average pressure 15 continuously throughout insertion of the catheter within the urethra without requiring infusion of water into the bladder.

In some embodiments, the pressure transducer is an external transducer connectable to the catheter. In some embodiments, the pressure transducer is contained within a hub and the hub includes an elongated member extending distally therefrom, and connection of 20 the pressure transducer to a first port of the catheter automatically inserts the elongated member into the first lumen to advance gas into the inner balloon to expand the inner balloon. In some embodiments, the first lumen is not vented to atmosphere when the pressure transducer is connected to the catheter and advances gas to expand the inner balloon.

25 In some embodiments, the gas within the inner balloon and/lumen is air to provide an air filled chamber.

In some embodiments, the second lumen has a side opening distal of the inner and outer balloons; in other embodiments the side opening is proximal of the inner and outer balloons. The catheter can include a third lumen communicating with the outer balloon to

expand the outer balloon. In some embodiments, the hub includes a second elongated member insertable into the third lumen to automatically advance gas into the outer balloon to expand the outer balloon when the hub is connected to the catheter. In some embodiments, the outer balloon is in communication with the first lumen and gas advanced 5 through the first lumen also expands the outer balloon.

In some embodiments, the catheter has a fourth lumen and a temperature sensor positioned within the fourth lumen to measure core body temperature. A wire can extend from the temperature sensor through the fourth lumen and external of the catheter into the hub connected to the catheter. The hub can have a first opening to receive a connector of 10 the wire to automatically connect the temperature sensor to a cable extendable from the hub and connectable to an external temperature monitor.

In some embodiments, connection of the pressure transducer to the catheter a) automatically connects the temperature sensor to a temperature monitor cable; and b) automatically advances air through the first lumen to expand the inner balloon.

15 In some embodiments, the catheter includes a stabilizing balloon proximal of the outer balloon for stabilizing the catheter, and the catheter includes a fifth lumen communicating with the stabilizing balloon to expand the stabilizing balloon.

In some embodiments, the outer balloon has a circumference engageable with a 20 wall of the bladder at multiple contact regions to provide multiple reference points for calculation of an average pressure of the bladder wall. In some embodiments, the outer balloon has a distal region having a larger transverse cross-section than a proximal region.

In accordance with another aspect of the present invention, a multi-lumen catheter for monitoring intra-abdominal pressure is provided comprising a distal balloon at a distal portion of the catheter and a first lumen communicating with the distal balloon. The distal 25 balloon and first lumen form a gas filled chamber to monitor pressure within the bladder to thereby monitor pressure within an abdomen of the patient, wherein in response to pressure within the bladder the distal balloon deforms to compress the gas within the distal balloon. The first lumen has a first proximal port communicating with the first lumen. A second lumen communicates with the bladder to remove fluid from the bladder and a temperature

sensor is positioned in a third lumen of the catheter and has a wire extending through the third lumen. A hub is connectable to the first port of the catheter and includes a pressure transducer for measuring pressure based on gas compression within the first lumen, wherein connection of the hub to the first port automatically connects the wire to an 5 electrical connector in the hub for connection to a temperature monitor.

In some embodiments, connection of the hub to the first port automatically advances gas into the distal balloon to expand the distal balloon, the first lumen remaining sealed to outside air during expansion of the distal balloon. The hub can include an elongated member extending distally therefrom and insertable into the first lumen to 10 advance gas into the distal balloon upon connection of the hub to the first port. The hub can include a shroud over the elongated member and the shroud in some embodiments, snap fits over the first port. In some embodiments, the first port has a valve and the elongated member is insertable through the valve when the hub is connected to the catheter. The catheter in some embodiments includes a stabilizing balloon positioned 15 proximal of the distal balloon for stabilizing the catheter.

In accordance with another aspect of the present invention, a multi-lumen catheter for monitoring intra-abdominal pressure is provided comprising a distal balloon at a distal portion of the catheter and a first lumen communicating with the distal balloon. The distal balloon and first lumen form a gas filled chamber to monitor pressure within the bladder to 20 thereby monitor pressure within an abdomen of the patient, wherein in response to pressure within the bladder the distal balloon deforms to compress the gas within the distal balloon. The first lumen has a first proximal port communicating with the first lumen. A second lumen communicates with the bladder to remove fluid from the bladder. A hub is connectable to the first port of the catheter, the hub including a pressure transducer for 25 measuring pressure based on gas compression with the first lumen. An elongated member extends distally from the hub, wherein connection of the hub to the first port automatically inserts the elongated member into the first lumen to advance gas through the first lumen to expand the distal balloon, the first lumen not vented to atmosphere when the hub is connected to the first port.

In some embodiments, a shroud is positioned over the elongated member and the shroud can be snap fit over the first port or attached in other ways. In some embodiments, the first port has a valve and the elongated member is insertable through the valve when the hub is connected to the catheter. The catheter can include a stabilizing balloon proximal of the distal balloon for stabilizing the catheter.

5 In accordance with another aspect of the present invention, a method for measuring intra-abdominal pressure is provided comprising the steps of:

providing a catheter having first and second lumens, an expandable first balloon and a temperature sensor;

10 inserting the catheter through the urethra into a bladder of a patient;

connecting a hub containing a pressure transducer to the first lumen to automatically advance air through the first lumen of the catheter to expand the first balloon from a deflated condition to a more expanded condition and to automatically connect the temperature sensor to a connector within the hub;

15 obtaining a first pressure reading of the bladder based on deformation of the balloon without injecting fluid into the bladder;

transmitting the first pressure reading to an external monitor connected to the hub;

obtaining a second pressure reading of the bladder based on deformation of the balloon without injecting fluid into the bladder;

20 transmitting the second pressure reading to the external monitor connected to the hub; and

obtaining consecutive continuous pressure readings of the bladder without injecting fluid into the bladder.

The method can further include the step of draining the bladder through the second 25 lumen of the catheter. In some embodiments, the step of obtaining pressure readings obtains average pressure.

In some embodiments, the catheter includes an outer balloon positioned over the first balloon and the outer balloon is expandable through a separate lumen of the catheter and deformable based on bladder pressure to deform the first balloon to provide finer

measurements of bladder pressure. In some embodiments, the step of connecting a pressure transducer advances an elongated member extending from the hub into the first lumen to advance air into the first balloon. In some embodiments, the temperature sensor is positioned in a lumen of the catheter independent of the first lumen.

5 In accordance with another aspect of the present invention, a multi-lumen catheter for monitoring intra-abdominal pressure is provided. The catheter includes an elongated body configured and dimensioned for insertion into a bladder of a patient, a first lumen, a second lumen, and a first balloon at a distal portion. The first lumen communicates with the first balloon and the second lumen communicates with the bladder to remove fluid 10 from the bladder. The first balloon is filled with a gas to form along with the first lumen a gas filled chamber to monitor pressure within the bladder to thereby monitor pressure within an abdomen of the patient. A sensor is positioned at the distal portion of the catheter to measure pressure about a circumferential area of the balloon.

15 In accordance with another aspect of the present invention, a multi-lumen catheter is provided for monitoring intra-abdominal pressure, the catheter comprising an elongated body configured and dimensioned for insertion into the bladder of a patient, a first lumen, a second lumen, and a first balloon at a distal portion. The first lumen communicates with the first balloon and the second lumen communicates with the bladder to remove fluid from the bladder. The first balloon is filled with a gas to form a gas filled chamber to 20 monitor pressure within the bladder to thereby monitor pressure within an abdomen of the patient. A pressure sensor is positioned at the distal portion of the catheter for continuously measuring pressure of the bladder to provide continuous readings of bladder pressure.

25 In accordance with another aspect of the present invention, a multi-lumen catheter for monitoring intra-abdominal pressure is provided. The catheter includes an elongated body configured and dimensioned for insertion into a bladder of a patient, a first lumen, a second lumen, a third lumen, a first balloon at a distal portion and a second balloon proximal of the first balloon. The first lumen communicates with the first balloon, the second lumen communicates with the bladder to remove fluid from the bladder, and the third lumen communicates with the second balloon to inflate the second balloon to

stabilize the catheter. The first balloon is filled with a gas to form a gas filled chamber to monitor pressure within the bladder to thereby monitor pressure within an abdomen of the patient. A sensor measures pressure within the bladder as the first balloon changes shape in response to changes in pressure in the bladder.

5 In accordance with another aspect of the present invention, a multi-lumen catheter is provided for monitoring intra-abdominal pressure, the catheter comprising an elongated body configured and dimensioned for insertion into a bladder of a patient, a first lumen, a second lumen, and a first balloon at a distal portion. The first lumen communicates with the first balloon and the second lumen communicates with the bladder to remove fluid from the bladder, the first balloon filled with a gas to form a gas filled chamber to monitor pressure within the bladder to thereby monitor pressure within an abdomen of the patient. A pressure sensor measures pressure of the bladder and the first lumen extends distally of the first balloon.

10

In accordance with another aspect of the present invention, a multi-lumen catheter 15 for monitoring intra-abdominal pressure is provided comprising an elongated body configured and dimensioned for insertion into a bladder of a patient, a first lumen, a second lumen and a first balloon at a distal portion. A first side port communicates with the first lumen and the first lumen communicates with the first balloon. The second lumen communicates with the bladder to remove fluid from the bladder. The first balloon is filled 20 with a gas to form a gas filled chamber to monitor pressure within the bladder to thereby monitor pressure within the abdomen. A pressure sensor measures pressure of the bladder and is positioned distal of the first side port for measuring pressure within the bladder resulting in a change of shape of the first balloon in response to changes in pressure in the bladder.

25 In accordance with another aspect of the present invention, a multi-lumen catheter for monitoring intra-abdominal pressure is provided. The catheter includes an elongated body configured and dimensioned for insertion into a bladder of a patient, a first lumen, a second lumen, and a third lumen, the lumens being independent. A first balloon is positioned at a distal portion and the first lumen communicates with the first balloon. The

second lumen communicates with the bladder to remove fluid from the bladder. The first balloon and first lumen are filled with a gas to form a gas filled fully closed chamber to monitor pressure within the bladder to thereby monitor pressure within an abdomen of the patient. A pressure sensor measures pressure within the bladder based on deformation of
5 the first balloon in response to pressure within the bladder exerted on an outer wall of the balloon, the pressure sensor measuring bladder pressure continuously and communicating with an external monitor to visually display pressure readings, the sensor providing continuous pressure measurements throughout its duration of insertion without requiring infusion of water into the bladder.

10 In accordance with another aspect of the present invention, a multi-lumen catheter for monitoring intra-abdominal pressure is provided. The catheter includes an elongated body configured and dimensioned for insertion into a bladder of a patient, a first lumen, a second lumen, an outer balloon at a distal portion and an inner balloon within the outer balloon. The first lumen communicates with the inner balloon and the second lumen
15 communicates with the bladder to remove fluid from the bladder. The inner balloon and first lumen are filled with a gas to form a gas filled chamber to monitor pressure within the bladder to thereby monitor pressure within an abdomen of the patient. The outer balloon has a circumferential area greater than a circumferential area of the inner balloon and inflated with a fluid (liquid or a gas, e.g., air) wherein in response to pressure within the
20 bladder exerted on an outer wall of the outer balloon, the outer balloon deforms and exerts a pressure on an outer wall of the inner balloon to deform the inner balloon and compress the gas, e.g., air, within the inner balloon and the first lumen. The pressure sensor measures bladder pressure based on gas compression caused by deformation of the inner balloon. As noted herein, the balloon(s) can be expanded by a gas such as air.

25 In accordance with another aspect of the present invention, a system for monitoring intra-abdominal pressure is provided comprising a catheter having an elongated body configured and dimensioned for insertion into the bladder of a patient, a first lumen, a second lumen, a third lumen, and a first balloon at a distal portion. The first lumen communicates with the first balloon and the second lumen communicates with the bladder

to remove fluid from the bladder. The first balloon and first lumen are filled with a gas to form a gas filled fully closed chamber to monitor pressure within the bladder to thereby monitor pressure within an abdomen of the patient. A pressure sensor measures bladder pressure continuously and communicates with an external monitor to visually display 5 pressure readings, the sensor providing continuous pressure measurements during its insertion without requiring infusion of water into the bladder. An indicator indicates if the measured pressure exceeds a threshold value.

The indicator can be a visual and/or audible indicator.

In accordance with another aspect, the present invention provides a method for 10 measuring intra abdominal pressure comprising the steps of a) providing a catheter having first and second lumens and a balloon; b) inserting the catheter into a bladder of a patient; c) injecting gas into the first lumen of the catheter to expand the balloon from a deflated condition to a partially inflated condition; d) obtaining a first pressure reading of the bladder based on deformation of the balloon without injecting fluid into the bladder; e) 15 transmitting the first pressure reading to an external monitor connected to the catheter; f) obtaining a second pressure reading of the bladder based on deformation of the balloon without injecting fluid into the bladder; g) transmitting the second pressure reading to the external monitor connected to the catheter; and h) obtaining consecutive continuous pressure readings of the bladder without injecting fluid into the bladder.

20 The method can include measuring the temperature of a body of a patient utilizing a temperature sensor within the first lumen.

BRIEF DESCRIPTION OF THE DRAWINGS

So that those having ordinary skill in the art to which the subject invention appertains will more readily understand how to make and use the surgical apparatus 25 disclosed herein, preferred embodiments thereof will be described in detail hereinbelow with reference to the drawings, wherein:

Figure 1A is a side view of a first embodiment of the catheter of the present invention having a pressure balloon, a stabilizing balloon and a sensor positioned in the air lumen, both balloons shown in the deflated (collapsed) condition;

Figure 1B is a side view similar to Fig. 1A showing the two balloons in the inflated (expanded) condition;

Figure 2 is a schematic view of the system utilizing the catheter of Figure 1A with an alarm system;

5 Figure 3 is a close-up view of the tip of the catheter of Figure 1A;

Figure 4 is a close-up view of the sensor of Figure 1A within the air lumen;

Figure 5 is an enlarged transverse cross-sectional view of the catheter of Figure 1;

Figure 6 is an enlarged transverse cross-sectional view of an alternate embodiment of a catheter of the present invention having four lumens;

10 Figure 7 is a side view of an alternate embodiment of the catheter of the present invention similar to Figure 1A except having a single balloon, the balloon shown in the inflated condition,

15 Figures 8A and 8B are side views of an alternate embodiment of the catheter of the present invention having two balloons and a pressure sensor and a separate temperature sensor in the air lumen, the two balloons shown in the deflated condition, with Figure 8A showing the distal end and Figure 8B showing the proximal end of the catheter;

Figure 9 is a side view similar to Fig. 8A showing the two balloons in the inflated condition;

Figure 10A is a close up view of the distal portion of the catheter of Figure 8A;

20 Figure 10B is an enlarged transverse cross-sectional view of the catheter of Figure 8A;

Figure 11 is a side view of another alternate embodiment of the catheter of the present invention having two balloons, a sensor in the air lumen and an external transducer, the two balloons shown in the inflated condition;

25 Figure 12 is a side view of another alternate embodiment of the catheter of the present invention having two balloons, a temperature sensor in the air lumen and the pressure sensor external of the catheter, the two balloons shown in the inflated condition;

Figure 13A is a side view of another alternate embodiment of the catheter of the present invention having two balloons and a pressure sensor positioned within the pressure balloon, the two balloons shown in the inflated condition;

5 Figure 13B is an enlarged view of the distal portion of the catheter of Figure 13A;

Figure 14A is a side view of another alternate embodiment of the catheter of the present invention having dual pressure sensors, the first sensor positioned within the air lumen and the second sensor positioned external of the catheter, the two balloons shown in the inflated condition;

Figure 14B is an enlarged view of the distal portion of the catheter of Figure 14A;

10 Figure 15 is a side view of another alternate embodiment of the catheter of the present invention having an outer and inner pressure balloon and a stabilizing balloon, the balloons shown in the inflated condition;

Figure 16 is a side view similar to Figure 15 illustrating an alternate embodiment having a larger outer balloon;

15 Figure 17A is a side view similar to Figure 15 illustrating an alternate embodiment having a pear-shaped outer balloon;

Figure 17B is a side view similar to Figure 17A showing an alternate embodiment wherein the drainage opening is between the two balloons;

20 Figure 18A is a side view of another alternate embodiment of the catheter of the present invention having a port for connection to an external pressure transducer and an outer and inner pressure balloon, the two balloons shown in the inflated condition;

Figure 18B is close up view of the distal end of the catheter of Figure 18A;

Figure 19 is a perspective view of the catheter of Figure 18A with a pressure transducer hub attached to the catheter;

25 Figures 20A, 20B and 20C are enlarged front, side and perspective views of the outer balloon of Figure 18A in the expanded condition;

Figures 21A, 21B and 21C are enlarged front, side and perspective views of the stabilizing balloon of Figure 18A in the expanded condition;

Figures 22A, 22B and 2C are enlarged front, side and perspective views of the inner balloon of Figure 18A in the expanded condition;

Figure 23 is a transverse cross-sectional view of the catheter of Figure 18 illustrating the five lumens of the catheter;

5 Figure 24A is a cutaway side view showing the pressure transducer hub prior to connection to the catheter of Figure 18A, a portion of the hub wall and catheter connector removed to show internal components;

Figure 24B is a side view similar to Figure 24A showing the hub attached to the catheter;

10 Figure 25A is a perspective view of the transducer hub of Figure 24A;

Figure 25B is a perspective view of the proximal end of the catheter showing a connector for the thermocouple wire;

Figure 26 is a side view of alternate embodiment of the pressure transducer hub having a shroud over the elongated member for snap fitting onto the catheter;

15 Figure 27 is a schematic view of an alternate embodiment of the pressure transducer hub extendable into two side ports of the catheter;

Figure 28A is a perspective view of an alternate embodiment of the transducer hub and connector;

20 Figure 28B is a cutaway side view of the hub and connector of Figure 28A showing the pressure transducer prior to connection to the catheter of Figure 18A, a portion of the hub wall and connector removed to show internal components;

Figure 28C is a cutaway side view similar to Figure 28B showing the hub attached to the catheter;

Figure 28D is a cutaway side view similar to Figure 28B from the other side;

25 Figure 29A is a cutaway side view of the hub and connector of an alternate embodiment showing the pressure transducer prior to connection to the catheter of Figure 18A, a portion of the hub wall and catheter connector removed to show internal components

Figure 29B is a cutaway side view of the hub and connector of Figure 29A; and

Figure 29C is a cutaway view similar to Figure 29B showing the hub attached to the connector of Figure 29A when attached.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Increased abdominal pressure can cause many adverse conditions including 5 diminishing the function of the intestines, liver, and blood vessels. Simply viewing or feeling the abdomen does not provide sufficient information or reading of health conditions.

It is recognized that urinary bladder pressure directly correlates to the intra-abdominal pressure. Although pressure readings can be determined by access to the 10 esophagus or rectum, the bladder has been found to be the most accurate and the least invasive. In trauma or burn patients for example, time is critical and the less complicated the method for determining bladder pressure the better the clinical results.

The catheters of the present invention measure abdominal pressure via measurement of bladder pressure without filling the bladder with water. This avoids the 15 risks associated with retrograde filling of the bladder with water as such retrograde filling not only increases the complications and workload for the intensive care (IC) staff and can create inaccuracies by providing false elevation of IAP readings, but can adversely affect the patient by increasing the risk of infection. Furthermore, by avoiding refilling of the bladder, bladder pressure can be measured continuously. This is because in devices 20 requiring filling the bladder with water, water needs to be periodically added to the bladder to replace the water drained from the bladder and measurement readings are interrupted during water insertion. Due to these repeated interruptions, pressure cannot be read continuously. Note in some cases, as much as 50cc of fluid needs to be repeatedly added to the bladder.

25 Thus, the catheters of the present invention efficiently and effectively measure bladder pressure without requiring filling the bladder with water. Also, as will become apparent from the discussion below, the catheters of the present invention provide a more accurate reading of pressure and enable continuous monitoring of the bladder pressure. This is all achieved in an easy to insert device.

It should be noted that the catheters of the present invention can be utilized for measuring other pressure in a patient and are not limited to intra-abdominal pressure.

Furthermore, in some embodiments, the catheter of the pressure invention provides a dual sensor to provide a backup pressure reading. In some embodiments, a dual pressure 5 balloon arrangement is provided. This various embodiments are discussed in more detail below.

Referring now to the drawings and particular embodiments of the present invention wherein like reference numerals identify similar structural features of the devices disclosed herein, there is illustrated in Figures 1A-5 a catheter of a first embodiment of the present 10 invention. The catheter (device) is designated generally by reference numeral 10 and is configured for insertion into and positioning within the bladder of the patient for measuring intra-abdominal pressure. This measurement is to check if the intra-abdominal pressure exceeds a specified threshold since if such threshold is exceeded, there is a risk to the patient as discussed above and steps need to be taken to reduce the pressure such as 15 draining additional fluid from the abdomen, opening the abdomen, etc.

The catheter 10 of the present invention can in some embodiments include an alarm or indicator to alert the user if pressure within the bladder, which correlates to pressure within the abdomen, rises to an unacceptable level, i.e., beyond a threshold or predetermined value (pressure). The indicator or alarm can be on the catheter or 20 alternatively on an external device such as the monitor as discussed in more detail below. The alarm can also be connected via wireless connection to a phone or remote device to alert the appropriate personnel. The indicator or alarm can alternatively or in addition be activated if a change in pressure measurement exceeds a specified rate over a specified period of time.

25 Turning now to details of the catheter 10, which is also referred to herein as the device 10, and with initial reference to Figures 1A, 1B, 3 and 4 the catheter 10 of this embodiment has an elongated flexible shaft 12 having a lumen (channel) 14 extending within the shaft 12 and communicating at its distal region with balloon 16 to fluidly communicate with balloon 16 to inflate the balloon. Balloon 16 is utilized for monitoring

pressure and is also referred to herein as the “pressure balloon.” A fluid port 15 is positioned at a proximal region 17 of the catheter 10 for communication with an infusion source for infusion of gas, e.g., air, through the lumen 14 and into the balloon 16. The catheter 10 is shown in Figure 1A with balloon 16 in the deflated condition (position) and 5 in Figure 1B with the balloon 16 in the inflated condition (position). The shaft 12 also includes a second lumen (channel) 20 and third lumen (channel) 24 extending therein (see also Figure 5). In a preferred embodiment, the second lumen 20 is the largest lumen and is configured for continuous drainage of bodily contents from the bladder and can be connected to a drainage bag for collection of urine. Second lumen 20 has a side opening 22 10 at a distal portion, best shown in Figure 3, communicating with the bladder. The third lumen 24 terminates at its distal end within balloon 26 to fluidly communicate with balloon 26 to inflate the balloon 26. The balloon 26 is inflatable to stabilize the catheter 10 to limit movement of the catheter 10 to keep it in place within the bladder and is also referred to herein as “the stabilizing balloon 26.” A fluid port 28 is positioned at a 15 proximal region 17 of the catheter 10 for communication with an infusion source for infusion of fluid through the lumen 24 and into the balloon 26. The balloon 26 can be filled with fluid, e.g., liquid such as water or saline, or a gas, e.g., air. In Figure 1A, the balloon 26 is shown in the deflated condition and in Figure 1B in the inflated condition.

Note Figure 5 is a transverse cross-section of the catheter showing the three lumens 20 of various shapes. These cross-sectional shapes of the lumens are provided by way of example as one or more of the lumens can be circular, oval or other symmetrical or 25 asymmetrical shapes in transverse cross section. This also applies to the cross-sectional views of the other embodiments herein, e.g., Figures 6, 10B and 23 wherein the lumens can be shapes other than those shown. As noted above, preferably the drainage lumen is the largest lumen but in alternate embodiments one or more of the other lumens could be larger than the drainage lumen.

A sensor 30 is positioned within lumen 14 adjacent balloon 16. The wire(s) 32 are shown extending through lumen 14, the sensor 30 and wire(s) 32 being of sufficiently small size so as not to interfere with air flow through lumen 14. The sensor 30 measures

pressure of the bladder. The sensor 30 is part of a transducer for converting the variation in pressure to an electrical signal for transmission to an external monitor. The pressure sensor also includes a temperature sensor to measure core temperature of the body as seen inside the bladder. Transmission wire(s) 34 of the temperature sensor extend adjacent wire 32 5 through lumen 14 and terminate external of the catheter 10 for connection to an external monitor. The transducer can be wired directly to the monitor or alternatively wired to a converter external of the catheter for converting the signal received by the transducer and transmitting a signal to the monitor, e.g., a bedside monitor, to display the pressure readings. This is shown schematically in Figure 2. The readings can be displayed in 10 quantitative form, graphical form or other displays to provide an indicator to the clinician of the bladder pressure. The monitor, or a separate monitor, will also display the temperature readings from sensor 30. Alternatively, the sensor/transducer can be connected to the monitor via a Bluetooth wireless connection.

Wires 32 and 34 can extend through lumen 14 and exit side port 15 for connection 15 to a converter or monitor or alternatively can be inserted through the lumen 14, piercing the wall to enter the lumen 14 distal of the side port.

An alarm system can also be provided wherein the system includes a comparator for comparing the measured pressure (and/or temperature) to a threshold (predetermined) value, and if such threshold is exceeded, an indicator, e.g., an alarm, is triggered to indicate 20 to the hospital personnel the excessive pressure and/or temperature. An alarm system can alternatively or in addition be activated if a change in pressure measurement exceeds a specified rate over a specified period of time. This would alert the staff to an imminent risk of ACS prior to intra-abdominal pressure exceeding a certain value, e.g., 20 mm hg, since due to this link, the relationship between intra-abdominal pressure and abdominal cavity 25 volume is believed to be linear up to an intra-abdominal pressure of 12-15mm hg and increasing exponentially thereafter.

The alarm system can be part of the catheter (as shown in Figure 2) or alternatively external to the catheter 10.

The lumen 14 and space 16a within balloon 16 together form a closed gas, e.g., air, chamber, i.e., the lumen 14 forming an air column. With the balloon 16 filled with air, pressure on the external wall of the balloon will force the balloon to deform inwardly, thereby compressing the air contained within the balloon space 16a and within the lumen

5 14. The pressure sensor 30 is located in a distal portion of the lumen 14 at the region of the balloon 16 and thus is positioned at the distal end of the air column. Therefore, the pressure is sensed at the distal region as the sensor 30 detects change in air pressure in lumen 14 due to balloon deformation. Placement of the sensor 30 at a distal location provides a pressure reading closer to the source which advantageously increases the
10 accuracy because it reduces the risk of transmission issues by reducing the amount of interference which could occur due to water, air, clots, tissue, etc. if the transmission is down the air lumen (air column).

Additionally, the pressure measurement occurs about a more circumferential area of the balloon 16 providing a pressure reading of a region greater than a point pressure
15 sensor reading. Also, average pressure over an area of the bladder wall can be computed. Thus, the area reading gleans information on pressure over more of the bladder wall. Stated another way, the balloon has a relatively large surface area with multiple reference points to contribute to average pressure readings of the surface around it by the sensor.

The air column is charged by insertion of air through the side port 15 which
20 communicates with lumen 14. The side port 15 includes a valve to provide a seal to prevent escape of air from a proximal end. The balloon 16 can be composed of impermeable material, or in alternative embodiments, a permeable or semi-permeable material with an impermeable coating. This seals the air column at the distal end to prevent escape of air through the distal end, i.e., through the wall of the balloon 16. Thus, with the
25 lumen sealed at the proximal and distal ends, a closed air system is provided, and without the requirement for repeated water insertion, a fully closed unit is provided.

In some embodiments, when the lumen 14 is air charged, the balloon 16 is not fully inflated. This improves the accuracy of the balloon 16 transmitting pressure from external the balloon to the interior of the balloon and into the lumen, i.e., air column, by ensuring

the balloon has sufficient compliancy to prevent the balloon from introducing artifact into the pressure reading which would diminish its accuracy.

In some embodiments, the pressure balloon 16 is of a size to receive at least about 3cc (3 ml) of fluid. However, other sizes/volumes are also contemplated such as about 2cc 5 or about 1cc. Additionally, these volumes represent the maximum volume of fluid for the balloon, however, as noted above, in preferred embodiments, the pressure balloon 16 is not fully inflated so it would receive less than the maximum volume. Thus, with a balloon of X volume, the fluid would receive X-Y fluid, with Y representing the amount of desired extra space to achieve desired compliancy of the balloon while still enable sufficient inflation 10 of the balloon to achieve its pressure induced deformation function.

Note in this embodiment, the stabilizing balloon 26 is positioned proximal of the pressure balloon 16. Also, in this embodiment, the stabilizing balloon 26 is larger than the pressure balloon 16. By way of example, the stabilizing balloon 26 can have a fully expanded diameter of about 23mm and the pressure balloon 16 can have a fully expanded 15 diameter of about 15mm, although other dimensions or diameters for these balloons are also contemplated. By way of example, the stabilizing balloon 26 can have a capacity of about 10cc (10 ml) of air, although other sizes/volumes are also contemplated. Note these sizes/volumes for both balloons are provided by way of example and other sizes are also contemplated. Alternatively, the stabilizing balloon can be the same size or smaller than 20 the pressure balloon. Various shapes of the balloons are also contemplated.

Additionally, although the balloon 26 is positioned proximal of the balloon 16, it is also contemplated that the balloon 26 be positioned distal of balloon 16. The axial spacing of the balloons 16, 26 enable the stabilizing balloon 26 to engage the bladder wall to provide a sufficient radial force thereon for securing/mounting the catheter within the 25 bladder without interfering with the function of balloon 16.

It should be appreciated that although the stabilizing balloon is shown in the embodiment of Figure 1, it is also contemplated as an alternative that the catheter and system of Figures 1 and 2 can be utilized without the stabilizing balloon 26 as shown for example in Figure 7. Similarly, although the various embodiments (catheter) disclosed

herein utilize a stabilizing balloon, it is also contemplated that alternatively the catheter of these various embodiments not include a stabilizing balloon. In the embodiment of Figure 7, catheter 50 has two lumens: 1) a lumen for drainage of the bladder which has a side opening at a distal end to communicate with the bladder (similar to lumen 20 of Figure 1A); and 2) an air lumen filling pressure balloon 16 via insertion of air through side port 55. The sensor 30 is positioned within the air lumen in the same manner as sensor 30 is in lumen 14 or in the alternative positions disclosed herein. Thus, the pressure and temperature sensing described in conjunction with Figure 1 is fully applicable to the embodiment of Figure 7. Besides the elimination of the stabilizing balloon and its lumen and side port, catheter 50 is the same as catheter 10.

Note that although only one sensor is shown in Figure 3, it is also contemplated that multiple sensors can be provided. Also, note that the sensor 30 is positioned in lumen 14 at a mid-portion of the balloon, i.e., just proximal where the opening in lumen 14 communicates with the interior 16a of the balloon 16. It is also contemplated that the sensor can be placed at another portion within the lumen 14, e.g., a more proximal portion, with respect to the lumen opening. Also, the lumen opening need not be at the mid portion of the balloon and can be at other regions of the balloon to communicate with the interior space 16a. Note if multiple sensors are provided, they can be positioned at various locations within the lumen 14.

As shown, the sensor 30 and its transmission wires are located in the same lumen 14 also used for initial inflation gas, e.g., air, for balloon 16 and for the air charged column. This minimizes the overall transverse cross-section (e.g., diameter) of the catheter 10 by minimizing the number of lumens since additional lumens require additional wall space of the catheter. However, it is also contemplated in an alternate embodiment that the sensor is in a dedicated lumen separate from the inflation lumen 14. This can be useful if a larger sensor or additional wires are utilized which would restrict the air lumen if provided therein. This is also useful if a specific sized lumen for the sensor and wires is desired to be different than the sized lumen for the air column. Provision of a separate lumen is shown in the cross-sectional view of Figure 6 wherein in this alternate embodiment catheter 40 has

four lumens: 1) lumen 42 for drainage of the bladder which has a side opening at a distal end to communicate with the bladder (similar to lumen 20 of Figure 1); 2) lumen 44 for filling pressure balloon 16; 3) lumen 46 for filling stabilizing balloon 26; and 4) lumen 50 in which sensor 30 and its transmission wires 32 and temperature sensor wires 34 are 5 contained. In all other respects catheter 40 is identical to catheter 10 and its balloons, air channel, sensor, etc. would perform the same function as catheter 10. Therefore, for brevity, further details of catheter 40 are not discussed herein as the discussion of catheter 10 and its components and function are fully applicable to the catheter 40 of the embodiment of Figure 6. As noted above, the cross-sectional shapes of the lumens can be 10 circular, oval, etc. or other shapes.

Turning now to the use of the catheter 10, the catheter 10 is inserted into the bladder. Note catheter 50 would be used in the same manner. The balloon 26 is inflated to secure the catheter 10 in place during the procedure by insertion of a fluid (liquid or gas) through side port 28 which is in fluid communication with lumen 24. The system is 15 charged by inflation of the balloon 16, i.e., preferably partial inflation for the reasons discussed above, by insertion of air via a syringe through port 15 which is in fluid communication with lumen 14. As discussed above, the catheter 10 is a closed system with the balloon 16 sealed so that air inserted through lumen 14 and into balloon 16 cannot escape through balloon 16. Thus, a closed chamber is formed comprising the internal space 20 16a of the balloon 16 and the internal lumen 14 communicating with the internal space 16a of balloon 16. With the balloon 16 inflated, pressure monitoring can commence. When external pressure is applied to an outer surface 16b of the balloon 16, caused by outward abdominal pressure which applies pressure to the bladder wall and thus against the wall of balloon 16, the gas e.g., air, within the chamber is compressed. The sensor 30 at the distal 25 end of lumen 14 provides continuous pressure readings, converted to an electrical signal by the transducer within the distal end of lumen 14, and then electrically communicates through wire(s) 32 extending through lumen 14, exiting through the proximal side port 15 and connected to an external monitor. Note the wire can terminate at the proximal end in a plug in connector which can be connected directly to the monitor or alternatively plugged

into a converter to convert the signals from the transducer in the embodiments wherein the converter is interposed between the wires and monitor (see e.g., the system of Figure 2) to provide the aforescribed graphic display. Although, the system is capable of continuous pressure and temperature monitoring, it can also be adapted if desired for periodic 5 monitoring so the pressure and temperature readings can be taken at intervals or on demand by the clinician.

In the embodiments wherein an indicator is provided, if the measured pressure exceeds a threshold value, and/or a change in pressure measurement exceeds a specific rate over a specific time period, the indicator would alert the clinician, e.g., via a visual 10 indication or an audible indication that the threshold is exceeded. The indicator in some embodiments can include an audible or visual alarm (shown schematically in Figure 2). In the embodiments having an indicator, the indicator can be provided on a proximal end of the catheter which extends out of the patient or the indicator can be part of an external component such as the monitor or a separate alarm system. A visual, audible, or other 15 indicator can likewise be provided in any of the other embodiments disclosed herein to indicate if the measured temperature exceeds a predetermined value, and such indicator can include an alarm and can be part of the catheter or a separate component.

In the embodiment of Figures 1-7, within the distal end of the air lumen 14 is a pressure transducer and pressure sensor 30 which also includes a temperature sensor. In the 20 alternate embodiment of Figures 8A-10B, the temperature sensor is separate from the pressure sensor. More specifically, catheter 60 has an elongated flexible shaft 62 having a lumen (channel) 64 extending within the shaft 62 and fluidly communicating at a distal region with balloon 66 to inflate the balloon. Balloon 66 (also referred to as the pressure balloon) is utilized for monitoring pressure. A fluid side port 65 is positioned at a proximal 25 region 67 of the catheter 60 for communication with an infusion source for infusion of gas e.g., air, through the lumen 64 and into the balloon 66. The catheter 60 is shown in Figure 8A with balloon 66 in the deflated condition (position) and in Figure 9 with the balloon 66 in the inflated condition (position). The shaft 62 also includes a second lumen (channel) 70 and third lumen (channel) 74 extending therein. The second lumen 70 is preferably the

largest lumen and is configured for drainage of the bladder. Second lumen 70 has a side opening 72 at a distal portion communicating with the bladder. The third lumen 74 communicates at a distal region with stabilizing balloon 76 to fluidly communicate with balloon 76 to inflate the balloon. The stabilizing balloon 76 is inflatable to stabilize the catheter 60 to limit movement of the catheter 60 to keep it in place within the bladder. A side fluid port 75 is positioned at a proximal region 67 of the catheter 60 for communication with an infusion source for infusion of fluid through the lumen 74 and into the balloon 76.

Sensor 80 is positioned in lumen 64 for sensing pressure in response to balloon deformation in the same manner as sensor 30. Sensor 82 is positioned in lumen 64 distal of sensor 80 for measuring core temperature. Temperature sensor 82 can be a thermocouple, a thermistor or other types of temperature sensors. As shown in Figure 9, the temperature sensor is distal of the balloon 66 and its transmission wire(s) 83 extend proximally within lumen 64, exiting a proximal end (through side port 65) for communication with a monitor or alternatively a converter which communicates with the monitor. Wire(s) 81 of sensor 80 also extends through lumen 64, alongside wire 83, exiting through the side port 65 or a proximal end wall or a side wall of the lumen. It is also contemplated that alternatively one or both of sensors 80 and 82, and their associated wires 81, 83, can be positioned in a separate "fourth" lumen such as in the embodiment of Figure 6 so that the "inflation lumen" and the "sensor lumen" are independent.

In use, catheter 60 is inserted into the bladder and stabilizing balloon 76 is inflated to secure the catheter 60 in place. The system is charged by inflation of the balloon 66, i.e., preferably partially inflated for the reasons discussed above, by insertion of gas, e.g., air, through port 65 which is in fluid communication with lumen 64 in a closed system formed by the internal space 66a of the balloon 66 and the internal lumen 64 communicating with the internal space 66a of balloon 66. With the balloon 66 inflated, pressure monitoring can commence as external pressure applied to an outer surface of the balloon 66 compresses the gas within the chamber. The sensor 80 at the distal end of lumen 64 provides continuous pressure readings, converted to an electrical signal by the transducer within the

distal end of lumen, and then electrically communicates through wires 82 extending through lumen 64 to an external monitor either directly or via a converter. The sensor 82 at the distal end of lumen 64 provides continuous temperature readings via wires 83 communicating directly or indirectly with the monitor. Although, the system is capable of 5 continuous pressure and continuous temperature monitoring, as with the other systems disclosed herein, it can also be adapted if desired for periodic monitoring so the pressure and/or temperature readings can be taken at intervals or on demand by the clinician.

In the alternative embodiment of Figure 11, catheter 90 is identical to the catheter 60 of Figure 8 except that the pressure transducer is positioned external of the catheter 10 rather than in the air (or other gas) lumen. That is, instead of the pressure transducer including the sensor being positioned within the distal end of the air lumen, the pressure sensor 92 is positioned within lumen 94 at the distal end of the lumen and transmission wire(s) 93 connect the sensor 92 to the pressure transducer 96 positioned outside of the patient at a proximal region of catheter 90. As shown, the pressure transducer 96 can be 15 positioned in a side port of catheter 90. In alternate embodiments, it is positioned outside the catheter. The temperature sensor 95 is positioned within lumen 94 along with transmission wire 97 in the same manner as temperature 82 and wires 83 are positioned in catheter 60 described above. The temperature sensor 95 can be a separate sensor positioned distal of the pressure sensor 92 as shown or alternatively it can be part of sensor 92 as in 20 the embodiment of Figure 1. In all other respects, catheter 90 is identical to catheter 60 and therefore for brevity further discussion is not provided since the structure and function of the balloons, the lumens, the positioning of the sensors in the lumens, the continuous pressure monitoring, etc., as well as the aforescribed alternative arrangements of catheter 60, are fully applicable to the catheter 90.

25 In the alternative embodiment of Figure 12, catheter 100 is identical to catheter 60 of Figure 8 except that the pressure transducer and pressure sensor are positioned external of the patient at a proximal region of the catheter rather than in the air lumen. That is, instead of the pressure transducer sensor being positioned within and at the distal end of the air lumen, the transducer and pressure sensor 102 are positioned at a side port 103 of

the catheter 100. In alternative embodiments, they are positioned outside the catheter. In yet other embodiments, the pressure sensor and/or pressure transducer can be positioned within the air (or other gas) lumen at a proximal end of the air lumen. The temperature sensor 107 is positioned within lumen 104 along with transmission wire(s) 108 in the same 5 manner as temperature sensor 82 and wire 83 are positioned in catheter 60 described above. The system is charged by inflation of the balloon 106, i.e., preferably partially inflated for the reasons discussed above, by insertion of air via a syringe or other injection device through the side port 103 which is in fluid communication with lumen 104. The catheter 100 is a closed system with the balloon 106 sealed so that air inserted through 10 lumen 104 and into balloon 106 cannot escape through balloon 106. Thus, a closed chamber is formed comprising the internal space of the balloon 106 and the internal lumen 104 communicating with the internal space of balloon 106. With the balloon 106 inflated, pressure monitoring can commence. When external pressure is applied to an outer surface 15 of the balloon 106, caused by outward abdominal pressure which applies pressure to the bladder wall and thus against the wall of balloon 16, the gas (e.g., air) within the chamber of the balloon 106 is compressed. This compresses the air within the lumen 104 creating an air charged column along the lumen 104. The sensor 102 at the proximal end of catheter 100 measures pressure of the air column at its proximal end and can provide continuous pressure readings, converted to an electrical signal by the transducer at the proximal end or 20 external of the catheter 100, and then electrically communicates through wire(s) to an external monitor. The balloon 106, like balloon 16, balloon 66 and the other pressure balloons described herein, is of sufficiently large size to provide a sufficient circumferential area for detection of pressure changes along several parts of the bladder wall, thereby providing an average pressure and enabling more accurate pressure readings. 25 Balloon 109 is a stabilizing balloon like balloon 76 inflated through a separate lumen.

Note the wire(s) of the sensor 102 can terminate at the proximal end in a plug in connector which can be connected directly to the monitor or alternatively plugged into a converter to convert the signals from the transducer in the embodiments where the converter is interposed between the wires and monitor (see e.g. the system of Figure 2) to

provide the aforescribed graphic display. Although, the system is capable of continuous pressure and temperature monitoring, it can also be adapted if desired for periodic monitoring so the pressure and/or temperature readings can be taken at intervals or on demand by the clinician. In all other respects, catheter 100 is identical to catheter 60 and 5 therefore for brevity further discussion is not provided since the structure and function of the balloons, the continuous pressure monitoring, etc., as well as the aforescribed alternative arrangements of catheter 60, are fully applicable to the catheter 100.

Figures 13A and 13B illustrate an alternate embodiment wherein catheter 110 includes a pressure sensor within the balloon. More specifically, catheter 110 has an 10 elongated flexible shaft 112 having a lumen (channel) 114 extending within the shaft 112 and communicating at its distal region with balloon 116 to fluidly communicate with balloon 116 to inflate the balloon. Balloon 116 (also referred to as the pressure balloon) is utilized for monitoring pressure. A fluid side port 115 is positioned at a proximal region 117 of the catheter 110 for communication with an infusion source for infusion of gas 15 through the lumen 114 and into the balloon 116. The shaft 112 also includes a second lumen (channel) 120 and third lumen (channel) 122 extending therein. Second lumen 120 has a side opening 124 at a distal portion communicating with the bladder. The third lumen 122 communicates at a distal region with stabilizing balloon 126 to fluidly communicate with balloon 126 to inflate the balloon to limit movement of the catheter 110 to keep it in 20 place within the bladder for drainage. A fluid port 113 is positioned at a proximal region 117 of the catheter 110 for communication with an infusion source for infusion of fluid through the lumen 122 and into the balloon 126.

The pressure sensor 130 is carried by catheter 110 and positioned within the balloon 116 to measure pressure in response to deformation of the balloon in response to 25 pressure exerted on an outer wall of balloon 116. The pressure transducer can include the sensor 130 or can be a separate component positioned at a proximal end of the catheter external of the catheter 110. The temperature sensor 132 can be positioned within the balloon 116, can be part of sensor 130, or alternatively positioned within lumen 114 (as shown in Figure 13B), with its transmission wire(s) 127 extending within the gas, e.g., air,

lumen 114 along with the wires of sensor 130 in the same manner as in catheter 60 described above.

In all other respects, catheter 110 is identical to catheter 60 and therefore for brevity further discussion is not provided since the structure and function of the balloons, 5 lumens, continuous pressure monitoring, etc. as well as the aforescribed alternative arrangements of catheter 60, are fully applicable to the catheter 110.

As discussed above, the pressure balloons disclosed herein have a large circumferential area (and large volume) to provide multiple reference points for pressure readings and to provide an average pressure to enable more accurate readings. Thus, the

10 pressure balloon provides for gross measurement. In an alternate embodiment shown in Figure 15, the pressure balloon for detecting pressure, designated by reference numeral 142, forms an outer balloon of catheter 140. Contained within the outer balloon 142 is an inner balloon 143. The inner balloon 143 provides a smaller diameter balloon and a smaller circumference (and volume) than the outer balloon 14. The inner balloon 143 together with 15 the lumen 144 forms a smaller gas, e.g., air, column than in the embodiments discussed above where the larger balloon internal space communicates directly with the air lumen. This provides finer measurements. Thus, the compliant outer balloon 142 compresses the compliant inner balloon 143 which compresses the air within air lumen 144. The closed system is thereby formed by the internal space of the inner balloon 143 and the lumen 144. 20 In certain instances, the smaller balloon air column can provide a more accurate reading from the average pressure determined by the larger outer balloon 142.

The inner balloon 143 and outer balloon 142 can be separately/independently inflated and closed with respect to each other so there is no communication, e.g. passage of gas or liquid, between the inner and outer balloons 143, 142. The outer balloon in the 25 embodiments having an inner balloon within the outer balloon can be filled with a gas like the inner balloon or alternatively filled with a liquid such as saline.

The pressure transducer and pressure sensor 150 can be positioned within the lumen 144 in the same manner as sensor 30 of Figure 1 and can function in the same manner. Alternatively, the pressure transducer can be at a proximal end of the catheter 140

as in the embodiment of Figure 12 or external of the catheter. A temperature sensor can be part of sensor 150 as in the embodiment of Figure 1 or alternatively it can be a separate component which can be positioned for example distal of the pressure sensor within the gas, i.e., air, lumen as in the embodiment of Figure 8A. The transmission wires of the 5 pressure sensor 150 and the temperature sensor extend through lumen 144.

The catheter 140 can optionally include a stabilizing balloon 145 similar to balloon 76 of Figure 8. The catheter 140 would have a lumen, e.g., lumen 146, to inflate the stabilizing balloon 145. Lumen 148 with side opening 149 provides for drainage of the bladder. Lumen 144 which is used to inflate the inner balloon 143 and create the gas 10 column has an opening at a distal region to communicate with inner balloon 143. A separate lumen 147 has an opening at a distal region to communicate with the outer balloon 142 to fill the outer balloon 142.

In use, catheter 140 is inserted into the bladder and stabilizing balloon 145 is inflated to secure the catheter 140 in place. The system is charged by inflation of the inner 15 balloon 143, i.e., preferably partially inflated for the reasons discussed above, by insertion of air through a side port which is in fluid communication with lumen 144 in a closed system formed by the internal space 143a of the inner balloon 143 and the internal lumen 144 communicating with the internal space of inner balloon 143. Outer balloon 142 is filled, i.e., preferably partially inflated for the reasons discussed above, via injection of air 20 through a separate lumen. With the outer balloon 142 inflated, pressure monitoring can commence as external pressure applied to the larger circumferential outer surface of the outer balloon 142 compresses and deforms the outer balloon 142 which compresses the inner balloon 143. As the inner balloon 143 is compressed and deformed in response to compression/deformation of the outer balloon 142 based on changes to bladder pressure, 25 the sensor 150 at the distal end of lumen 144 provides continuous pressure readings, converted to an electrical signal by the transducer within the distal end of lumen 144, and then electrically communicates through wires 152 extending through lumen 144 to an external monitor either directly or via a converter. Although, the system is capable of continuous pressure and continuous temperature monitoring, as in the other embodiments

disclosed herein it can also be adapted if desired for periodic monitoring so the pressure and/or temperature readings can be taken at intervals or on demand by the clinician.

Note that although separate lumens are provided for the inflation of inner balloon 143 and outer balloon 142, in an alternate embodiment, a single lumen can be utilized to 5 inflate both balloons 143 and 142.

Figure 16 illustrates an alternate embodiment of catheter 140, designated by reference numeral 140'. Catheter 140' is identical to catheter 140 except a larger outer balloon 142' is provided to cover more surface area for pressure readings. In all other respects, catheter 140' is identical to catheter 140 and for brevity further discussion is not 10 provided since the features and functions of catheter 140, and its alternatives such as single or two lumens for inner and outer balloon inflation, are fully applicable to catheter 140'. For ease of understanding, the components of catheter 140' which are identical to catheter 140 are given the same reference numerals as catheter 140.

Note that the larger balloon 142' can be used with the catheters of any of the 15 embodiments described herein. Thus, a pressure balloon of the larger size balloon 142' can be used instead of the smaller pressure balloons illustrated in the drawings. Note the size of the balloons is provided by way of example and are not necessarily drawn to scale comparatively to the other components.

Figure 17A illustrates an alternate embodiment of catheter 140, designated by 20 reference numeral 140''. Catheter 140'' is identical to catheter 140 except a pear shaped larger outer balloon 142'' is provided. The larger balloon 142'' covers more surface area for pressure readings. The pear shape could in certain applications decrease the risk of obstructing the ureter and provide more tactile continuity of the balloon to the bladder wall giving a better transmission of abdominal pressure to the internal sensor. In all other 25 respects, catheter 140'' is identical to catheter 140 and for brevity further discussion is not provided since the features and functions of catheter 140, and its alternatives such as single or two lumens for inner and outer balloon inflation, are fully applicable to catheter 140''. For ease of understanding, the components of catheter 140'' which are identical to catheter 140 are given the same reference numerals as catheter 140. Figure 17B illustrates a

catheter identical to catheter 140" with identical balloons, the only difference being that the side opening 149' is positioned proximal of the balloon 143 rather than distal of the balloon as in Figure 17A. That is, opening 149', in communication with the catheter lumen 148' for drainage of the bladder, is positioned between the stabilizing balloon 145 5 and the inner and outer pressure (and inner) pressure balloon 142" (and 143). Thus, it is distal of the stabilizing balloon 145 and proximal of the outer balloon 142".

Note that the positioning of the side opening for drainage of Figure 17B, which communicates with the drainage lumen of the catheter, can be utilized with any of the catheters disclosed herein. Thus, in the catheters disclosed in the various embodiments 10 herein, instead of the drainage opening positioned distal of the pressure balloon(s), it can be proximal of the pressure balloon and distal of the stabilizing balloon so it is between the two balloons.

Note that the pear shaped balloon 142" can be used with the catheters of any of the embodiments described herein. Thus, a pressure balloon of the pear shape of balloon 142", 15 and of larger size if desirable, can be used instead of the pressure balloons illustrated in the drawings.

Figures 18-25B illustrate an alternate embodiment of the catheter of the present invention. The pressure balloon for detecting pressure, designated by reference numeral 202, forms an outer balloon of catheter 200. Contained within the outer balloon 202 is an 20 inner balloon 204. The inner balloon 204 provides a smaller diameter balloon and a smaller circumference (and volume) than the outer balloon 202. The inner balloon 204 together with the lumen 214, which communicates with the inner balloon 204 for inflation thereof, forms a smaller gas, e.g., air, column as in the embodiments of Figures 15-17. This provides finer measurements. Thus, the compliant outer balloon 202 compresses the outer 25 wall 205 of the compliant inner balloon 204 which compresses the air (or other gas) within air lumen 214. The closed system is thereby formed by the internal space 204a of the inner balloon 204 and the lumen 214. The smaller balloon air column can in certain instances provide a more accurate reading from the average pressure determined by the larger outer balloon 202.

The pressure transducer and pressure sensor are external to catheter 200 and mounted to port 218 at the proximal end 201 of catheter 200. More specifically, a transducer hub or housing, designated generally by reference numeral 240, contains the pressure transducer and sensor and is mounted to the angled side port 218. In the 5 embodiment of Figure 18A, the hub 240 is mounted over the port 218 and can be locked or secured thereto such as by a friction fit, snap fit, threaded attachment, a latch, etc., maintaining an airtight seal so the air is contained within the lumen 214 and balloon 204. The hub 240 has an elongated (rod-like) member or nose 242 extending distally therefrom (Figure 24A) dimensioned to be inserted through the proximal opening in port 218 and into 10 air lumen 214. (Note the air lumen 214 as in the other lumens extend into their respective angled side ports). The elongated member 242 also has a channel 244 extending therethrough to allow the pressure wave to travel through to the pressure sensor. Although in preferred embodiments no additional air needs to be injected into inner balloon 204 via lumen 214 after attachment of hub 240, it is also contemplated that a port or opening can 15 be provided in hub 240 to receive an injection device for injection of additional air. Such additional air can communicate with and flow through channel 244 of elongated member 242, into lumen 214 and into inner balloon 204 for inflation, or alternatively, a side port or opening in angled port downstream of the elongated member 242 could be provided.

To charge the system, when the hub 240 is mounted to the side port 218, the 20 elongated member 242 extends into lumen 214 to advance air through the air lumen 214 into inner balloon 204 to expand inner balloon 204. In some embodiments, .2cc of air can be displaced/advanced by the member 242, although other volumes are also contemplated. Thus, as can be appreciated, mounting of the hub 240 to the catheter 200 automatically 25 pressurizes the air lumen/chamber and expands the inner balloon 204. Note the inner balloon 204 can be partially or fully inflated (expanded), dependent on the amount of air advanced into the inner balloon 204. Further note that the lumen 214 is not vented to atmosphere when the transducer hub 240 is attached and air is advanced through the air lumen. The port 218 can include a closable seal through which the elongated member 242

is inserted but maintains the seal when the elongated member 242 remains in the lumen 214.

Lumen 214 which is used to inflate the inner balloon 204 and create the air column has an opening at a distal region to communicate with the interior of inner balloon 204.

5 Lumen 212 of catheter has an opening at a distal region to communicate with the outer balloon 202 to fill the outer balloon 202. Angled port (extension) 222 at the proximal end of catheter 200 receives an inflation device to inflate, either fully or partially, the outer balloon 202.

10 Note as in the other embodiments disclosed herein, air is described as the preferred gas for creating the column and expanding the balloon, however, other gasses are also contemplated, for each of the embodiments herein.

15 The outer balloon 202 can be shaped such that a distal region 207a (Figures 20A-20C) has an outer transverse cross-sectional dimension, e.g., diameter, greater than an outer transverse cross-sectional dimension, e.g., diameter, of the proximal region 207b. A smooth transition (taper) can be provided between the distal region 207a and proximal region 207b. Note the balloon 202 can be pear shaped as shown in Figures 20B and 20C although other configurations are also contemplated. This pear shape in some applications is designed to conform to the shape of the bladder.

20 The inner and outer balloons 204, 202 can by way of example be made of urethane, although other materials are also contemplated such as silicone or EVA.

25 A temperature sensor 230 (Figure 18B), such as a thermocouple, is positioned within the catheter 200 at a distal end to measure core body temperature. The sensor 230 is shown positioned in a lumen 216 separate from the lumens 214 and 212. One or more wires 232 extend from the sensor 230 through the lumen 216, exiting the lumen 216 and catheter 200 at a proximal end between the angled extensions/ports of the catheter 200, e.g., between the port 218 for the inner balloon 204 and the port 222 for the outer balloon 202. A connector 234, e.g., a male connector, is at the proximal terminal end of the wire 232 as shown in Figure 25B. The transducer hub 240 includes a connector 247 with openings 249 (Figure 25A) which receive the connector 234 of the wire 232. When the hub

240 is mounted to port 218 of catheter 200, the connector 234 of the wire is automatically connected to a connector carried by or within the hub 240 which is in communication with a temperature monitor. Note the connector, e.g., female connector, within or carried by the hub 240 can already be mounted to an external temperature monitor via a cable when the

5 hub 240 is mounted to catheter 218 or alternatively the hub 240 can first be mounted to port 218 of the catheter 200 and then a cable is connected between the temperature monitor and catheter 200. In the illustrated embodiment of Figure 25A, the wire connector 234 can plug into the openings 249 of connector 247 positioned on the hub 240. Note the connector 247 can also be internal of the hub 240 with an opening in the wall of the hub to enable

10 access for the wire connector. Also note that alternatively the wire can include a female connector and the hub can have a male connector. Other types of connectors/connections are also contemplated.

As can be appreciated, connection of the transducer hub 240 to the catheter 200 (port 218) a) automatically connects the temperature sensor 230 to a connector for

15 communication with a temperature monitor cable; and b) automatically advances air through the first lumen 214 to expand the inner balloon 204.

The catheter 200 can optionally include a stabilizing balloon 206 similar to balloon 76 of Figure 8A. The stabilizing balloon 206 can be made of silicone, although other materials are also contemplated. If provided, the catheter 200 would have a lumen, e.g.,

20 lumen 210, to inflate the stabilizing balloon 206. Angled side port 217 can be provided in communication with lumen 210 for injection of a liquid or gas to expand the stabilizing balloon 206. The foregoing description of the stabilizing balloons in connection with other embodiments is fully applicable to balloon 206. Catheter 200 also includes a lumen 211 with a distal side opening 211a (Figure 18B) to provide for drainage of the bladder as in

25 the aforescribed embodiments. In the illustrated embodiment, the side opening 211a is distal of outer balloon 202 and inner balloon 204 and distal of the stabilizing balloon 210 which as shown is proximal of outer balloon 202 and inner balloon 204. In alternate embodiments, the stabilizing balloon 206 can be distal of the outer balloon 202.

Thus, in the embodiment of Figure 18A, catheter 200 has five lumens: 1) lumen 214 communicating with inner balloon 204 to inflate the inner balloon 204 and forming the air filled chamber; 2) lumen 212 communicating with outer balloon 202 for inflating outer balloon 202; 3) lumen 210 communicating with the stabilizing balloon 206 to inflate stabilizing balloon 206; 4) drainage lumen 211 having a side opening 211a at a distal end for drainage of the bladder; and 5) lumen 216 for the temperature sensor wire(s) 232. Catheter 200 also has three angled extensions/ports at its proximal end 201: 1) port 218 for access to lumen 214 to inflate the inner balloon 204; 2) port 222 for access to lumen 212 to inflate outer balloon 202; and 3) port 217 for access to lumen 210 to inflate stabilizing balloon 206. Drainage lumen 211 extends linearly terminating at region 223. Lumen 216 terminates proximally at the region of the angled ports 218, 222 through which wire 232 can exit from the catheter 200 for connection to a temperature monitor via hub 240. Note the location of the ports can vary from that illustrated in Figure 18. Also, location of the lumens and the cross-sectional dimension and size of the lumen can vary from that shown in Figure 23 as Figure 23 provides just one example of the location and size, e.g., diameter, of the lumens as well as the shape/cross-sectional configuration and location. The catheter 200, as in the foregoing embodiments, can have an atraumatic tip 209.

In use, catheter 200 is inserted into the bladder and stabilizing balloon 206 is inflated to secure the catheter 200 in place. The system is charged by inflation of the inner balloon 204, i.e., preferably partially inflated for the reasons discussed above, by advancement of air through lumen 214 upon attachment of the pressure transducer 240 to the port 218 of catheter 200. Such attachment moves elongated member 242 into lumen 214 to displace the air (or other gas) already in the lumen 214 to expand the inner balloon 204. A closed system is formed by the internal space 204a of the inner balloon 204 and the internal lumen 214 communicating with the internal space 204a of inner balloon 204. In a preferred embodiment, additional air does not need to be added to the balloon 204/lumen 214. Outer balloon 202 is filled, i.e., preferably partially inflated for the reasons discussed above, via injection of air through the separate port 222 which communicates with lumen 212 of catheter 200. With the outer balloon 202 inflated, pressure monitoring can

commence as external pressure applied to the larger circumferential outer surface of the outer balloon 202 compresses and deforms the outer balloon 202 which exerts a force on the outer wall of inner balloon 204 and compresses the inner balloon 204. As the inner balloon 204 is compressed and deformed in response to compression/deformation of the 5 outer balloon 202 based on changes to bladder pressure, the pressure sensor within the external hub 240 attached at the proximal end of the catheter 200 provides continuous pressure readings, converted to an electrical signal by the transducer within the hub 240, and then electrically communicates through a connector, e.g. cable 245, to an external monitor either directly or via a converter to display pressure readings. Although, the 10 system is capable of continuous pressure and continuous temperature monitoring, it can also be adapted if desired for periodic monitoring so the pressure and/or temperature readings can be taken at intervals or on demand by the clinician. Temperature readings are also taken during the procedure as temperature sensor 230 is connected to a temperature monitor via wire 232 connected to a connector of hub 240 which is connected to the 15 temperature monitor to display temperatures. The temperature monitor can be separate from the pressure display monitor or alternatively integrated into one monitor. Cable 245 can connect to the temperature monitor as well (directly or via a converter) or a separate cable extending from the hub 240 could be provided for connection to the temperature monitor.

20 Note that although separate lumens are provided for the inflation of inner balloon 202 and outer balloon 204, in an alternate embodiment, a single lumen can be utilized to inflate both balloons 202 and 204. In such embodiment, catheter 200 can have one less angled port and one less lumen since inflation of the outer balloon 202 would be through port 218 and lumen 214.

25 The proximal and distal end of the inner balloon 204 in the illustrated embodiment are within the confines of the outer balloon 202, i.e., the proximal end of the inner balloon 204 is distal of the proximal end of the outer balloon 202 and the distal end of the inner balloon 204 is proximal of the distal end of the outer balloon 202. Thus, in this illustrated embodiment, the inner balloon 204 is fully encapsulated within the outer balloon 202.

With this inner/outer balloon arrangement, the larger outer surface of the outer balloon 202 takes gross measurements and then the forces are concentrated on the smaller inner balloon 204 to amplify/concentrate pressure on the small area of the inner balloon so small changes can be detected and waves transmitted to the pressure transducer (via the 5 length of the lumen to a proximal transducer, e.g. an external pressure transducer).

As noted above, preferably no additional air needs to be added after mounting of hub 240. However, it is also contemplated that in alternate embodiments a port can be provided in communication with hub 240 to enable subsequent injection of air though lumen 214 and into inner balloon 204. Additionally, outer balloon 202 can in some 10 embodiments receive additional fluid injection via port 222 during the procedure.

Figure 26 illustrates an alternate embodiment of the pressure transducer hub. In this embodiment, hub 250 has a shroud 254 (shown schematically) positioned over elongated member 252. This helps protect/shield the elongated member 252. When the transducer 240 is mounted to the port 260 of the catheter, the shroud 254 fits over cover 260 of port 15 218 and is retained by a snap fit or by other methods of securement.

In the aforescribed embodiments, mounting of the transducer hub a) automatically connects the temperature sensor to a connector for communication with a temperature monitor cable; and b) automatically advances air through the first lumen to expand the inner balloon. In the embodiment of Figure 27, the pressure transducer hub 270 has a second elongated member 274 extending therefrom. When transducer hub 270 is mounted to the catheter, e.g., port 218, elongated member 272 enters the air lumen in the same manner as elongated member 242 of Figure 24A. Additionally, elongated member 274 automatically enters the lumen 210 at port 222 which communicates with the outer balloon 202. Therefore, in this embodiment, mounting of the transducer hub 270 a) 20 automatically connects the temperature sensor to a connector for communication with temperature monitor cable as in the embodiment of Figures 18-25B; b) automatically advances air through the first lumen to expand the inner balloon as in the embodiment of Figures 18-25B; and c) automatically advances air through lumen 210 communicating with the outer balloon 202 to inflate (expand) the outer balloon 202. The catheter of Figure 27

(and Figure 26) is otherwise identical to catheter 200 of Figure 18A so for brevity further discussion is not provided since the description of the function and elements of catheter 200 are fully applicable to the catheter of Figure 27 (and to the catheter of Figure 26).

Figures 28A-28D show an alternate embodiment of the hub/connector. The 5 pressure transducer is external to catheter 280 and mounted to port 282 at the proximal end 281 of catheter 280 via connector (housing) 290. Catheter 280 is identical to catheter 200 of Figure 18A except for the connector and transducer hub temperature sensor connection.

More specifically, transducer hub or housing, designated generally by reference 10 numeral 300, contains the pressure transducer and sensor 309 and is mounted to the angled side port 282. In the embodiment of Figure 28A, the hub 300 is mounted to the catheter 280 by connection to housing 290. Housing 290 is connected to port 282 via a barbed fitting 295 providing an interference fit with the port 282. The hub 300 is locked or secured 15 to connector 290 such as by a snap fit provided by the latch arms discussed below, although other attachments are also contemplated such as a friction fit, threaded attachment, other form of latch, etc., as well as other types of snap fits to provide an attachment that maintains an airtight seal so the air is contained within the air lumen and balloon 202 of the catheter 280. (As noted above catheter 280 is identical to catheter 200 except for its connector so catheter 280 includes (not shown) the inner and outer pressure balloons, stabilizing balloon, temperature sensor, etc. The catheter 280 can also have a 20 single pressure balloon as in the aforementioned embodiments.

The housing 290 attached to catheter 280 has a proximal opening 294 and a channel (lumen) 296 to receive an elongated (rod-like) member or nose 302 extending 25 distally from transducer hub 300. As shown channel 296 has a first diameter region 296a to match with the lumen 283 of the port 282, a second larger diameter region 296b proximal of region 296a to receive the male rod 302 of the hub 300, and a still larger diameter region 296c proximal of region 296b to receive the valve 299 and valve 298 and allow expansion thereof. As shown, valve 298 is dome shaped and is distal of valve 299. Conical cap 293, proximal of valve 299, provides a lead in to the valve 299 for the rod 302. Thermistor pins 292 receive thermistor connectors 308. Note valves 288, 299 are one

example of valves that can be provided as other valves to provide an airtight seal are also contemplated. A single valve is also contemplated.

Hub 300 is mounted to connector 290 and includes a housing 304 from which a pair of distally extending snap fit connector arms 306 extend. The latch arms 306 are 5 sufficiently flexible to enable attachment and have an enlarged distal portion 307, illustratively shown as arrow shaped although other enlarged shapes could be provided. The elongated member 302 extends between the latch arms 306. When the hub 300 is mounted to the connector 290, the elongated member 302 extends into the channel 296 to advance air to inflate the inner balloon. The enlarged ends 307 of latch arms 306 enter 10 recesses 291 and engage shoulders 291a to retain the hub 300. Note to release (disconnect) the hub 300, the ends 307 are pressed radially inwardly to disengage from shoulder 291a and the hub 300 is pulled proximally. Note that alternatively a different number of latch arms could be provided.

The housing (connector) 290 has a lumen 296 for communication with the lumen 15 283 in the side port 282 of catheter 280 which communicates with the air lumen and inner balloon of the catheter 280. As noted above, the lumen 296 is dimensioned to receive the elongated rod 302 of transducer hub 300. The wire for the sensor extends in housing 300. When transducer hub 300 is attached to connector 290, such attachment inserts the 20 elongated rod 302 into lumen 296 to advance air through the air lumen in the catheter and into the balloon 204. (Note the air lumen extends into its angled side port 282). The elongated member 302 also has a channel or lumen 305 extending therethrough to allow the pressure wave to travel through to the pressure sensor. Although in preferred 25 embodiments no additional air needs to be injected into balloon 204 after attachment of hub 300, it is also contemplated that a port or opening can be provided in hub 300 to receive an injection device for injection of additional air. Such additional air can communicate with and flow through channel 305 of elongated member 302, into the air lumen and balloon 204 for inflation, or alternatively, a side port or opening in the angled port downstream (distal) of the elongated member 302 could be provided. Attachment of hub 300 to housing 290 also automatically connects thermistor connectors 308 to

thermistor pins 292 to automatically connect the temperature sensor to the hub 300 for communication via a cable to a temperature monitor.

To charge the system, when the hub 300 is mounted to the side port 282 via attachment to connector 290, the elongated member 302 extends into lumen 296 to 5 advance air through the air lumen into balloon 204 (or the pressure balloon in the embodiments with a single pressure balloon) to expand the balloon 204. That is, connection of the transducer hub 300 to the catheter 280 (port 282) automatically advances air through the connector lumen 296, the port lumen 283 and the first lumen 214 to expand the balloon 204. (Such connection also automatically connects the temperature sensor to 10 the hub 300). In some embodiments, .2cc of air can be displaced/advanced by the member 102, although other volumes are also contemplated. Thus, as can be appreciated, mounting of the hub 300 to the catheter 280 automatically pressurizes the air lumen/chamber and 15 expands the balloon. Note the balloon can be partially or fully inflated (expanded), dependent on the amount of air advanced into the balloon. Further note that preferably the lumen is not vented to atmosphere when the transducer hub 300 is attached and air is advanced through the air lumen. The port 282 includes a closable seal, e.g., valves 298 and 299, through which the elongated member 302 is inserted but maintains the seal when the elongated member 302 remains in the lumen 296. Note that catheter 280 is identical in all 20 other respects to catheter 200 so that the description of catheter 200 and its components and function (and alternatives) are fully applicable to catheter 280, the difference being the connector 290 of catheter 292 to receive transducer hub 300. The transducer hub is also different, e.g., has latch arms and a different configuration.

In the alternative embodiment of Figures 29A-29C, the latch arms are reversed so that they are located on the connector rather than on the transducer hub as in Figure 28A. 25 More specifically, transducer hub (housing), designated by reference numeral 320, has an elongated member 322 with a channel 323 and is identical to elongated member 302 of Figure 28A for advancing air through the lumen and into the pressure balloon. Pressure transducer 324 is contained within the housing 320. Recesses 325 are dimensioned to receive the latch arms 317 of the connector or housing 310 which is connected to the side

port 282 of catheter 280. (Catheter 280 is the same as catheter 280 of Figure 28A except for connector 310). Extending proximally from housing 310 are two latch arms 16 with enlarged region 317 which engage the shoulders 326 formed by recesses 325 in hub 320 in a similar manner as latch arms 306 of Figure 28A engage in recesses 291 and shoulder 291a. Connectors 328 in hub 320 engage thermistor pins 312 of connector 310 for connection of the temperature sensor. Connection of the hub 320, like hub 300, automatically advances air to inflate the pressure balloon and automatically connects the temperature sensor.

5 To disconnect (release) the hub 320, ends 317 of latch arms 316 are pressed 10 radially inwardly to disengage from shoulder 326 so hub 320 can be pulled proximally out of connector 310.

10 Note the lumen which is used to inflate the pressure balloon 20 and create the air column has an opening at a distal region to communicate with the interior of the pressure balloon. If an outer balloon is provided, an additional lumen can be provided in the 15 catheter to communicate with the outer balloon to fill the outer balloon and an additional angled port (extension) at the proximal end of the catheter would receive an inflation device to inflate, either fully or partially, the outer balloon.

20 Note in each of the embodiments disclosed herein, air is described as the preferred gas for creating the column and expanding the balloon, however, other gasses are also contemplated for each of the embodiments.

25 The pressure balloons of the embodiments herein can be symmetrically shaped as shown or alternatively shaped such that a distal region has an outer transverse cross-sectional dimension, e.g., diameter, greater than an outer transverse cross-sectional dimension, e.g., diameter, of the proximal region. A smooth transition (taper) can be provided between the distal region and proximal region, although other configurations are also contemplated. The inner (and outer) balloon can by way of example be made of urethane, although other materials are also contemplated.

The wire connector of the foregoing embodiments can plug into the openings of a connector positioned on or in the hub. The wire connector can be internal of the hub with

an opening in the wall of the hub to enable access for the wire connector. Also note that alternatively the wire can include a female connector and the hub can have a male connector. Other types of connectors/connections are also contemplated.

In alternate embodiments, any of the catheters disclosed here can include a pulse 5 oximetry sensor to measure oxygen saturation in the urethral or bladder tissue. The sensor can be located either proximal or distal to the pressure balloon and/or stabilizing balloon. It could also alternatively be mounted within one of the balloons.

It is also contemplated that in some embodiments a backup system be provided to determine pressure. The backup system can provide a double check of pressure readings to 10 enhance accuracy. Such backup system can be used with any of the embodiments disclosed herein to provide a second pressure reading system. One example of such backup system is disclosed in Figures 14A and 14B. In this embodiment, catheter 160 has the pressure transducer/pressure sensor 162 like sensor 30 of Figure 1 within the air (or other gas) lumen 164 communicating with pressure balloon 167, forming a “first system”, plus a 15 pressure transducer/pressure sensor 169 at a proximal end of the catheter as in Figure 12 or external of the catheter forming a “second system”. Thus, the pressure sensor 162 is at a distal end of the air charged lumen 164 and pressure sensor 169 is at proximal end of the air charged lumen 164. Both sensors 162 and 169 are electrically connected to a monitor which provides a graphic display of pressure readings. The catheter 160 also includes a 20 temperature sensor either as part of the sensor 162 or a separate component that can be positioned for example in the lumen 164 distal of sensor 162 as in the embodiment of Figure 8. A stabilizing balloon 168 and an inflation lumen to inflate balloon 168 can also be provided. Lumen 163, having a side opening 170 at its distal end, is configured to drain the bladder similar to lumen 20 and side opening 22 of the embodiment of Figure 1.

25 In use, catheter 160 is inserted into the bladder and stabilizing balloon 168 is inflated to secure the catheter 160 in place. The system is charged by inflation of the balloon 167, i.e., preferably partially inflated for the reasons discussed above, by insertion of air through side port 172 which is in fluid communication with the air lumen in a closed system formed by the internal space of the balloon 167 and the internal lumen 164

communicating with the internal space of balloon 167. With the balloon 167 inflated, pressure monitoring can commence as external pressure applied to an outer surface of the balloon 167 compresses the air (or other gas) within the chamber. The sensor 162 at the distal end of lumen 64 provides continuous pressure readings, converted to an electrical 5 signal by the transducer within the distal end of lumen, and then electrically communicates through its transmission wires extending through the air lumen to an external monitor either directly or via a converter. Additionally, pressure within the air charged column is measured at a proximal region by sensor 169 within side port 172 of catheter 160. The sensor 162 at the distal end of lumen 164 provides continuous pressure readings, and such 10 pressure readings can be confirmed by the proximal sensor. Such pressure readings can be performed continuously (along with continuous temperature monitoring) or alternatively can also be adapted if desired for periodic monitoring so the pressure and/or temperature readings can be taken at intervals or on demand by the clinician. Thus, air pressure readings at a proximal end plus microtip pressure readings at the distal end are provided. 15 The sensors 162 and 169 can electrically communicate with an external monitor to display both pressure readings from sensors 162, 169, or alternatively, if the pressure readings are different, they can be averaged to display a single measurement. Clearly, other displays of information can be provided to display the information from the two sensors 162, 169.

The sensors disclosed herein can be microtip sensors within the air (or other gas) 20 lumen or balloon. In alternative embodiments, fiber optic sensors within the air (or other gas) lumen or balloon can be utilized to transmit circumferential/area pressure. The pressure transducers can be housed within the catheter or alternatively external to the catheter. Additionally, core temperature sensors can be part of the pressure sensor or a separate axially spaced component.

25 The multi-lumen catheters disclosed herein provide an air (or other gas) charged balloon giving precise readings of intra-abdominal pressure and core temperature and the systems are charged via insertion of air through a side port. The multi-lumen catheters are easily inserted into the bladder in the same manner as standard bladder drainage catheters and enable continuous drainage of urine while continuously recording IAP without

interrupting urine flow and without requiring retrograde filling of the bladder with water. Thus, these catheters provide a closed system. The catheters also have a balloon providing a large reservoir (large capacity) and large circumferential area/interface for obtaining more information from the bladder over multiple reference points (rather than a single point sensor) that provides an average pressure to provide a more accurate assessment of the surrounding environment as pressure measurement is not limited to one side of the bladder but can determine measurements on the opposing side as well.

As noted above the catheters in some embodiments can be connected to a bedside monitor through either a wire or blue-tooth wireless connection. The system can also in some embodiments include an indicator or alarm system to alert the staff at the site as well as remote staff through wired or wireless connections to external apparatus, e.g., hand held phones or remote monitors.

As noted above, an alarm or indicator can be provided in some embodiments to alert the staff. The indicator can be a visual indicator such as a light, LED, color change, etc. Alternatively, or additionally, the indicator can be an audible indicator which emits some type of sound or alarm to alert the staff. The indicator can be at the proximal region of the catheter or at other portions of the catheter, e.g., at a distal end portion, where known imaging techniques would enable the user to discern when the indicator is turned on. It is also contemplated that in addition to providing an alert to the user in some embodiments, the pressure monitoring system can be tied into a system to directly reduce abdominal pressure so that if the pressure exceeds a threshold level (value), the abdominal pressure can automatically be reduced. In such systems, an indicator can be provided on the proximal portion of the catheter, e.g., at a proximal end outside the patient's body, or separate from the catheter. The sensor can be in communication with the indicator, either via connecting wires extending through a lumen of the catheter or a wireless connection. The sensor can be part of a system that includes a comparator so that a comparison of the measured pressure to a predetermined threshold pressure value is performed and a signal is sent to the indicator to activate (actuate) the indicator if the measured pressure exceeds the threshold pressure to alert the clinician or staff that pressure within the abdomen is too

high and a signal is also sent to a device or system to automatically actuate the device or system to reduce the abdominal pressure. If the measured temperature is below the threshold, the indicator is not activated. A similar system can be used for temperature measurement and indication.

5 It is also contemplated that a micro-air charged sensor could be provided in the retention (stabilizing) balloon.

It is also contemplated that microtip sensors and/or fiber optic sensors can be utilized to measure pressure, and these sensors can be utilized instead of or in addition to the air pressure readings utilizing the aforescribed balloon(s) for measuring pressure.

10 Pulse oximeters for measuring oxygen levels (oxygen saturation) in the urethral and/or bladder tissue could also be provided. In some embodiments, the pulse oximetry sensors can be positioned on the catheter proximal to the retention balloon. Alternatively, the sensors can be positioned within the retention balloon, on the catheter distal to the pressure balloon or on other regions of the catheter. Another channel in the catheter can be 15 provided for the sensor and its connector to external devices, e.g. readers.

The catheters disclosed herein are designed for insertion into the bladder. However, it is also contemplated that they can be adapted for insertion into the rectum, colostomy pouch, stomach, supra-pubic bladder drain, or other orifice directly connected with the abdominal cavity.

20 Although the apparatus and methods of the subject invention have been described with respect to preferred embodiments, those skilled in the art will readily appreciate that changes and modifications may be made thereto without departing from the spirit and scope of the present invention as defined by the appended claims.

WHAT IS CLAIMED IS:

1. A multi-lumen catheter insertable into a patient for monitoring pressure, the catheter comprising:
 - 5 an expandable outer balloon at a distal portion of the catheter, the outer balloon having a first outer wall;
 - an expandable inner balloon positioned within the outer balloon, the inner balloon having a second outer wall;
 - 10 a first lumen communicating with the inner balloon, the inner balloon and first lumen forming a gas filled chamber to monitor pressure within the bladder, wherein the outer balloon has a circumferential area greater than a circumferential area of the inner balloon, wherein in response to pressure within the bladder exerted on the first outer wall of the expanded outer balloon, the outer balloon deforms and exerts a pressure on the second outer wall of the expanded inner balloon to deform the inner balloon and compress 15 the gas within the inner balloon and the first lumen to provide a finer measurement; and
 - 15 a second lumen communicating with the bladder to remove fluid from the bladder; and
 - 20 a pressure sensor communicating with the gas filled chamber for measuring bladder pressure based on compression of gas caused by deformation of the expanded inner balloon deformed by the expanded outer balloon.
2. The catheter of claim 1, wherein the gas filled chamber monitors pressure with the bladder to thereby monitor pressure within an abdomen of the patient.
- 25 3. The catheter of claims 1 or 2, wherein the sensor measures average pressure continuously throughout insertion of the catheter without requiring infusion of water into the bladder.

4. The catheter of any of claims 1-3, wherein the second lumen has a side opening distal of the inner and outer balloons.

5. The catheter of any of claims 1-4, wherein the second lumen has a side opening proximal of the inner and outer balloons.

6. The catheter of any preceding claim, wherein the catheter has a fourth lumen and a temperature sensor positioned within the fourth lumen to measure core body temperature.

10 7. The catheter of any preceding claim, wherein the outer balloon has a circumference engageable with a wall of the bladder at multiple contact regions to provide multiple reference points for calculation of an average pressure of the bladder wall, and a third lumen communicating with the outer balloon to inflate the outer balloon.

15 8. The catheter of any preceding claim, wherein the pressure sensor is contained within a hub and the hub includes an elongated member extending distally therefrom, and connection of the hub to a first port of the catheter automatically inserts the elongated member into the first lumen to advance air into the inner balloon to expand the inner balloon.

20

9. The catheter of any preceding claim, wherein the outer balloon has a distal region having a larger transverse cross-section than a proximal region.

25 10. The catheter of any preceding claim, wherein the catheter further comprises an additional lumen and a stabilizing balloon, the additional lumen communicating with the stabilizing balloon to inflate the stabilizing balloon to stabilize the position of the catheter, the stabilizing balloon positioned proximal of the outer balloon.

11. A multi-lumen catheter for monitoring intra-abdominal pressure, the catheter comprising an elongated body configured and dimensioned for insertion into a bladder of a patient, the catheter having a first lumen, a second lumen, a third lumen, a first balloon at a distal portion and a second balloon proximal of the first balloon, the first lumen
5 communicating with the first balloon, the second lumen communicating with the bladder to remove fluid from the bladder, and the third lumen communicating with the second balloon to inflate the second balloon to stabilize the catheter, the first balloon filled with a gas to form a gas filled chamber to monitor pressure within the bladder to thereby monitor pressure within an abdomen of the patient, and a pressure sensor for measuring pressure
10 within the bladder as the first balloon changes shape in response to changes in pressure in the bladder.
12. The catheter of claim 11, wherein the pressure sensor is positioned within the first lumen adjacent the first balloon.
15
13. The catheter of any of claims 11-12, wherein a temperature sensor is positioned within the first lumen spaced axially from the sensor for measuring pressure.
14. The catheter of any of claims 11-13, wherein the pressure sensor is external and
20 connectable to the catheter to communicate with the gas filled chamber.
15. The catheter of any of claims 11-14, wherein a side opening in the second lumen is between the first and second balloons.
- 25 16. The catheter of any preceding claim, wherein the pressure sensor measures bladder pressure continuously and communicates with an external monitor to visually display pressure readings, the pressure sensor providing continuous pressure measurements throughout its duration of insertion without requiring infusion of water into the bladder.

17. A method for measuring pressure comprising the steps of:
 - providing a catheter having first and second lumens and a balloon;
 - inserting the catheter into a bladder of a patient;
 - injecting gas into the first lumen of the catheter to expand the balloon from a deflated condition to a partially inflated condition, an internal space of the balloon and the first lumen forming a closed air chamber;
 - obtaining a first pressure reading of the bladder based on deformation of the balloon without injecting fluid into the bladder;
 - transmitting the first pressure reading to an external monitor connected to the catheter;
 - obtaining a second pressure reading of the bladder based on deformation of the balloon without injecting fluid into the bladder;
 - transmitting the second pressure reading to the external monitor connected to the catheter; and
- 15 obtaining consecutive continuous pressure readings of the bladder without injecting fluid into the bladder.

18. The method of claim 17, further comprising the step of draining the bladder through the second lumen of the catheter.

- 20 19. The method of claims 17 or 18, wherein the balloon is surrounded by an outer balloon and deformation of the outer balloon effects the deformation of the inner balloon.
- 25 20. The method of claims 17, 18 or 19 wherein after initial advancement of gas into the first lumen by connection of a pressure transducer, additional air does not need to be inserted during the duration of insertion of the catheter in a body of a patient.
21. A multi-lumen catheter for monitoring intra-abdominal pressure, the catheter comprising:

a distal balloon at a distal portion of the catheter;

a first lumen communicating with the distal balloon, the distal balloon and first lumen forming a gas filled chamber to monitor pressure within the bladder to thereby monitor pressure within an abdomen of the patient, wherein in response to pressure within 5 the bladder the distal balloon deforms to compress the gas within the distal balloon;

a first proximal port communicating with the first lumen;

a second lumen communicating with the bladder to remove fluid from the bladder;

and

a hub connectable to the first port of the catheter, the hub including a pressure 10 transducer for measuring pressure based on gas compression with the first lumen, and an elongated member extending distally from the hub, wherein connection of the hub to the first port inserts the elongated member into the first lumen to advance gas through the first lumen to expand the distal balloon, the first lumen not vented to atmosphere when the hub is connected to the first port.

15

22. The catheter of claim 21, wherein the first port has a valve and the elongated member is insertable through the valve when the hub is connected to the first port of the catheter.

20 23. The catheter of claims 21 or 22, further comprising a stabilizing balloon proximal of the distal balloon for stabilizing the catheter.

24. The catheter of any of claims 21-23, wherein the second lumen has a side opening communicating with the bladder, the side opening positioned distal of the distal balloon.

25

25. The catheter of any of claims 21-23, wherein the second lumen has a side opening communicating with the bladder, the side opening positioned between the distal balloon and stabilizing balloon.

26. The catheter of any of claims 21-25, wherein the pressure transducer measures average pressure continuously throughout insertion of the catheter without requiring infusion of water into the bladder.

5 27. The catheter of any of claims 21-26, wherein the catheter has a temperature sensor to measure core body temperature and a pressure transducer is contained within the hub and a wire extends from the temperature sensor through another lumen and external of the catheter into the hub connected to the catheter.

10 28. The catheter of any of claims 21-27, wherein the catheter includes a temperature sensor at a distal portion and connection of the hub to the catheter automatically electrically connects the temperature sensor to a temperature monitor cable.

15 29. The catheter of any of claims 21-28, further comprising an outer balloon positioned over the distal balloon, the outer balloon having a circumferential area greater than a circumferential area of the distal balloon and filled with a fluid, wherein in response to pressure within the bladder exerted on an outer wall of the outer balloon, the outer balloon deforms and exerts a pressure on an outer wall of the distal balloon to deform the distal balloon and compress the gas within the distal balloon and the first lumen, and a pressure sensor carried by the hub for measuring bladder pressure based on gas compression caused by deformation of the distal balloon.

20 30. The catheter of any of claims 21-29, further comprising a third lumen communicating with the outer balloon to inflate the outer balloon.

25

31. A multi-lumen catheter for monitoring intra-abdominal pressure, the catheter comprising:

a distal balloon at a distal portion of the catheter;

a first lumen communicating with the distal balloon, the distal balloon and first lumen forming a gas filled chamber to monitor pressure within the bladder to thereby monitor pressure within an abdomen of the patient, wherein in response to pressure within the bladder the distal balloon deforms to compress the gas within the distal balloon;

5 a first proximal port communicating with the first lumen;
a second lumen communicating with the bladder to remove fluid from the bladder,
a third lumen, a temperature sensor positioned in the third lumen and having a wire
extending through the third lumen; and
a hub connectable to the first port of the catheter, the hub including a pressure
10 transducer for measuring pressure based on gas compression within the first lumen,
wherein connection of the hub to the first port automatically connects the wire to an
electrical connector in the hub for connection to a temperature monitor.

32. The catheter of claim 31, wherein connection of the hub to the first port
15 automatically advances gas into the distal balloon to expand the distal balloon, the first
lumen remaining sealed to outside air during expansion of the distal balloon.

33. The catheter of claim 32, wherein the hub includes an elongated member extending
distally therefrom and insertable into the first lumen to advance gas into the distal balloon
20 upon connection of the hub to the first port.

34. The catheter of claim 33, wherein the first port has a valve and the elongated
member is insertable through the valve when the hub is connected to the catheter.

25 35. The catheter of any of claims 31-34, further comprising an outer balloon positioned
over the distal balloon, the outer balloon having a circumferential area greater than a
circumferential area of the distal balloon and filled with a fluid, wherein in response to
pressure within the bladder exerted on an outer wall of the outer balloon, the outer balloon

deforms and exerts a pressure on an outer wall of the distal balloon to deform the distal balloon and compress the gas within the distal balloon and the first lumen.

36. The catheter of any of claims 31-35, further comprising a stabilizing balloon

5 positioned proximal of the distal balloon for stabilizing the catheter.

37. A method for measuring pressure comprising the steps of:

providing a catheter having first and second lumens, an expandable first balloon and a temperature sensor;

10 inserting the catheter through the urethra into a bladder of a patient;

connecting a hub containing a pressure transducer to the first lumen to automatically advance gas through the first lumen of the catheter to expand the first balloon from a deflated condition to a more expanded condition and to automatically connect the temperature sensor to a connector within the hub;

15 obtaining a first pressure reading of the bladder based on deformation of the first balloon without injecting fluid into the bladder;

transmitting the first pressure reading to an external monitor connected to the hub;

obtaining a second pressure reading of the bladder based on deformation of the first balloon without injecting fluid into the bladder;

20 transmitting the second pressure reading to the external monitor connected to the hub; and

obtaining consecutive continuous pressure readings of the bladder without injecting fluid into the bladder.

25 38. The method of claim 37, further comprising the step of draining the bladder through the second lumen of the catheter.

39. The method of claims 37 or 38, wherein the catheter includes an outer balloon positioned over the first balloon, the outer balloon expandable through a separate lumen of

the catheter and deformable based on bladder pressure to deform the first balloon to provide finer measurements of bladder pressure.

40. The method of claims 37, 38 or 39 wherein the step of connecting a pressure
5 transducer advances an elongated member extending from the hub into the first lumen to advance air into the first balloon.

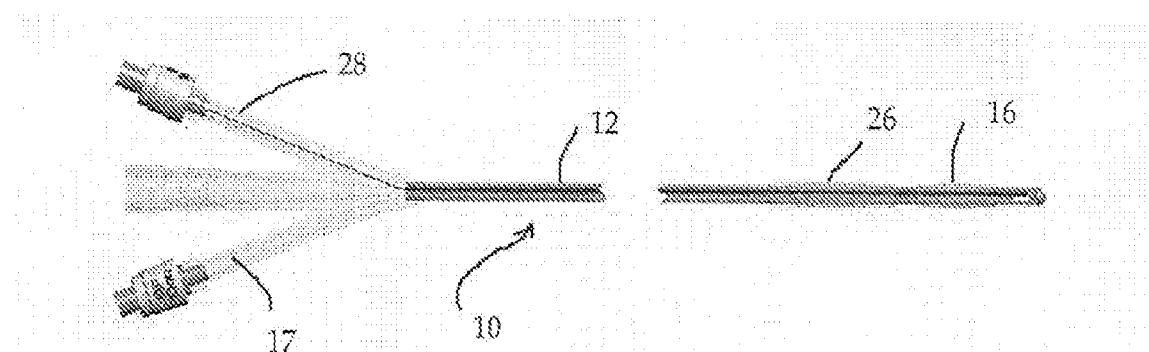


Figure 1A

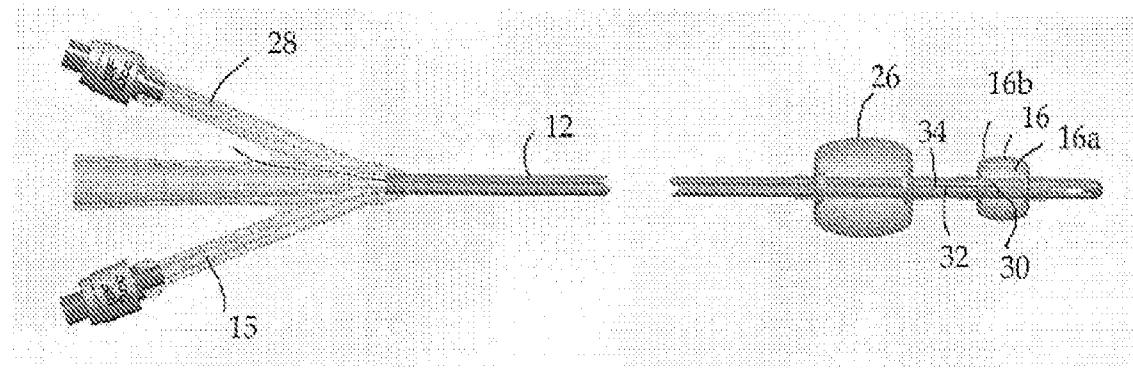


Figure 1B

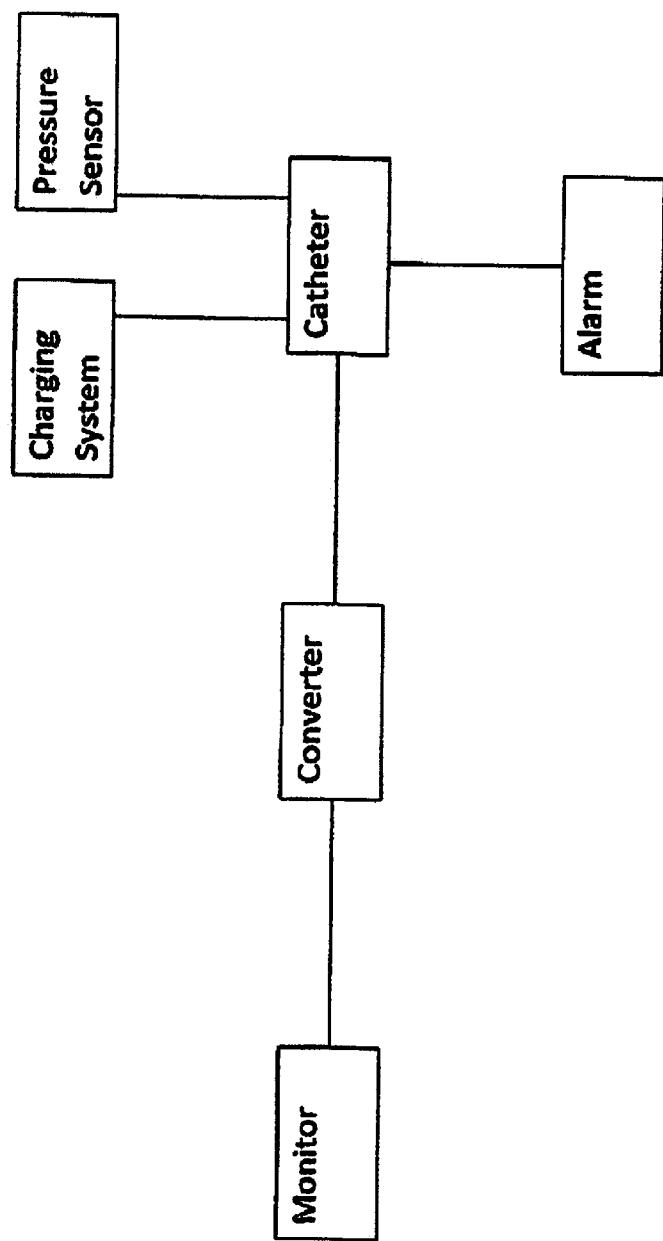
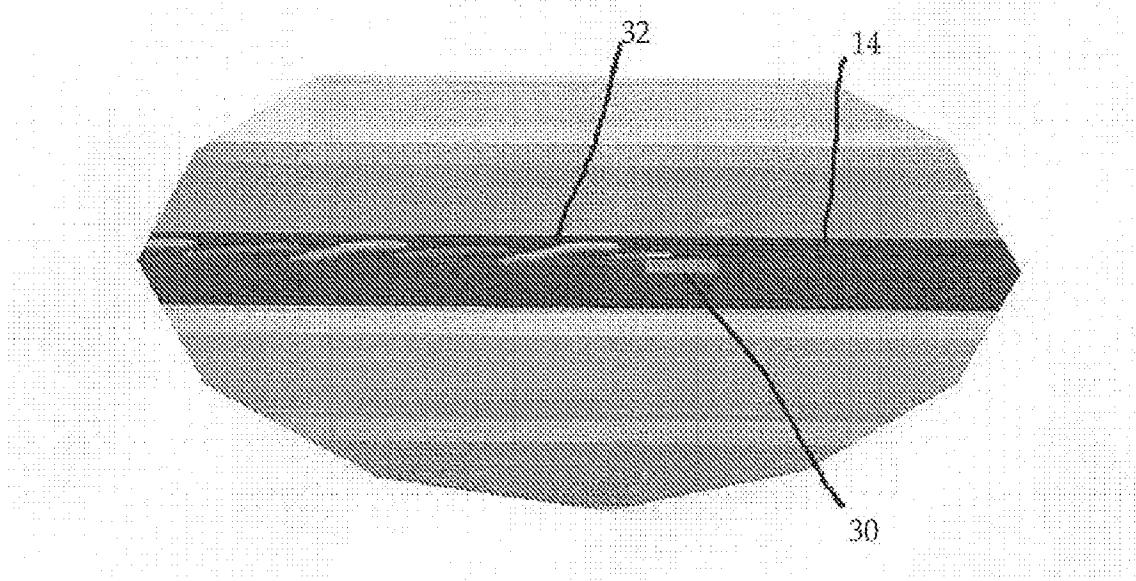
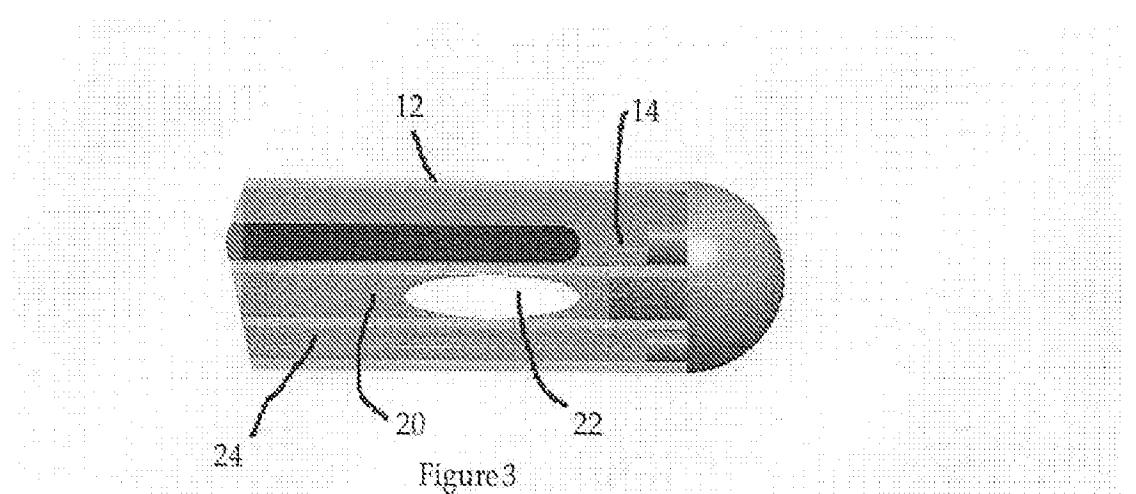


Figure2



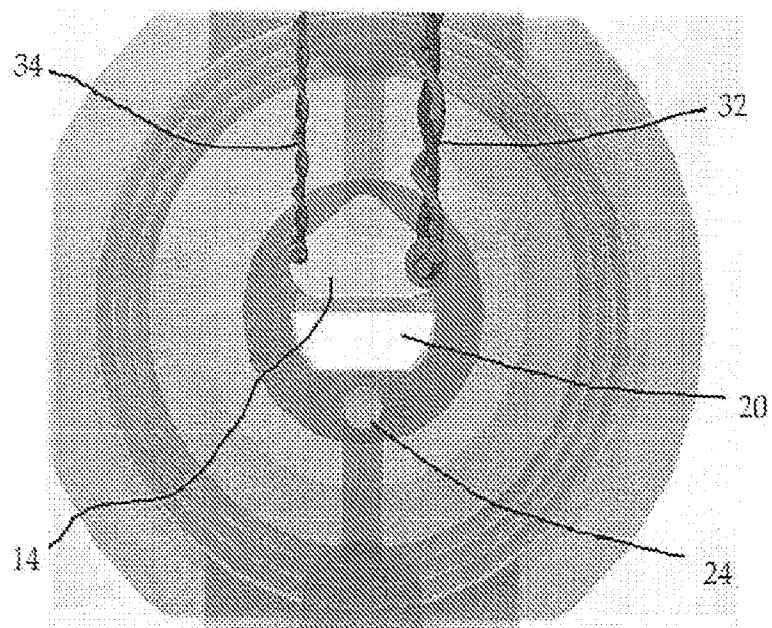


Figure 5

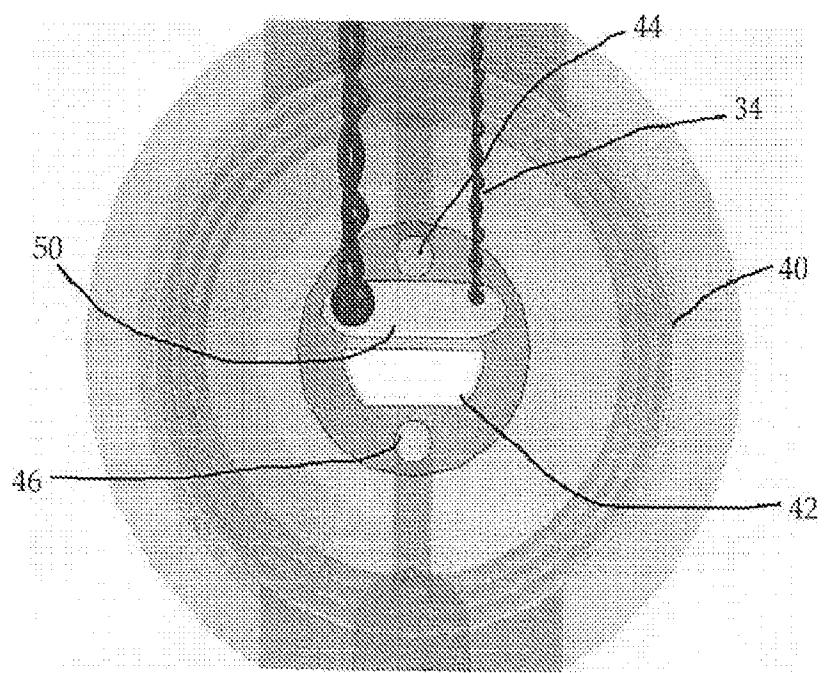


Figure 6

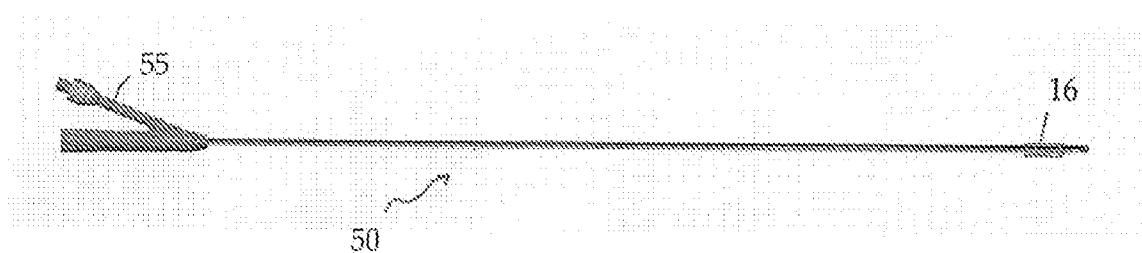


Figure 7

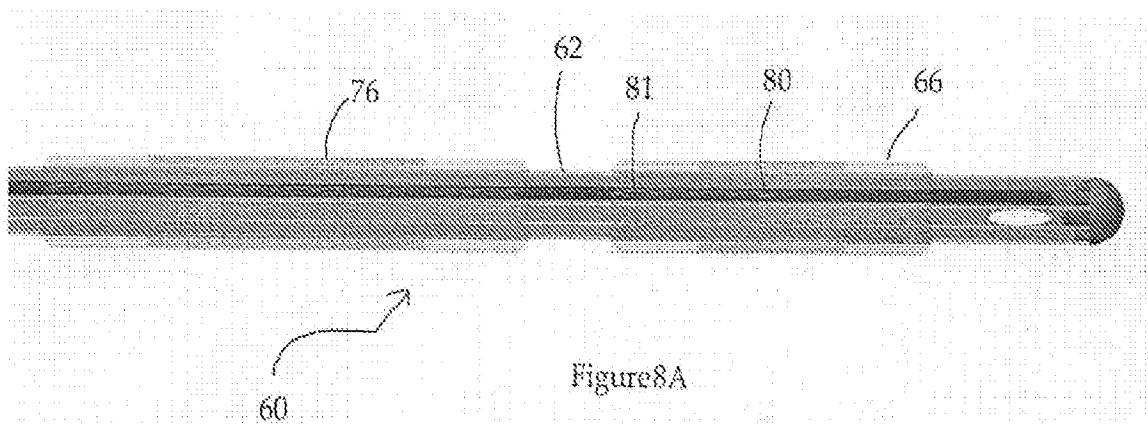


Figure 8A

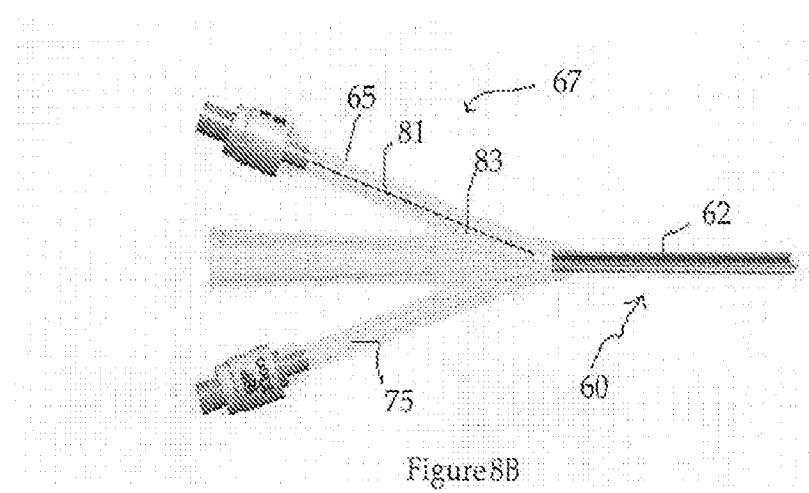


Figure 8B

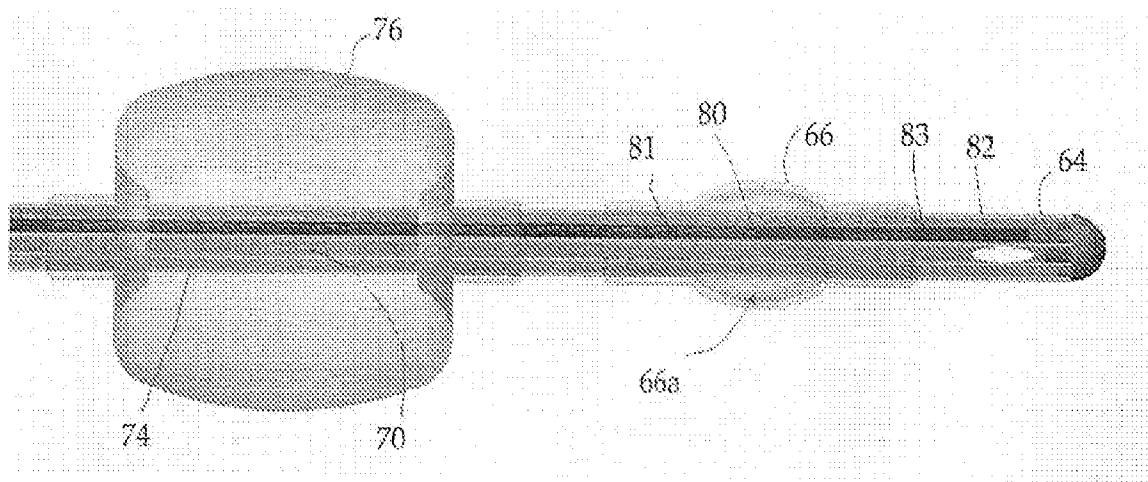


Figure 9

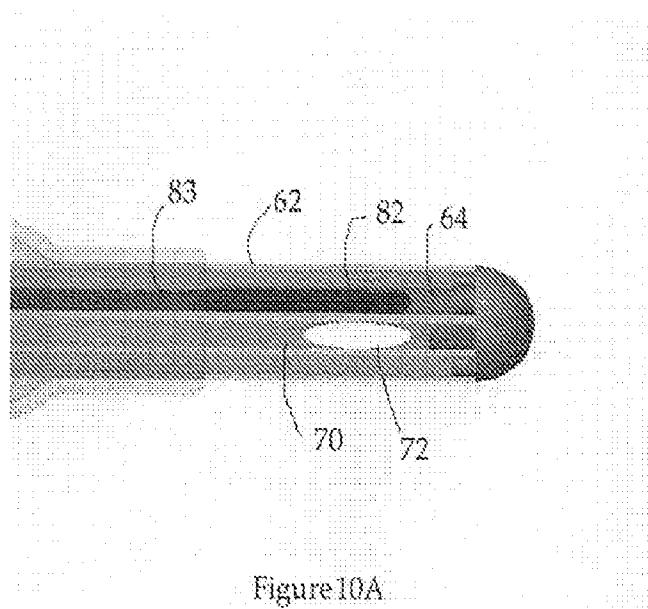


Figure 10A

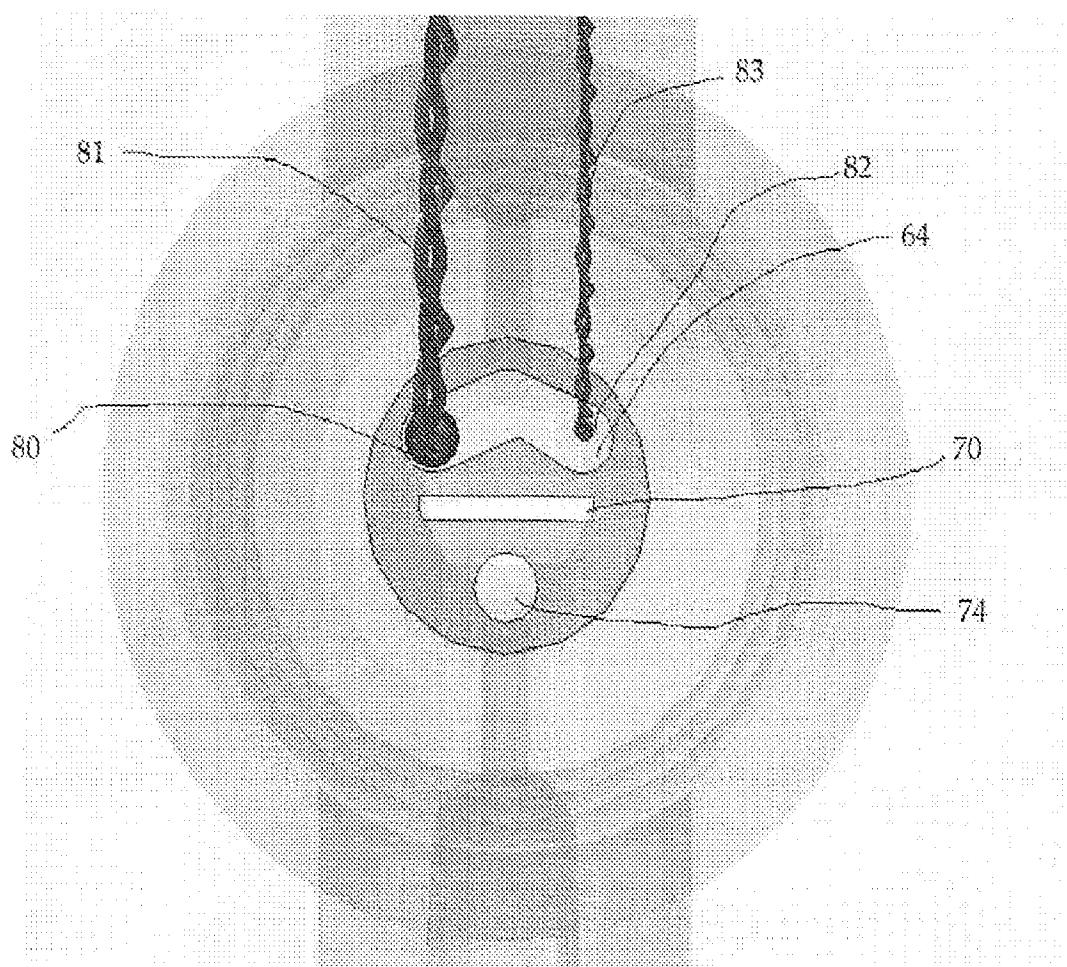


Figure 10B

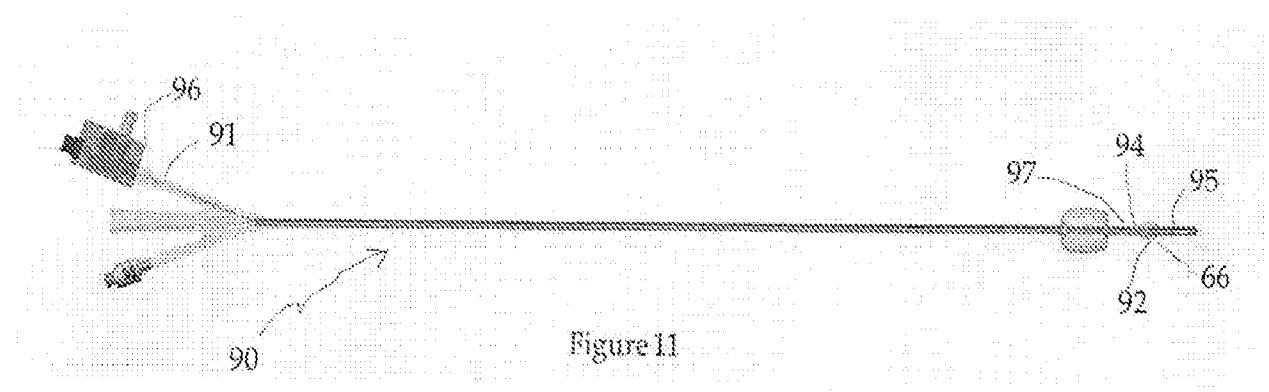


Figure 11

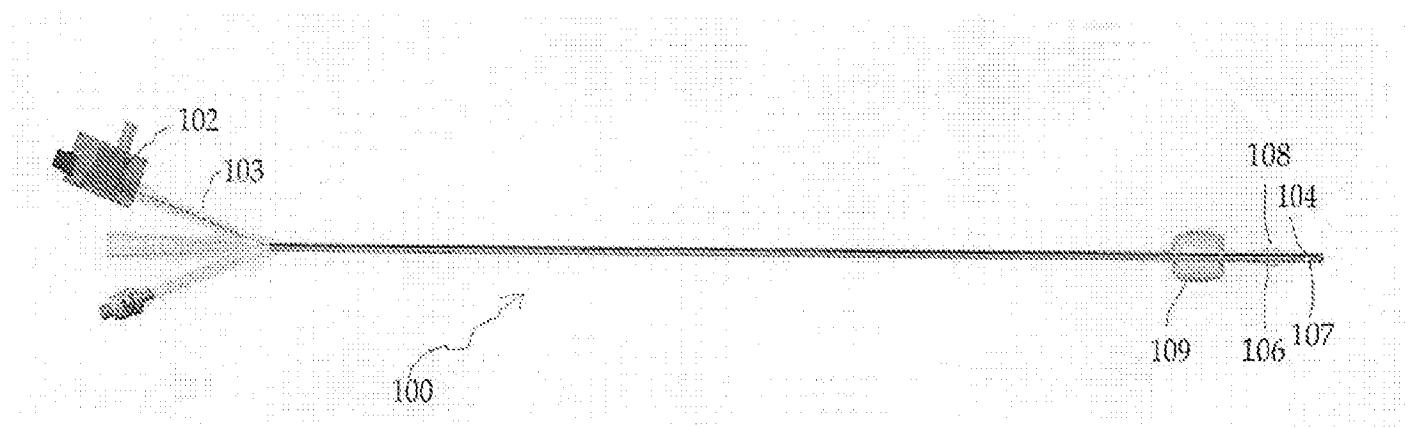


Figure 12

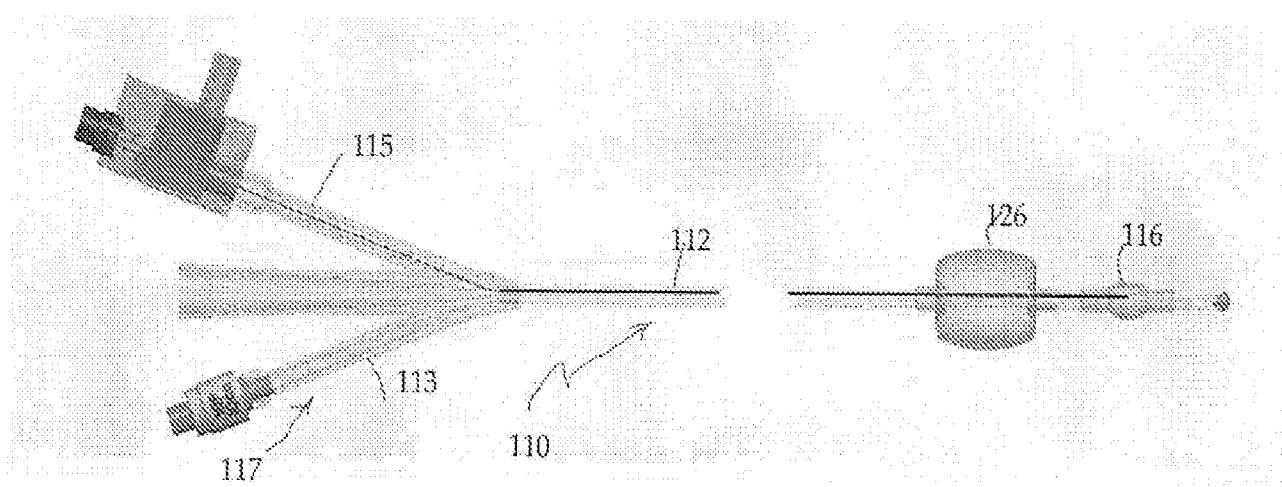


Figure 13A

9/31

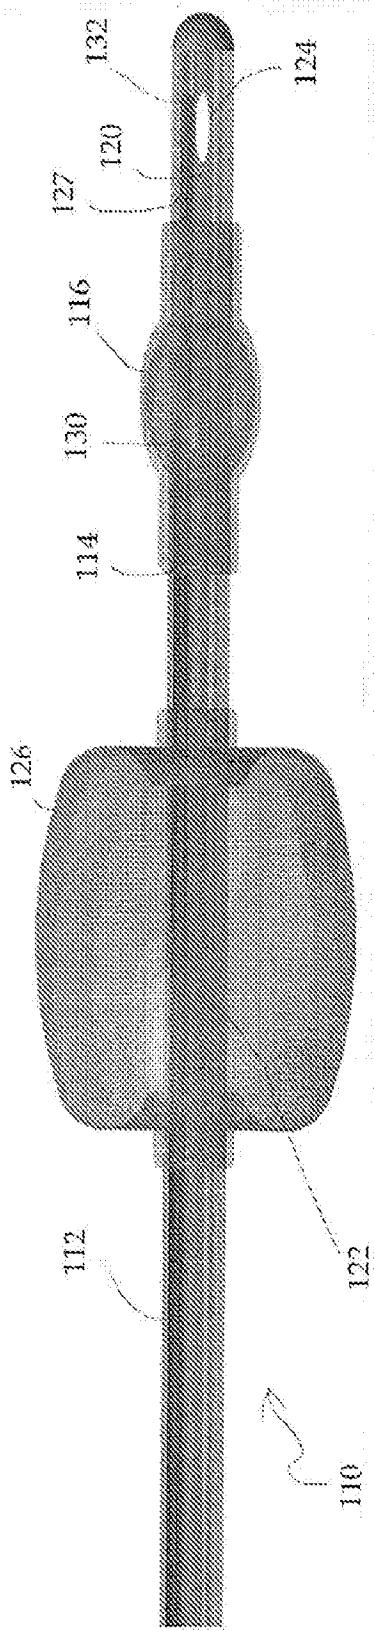


Figure 13B

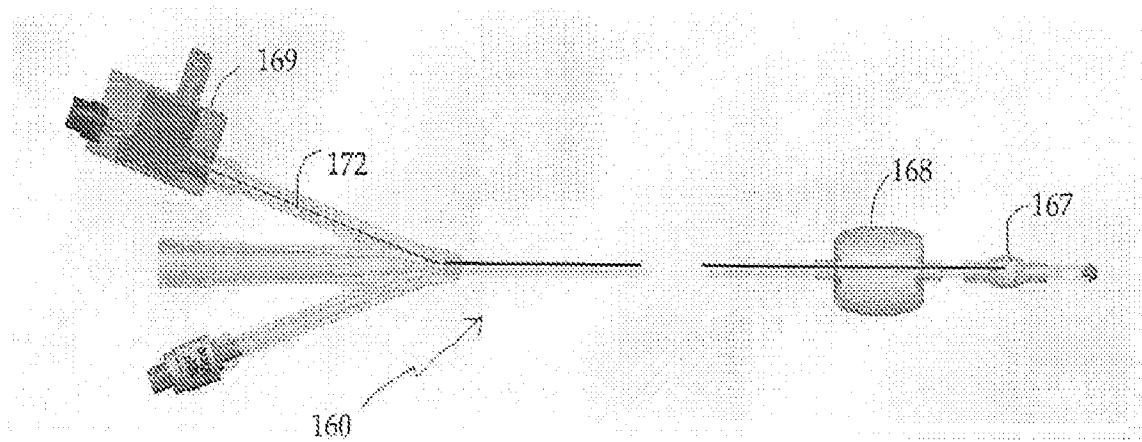


Figure 14A

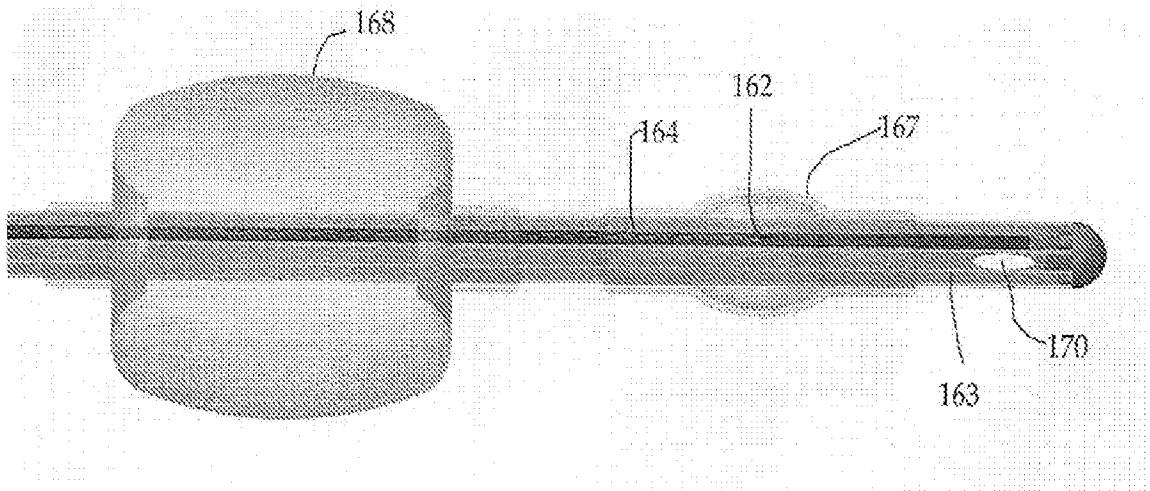


Figure 14B

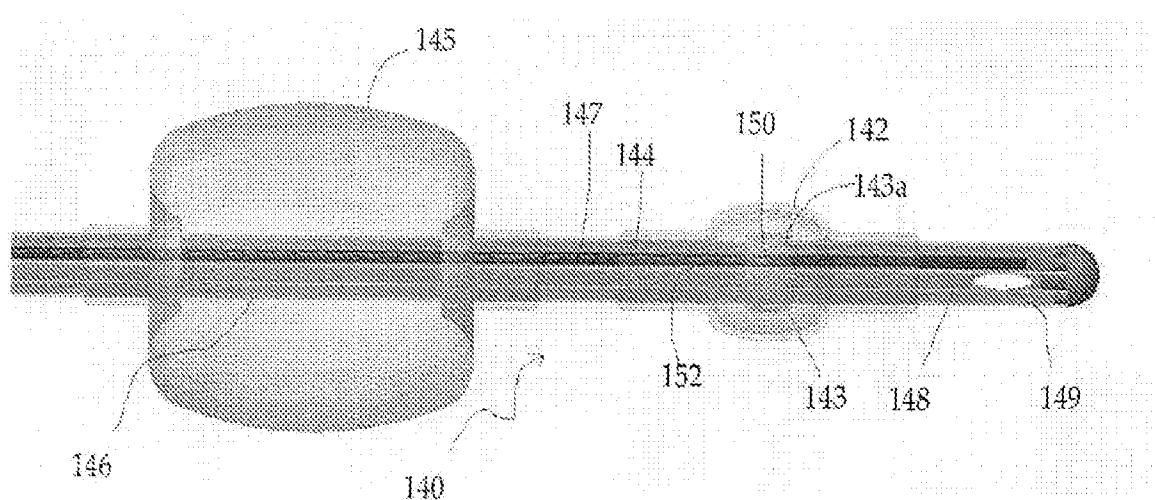


Figure 15

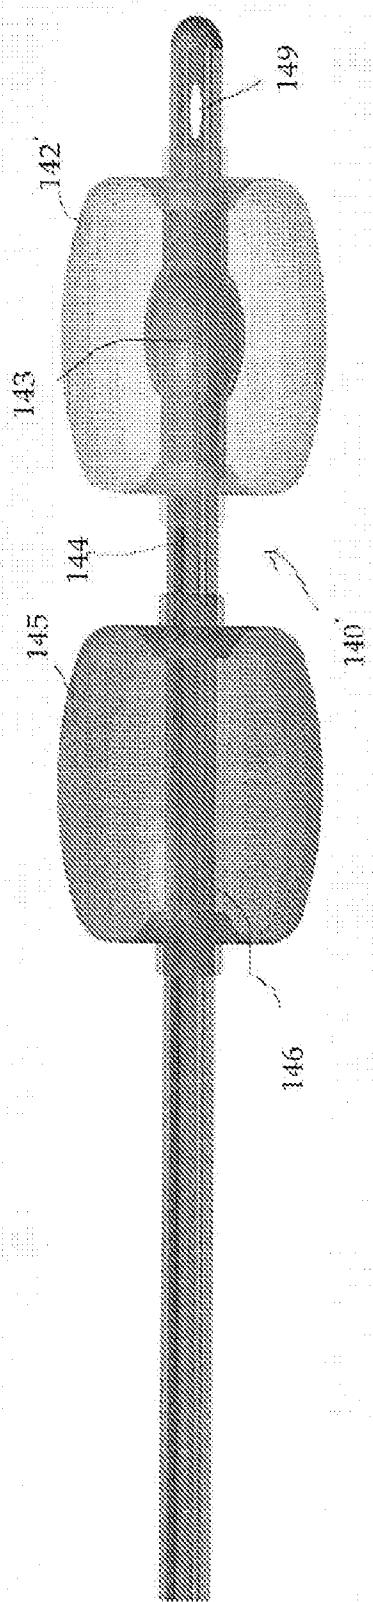


Figure 16

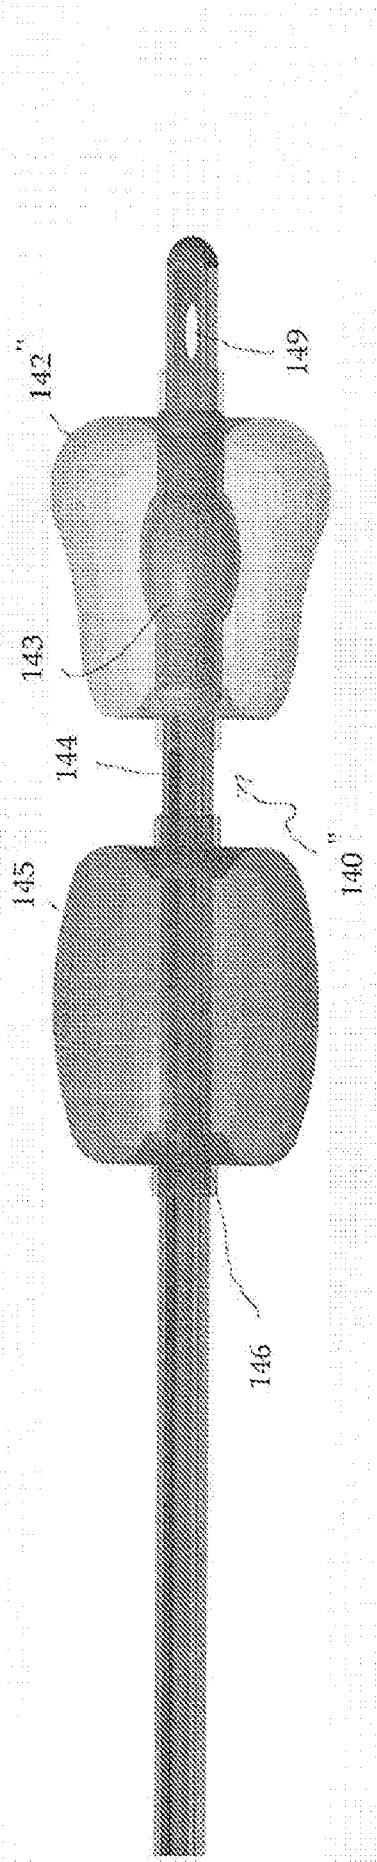


Figure 17A

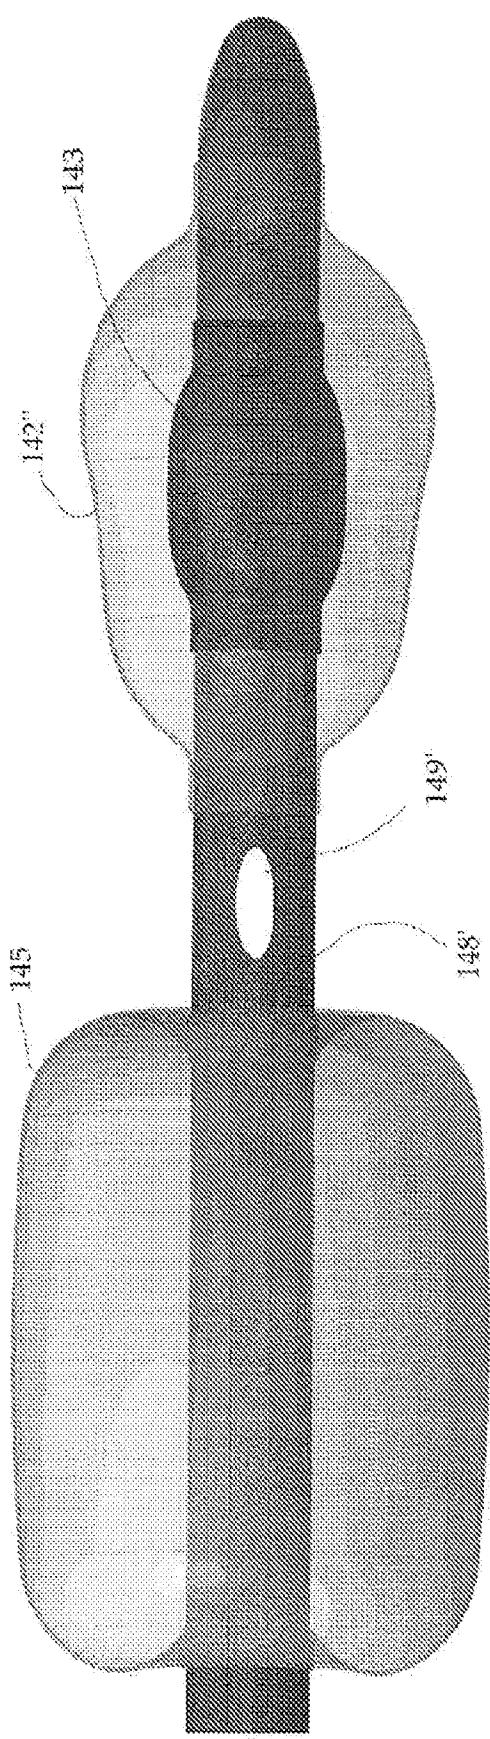


Figure 17B

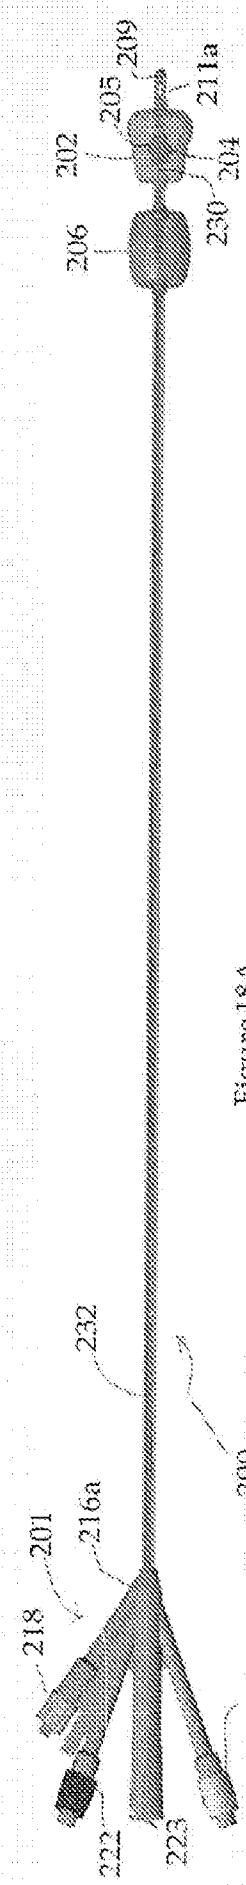


Figure 18A

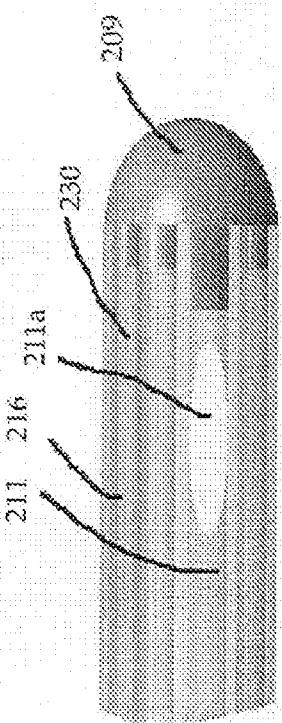
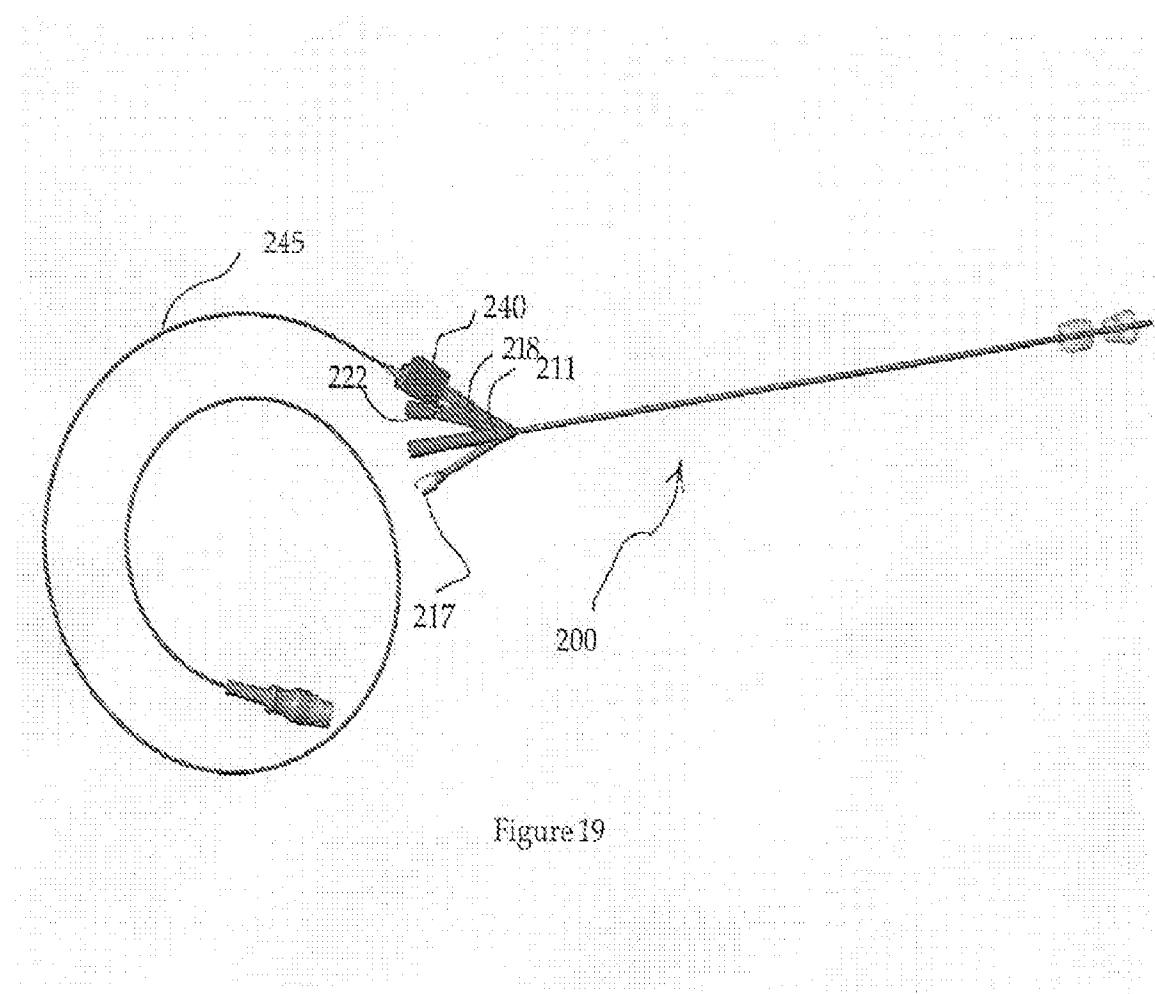


Figure 18B



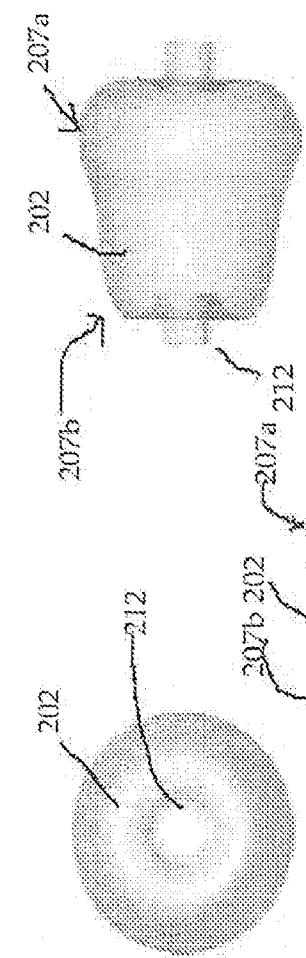


Figure 20A

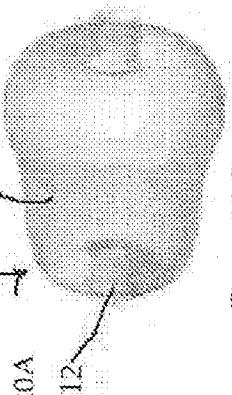
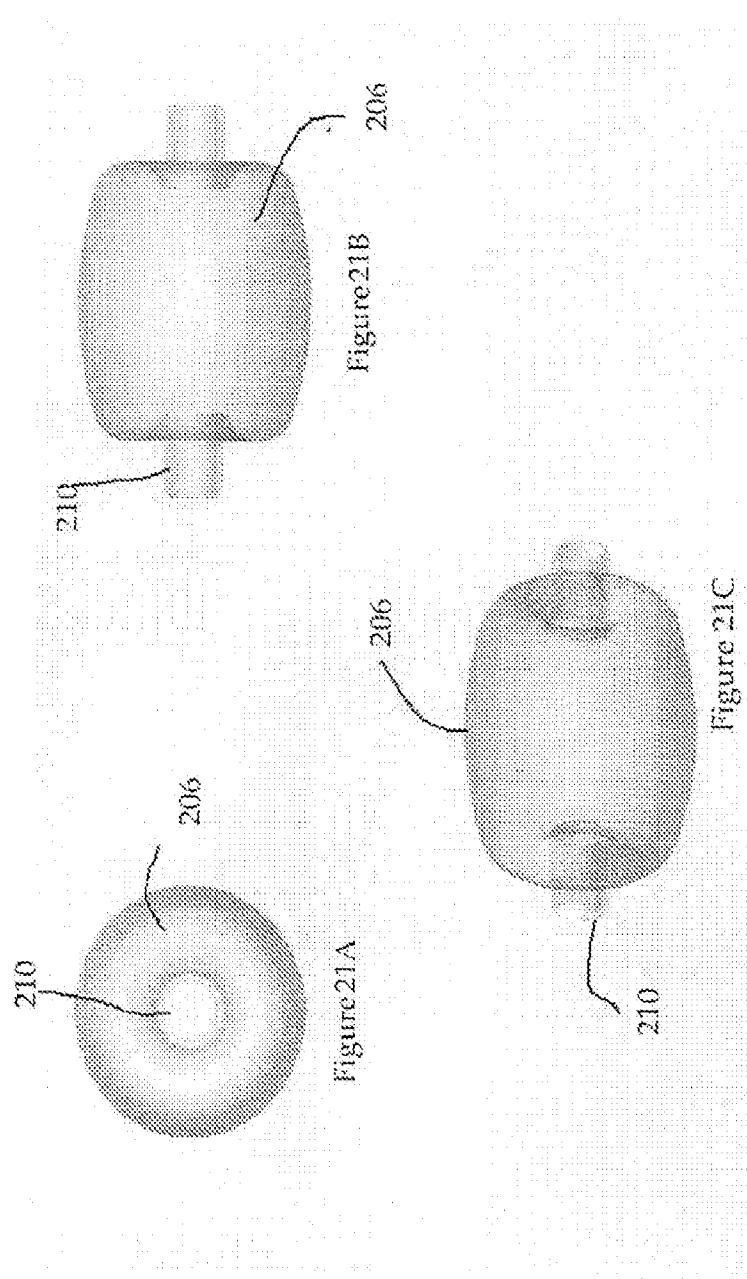


Figure 20B

Figure 20C



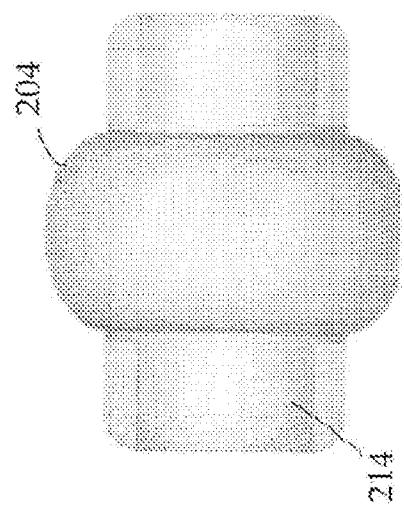


Figure 22B

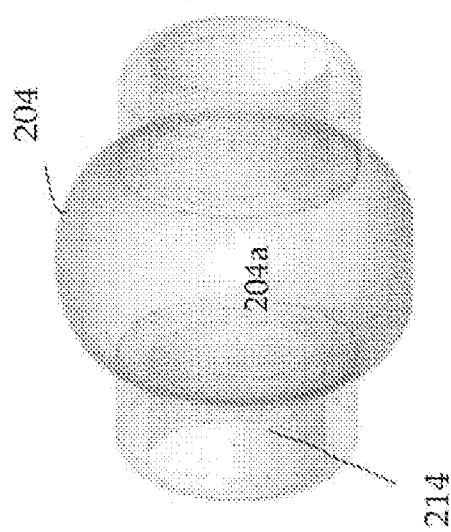


Figure 22C

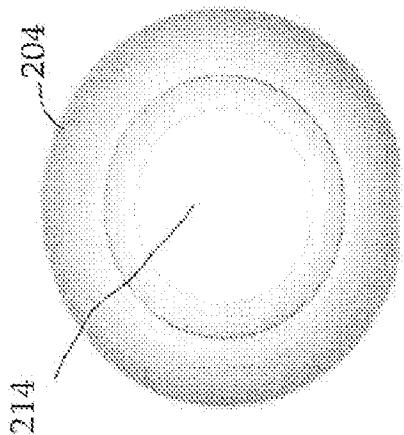


Figure 22A

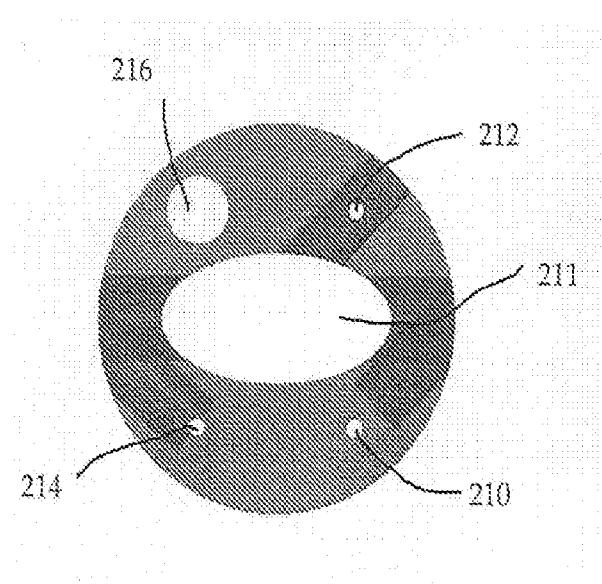


Figure 23

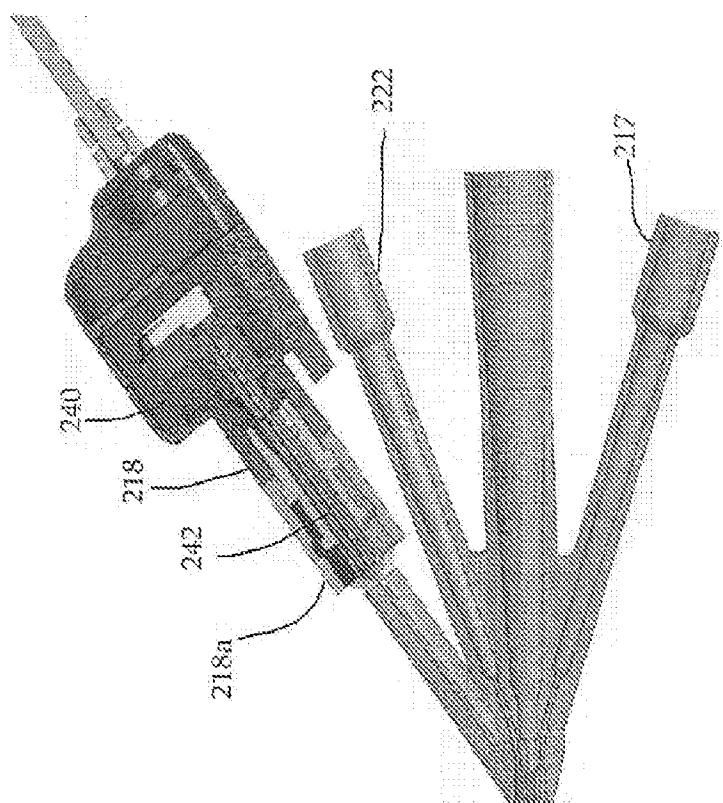


Figure 24B

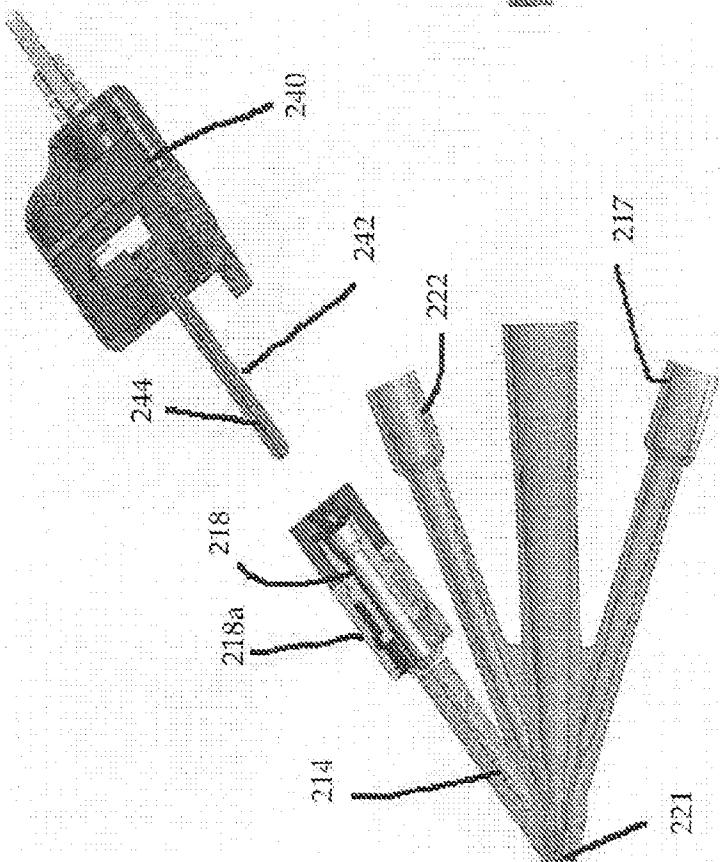


Figure 24A

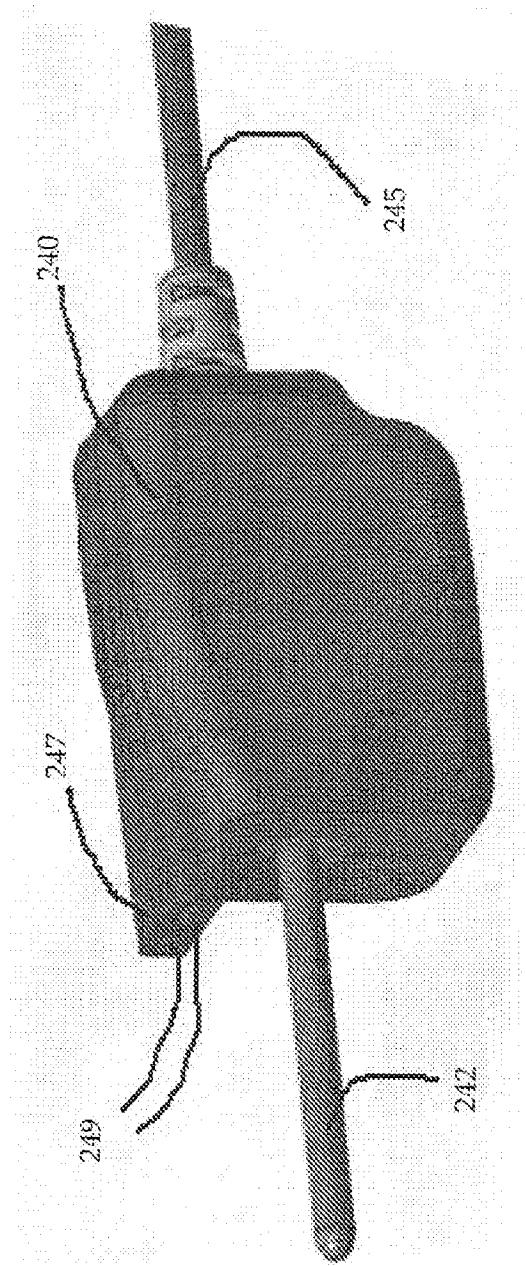


Figure 25A

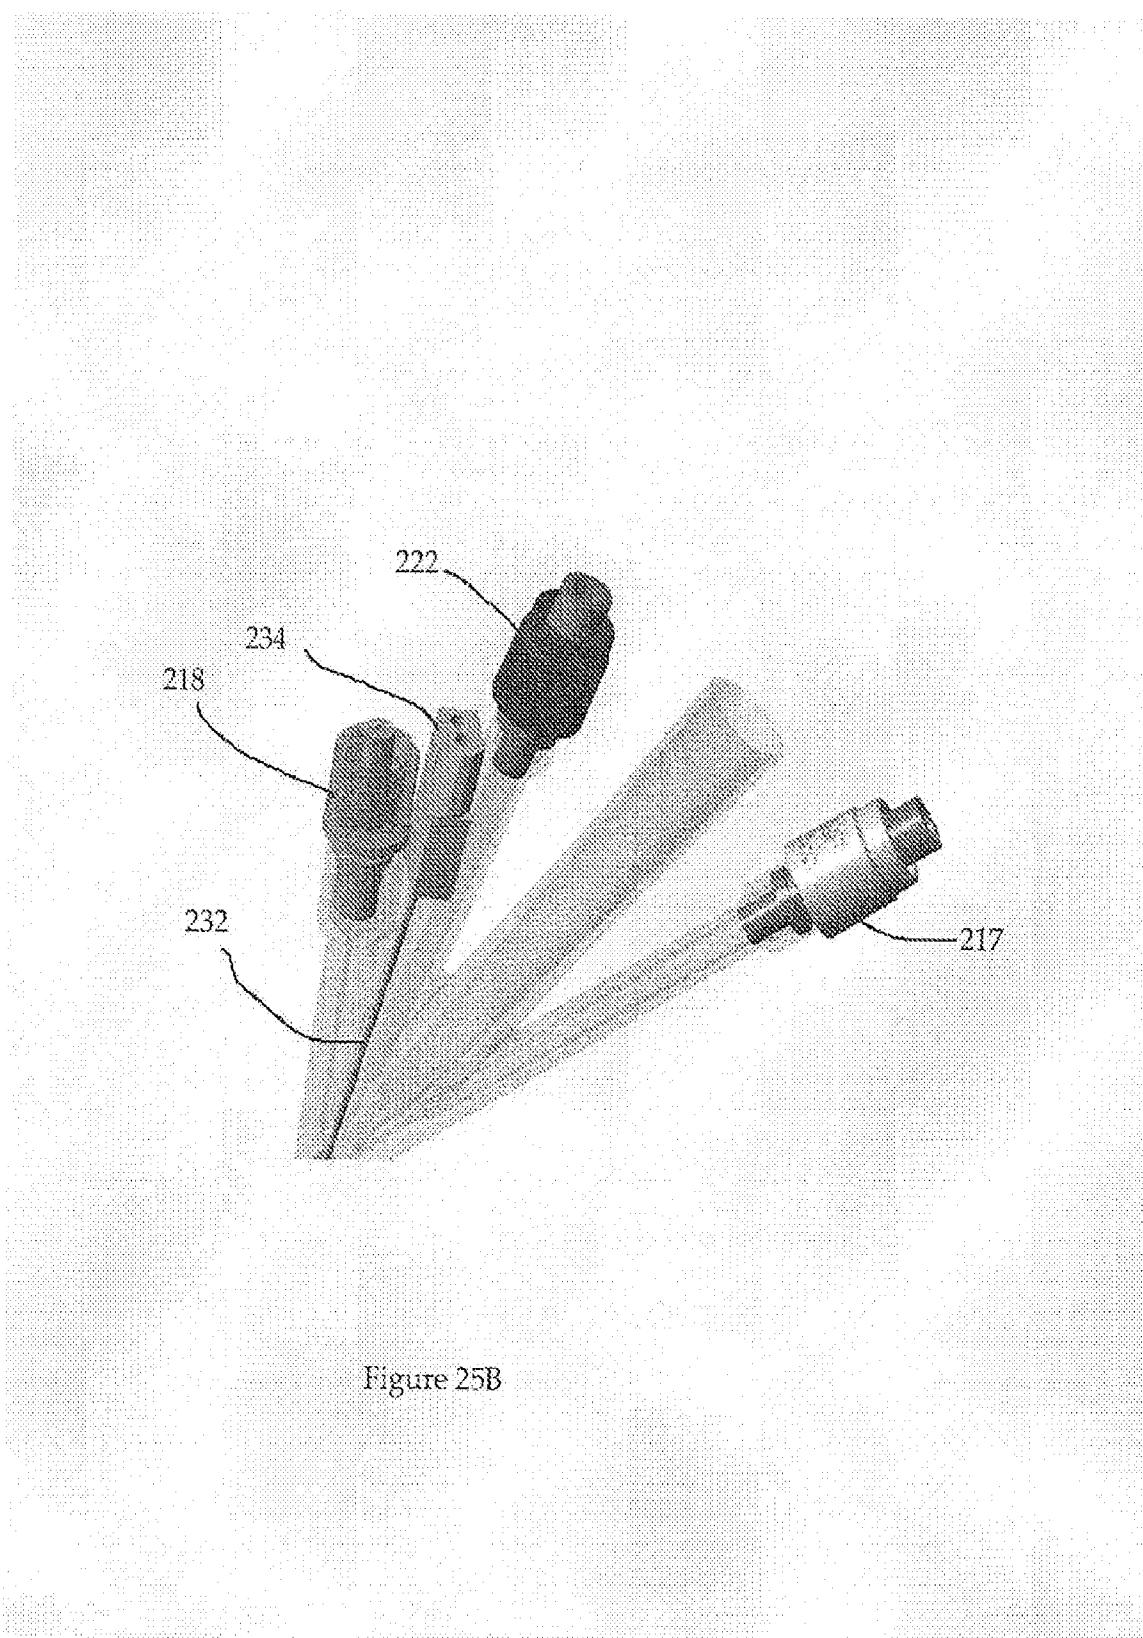


Figure 25B

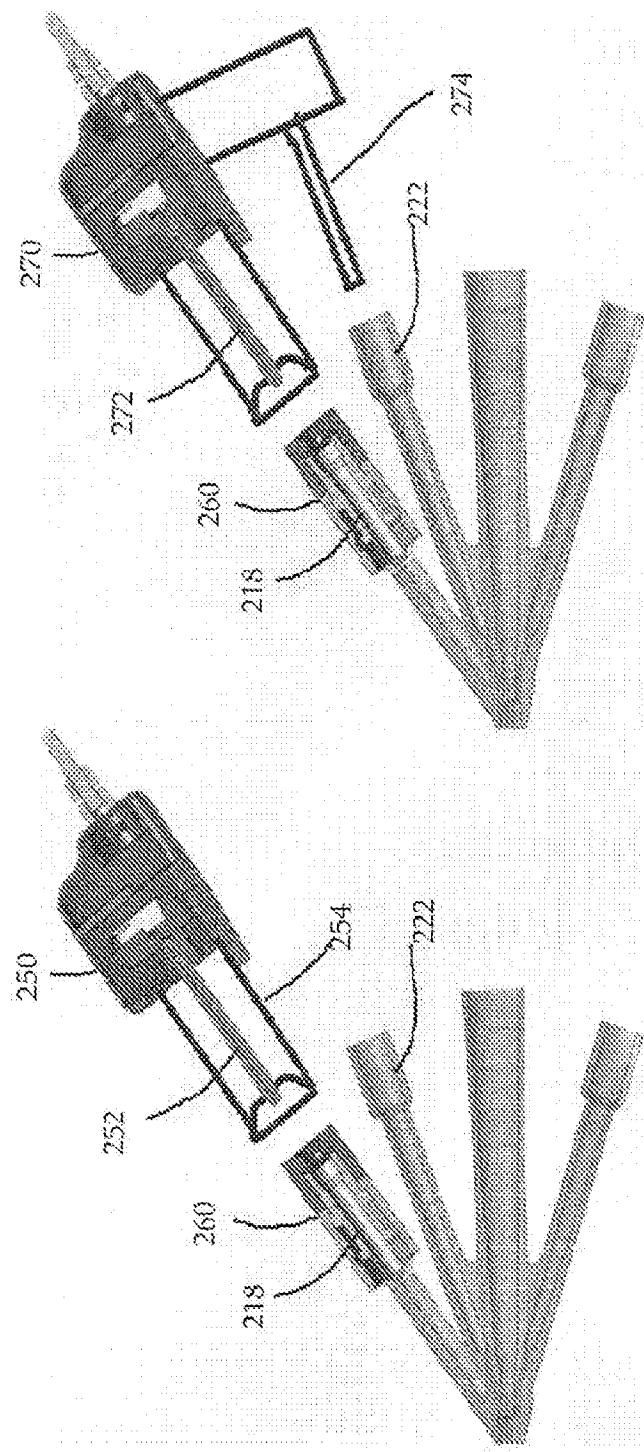


Figure 26

Figure 27

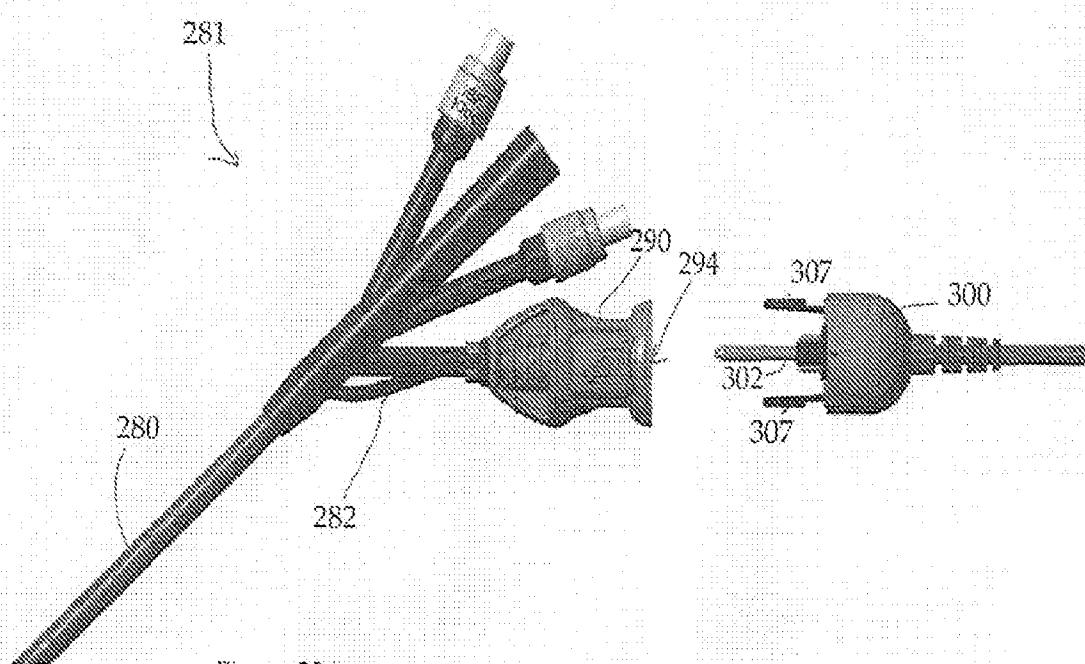


Figure 28A

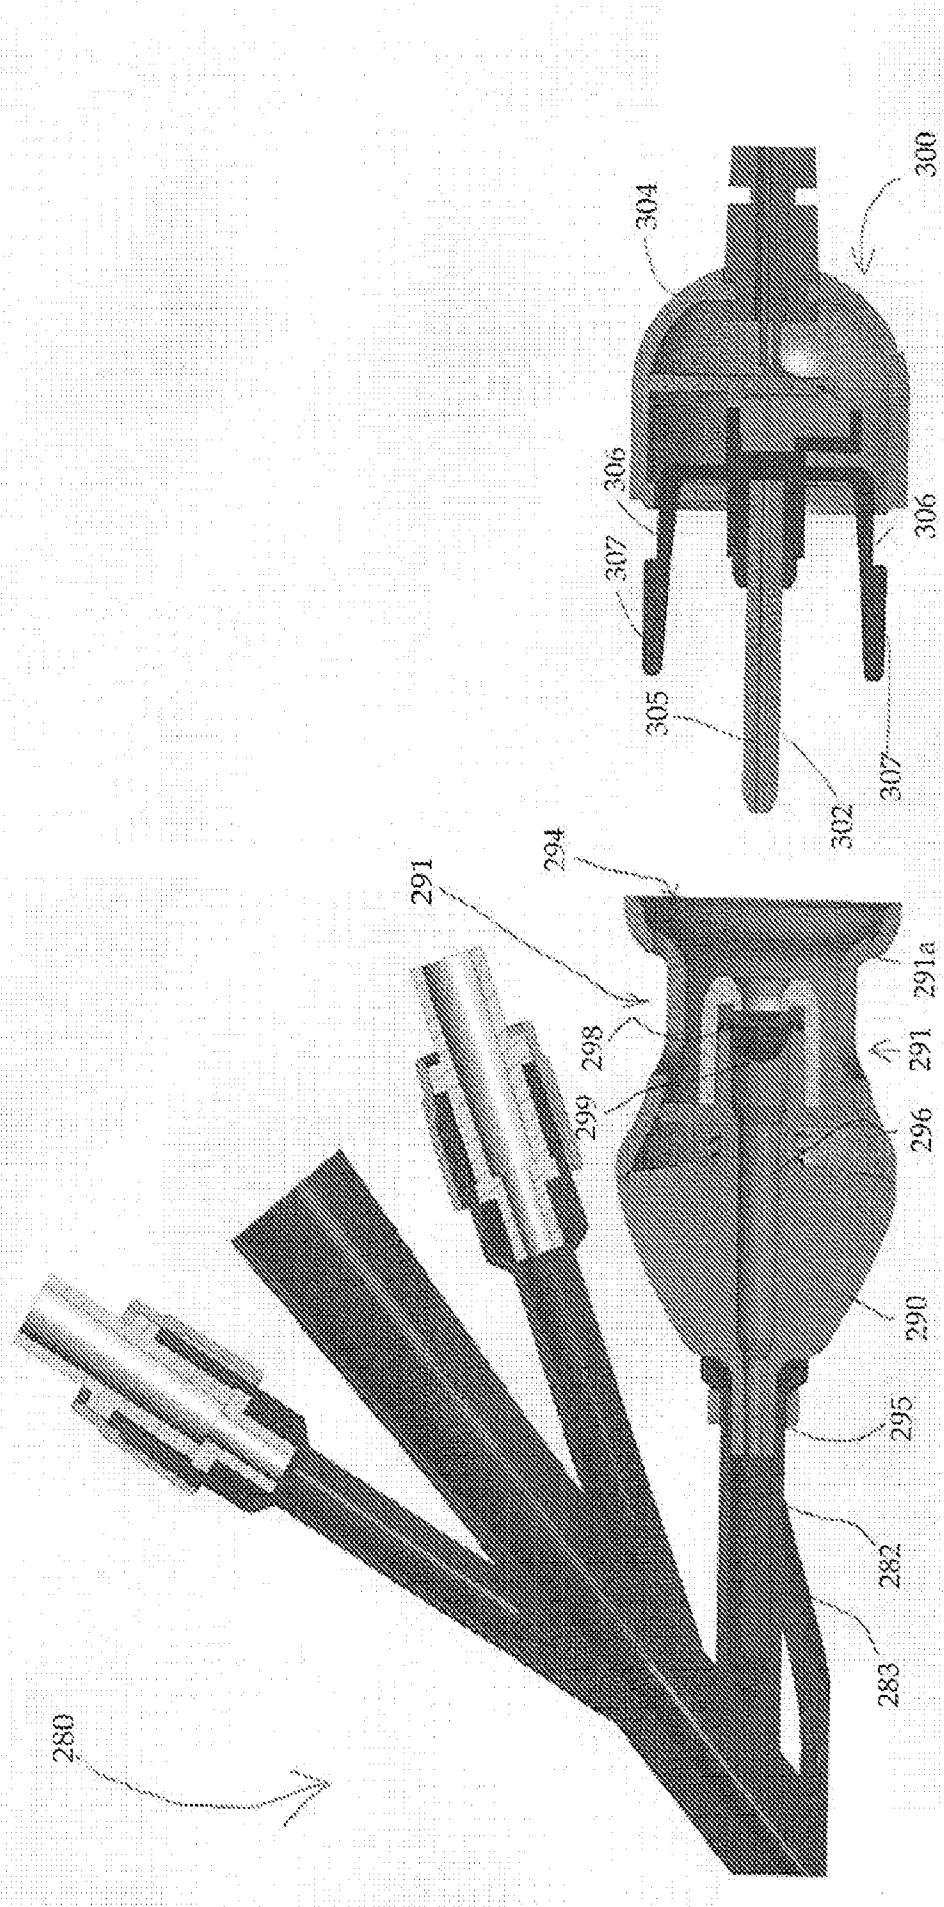


Figure 28B

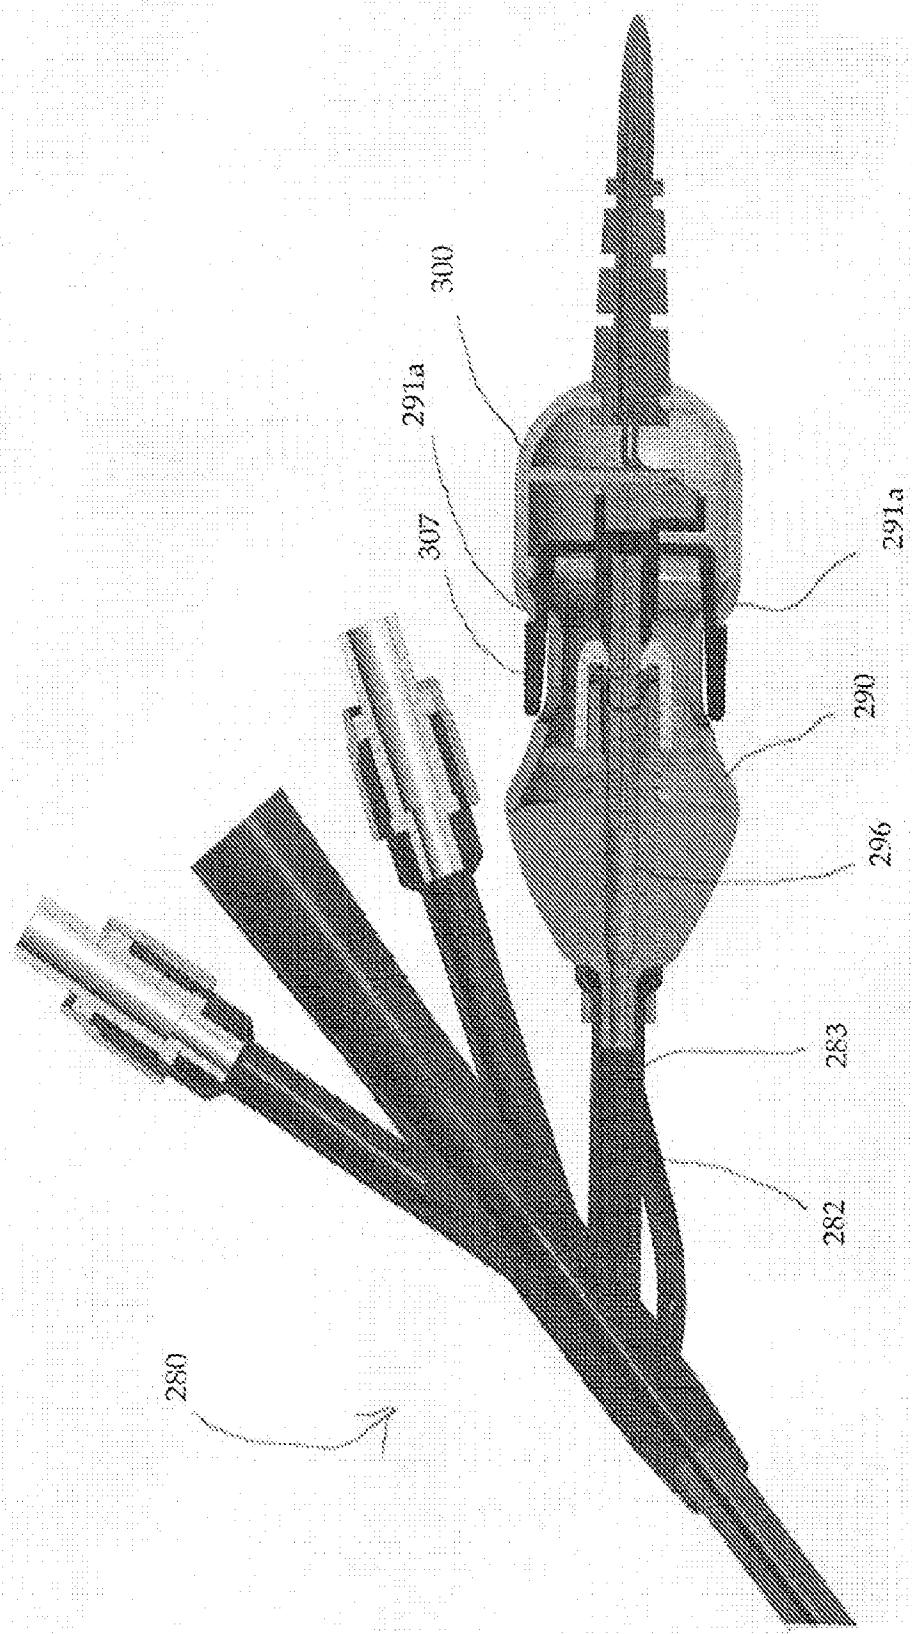


Figure 28C

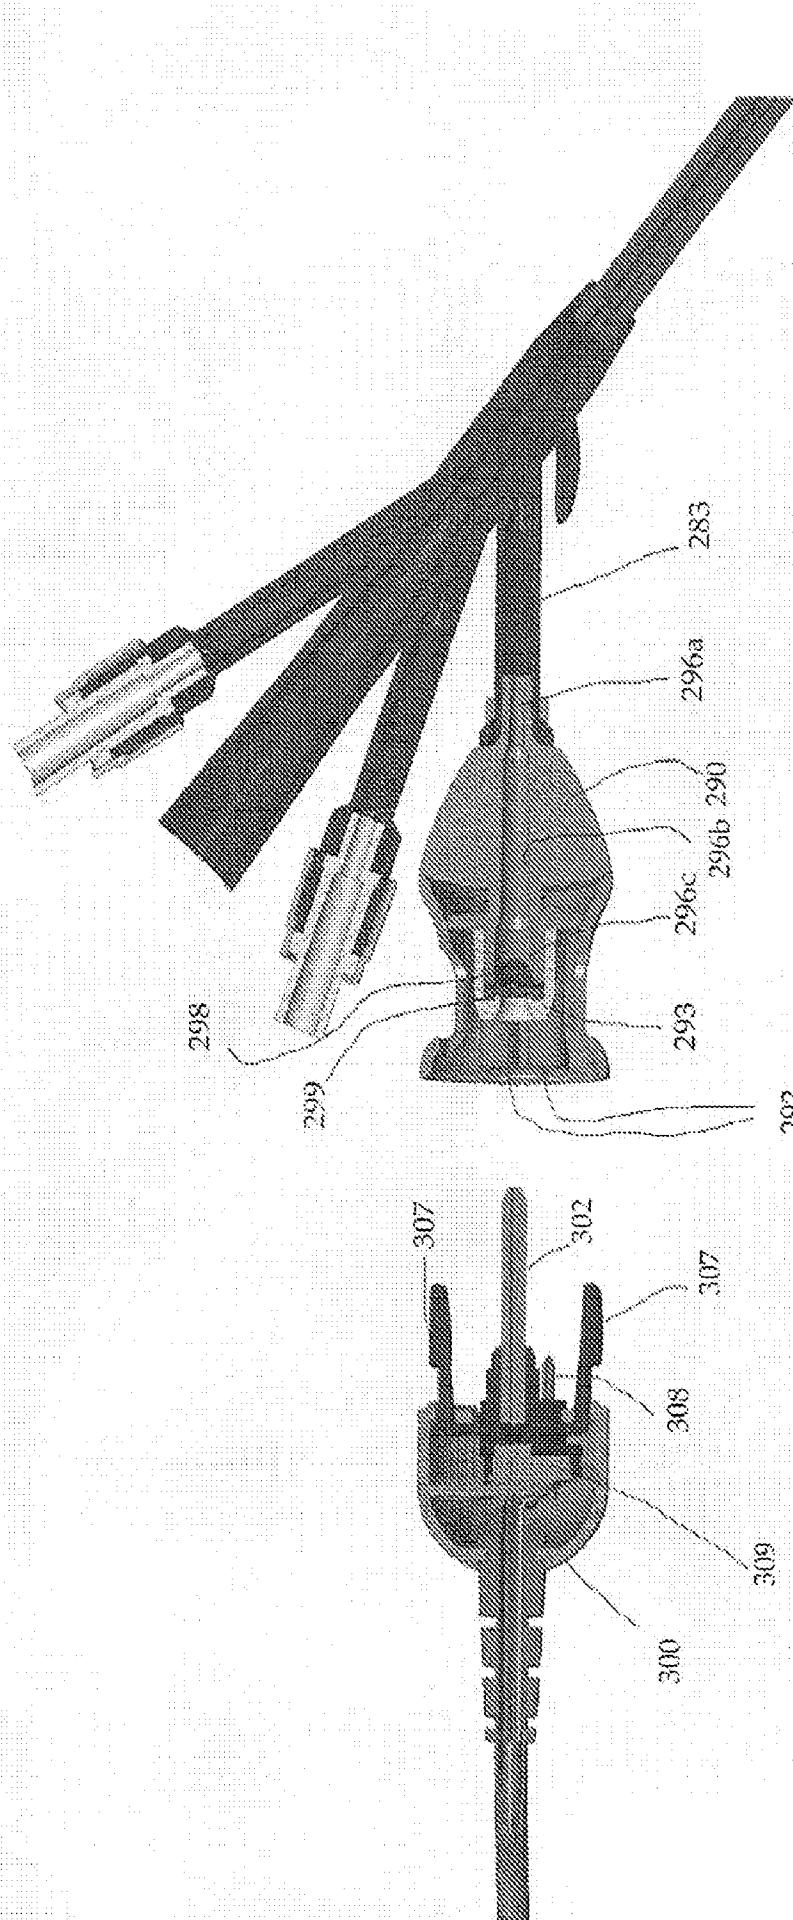


Figure 28D

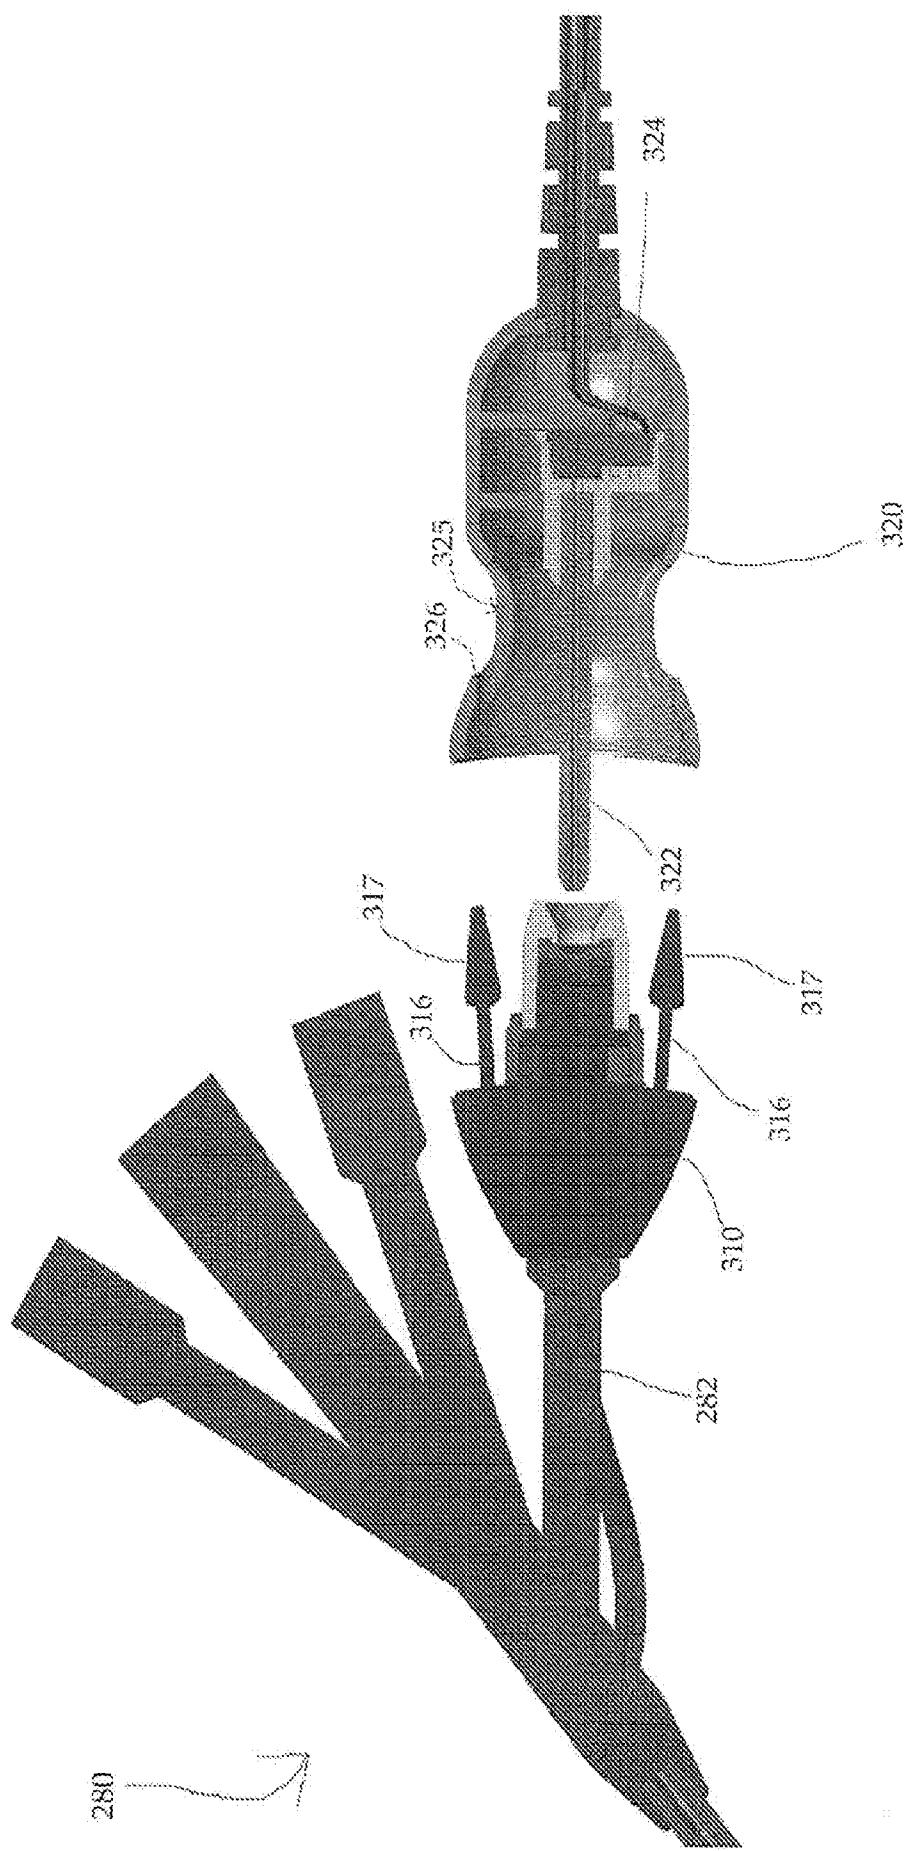


Figure 29A

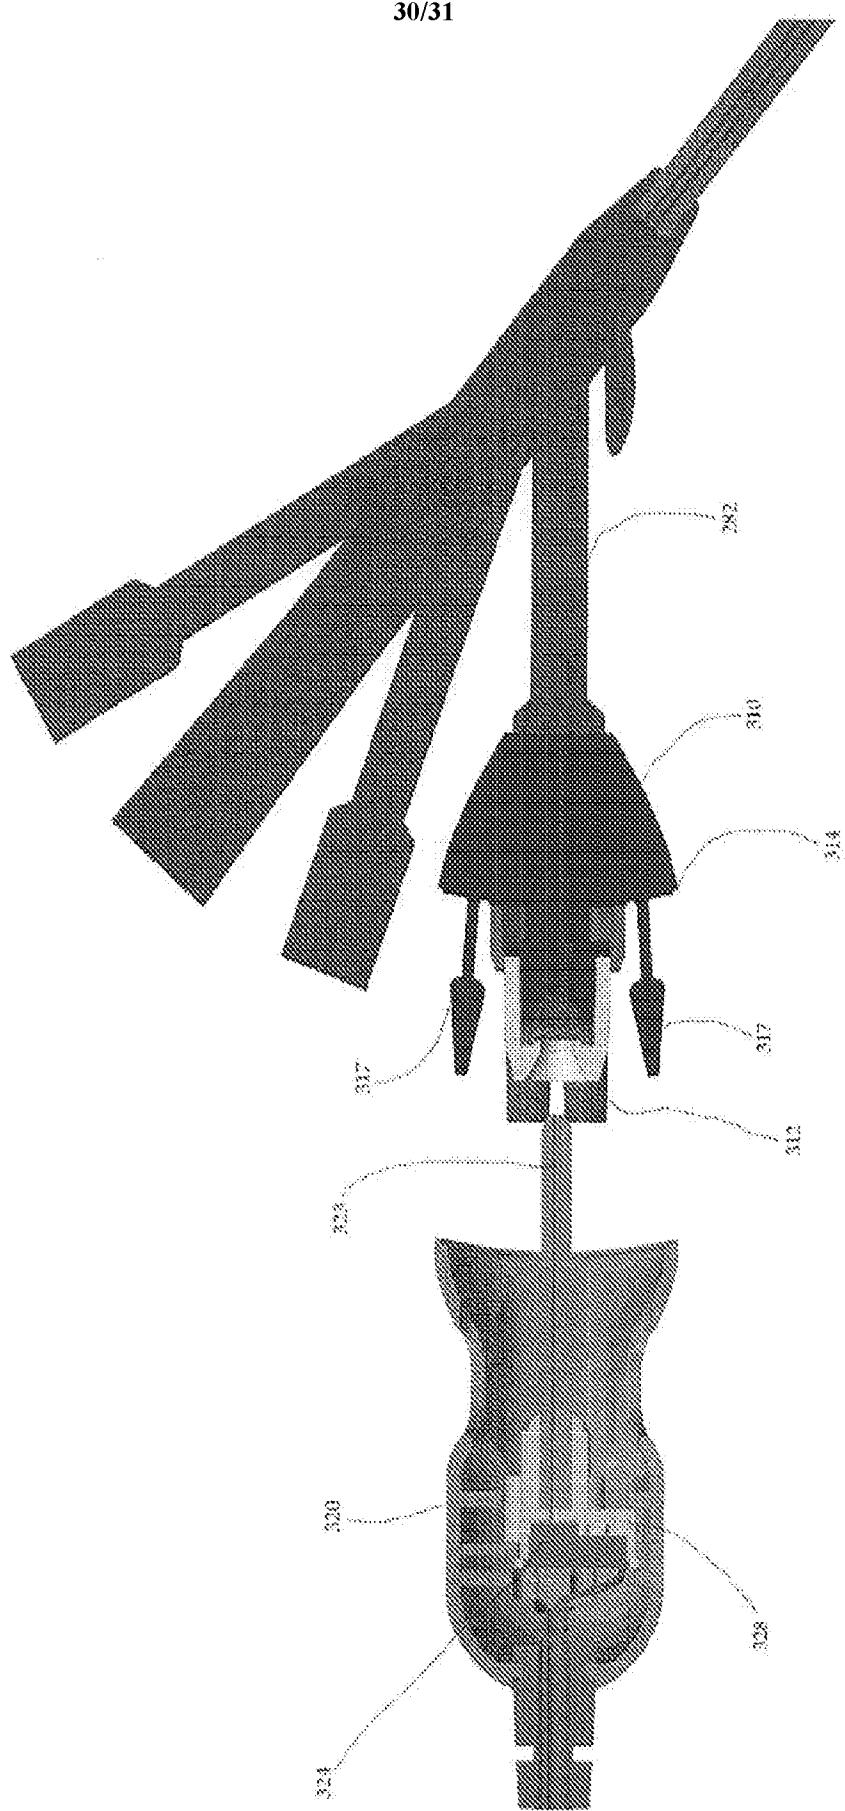


Figure 29B

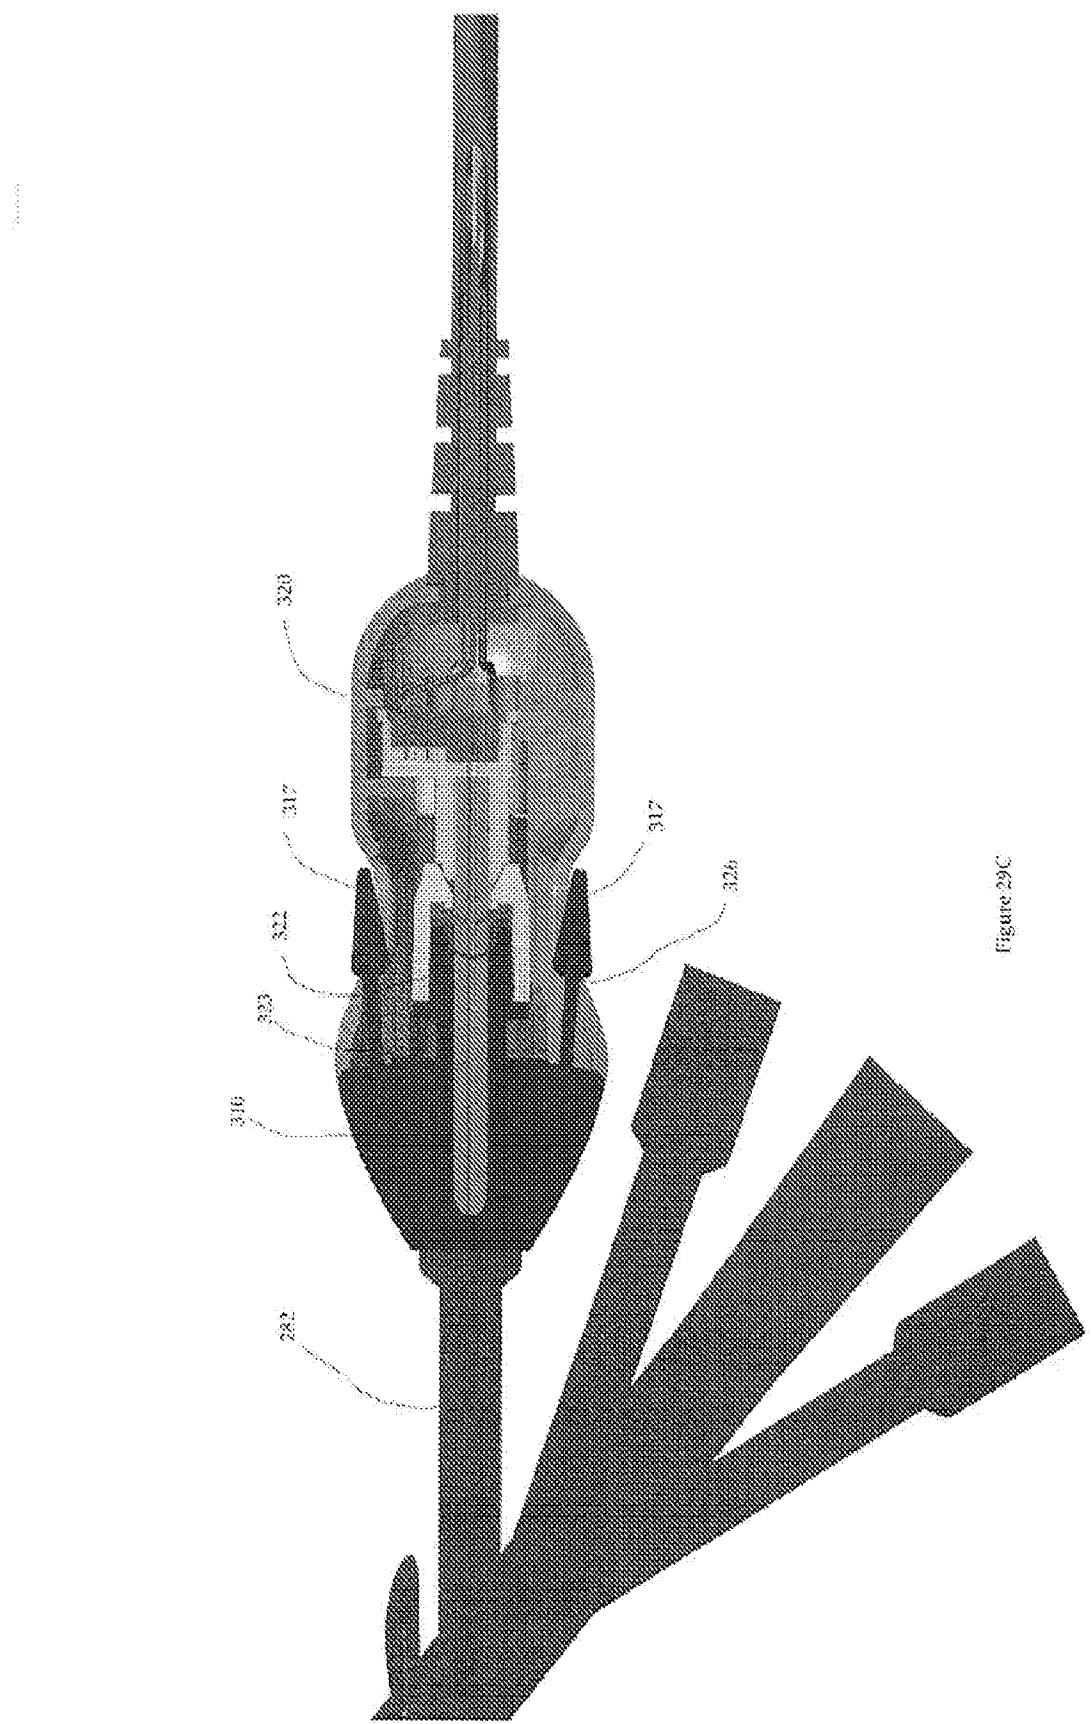


Figure 29C

INTERNATIONAL SEARCH REPORT

International application No PCT/US2018/028687

A. CLASSIFICATION OF SUBJECT MATTER INV. A61B5/00 A61B5/03 A61B5/20 A61M25/10 A61M39/10 ADD.
--

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2005/013834 A1 (ST GEORGES ENTPR LTD [GB]; ARULKUMARAN SABARATNAM [GB]) 17 February 2005 (2005-02-17) pages 5-7; figure 1- -----	1-3,7,9
Y	US 2015/366498 A1 (CHOI BUM-KYOO [KR] ET AL) 24 December 2015 (2015-12-24) paragraphs [0039] - [0046]; figures 2, 7 -----	4,5
A	WO 2015/191125 A1 (LEADING AGE SUPPLIES LLC [US]) 17 December 2015 (2015-12-17) paragraphs [0069] - [0071]; figure 10 -----	1
Y	-----	5
A	-----	1

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

23 July 2018

28/09/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Dydenko, Igor

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2018/028687

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.: **17-20, 37-40**
because they relate to subject matter not required to be searched by this Authority, namely:
see FURTHER INFORMATION sheet PCT/ISA/210
2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-5, 7, 9

Remark on Protest

The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/US2018/028687

Patent document cited in search report	Publication date	Patent family member(s)			Publication date
WO 2005013834	A1	17-02-2005	NONE		
US 2015366498	A1	24-12-2015	KR 20140087642 A		09-07-2014
			US 2015366498 A1		24-12-2015
			WO 2014104689 A1		03-07-2014
WO 2015191125	A1	17-12-2015	US 2015359996 A1		17-12-2015
			US 2016346504 A1		01-12-2016
			WO 2015191125 A1		17-12-2015

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-5, 7, 9

a multi-lumen catheter comprising:
an expandable outer balloon at a distal portion of the catheter, an expandable inner balloon positioned within the outer balloon,
wherein the outer balloon has a circumferential area greater than a circumferential area of the inner balloon, wherein in response to pressure within the bladder exerted on the first outer wall of the expanded outer balloon, the outer balloon deforms and exerts a pressure on the second outer wall of the expanded inner balloon to deform the inner balloon and compress the gas within the inner balloon and the first lumen to provide a finer measurement; and
a lumen communicating with the bladder to remove fluid from the bladder; and
a pressure sensor communicating with the gas filled chamber for measuring bladder pressure based on compression of gas caused by deformation of the expanded inner balloon deformed by the expanded outer balloon.
wherein the lumen has a side opening distal of the inner and outer balloons.

2. claims: 6, 31-36

a multi-lumen catheter comprising an expandable balloon forming a gas filled chamber to monitor pressure within the bladder and a temperature sensor positioned within a lumen to measure core body temperature.

3. claims: 8, 21-30

a multi-lumen catheter comprising an expandable balloon, a first lumen communicating with the balloon, a pressure sensor, wherein the pressure sensor is contained within a hub and the hub includes an elongated member extending distally therefrom, and connection of the hub to a first port of the catheter automatically inserts the elongated member into the first lumen to advance air into the inner balloon to expand the inner balloon.

4. claims: 10-16

a multi-lumen catheter insertable into a patient for monitoring pressure, the catheter comprising:
an expandable balloon, a lumen communicating with the balloon, the balloon and the lumen forming a gas filled chamber to monitor pressure within the bladder,
and an additional lumen and a stabilizing balloon, the

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

additional lumen communicating with the stabilizing balloon to inflate the stabilizing balloon to stabilize the position of the catheter.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box II.1

Claims Nos.: 17-20, 37-40

Claims 17-20 and 37-40 relate to a method for treatment of the human or animal body surgery, because they all comprise the step of inserting a catheter into a bladder of a patient, which is an invasive (i.e. surgical) procedure. This Authority is not required to search the present application with respect to the aforementioned claims.