

(10) **Patent No.:** US 8,132,032 B2  
(45) **Date of Patent:** Mar. 6, 2012

- (56) **References Cited**

- U.S. PATENT DOCUMENTS

- |              |      |         |                     |         |
|--------------|------|---------|---------------------|---------|
| 6,308,278    | B1 * | 10/2001 | Khouli et al. ....  | 713/323 |
| 6,446,213    | B1 * | 9/2002  | Yamaki ....         | 713/300 |
| 6,542,996    | B1 * | 4/2003  | Chang et al. ....   | 713/300 |
| 7,489,579    | B2 * | 2/2009  | Ho ....             | 365/222 |
| 2003/0188115 | A1 * | 10/2003 | Maewaza ....        | 711/162 |
| 2004/0107310 | A1 * | 6/2004  | Lin ....            | 711/106 |
| 2005/0071692 | A1 * | 3/2005  | Chaiken et al. .... | 713/300 |
| 2007/0171751 | A1 * | 7/2007  | Ho ....             | 365/222 |
| 2007/0219644 | A1 * | 9/2007  | Sonobe ....         | 700/12  |
| 2008/0082815 | A1 * | 4/2008  | Kawano et al. ....  | 713/2   |
| 2009/0106573 | A1 * | 4/2009  | Lin ....            | 713/324 |

- \* cited by examiner

- Primary Examiner — Vincent Tran


- (74) *Attorney, Agent, or Firm* — Apex Juris, pllc; Tracy M. Heims


- (57) **ABSTRACT**

- A power-saving electronic device for use with a computer motherboard in a “suspend to memory” state is disclosed. The power-saving electronic device enables compulsory interruption of power supply to a south bridge chip and a super input output (SIO) chip of the computer motherboard in the “suspend to memory” state, such as an S3 state of Advanced Configuration and Power Interface (ACPI), so as to save power. After a user presses a power switch, the power-saving electronic device enables the south bridge chip and SIO chip to be powered on by a standby power supplied thereto and enables the computer motherboard to remain capable of awakening and resuming from the S3 state.

- 21 Claims, 4 Drawing Sheets**

- Field of Classification Search** ..... 713/1, 2,  
713/320, 324, 323  
See application file for complete search history.

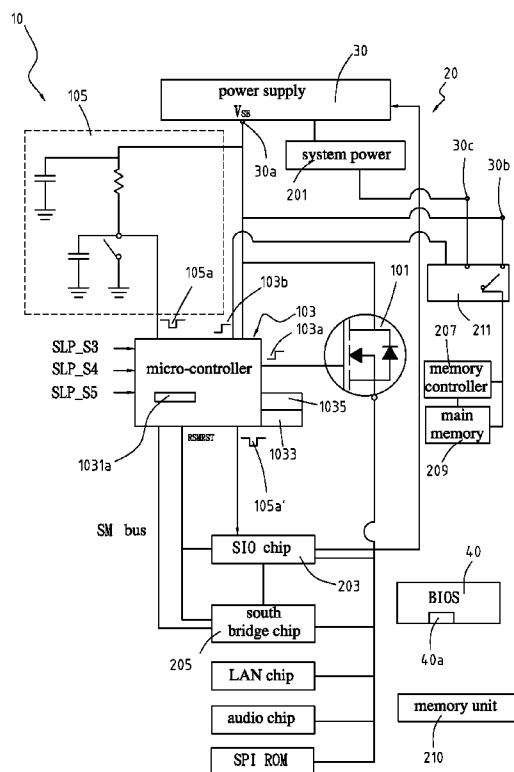

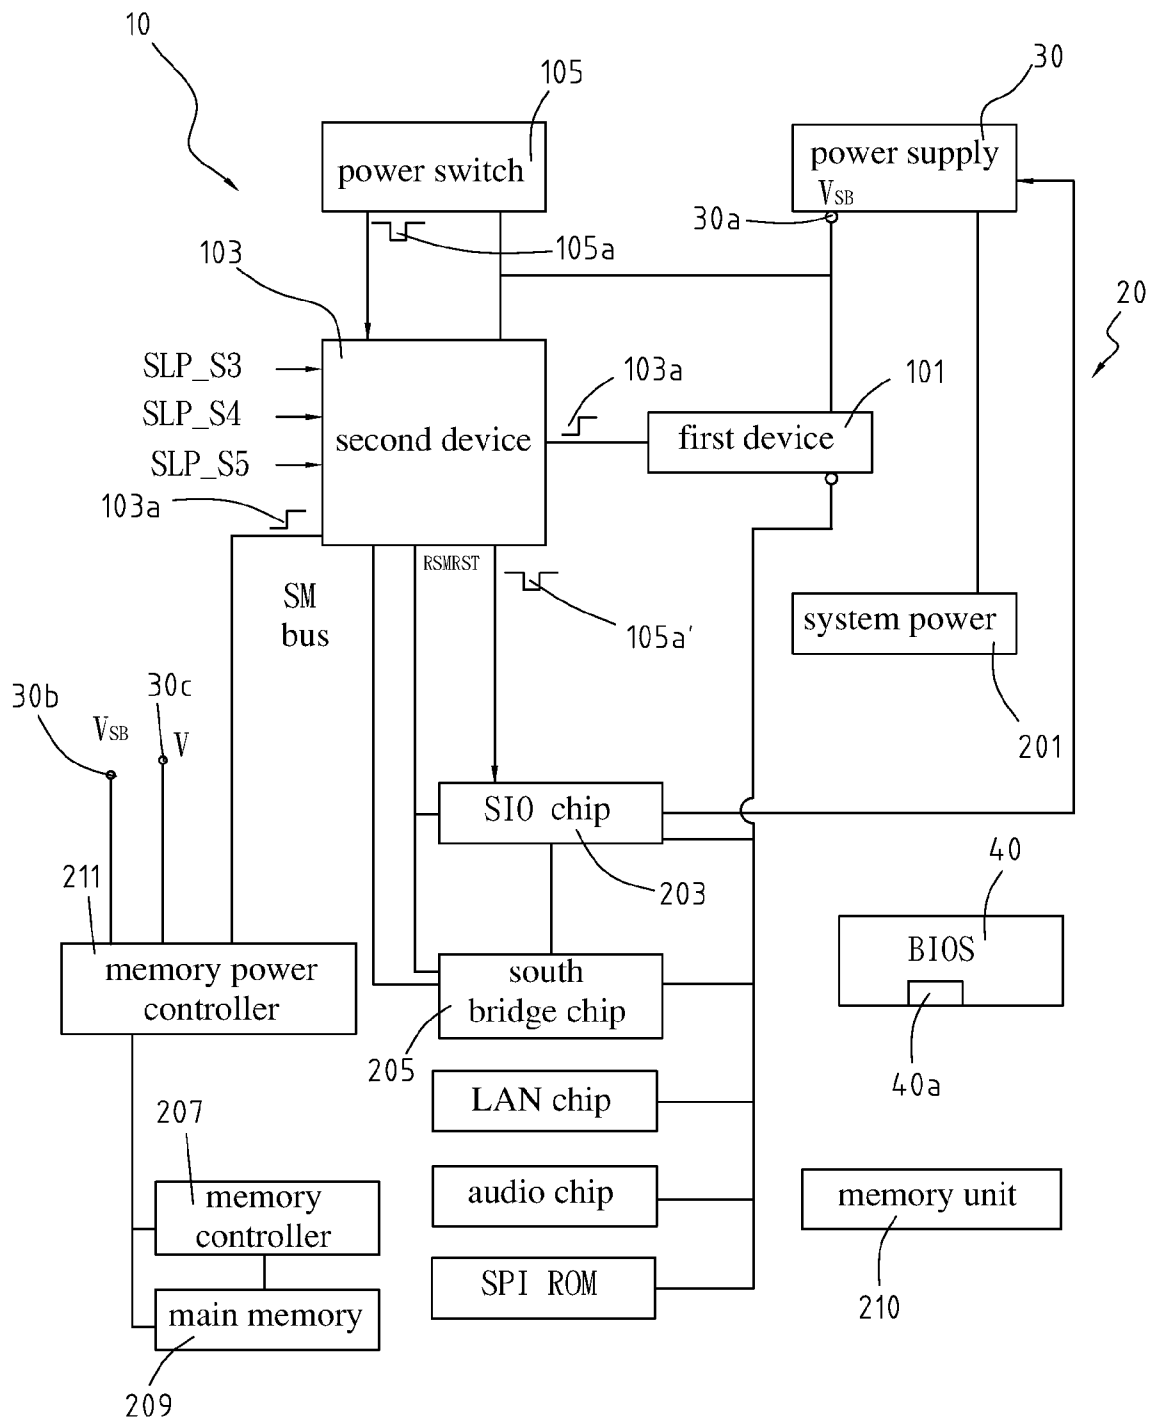**FIG. 1**

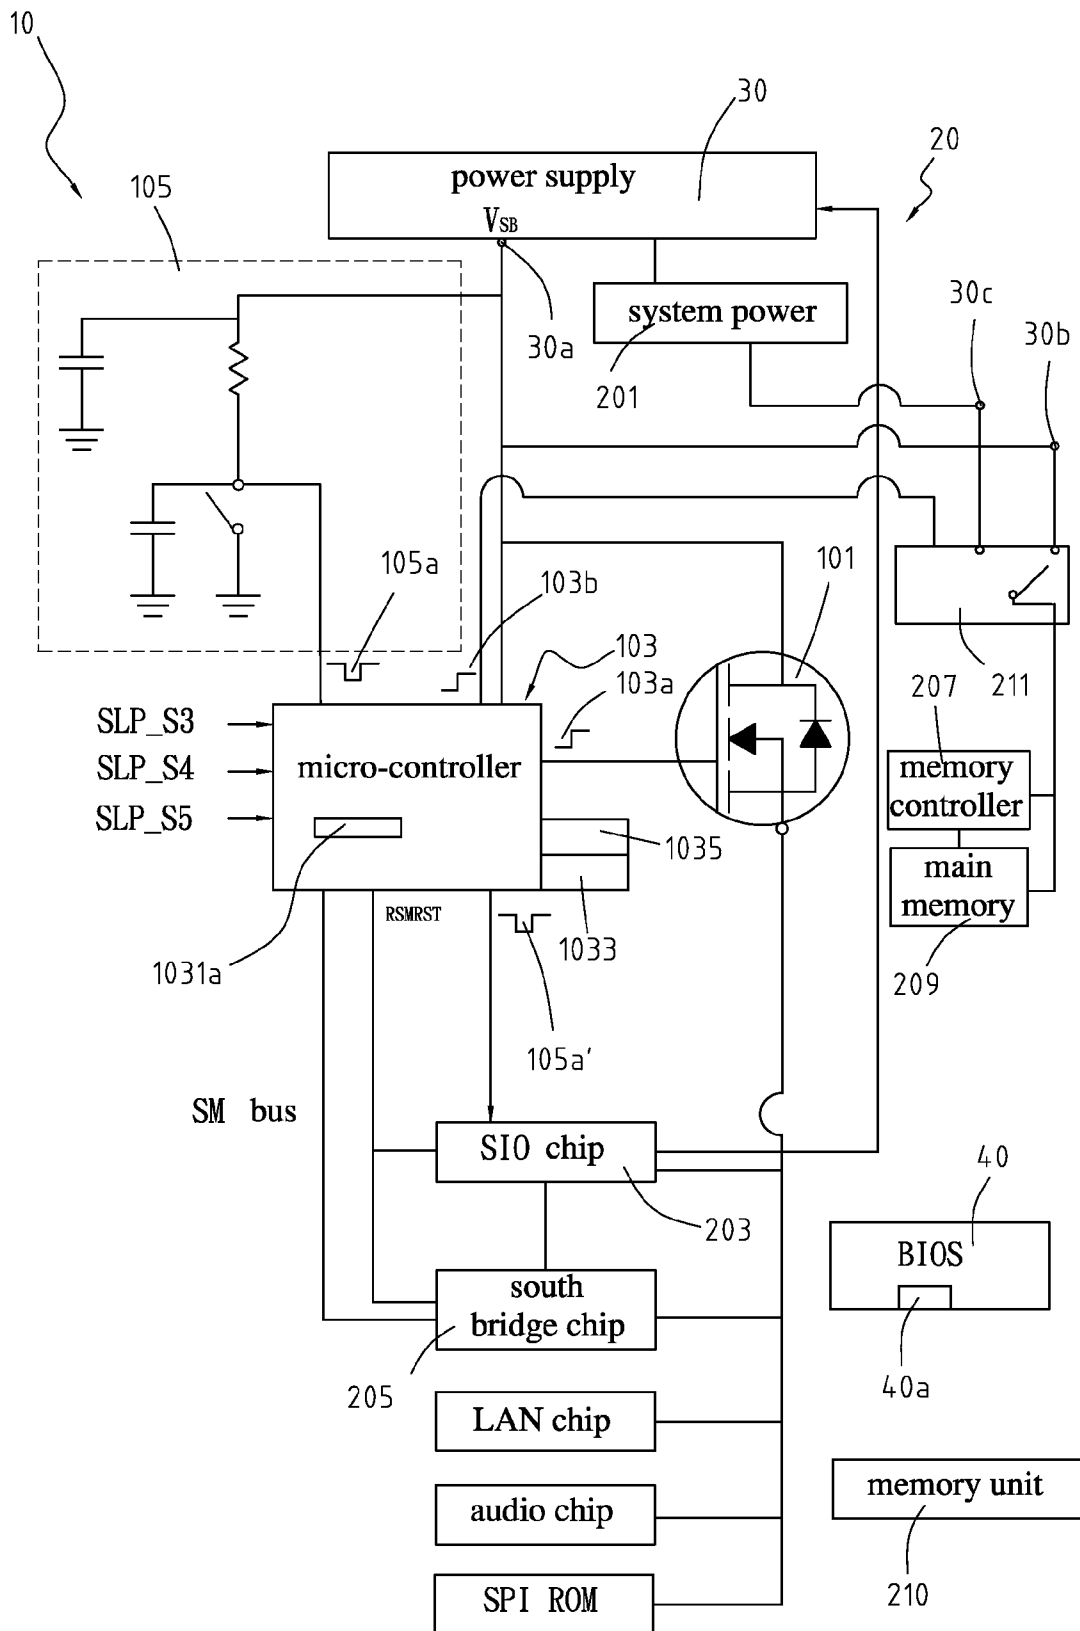
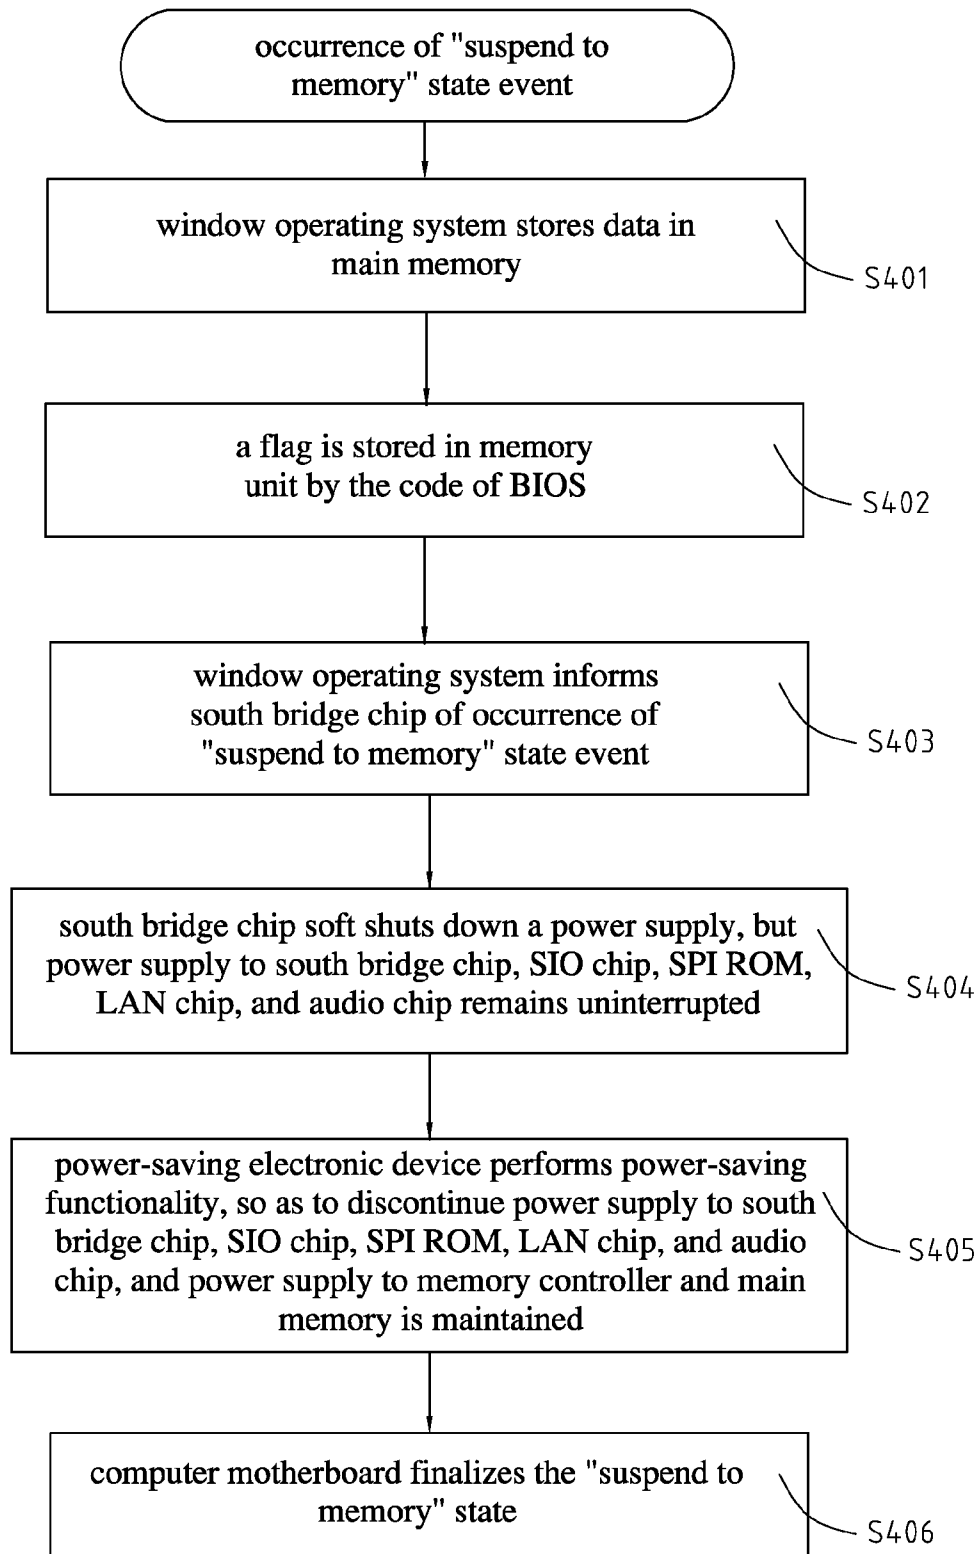
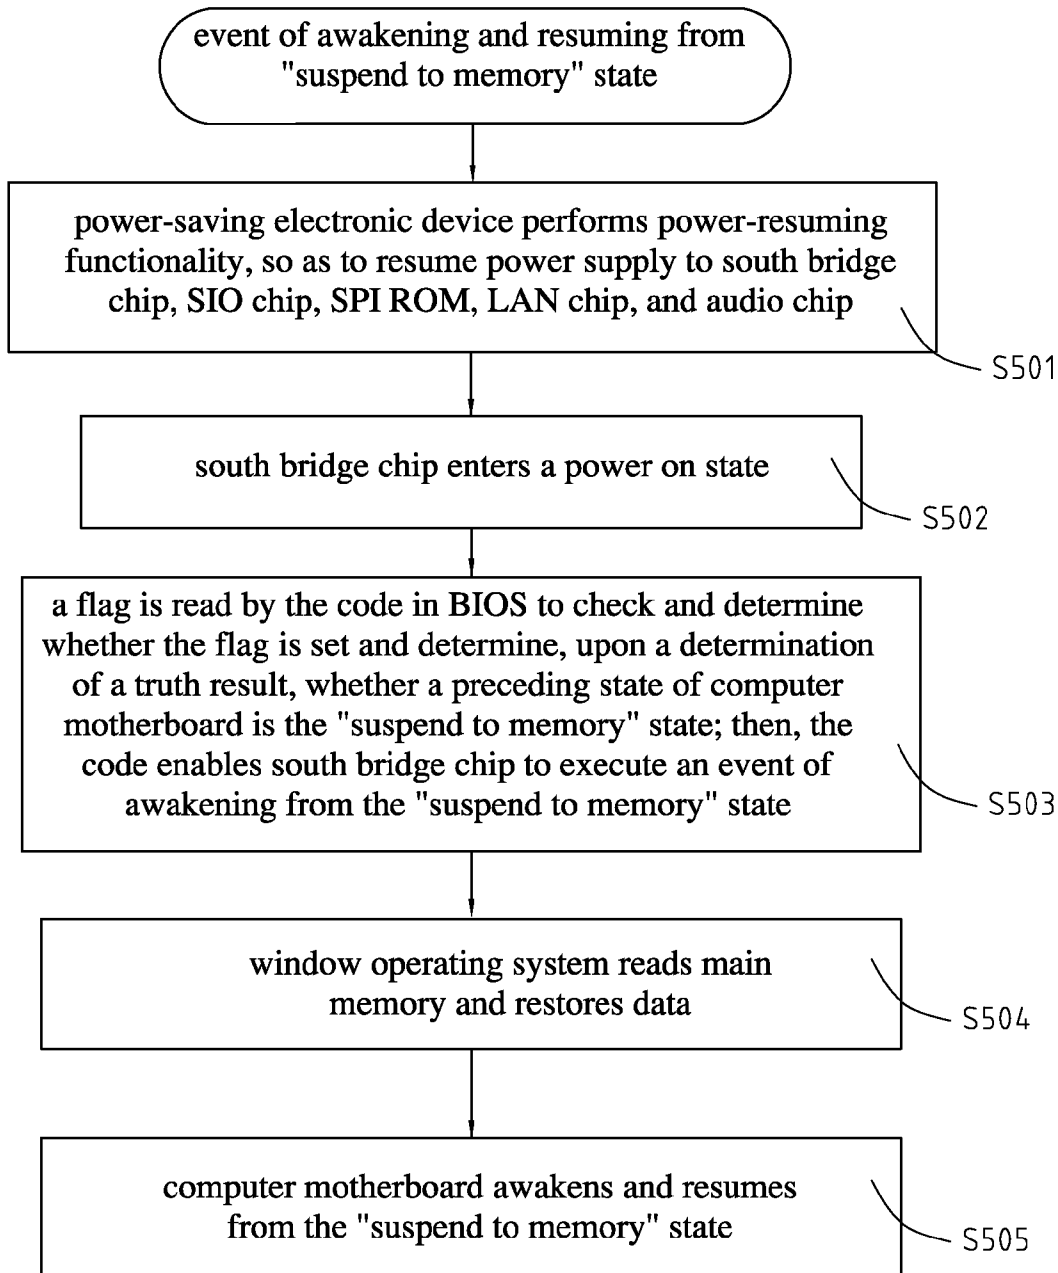


FIG. 2

**FIG. 3**

**FIG. 4**

1

# **ELECTRONIC DEVICE FOR REDUCING POWER CONSUMPTION DURING SLEEP MODE OF COMPUTER MOTHERBOARD AND MOTHERBOARD THEREOF**

## **FIELD OF THE INVENTION**

The present invention relates to power-saving computer motherboards, and more particularly, to a computer motherboard capable of compelling interruption of power supply to a south bridge chip and a super input output (SIO) chip in an S3 state ("suspend to memory" state) of ACPI (Advanced Configuration and Power Interface) so as to save power.

## **BACKGROUND OF THE INVENTION**

Upon its entry into an S3 state of Advanced Configuration and Power Interface (ACPI) (hereinafter referred to as ACPI S3), that is, a "suspend to memory" state, a conventional computer motherboard begins to operate in a standby power-saving mode, but some of the chips of the conventional computer motherboard, such as a main memory, a south bridge chip, a north bridge chip, a super input output (SIO) chip, and a memory controller, continue to consume power, and even the CPU cannot stop consuming power, and in consequence reduction of power consumption is not efficient at all. To save power, it is necessary to minimize the power consumption of power-consuming parts and components of the conventional computer motherboard one by one or even bring the power-consuming parts and components to a sleep mode in a program-controllable manner for power saving. However, with the south bridge chip being in control of ACPI and the SIO chip being in control of startup and shutdown, neither the south bridge chip nor the SIO chip can be shut down while in the "suspend to memory" state. Computer motherboards are designed, depending on chipsets for use therewith. Likewise, parts and components of computer motherboards are controlled differently. Hence, it is slow and laborious to develop a computer motherboard whose power-consuming parts and components can be brought to a power-saving mode or a sleep mode one by one, not to mention that a computer motherboard thus developed is intricate, expensive, and incompatible with parts and components of variant design.

U.S. Pat. No. 6,266,776, entitled ACPI Sleep Control, discloses: when the state of an internal battery or an external power supply changes, the change is detected by an embedded controller; the operating system is informed of this change using a power management event signal POWER\_PME and an SCI interrupt; and in accordance with the change in power supply state by the internal battery or the external power supply, the current system state changes to another system state. However, U.S. Pat. No. 6,266,776 does not disclose interrupting power supply to a south bridge chip and a SIO chip of a computer motherboard in ACPI S3 so as to save power.

The inventor of the present invention realized the drawbacks of the conventional computer motherboard and endeavored to overcome the drawbacks by inventing a power-saving electronic device for use with a computer motherboard in a "suspend to memory" state.

## **SUMMARY OF THE INVENTION**

first objective of the present invention provides a power-saving electronic device for reducing the power consumed by a computer motherboard in a "suspend to memory" state.

2

A second objective of the present invention provides a computer motherboard capable of compelling interruption of power supply to a south bridge chip and a super input output (SIO) chip in a "suspend to memory" state so as to save power.

To achieve the first objective of the present invention, the present invention provides a power-saving electronic device for use with a computer motherboard in a "suspend to memory" state. The power-saving electronic device comprises: a first device controlled by a second device and configured to controllably determine whether a first standby power forms a close circuit or an open circuit with a south bridge chip and a super input output (SIO) chip of the computer motherboard; and the second device for determining whether the computer motherboard is in the "suspend to memory" state so as for the first standby power to form an open circuit with the south bridge chip and the SIO chip under control of the first device upon a positive determination, generating a memory power control signal, enabling a second standby power to form a close circuit with a memory controller and a main memory of the computer motherboard so as to maintain an ON state when switched by a memory power controller and allow the computer motherboard to enter a "suspend to memory" state, receiving a power switch signal generated by a power switch, and enabling the first standby power to form a close circuit with the south bridge chip and the SIO chip under control of the first device upon receipt of the power switch signal.

To achieve the second objective of the present invention, the present invention provides a computer motherboard, comprising: a south bridge chip electrically connected to a first device; a super input output (SIO) chip electrically connected to the first device; the first device controlled by a second device and configured to controllably determine whether a first standby power forms a close circuit or an open circuit with the south bridge chip and the SIO chip; the second device for determining whether the computer motherboard is in the "suspend to memory" state so as for the first standby power to form the open circuit with the south bridge chip and the SIO chip under control of the first device upon a positive determination, generating a memory power control signal, enabling a second standby power to form a close circuit with a memory controller and a main memory of the computer motherboard so as to maintain an ON state when switched by a memory power controller and allow the computer motherboard to enter a "suspend to memory" state, receiving a power switch signal generated by a power switch, and enabling the first standby power to form the close circuit with the south bridge chip and the SIO chip under control of the first device upon receipt of the power switch signal; and a basic input and output system (BIOS) comprising a code for use in: storing a flag in a memory unit whenever the computer motherboard is in the "suspend to memory" state; checking the flag and determining whether a preceding state of the computer motherboard is the "suspend to memory" state as soon as power supply to the south bridge chip and the SIO chip resumes; and executing, upon a positive determination, awakening and resuming from the "suspend to memory" state.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

To enable persons skilled in the art to gain insight into the structures, features, and effects of use of the present invention, the present invention is hereunder illustrated with preferred embodiments in conjunction with the accompanying drawings, wherein:

3

FIG. 1 is a schematic view of the framework of a power-saving electronic device for use with a computer motherboard in a "suspend to memory" state according to the present invention;

FIG. 2 is a schematic view of a preferred embodiment of the power-saving electronic device shown in FIG. 1 according to the present invention;

FIG. 3 is a flowchart of processing a "suspend to memory" state event by the computer motherboard of the present invention; and

FIG. 4 is a flowchart of processing awakening and resuming from the "suspend to memory" state by the computer motherboard of the present invention.

### DETAILED DESCRIPTION OF THE INVENTION

Please refer to FIGS. 1 and 2. To facilitate description of the present invention and let persons skilled in the art gain insight into the present invention, FIGS. 1 and 2 show components of a computer motherboard 20 of the present invention on condition that the components are directly related to the present invention; in other words, irrelevant components of the computer motherboard 20 are omitted from the drawings. A power-saving electronic device 10 for use with the computer motherboard 20 saves power as soon as the computer motherboard 20 enters a "suspend to memory" state. The computer motherboard 20 is, for example, compatible with Advanced Configuration and Power Interface (ACPI) and capable of entering an S3 "suspend to RAM" state of ACPI (hereinafter referred to as ACPI S3). Persons skilled in the art are well aware that, upon its entry into ACPI S3, a conventional host computer is not effective in power saving, because some of the parts and components of the conventional host computer in ACPI S3 still consume standby power. For instance, a serial peripheral interface (SPI), read-only memory (ROM), LAN chip, audio chip, south bridge chip, and super input output (SIO) chip still consume standby power in ACPI S3. By contrast, as disclosed in the present invention, after the computer motherboard 20 equipped with the power-saving electronic device 10 enters ACPI S3, the power-saving electronic device 10 discontinues power supply to a south bridge chip 205 and a SIO chip 203. In the situation where the same power source is shared by the south bridge chip 205, the SIO chip 203, a SPI ROM, a LAN chip, and an audio chip of the computer motherboard 20, the power-saving electronic device 10 discontinues power supply to the SPI ROM, LAN chip, and audio chip as well. Meanwhile, power supply to the power-saving electronic device 10, a memory controller 207, and a main memory 209 of the computer motherboard 20 remains unchanged.

Differences in standby power consumption between a conventional computer motherboard and the computer motherboard 20 of the present invention, in ACPI S3, are shown in a comparative table as follows:

| Electronic Parts and Components | Does a conventional computer motherboard consume standby power? | Does the computer motherboard of the present invention consume standby power? |
|---------------------------------|-----------------------------------------------------------------|-------------------------------------------------------------------------------|
| memory controller               | yes                                                             | yes                                                                           |
| main memory                     | yes                                                             | yes                                                                           |
| south bridge chip               | yes                                                             | no                                                                            |
| SIO chip                        | yes                                                             | no                                                                            |
| LAN chip                        | yes                                                             | no                                                                            |
| audio chip                      | yes                                                             | no                                                                            |

4

-continued

| Electronic Parts and Components   | Does a conventional computer motherboard consume standby power? | Does the computer motherboard of the present invention consume standby power? |
|-----------------------------------|-----------------------------------------------------------------|-------------------------------------------------------------------------------|
| SPI ROM                           | yes                                                             | no                                                                            |
| power-saving electronic device 10 | no                                                              | yes                                                                           |

According to the comparative table, the computer motherboard 20 equipped with the power-saving electronic device 10 reduces standby power consumption better than the conventional computer motherboard, and computer motherboard 20 equipped with the power-saving electronic device 10 even overcomes a drawback of the prior art, that is, a conventional host computer fails to discontinue power supply to the south bridge chip and SIO chip in an S3 state.

The power-saving electronic device 10 of the present invention reduces power consumed by the computer motherboard 20 operating in a "suspend to memory" state and waiting for awakening. For instance, configured for use with the computer motherboard 20 in ACPI S3, the power-saving electronic device 10 comprises a first device 101 and a second device 103, as described in detail hereunder. To work in conjunction with the power-saving electronic device 10, the memory controller 207 and main memory 209 of the computer motherboard 20 have a power source controllably switched between a second standby power 30b and a power 30c by a memory power controller 211. The memory power controller 211 is controlled by the second device 103. In an embodiment, the power 30c is a power from a system power 201, such as 5V, 3V, 5 V<sub>SB</sub>, 3 V<sub>SB</sub>, or 3.3 V<sub>SB</sub>. In an embodiment, the second standby power 30b is a standby power from a power supply 30, such as 5V standby power, 3V standby power, or 3.3V standby power. In an embodiment, the main memory 209 is a single in-line memory module (SIMM), such as DDR, DDR2, or DDR3.

The primary function of the first device 101 is to controllably determine whether a first standby power 30a forms a close circuit or an open circuit with at least a south bridge chip 205 and a super input output (SIO) chip 203 of the computer motherboard 20. The first device 101 is a MOSFET, such as N-MOSFET or P-MOSFET. The second device 103 controls the gate of the MOSFET, so as to controllably determine whether the first standby power 30a forms a close circuit or an open circuit with at least the south bridge chip 205 and SIO chip 203.

The power supply 30 is an ATX power supply, for example. The first standby power 30a is, for example, a standby power of the ATX power supply, such as 5V standby power, 3V standby power, or 3.3V standby power. For instance, the N-MOSFET features connection of one of a plurality of signal output ends of the second device 103 to the gate, connection of the drain to the first standby power 30a, and connection of the source to a plurality of pins of the south bridge chip 205 and the SIO chip 203.

The source of the N-MOSFET is further connected to a plurality of pins of the SPI ROM, the LAN chip, and the audio chip.

Functions of the second device 103 are described hereunder. The second device 103 has first functionality: receiving a power switch signal 105a generated by a power switch 105; and enabling, upon receipt of the power switch signal 105a, the first device 101 to control the first standby power 30a so as

5

for the first standby power **30a** in the control of the first device **101** to form a close circuit with at least the south bridge chip **205** and SIO chip **203**.

In an embodiment, the second device **103** essentially comprises a micro-controller **1031**. Upon its receipt of the power switch signal **105a**, the micro-controller **1031** sends a conduction control signal **103a** to the gate of the N-MOSFET **101** so as to bring the N-MOSFET **101** to an ON state, and in consequence the first standby power **30a** forms a close circuit with at least the south bridge chip **205** and SIO chip **203**.

Meanwhile, power supply to the SPI ROM, the LAN chip, and the audio chip resumes.

The second device **103** has second functionality: determining whether the computer motherboard **20** is in the “suspend to memory” state so as for the first standby power **30a** to form an open circuit with at least the south bridge chip **205** and SIO chip **203** under the control of the first device **101** upon a positive determination; generating a memory power control signal **103b** and sending the memory power control signal **103b** to the memory power controller **211**; and enabling the memory power controller **211** to switch the second standby power **30b** to the memory controller **207** and the main memory **209** such that power supply to the memory controller **207** and the main memory **209** is maintained rather than interrupted.

An embodiment of the second function of the second device **103** is described hereunder. The micro-controller **1031** receives signals, such as SLP\_S3 or SLP\_S5, from the south bridge chip **205** so as to determine whether the computer motherboard **20** is in ACPI S3, and, upon a positive determination, instructs the N-MOSFET **101** to hibernate so as for the first standby power **30a** to form an open circuit with at least the south bridge chip **205** and SIO chip **203**.

Meanwhile, the micro-controller **1031** determines whether the computer motherboard **20** is in ACPI S3 and sends, upon a positive determination, the memory power control signal **103b** to the memory power controller **211**. Upon its receipt of the memory power control signal **103b**, the memory power controller **211** begins switching, thereby allowing the second standby power **30b** to form a close circuit with the memory controller **207** and main memory **209**. Hence, during ACPI S3, power supply to the memory controller **207** and the main memory **209** is maintained rather than interrupted.

In addition, the SPI ROM, the LAN chip, and the audio chip form an open circuit with the first standby power **30a**.

The second device **103** has a third function, that is, after receiving the power switch signal **105a**, the second device **103** reproduces the power switch signal **105a** and sends a power switch signal **105a'** thus reproduced to the SIO chip **203** of the computer motherboard **20**.

An embodiment of the third function of the second device **103** is described hereunder. Upon receipt of the power switch signal **105a** by the micro-controller **1031**, a built-in power switch signal reproducing circuit (not shown) provided in the micro-controller **1031** reproduces the power switch signal **105a** and sends a power switch signal **105a'** thus reproduced to the SIO chip **203** of the computer motherboard **20**. Alternatively, upon its receipt of the power switch signal **105a**, the micro-controller **1031** executes a program to control the voltage level at an output port of the micro-controller **1031** so as for the thus-reproduced power switch signal **105a'** to be sent from the output port to the SIO chip **203** of the computer motherboard **20**.

The computer motherboard **20** receiving power from the first standby power **30a** still generates signal RSMRST (the signal RSMRST is, for example, generated by the second device **103** or the SIO chip **203**) and sends the signal

6

RSMRST to the south bridge chip **205**. The second device **103** awaits during a predetermined period of time, that is, the time the second device **103** takes to wait for completion of generation of the signal RSMRST by the computer motherboard **20**, such as 100 ms.

After bringing the N-MOSFET **101** to an ON state, the micro-controller **1031** awaits for a predetermined period of time, that is, 100 ms. At the end of the predetermined period of 100 ms (that is, the moment when the computer motherboard **20** has finished generating the signal RSMRST), the micro-controller **1031** generates the power switch signal **105a'** and sends the power switch signal **105a'** thus generated to the SIO chip **203**. Upon receipt of the power switch signal **105a'** by the SIO chip **203**, the computer motherboard **20** executes the follow-up procedure of awakening from S3 state to S0 state.

The N-MOSFET in the power on state is likely to be overloaded and burned out when subjected to instantaneous overcurrent. To avoid the mishap, the present invention discloses a soft start circuit unit **1033**. The soft start circuit unit **1033** can adopt a conventional circuit.

To increase a control voltage with a view to using low-cost field-effect transistors (FET), the present invention discloses a charge pump circuit unit **1035**. The charge pump circuit unit **1035** can adopt a conventional circuit.

The second device **103** of the present invention can be implemented as an application-specific integrated circuit (ASIC).

The south bridge chip **205**, the SIO chip **203**, the memory controller **207**, and the main memory **209** can adopt conventional components.

The memory power controller **211** can adopt a conventional electronic switch or a conventional electronic switching circuit.

The power-saving electronic device **10** of the present invention is disposed on the computer motherboard **20**; alternatively, the power-saving electronic device **10** of the present invention is integrated with the SIO chip **203** of the computer motherboard **20**.

In an embodiment, the system power **201** is a power source of an ATX power source interface (connector) for use with the computer motherboard **20**, and the ATX power source interface is connected to the power supply **30** via a cable.

A built-in memory **1031a** of the micro-controller **1031** functions as firmware. A code required for execution of the first, second, and third functions of the second device **103** is stored in the built-in memory **1031a**. The micro-controller **1031** is connected to the south bridge chip **205** via an SM bus; hence, new firmware for the micro-controller **1031** is updated via the SM bus.

To enable the power-saving electronic device **10** to discontinue power supply to the south bridge chip **205** and SIO chip **203**, a code **40a** is added to a basic input and output system (BIOS) **40** of the computer motherboard **20** of the present invention. The code **40a** is required for storing a flag in a memory unit whenever the computer motherboard **20** is in a “suspend to memory” state. The code **40a** is required for checking the flag whenever power supply to the south bridge chip **205** and SIO chip **203** resumes, so as to determine whether a preceding state of the computer motherboard **20** is the “suspend to memory” state and execute, upon a positive determination, awakening and resuming from the “suspend to memory” state.

Referring to FIG. 3, once a “suspend to memory” state event (e.g., ACPI S3 event) occurs to the computer motherboard **20**, a window operating system (e.g., Windows™ of Microsoft™) stores related data in the main memory **209**



(S401). Then, the flag is stored in the memory unit 210 by means of the code 40a in the BIOS 40 (S402). Afterward, the window operating system informs the south bridge chip 205 of the occurrence of the “suspend to memory” state event (S403). In response to the notification, the south bridge chip 205 soft shuts down the power supply 30, but power supply to the south bridge chip 205, the SIO chip 203, the SPI ROM, the LAN chip, and the audio chip remains uninterrupted (S404). Then, the power-saving electronic device 10 performs the aforesaid power-saving functionality, so as to discontinue power supply to the south bridge chip 205, the SIO chip 203, the SPI ROM, the LAN chip, and the audio chip. The memory power controller 211 switches to the second standby power 30b by the memory power control signal 103b such that power supply to the memory controller 207 and the main memory 209 is maintained rather than interrupted (S405).

Afterward, the computer motherboard 20 finalizes the S3 state (S406).

The steps S401, S403, S404, and S406 illustrated with FIG. 3 are attributable to the prior art related to a known way to cope with an S3 event. It should be noted that, compared to the prior art, the present invention includes new steps, such as S402 and S405, to enhance the power-saving functionality of the computer motherboard 20 and enable recordation of occurrence of an S3 event to the computer motherboard 20.

Referring to FIG. 4, once a user presses the power switch 105, an event of awakening from a “suspend to memory” state and reuming occurs to the computer motherboard 20 (for example, an event of “awakening from ACPI S3 to SO” occurs to the computer motherboard 20); meanwhile, the power-saving electronic device 10 performs the aforesaid power-restoring functionality, so as to resume power supply to the south bridge chip 205, the SIO chip 203, the SPI ROM, the LAN chip, and the audio chip (S501). Furthermore, in S501, the power-saving electronic device 10 enables switching of the memory power controller 211 such that the power 30c forms a close circuit with the memory controller 207 and the main memory 209. Then, the south bridge chip 205 enters a power on state (S502). Afterward, the flag is read by the code 40a in the BIOS 40 to check and determine whether the flag is set and determine, upon a determination of a TRUTH result (i.e., the flag is set), whether a preceding state of the computer motherboard 20 is the “suspend to memory” state. Then, the code 40a enables the south bridge chip 205 to execute an event of awakening from the “suspend to memory” state (S503). Furthermore, in S503, the code 40a clears the flag value. Afterward, the window operating system reads the main memory 209 and restores related data (S504). Lastly, the computer motherboard 20 awakens and resumes from the “suspend to memory” state (S505).

The steps S502, S504, and S505 illustrated with FIG. 4 are attributable to the prior art related to a known way to cope with an event of awakening from a “suspend to memory” state and restoring. It should be noted that, compared to the prior art, the present invention includes new steps, such as S501 and S503, so as to allow the computer motherboard 20 to awaken from a “suspend to memory” state and resume even after power supply to the south bridge chip 205 and SIO chip 203 has been interrupted.

The memory unit 210 is a built-in CMOS memory of the computer motherboard 20, a built-in embedded controller (EC) of a notebook computer, or an internal register of the device 103.

As disclosed in the present invention, a power-saving electronic device for use with a computer motherboard is capable of compelling interruption of power supply to a south bridge chip and a super input output (SIO) chip of the computer

motherboard in a “suspend to memory” state so as to save power, and yet enables the computer motherboard to remain capable of awakening and resuming from the S3 state, which are the advantages and characteristics of the present invention.

The above description serves to expound preferred embodiments of the present invention rather than limit the scope of application of the present invention. Persons skilled in the art should be able to make obvious changes or modification of the present invention without departing from the substantive disclosure of the present invention.

What is claimed is:

1. A power-saving electronic device for use with a computer motherboard in a “suspend to memory” state, comprising:

a first device controlled by a second device and configured to controllably determine whether a first standby power forms a close circuit or an open circuit with a south bridge chip and a super input output (SIO) chip of the computer motherboard; and

the second device for determining whether the computer motherboard is in the “suspend to memory” state so as for the first standby power to form an open circuit with the south bridge chip and the SIO chip under control of the first device upon a positive determination, determining whether the computer motherboard is in the “suspend to memory” state so as for a second standby power to form a close circuit with a memory controller and a main memory of the computer motherboard upon a positive determination, receiving a power switch signal generated by a power switch, and enabling the first standby power to form a close circuit with the south bridge chip and the SIO chip under control of the first device upon receipt of the power switch signal.

2. The power-saving electronic device of claim 1, wherein the “suspend to memory” state is an S3 state of Advanced Configuration and Power Interface (ACPI).

3. The power-saving electronic device of claim 1, further comprising a memory power controller for switching to the power source of the memory controller and the main memory, wherein, when the computer motherboard is in the “suspend to memory” state, the memory power controller is controlled by the second controller and switches the power source of the memory controller and the main memory to the second standby power.

4. The power-saving electronic device of claim 1, wherein the first standby power originates in standby power of a power supply.

5. The power-saving electronic device of claim 1, wherein the second standby power originates in standby power of a power supply.

6. The power-saving electronic device of claim 1, further comprising a charge pump circuit unit.

7. The power-saving electronic device of claim 1, further comprising a soft start circuit unit.

8. The power-saving electronic device of claim 1, wherein the power-saving electronic device is integrated with the super input output (SIO) chip.

9. The power-saving electronic device of claim 1, wherein the second device is a micro-controller or an application-specific integrated circuit (ASIC).

10. The power-saving electronic device of claim 1, wherein the second device reproduces the power switch signal and sends a power switch signal thus reproduced to the SIO chip.

11. The power-saving electronic device of claim 10, wherein the second device reproduces the power switch signal and sends the power switch signal thus reproduced to the

SIO chip, by a means of executing instruction codes to control a voltage level at an output port of the second device.

**12.** A computer motherboard, comprising:

a south bridge chip electrically connected to a first device;  
a super input output (SIO) chip electrically connected to the first device;

the first device controlled by a second device and configured to controllably determine whether a first standby power forms a close circuit or an open circuit with the south bridge chip and the SIO chip;

the second device for determining whether the computer motherboard is in the “suspend to memory” state so as for the first standby power to form an open circuit with the south bridge chip and the SIO chip under control of the first device upon a positive determination, determining whether the computer motherboard is in the “suspend to memory” state so as for a second standby power to form the close circuit with a memory controller and a main memory of the computer motherboard upon a positive determination, receiving a power switch signal generated by a power switch, and enabling the first standby power to form the close circuit with the south bridge chip and the SIO chip under control of the first device upon receipt of the power switch signal; and

a basic input and output system (BIOS) comprising a code for use in: storing a flag in a memory unit whenever the computer motherboard is in the “suspend to memory” state;

checking the flag and determining whether a preceding state of the computer motherboard is the “suspend to memory” state as soon as power supply to the south bridge chip and the SIO chip resumes; and executing, upon a positive determination, awakening and resuming from the “suspend to memory” state.

**13.** The computer motherboard of claim **12**, wherein the “suspend to memory” state is an S3 state of Advanced Configuration and Power Interface (ACPI).

**14.** The computer motherboard of claim **12**, further comprising a memory power controller for switching the power source of the memory controller and the main memory, wherein, when the computer motherboard is in the “suspend to memory” state, the memory power controller is controlled by the second device and switches the power source of the memory controller and the main memory to the second standby power.

**15.** The computer motherboard of claim **12**, further comprising a charge pump circuit unit.

**16.** The computer motherboard of claim **12**, further comprising a soft start circuit unit.

**17.** The computer motherboard of claim **12**, wherein the first device and the second device are integrated with the super input output (SIO) chip.

**18.** The computer motherboard of claim **12**, wherein the second device is a micro-controller or an application-specific integrated circuit (ASIC).

**19.** The computer motherboard of claim **12**, wherein the second device reproduces the power switch signal and sends a power switch signal thus reproduced to the SIO chip of the computer motherboard.

**20.** The computer motherboard of claim **19**, wherein the second device reproduces the power switch signal and sends the power switch signal thus reproduced to the SIO chip, by a means of executing instruction codes to control a voltage level at an output port of the second device.

**21.** The computer motherboard of claim **12**, wherein the memory unit is a built-in CMOS memory of the computer motherboard, a built-in embedded controller (EC) of a notebook computer, or an internal register of the second device.

\* \* \* \* \*