

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
31 December 2003 (31.12.2003)

PCT

(10) International Publication Number
WO 2004/000893 A1

- (51) International Patent Classification⁷: **C08F 10/00**, 4/656
- (21) International Application Number: PCT/BR2002/000086
- (22) International Filing Date: 19 June 2002 (19.06.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **OPP QUÍMICA S.A.** [BR/BR]; Rua Eteno, 1582, 42800-000 Camaçari, BA (BR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BRAGANÇA, Antonio, Luiz, Duarte** [BR/BR]; Rua Tauphic Saadi, 121 - ap. 404, Bela Vista, 90470-040 Porto Alegre, RS (BR). **MIRANDA, Márcia, Silva, Lacerda** [BR/BR]; Rua Dr. Barbosa Gonçalves, 680, Chácara das Pedras, 91330-320 Porto Alegre, RS (BR). **SILVEIRA, Leandro, dos Santos** [BR/BR]; Rua Nossa Senhora do Perpétuo Socorro, 451, Bairro São Luís, 92420-290 Canoas, RS (BR). **AMORIM, Richard, Faraco** [BR/BR]; Rua Coronel André Belo, 395 - ap. 202, 90110-020 Porto Alegre, RS (BR).
- (74) Agent: **MOMSEN, LEONARDOS & CIA.**; Mr. Gustavo José F. Barbosa, Rua Teófilo Otoni 63, 10th floor, 20090-080 Rio de Janeiro RJ (BR).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SOLID CATALYST COMPONENT FOR POLYMERIZATION AND COPOLYMERIZATION OF ETHYLENE, AND, PROCESS FOR OBTAINING THE SAME

(57) Abstract: The present invention relates to process for obtaining a solid catalyst component for ethylene polymerization and copolymerization, wherein a carrier of particulate silica (65 to 85 % by weight) is impregnated with a catalytically active portion (15 to 35 % by weight) including titanium, magnesium, chlorine, alkoxy groups and at least one organometallic compound of the groups 1, 2, 12 or 13 of the periodic table. Further, the invention refers to the solid catalyst component thus obtained and to a process for ethylene polymerization and copolymerization wherein is used said catalyst. The catalyst obtained is suitable for the production of ethylene homo- and copolymers as narrow molecular weight distribution high density polyethylene (NMWHDPE) and linear low density polyethylene (LLDPE) with controlled morphology and improved structure.



WO 2004/000893 A1

**SOLID CATALYST COMPONENT FOR POLYMERIZATION AND
COPOLYMERIZATION OF ETHYLENE, AND, PROCESS FOR OBTAINING
THE SAME**

5 The present invention relates to a solid catalyst component for ethylene polymerization and copolymerization, composed of a carrier of particulate silica and a catalytically active portion including titanium, magnesium, chlorine, alkoxy groups and at least one organometallic compound of the groups 1, 2, 12 or 13 of the periodic table. The process for obtaining the catalyst of the present
10 invention comprises the steps of:

- (a) impregnating an activated silica in particles using a solution of an organometallic compound of the groups 1, 2, 12 or 13 of the periodic table, in an inert organic solvent;
- (b) removing the supernatant liquid from the step (a);
- 15 (c) preparing a solution obtained by reacting at least one magnesium compound, selected from magnesium halides and magnesium alkoxides and at least one titanium compound selected from titanium alkoxides and titanium halogen alkoxides;
- (d) impregnating the silica obtained on (b) using the solution prepared in
20 (c);
- (e) optionally reacting the solid obtained in (d) with a reducing agent;
- (f) reacting the solid obtained in (d) or (e) with a halogenating agent;
- (g) treating thermally the solid obtained in (f);
- (h) washing the solid obtained in (g) with an inert organic solvent;
- 25 (i) optionally, washing the solid obtained in (h) with a solution of one or more organometallic compounds of the groups 1, 2, 12 or 13 of the periodic table.

The catalyst component obtained is especially suitable for the production of homo- and copolymers of ethylene as narrow molecular weight distribution
30 high density polyethylene and linear low density polyethylene with controlled morphology and improved structure.

BACKGROUND OF THE INVENTION

1) Polymerization Process

The slurry or gas phase processes for the production of HDPE or LLDPE operating with low bulk density polymer need reactors with large volumes in order to obtain the necessary residence time. Particularly, in the gas phase reactors the presence of fines with low bulk density causes troubles. In fact, due to the friction of the polymer particles present into the reactor the fines are especially prone to the formation of electrostatic charges and tend to deposit and adhere to the metallic walls. These stagnant deposits does not allow the exchange of the reaction heat and become hot spots, which can form layer of agglomerates containing eventually melt polymer. After some time chunks of agglomerates can fall down and plug the product discharge system. The described effects are enhanced when the reaction is carried out with a highly active catalyst.

In the U.S. Pat. No. 5.410.002 a summary of patents on the above described phenomena is presented.

Therefore, it is crucial for the process that the catalyst used enables a total control of the polymer morphology resulting in product grains without fines, with high bulk density and good flowing properties.

Another very important aspect is that the catalyst must have a slow decaying time to permit the use of reactors in series. This arrangement makes possible the obtainment of bimodal products in addition the reduction of the total volume of reaction for the same production basis. Moreover, process operation with a different condition of reaction in at least two reactors in series, turns possible the use of catalysts with higher particle size thereby minimizing the formation of electrostatic charges.

2) Polymer Structure

The catalyst properties are fundamental to the polymer structure, mainly in respect of the molecular weight distribution, comonomer insertion in the polymeric chain and soluble content.

Each application used to achieve a final product from high density polyethylene (HDPE) or linear low density polyethylene (LLDPE) requires a specific polymeric structure.

To obtain a film with improved optical and mechanical properties and avoid blocking problems, a polymer having narrow molecular weight distribution (MFR < 27), is required. A large quantity of LLDPE applications requires products with density = 0.918 and MI = 0.7, and in most cases a xylene soluble content < 10% is desired. Indeed, when the xylene soluble content of the polymer is present in a high concentration (> 10%) and with a low molecular weight, this soluble tends to migrate to the film surface causing blocking, in addition to the unsatisfactory optical properties (low gloss and high haze).

3) Ziegler-Natta polyethylene catalyst

Due to the strong competition existent in the polyethylene market, the catalyst production cost is a fundamental component. Therefore it is mandatory that the catalyst for producing polyethylene be manufactured by a simple route, from low cost raw material, without generating gaseous, liquid or solid effluents hard to treat.

The patent US 5.188.997 describes a synthesis process for Ziegler-Natta catalysts from silica and magnesium chloride alcoholate. The results reported demonstrate that this catalyst produces a polymer with low bulk density (0.23 to 0.30 g/ml) and with an intermediate molecular weight distribution (MFR 30.0 to 37.8).

The patent US 5.585.317 describes the synthesis of a catalyst supported on a magnesium chloride based carrier. The reported examples relates to the production of polymers having good morphology, characterized by the absence of fines and by the high bulk density which is for LLDPE produced between 0.32 and 0.40 g/ml and for HDPE between 0.33 and 0.438 g/ml.

However, in the case of LLDPE production, the polymer obtained presents an undesired comonomer distribution in its chain, evidenced by the high xylene soluble content at different polymer densities. As an example, a

polyethylene with 0.919 g/ml of polymer density has a xylene soluble content of 12.5% by weight.

SUMMARY OF THE INVENTION

The present invention relates to a solid catalyst component for ethylene
5 polymerization and copolymerization, composed of a carrier of particulate silica and a catalytically active portion including titanium, magnesium, chlorine, alkoxy groups and at least one organometallic compound of the groups 1, 2, 12 or 13 of the periodic table. The process for obtaining the catalyst of the present invention comprises the steps of:

- 10 (a) impregnating an activated silica in particles using a solution of an organometallic compound of the groups 1, 2, 12 or 13 of the periodic table, in an inert organic solvent;
- (b) removing the supernatant liquid from the step (a);
- (c) preparing a solution obtained by reacting at least one magnesium
15 compound, selected from magnesium halides and magnesium alkoxides and at least one titanium compound selected from titanium alkoxides and titanium halogen alkoxides;
- (d) impregnating the silica obtained on (b) using the solution prepared in (c);
- 20 (e) optionally reacting the solid obtained in (d) with a reducing agent;
- (f) reacting the solid obtained in (d) or (e) with a halogenating agent;
- (g) treating thermally the solid obtained in (f);
- (h) washing the solid obtained in (g) with an inert organic solvent;
- (i) optionally, washing the solid obtained in (h) with a solution of one or
25 more metal-alkyl halide compounds of the groups 1, 2, 12 or 13 of the periodic table.

Therefore, the present invention provides a catalyst especially suitable for the production of ethylene homo- and copolymers as narrow molecular weight distribution high density polyethylene (NMWHDPE) and linear low
30 density polyethylene (LLDPE) with controlled morphology and improved structure.

Additionally, the catalyst described and claimed in the present invention produces a NMWHDPE with a melt flow ratio (MFR) lower than 27 that are particularly suitable for thermoforming and injection applications.

Further, the catalyst described and claimed in the present invention produces a LLDPE with a low xylene soluble content due to the very good comonomer insertion allowing the production of films with superior optical properties and very low blocking.

The present invention provides still a catalyst that provides, when submitted to polymerization conditions, particles of ethylene homo and copolymers having high bulk density and containing a very small quantity of fines.

The present invention provides additionally a catalyst useful in liquid phase or in gas phase, ethylene polymerization process.

The present invention provides further a catalyst useful in polymerization process due to its high activity and low decay kinetics.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 attached herein is a flowchart, which illustrates the preferred embodiment of the present invention for preparing the solid catalyst component.

FIGURE 2 attached herein is a flow diagram of a fluidized bed, gas phase pilot plant used to produce polyethylene.

DETAILED DESCRIPTION

In the present specification, the expression Catalyst Decay means the half-life time of the active sites of a solid catalyst component which is measured as the time required for reaching 50% of the initial catalyst activity during polymerization run. A catalyst with low decay kinetics has a half-life time preferably higher than 3 hours.

The present invention discloses a solid component obtained from the interaction of a reaction product between at least one magnesium compound, chosen from magnesium halides and magnesium alkoxides and at least one

titanium compound chosen from titanium alkoxides and titanium halogen alkoxides, an activated silica impregnated with organometallic compounds of the groups 1, 2, 12 or 13 and a halogenating agent, capable of interacting with organometallic compounds of the groups 1, 2, 12 or 13, to give a solid catalyst component, which is highly active in the polymerization and copolymerization of ethylene. Optionally a reducing agent can be used during the process of preparation of the present catalyst component.

Accordingly, the present invention concerns a process for the preparation of a solid component of catalyst for the polymerization of ethylene and the copolymerization of ethylene with alpha-olefins, composed of a carrier of silica in particles (65 to 85 % by weight) and a catalytically active portion (15 to 35 % by weight) including titanium, magnesium, chlorine, alkoxy groups and at least one organometallic compound of the groups 1, 2, 12 or 13 of the periodic table. According to FIGURE 1, this process comprises the following steps:

- (a) impregnating an activated silica in particles using a solution of an organometallic compound of the groups 1, 2, 12 or 13 of the periodic table, in an inert organic solvent;
- (b) removing the supernatant liquid from the step (a);
- (c) preparing a solution obtained by reacting at least one magnesium compound, selected from magnesium halides and magnesium alkoxides and at least one titanium compound selected from titanium alkoxides and titanium halogen alkoxides;
- (d) impregnating the silica obtained on (b) using the solution prepared in (c);
- (e) optionally reacting the solid obtained in (d) with a reducing agent;
- (f) reacting the solid obtained in (d) or (e) with a halogenating agent;
- (g) treating thermally the solid obtained in (f);
- (h) washing the solid obtained in (g) with an inert organic solvent;
- (i) optionally, washing the solid obtained in (h) with a solution of one or more organometallic compounds of the groups 1, 2, 12 or 13 of the periodic table.

In step (a) of the process according to the present invention, the preferable silica for this purpose is a microspheroidal, porous silica having an average particle size ranging from 10 to 120 μm , preferably between 15 and 100 μm , a SiO_2 contents of > 90% by weight, a surface area ranging from 250 to 500 m^2/g , preferably between 300 and 400 m^2/g , a pore volume ranging from 1.0 to 2.0 ml/g, preferably between 1.5 and 1.8 ml/g, and an average pore diameter ranging from 10 to 40 nm, preferably between 20 and 30 nm. This silica should be submitted to an activation treatment before being impregnated, which can be carried out by heating the silica in an inert atmosphere, at a temperature ranging from 100 to 750°C, over a period from 1 to 20 hours. The amount of remained OH on silica surface after this treatment ranges from 0.1 to 2 mmoles OH per g of silica, preferably between 0.5 and 1.5 mmoles OH per g of silica.

The impregnation is preferably carried out by suspending 10 to 20 parts by weight of silica for each 100 parts by volume of solution of organometallic compound of the groups 1, 2, 12 or 13, in aliphatic hydrocarbons, and maintained under stirring at a temperature which ranges from room temperature to the boiling point of the solution of organometallic compound of the groups 1, 2, 12 or 13, in aliphatic hydrocarbons, preferably at room temperature, over a period from 30 to 120 minutes, preferably between 50 and 60 minutes.

The organometallic compounds of groups 1, 2, 12 or 13 of the periodic table suitable for use in the step (a) are alkyl compounds and alkyl halide compounds of metals belonging to these groups, and preferably aluminum, magnesium, lithium and zinc compounds. Specific examples of these compounds are trimethylaluminum, triethylaluminum (TEAL), methylaluminum dichloride, methylaluminum sesquichloride, isobutylaluminum dichloride, isobutylaluminum sesquichloride, ethylaluminum dichloride (EADC), diethylaluminum chloride (DEAC), ethylaluminum sesquichloride (EASC), tri-n-hexylaluminum (Tn-HAL), tri-n-octylaluminum (TnOAL), butyl ethylmagnesium (BEM), butyl octylmagnesium (BOMAG), methylmagnesium chloride and ethylmagnesium chloride. They can be used concentrated or preferably

dissolved in the above organic solvent or in a different organic solvent chosen from aliphatic hydrocarbons.

Specific aliphatic hydrocarbons used as solvents for the above mentioned solution can have between 4 and 50 carbons, preferably between 6
5 and 20 carbons. Specific examples of these aliphatic hydrocarbons used as solvents are hexane, heptane, octane, isoparaffin, and the most preferably are hexane and heptane.

In step (a) of the process, the impregnation step using the solution of organometallic compound of the groups 1, 2, 12 or 13, in aliphatic
10 hydrocarbons, is carried out by using an amount of organometallic compound, ranging from 0.1 to 1 mmole of the organometallic solution per mmole of OH on the silica surface, preferably 0.3 to 0.7 mmoles of the organometallic solution per mmole of OH on the silica surface.

At the end of the impregnation treatment, the silica can be removed (b)
15 from the suspension by usual methods such as settling and siphoning, filtration or centrifugation. The operating temperature of this step can vary from room temperature to the boiling point of the aliphatic hydrocarbon used as solvent, preferably at room temperature. The wet silica is directly used in the next step.

According to the present invention, in step (c) of the process, a liquid
20 component from the reaction between at least one magnesium compound, chosen from magnesium halides and magnesium alkoxides and at least one titanium compound, chosen from titanium alkoxides and titanium halogen alkoxides, is prepared. Generally, it is necessary to heat the mixture of these compounds, at a temperature in the range of about 100°C to about 200°C,
25 preferably between 140°C and 160°C, over a period of time from 1 to 100 hours, preferably between 10 and 30 hours. The mixture comprising said compounds has to be prepared under turbulent stirring and under inert conditions. After the formation of the product obtained from the reaction
30 suspension, the temperature of the obtained liquid product can be reduced to ambient temperature without precipitation of any solid. This liquid component is

diluted in an inert organic solvent to form a clear solution. Specific organic solvents used for the above mentioned solution can be aliphatic hydrocarbons having between 4 and 50 carbons, preferably between 6 and 20 carbons. Specific examples of these aliphatic hydrocarbons used as organic solvents are: hexane, heptane, octane, isoparaffin, most preferably hexane and heptane.

The magnesium compounds suitable for the purpose of the invention are those having the formulae MgX_2 or $Mg(OR)_2$, wherein R represents a linear or branched alkyl group, containing from 1 to 10 carbons and X represents a halogen atom and preferably a chlorine atom. Specific examples of magnesium compounds are magnesium dichloride, magnesium diethylate, magnesium di-n-butylate, magnesium diisopropylate and magnesium diisobutylate.

The amount of magnesium compound used in the above preparation corresponds to the amount ranging from 0.0024 to 0.24 g of magnesium per g of silica, preferably between 0.0042 and 0.042 g of magnesium per g of silica.

The titanium compounds most suited for the purpose are alkoxides and chloroalkoxides, containing from 1 to 4 carbons in the alkoxide portion. Specific examples of these compounds are: titanium tetra-n-propylate, titanium tetra-n-butylate, titanium tetra-i-propylate, titanium tetra-i-butylate and the corresponding titanium mono- or di-chloroalkoxides.

The amount of titanium compound used in the above preparation corresponds to an amount ranging from 0.01 to 1 g of titanium per g of silica, preferably between 0.0175 and 0.175 g of titanium per g of silica.

In general, when preparing the solution of the step (c), titanium is used in such an amount that the molar ratio Ti/Mg varies within the range of 0.3 to 4, and preferably within the range of 0.5 to 2.

In step (d) the silica obtained on step (b) is suspended in an inert organic solvent, such as a hydrocarbon solvent of the aliphatic type, preferably the same used in the previous steps and the dissolved product prepared on step (c) is added to the suspension. The impregnation is carried out by suspending 100

parts by weight of silica, obtained on step (b), for each 5 to 200 parts by volume of the component prepared on step (c) and after dilution in the inert organic solvent. The suspension is maintained under stirring at a temperature that ranges from room temperature to the boiling point of the mixture, preferably at 60°C, over a period of time from 30 to 180 minutes, preferably between 50 and 60 minutes. In this way a solid component suspended in an inert organic solvent is obtained.

Optionally the solid component obtained in step (d) can be submitted to reducing conditions in a step (e). Said result is obtained, for example, by using reducing agents, such as Na-alkyls, Li-alkyls, Zn-alkyls, Mg-alkyls and corresponding aryl-derivatives, Grignard compounds of the type RMgX, wherein R represents a linear or branched alkyl group, containing from 1 to 10 carbons or aryl-derivatives and X represents a halogen atom and preferably a chlorine atom, Al-alkyl halide compounds or by using reducing agents such as silicon compounds. Particularly effective silicone compounds are the polymethylhydrosiloxanes in which the monomer unit has the general formula $[-\text{HSiR-O}]_n$ wherein R is H, halogen, alkyl with 1 to 10 carbon atoms, aryl with 6 to 10 carbon atoms, alkoxy with 1 to 10 carbon atoms, aryloxy with 6 to 10 carbon atoms or carboxyl with 1 to 10 carbon atoms, and n is a degree of polymerization that ranges between 5 and 100. Specific examples of such polymethylhydrosiloxanes (PMHS) include the compounds: $(\text{CH}_3)_3\text{SiO}[(\text{CH}_3)\text{HSiO}]_n\text{Si}(\text{CH}_3)_3$, $(\text{CH}_3\text{HSiO})_4$, $(\text{CH}_3\text{HSiO})_3$, $\text{H}_3\text{Si-O-SiH}_2\text{-OSiH}_3$, phenylhydropolysiloxanes in which the hydrogen atoms can be partially replaced by methyl groups.

Other silicon compounds useful as reducing agents in the practice of this invention are: silanes ($\text{Si}_m\text{H}_{2m+2}$, in which m is a number equal to or higher than 1), alkyl-silanes or aryl-silanes ($\text{R}_x\text{SiH}_{4-x}$, in which R is alkyl or aryl and x is a number varying from 1 to 3) and alkoxy-silanes or aryloxy-silanes ($\text{RO}_x\text{SiH}_{4-x}$, in which R is alkyl or aryl and x is a number varying from 1 to 3).

The reducing agent chosen from the above examples, preferably polymethylhydrosiloxanes (PMHS), is added to the solid obtained in the step

(d), dissolved preferably in the same inert organic solvent used for the reaction suspension. This addition is carried out slowly over a period of time from 30 to 180 minutes, preferably between 50 and 80 minutes and the solid suspension is maintained under stirring at a temperature ranging from room temperature to the boiling point of the aliphatic hydrocarbon used as solvent, preferably at 60°C.

The amount of reducing agent that can be used in step (e) corresponds to the amount ranging from 0 to 2 moles per mole of titanium, preferably between 0 and 0.1 mole per mole of titanium. It has been observed, in the experiments, that the quantity used of this reducing agent can control the amount of titanium fixed on silica at the final catalyst.

In the next step of the process according to the present invention, the suspension obtained in (d) or (e), which is still under stirring, is put in contact and interacted with one or more halogenating agents.

Halogenating agents useful in the practice of the present invention can be either liquid or gaseous materials, pure or preferably dissolved in an inert organic solvent. Representative but non-exhaustive examples of halogenating agents useful in the present invention are methylaluminum dichloride, methylaluminum sesquichloride, isobutylaluminum dichloride, isobutylaluminum sesquichloride, ethylaluminum dichloride (EADC), diethylaluminum chloride (DEAC), ethylaluminum sesquichloride (EASC), SiCl_4 , SnCl_4 , HCl , Cl_2 , HSiCl_3 , aluminum chloride, ethylboron dichloride, boron chloride, diethylboron chloride, HCCl_3 , PCl_3 , POCl_3 , acetyl chlorides, thionyl chloride, sulfur chloride, methyl trichlorosilane, dimethyl dichlorosilane, TiCl_4 , VCl_4 , CCl_4 , t-butyl chloride, n-butyl chloride, chloroform, 1,1,1-trichloroethane, 1,1,2-trichloroethane, 1,2-dichloroethane and dichloromethane.

The preferred halogenating agents are chlorinating agents and of these SiCl_4 , SnCl_4 , HCl , Cl_2 , HSiCl_3 , methyl trichlorosilane, dimethyl dichlorosilane, t-butyl chloride, n-butyl chloride, chloroform, 1,1,1-trichloroethane, 1,1,2-trichloroethane, 1,2-dichloroethane and dichloromethane are preferred, most preferably SiCl_4 .

The amount of halogenating agent used in the step (f) of the process corresponds to the amount ranging from 0.5 to 3 moles of halogenating agent per mole of titanium, preferably between 1 and 1.8 moles of halogenating agent per mole of titanium.

5 The time necessary for halogenating Ti-alkoxide and optionally Mg-alkoxide varies from 0.5 hour to 5 hours, preferably from 1.5 hours to 2.5 hours. The temperature of the solid suspension halogenation ranges from room temperature to the boiling point of the aliphatic hydrocarbon used as solvent, preferably at 60°C.

10 According to the present invention, in step (g) of the process, the solid obtained in (f) is kept under higher temperature that depends on the inert organic solvent used.

 The time necessary for this thermal treatment of the solid obtained in step (f) ranges from 0.5 hour to 5 hours, preferably from 3 to 5 hours. The ideal
15 temperature for this purpose depends on the organic solvent used and it can be conducted from 60°C to 120°C, preferably from 60°C to 75°C, when hexane is used as the organic solvent.

 At the step (h) after the thermal treatment, the solid can be separated from the suspension, for example by settling and siphoning, filtration or
20 centrifugation, washed with an inert organic solvent, preferably hexane, and then dried. The washing temperature can vary from room temperature to the boiling point of the aliphatic hydrocarbon used as solvent, preferably at room temperature.

 Optionally, the solid obtained in (h) is washed with a solution of
25 organometallic compounds of the groups 1, 2, 12 or 13. More specifically, in the optional step (i) the solid obtained in step (h) is suspended in an inert organic solvent such as hexane or heptane, and it is put in contact with one or more organometallic compounds of the groups 1, 2, 12 or 13 of the periodic table, preferably metal-alkyl compounds or metal-alkyl halide compounds belonging to
30 these groups, in special aluminum, magnesium, lithium and zinc compounds.

Specific examples of these compounds are methylaluminum dichloride, methylaluminum sesquichloride, isobutylaluminum dichloride, isobutylaluminum sesquichloride, ethylaluminum dichloride (EADC), diethylaluminum chloride (DEAC), ethylaluminum sesquichloride (EASC), tri-n-hexylaluminum (Tn-HAL),
5 tri-n-octylaluminum (TnOAL). They can be used concentrated or preferably dissolved in the above organic solvent or in a different organic solvent chosen from aliphatic hydrocarbons. The process is carried out at a temperature ranging from room temperature to the boiling point of the organic solvent used as solvent, preferably at room temperature, for a period of time that can vary
10 from 10 minutes to 24 hours, preferably from 40 minutes to 5 hours.

When using more than one organometallic compound in the step (i), the different compounds can be fed in the same solution or in individual solutions, at the same time or in subsequent additions.

The amount of the metal-alkyl halide compound of the groups 1, 2, 12 or
15 13 or metal-alkyl compound of the groups 1, 2, 12 or 13, used in the step (i) of the process corresponds to the amount ranging from 0 to 3 g of the corresponding metal-alkyl halide compound of the groups 1, 2, 12 or 13 or metal-alkyl compound of the groups 1, 2, 12 or 13, per g of dry catalyst component obtained, preferably between 0.05 and 1 g of the corresponding
20 metal-alkyl halide compound of the groups 1, 2, 12 or 13 or metal-alkyl compound of the groups 1, 2, 12 or 13, per g of dry catalyst component obtained.

The use of inert organic solvents, most specifically aliphatic hydrocarbons, in all process steps of the present invention brings another
25 important feature to the solid catalyst component characteristics. The solid catalyst component obtained is completely free of residual polar solvents, such as ethanol, and their derivatives in its final composition.

The titanium amount that remains fixed on the solid catalyst component may reach up to 10% by weight, expressed as the Ti metal content, and it is
30 preferably comprised between 0.5 and 2% by weight.

The magnesium amount that remains fixed on the solid catalyst component may reach up to 6% by weight, expressed as the Mg metal content, and it is preferably comprised between 0.3 and 3.0% by weight.

5 The chlorine amount that remains fixed on the solid catalyst component may reach up to 20% by weight, expressed as the Cl contents, and it is preferably between 5 and 12% by weight.

The alkoxy amount that remains fixed on the solid catalyst component may reach up to 20% by weight and it is preferably between 3 and 8% by weight.

10 The amount of organometallic compound of the groups 1, 2, 12 or 13 that remains fixed on the solid catalyst component may reach up to 5% by weight, expressed as the metal contents, and it is preferably between 0.3 and 3% by weight. This organometallic compound of the groups 1, 2, 12 or 13 are metal-alkyl compounds or metal-alkyl halide compounds belonging to these
15 groups, in special organoaluminum, organomagnesium, organolithium and organozinc compounds, pure or in mixtures.

The particle size distribution of the solid catalyst component of the present invention is very close to the silica used as carrier and, as consequence, its average particle size ranges also from 10 to 120 μm . The
20 solid catalyst component surface area ranges from 80 to 300 m^2/g and its pore volume ranges from 0.1 to 1.0 ml/g.

The catalyst component of the present invention is suitable for using in liquid phase or gas phase, ethylene polymerization process. The co-catalyst used in the polymerization process is an alkyl-aluminum, preferably trimethyl
25 aluminum or triethyl aluminum. The mass ratio co-catalyst:catalyst in the polymerization process is between 0.5:1 and 6.0:1.

An important feature is its ability to produce, when submitted to polymerization conditions, particles of homo and copolymers of ethylene with controlled morphology having high bulk density and containing a very small
30 quantity of fines. This feature allows the use of this catalyst in a process where

the catalyst can be fed directly into the polymerization reactor. Particular forms to feed the catalyst are in dry bulk powder, in paste, in oil suspension or in solvent suspension. As an alternative the catalyst can be prepolymerized with ethylene or propylene and optionally with a comonomer before being fed into
5 the reactor.

Another important feature of the present invention is its tolerance to the high electrostatic charges occurring in gas phase reactors. This feature helps to prevent the formation of polymer sheets or agglomerates on the reactor walls. The good catalytic yield and the low decay kinetics observed for the present
10 invention, allows its use in most polymerization processes, including processes operating in more than one reactor in series.

A further feature characteristic of the catalyst of the present invention is when using a microspheroidal silica as support the catalyst obtained has also a spheroidal morphology and in consequence a polymer product with good
15 morphology and flowability is obtained.

The catalyst component of the present invention is advantageously used in the polymerization of ethylene and mixtures thereof with alpha-olefins $\text{CH}_2 = \text{CHR}$, wherein R is an alkyl or cicloalkyl or aryl radical with 1-12 carbon atoms because it has a high activity and low decay kinetics. In particular, it is used in
20 the preparation of:

- High density polyethylenes (HDPE, having a density greater than 0.940 g/cm^3), particularly with narrow molecular weight distribution ($\text{MFR} < 27$), including homopolymers of ethylene and copolymers of ethylene with one or more alpha-olefins having from 3 to 14 carbon atoms. These products are
25 particularly suitable for thermoforming and injection applications;

- Linear medium density and linear low density polyethylenes (LMDPE and LLDPE, having a density lower than 0.940 g/cm^3) most specifically very low and ultra low density linear polyethylenes (VLDPE and ULDPE, having a density lower than 0.920 g/cm^3 and as low as 0.880 g/m^3) consisting of
30 copolymers of ethylene with one or more alpha-olefins having from 3 to 14

carbon atoms, having a content of units derived from ethylene greater than approximately 80% by weight. These products have an improved structure due to the very good comonomer insertion and, in most cases, they have also a narrow molecular weight distribution (MFR < 27). Hence the low xylene soluble contents are obtained, allowing the production of films with superior optical properties and very low blocking. The LMDPE products are particularly useful for rotomolding applications;

- Elastomeric copolymers of ethylene and propylene and elastomeric terpolymers of ethylene and propylene with minor amounts of a diene, having a content of units derived from ethylene comprised between about 30 and 70% by weight.

EXAMPLES

The present invention is now explained in more details by means of the following Examples, which should not be understood as limiting the scope of the invention.

The properties here indicated are determined according to the following methods:

- Surface area and pore volume: determined by nitrogen adsorption according to the B.E.T methodology using a "Micromeritics ASAP 2010" apparatus.
- Size of the catalyst particles: determined according to a method based on the principle of optical diffraction of monochromatic laser light, using the "Malvern Instr. 2600" apparatus.
- MIE melt index: ASTM D-1238, condition E
- MIF melt index: ASTM D-1238, condition F
- MFR melt flow ratio: MIF/MIE
- Flowability: it is the time required by 100 g of polymer to flow through a stainless steel funnel (outlet opening diameter of 12.7 mm and side walls at 20° to the vertical).
- Bulk density: ASTM D-1895

- Morphology: optical microscopy.
 - Fraction soluble in xylene: determined at 25° C.
 - Comonomer contents: percentage by weight, as determined via I.R. spectra.
- 5
- Polymer density: ASTM D-1928-C and ASTM D-1505.
 - Haze: ASTM-D 1003
 - Gloss: ASTM-D 2457
 - Blocking: ASTM-D 3354
 - The haze, gloss and blocking measurements are made in films of 80 μm
- 10
- of thickness with 1500 ppm of an amorphous silica as additive.
 - Particle size distribution of the particulate polymer: ASTM-D 1921

In the following experimental examples, which are intended to provide a better illustration of the present invention, an activated microspheroidal silica carrier is used, having an average particle size of 40 μm , a SiO_2 contents superior to 99% by weight, a surface area of 290 m^2/g and a pore volume of 1.62 ml/g . The triethylaluminum (TEAL) and the diethylaluminum chloride (DEAC) are available from Akzo Nobel Co. The titanium tetra-n-butylate is available from Merck. The magnesium chloride is supplied by from Maruyasu Co. The hexane available from Phillips Petroleum was purified with molecular sieves and nitrogen to remove oxygen and water. All solid component preparations were carried out in an inert atmosphere.

15

20

PREPARATION OF THE SOLID CATALYST COMPONENT

EXAMPLE 1

In a 5 liter flask fitted with a mechanical stirrer and previously purged with nitrogen were fed 44 g (0.462 moles) of anhydrous MgCl_2 and 330 ml (0.969 moles) of $\text{Ti}(\text{O}i\text{Bu})_4$. This mixture was allowed to stir at 300 rpm and heated to 150°C for about 12 hours in order to have the solids completely dissolved, thereby a clear liquid product was obtained. This resulting liquid was cooled down to 40°C and under gently stirring at 150 rpm, it was diluted with 3200 ml of anhydrous hexane. Into this solution kept at 40°C and under the same stirring, 250 g of the silica support were added. This silica was previously

25

30

dehydrated and treated with 19 ml (0.139 moles) of triethylaluminum diluted in anhydrous hexane, for 50 minutes and at room temperature. Once the addition of the silica is completed, the mixture was heated to 60°C and kept at this temperature for 1 hour. Into this mixture, kept at 60°C and under gently stirring, a solution consisting of 100 ml of anhydrous hexane and 192 ml of PMHS (0.085 moles) was dropped into it over a period of time of 1.5 hours. At the end of the addition, stirring was continued for 2 hours at a temperature of 60°C. To this mixture a solution of 200 ml of anhydrous hexane and 184 ml of SiCl₄ (1.606 moles) was dropped over a period of time of 1 hour. At the end of the addition, stirring was continued for 3.5 hours at a temperature of 60°C. The temperature of the mixture was then brought to 65°C and kept for additional 2 hours. After cooling the mixture to room temperature, the stirring was stopped to have the solid settled. The supernatant liquid was removed, the solid was repeatedly washed with anhydrous hexane and then dried at 60°C under nitrogen flow thus giving 390 g of a reddish powder.

The chemical and physical characteristics of the resulting reddish powder were as follows:

Total Titanium = 7.0 % (by weight)
Mg = 2.0 % (by weight)
SiO₂ = 75.9 % (by weight)
Al = 0.5 % (by weight)
Cl = 10.9 % (by weight)
OBu = 4.1% (by weight)
Surface Area (B.E.T.) = 200 m²/g
Pore Volume (B.E.T.) = 0.45 cm³/g

EXAMPLE 2

In a 5 liter flask fitted with a mechanical stirrer and previously purged with nitrogen were fed 5.28 g (0.055 moles) of anhydrous MgCl₂ and 39.6 ml (0.116 moles) of Ti(OBu)₄. This mixture was allowed to stir at 300 rpm and heated to 150°C for about 12 hours in order to have the solids completely dissolved, thereby a clear liquid product was obtained. This resulting liquid was cooled down to 40°C and under gently stirring at 150 rpm, it was diluted with 3200 ml of anhydrous hexane. Into this solution kept at 40°C and under the same

stirring, 300 g of the silica support were added. This silica was previously dehydrated and treated with 23 ml (0.167 moles) of triethylaluminum diluted in anhydrous hexane, for 50 minutes and at room temperature. Once the addition of the silica is completed, the mixture was heated to 60°C and kept at this temperature for 1 hour. Into this mixture, kept at 60°C and under gently stirring, a solution consisting of 100 ml of anhydrous hexane and 23 ml of PMHS (0.010 moles) was dropped into it over a period of time of 1.5 hours. At the end of the addition, stirring was continued for 2 hours at a temperature of 60°C. To this mixture a solution of 100 ml of anhydrous hexane and 22 ml of SiCl₄ (0.192 moles) was dropped over a period of 1 hour. At the end of the addition, stirring was continued for 3.5 hours at a temperature of 60°C. The temperature of the mixture was then brought to 65°C and kept for additional 2 hours. After cooling the mixture to room temperature, the stirring was stopped to have the solid settled. The supernatant liquid was removed, the solid was repeatedly washed with anhydrous hexane and finally dried at 60°C under nitrogen flow thus giving 360 g of a light reddish powder.

The chemical and physical characteristics of the resulting reddish powder were as follows:

Total Titanium = 1.4 % (by weight)
Mg = 0.5 % (by weight)
SiO₂ = 81.0 % (by weight)
Al = 1.4 % (by weight)
Cl = 8.4 % (by weight)
OBU = 6.3% (by weight)
Surface Area (B.E.T.) = 150 m²/g
Pore Volume (B.E.T.) = 0.35 cm³/g

EXAMPLE 3

In a 5 liter flask fitted with a mechanical stirrer and previously purged with nitrogen were fed 5.28 g (0.055 moles) of anhydrous MgCl₂ and 39.6 ml (0.116 moles) of Ti(OBu)₄. This mixture was allowed to stir at 300 rpm and heated to 150°C for about 12 hours in order to have the solids completely dissolved, thereby a clear liquid product was obtained. This resulting liquid was cooled down to 40°C and under gently stirring at 150 rpm, it was diluted with 3200 ml

of anhydrous hexane. Into this solution kept at 40°C and under the same stirring, 300 g of the silica support were added. This silica was previously dehydrated and treated with 23 ml (0.167 moles) of triethylaluminum diluted in anhydrous hexane, for 50 minutes and at room temperature. Once the addition
5 of the silica is completed, the mixture was heated to 60°C and kept at this temperature for 1 hour. Into this mixture, kept at 60°C and under gently stirring, a solution consisting of 100 ml of anhydrous hexane and 23 ml of PMHS (0.010 moles) was dropped into it over a period of time of 1.5 hours. At the end of the addition, stirring was continued for 2 hours at a temperature of 60°C. To this
10 mixture a solution of 100 ml of anhydrous hexane and 22 ml of SiCl₄ (0.192 moles) was dropped over a period of time of 1 hour. At the end of the addition, stirring was continued for 3.5 hours at a temperature of 60°C. The temperature of the mixture was then brought to 65°C and kept for additional 2 hours. After cooling the mixture to room temperature, the stirring was stopped to have the
15 solid settled. The supernatant liquid was removed, the solid was repeatedly washed with anhydrous hexane. The solid thus obtained was again suspended in 2200 ml of anhydrous hexane and then 31.4 g of DEAC (0.260 moles) in 200 ml of anhydrous hexane were added to the resulting suspension under gently stirring. Contact was maintained for 50 min at room temperature. Finally, the
20 supernatant liquid was removed and the solid was dried at 60°C under nitrogen flow thus giving 300 g of a brown-reddish powder.

The chemical and physical characteristics of the resulting reddish powder were as follows:

25 Total Titanium = 1.2 % (by weight)
Mg = 0.3 % (by weight)
SiO₂ = 81.0 % (by weight)
Al = 1.8 % (by weight)
Cl = 7.0 % (by weight)
OBu = 7.7 % (by weight)
30 Surface Area (B.E.T.) = 155 m²/g
Pore Volume (B.E.T.) = 0.36 cm³/g

EXAMPLE 4

In a 5 liter flask fitted with a mechanical stirrer and previously purged with nitrogen were fed 5.28 g (0.055 moles) of anhydrous MgCl_2 and 39.6 ml (0.116 moles) of $\text{Ti}(\text{OBU})_4$. This mixture was allowed to stir at 300 rpm and heated to 150°C for about 12 hours in order to have the solids completely dissolved, thereby a clear liquid product was obtained. This resulting liquid was cooled down to 40°C and under gently stirring at 150 rpm, it was diluted with 3200 ml of anhydrous hexane. Into this solution kept at 40°C and under the same stirring, 300 g of the silica support were added. This silica was previously dehydrated and treated with 23 ml (0.167 moles) of triethylaluminum diluted in anhydrous hexane, for 50 minutes and at room temperature. Once the addition of the silica is completed, the mixture was heated to 60°C and kept at this temperature for 1 hour. To this mixture a solution of 100 ml of anhydrous hexane and 22 ml of SiCl_4 (0.192 moles) was dropped over a period of time of 1 hour. At the end of the addition, stirring was continued for 3.5 hours at a temperature of 60°C. The temperature of the mixture was then brought to 65°C and kept for additional 2 hours. After cooling the mixture to room temperature, the stirring was stopped to have the solid settled. The supernatant liquid was removed, the solid was repeatedly washed with anhydrous hexane and then dried at 60°C under nitrogen flow, thus giving 390 g of a light reddish powder.

The chemical and physical characteristics of the resulting reddish powder were as follows:

Total Titanium = 1.5 % (by weight)
Mg = 0.3 % (by weight)
SiO₂ = 81.2 % (by weight)
Al = 1.2 % (by weight)
Cl = 7.2 % (by weight)
OBU = 7.6 % (by weight)
Surface Area (B.E.T.) = 153 m²/g
Pore Volume (B.E.T.) = 0.36 cm³/g

EXAMPLE 5

In a 5 liter flask fitted with a mechanical stirrer and previously purged with nitrogen were fed 52.8 g (0.554 moles) of anhydrous MgCl_2 and 396 ml (1.163

moles) of $\text{Ti}(\text{OBu})_4$. This mixture was allowed to stir at 300 rpm and heated to 150°C for about 12 hours in order to have the solids completely dissolved, thereby a clear liquid product was obtained. This resulting liquid was cooled down to 40°C and under gently stirring at 150 rpm, it was diluted with 3200 ml of anhydrous hexane. Into this solution kept at 40°C and under the same stirring, 300 g of the silica support were added. This silica was previously dehydrated and treated with 23 ml (0.167 moles) of triethylaluminum diluted in anhydrous hexane, for 50 minutes and at room temperature. Once the addition of the silica is completed, the mixture was heated to 60°C and kept at this temperature for 1 hour. To this mixture a solution of 200 ml of anhydrous hexane and 221 ml of SiCl_4 (1.929 moles) was dropped over a period of time of 1 hour. At the end of the addition, stirring was continued for 3.5 hours at a temperature of 60°C. The temperature of the mixture was then brought to 65°C and kept for additional 2 hours. After cooling the mixture to room temperature, the stirring was stopped to have the solid settled. The supernatant liquid was removed, the solid was repeatedly washed with anhydrous hexane and then dried at 60°C under nitrogen flow thus giving 300 g of a light reddish powder.

The chemical and physical characteristics of the resulting reddish powder were as follows:

Total Titanium = 1.7 % (by weight)
Mg = 2.4 % (by weight)
 SiO_2 = 76.7 % (by weight)
Al = 0.8 % (by weight)
Cl = 10.0 % (by weight)
OBu = 7.5 % (by weight)
Surface Area (B.E.T.) = 185 m^2/g
Pore Volume (B.E.T.) = 0.55 cm^3/g

EXAMPLE 6

In a 5 liter flask fitted with a mechanical stirrer and previously purged with nitrogen were fed 52.8 g (0.554 moles) of anhydrous MgCl_2 and 396 ml (1.163 moles) of $\text{Ti}(\text{OBu})_4$. This mixture was allowed to stir at 300 rpm and heated to 150°C for about 12 hours in order to have the solids completely dissolved, thereby a clear liquid product was obtained. This resulting liquid was cooled

down to 40°C and under gently stirring at 150 rpm, it was diluted with 3200 ml of anhydrous hexane. Into this solution kept at 40°C and under the same stirring, 300 g of the silica support were added. This silica was previously dehydrated and treated with 23 ml (0.167 moles) of triethylaluminum diluted in anhydrous hexane, for 50 minutes and at room temperature. Once the addition of the silica is completed, the mixture was heated to 60°C and kept at this temperature for 1 hour. To this mixture a solution of 200 ml of anhydrous hexane and 221 ml of SiCl₄ (1.929 moles) was dropped over a period of time of 1 hour. At the end of the addition, stirring was continued for 3.5 hours at a temperature of 60°C. The temperature of the mixture was then brought to 65°C and kept for additional 2 hours. After cooling the mixture to room temperature, the stirring was stopped to have the solid settled. The supernatant liquid was removed, the solid was repeatedly washed with anhydrous hexane. The solid thus obtained was again suspended in 2200 ml of anhydrous hexane and then 30 g of DEAC (0.249 moles) in 200 ml of anhydrous hexane were added to the resulting suspension under gently stirring. Contact was maintained for 50 min at room temperature. Finally, the supernatant liquid was removed and the solid was dried at 60°C under nitrogen flow thus giving 400 g of a brown-reddish powder.

The chemical and physical characteristics of the resulting reddish powder were as follows:

Total Titanium = 1.8 % (by weight)

Mg = 2.7 % (by weight)

SiO₂ = 75.5 % (by weight)

Al = 1.4 % (by weight)

Cl = 12.0 % (by weight)

OBu = 5.6 % (by weight)

Surface Area (B.E.T.) = 180 m²/g

Pore Volume (B.E.T.) = 0.53 cm³/g

EXAMPLE 7

In a 5 liter flask fitted with a mechanical stirrer and previously purged with nitrogen were fed 24 g (0.252 moles) of anhydrous MgCl₂ and 180 ml (0.528 moles) of Ti(OBu)₄. This mixture was allowed to stir at 300 rpm and heated to

150°C for about 12 hours in order to have the solids completely dissolved, thereby a clear liquid product was obtained. This resulting liquid was cooled down to 40°C and under gently stirring at 150 rpm, it was diluted with 3200 ml of anhydrous hexane. Into this solution kept at 40°C and under the same stirring, 300 g of the silica support were added. This silica was previously dehydrated and treated with 23 ml (0.167 moles) of triethylaluminum diluted in anhydrous hexane, for 50 minutes and at room temperature. Once the addition of the silica is completed, the mixture was heated to 60°C and kept at this temperature for 1 hour. To this mixture a solution of 100 ml of anhydrous hexane and 100 ml of SiCl₄ (0.873 moles) was dropped over a period of time of 1 hour. At the end of the addition, stirring was continued for 3.5 hours at a temperature of 60°C. The temperature of the mixture was then brought to 65°C and kept for additional 2 hours. After cooling the mixture to room temperature, the stirring was stopped to have the solid settled. The supernatant liquid was removed, the solid was repeatedly washed with anhydrous hexane and then dried at 60°C under nitrogen flow thus giving 360 g of a reddish powder.

The chemical and physical characteristics of the resulting reddish powder were as follows:

Total Titanium = 2.1 % (by weight)
Mg = 1.4 % (by weight)
SiO₂ = 78.3 % (by weight)
Al = 0.9 % (by weight)
Cl = 8.7 % (by weight)
OBU = 7.6 % (by weight)
Surface Area (B.E.T.) = 193 m²/g
Pore Volume (B.E.T.) = 0.62 cm³/g

EXAMPLE 8

In a 5 liter flask fitted with a mechanical stirrer and previously purged with nitrogen were fed 24 g (0.252 moles) of anhydrous MgCl₂ and 180 ml (0.528 moles) of Ti(OBU)₄. This mixture was allowed to stir at 300 rpm and heated to 150°C for about 12 hours in order to have the solids completely dissolved, thereby a clear liquid product was obtained. This resulting liquid was cooled down to 40°C and under gently stirring at 150 rpm, it was diluted with 3200 ml

of anhydrous hexane. Into this solution kept at 40°C and under the same stirring, 300 g of the silica support were added. This silica was previously dehydrated and treated with 23 ml (0.167 moles) of triethylaluminum diluted in anhydrous hexane, for 50 minutes and at room temperature. Once the addition
5 of the silica is completed, the mixture was heated to 60°C and kept at this temperature for 1 hour. To this mixture a solution of 100 ml of anhydrous hexane and 100 ml of SiCl₄ (0.873 moles) was dropped over a period of time of 1 hour. At the end of the addition, stirring was continued for 3.5 hours at a temperature of 60°C. The temperature of the mixture was then brought to 65°C
10 and kept for additional 2 hours. After cooling the mixture to room temperature, the stirring was stopped to have the solid settled. The supernatant liquid was removed, the solid was repeatedly washed with anhydrous hexane. The solid thus obtained was again suspended in 2200 ml of anhydrous hexane and then 30 g of DEAC (0.249 moles) in 200 ml of anhydrous hexane were added to the
15 resulting suspension under gently stirring. Contact was maintained for 50 min at room temperature. Finally, the supernatant liquid was removed and the solid was dried at 60°C under nitrogen flow thus giving 350 g of a brown-reddish powder.

The chemical and physical characteristics of the resulting reddish
20 powder were as follows:

Total Titanium = 2.0 % (by weight)
Mg = 1.5 % (by weight)
SiO₂ = 76.8 % (by weight)
Al = 1.7 % (by weight)
25 Cl = 10.3 % (by weight)
OBu = 6.7 % (by weight)
Surface Area (B.E.T.) = 202 m²/g
Pore Volume (B.E.T.) = 0.48 cm³/g

EXAMPLE 9

30 In a 5 liter flask fitted with a mechanical stirrer and previously purged with nitrogen were fed 52.8 g (0.554 moles) of anhydrous MgCl₂ and 396 ml (1.163 moles) of Ti(OBu)₄. This mixture was allowed to stir at 300 rpm and heated to 150°C for about 12 hours in order to have the solids completely dissolved,

thereby a clear liquid product was obtained. This resulting liquid was cooled down to 40°C and under gently stirring at 150 rpm, it was diluted with 3200 ml of anhydrous hexane. Into this solution kept at 40°C and under the same stirring, 300 g of the silica support were added. This silica was previously
5 dehydrated and treated with 23 ml (0.167 moles) of triethylaluminum diluted in anhydrous hexane, for 50 minutes and at room temperature. Once the addition of the silica is completed, the mixture was heated to 60°C and kept at this temperature for 1 hour. To this mixture a solution of 200 ml of anhydrous hexane and 221 ml of SiCl₄ (1.929 moles) was dropped over a period of time of
10 1 hour. At the end of the addition, stirring was continued for 3.5 hours at a temperature of 60°C. The temperature of the mixture was then brought to 65°C and kept for additional 2 hours. After cooling the mixture to room temperature, the stirring was stopped to have the solid settled. The supernatant liquid was removed, and the solid was repeatedly washed with anhydrous hexane. The
15 solid thus obtained was again suspended in 2200 ml of anhydrous hexane and then 30 g of DEAC (0.249 moles) in 200 ml of anhydrous hexane were added to the resulting suspension under gently stirring. Contact was maintained for 50 min at room temperature. The supernatant liquid was removed and the solid was once again suspended in 2200 ml of anhydrous hexane and then 30 g of
20 Tn-HAL (0.106 moles) in 200 ml of anhydrous hexane were added to the resulting suspension under gently stirring. Contact was maintained for 50 min at room temperature. Finally, the supernatant liquid was removed and the solid was dried at 60°C under nitrogen flow thus giving 340 g of a brown-reddish powder.

25 The chemical and physical characteristics of the resulting reddish powder were as follows:

Total Titanium = 1.9 % (by weight)
Mg = 2.9 % (by weight)
SiO₂ = 74.1 % (by weight)
30 Al = 1.5 % (by weight)
Cl = 12.6 % (by weight)
OBu = 6.0 % (by weight)
Surface Area (B.E.T.) = 167 m²/g

Pore Volume (B.E.T.) = 0.20 cm³/g

EXAMPLE 10

In a 5 liter flask fitted with a mechanical stirrer and previously purged with nitrogen were fed 24 g (0.252 moles) of anhydrous MgCl₂ and 180 ml (0.528 moles) of Ti(OBu)₄. This mixture was allowed to stir at 300 rpm and heated to 150°C for about 12 hours in order to have the solids completely dissolved, thereby a clear liquid product was obtained. This resulting liquid was cooled down to 40°C and under gently stirring at 150 rpm, it was diluted with 3200 ml of anhydrous hexane. Into this solution kept at 40°C and under the same stirring, 300 g of the silica support were added. This silica was previously dehydrated and treated with 23 ml (0.167 moles) of triethylaluminum diluted in anhydrous hexane, for 50 minutes and at room temperature. Once the addition of the silica is completed, the mixture was heated to 60°C and kept at this temperature for 1 hour. To this mixture a solution of 100 ml of anhydrous hexane and 100 ml of SiCl₄ (0.873 moles) was dropped over a period of time of 1 hour. At the end of the addition, stirring was continued for 3.5 hours at a temperature of 60°C. The temperature of the mixture was then brought to 65°C and kept for additional 2 hours. After cooling the mixture to room temperature, the stirring was stopped to have the solid settled. The supernatant liquid was removed, and the solid was repeatedly washed with anhydrous hexane. The solid thus obtained was again suspended in 2200 ml of anhydrous hexane and then 60 g of DEAC (0.498 moles) in 200 ml of anhydrous hexane were added to the resulting suspension under gently stirring. Contact was maintained for 50 min at room temperature. Finally, the supernatant liquid was removed and the solid was dried at 60°C under nitrogen flow thus giving 300 g of a brown-reddish powder.

The chemical and physical characteristics of the resulting reddish powder were as follows:

Total Titanium = 2.0 % (by weight)
Mg = 1.3 % (by weight)
SiO₂ = 76.3% (by weight)
Al = 2.3 % (by weight)
Cl = 10.8 % (by weight)

OBU = 6.3 % (by weight)
Surface Area (B.E.T.) = 200 m²/g
Pore Volume (B.E.T.) = 0.45 cm³/g

LABORATORY POLYMERIZATION TESTS

5 **EXAMPLE 11**

Polymerization of Ethylene (HDPE)

A 4-liter stainless steel autoclave, purged under nitrogen flow for 1 hour at 75°C and then cooled to 30°C, was fed with 0.06 g of the solid catalyst component from the example 8, 0.79 g of TEAL mixed with 75 ml of anhydrous
10 hexane, and 280 g of anhydrous propane. The temperature was raised to 60°C, and then 520 g of anhydrous propane were fed. The temperature was raised again to 80°C and then 2 bars of hydrogen were fed simultaneously with 7 bars of ethylene. After that, the temperature was settled to 85°C. The polymerization was conducted in slurry liquid phase. The polymerization time was 2 hours,
15 during which time the ethylene pressure was kept constant. After this period the reaction was stopped by venting off ethylene, hydrogen and propane and 55 g of polymer were obtained, which exhibited the following properties:

MIE	2.4 g/10 min
MIF/MIE	26
Polymer Density	0.96 g/cm ³
Bulk Density	0.46 g/cm ³

EXAMPLE 12

Copolymerization of Ethylene with Butene-1 (LLDPE)

20 A 4 liter stainless steel autoclave, purged under nitrogen flow for 1 hour at 75°C and then cooled to 30°C, was fed with 0.06 g of the solid catalyst component from the example 8, 0.78 g of TEAL mixed with 75 ml of anhydrous hexane, and 280 g of anhydrous propane. The temperature was raised to 60°C, and then 520 g of anhydrous propane were fed. The temperature was raised
25 again to 70°C, and then 290 ml of butene-1 were fed simultaneously with 2 bars of hydrogen and 5 bars of ethylene. After that, the temperature is settled to 75°C. The polymerization was conducted in slurry liquid phase. The

polymerization time was 3 hours, during which time the ethylene pressure was kept constant. After this period the reaction was stopped by venting off ethylene, butene-1, hydrogen and propane and 240 g of polymer were obtained, which exhibited the following properties:

MIE	0.91 g/10 min
MIF/MIE	26
Fraction Soluble in Xylene	9.2 %
Comonomer content	8.7 %
Polymer Density	0.917 g/cm ³
Bulk Density	0.36 g/cm ³

5 PILOT PLANT TESTS

A pilot plant continuously operated was used to prepare LLDPE as shown in FIGURE 2.

A fluidized bed gas phase reactor **1** with 45 cm of internal diameter and 120 cm of reaction zone height is fed by a dry-solid catalyst feeder **2**. The bed of polymer particles in reaction zone **3** is kept in fluidized state by a recycle stream **4** that works as a fluidizing medium as well as a dissipating heat agent for absorbing the exothermal heat generated within reaction zone **3**. The superficial velocity of the gas, resulting from the flow rate of recycle stream **4** within reactor **1** is 0.7 m/s. Stream **5**, which contains the gas discharged from reactor **1**, said gas having low monomer contents, is fed to the suction of compressor **6**. The combined reaction and compression heats are then removed from recycle stream **5** in an external heat exchange system **7** in order to control the reactor temperature. The composition of stream **5** is kept constant to yield a polymer with the required specifications.

Make-up components are fed to the system at spot **8** so as to make up the composition of recycle stream **5**. So, make-up stream **8** will include the triethyl aluminum (TEAL) that directly reacts in a ratio of 2 moles of TEAL per mole of catalyst. Also at the spot **8**, propane is fed as the selected non-reactive compound required to maintain the total pressure of the system.

The polymerization catalyst is introduced as a dry powder by a catalyst feeder into reactor **1** in a site within the reaction zone **3**, close to the distributing plate **9** in a rate to control the residence time of the catalyst. The reactive gases, including ethylene and comonomers are introduced at the spot **10**.

5 The produced polymer is discharged from the reaction zone through a discharge system **11** that provides the recovery of the reactive and non-reactive gases, recycling said gases back to the recycle stream **5** at spot **12** and lowers the pressure of the discharged mixture of polymer and gases at certain pressure for later conveying the produced polymer particles **13** for downward
10 sampling.

EXAMPLES 13 to 23

The examples 13 to 23 were conducted in the gas phase pilot reactor at 88° C, using in each EXAMPLE respectively the catalysts produced in the EXAMPLES 1 to 10. The catalyst produced in the EXAMPLE 10 was also used
15 in the pilot polymerization at 75° C as shown in the EXAMPLE 23.

In all examples the pilot reactor run was performed smoothly, with good catalytic yield and no agglomerates or sheets were formed. The polymers obtained had a good morphology and, in most cases, less than 1% of fines (< 250 μm).

20 The films obtained with these polymers presented very good optical properties and a low blocking strength.

During the performance of the EXAMPLE 20 it was performed a decay test and the measured half-life time was 3.8 hours. The results are shown in table 1.

TABLE 1

EXAMPLE	13	14	15	16	17	18	19	20	21	22	23
Catalyst used	Ex. 1	Ex. 2	Ex. 3	Ex. 4	Ex. 5	Ex. 6	Ex. 7	Ex. 8	Ex. 9	Ex. 10	Ex. 10
Ti (%)	7.0	1.4	1.2	1.5	1.7	1.8	2.1	2.0	1.9	2.0	2.0
Mg (%)	2.0	0.5	0.3	0.3	2.4	2.7	1.3	1.5	2.9	1.5	1.5
Temperature (°C)	88	88	88	88	88	88	88	88	88	88	75
Ethylene partial pressure (bar)	3	11.8	9	10.9	5	7	7	7	7	7	7
Total pressure (bar)	21	22	21	21	21	21	21	21	21	21	21
Residence Time (h)	4.43	3.71	5.32	3.20	4.86	3.92	3.18	2.89	3.91	3.70	3.15
H ₂ /ethylene (mole/mole)	0.10	0.098	0.086	0.096	0.096	0.118	0.098	0.12	0.13	0.12	0.17
Butene/ ethylene (mole/mole)	0.39	0.41	0.46	0.44	0.35	0.40	0.39	0.41	0.37	0.41	0.45
Catalytic yield (kg/g)	3.0	1.6	1.7	1.6	4.3	7.5	5.0	7.5	7.1	7.1	6.2
Bulk Density (g/ cm ³)	0.28	0.34	0.38	0.34	0.29	0.31	0.38	0.38	0.38	0.38	0.35
MIE (g/10 min)	0.68	0.66	0.72	0.74	0.64	0.68	0.69	0.67	0.69	0.65	0.57
MIF (g/10min)	20.4	17.3	20.6	19.9	23.3	18.6	19.1	17.6	18.2	16.9	15.2
MFR - F/E	30	26	28	27	36	27	28	26	26	26	26
Comonomer Content (%)	8.8	7.8	8.7	7.7	9.4	8.3	8.4	7.9	8.2	8.1	8.8
Fraction Soluble in Xylene (%)	12.3	8.9	9.4	7.1	13.7	9.4	9.5	7.8	10.1	8.0	9.3
Polymer Density (g/cm ³)	0.918	0.918	0.918	0.919	0.917	0.918	0.918	0.918	0.918	0.918	0.917
Flowability (s/100 g)	-	14.4	11.1	13.3	14.4	17.9	12.4	11.9	10.8	12.7	12.6
Particle size distribution (wt %)											
< 250 μm	2	2	1	1	2	3	<0.5	1	1	1	1
250 – 420 μm	7	7	7	2	7	5	2	2	2	2	2
420 – 840 μm	37	49	60	35	45	28	36	35	28	39	37
> 840 μm	54	42	32	62	46	64	62	62	69	58	60
Haze (%)	11.3	-	-	-	-	-	11.6	11.3	11.3	11.4	-
Gloss (%)	73.0	-	-	-	-	-	79.5	80.7	79.3	80.2	-
Blocking (g/100 cm ²)	-	22	21	15	-	24	24	16	30	19	24

CLAIMS

1. A process for obtaining a solid catalyst component for ethylene polymerization and copolymerization, wherein a carrier of particulate silica is impregnated with a catalytically active portion including titanium, magnesium, chlorine, alkoxy groups and at least one organometallic compound of the groups 1, 2, 12 or 13 of the periodic table, the process comprising the steps of:
 - (a) impregnating an activated particulate silica in particles using a solution of an organometallic compound of the groups 1, 2, 12 or 13 of the periodic table, in an inert organic solvent;
 - (b) removing the supernatant liquid from the step (a);
 - (c) preparing a solution obtained by reacting at least one magnesium compound, selected from magnesium halides and magnesium alkoxides and at least one titanium compound selected from titanium alkoxides and titanium halogen alkoxides;
 - (d) impregnating the silica obtained on (b) using the solution prepared in (c);
 - (e) optionally reacting the solid obtained in (d) with a reducing agent;
 - (f) reacting the solid obtained in (d) or (e) with a halogenating agent;
 - (g) treating thermally the solid obtained in (f);
 - (h) washing the solid obtained in (g) with an inert organic solvent;
 - (i) optionally washing the solid obtained in (h) with a solution of one or more organometallic compounds of the groups 1, 2, 12 or 13 of the periodic table.
2. A process for obtaining a solid catalyst component according to claim 1, wherein the activated particulate silica used in step (a) is a microspheroidal, porous silica.
3. A process for obtaining a solid catalyst component according to claim 1 or 2, wherein the activated particulate silica used in step (a) has an average particle size ranging from 10 to 120 μm .
4. A process for obtaining a solid catalyst component according to any one of claims 1 to 3, wherein the activated particulate silica used in step (a) has a surface area ranging from 250 to 500 m^2/g .

5. A process for obtaining a solid catalyst component according to claims 1 to 3, wherein the activated particulate silica used in step (a) has a pore volume ranging from 1.0 to 2.0 ml/g.
6. A process for obtaining a solid catalyst component according to claim 1,
5 wherein the organometallic compounds of groups 1, 2, 12 or 13 of the periodic table used in step (a) is trimethylaluminum, triethylaluminum (TEAL), methylaluminum dichloride, methylaluminum sesquichloride, isobutylaluminum dichloride, isobutylaluminum sesquichloride, ethylaluminum dichloride (EADC), diethylaluminum chloride (DEAC),
10 ethylaluminum sesquichloride (EASC), tri-n-hexylaluminum (Tn-HAL), tri-n-octylaluminum (TnOAL), butyl ethylmagnesium (BEM), butyl octylmagnesium (BOMAG), methylmagnesium chloride or ethylmagnesium chloride.
7. A process for obtaining a solid catalyst component according to claim 1,
15 wherein the magnesium compound used to prepare the solution of the step (c) is magnesium dichloride, magnesium diethylate, magnesium di-n-butylate, magnesium diisopropylate or magnesium diisobutylate.
8. A process for obtaining a solid catalyst component according to claim 1 or 7,
20 wherein the magnesium compound used to prepare the solution of the step (c) is used in an amount ranging from 0.0024 to 0.24 g of magnesium per g of silica.
9. A process for obtaining a solid catalyst component according to claim 1,
25 wherein the titanium compound used to prepare the solution of the step (c) is titanium tetra-n-propylate, titanium tetra-n-butylate, titanium tetra-i-propylate, titanium tetra-i-butylate or the corresponding titanium mono- or di-chloroalkoxides.
10. A process for obtaining a solid catalyst component according to claim 1 or 9,
wherein the titanium compound used to prepare the solution of the step (c) is used in an amount ranging from 0.01 to 1 g of titanium per g of silica.
- 30 11. A process for obtaining a solid catalyst component according to any one of claims 1, 7, 8, 9 or 10, wherein the molar ratio Ti/Mg used to prepare the solution of the step (c) is comprised between 0.3 and 4.

- 12.A process for obtaining a solid catalyst component according to claim 1, wherein the reducing agent used in the step (e) is Na-alkyl, Li-alkyl, Zn-alkyl, Mg-alkyl and corresponding aryl-derivatives, Grignard compounds of the type RMgX or polyhydrosiloxanes.
- 5 13.A process for obtaining a solid catalyst component according to claim 1 or 12, wherein the reducing agent used in the step (e) is $(\text{CH}_3)_3\text{SiO}[(\text{CH}_3)\text{HSiO}]_n\text{Si}(\text{CH}_3)_3$, $(\text{CH}_3\text{HSiO})_4$, $(\text{CH}_3\text{HSiO})_3$, $\text{H}_3\text{Si-O-SiH}_2\text{-OSiH}_3$ or phenylhydropolysiloxanes in which the hydrogen atoms can be partially replaced by methyl groups.
- 10 14.A process for obtaining a solid catalyst component according to claim 1 or 12, wherein the reducing agent used in the step (e) is used in an amount ranging from 0 to 2 moles per mole of titanium.
- 15.A process for obtaining a solid catalyst component according to claim 1, wherein the halogenating agent used in the step (f) is methylaluminum dichloride, methylaluminum sesquichloride, isobutylaluminum dichloride, isobutylaluminum sesquichloride, ethylaluminum dichloride (EADC), diethylaluminum chloride (DEAC), ethylaluminum sesquichloride (EASC), SiCl_4 , SnCl_4 , HCl , Cl_2 , HSiCl_3 , aluminum chloride, ethylboron dichloride, boron chloride, diethylboron chloride, HCCl_3 , PCl_3 , POCl_3 , acetyl chlorides, thionyl chloride, sulfur chloride, methyl trichlorosilane, dimethyl dichlorosilane, TiCl_4 , VCl_4 , CCl_4 , t-butyl chloride, n-butyl chloride, chloroform, 1,1,1-trichloroethane, 1,1,2-trichloroethane, 1,2-dichloroethane or dichloromethane.
- 20 16.A process for obtaining a solid catalyst component according to claim 1 or 15, wherein the halogenating agent used in the step (f) is used in an amount ranging from 0.5 to 3 moles of halogenating agent per mole of titanium.
- 17.A process for obtaining a solid catalyst component according to claim 1, wherein the thermal treatment of the step (g) is conducted from 0.5 hour to 5 hours and at a temperature from 60°C to 120°C .
- 30 18.A process for obtaining a solid catalyst component according to claim 1, wherein two different organometallic compounds are used in the step (i) to wash the solid obtained in step (h).

19. A process for obtaining a solid catalyst component according to claim 1 or 18, wherein the two different organometallic compounds in the step (i) are fed together, mixed in the same solution.
20. A process for obtaining a solid catalyst component according to claim 1 or 5 18, wherein the two different organometallic compounds in the step (i) are fed together, in individual solutions.
21. A process for obtaining a solid catalyst component according to claim 1 or 18, wherein the two different organometallic compounds in the step (i) are fed one after the other, in individual solutions.
- 10 22. A process for obtaining a solid catalyst component according to claims 1, 18, 19, 20 or 21 wherein the organometallic compound used in the step (i) is methylaluminum dichloride, methylaluminum sesquichloride, isobutylaluminum dichloride, isobutylaluminum sesquichloride, ethylaluminum dichloride (EADC), diethylaluminum chloride (DEAC), 15 ethylaluminum sesquichloride (EASC), tri-n-hexylaluminum (Tn-HAL) or tri-n-octylaluminum (TnOAL).
23. A process for obtaining a solid catalyst component according to claim 1, wherein the inert organic solvent used is hexane, heptane, octane or isoparaffin.
- 20 24. A solid catalyst component for ethylene polymerization and copolymerization, obtained according to the process described in claim 1, comprising a carrier of particulate silica and a catalytically active portion including titanium, magnesium, chlorine, alkoxy groups and at least one organometallic compound of the groups 1, 2, 12 or 13 of the periodic table.
- 25 25. A solid catalyst component according to claim 24, wherein the solid catalyst component morphology is spheroidal.
26. A solid catalyst component according to claim 24, wherein the solid catalyst has an average particle size ranging from 10 to 120 μm .
27. A solid catalyst component according to claim 24, wherein the solid catalyst 30 has a surface area ranging from 80 to 300 m^2/g .
28. A solid catalyst component according to claim 24, wherein the solid catalyst has a pore volume ranging from 0.1 to 1.0 ml/g .

29. A solid catalyst component according to claim 24, wherein the magnesium is present in an amount ranging from 0.003 to 0.03 g of magnesium per g of solid catalyst.
- 5 30. A solid catalyst component according to claim 24, wherein the titanium is present in an amount ranging from 0.005 to 0.02 g of titanium per g of solid catalyst.
- 10 31. A solid catalyst component according to claim 24, wherein the organometallic compound of the groups 1, 2, 12 or 13 of the periodic table is present in an amount ranging from 0.003 to 0.03 g of metal per g of solid catalyst.
32. A solid catalyst component according to claim 24 or 31, wherein the organometallic compound of the groups 1, 2, 12 or 13 of the periodic table is an organo-aluminum, an organo-magnesium, an organo-lithium or an organo-zinc compound.
- 15 33. A solid catalyst component according to claim 24, wherein the alkoxy groups is present in an amount ranging from 0.03 to 0.08 g of alkoxy groups per g of solid catalyst.
34. A solid catalyst component according to claim 24 or 33, wherein the alkoxy groups is n-propoxy, i-propoxy, n-butoxy or i-butoxy.
- 20 35. A solid catalyst component according to claim 24, wherein the chlorine is present in an amount ranging from 0.05 to 0.12 g of chlorine atoms per g of solid catalyst.
36. A process for ethylene polymerization and copolymerization wherein is used the catalyst according to one or more of the claims 24 to 35.
- 25 37. A process for ethylene polymerization and copolymerization according to claim 36, wherein it is carried out in gas phase.
38. Process for ethylene polymerization and copolymerization according to claim 36 wherein the co-catalyst used in the polymerization process is an alkyl aluminum.
- 30 39. Process for ethylene polymerization and copolymerization according to claims 36 or 38 wherein the co-catalyst used in the polymerization process is trimethyl aluminum or triethyl aluminum.

40. Process for ethylene polymerization and copolymerization according to claims 36, 38 or 39 wherein mass ratio co-catalyst:catalyst in the polymerization process is between 0.5:1 and 6:1.
- 5 41. A process for ethylene polymerization and copolymerization according to claims 36, 37 or 38, wherein the catalyst is fed in dry bulk powder, in paste, in oil suspension or in solvent suspension.
42. A process for ethylene polymerization and copolymerization according to claims 36 or 41, wherein the catalyst is fed directly into the polymerization reactor.
- 10 43. A process for ethylene polymerization and copolymerization according to claims 36 or 41, wherein the catalyst is prepolymerized before to be fed into the polymerization reactor.
44. A process for ethylene polymerization and copolymerization according to claims 36, 41 or 43, wherein the catalyst is prepolymerized with ethylene or
15 propylene before to be fed into the polymerization reactor.
45. A linear low density polyethylene produced according to the process of the claims 36 to 44.
46. A linear medium density polyethylene produced according to the process of the claims 36 to 44.
- 20 47. A high density polyethylene produced according to the process of the claims 36 to 44.

FIGURE 1


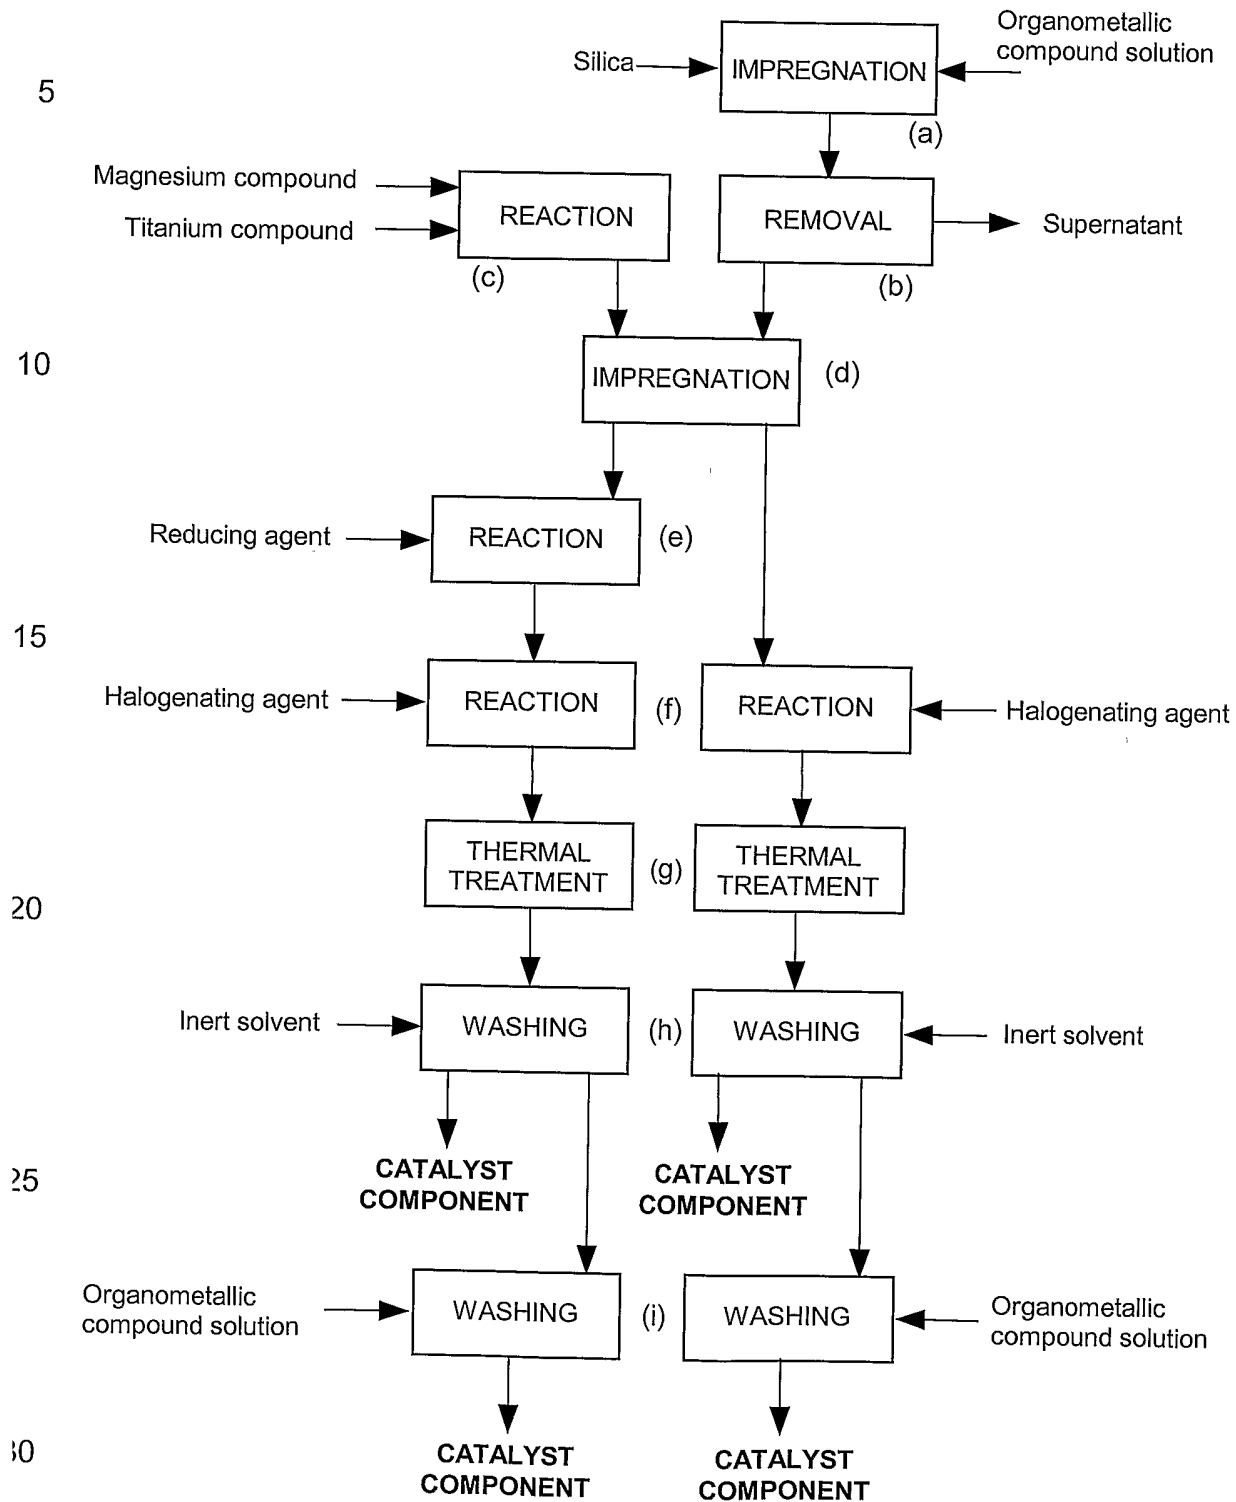


FIGURE 2

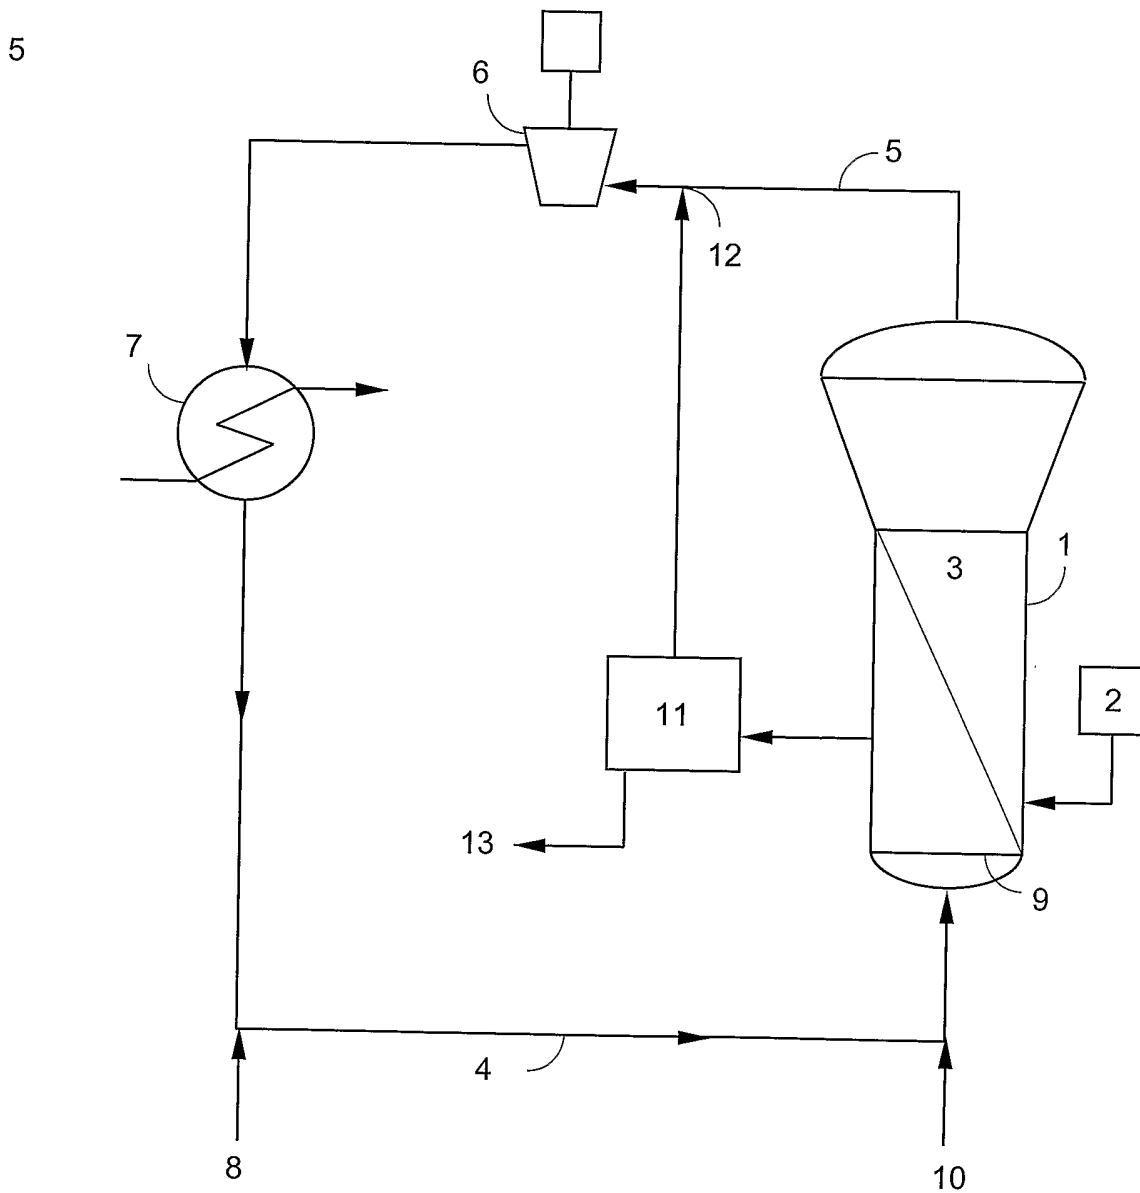

INTERNATIONAL SEARCH REPORT

Intern: Application No

PCT/BR 02/00086

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C08F10/00 C08F4/656

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 C08F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, CHEM ABS Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 522 651 A (ENICHEM POLIMERI) 13 January 1993 (1993-01-13) page 4, line 1 -page 6, line 40 claim 11	1-11, 15-17, 23-26, 32, 34, 36, 38-41, 45-47
X	WO 91 08239 A (NESTE OY) 13 June 1991 (1991-06-13) examples 7, 10 page 25; example 10	1-47
A	EP 0 480 435 A (ENICHEM POLIMERI) 15 April 1992 (1992-04-15) page 4, line 1 -page 6, line 30	1-47
	-/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

30 June 2003

Date of mailing of the international search report

11. 07. 2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Parry, J

INTERNATIONAL SEARCH REPORT

International application No.
PCT/BR 02/00086

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest.
- No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: claims 1-47 (in part)

The subject matter of claims 1-47, insofar as it relates to step (a) of claim 1 where a group 1 organometallic compound is employed.

2. Claims: claims 1-47 (in part)

The subject matter of claims 1-47, insofar as it relates to step (a) of claim 1 where a group 2 organometallic compound is employed.

3. Claims: claims 1-47 (in part)

The subject matter of claims 1-47, insofar as it relates to step (a) of claim 1 where a group 12 organometallic compound is employed

4. Claims: claims 1-47 (in part)

The subject matter of claims 1-47, insofar as it relates to step (a) of claim 1 where a group 13 organometallic compound is employed.

INTERNATIONAL SEARCH REPORT

Intern: Application No
PCT/BR 02/00086

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 408 750 A (MITSUI PETROCHEMICAL IND) 23 January 1991 (1991-01-23) examples 24,25 -----	1-47
A	EP 0 240 254 A (EXXON CHEMICAL PATENTS INC) 7 October 1987 (1987-10-07) examples 1,13,27-29 -----	1-47
A	EP 0 045 885 A (MONTEDISON SPA) 17 February 1982 (1982-02-17) page 9, line 9 -page 10; example 1 page 14; example A page 17; table II -----	1-47
A	US 5 585 317 A (CUFFIANI ILLARO ET AL) 17 December 1996 (1996-12-17) cited in the application example 2 -----	1-47

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat Application No

PCT/BR 02/00086

Patent document cited in search report		Publication date	Patent family member(s)	Publication date			
EP 0522651	A	13-01-1993	IT 1251465 B	15-05-1995			
			AT 116340 T	15-01-1995			
			AU 651470 B2	21-07-1994			
			AU 1948292 A	14-01-1993			
			BR 9202665 A	23-03-1993			
			CA 2073644 A1	13-01-1993			
			CN 1069031 A ,B	17-02-1993			
			DE 69201023 D1	09-02-1995			
			DE 69201023 T2	22-06-1995			
			DK 522651 T3	24-04-1995			
			EG 20437 A	29-04-1999			
			EP 0522651 A2	13-01-1993			
			ES 2066551 T3	01-03-1995			
			FI 923154 A	13-01-1993			
			JP 5214024 A	24-08-1993			
			KR 9501278 B1	15-02-1995			
			MX 9204062 A1	01-07-1993			
			NO 922712 A ,B,	13-01-1993			
			RU 2073689 C1	20-02-1997			
			US 5298474 A	29-03-1994			
ZA 9205140 A	28-04-1993						
WO 9108239	A	13-06-1991	FI 895703 A	29-05-1991			
			AT 119169 T	15-03-1995			
			CA 2068652 A1	29-05-1991			
			DE 69017469 D1	06-04-1995			
			DE 69017469 T2	29-06-1995			
			EP 0511962 A1	11-11-1992			
			WO 9108239 A1	13-06-1991			
			JP 2898753 B2	02-06-1999			
			JP 5501577 T	25-03-1993			
			NO 922124 A	24-07-1992			
			US 5461018 A	24-10-1995			
			EP 0480435	A	15-04-1992	IT 1252041 B	29-05-1995
						AT 127130 T	15-09-1995
BR 9104397 A	09-06-1992						
CA 2053154 A1	12-04-1992						
CS 9103084 A3	15-04-1992						
DE 69112560 D1	05-10-1995						
DE 69112560 T2	29-02-1996						
DK 480435 T3	16-10-1995						
EP 0480435 A2	15-04-1992						
ES 2077132 T3	16-11-1995						
FI 914772 A	12-04-1992						
GR 3017677 T3	31-01-1996						
JP 5148318 A	15-06-1993						
MX 9101518 A1	01-06-1992						
NO 913971 A ,B,	13-04-1992						
SK 279390 B6	04-11-1998						
RU 2076110 C1	27-03-1997						
US 5521135 A	28-05-1996						
ZA 9108088 A	29-07-1992						
EP 0408750	A	23-01-1991	CA 1335094 C	04-04-1995			
			JP 1287106 A	17-11-1989			
			JP 2613621 B2	28-05-1997			
			JP 1287107 A	17-11-1989			

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/BR 02/00086

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0408750	A	JP 2656946 B2	24-09-1997
		JP 1292010 A	24-11-1989
		JP 2617988 B2	11-06-1997
		JP 1292008 A	24-11-1989
		JP 2723134 B2	09-03-1998
		JP 2032104 A	01-02-1990
		JP 2667453 B2	27-10-1997
		JP 2032103 A	01-02-1990
		JP 2732597 B2	30-03-1998
		EP 0408750 A1	23-01-1991
		EP 0494084 A1	08-07-1992
		WO 8910942 A1	16-11-1989
		US 5155078 A	13-10-1992
		US 5192731 A	09-03-1993
		AT 190072 T	15-03-2000
		DE 68929161 D1	06-04-2000
		DE 68929161 T2	14-09-2000
		KR 9209615 B1	22-10-1992
		KR 9209614 B1	22-10-1992
		AT 155799 T	15-08-1997
DE 68928204 D1	04-09-1997		
DE 68928204 T2	22-01-1998		
EP 0240254	A	07-10-1987	
		AU 7076387 A	08-10-1987
		EP 0240254 A2	07-10-1987
		JP 63245407 A	12-10-1988
EP 0045885	A	17-02-1982	
		IT 1150031 B	10-12-1986
		AU 552362 B2	29-05-1986
		AU 7318581 A	28-01-1982
		CA 1171062 A1	17-07-1984
		DE 3177057 D1	29-06-1989
		EP 0045885 A2	17-02-1982
		JP 57115406 A	17-07-1982
ZA 8104993 A	28-07-1982		
US 5585317	A	17-12-1996	
		IT 1262934 B	22-07-1996
		US 5726261 A	10-03-1998
		AT 165843 T	15-05-1998
		AU 655526 B2	22-12-1994
		AU 3215793 A	05-08-1993
		BR 9300391 A	03-08-1993
		CA 2088525 A1	01-08-1993
		CN 1075485 A ,B	25-08-1993
		CN 1117499 A	28-02-1996
		DE 69318318 D1	10-06-1998
		DE 69318318 T2	19-11-1998
		DK 553806 T3	07-10-1998
		EP 0553806 A1	04-08-1993
		ES 2117061 T3	01-08-1998
		FI 930403 A	01-08-1993
		IL 104562 A	31-10-1995
		JP 3285637 B2	27-05-2002
		JP 6065314 A	08-03-1994
KR 250336 B1	01-04-2000		
MX 9300533 A1	29-07-1994		
NO 930348 A	02-08-1993		
RU 2118330 C1	27-08-1998		

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/BR 02/00086

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5585317	A	ZA 9300664 A	02-09-1993