



(51) International Patent Classification:
H01H 1/20 (2006.01)

(21) International Application Number:
PCT/IB2012/054707

(22) International Filing Date:
11 September 2012 (11.09.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0911/MUM/2012 28 March 2012 (28.03.2012) IN

(71) Applicant (for all designated States except US): **LARSEN & TOUBRO LIMITED** [IN/IN]; L & T House, Ballard Estate, State of Maharashtra, India, Mumbai 400 001 (IN).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PHILIP, Anoop** [IN/IN]; Gr. floor, ABEB Building, Gate no. 7, Powai campus (East), Larsen & Toubro, Saki Vihar Road, Andheri East, India, Mumbai 400074 (IN). **GUPTA, Mukul** [IN/IN]; Gr. floor, ABEB Building, Gate no. 7, Powai campus (East), Larsen & Toubro, Saki Vihar Road, Andheri East, India, Mumbai 400074 (IN).

(74) Agents: **MAJUMDAR, Subhatosh** et al.; S MAJUMDAR & CO, 5, Harish Mukherjee Road, Kolkata 700025 (IN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: AN IMPROVED DOUBLE BREAK CONTACT SYSTEM FOR MOULDED CASE CIRCUIT BREAKERS

Fig 3

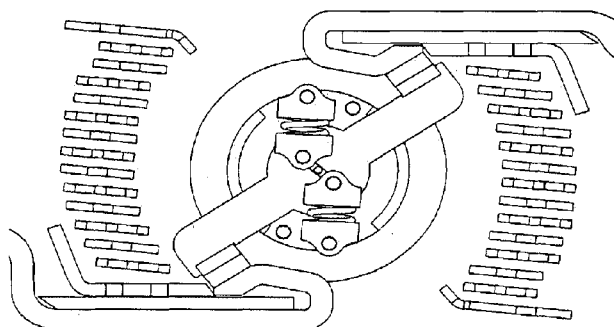

(57) Abstract: The invention relates to an improved double break contact system for use in moulded case circuit breakers. The system comprises shaft means (8), fixed contact means (1 and 2) and moving contact means (3) mounted on shaft means (8), spring means (4) operatively mounted on the shaft means (8), holder means (5) securing said spring means (4) wherein holder means being rotatably mounted on the shaft means in a manner that rotation of the shaft means in operation rotates said holder means. The spring means is adapted to provide force opposing the electromagnetic

AN IMPROVED DOUBLE BREAK CONTACT SYSTEM FOR MOULDED CASE CIRCUIT BREAKERS

TECHNICAL FIELD OF THE INVENTION

The present invention generally relates to contact system for circuit breakers, mainly moulded case circuit breakers (MCCBs). More particularly, the invention is concerned about a contact system comprising a spring arrangement where the moving contact flips open during short circuit condition.

BACKGROUND AND THE PRIOR ART

Circuit breakers are used for switching and protection of electrical equipments. It consists mainly of current sensing means, mechanism and contact system. The contact system consists of a set of fixed contacts and a moving contact. During any fault (short-circuit) in the line, the moving contact is opens up and clears the fault. During ON condition, a set of springs provide contact force to maintain the moving contact in ON condition. Different arrangements of springs are followed currently for maintaining contact pressure.

Nowadays the contact system is made in such a way that the moving contact repels open during any fault in line due to electromagnetic forces. During this movement the electromagnetic force has to fully act against the springs providing contact pressure.

The different means of contact arrangement currently in use are shown in Figs. 1(a) to 1(d) with reference to the prior patent documents.

US5534832 discloses a switch having at least one power switching pole includes a contact bridge cooperating with fixed contacts and adapted to be maneuvered either by mobile parts of a solenoid or by a tripping mechanism. The contact bridge is rotatable and the mobile parts of the solenoid operate the contact bridge through the intermediary of a transmission mechanism. Referring figure 1a it would be found that the contact system is compression spring based non flappable type.

US5310971 discloses a molded case low voltage circuit breaker comprising a rotary contact bridge, a pair of stationary contacts cooperating with the contact bridge, current input conductors to the stationary contacts arranged to generate electrodynamic forces repelling the contact bridge to a repelled open position when a short-circuit occurs, a rotary bar having a transverse orifice housing with clearance the contact bridge which protrudes out from both sides of the bar, at least one pair of tension springs fitted between the bar and the contact bridge to provide a contact pressure of the contact bridge on the stationary contacts in closed position of the circuit breaker, while allowing rotation of the contact bridge to the repelled open position due to the electrodynamic forces. However, the system of the prior art is extension spring based. Reference is drawn to figure 1b.

US6870112 discloses a low-voltage circuit breaker that allows optimum execution of the electrical switching operations, allowing in particular to eliminate or at least minimize the possibility that in short-circuit conditions the moving contact bounces toward the fixed one, with consequent restriking of the electric arc, with a constructive structure that is simple and functionally effective and does not require additional latching elements during opening. The contact system described in this prior art document is extension spring and profile based as shown in figure 1c.

US7394032 discloses an electrodynamically tilting contact system for power circuit breakers, especially for current-limiting circuit breakers, in which a breaker shaft segment, a rotary contact bridge pivotably mounted therein and contact force springs constitute components of a tilting snap-action mechanism that holds the rotary contact bridge in a repulsed position after the fixed contacts have been electrodynamically repulsed. The prior system is a compression spring based profile type contact system as shown in figure 1d.

The main limitations of the existing arrangements are:

- Most of the configurations have a continuously opposing spring force against the electromagnetic repulsion force giving less opening speed. (There is no flip locking)
- Contact pressure for most of the configurations is provided by extension springs which are comparatively complex in construction and less accurate. Also no flip locking is possible in simple construction using extension springs.

- The absence of flip locking in many of the configurations can result in contact not remaining in the final repelled condition after the fault has been cleared and current comes to zero.
- 5 - Even in cases where flip locking has been proposed the holding arrangement of springs are made in ways which could bring instability in contacts and increased friction occurs.
- All the above drawbacks of conventional arrangements also translate into lesser contact opening during a fault which makes clearing higher faults difficult. (If the
10 contacts open more, more arc voltage is obtained which helps in easier fault clearance).
-

Fig 1a and 1d shows compression spring based shaft construction, where as Fig 1b and 1c shows extension spring based shaft construction. The arrangement shown in Fig 1a is
15 a non flappable type of contact system. This causes the spring to continuously oppose the moving contact, thus reducing the efficiency of short circuit breaking. The arrangement shown in Fig 1b and 1c are profile based systems in which the springs apply contact pressure through cam action. This causes increased friction on the contacts, thus reducing the efficiency of short circuit breaking. The arrangement shown in Fig 1d is a compression
20 spring based system. But the force is transferred to contact through cam action. This can lead to non stability of moving contact and can also increase friction.

In a conventional system, when contact button wear out due to short circuit or normal switching, the contact springs adjust to push the contact further closing the contact. Due to
25 this adjustment, a part of contact pressure is lost. Fig.2 shows the variation of contact pressure with erosion for a conventional system. This decrease in contact pressure causes increased resistance between contacts. This causes problems of higher temperature rise in the breaker. This also increases the burden on other components in the breaker.

30 The conventional technology for shaft construction uses an open shaft construction or partially closed construction. For rotation of moving contact with respect to the shaft, there has to be an opening in the shaft with slot length depending on degree of rotation of moving contact. This produces the following problems:

1. During arcing hot gases and arc products are produced which can enter inside the shaft damaging the components like springs and pins inside the shaft.
- 5 2. An open construction leads to lesser differential pressure on arc, i.e. the pressure difference between the front and rear of arc will be lesser. Increased differential pressure is required for efficient driving of arc into the extinguishing zone.
- 10 3. An open shaft construction increases the chance of standing arc because of lesser insulation between the contacts.

Therefore, there exists a need of a contact system comprising a spring arrangement where the moving contact flips open during short circuit condition. Further the contact system of the present invention would be able to address all the limitations of the prior art as
15 discussed hereinabove.

The present inventors have found that a spring arrangement can be uniquely designed in such a way that, for initial opening of contact system the spring force opposes the electromagnetic force and then after that aids the electromagnetic force. This arrangement
20 helps in an increased opening velocity, which in turn helps in better breaking. The inventors have also found that in the newly designed double break contact system the contact pressure is maintained even after wear out of the contacts. This would help the breaker in maintaining the same level of performance even after erosion of contacts. Further the construction of the present invention has been provided with a movable shaft
25 cover which rotates along with the moving contacts during repulsion when there is a short circuit.

OBJECTS OF THE INVENTION

A basic object of the present invention is to overcome the disadvantages/drawbacks of the known art.

Another object of the present invention is to provide an improved double break contact system for moulded case circuit breakers.

Another object of the present invention is to provide a holder arrangement such that the system attains maximum stability.

Another object is to provide minimal friction effect.

These and other advantages of the present invention will become readily apparent from the following detailed description read in conjunction with the accompanying drawings.

SUMMARY OF THE INVENTION

The following presents a simplified summary of the invention in order to provide a basic understanding of some aspects of the invention. This summary is not an extensive overview of the present invention. It is not intended to identify the key/critical elements of the invention or to delineate the scope of the invention. Its sole purpose is to present some concept of the invention in a simplified form as a prelude to a more detailed description of the invention presented later.

There is provided an improved double break contact system for moulded case circuit breakers.

According to one aspect of the present invention there is provided an improved double break contact system for use in moulded case circuit breakers, said system comprising : shaft means;

fixed contact means and moving contact means, said moving contact means being mounted on said shaft means such that said moving contact means rotate with respect to the movement of the shaft means;

5 spring means operatively mounted on the said shaft means;

holder means securing said spring means ;

wherein said holder means being rotatably mounted on said shaft means in a manner that rotation of said shaft means in operation rotates said holder means wherein said spring means is adapted to provide force opposing the electromagnetic force as well as force
10 aiding the electromagnetic force.

BRIEF DESCRIPTION OF THE ACCOMPANYING DRAWINGS

So that those having ordinary skill in the art will more readily understand how to construct
15 a contact system comprising a spring arrangement where the moving contact flips open during short circuit condition in accordance with the present disclosure, exemplary embodiments are described in details herein below with reference the accompanying drawings wherein:

20 Figs. 1a to 1d illustrate contact systems of the prior art.

Fig 2 illustrates the variation of contact pressure with erosion for a conventional system.

Fig 3 illustrates the double break contact system according to the present invention in ON
25 condition for use in moulded case circuit breakers.

Fig 4 illustrates the double break contact system according to the present invention in repelled condition.

30 Fig 5 illustrates isometric view of the double break contact system of the present invention.

Fig 6 illustrates the variation of contact pressure with erosion in the contact system of the present invention.

Fig 7 illustrates the application of force on the spring arrangement of the contact system.

Fig 8 illustrates enclosed shaft construction.

5

Fig 9 illustrates shaft cover.

Fig 10 illustrates one side open view of the enclosed shaft.

10 Fig 11 illustrates a moulded circuit breaker with enclosed shaft.

Fig 12 illustrates a moulded circuit breaker with enclosed shaft with the moving contacts in repelled open position.

15 Fig 13 illustrates a moulded circuit breaker without enclosed shaft with the moving contacts in repelled open position.

Fig 14 illustrates the spring holder arrangement in the present invention.

20 Fig 15 illustrates an optional spring holder arrangement which can be used in the contact system of the present invention.

Fig 16 illustrates design of the fixed contact used in the contact system of the present invention.

25

DETAILED DESCRIPTION OF THE ACCOMPANYING DRAWINGS

The following drawings are illustrative of particular examples for enabling methods of the present invention, are descriptive of some of the methods, and are not intended to limit the scope of the invention. The drawings are not to scale (unless so stated) and are intended for use in conjunction with the explanations in the following detailed description.

30

Fig 3 shows the new MCCB contact system in ON condition. The current conduction happens through the fixed contact (1) onto the moving contact (3) and again to the second

fixed contact (2). The compression spring (4) arranged between the holders (5) provide the contact force required to maintain the pressure between moving contacts (3) and fixed contacts (1 and 2) to desired levels. The contacts are designed (as in most of present MCCBs) in such a way that during short circuit conditions, an electromagnetic force acts between the moving contact and the fixed contacts. This force rotates the moving contact and brings it to repelled position as shown in Fig.4. In the present invention the fixed contact has been designed such that it helps in increasing the contact opening as compared to a conventional contact system. As shown separately in Fig. 16 the fixed contacts (1 and 2) have a substantially u shaped profile in which the contact portion which comes in contact with the moving contacts (3) comprises an inward bent portion (6). During the motion the holders (5) rotate on pins (7) mounted on the shaft (8). This arrangement provides easy rotation of holders and helps in channelizing the spring force exactly in the required direction. The moving contact is supported only by the holder arrangement. This enables moving contact to face minimal friction during movement. The arrangement of moving contact is shown in Fig.5. This type of spring arrangement also enables the system to have a high contact opening than conventional systems. The shaft construction is also much simplified in this arrangement as compared to conventional systems.

The arrangement of springs on the holder is shown in detail in Fig.14. The holder arrangement as illustrated in Fig. 14 comprises two substantially rectangular sockets (9) having pins (10) located inside said sockets (9). The springs (4) are mounted on the said pins (10) and secured in the said sockets (9). The sockets (9) further comprise holes (11) at the top for pin mounting the holders on the shaft in a manner that holders are free to rotate on the shaft surface. It is to be noted in this context that the sockets have been described as rectangular in the present embodiment of the invention which should not be considered to be limiting scope of the invention. The shape of the sockets can be anything fulfilling the ergonomics of the other components/parts of the contact system.

A different method of contact arrangement which is possible in this configuration is also shown in Fig.15. This is a simpler arrangement as compared to the above mentioned concept, but needs more space for implementation. The contact systems are provided with limited space and therefore, the industry demands arrangements which can be functionally fitted in a specified space.

In ON condition Torque due to spring by moving contact is transferred to contact pressure. As contacts wear, due to adjustment by springs, the spring force reduces. For keeping spring torque at the same value, the perpendicular distance from line of action of spring force to shaft centre should increase with erosion. This increase in length should produce a greater increment in torque than what is lost due to decrease in spring force. This is achieved by keeping the spring rate to the lowest possible value.

As shown in Fig.6 the contact pressure increases with erosion.

This gives the following advantages.

1. Improved thermal performance of the breaker due to improved contact pressure.
2. Higher electrical life of breaker due to the ability to perform after erosion.
3. Improved performance after short circuit due to the ability to perform even after erosion.
4. Chance to use less thick button giving option for material saving.

Figure 8 shows enclosed shaft construction wherein the shaft cover (12) (also shown separately in Fig. 9) secures the shaft (8) and moving contact (3). The shaft cover (12) can be in the form of hollow cylinder with slots (13) for insertion of the moving contact (3). The shaft cover can be moulded out of flame retardant thermoplastic materials.

During repulsion, the moving contact rotates with respect to the shaft. During this rotation, moving contact touches the shaft cover flap (14) shown in Fig 9, and thus rotates the shaft cover along with it. When the moving contact opens fully during repulsion as shown in Fig 12, the shaft cover completely encloses the shaft. If shaft cover is not present as shown in Fig 13, the shaft leaves an open slot after the moving contact has repelled.

The closed construction provides the following advantages

1. It protects the inside components like springs and pins from hot gases and arc products during short circuit arcing.
2. It helps in developing higher pressure behind the arc due to closed region, thus driving the arc away from the shaft into the arc extinguishing region as shown in Fig 12.

3. It acts as an insulation barrier between live parts during short circuit and prevents standing arc, thus helping the breaker in effective arc quenching. In Fig 11, there is a possibility of arcing between Points A and B during short circuit. The shaft cover
5 stands as an insulation medium between the two points and hence nullifies the possibility of this arcing.

4. When the moving repels open as shown in Fig 12, there is a chance of breakdown of air between Point C and Point D, which can lead to standing arc and hence short
10 circuit failure. The shaft cover flap shown in Fig 6 acts as an insulation barrier between these two points and hence prevents failure.

Although the embodiments herein are described with various specific embodiments, it will be obvious for a person skilled in the art to practice the embodiments herein with modifications. However, all such modifications are deemed to be within the scope of the
15 claims.

It is also to be understood that the following claims are intended to cover all of the generic and specific features of the embodiments described herein and all the statements of the scope of the embodiments which as a matter of language might be said to fall there
20 between.

CLAIMS

5

1. An improved double break contact system for use in moulded case circuit breakers, said system comprising :

shaft means;

10

fixed contact means and moving contact means, said moving contact means being mounted on said shaft means such that said moving contact means rotate with respect to the movement of the shaft means;

spring means operatively mounted on the said shaft means;

holder means securing said spring means ;

15

wherein said holder means being rotatably mounted on said shaft means in a manner that rotation of said shaft means in operation rotates said holder means

wherein said spring means is adapted to provide force opposing the electromagnetic force as well as force aiding the electromagnetic force.

20

2. Contact system as claimed in claim 1 wherein said fixed contact means comprising a substantially u shaped profile in which the contact portion which coming in contact with the moving contact means having an inward bent portion.

25

3. Contact system as claimed in claim 1 wherein said spring means are compression springs.

4. Contact system as claimed in claim 1 wherein said holder means comprising substantially rectangular socket means for accommodation of said spring means.

- 5 5. Contact system as claimed in claim 1 further comprising pin means adapted for mounting said holder means on the shaft means in a manner that the said spring means are rotatable with the rotation of said shaft means thereby channelizing the spring force exactly in the required direction.
- 10 6. Contact system as claimed in claim 1 further comprising shaft cover means securing the shaft means.
- 15 7. Contact system as claimed in claim 6 wherein said shaft cover means comprising slot means allowing the moving contact means to protrude outside the shaft cover means.
- 20 8. Contact system as claimed in claim 6 wherein said shaft cover means further comprising plurality of shaft cover flap means.
- 20 9. An improved double break contact system for use in moulded case circuit breakers as herein described and illustrated with reference to accompanying drawings.

Fig 1a

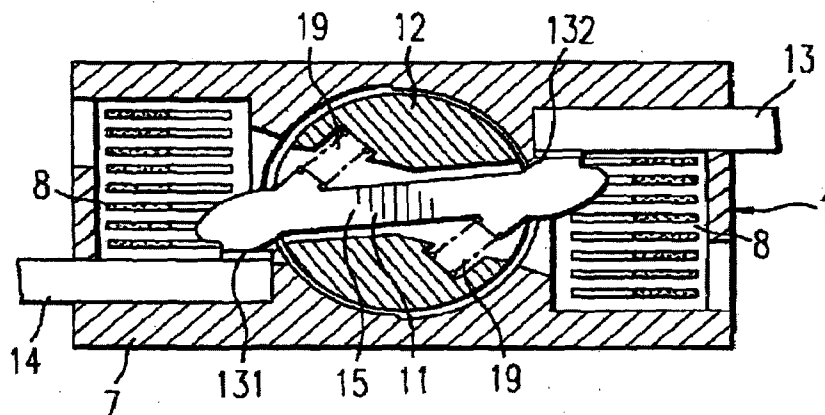


Fig 1b

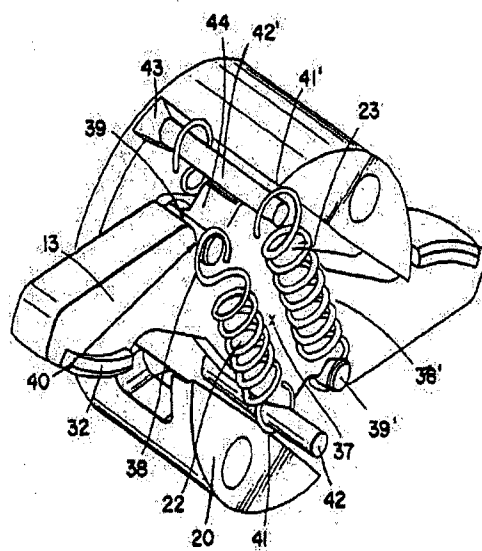


Fig 1c

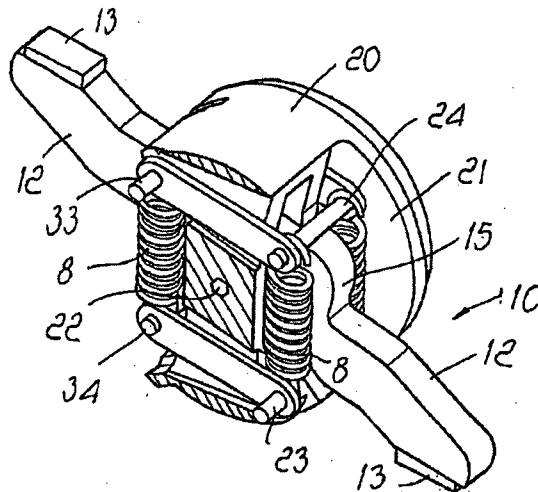


Fig 1d

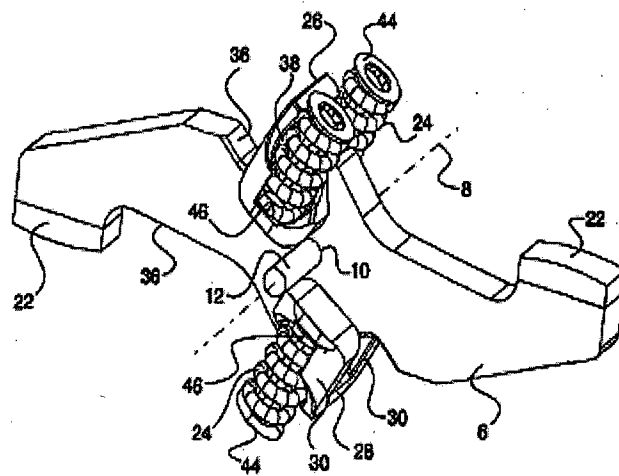


Fig 2

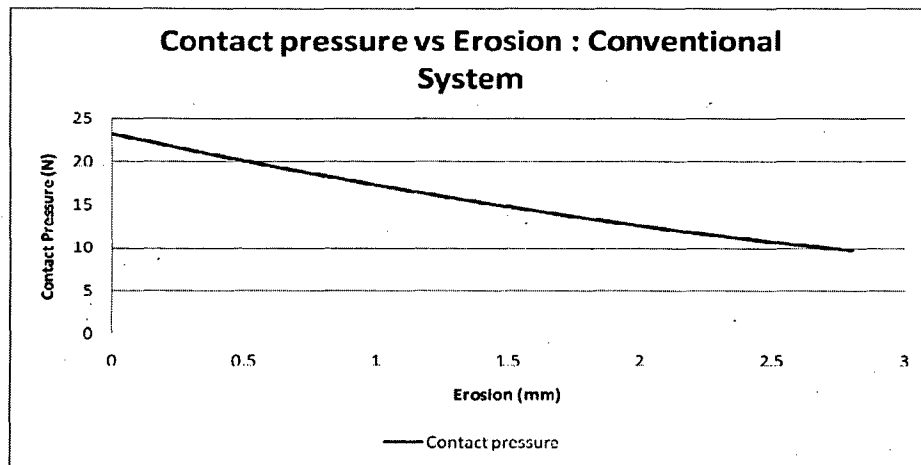


Fig 3

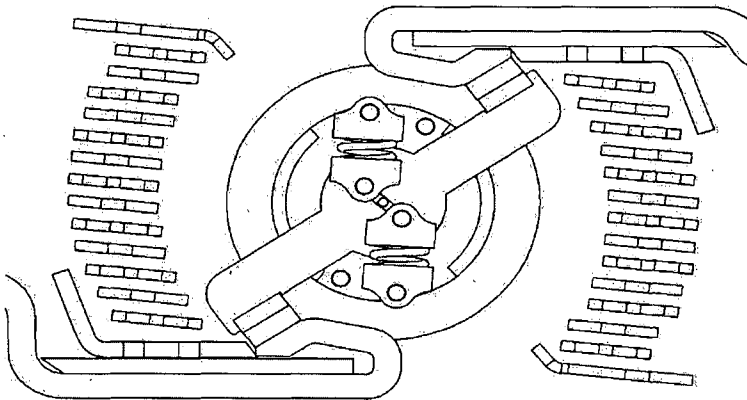


Fig 4

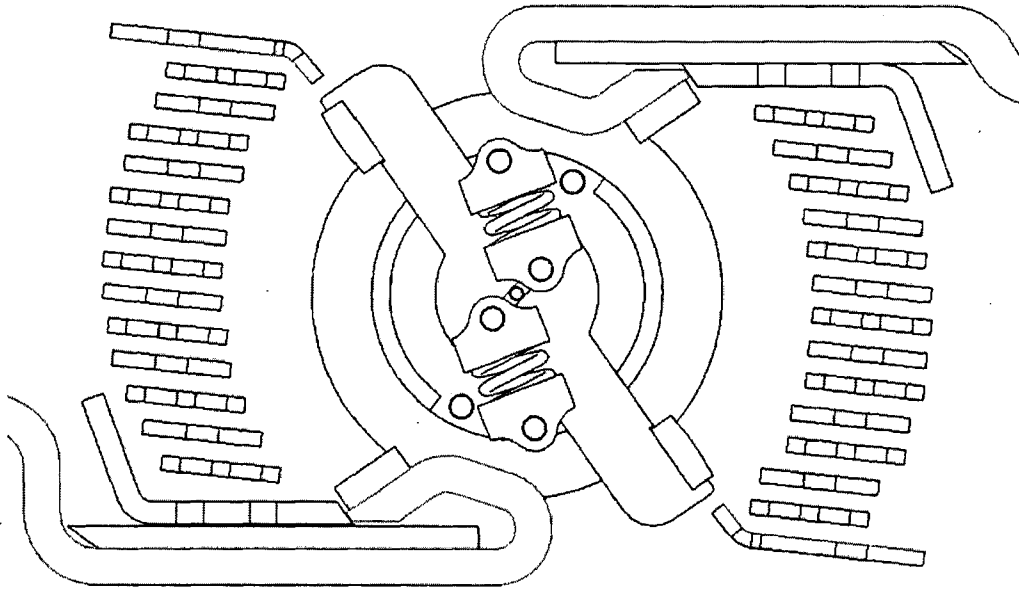


Fig 5

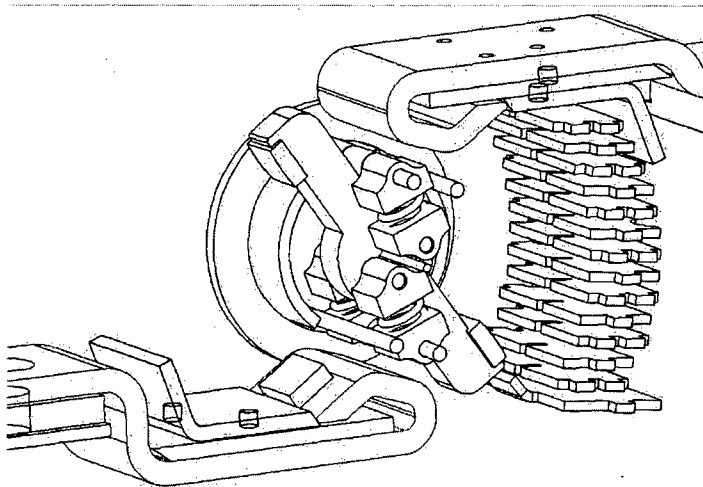


Fig 6

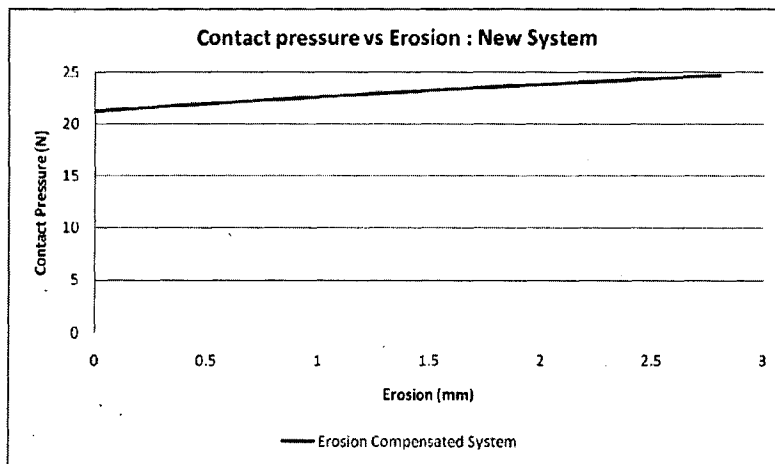


Fig. 7

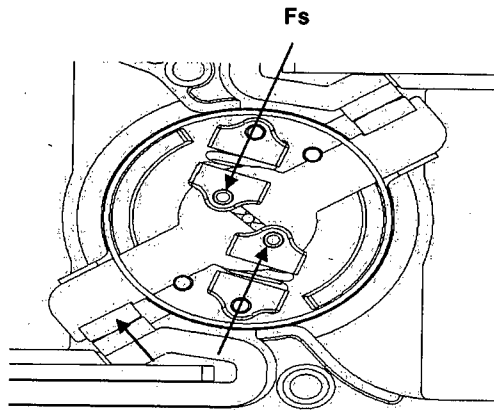


Fig.8

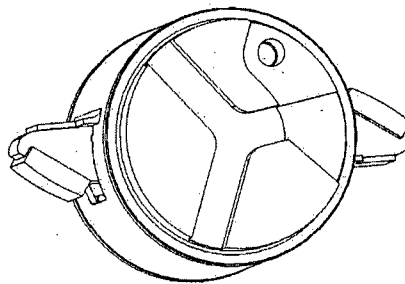


Fig. 9

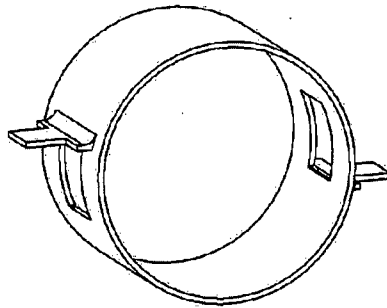


Fig 10

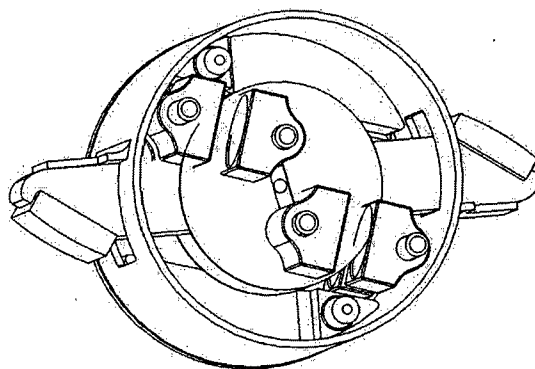


Fig 11

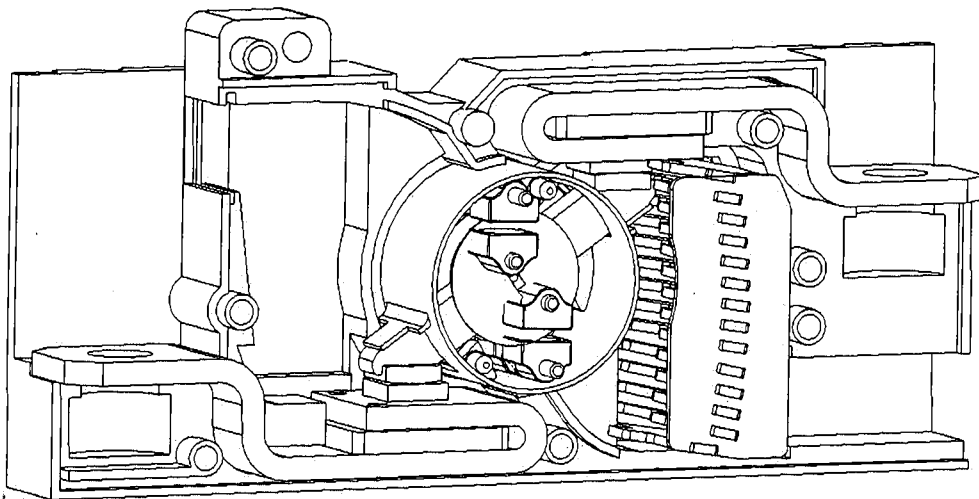


Fig 12

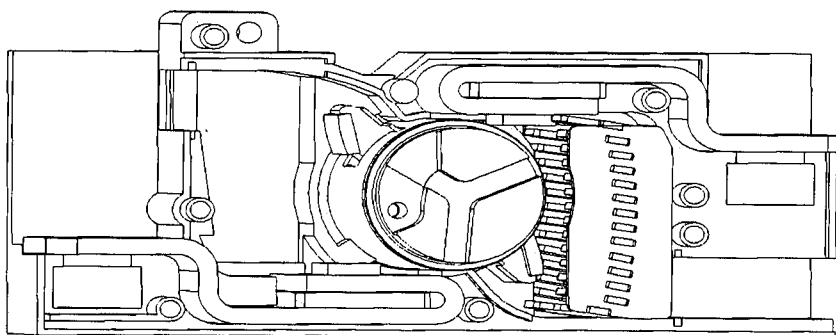


Fig. 13

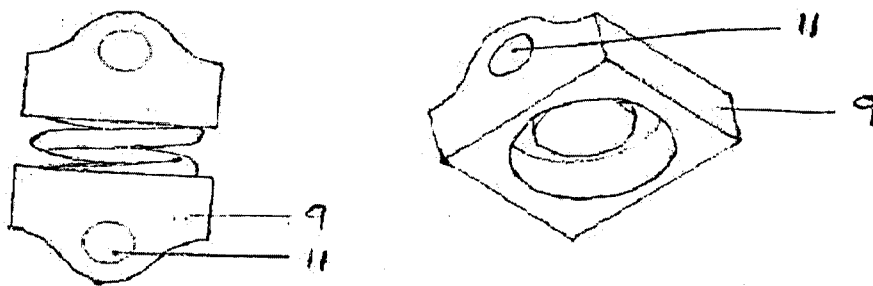
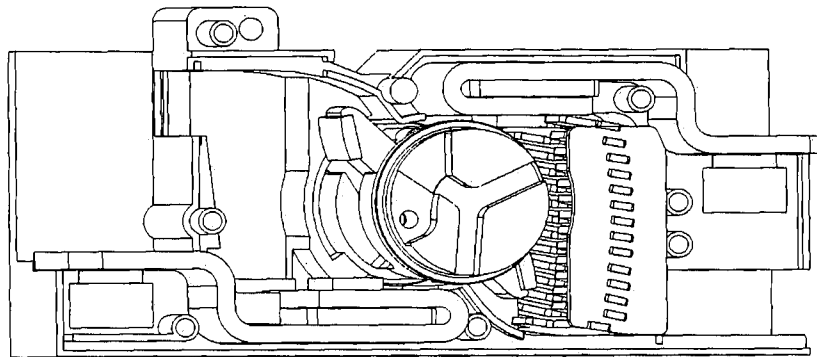


Fig. 14


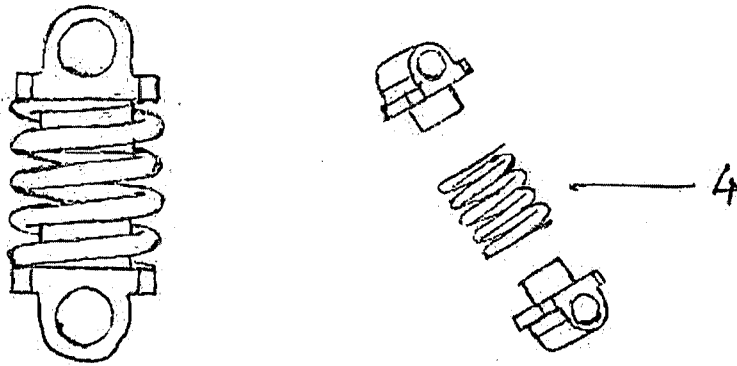


Fig. 15

Fig. 16

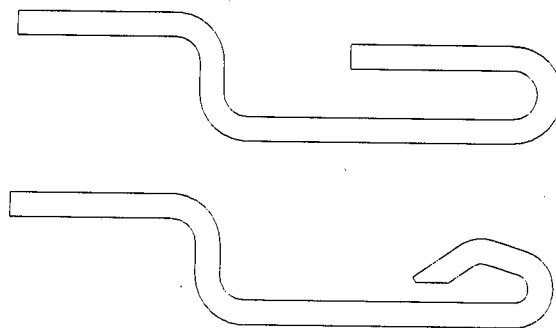

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2012/054707

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01H1/20
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 7 189 935 B1 (HASSAN GIRISH [IN] ET AL) 13 March 2007 (2007-03-13) the whole document -----	1-9
X	DE 10 2011 075655 A1 (SIEMENS AG [DE]) 16 February 2012 (2012-02-16) the whole document -----	1,2,5-9
A	EP 0 853 327 A2 (SACE SPA [IT]) 15 July 1998 (1998-07-15) the whole document -----	1,4
A	EP 1 288 990 A2 (SIEMENS AG [DE]) 5 March 2003 (2003-03-05) the whole document -----	1,4



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 December 2012

Date of mailing of the international search report

21/12/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Ramírez Fueyo, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2012/054707

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 7189935	B1	13-03-2007	NONE
DE 102011075655 A1	16-02-2012	CN 102262983 A	30-11-2011
		DE 102011075655 A1	16-02-2012
EP 0853327	A2	15-07-1998	CN 1185639 A
		DE 69731452 D1	24-06-1998
		DE 69731452 T2	09-12-2004
		EP 0853327 A2	09-02-2006
		ES 2231843 T3	15-07-1998
		HK 1011238 A1	16-05-2005
		IT MI962687 A1	16-08-2002
		US 5924554 A	22-06-1998
			20-07-1999
EP 1288990	A2	05-03-2003	DE 10144105 C1
		EP 1288990 A2	17-04-2003
			05-03-2003