



USOORE36774E

United States Patent [19]
Cosentino et al.

[11] E **Patent Number: Re. 36,774**
[45] **Reissued Date of Patent: *Jul. 11, 2000**

- [54] **CYLINDRICAL BLOOD HEATER/OXYGENATOR**
- [75] Inventors: **Louis C. Cosentino**, Deephaven;
Jeffrey A. Lee, Plymouth; **Daniel A. Baker**, Minnetonka, all of Minn.
- [73] Assignee: **Baxter Healthcare Corporation**, Irvine, Calif.

FOREIGN PATENT DOCUMENTS

0 114 732	8/1984	European Pat. Off. .
0 217 759	4/1987	European Pat. Off. .
24 56 932	6/1976	Germany .
2 267 138	12/1995	Germany .
543400	3/1977	U.S.S.R. .
554869	5/1977	U.S.S.R. .

[*] Notice: This patent is subject to a terminal disclaimer.

- [21] Appl. No.: **08/842,528**
- [22] Filed: **Apr. 24, 1997**
(Under 37 CFR 1.47)

OTHER PUBLICATIONS

- Wickramasinghe et al, "Mass transfer in various hollow fiber geometrics", *Journal of Membrane Science*, 69 (1992) pp. 235-250.
- Yang et al, "Artificial Gills", *Journal of Membrane Science*, 42 (1989) pp. 273-284.
- Wickramasinghe, et al, "Hollow Fiber Modules Made With Hollow Fiber Fabric", Undated Paper, pp. 1-21.
- Belter et al, "Bioprocesses: Downstream Processing for Biotechnology", A Wiley-Interscience Publication, Chapter 9 (Ultrafiltration and Electrophoresis), (1986), pp. 237-270.
- Treybal, *Mass-Transfer Operations*, Third Edition, McGraw-Hill Book Company, (1980), pp. 47-54, 74-75.

Related U.S. Patent Documents

- Reissue of:
- [64] Patent No.: **5,578,267**
 - Issued: **Nov. 26, 1996**
 - Appl. No.: **08/511,287**
 - Filed: **Aug. 4, 1995**

U.S. Applications:

- [62] Continuation of application No. 08/263,817, Jun. 22, 1994, abandoned, which is a division of application No. 08/115,996, Sep. 2, 1993, abandoned, which is a continuation of application No. 07/844,620, filed as application No. PCT/US89/04314, Oct. 1, 1989, Pat. No. 5,270,004.
- [51] **Int. Cl.⁷** **A61M 1/14**
- [52] **U.S. Cl.** **422/46; 426/48; 210/321.64; 210/321.79; 210/321.88; 261/DIG. 28**
- [58] **Field of Search** **422/46, 48; 261/DIG. 28; 210/321.64, 321.79, 321.88**

(List continued on next page.)

Primary Examiner—Nina Bhat
Attorney, Agent, or Firm—Workman, Nydegger, Seeley

ABSTRACT


[57] A combination heat exchanger and oxygenator device is provided. The device includes a generally cylindrical housing having first and second compartments with hollow heat exchange tubes and hollow gas exchange tubes disposed therein, a blood inlet, a blood outlet, a heat exchanger medium inlet, a heat exchange medium outlet, an oxygenating fluid inlet and an oxygenating fluid outlet. The housing has a central axis with the second compartment being concentric thereto. The blood flow passage is defined by blood entering the device generally axially through a path extending along the central axis of the housing and flows generally radially through the second, oxygenating compartment.

[56] **References Cited**
U.S. PATENT DOCUMENTS

- Re. 27,100 3/1971 De Wall .
- Re. 32,186 6/1986 Bentley .
- Re. 33,932 5/1992 Fukasawa et al. .
- 2,659,368 11/1953 Gibbon, Jr. et al. .

(List continued on next page.)

48 Claims, 3 Drawing Sheets

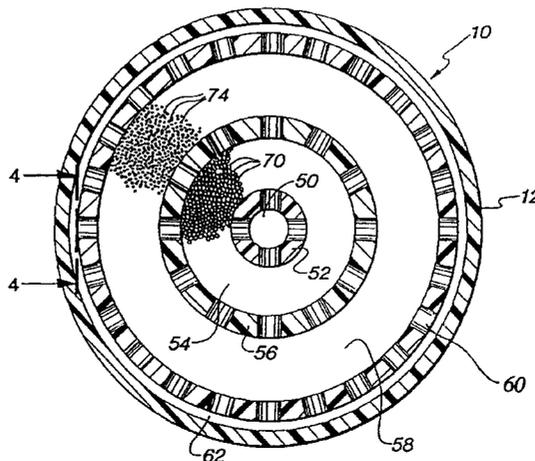

U.S. PATENT DOCUMENTS				
		4,372,914	2/1983	Raible 422/46
2,684,728	7/1954	4,374,802	2/1983	Fukasawa .
2,937,644	5/1960	4,376,095	3/1983	Hasegawa 422/46
3,026,871	3/1962	4,389,363	6/1983	Molthop .
3,058,464	10/1962	4,411,872	10/1983	Bramson .
3,142,296	7/1964	4,414,110	11/1983	Geel et al. .
3,171,475	3/1965	4,424,190	1/1984	Mathes, III et al. 422/40
3,211,148	10/1965	4,425,234	1/1984	Reitz .
3,256,883	6/1966	4,428,403	1/1984	Lee et al. .
3,315,740	4/1967	4,428,934	1/1984	Raible .
3,342,729	9/1967	4,440,722	4/1984	Luppi 422/46
3,413,095	11/1968	4,440,723	4/1984	Gordon .
3,466,148	9/1969	4,445,500	5/1984	Osterholm 128/1
3,484,211	12/1969	4,455,230	6/1984	Elgas et al. .
3,492,991	2/1970	4,466,804	8/1984	Hino .
3,513,845	5/1970	4,493,692	1/1985	Reed .
3,527,572	9/1970	4,533,516	8/1985	Johansson et al. .
3,547,591	12/1970	4,540,492	9/1985	Kessler .
3,557,962	1/1971	4,556,489	12/1985	Diettrich, Jr. et al. .
3,651,616	3/1972	4,559,999	12/1985	Servas et al. .
3,691,068	9/1972	4,588,026	5/1986	Hapgood .
3,722,694	3/1973	4,599,093	7/1986	Steg, Jr. .
3,755,034	8/1973	4,612,170	9/1986	Luther et al. 422/46
3,764,271	10/1973	4,622,140	11/1986	Lee et al. .
3,768,653	10/1973	4,622,206	11/1986	Torgeson .
3,769,162	10/1973	4,637,917	1/1987	Reed et al. 422/46
3,769,163	10/1973	4,639,353	1/1987	Takemura et al. 422/46
3,794,468	2/1974	4,645,645	2/1987	Martinez et al. .
3,807,958	4/1974	4,650,457	3/1987	Morioka et al. .
3,848,660	11/1974	4,656,004	4/1987	Stewart .
3,853,479	12/1974	4,657,743	4/1987	Kanno .
3,870,470	3/1975	4,658,367	4/1987	Gremel et al. .
3,881,483	5/1975	4,659,549	4/1987	Hamada et al. .
3,884,814	5/1975	4,684,508	8/1987	Sutherland 422/46
3,890,969	6/1975	4,686,085	8/1987	Osterholm 422/45
3,918,912	11/1975	4,704,203	11/1987	Reed 210/188
3,927,981	12/1975	4,705,508	11/1987	Karnavas et al. 604/113
3,956,112	5/1976	4,707,587	11/1987	Greenblatt .
3,957,504	5/1976	4,717,377	1/1988	Fukasawa .
3,993,816	11/1976	4,722,829	2/1988	Giter .
3,994,689	11/1976	4,734,269	3/1988	Clarke et al. .
4,022,692	5/1977	4,735,775	4/1988	Leonard et al. .
4,026,669	5/1977	4,756,705	7/1988	Beijbom et al. .
4,036,231	7/1977	4,769,959	9/1988	Fukasawa .
4,038,190	7/1977	4,772,256	9/1988	Lane et al. .
4,065,264	12/1977	4,775,360	10/1988	Lane et al. .
4,077,578	3/1978	4,781,889	11/1988	Fukasawa et al. .
4,111,659	9/1978	4,791,054	12/1988	Hamada et al. 435/2
4,140,637	2/1979	4,828,543	5/1989	Weiss et al. .
4,158,693	6/1979	4,857,081	8/1989	Taylor .
4,168,293	9/1979	4,863,600	9/1989	Leonard et al. .
4,180,896	1/1980	4,869,822	9/1989	Kamel et al. .
4,186,713	2/1980	4,874,581	10/1989	Sutherland et al. .
4,187,180	2/1980	4,876,066	10/1989	Bringham et al. 422/46
4,188,360	2/1980	4,909,989	3/1990	Fukazawa et al. .
4,202,776	5/1980	4,911,846	3/1990	Akasu et al. .
4,205,042	5/1980	4,923,679	5/1990	Fukasawa et al. .
4,213,858	7/1980	4,948,560	8/1990	Deguchi et al. .
4,225,439	9/1980	4,950,391	8/1990	Weickhardt .
4,239,729	12/1980	4,954,317	9/1990	Raible .
4,244,094	1/1981	4,971,836	11/1990	Fukasawa et al. .
4,254,081	3/1981	4,976,682	12/1990	Lane et al. .
4,256,692	3/1981	5,011,469	4/1991	Buckberg et al. .
4,268,279	5/1981	5,026,525	6/1991	Katsura .
4,280,981	7/1981	5,034,188	7/1991	Nakanishi et al. .
4,282,180	8/1981	5,037,610	8/1991	Fukasawa et al. .
4,306,018	12/1981	5,039,482	8/1991	Panzani et al. 422/46
4,308,230	12/1981	5,039,486	8/1991	Gordon .
4,315,819	2/1982	5,049,146	9/1991	Bringham et al. .
4,346,006	8/1982	5,058,661	10/1991	Oshiyama .
4,352,736	10/1982	5,084,244	1/1992	Muramoto .
		5,102,533	4/1992	Oshiyama .

5,106,579	4/1992	Fukuzawa et al. .		5,358,689	10/1994	Jones et al.	422/46
5,110,548	5/1992	Montevecchi .		5,411,706	5/1995	Hubbard et al. .	
5,110,549	5/1992	Gordon .		5,489,382	2/1996	Tatebe et al. .	
5,112,480	5/1992	Hukasawa .		5,489,413	2/1996	Carson et al. .	
5,116,308	5/1992	Hagiwara .					
5,117,903	6/1992	Oshiyama .					
5,120,302	6/1992	Vescovini et al. .					
5,120,501	6/1992	Mathews et al.	422/46				
5,120,502	6/1992	Gordon et al. .					
5,124,127	6/1992	Jones et al. .					
5,151,192	9/1992	Matkovich et al. .					
5,158,533	10/1992	Strauss et al. .					
5,160,615	11/1992	Takagi et al. .					
5,162,102	11/1992	Nogawa et al. .					
5,167,921	12/1992	Gordon .					
5,225,161	7/1993	Mathewson et al. .					
5,234,663	8/1993	Jones et al.	422/46				
5,236,665	8/1993	Mathewson et al.	422/46				
5,266,265	11/1993	Raible .					
5,316,724	5/1994	Mathewson et al. .					
5,322,500	6/1994	Johnson et al.	604/4				
5,338,512	8/1994	Mathewson et al. .					

OTHER PUBLICATIONS

Cussler, Diffusion: Mass transfer in fluid systems, Cambridge University Press, 1984, Chapter 2., pp. 15–54 and Chapter 9, pp. 215–248.

Winston, et al, Membrane Handbook, Prasad et al, Membrane-Based Solvent Extraction, (1992) Chapter 41, pp. 727–763.

Bird et al, Transport Phenomena, Wiley, 1980, Sections 2.3,6.2, 6.4.

Cussler, A Mass Transfer Tutorial, Chemtech, (Jul., 1986), pp. 422–425.

Semmens et al, Ammonia Removal From Water Using Microporous Hollow Fibers, undated paper, pp. 1–21.

Yang et al, Designing Hollow-Fiber Contactors, AIChE Journal, (Nov. 1986), vol. 32, No. 11, pp. 1910–1916.

Fig. 1

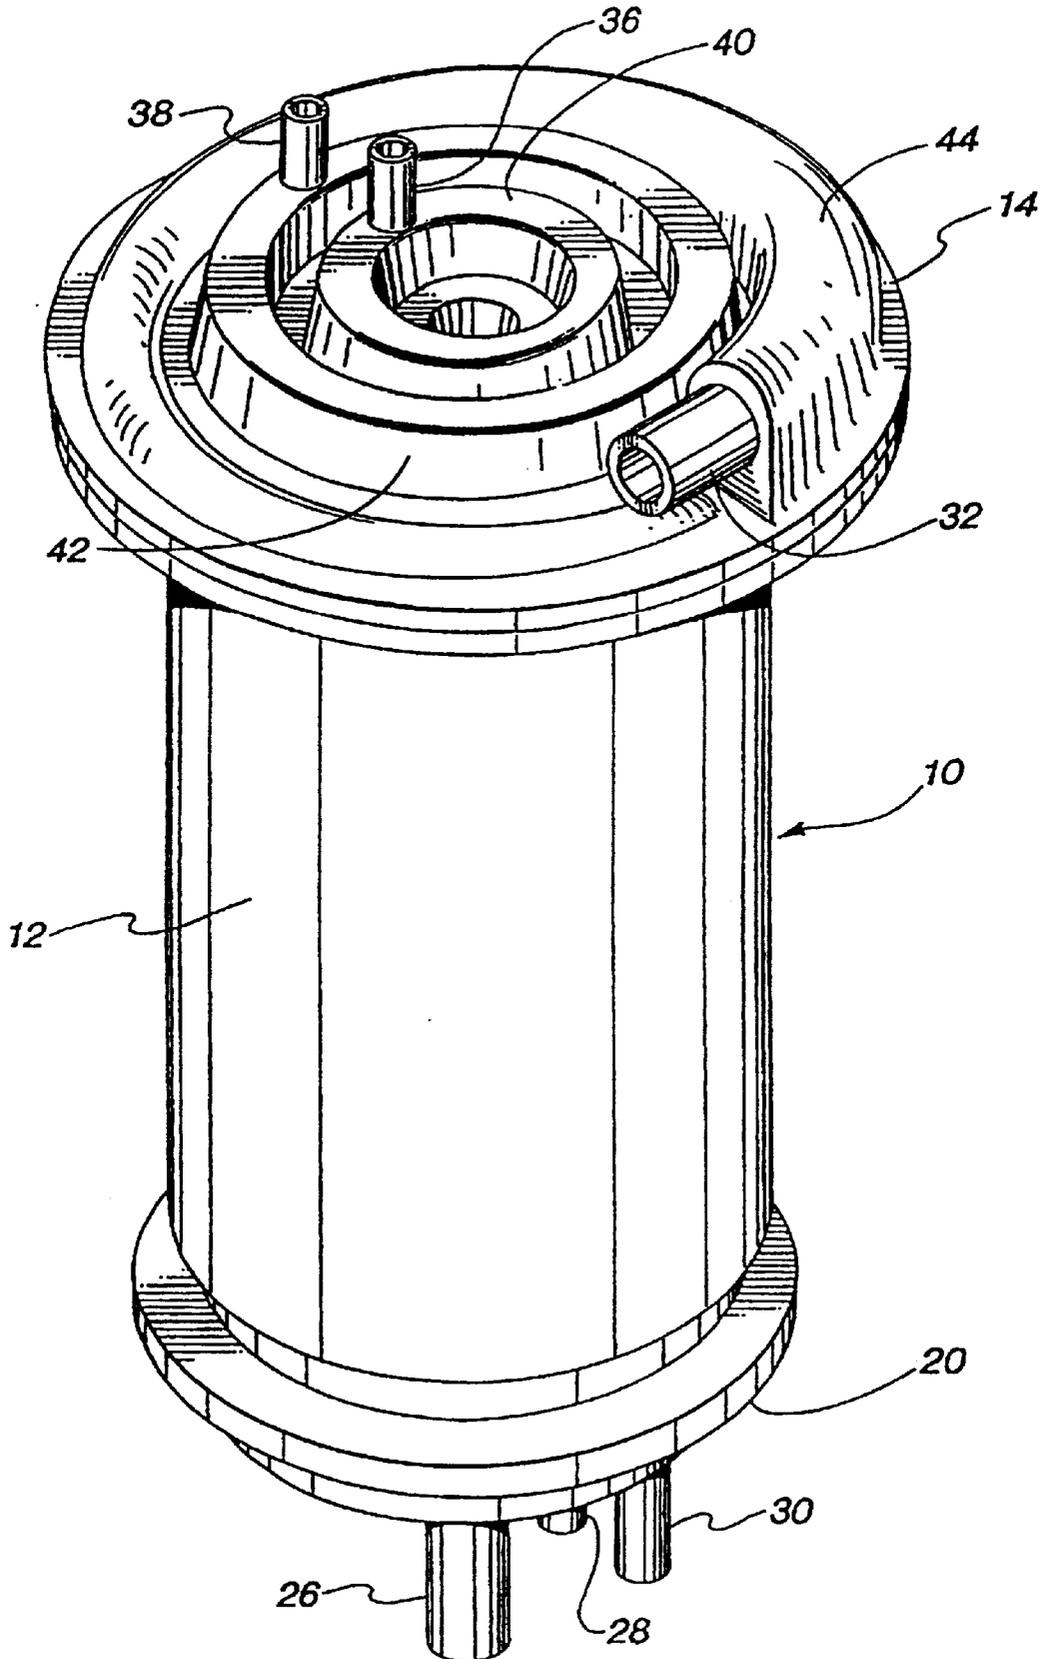


Fig. 2

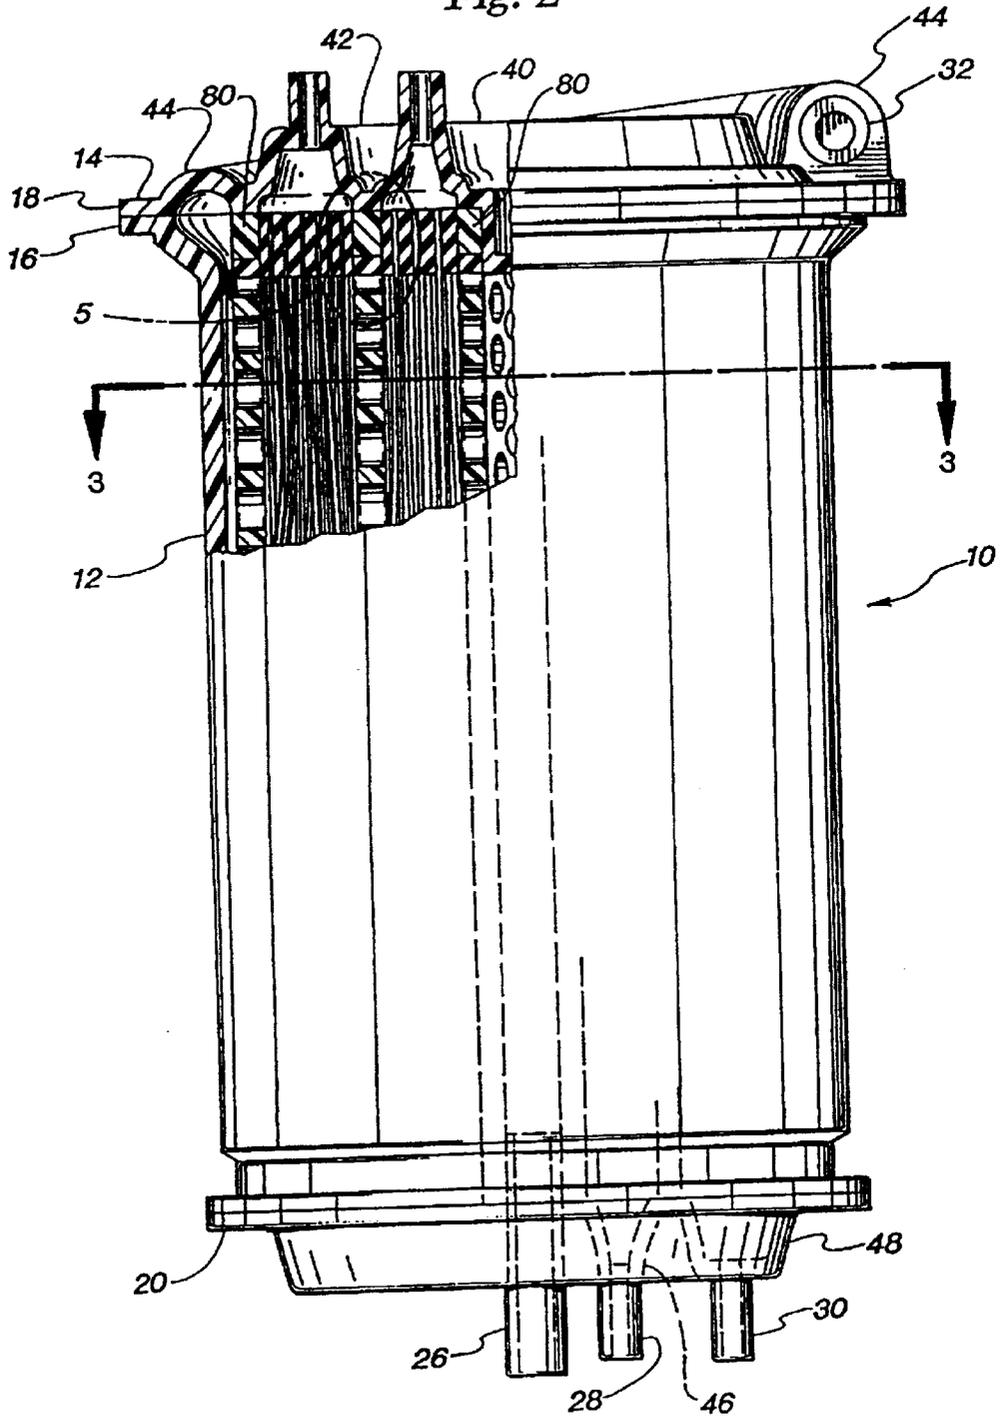


Fig. 3

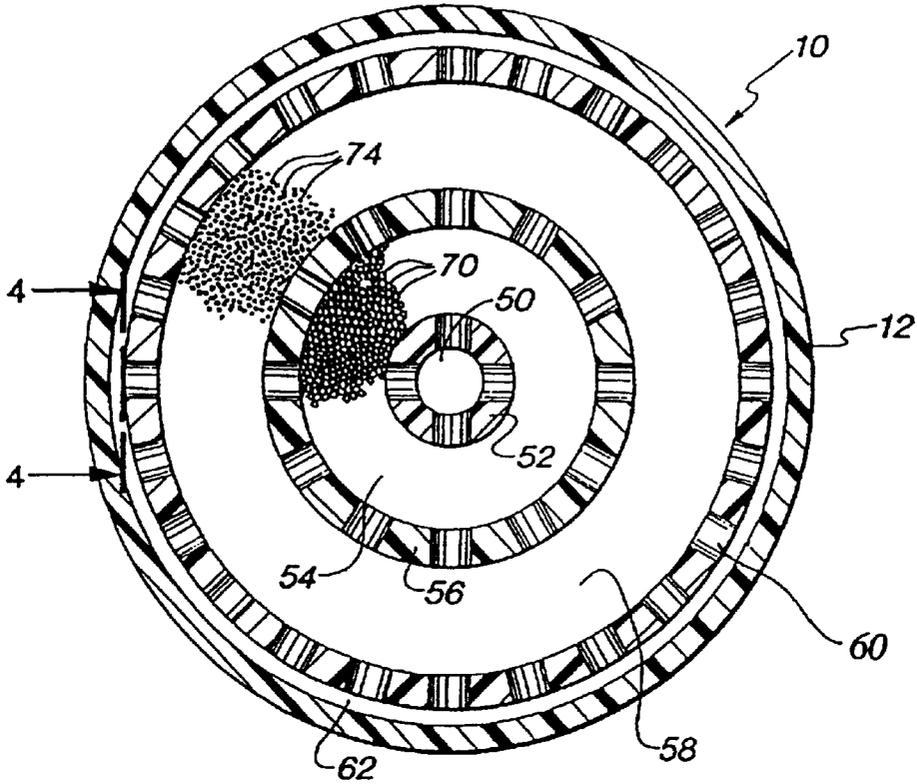


Fig. 5


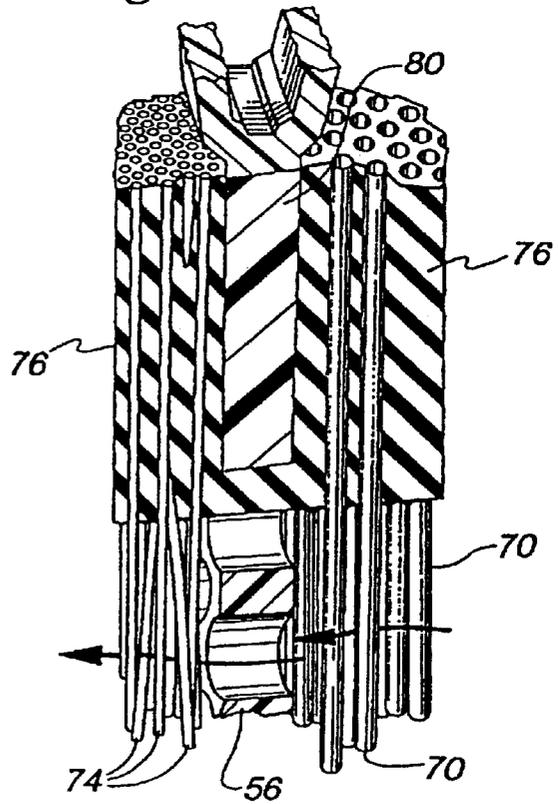


Fig. 4

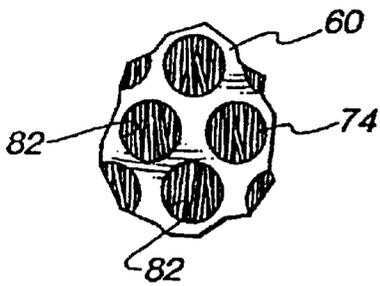

CYLINDRICAL BLOOD HEATER/ OXYGENATOR

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue.

This is a continuation of application Ser. No. 08/263,817, filed on Jun. 22, 1994, now abandoned which is a divisional of application Ser. No. 08/115,996, filed on Sep. 2, 1993, now abandoned, which is a continuation of application Ser. No. 07/844,620, now U.S. Pat. No. 5,270,004 filed on May 11, 1992, [which claims priority to PCT/US89/04314 filed Oct. 1, 1990] *which is a national stage application under 35 U.S.C. 371 of PCT/US89/04314, filed Oct. 1, 1989, the entireties of which are hereby incorporated by reference.*

FIELD OF THE INVENTION

This invention relates to a blood oxygenator having an integral heat exchanging unit, the oxygenator being of the outside perfusion type.

BACKGROUND OF THE INVENTION

Blood Oxygenators

In known blood oxygenators, hollow fibers are used as a means to bring blood into contact with oxygen and provide a means for removal of carbon dioxide from the blood. The fibers are typically made of a homogeneous membrane of gas-permeable material such as silicone or of hollow fibers made of a microporous membrane of hydrophobic polymeric material such as polyolefins.

There are two types of hollow fiber blood oxygenators: the inside perfusion type in which blood is passed through the bores of the hollow fibers while oxygen is passed on the outside of the hollow fibers, and the outside perfusion type. Blood oxygenators of the outside perfusion type pass oxygen through the bores of the hollow fibers while blood is flowed past the outside of the hollow fibers.

Examples of inside perfusion type hollow-fiber oxygenators are disclosed in U.S. Pat. Nos. 4,239,729 and 4,749,551.

In blood oxygenators of the outside perfusion type the oxygen can be distributed uniformly through the spaces between adjacent fibers and the blood can be expected to move with better mixing. However, outside perfusion has had the disadvantage of being subject to less than the desired oxygenation of the blood because of region channeling of the blood as it passes the outsides of the hollow fibers. Blood-side convective mixing is essential for efficient gas transfer in blood oxygenators. Without such mixing, sharply defined boundary layers of fully oxygenated blood develop near the exchange surfaces and the fluxes of oxygen and carbon dioxide tend to be low. Low transport efficiency results in bulky devices with undesirable high blood priming volumes.

Outside perfusion type blood oxygenators are known in which the hollow fibers are in perpendicular orientation to the direction of blood flow so as to produce more mixing of the blood as the blood flows than inside perfusion constructions. This arrangement can bring about an improvement in oxygenation rate. However, if the number of fibers used in such a blood oxygenator is large (as is desirable) and/or the flow rate of blood is increased in order to treat large volumes of blood, problems arise. For example, unacceptable pressure drop of the blood between inlet and outlets and/or

channeling of the blood between groups of fibers may occur. By channeling it is to be understood that a significant flow of blood takes place through relatively large area voids between fibers so that there is little or no mixing. As the rate of oxygen transfer primarily takes place in a thin boundary layer adjacent the hollow fibers, the effectiveness of desired oxygenation is reduced.

Examples of blood oxygenators of the outside perfusion type are disclosed in copending application PCT/US89/00146 filed Jan. 13, 1989; WO 89/00864; and U.S. Pat. Nos. 3,794,468; 4,352,736; 4,622,206; 4,659,549; 4,639,353; 4,620,965; 4,791,054; and 4,808,378, all incorporated herein by reference.

Combined Oxygenator and Heat Exchanger Devices

In the prior art it has been recognized that there is considerable heat loss in all extracorporeal circuits and various devices have been introduced for the purpose of maintaining the temperature of blood within the normal physiological range. Devices which combine the function of blood heating and oxygenation are known. U.S. Pat. No. 4,111,659 describes an embossed film membrane heater/oxygenator. U.S. Pat. No. 4,138,288 describes a bubble-type oxygenator with an integral heater at the blood outlet side of the oxygenator. U.S. Pat. No. 4,620,965 describes an outside perfusion type hollow fiber blood oxygenator with an associated heat exchanger, also located on the blood outlet side of the device, in which the blood flows longitudinally through the oxygenator portion of the device and generally parallel to the hollow gas exchange fibers. U.S. Pat. Nos. 4,639,353, 4,659,549 and 4,791,054 also disclose outside perfusion type hollow-fiber oxygenators in which blood flowing longitudinally through a generally rectangular or cylindrical device passes through multiple hollow fiber exchange chambers separated by narrow channel baffles. In some embodiments of the latter device, separate heat and Oxygen exchange chambers are provided.

U.S. Pat. No. 4,645,645 describes a hollow-fiber blood oxygenator to which a helical heat exchanger may be attached. Heat exchange is accomplished by passing blood across the outside of a helical coated metal coil.

U.S. Pat. No. 4,424,910 describes another form of hollow-fiber oxygenator with an attached heater compartment displaced longitudinally on a generally cylindrical device.

A problem with prior blood oxygenator/heater combination devices which has been recognized in the prior art is the considerable bulk, with consequent large priming volume of the combined devices. A flat device is described in WO 89/00864 and co-pending application, PCT/US89/00146 filed Jan. 13, 1989, which locates heated exchange fibers and gas exchange fibers in adjacent compartments separated by a porous wall so as to eliminate collection and distribution manifolds between the devices. Such flat devices, however, are difficult to manufacture because of the difficulty of properly packing the gas exchange fibers for optimal efficiency.

SUMMARY OF THE INVENTION

The present invention pertains to a novel compact integrated blood heater/oxygenator in which the blood advantageously flows transversely to the axial direction of hollow heat exchange and oxygenation fibers, the device having a minimal priming volume and which is easily assembled using conventional fiber winding techniques for packing the gas exchange fibers.

The inventive blood heater oxygenator is a generally cylindrical device which is constructed so that the blood enters a central chamber extending longitudinally along the axis of the device and then moves radially through respective annular hollow heat exchange and oxygenation fiber bundles in a direction generally perpendicular to the axis of the device and generally transverse to the axial direction of the fibers toward the outer wall of the device where the temperature adjusted and oxygenated blood is collected and passed out of the device via an exit port.

DESCRIPTION OF THE FIGURES

FIG. 1 is a side perspective view of a blood heat exchanger/oxygenator of the invention.

FIG. 2 is a side plan view with parts cut away of the heat exchanger/oxygenator of FIG. 1.

FIG. 3 shows a sectional view of the heat exchanger/oxygenator of the invention taken along line 3—3 of FIG. 2.

FIG. 4 is a side view of a portion of the device as seen from line 4—4 of FIG. 3.

FIG. 5 is an enlarged perspective view of the portion of FIG. 2 indicated by the bold numeral 5.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The invention is best described by reference to the preferred embodiment as illustrated in FIGS. 1—5.

The preferred heat exchanger/oxygenator device of the invention is generally designated in the figures by the numeral 10. The exterior of device 10 comprises a generally cylindrical exterior wall portion 12, proximal cover member 14 and distal cover member 20. The distal cover 20 includes a central blood inlet port 26, a heating fluid outlet port 28 and a gas outlet port 30.

The proximal cap 14 includes a blood outlet port 32, a heater exchange fluid inlet port 36 and a gas inlet port 38. Raised circular portions 40 and 42 define heat exchange fluid and gas distribution manifolds, respectively, which provide fluid communication between the respective inlet ports 36 and 38 and respective hollow bundles of heat exchange and gas exchange fibers, respectively, within the device. A raised circular portion 44 defines a blood collecting manifold which, as shown in FIG. 1, increases in dimension as it approaches the exit port 32.

On the distal cover 16 there are also included raised circular portions 46 and 48 which define manifolds for collecting and directing heat exchange fluid and oxygenation gas from the fiber bundles to their respective outlet ports.

The interior of the device includes a series of annular cylindrical chambers 50, 54, 58 and 62 separated by tubular porous wall members 52, 56 and 60.

The central chamber 50 communicates with blood inlet port 26. The next outward annular chamber 54 comprises the heat exchanger portion of the device and is filled with heat exchange tubes 70 of known type which extend generally in an axial direction. Annular chamber 58 comprises the oxygenator portion of the device and is filled with tubes 74 of a gas exchange membrane material, also of known type. The gas exchange tubes 74 are also preferably oriented generally in an axial direction. Between the porous wall 60 and the inner surface of the outer wall 12 of the device is a hollow cylindrical blood collection chamber 62.

The tubular porous walls 52, 56, 60, the heat exchange tubes 70, and gas exchange tubes 74 are all potted together

with a conventional potting material 76 which holds the various interior components of the device together as a unit and isolates the open ends of the tubes 70 and 74 from the blood flow path.

The respective bundles of heat exchange and gas exchange fibers are desirably simultaneously end potted so as to produce a unitary assembly which can be readily sheared to produce open tube ends as best shown in FIG. 5. The covers 14 and 16 are aligned so that they sealingly engage the potted assembly between the respective fiber bundles. Suitably the porous tubular wall members 52, 56 and 60 are provided with continuous non-porous end portions 80 entrained in the potting material such that when the potted assembly is sheared the end portions 80 expose continuous annular rings which provide sealing surface to engage the covers and isolate the respective gas blood and heating fluid distribution and collection manifolds, as shown in FIGS. 2 and 5. Most preferably the cover assemblies are heat or sonically welded to the end portions 80 and to the ends of outer cylindrical wall 12.

The tubular porous wall members 52, 56 and 60 provide separation between the chambers while allowing blood to pass therethrough without offering substantial resistance or directional change. Any porous structure which allows the passage of blood without significant damage may be used. However, it is preferred that these wall members be constructed of a biocompatible plastic material containing a plurality of spaced orifices 82. The orifices 82 are preferably no greater than 1/2 inch (1.27 cm) and preferably 3/8 inches (0.95 cm) in diameter. Larger diameter orifices will allow the fibers to bulge into the orifices and thereby potentially create void spots in the fiber bundle therebelow. Another disadvantage in fibers bulging into the orifices is that pinching to close a fiber may occur. Smaller diameter orifices may be used, by spacing must be selected so that the total area of the orifices 82 is sufficient to assure that the respective porous tubular wall members do not themselves create significant resistance to blood flow or dead spots where blood may collect and coagulate.

Suitable gas exchange membrane material for fibers 74 may be made of polypropylene, polyethylene or other biocompatible material which provides gas exchange. The fibers are liquid impermeable. Suitable fibers for this purpose are well known and commercially available from a number of manufacturers including Mitsubishi Rayon Sale, Ltd. of Tokyo, Japan and Celanese Chemical Company of New York, N.Y., U.S.A.

The heat exchange tubes 70 are preferably formed from a polyurethane resin such as B. F. Goodrich Estane 58091. The tubes are much larger than the hollow fibers in the oxygenator, typically being about 0.033 inches (840 microns) in outside diameter with a wall thickness of about 0.004 inches (102 microns). In contrast, a typical oxygenator fiber has an outside diameter of about 200—450 microns and a wall thickness of less than 50 microns. The formation of heat exchanger tubes from polyurethane rather than the stainless steel, polyethylene, or polypropylene is preferred. While the efficiency of the heat exchange it an important design consideration, it is vital that there must be no leakage. The end seals where polyurethane potting compounds are used with stainless steel tubes represent potential leakage areas of the cooling fluid into the blood.

The use of polyurethane heat exchange tubes with the polyurethane end potting compounds provides a positive seal which ensures that no leakage will occur. This compatibility with the potting compound greatly increases the safety of the product.

The hollow heat exchange tubes are packed into chamber **70** such that channeling is minimized. However, performance of the heat exchanger is not greatly affected if some channeling is present. A pack density of between about 40% and 60% provides an efficient heat exchanger with an acceptable pressure drop. It is preferred to pack the polyurethane tubes at about 45%–55% pack density which provides an efficient unit, low pressure drop and low blood priming volume. The thin walled polyurethane hollow tubes provide good heat transfer. The efficiency desired is in ensuring that all of the blood is heated or cooled as desired, not in how much heat exchange fluid is required. The temperature differential between the blood and heat exchange fluid should be low to provide better control.

In the preferred embodiment the overall size of the unit is approximately 5 inches (12.5 cm) in diameter by 7.5 inches (18.75 cm) long. The heat exchange tubes are polymeric tubes having an approximate diameter of 0.033 inches (0.83 mm or 830 μ), and the heat exchange chamber containing approximately 2750 tubes. The gas exchange fibers suitably are microporous hollow polypropylene membrane is sufficient quantity to provide a total blood contact surface area of approximately 3.8 square meters. The device permits an outlet blood oxygen tension of 150 torr or more, tested on bovine blood with a hemoglobin concentration of 12 gram-percent; with an inlet saturation of 55% a blood flow of 6 liters per minute and an oxygen flow of 6 liters per minute. The heat exchanger provides an effectiveness level of 45% as measured by the protocol of the American Association of Medical Instrumentation (AAMI).

The heat exchange tubes are preferably cut to length and then placed into the chamber **52**. Winding the tubes about central core **52** is less preferable as it tends to cause the hollow tubes to bend and may cause cracks or breaks.

The gas exchange fiber bundle is most suitably prepared by spiral winding fibers **74** around the tubular wall member **56**, successive layers being angled relative to each other to produce a crisscross pattern. The crossing fiber arrangement is preferred over parallel fiber packing since it forces the blood into effective but gentle transverse, mixing without traumatizing the blood. Winding techniques for producing cylindrical bundles of hollow fibers are well known and are described in such references as U.S. Pat. No. 3,755,034, 3,794,468, 4,224,094, 4,336,138, 4,368,124 and 4,430,219, all incorporated herein by reference. The preferred angle between the fibers of successive layers is in the range of between about 10° and 30°, more preferably between about 15° and 20°, most preferably 18°. The fibers run in a generally axial direction, so that an axial plane bisects the angle between the successive layers of the fibers. For instance, in the most preferred embodiment, one layer will deviate from the axial direction by +9° and the next layer will deviate from the axial direction by -9°. The pack density of the gas exchange fibers **74** should be between about 45% and 60%, most preferably about 50% and 55%. When the pack density is too high the resulting resistance to blood flow reduces oxygenation efficiency. Likewise, when the pack density is too low channeling and reduced turbulent flow of the blood also reduces oxygenation efficiency. Within the preferred range oxygenation efficiency is maximized.

For potting the ends of the assembly of fiber bundles and porous wall members **52**, **56** and **60**, a polyurethane potting compound is preferred. Suitable potting compounds are available from Caschem, Inc. of Bayonne, N.J., U.S.A. A polyurethane casting system of Caschem, Inc. is described in U.S. Pat. Reissue No. 31,389. After potting the hollow fibers

are reopened by conventional techniques such as shearing the potting with a sharp knife so as to expose the interiors of the fibers.

After insertion of the potted and sheared assembly into cylinder **12** the cover members **14** and **20** are inserted in line so that they sealingly engage the potted assembly between the respective fiber bundles.

The covers **14** and **20**, cylinder case **12** and the porous tubular wall members **52**, **56** and **60** are all preferably made from nontoxic biocompatible plastic resins. Suitable resins are polycarbonate resins such as the Lexan brand resins of General Electric Company, Polymer Product Department, Pittsfield, Mass. Lexan 144 grade polycarbonate resins are currently preferred.

In operation, blood entering the device through the central inlet port **26**, fills chamber **50** and then passes in a direction generally perpendicular to the axis through porous wall **52**, around heat exchange fibers **70**, through porous wall **56**, around gas exchange fibers **74**, through wall **60**, into collection chamber **62** and then up into the blood collecting manifold **44** in cover **14**, finally exiting the device via blood exit port **32**.

An advantage provided by the compact structure of the device is a reduction in priming volume which results because blood is directly passed from the heat exchange chamber **54** to the oxygenation chamber **58** without passing through intermediate collection and distribution manifolds.

Yet another advantage of the invention compared to many of the prior art devices described in the Background section, above, is the location of the heat exchange chamber upstream from the gas exchange chamber. Since gas solubility varies significantly with temperature, it is important that the blood is oxygenated at the temperature it will enter the body. If the blood is heated after it is oxygenated, the oxygenation level may exceed the gas saturation point at the higher temperature, resulting in formation of dangerous emboli. If blood is cooled after oxygenation inefficient oxygenation can result.

Compared to the rectangular devices of WO 89/0864 and PCT/US89/00146, the device of the present invention also provides a significantly less complicated device to manufacture. In particular, to obtain the desired angular and Offset orientation of the gas exchange fibers in the prior art rectangular device it was necessary to employ a manufacturing technique which not only laid alternate layers in a crisscross pattern angled with respect to each other approximately 18°, but also required offsetting each successive parallel layer to minimize channeling. In the cylindrical device of the invention the desired crisscrossing of successive layers can readily be performed by conventional spiral winding techniques and the increasing diameter of the winding naturally results in an offset of successive parallel layers without complex controls.

What is claimed is:

1. A combination heat exchanger and oxygenator device comprising:

- a housing including structure defining first and second compartments, a blood inlet, a blood outlet, a heat exchange medium inlet, a heat exchange medium outlet, an oxygenating fluid inlet and an oxygenating fluid outlet, said housing having a central axis, said second compartment being concentric to said axis;
- structure defining a flow passage for blood through said housing from said blood inlet to said blood outlet;
- structure defining a flow passage for heat exchange medium from said heat exchange medium inlet to said heat exchange medium outlet;

7

structure defining a flow passage for oxygenating fluid from said oxygenating fluid inlet to said oxygenating fluid outlet;

a plurality of hollow gas exchange tubes disposed in said second compartment;

said blood flow passage comprising a heat exchange path through said first compartment, said blood flow passage further comprising a central path extending along at least a portion of said central axis of said housing, said blood flow passage further comprising an oxygenating path extending generally radially through said second compartment, around said gas exchange tubes, said central path being upstream of said oxygenating path, whereby blood flows axially along at least a portion of the central axis of said housing and then generally radially through said second compartment.

2. The combination heat exchanger and oxygenator device of claim 1, wherein said blood outlet has a central fluid flow axis disposed in a plane substantially transverse to said central axis of said housing.

3. The combination heat exchanger and oxygenator device of claim 1, wherein said oxygenating fluid inlet and oxygenating fluid outlet respectively comprise a gas inlet and a gas outlet.

4. The combination heat exchanger and oxygenator device of claim 1, wherein said heat exchange path extends generally radially through said first compartment.

5. The combination heat exchanger and oxygenator device of claim 1, wherein said central path is upstream of said heat exchange path.

6. The combination heat exchanger and oxygenator device of claim 1, wherein said heat exchange path is upstream of said oxygenating path.

7. The combination heat exchanger and oxygenator device of claim 1, wherein said first and second compartments are concentric.

8. The combination heat exchanger and oxygenator device of claim 1 wherein said plurality of hollow gas exchange tubes disposed in said second compartment are comprised of hollow gas exchange tubes generally longitudinally disposed within said [first] second compartment.

9. The combination heat exchanger and oxygenator device of claim 1 wherein said plurality of hollow gas exchange tubes disposed in said second compartment are comprised of hollow gas exchange tubes that are spirally wound in concentric layers extending generally longitudinally.

10. The combination heat exchanger and oxygenator device of claim 1 wherein said first compartment is upstream of said second compartment.

11. The combination heat exchanger and oxygenator device of claim 1 wherein said structure defining a flow passage for heat exchange medium from said heat exchange medium inlet to said heat exchange medium outlet includes a plurality of hollow heat exchange tubes disposed in said first compartment.

12. The combination heat exchanger and oxygenator device of claim 11, wherein said heat exchange path is defined around said heat exchange tubes and said heat exchange medium flows through said heat exchange tubes.

13. The combination heat exchanger and oxygenator device of claim 11, wherein said blood flow passage extends axially of said first compartment, via said central path, and then radially through said first compartment, around said heat exchange tubes, via said heat exchange path, and then radially through said second compartment, around said gas exchange tubes, via said oxygenating path.

8

14. The combination heat exchanger and oxygenator device of claim 11 wherein said plurality of hollow heat exchange tubes disposed in said first compartment are comprised of heat exchange tubes generally longitudinally disposed within said first compartment.

15. The combination heat exchanger and oxygenator device of claim 1, wherein said blood flow passage extends axially of said first compartment, via said central path, and then radially through said first compartment, via said heat exchange path, and then radially through said second compartment, via said oxygenating path.

16. *The combination heat exchanger and oxygenator device of claim 1, wherein said housing is constructed and arranged and said flow passage for blood is defined such that blood flows vertically upwardly along at least a portion of the central path.*

17. *A combination heat exchange and oxygenator device comprising:*

a housing including first and second compartments, a blood inlet, a blood outlet, a heat exchange medium inlet, a heat exchange medium outlet, an oxygenating fluid inlet, an oxygenating fluid outlet, said housing having a central axis, said second compartment being concentric to said axis, wherein the first and second compartments are concentric along at least a substantial portion of their length;

a flow passage for blood through said housing from said blood inlet to said blood outlet;

a flow passage for heat exchange medium from said heat exchange medium inlet to said heat exchange medium outlet;

a flow passage for oxygenating fluid from said oxygenating fluid inlet to said oxygenating fluid outlet;

a plurality of hollow gas exchange tubes disposed in said second compartment;

said blood flow passage comprising a heat exchange path through said first compartment and an oxygenating path extending generally radially through said second compartment, around said gas exchange tubes, at least a portion of said blood flow passage including a generally central path generally parallel to said central axis of said housing, said central path being upstream of said oxygenating path, whereby blood in said central path flows in a direction generally parallel to the central axis of the housing and then generally radially through said second compartment.

18. *The combination heat exchanger and oxygenator device of claim 17, wherein said central path is upstream of said heat exchange path.*

19. *The combination heat exchanger and oxygenator device of claim 17, comprising a tubular wall member defining said central path.*

20. *The combination heat exchanger and oxygenator device of claim 19, wherein said tubular wall member is porous.*

21. *A blood heater and oxygenating device for heating and then oxygenating a patient's blood, and which is designed to reduce priming volume required by the device, comprising:*

a housing including first and second compartments internal to the housing, a blood inlet, a blood outlet, a heat exchange medium inlet, a heat exchange medium outlet, an oxygenating fluid inlet and an oxygenating fluid outlet, said housing having a central axis, said second compartment being concentric to said axis and including a plurality of hollow gas exchange tubes contained therein;

said housing including a blood flow passage entirely internal to said housing and extending from said blood inlet to said blood outlet thereof;

a heat exchange medium flow passage internal to said housing, connected to and extending between said heat exchange medium inlet and said heat exchange medium outlet, whereby heat exchange medium may be introduced into said heat exchange medium flow passage through the heat exchange medium inlet and circulated out of said heat exchange medium flow passage through said heat exchange medium outlet;

an oxygenating fluid flow passage internal to said housing, connected to and extending between said oxygenation fluid inlet and said oxygenating fluid outlet, whereby an oxygenating fluid may be introduced into said hollow tubes through said oxygenating fluid inlet, and circulated out of and away from said hollow tubes through said oxygenating fluid outlet;

said blood inlet connected to said first compartment so that the blood diffuses directly from said blood inlet into said first compartment without significant collection of the blood between said blood inlet and said first compartment, and the blood being heated as it passes through said first compartment; and

said blood flow passage comprising a heat exchange path through said first compartment, said blood flow passage further comprising a central path extending along at least a portion of said central axis of said housing, said blood flow passage further comprising an oxygenating path extending generally radially through said second compartment, and around said hollow gas exchange tubes, and said central path being upstream of said oxygenating path, whereby blood flows axially along at least a portion of the central axis of said housing and then generally radially through said second compartment.

22. The device of claim 21, wherein said blood outlet has a central fluid flow axis disposed in a plane substantially transverse to said central axis of said housing.

23. The device of claim 21, wherein said oxygenating fluid inlet and oxygenating fluid outlet respectively comprise a gas inlet and a gas outlet.

24. The device of claim 21, wherein said first and second compartments are cylindrical.

25. The device of claim 21 wherein said plurality of hollow gas exchange tubes disposed in said second compartment are comprised of hollow gas exchange tubes that are spirally wound around said central axis.

26. The device of claims 21 or 24 wherein said first compartment is upstream of said second compartment.

27. The device of claim 21 wherein said housing is constructed and arranged and said flow passage for blood is defined such that blood flows in a vertically upward direction along at least a portion of said central path.

28. A blood heater and oxygenating device for heating and then oxygenating a patient's blood, and which is designed to reduce priming volume required by the device, comprising:

a housing including first and second compartments internal to the housing, a blood inlet, a blood outlet, a heat exchange medium inlet, a heat exchange medium outlet, an oxygenating fluid inlet and an oxygenating fluid outlet, said housing having a central axis, said second compartment being concentric to said axis and including a plurality of hollow gas exchange tubes contained therein;

said housing including a blood flow passage entirely internal to said housing and extending from said blood inlet to said blood outlet thereof;

a heat exchange medium flow passage internal to said housing, connected to and extending between said heat exchange medium inlet and said heat exchange medium outlet, whereby heat exchange medium may be introduced into said heat exchange medium flow passage through the heat exchange medium inlet and circulated out of said heat exchange medium flow passage through said heat exchange medium outlet;

an oxygenating fluid flow passage internal to said housing, connected to and extending between said oxygenation fluid inlet and said oxygenating fluid outlet, whereby an oxygenating fluid may be introduced into said hollow tubes through said oxygenating fluid inlet, and circulated out of and away from said hollow tubes through said oxygenating fluid outlet;

said blood inlet connected to a chamber which is porous throughout so that the blood diffuses directly into said first compartment without significant collection of the blood in said chamber, and the blood being heated as it passes through said first compartment; and

said blood flow passage comprising a heat exchange path through said first compartment, said blood flow passage further comprising a central path extending along at least a portion of said central axis of said housing, said blood flow passage further comprising an oxygenating path extending generally radially through said second compartment, and around said hollow gas exchange tubes, and said central path being upstream of said oxygenating path, whereby blood flows axially along at least a portion of the central axis of said housing and then generally radially through said second compartment.

29. The device of claim 28, wherein said blood outlet has a central fluid flow axis disposed in a plane substantially transverse to said central axis of said housing.

30. The device of claim 28, wherein said oxygenating fluid inlet and oxygenating fluid outlet respectively comprise a gas inlet and a gas outlet.

31. The device of claim 28, wherein said first and second compartments are cylindrical.

32. The device of claim 28 wherein said plurality of hollow gas exchange tubes disposed in said second compartment are comprised of hollow gas exchange tubes that are spirally wound around said central axis.

33. The device of claims 28 or 31 wherein said first compartment is upstream of said second compartment.

34. The device of claim 28 wherein said housing is constructed and arranged and said flow passage for blood is defined such that blood flows in a vertically upward direction along at least a portion of said central path.

35. A blood heater and oxygenating device for heating and then oxygenating a patient's blood, and which is designed to reduce priming volume required by the device, comprising:

a housing including first and second compartments internal to the housing, a blood inlet, a blood outlet, a heat exchange medium inlet, a heat exchange medium outlet, an oxygenating fluid inlet and an oxygenating fluid outlet, said housing having a central axis, said second compartment being concentric to said axis and including a plurality of hollow gas exchange tubes contained therein;

said housing including a blood flow passage entirely internal to said housing and extending from said blood inlet to said blood outlet thereof;

a heat exchange medium flow passage internal to said housing, connected to and extending between said heat exchange medium inlet and said heat exchange medium outlet, whereby heat exchange medium may be introduced into said heat exchange medium flow passage through the heat exchange medium inlet and circulated out of said heat exchange medium flow passage through said heat exchange medium outlet;

an oxygenating fluid flow passage internal to said housing, connected to and extending between said oxygenation fluid inlet and said oxygenating fluid outlet, whereby an oxygenating fluid may be introduced into said hollow tubes through said oxygenating fluid inlet, and circulated out of and away from said hollow tubes through said oxygenating fluid outlet;

said blood inlet connected to a chamber and from which blood diffuses directly into said first compartment along substantially the entire length of said chamber without significant collection of the blood in said chamber, and the blood being heated as it passes through said first compartment; and

said blood flow passage comprising a heat exchange path through said first compartment, said blood flow passage further comprising a central path extending along at least a portion of said central axis of said housing, said blood flow passage further comprising an oxygenating path extending generally radially through said second compartment, and around said hollow gas exchange tubes, and said central path being upstream of said oxygenating path, whereby blood flows axially along at least a portion of the central axis of said housing and then generally radially through said second compartment.

36. The device of claim 35, wherein said blood outlet has a central fluid flow axis disposed in a plane substantially transverse to said central axis of said housing.

37. The device of claim 35, wherein said oxygenating fluid inlet and oxygenating fluid outlet respectively comprise a gas inlet and a gas outlet.

38. The device of claim 35, wherein said first and second compartments are cylindrical.

39. The device of claim 35, wherein said plurality of hollow gas exchange tubes disposed in said second compartment are comprised of hollow gas exchange tubes that are spirally wound around said central axis.

40. The device of claims 35 or 38 wherein said first compartment is upstream of said second compartment.

41. The device of claim 35 wherein said housing is constructed and arranged and said flow passage for blood is defined such that blood flows in a vertically upward direction along at least a portion of said central path.

42. A combination heat exchanger and oxygenator device comprising:

a housing including first and second compartments internal to the housing, a blood inlet, a blood outlet, a heat exchange medium inlet, a heat exchange medium outlet, an oxygenating fluid inlet and an oxygenating fluid outlet, said housing having a central axis, said second compartment being concentric to said axis;

a blood flow passage entirely internal to said housing extending through said housing from said blood inlet to said blood outlet;

a heat exchange medium flow passage connected to and extending from said heat exchange medium inlet to said heat exchange medium outlet;

an oxygenating fluid flow passage connected to and extending from said oxygenating fluid inlet to said oxygenating fluid outlet;

a plurality of hollow gas exchange tubes disposed in said second compartment; and

said blood flow passage comprising a heat exchange path through said first compartment, said blood flow passage further comprising a central path extending along at least a portion of said central axis of said housing, said blood flow passage further comprising an oxygenating path extending generally radially through said second compartment, and around said hollow gas exchange tubes, said central path being upstream of said oxygenating path, whereby blood flows axially along at least a portion of the central axis of said housing and then generally radially through said second compartment.

43. The device of claim 42, wherein said blood outlet has a central fluid flow axis disposed in a plane substantially transverse to said central axis of said housing.

44. The device of claim 42, wherein said oxygenating fluid inlet and oxygenating fluid outlet respectively comprise a gas inlet and a gas outlet.

45. The device of claim 42, wherein said first and second compartments are cylindrical.

46. The device of claim 42 wherein said plurality of hollow gas exchange tubes disposed in said second compartment are comprised of hollow gas exchange tubes that are spirally wound around said central axis.

47. The device of claims 42 or 45 wherein said first compartment is upstream of said second compartment.

48. The device of claim 42 wherein said housing is constructed and arranged and said flow passage for blood is defined such that blood flows in a vertically upward direction along at least a portion of said central path.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : Re 36,774
DATED : Jul. 11, 2000
INVENTOR(S) : Louis C. Cosentino, Jeffery A. Lee, Daniel A. Baker

It is certified that error appears in the above-identified patent and that said Letters Patent are hereby corrected as shown below:

Front Page, Abstract, fifth line down, after "heat" change "exchanges" to --exchange--

Col. 4, line 35, before "spacing" change "by" to --but--

Col. 5, line 6, before "pressure" change "accept&hie" to --acceptable--


Col. 5, line 21, after "polypropylene" change "membrane is" to --membranes of--

Col. 6, line 42, after "angular and" change "Offset" to --offset--

Signed and Sealed this

Twenty-ninth Day of May, 2001

Attest:



NICHOLAS P. GODICI

Attesting Officer

Acting Director of the United States Patent and Trademark Office