



(22) Date de dépôt/Filing Date: 2001/11/05

(41) Mise à la disp. pub./Open to Public Insp.: 2003/05/05

(45) Date de délivrance/Issue Date: 2005/06/28

(51) Cl.Int.<sup>7</sup>/Int.Cl.<sup>7</sup> B09C 1/02, B01D 25/21, B01J 29/04,  
B01D 15/00


(72) Inventeurs/Inventors:  
RYERSON, JAMES GEORGE, CA;  
CAMPBELL, COLIN, CA

(73) Propriétaire/Owner:  
RECUPETRO RESOURCES LTD., CA

(74) Agent: THOMPSON LAMBERT LLP

(54) Titre : METHODE POUR ELIMINER DES HYDROCARBURES DE SOLS A L'AIDE D'UNE MOUSSE POLYMER  
CONTENANT DES MATIERES DE CHARGE SOLIDES

(54) Title: METHOD OF REMOVAL OF HYDROCARBONS FROM SOILS USING SOLIDS LOADED POLYMER FOAM

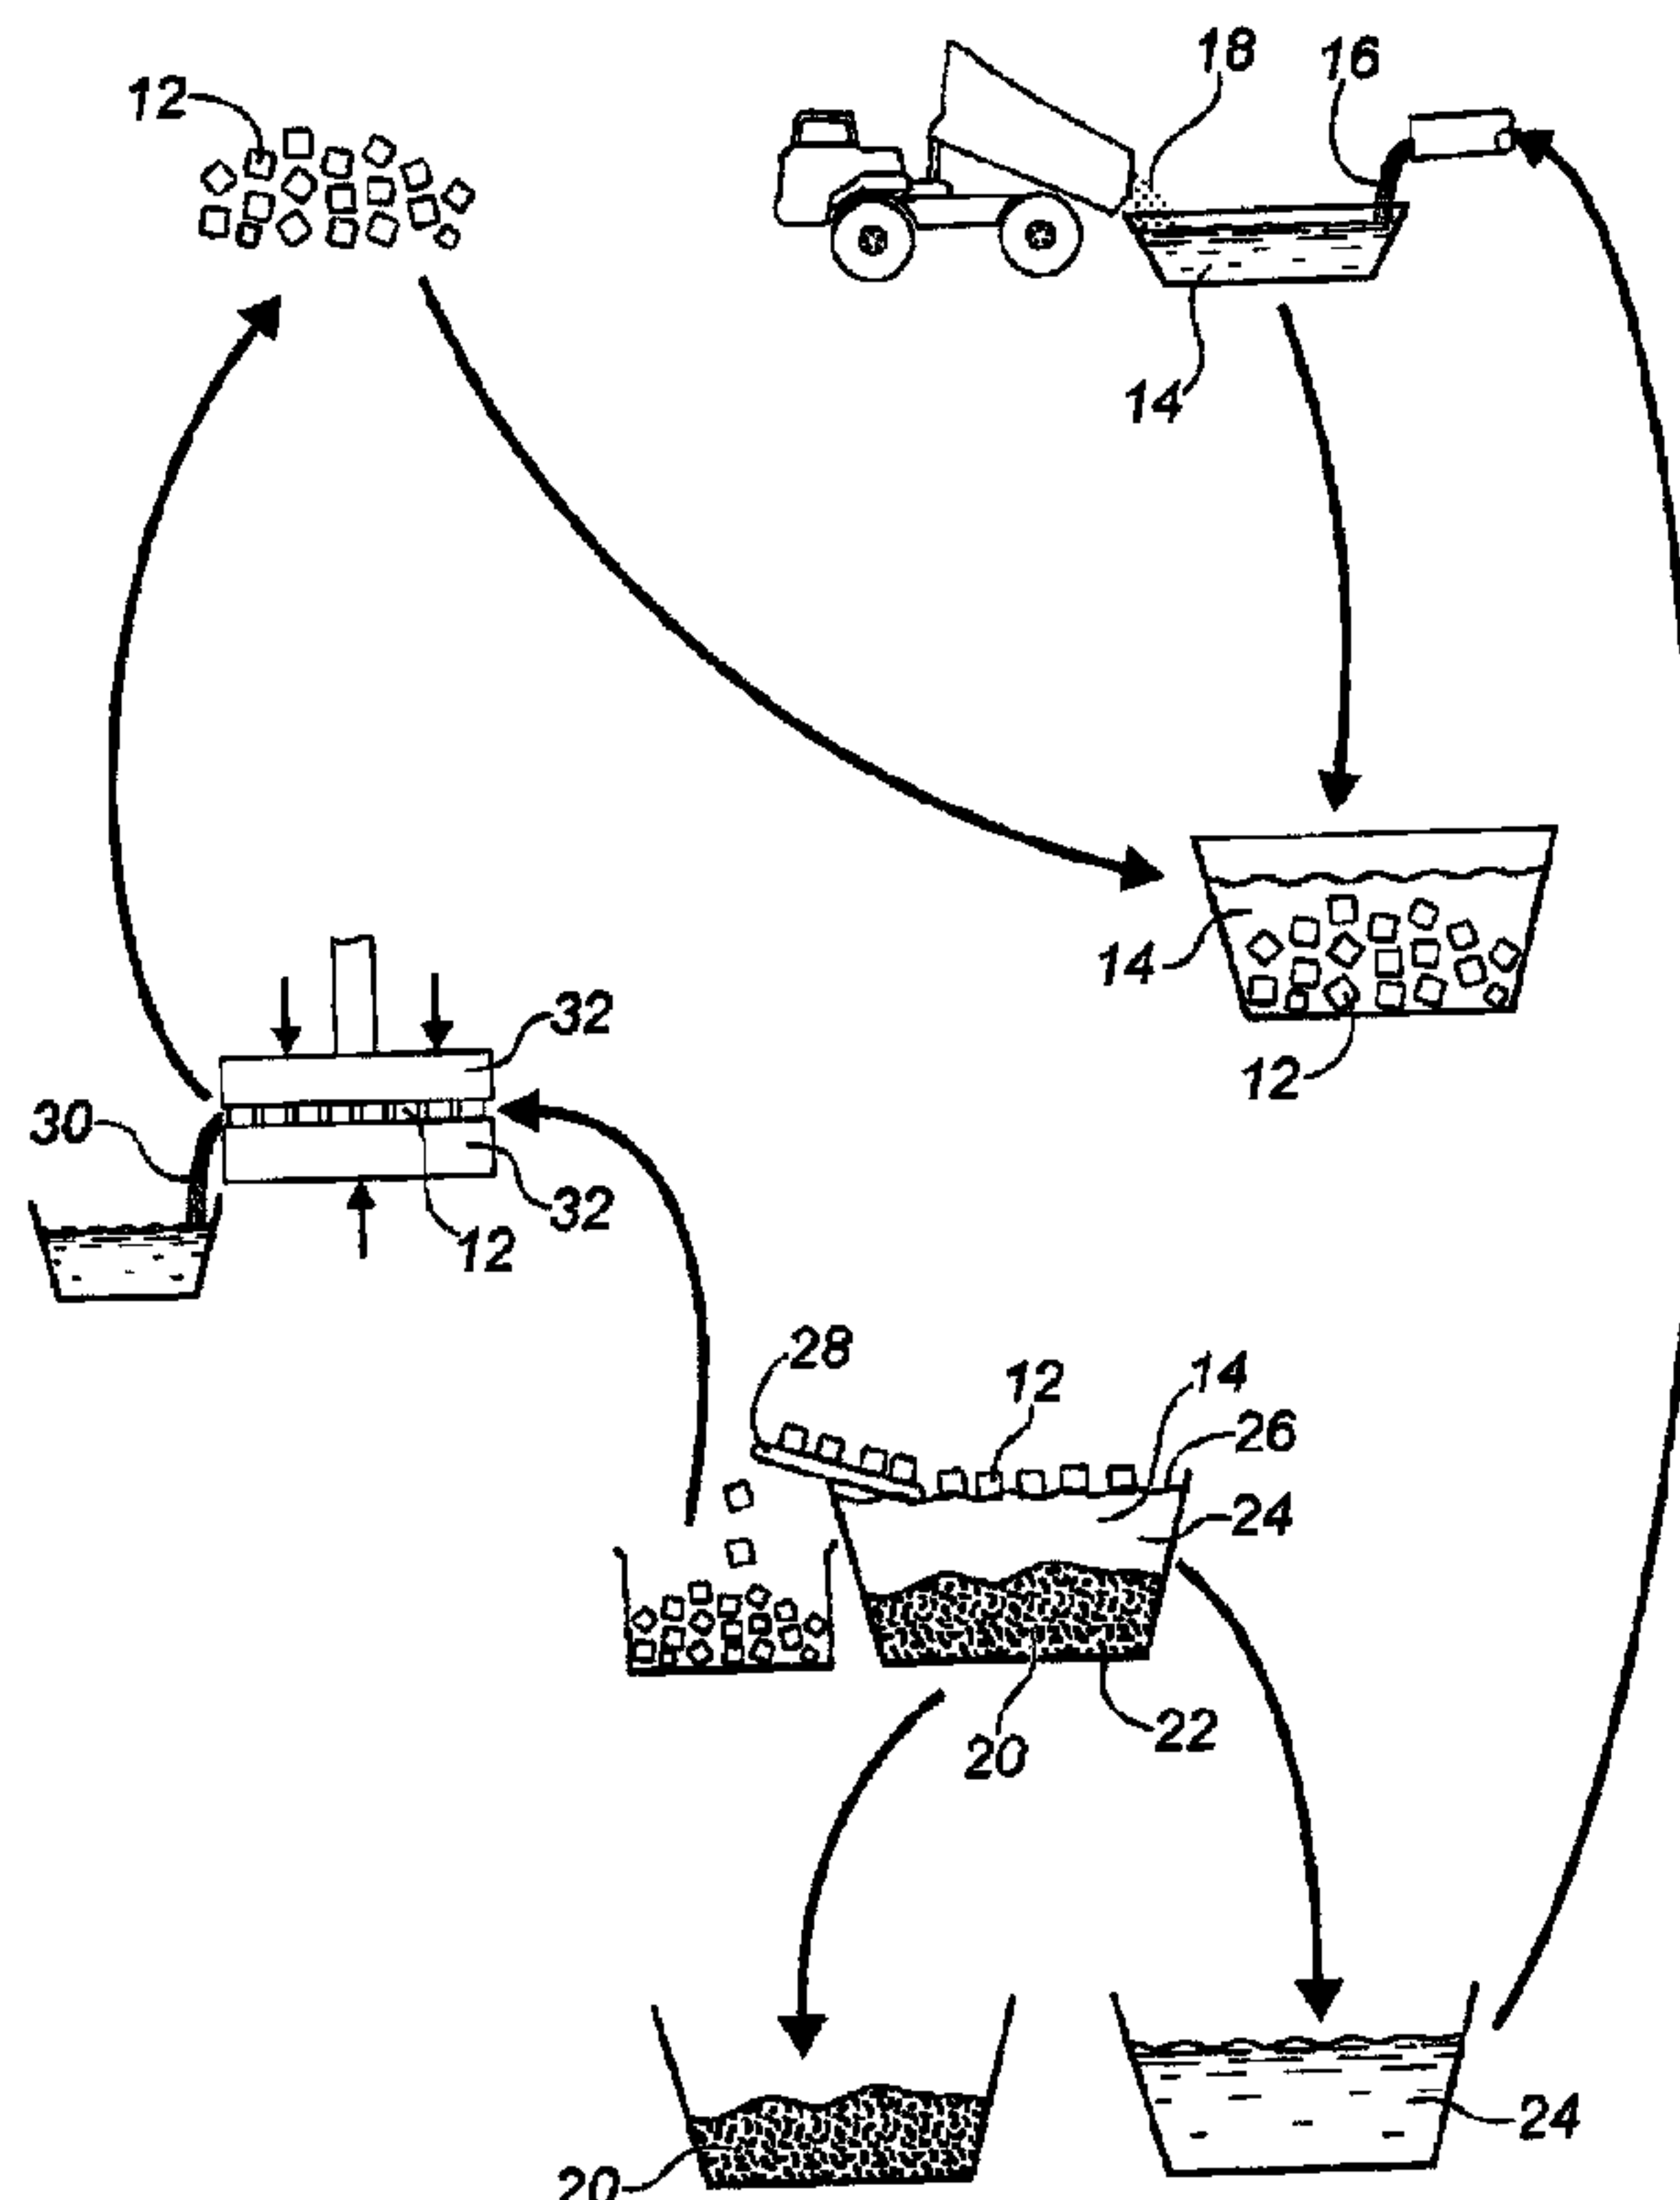

(57) Abrégé/Abstract:

A method of removal of hydrocarbons from soils using solids-loaded polymer foam. A first step involves providing a solids-loaded polymer foam consisting of an open-celled polymer foam matrix with zeolite dispersed and bound throughout the foam matrix. A second step involves mixing soils containing hydrocarbons, solids-loaded polymer and water. It has been found that hydrocarbons are adsorbed by the solids-loaded polymer foam. The order of mixing can be altered to suit particular applications. A recovery step can be added to recover the hydrocarbons from the solids-loaded polymer foam.

**ABSTRACT OF THE DISCLOSURE**

A method of removal of hydrocarbons from soils using solids-loaded polymer foam. A first step involves providing a solids-loaded polymer foam consisting of an open-celled  
5 polymer foam matrix with zeolite dispersed and bound throughout the foam matrix. A second step involves mixing soils containing hydrocarbons, solids-loaded polymer and water. It has been found that hydrocarbons are adsorbed by the solids-loaded polymer foam. The order of mixing can be altered to  
10 suit particular applications. A recovery step can be added to recover the hydrocarbons from the solids-loaded polymer foam.

**TITLE OF THE INVENTION:**

Method Of Removal Of Hydrocarbons From Soils Using Solids Loaded Polymer Foam

5 **FIELD OF THE INVENTION**

The present invention relates to a method of removal of hydrocarbons from soils using solids-loaded polymer foam.

**BACKGROUND OF THE INVENTION**

10 There is a need for a more effective and financially viable manner of removing hydrocarbons from soils. The need manifests itself in environmental cleanup of hydrocarbon contaminated lands, such as those lands surrounding oil wells and gas storage tanks. Often the cost of environmental cleanup  
15 exceeds the commercial value of the land. It is not unusual for the environmental cleanup to largely consist of removal of contaminated soils to landfill sites. The need also manifests itself in commercial recovery of hydrocarbons, such as the recovery of bitumen from oil sands.

20

The present invention relates to removing hydrocarbons from soils using solids-loaded polymer foam. Solids-loaded polymer foam is known. United States Patent 4,563,483 (Smith et al 1986) entitled "Concrete Cleaning Composition" describes  
25 the use of solids-loaded polyurethane foam to clean concrete. Abrasive solids are dispersed and bound throughout the polyurethane foam matrix. The choice of abrasive material is made from a wide variety of materials of adequate hardness and of a particulate size range which will enable them to  
30 effectively scour concrete, brick or stone surfaces and to loosen dirt or other debris held thereto by oil. The Smith et al reference uses a silane-coupling agent to bond the abrasive particles to the foam matrix. For this reason, the Smith et al reference teaches that the abrasive particles are preferably  
35 chosen from substances which are capable of forming reactive

sites for the silane-coupling agents.

### **SUMMARY OF THE INVENTION**

The present invention relates to a method by which solids-  
5 loaded polymer foam can be used to remove hydrocarbons from soils.

According to the present invention there is provided a method of removal of hydrocarbons from soils using solids-  
10 loaded polymer foam. A first step involves providing a solids-loaded polymer foam consisting of an open-celled polymer foam matrix with zeolite dispersed and bound throughout the foam matrix. A second step involves mixing soils containing hydrocarbons, solids-loaded polymer and water. It has been  
15 found that hydrocarbons are adsorbed by the solids-loaded polymer foam.

The Smith et al reference introduced solid particles into polymer foam to serve as abrasives. It has been discovered  
20 that zeolite loaded polymer foam has some special properties which results in the zeolite loaded polymer foam drawing hydrocarbons out of soils. In accordance with the teachings of the present invention the zeolite in the solids-loaded polymer foam does not serve as an abrasive, it serves to draw  
25 the hydrocarbons into the polymer foam. It is believed that this special property that zeolite has to draw hydrocarbons into the polymer foam is linked to the cation exchange capacity of zeolite. While different polymer foams can be used for this method, a polymer foam that is commercially available and  
30 provides good results with this method is polyurethane foam.

The three elements (soils containing hydrocarbons, solids-loaded polymer foam and water) can be added together simultaneously or in a different order. Each method of mixing  
35 has advantages that suit particular circumstances. One method of mixing is to have the solids-loaded polymer foam dry mixed with soils containing hydrocarbons prior to adding water. It

has been found that this method of mixing requires less water. Another method of mixing is to have the soils containing hydrocarbons mixed with water prior to adding solids-loaded polymer foam. It is believed that this has advantages when  
5 trying to recover viscose hydrocarbons. Yet another method of mixing it to have the solids-loaded polymer foam wet mixed with water prior to being brought into contact with soils containing hydrocarbons. It is believed that this method of mixing facilitates in situ recovery of hydrocarbons from soils.

10

Although beneficial results may be obtained through the use of the method, as described above, even more beneficial results may be obtained by including a hydrocarbon recovery step. While hydrocarbon recovery may not be of paramount  
15 concern in environmental clean up applications, other applications are not commercially viable unless the hydrocarbons can be recovered and some value realized for the hydrocarbons. It is preferred that the solids-loaded polymer foam be mechanically compressed to recover the hydrocarbons.  
20 It has been discovered that the polymer foam does not readily release hydrocarbons. The hydrocarbon cannot be effectively removed through the use of a centrifuge, nor can it be effectively removed by the application of heat. If only small quantities of hydrocarbon are present in the solids-loaded  
25 polymer foam, it cannot be released by mechanically compressing; as the hydrocarbon is held by the zeolite and moves within the solids-loaded polymer foam. However, when the solids-loaded polymer foam is substantially saturated with hydrocarbons, mechanically compressing the polymer foam will  
30 squeeze out excess hydrocarbons. This recovery step also facilitates a solids-loaded polymer foam recycling step of reusing the solids-loaded polymer foam for further hydrocarbon recovery.

35 Although beneficial results may be obtained through the use of the method, as described above, even more beneficial results may be obtained with the solids-loaded polymer foam

being shredded. The shredding into small chunks or particles makes the polymer foam easier to handle, facilitates mixing and increases surface contact area.

5        Although the water used may be heated, one of the major advantages of this method is that cold water can be used. By "cold" water, it is meant that the water is used at its ambient temperature. It is not essential to use hot water in order to obtain beneficial results. The cost savings and  
10 environmental benefits obtained through cold water processing are substantial. Environmental benefits can also be obtained by including a water recycling step of reusing the water for further hydrocarbon recovery. The water can be repeatedly reused without adversely affecting the removal and recovery  
15 process.

It is preferred that solids-loaded polymer foam be used that will float when saturated with oil, although polymer foam that sinks when saturated can be used. In some applications  
20 this may be beneficial, and the solids-loaded polymer foam may be removed from the bottom of the slurry. However, as the solids will also tend to settle to the bottom of the slurry; it is preferred that small shredded chunks of solids-loaded polymer foam that float even when saturated be used. This  
25 enables the solids-loaded polymer foam to be removed from the slurry by skimming.

The amount of zeolite in the polymer foam can be varied and beneficial results obtained. Even 1% zeolite will bring  
30 some beneficial results. It has been found, however, that for best results there should be at least 5% by weight of the solids-loaded polymer foam. Of course, the greater the quantity of zeolite the more pronounced the ability of the polymer foam to adsorb hydrocarbons.

35

Natural zeolite is commercially available, as is synthetic zeolite. It is preferred that natural zeolite be used. It has

been found that, when reused repeatedly, the synthetic zeolite tends to break down.

## 5 **BRIEF DESCRIPTION OF THE DRAWINGS**

These and other features of the invention will become more apparent from the following description in which reference is made to the appended drawings, the drawings are for the purpose of illustration only and are not intended to in any way limit  
10 the scope of the invention to the particular embodiment or embodiments shown, wherein:

**FIGURE 1** is a processing flow diagram illustrating a first mixing order of soils containing hydrocarbons and water, then adding solids-loaded polymer foam.

15 **FIGURE 2** is a processing flow diagram illustrating a second mixing order of soils containing hydrocarbons and solids-loaded polymer foam, then adding water.

**FIGURE 3** is a processing flow diagram illustrating a third mixing order of solids-loaded polymer foam and water, then  
20 bringing into contact with soils containing hydrocarbons.

## **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**

Three preferred methods will now be described with reference to **FIGURES 1** through **3**. All of the described methods involve two common steps. A first step involves providing a  
25 solids-loaded polymer foam consisting of an open-celled polymer foam matrix with zeolite dispersed and bound throughout the foam matrix. A second step involves mixing soils containing hydrocarbons, solids-loaded polymer and water. Hydrocarbons are adsorbed by the solids-loaded polymer foam. The  
30 difference between the three preferred methods lies in the order in which the three elements of solids-loaded polymer foam, soils containing hydrocarbons and water are mixed.

Referring to **FIGURE 1**, there is illustrated a method of  
35 removal of hydrocarbons from soils using solids-loaded polymer foam which includes a first mixing order that involves providing shredded solids-loaded polymer foam 12 consisting of

an open-celled polyurethane foam substrate with zeolite dispersed and bound throughout the foam matrix. Zeolite is at least 5% by weight of the shredded solids-loaded polymer foam and is natural zeolite, as opposed to synthetic zeolite.

5        A cold slurry 14 is formed of cold water 16 and soils containing hydrocarbons 18. Shredded solids-loaded polymer foam 12 is mixed into cold slurry 14, whereby hydrocarbons in cold slurry 14 are adsorbed by shredded solids-loaded polymer foam 12. In cold slurry 14, solids 20 will tend to settle at the  
10 bottom 22 of cold slurry 14, a water layer 24 will form above solids 20, while shredded solids-loaded polymer foam 12 (with adsorbed hydrocarbons) will tend to rise to the top 26 of cold slurry 14. Shredded solids-loaded polymer foam 12 will float and can be removed by skimming. In the illustrated embodiment,  
15 a conveyer type of skimmer 28 is used however it will be appreciated that other methods can be used to skim shredded solids-loaded polymer foam 12 from water layer 24.

Shredded solids-loaded polymer foam 12 is mechanically  
20 compressed to recover the hydrocarbons 30. In the illustrated embodiment, two compression blocks 32 are used to compress shredded polymer foam 12, however it will be appreciated that other mechanical devices can be used to effectively compress shredded polymer foam 12. After hydrocarbons 30 have been  
25 removed, shredded solids-loaded polymer foam 12 can be recycled for use again in hydrocarbon recovery. Water layer 24 recovered can also be recycled and reused as cold water 16 for further hydrocarbon recovery.

30        Referring to **FIGURE 2**, there is illustrated a method of removal of hydrocarbons from soils using solids-loaded polymer foam involving a second mixing order where shredded solids-loaded polymer foam 12 is dry mixed with soils containing hydrocarbons 18 prior to adding water 16. Once shredded  
35 solids-loaded polymer foam 12 has been dry mixed with soils containing hydrocarbons 18, water 16 is added (preferably cold water to save expense). Once water 16 is added, hydrocarbons

are adsorbed by shredded solids-loaded polymer foam 12. The mixture tends to separate into layers with solids 20 settling at the bottom 22 of the mixture 34 and shredded solids-loaded polymer foam 12 will float on top 26 of water layer 24.

5 Shredded solid-loaded polymer foam 12 can then be removed by skimming. Shredded solids-loaded polymer foam 12 can be mechanically compressed to recover the hydrocarbons 30. After removal of hydrocarbons 30, shredded solids-loaded polymer foam 12 can be recycled for use again in hydrocarbon recovery. It

10 has been found that by dry mixing shredded solids-loaded polymer foam 12 with soils containing hydrocarbons 18 prior to adding water 16, less water is required.

Referring to **FIGURE 3**, there is illustrated a method of

15 removal of hydrocarbons from soils by use of a third mixing order which involves wet mixing shredded solids-loaded polymer 12 with water 16 prior to being brought into contact with soils containing hydrocarbons 18. It has been found that this method of mixing is well suited to in situ recovery of hydrocarbons

20 from soils.

In the illustrated embodiment, there is provided an earth formation, generally indicated by reference numeral 34, that is made up of soils containing hydrocarbons 18. An inlet well

25 36 and an outlet well 38 are drilled into earth formation 34 in spaced relation. Shredded solids-loaded polymer 12 is wet mixed with water 16 and then fed into inlet well 36. The shredded solids-loaded polymer 12 and water 16 tend to migrate through earth formation to outlet well 38. In the process of

30 migrating through earth formation 34, the shredded solids-loaded polymer 12 comes into contact with soils containing hydrocarbons 18. Hydrocarbons are adsorbed by shredded solids-loaded polymer foam 12. It will be appreciated that in order to permit migration through earth formation 34, that solids-loaded

35 polymer foam 12 must be finely shredded. Some solids will tend to settle in outlet well 38. A mixture 40 exiting outlet well 38 is then subjected to further treatment. Solids 20 will tend

to settle at the bottom 22 with a water layer 24 forming above solids 20. Solids-loaded polymer foam 12 (with adsorbed hydrocarbons) will tend to rise to the top 26 and float on water layer 24. As described with first order of mixing and  
5 second order of mixing, shredded solids-loaded polymer foam 12 floating on water layer 24 and can then be removed by skimming. Shredded solids-loaded polymer foam 12 can then be mechanically compressed to recover the hydrocarbons 30.

10 After hydrocarbons 30 have been removed, shredded solids-loaded polymer foam 12 can be recycled for use again in hydrocarbon recovery. Water layer 24 recovered can also be recycled and reused as cold water 16 for further hydrocarbon recovery.

15

In this patent document, the word "comprising" is used in its non-limiting sense to mean that items following the word are included, but items not specifically mentioned are not excluded. A reference to an element by the indefinite article  
20 "a" does not exclude the possibility that more than one of the element is present, unless the context clearly requires that there be one and only one of the elements.

It will be apparent to one skilled in the art that  
25 modifications may be made to the illustrated embodiment without departing from the spirit and scope of the invention as hereinafter defined in the Claims.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE  
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

- 1) A method of removal of hydrocarbons from soils using  
5 solids-loaded polymer foam, comprising the steps of:  
    providing the solids-loaded polymer foam consisting of  
    an open-celled polymer foam matrix with zeolite dispersed and  
    bound throughout the foam matrix; and  
    mixing soils containing hydrocarbons, the solids-loaded  
10 polymer and water, hydrocarbons being adsorbed by the solids-  
    loaded polymer foam.
- 2) The method as defined in Claim 1, the solids-loaded  
polymer foam being dry mixed with soils containing  
15 hydrocarbons prior to adding water.
- 3) The method as defined in Claim 1, the soils containing  
hydrocarbons being mixed with water prior to adding the  
solids-loaded polymer foam.  
20
- 4) The method as defined in Claim 1, the solids-loaded  
polymer foam being wet mixed with water prior to being  
brought into contact with soils containing hydrocarbons.
- 25 5) The method as defined in Claim 1, including a hydrocarbon  
recovery step of mechanically compressing the solids-loaded  
polymer foam to recover the hydrocarbons.
- 6) The method as defined in Claim 1, the solids-loaded  
30 polymer foam being shredded, thereby facilitating mixing and  
increasing surface contact area.
- 7) The method as defined in Claim 1, the polymer foam being  
polyurethane foam.  
35
- 8) The method as defined in Claim 1, the water being

unheated water.

9) The method as defined in Claim 1, the solids-loaded polymer foam being removed from the mixture by skimming.

5

10) The method as defined in Claim 1, the zeolite being at least 5% by weight of the solids-loaded polymer foam.

11) The method as defined in Claim 1, the zeolite being natural zeolite, as opposed to synthetic zeolite.

10

12) The method as defined in Claim 5, including a polymer foam recycling step of reusing the solids-loaded polymer foam for further hydrocarbon recovery.

15

13) The method as defined in Claim 1, including a water recycling step of reusing the water for further hydrocarbon recovery.

14) A method of removal of hydrocarbons from soils using solids-loaded polymer foam, comprising the steps of:

5 providing shredded solids-loaded polymer foam consisting of an open-celled polyurethane foam substrate with zeolite dispersed and bound throughout the foam matrix, the zeolite being at least 5% by weight of the shredded solids-loaded polymer foam;

10 forming a unheated slurry of unheated water and soils containing hydrocarbons;

mixing the shredded solids-loaded polymer foam into the unheated slurry, whereby hydrocarbons in the unheated slurry are adsorbed by the shredded solids-loaded polymer foam; and

15 mechanically compressing the shredded solids-loaded polymer foam to recover the hydrocarbons.

15) The method as defined in Claim 14, the shredded solids-loaded polymer foam being removed from the unheated slurry by skimming.

20

16) The method as defined in Claim 14, the zeolite being natural zeolite, as opposed to synthetic zeolite.

17) The method as defined in Claim 14, including a polymer  
25 foam recycling step of reusing the shredded solids-loaded polymer foam for hydrocarbon recovery.

18) The method as defined in Claim 14, including a water  
30 recycling step of reusing the unheated water for further hydrocarbon recovery.

19) A method of removal of hydrocarbons from soils using solids-loaded polymer foam, comprising the steps of:

5 providing shredded solids-loaded polymer foam consisting of an open-celled polyurethane foam substrate with zeolite dispersed and bound throughout the foam matrix, the zeolite being at least 5% by weight of the shredded solids-loaded polymer foam;

10 dry mixing soils containing hydrocarbons with the solids-loaded polymer foam;

15 adding unheated water to the soils containing hydrocarbons mixed with the shredded solids-loaded polymer foam to form a unheated slurry, whereby hydrocarbons in the unheated slurry are adsorbed by the shredded solids-loaded polymer foam; and

mechanically compressing the shredded solids-loaded polymer foam to recover the hydrocarbons.

20 20) The method as defined in Claim 19, the shredded solids-loaded polymer foam being removed from the unheated slurry by skimming.

25 21) The method as defined in Claim 19, the zeolite being natural zeolite, as opposed to synthetic zeolite.

22) The method as defined in Claim 19, including a polymer foam recycling step of reusing the shredded solids-loaded polymer foam for hydrocarbon recovery.

30 23) The method as defined in Claim 19, including a water recycling step of reusing the unheated water for further hydrocarbon recovery.

24) A method of removal of hydrocarbons from soils using solids-loaded polymer foam, comprising the steps of:

5 providing shredded solids-loaded polymer foam consisting of an open-celled polyurethane foam substrate with zeolite dispersed and bound throughout the foam matrix, the zeolite being at least 5% by weight of the shredded solids-loaded polymer foam;

10 providing an inlet well, an outlet well, with hydrocarbon bearing soils positioned in an earth formation between the inlet and the outlet;

injecting water and the solids-loaded polymer foam into the inlet well; and

15 recovering the solids-loaded polymer foam at the outlet well and mechanically compressing the shredded solids-loaded polymer foam to recover the hydrocarbons.

25) The method as defined in Claim 24, the water being unheated water.

20

26) The method as defined in Claim 24, the zeolite being natural zeolite, as opposed to synthetic zeolite.

27) The method as defined in Claim 24, including a polymer foam recycling step of reusing the shredded solids-loaded polymer foam for hydrocarbon recovery.

25

28) The method as defined in Claim 24, including a water recycling step of reusing the unheated water for further hydrocarbon recovery.

30

1/3

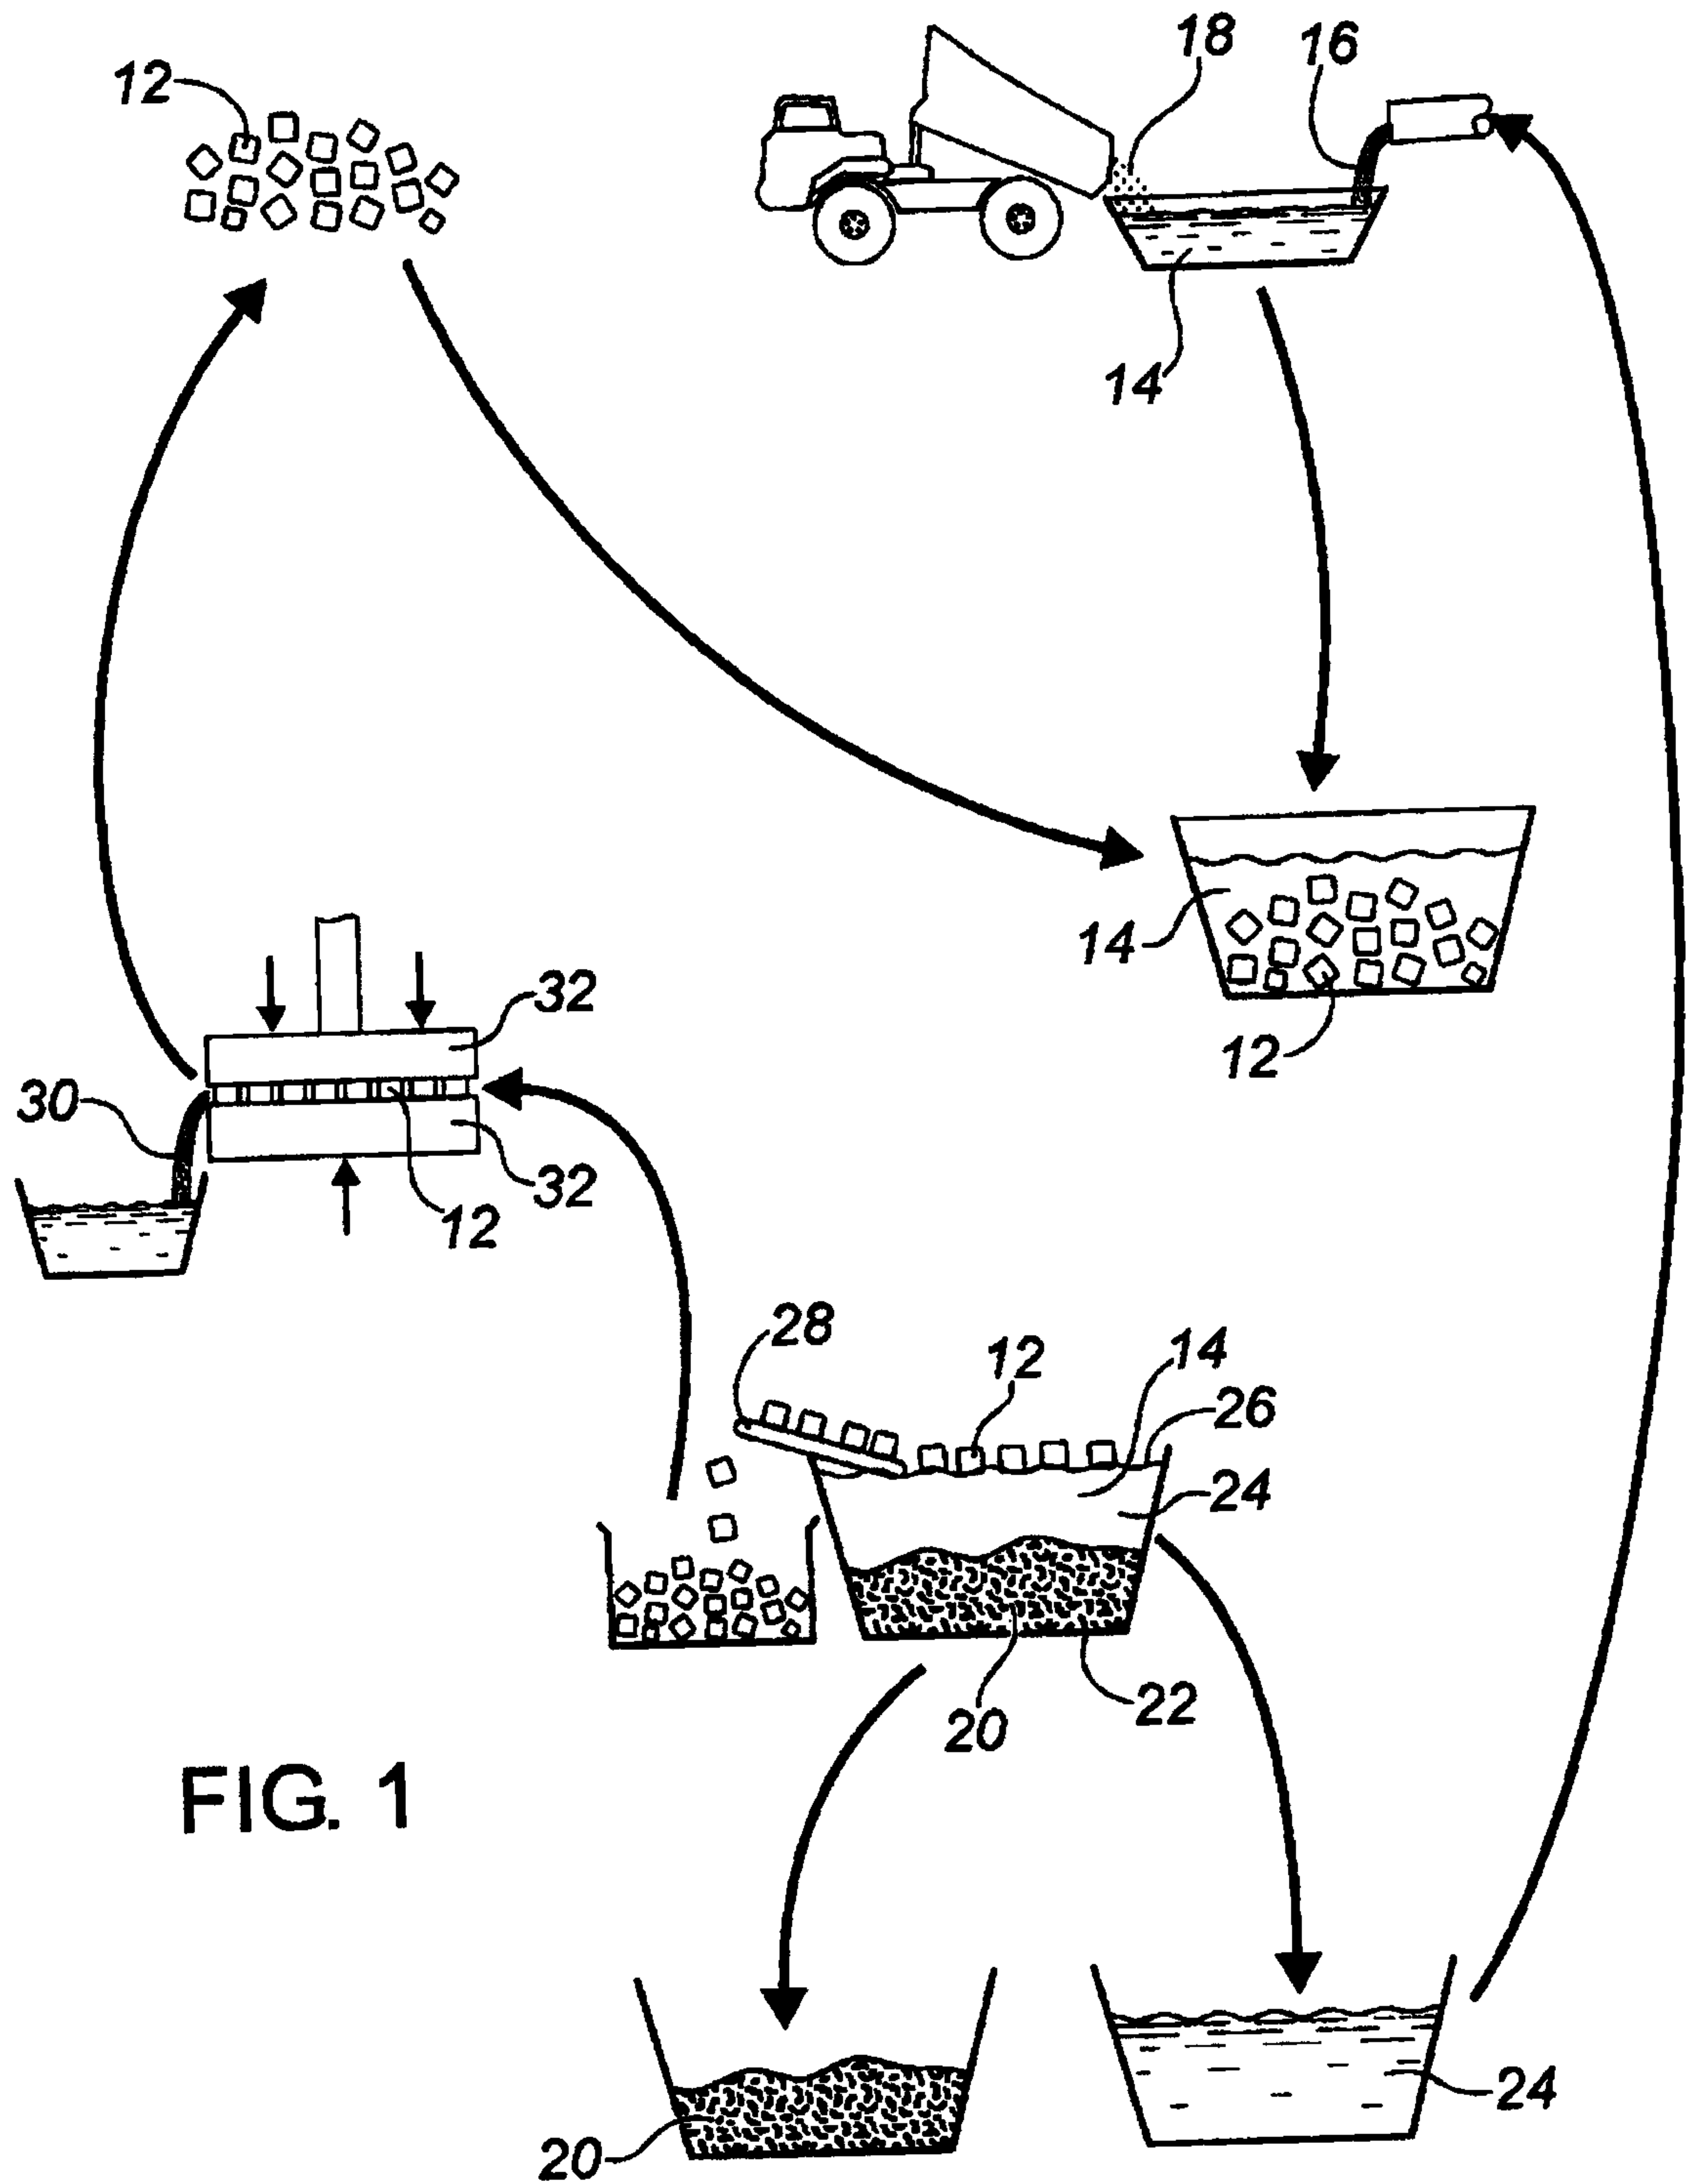


FIG. 1

2/3

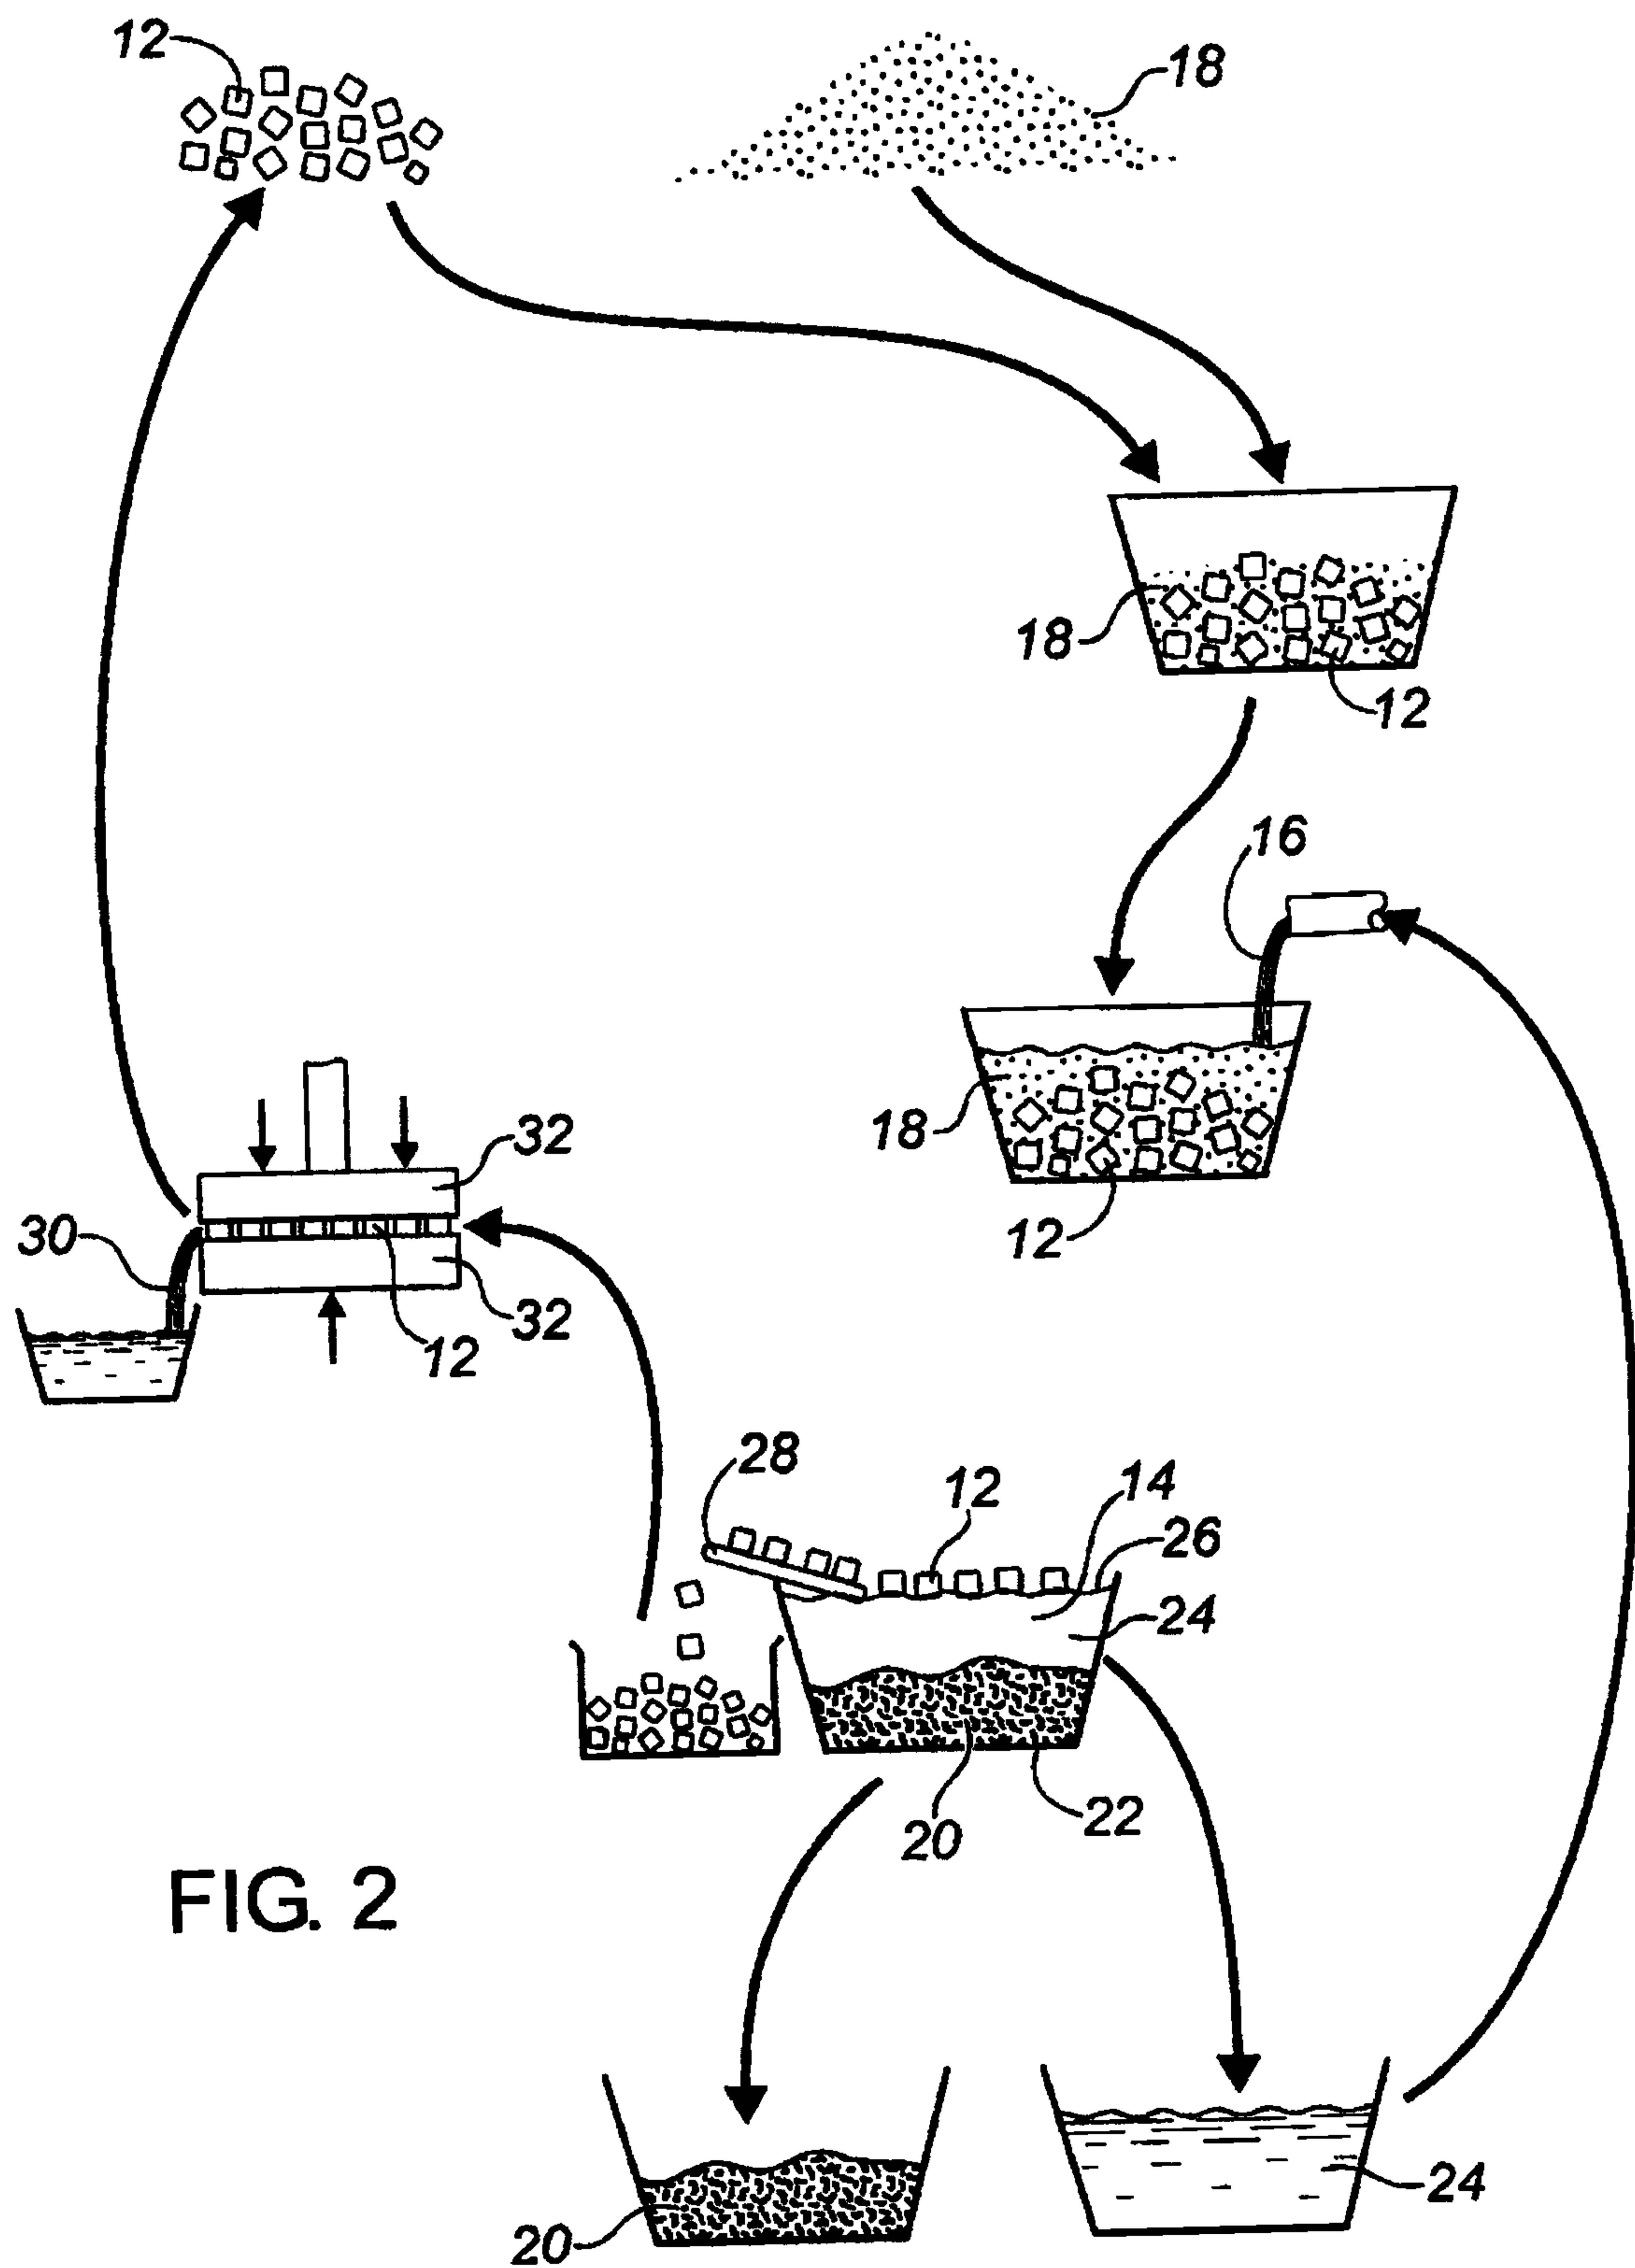


FIG. 2

3/3

