




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification : Not classified		A2	(11) International Publication Number: WO 00/41544
			(43) International Publication Date: 20 July 2000 (20.07.00)
(21) International Application Number: PCT/US00/00861 (22) International Filing Date: 13 January 2000 (13.01.00) (30) Priority Data: 60/116,075 15 January 1999 (15.01.99) US 09/479,522 7 January 2000 (07.01.00) US (71) Applicant (for all designated States except US): CLARK SCHWEBEL TECH-FAB COMPANY [US/US]; 2200 S. Murray Avenue, Anderson, SC 29622 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): BROWN, Gordon, L. [US/US]; 1046 Lady's Lane, Anderson, SC 29621 (US). BROWN, Bentley, A. [US/US]; 1046 Lady's Lane, Anderson, SC 29622 (US). MILLIMAN, Jeff [US/US]; 208 E. Augusta Place, Greenville, SC 29605 (US). (74) Agents: HUFFSTETLER, Rachel, Healey et al.; Alston & Bird LLP, P.O. Drawer 34009, Charlotte, NC 28234-4009 (US).			(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published Without international search report and to be republished upon receipt of that report.

(54) Title: STRUCTURAL REINFORCEMENT FOR USE IN A SHOE SOLE

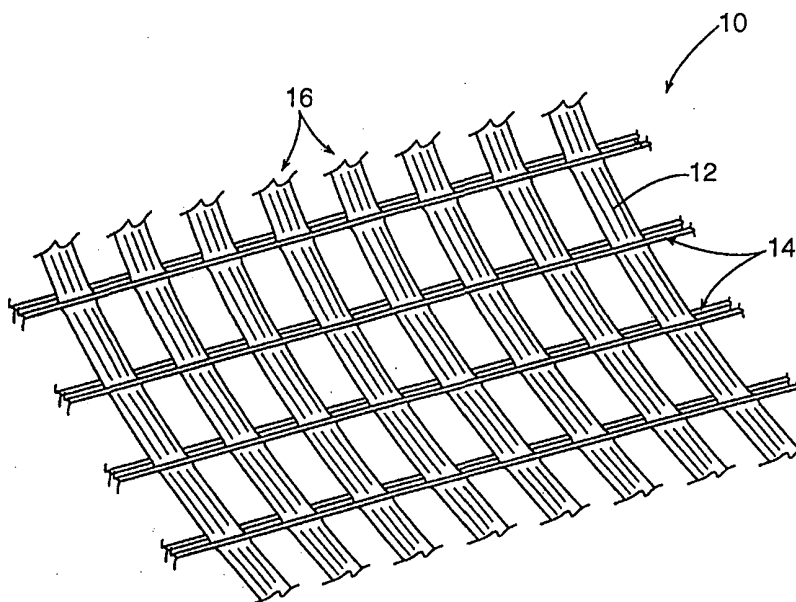

(57) Abstract

A structural reinforcement in the form of an open gridwork which is advantageously used, for example, as part of a shoe sole. The structural reinforcement provides and/or enhances spring-like characteristics of the member it is reinforcing, propels and encourages the natural foot strike of the user to lengthen the user's stride, increases the stride speed, and stabilizes the user's foot to prevent permanent compression of the midsole as a result of creep. The gridwork is impregnated throughout with a fully cured of B-stage thermosettable resin. The gridwork includes at least one continuous filament selected from the group consisting of glass, carbon, and aramid. The open gridwork is flat, corrugated, or double corrugated. The corrugated gridwork may be sinusoidal. The open gridwork may be part of a shoe midsole or may constitute a shoe midsole.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

STRUCTURAL REINFORCEMENT FOR USE IN A SHOE SOLE

FIELD OF THE INVENTION

The present invention generally relates to a resilient, flexible structural reinforcement which may be used in or as a replacement for a resilient cushioning material, such as a shoe midsole, to provide a spring for storing and releasing energy in a manner beneficial to the user. The invention also relates to structurally reinforced shoe soles, midsoles, and to shoes incorporating such soles.

BACKGROUND OF THE INVENTION

Shoe soles, e.g., athletic shoe soles, must be flexible and typically include a patterned, ground engaging, tread layer or outsole, a midsole consisting of highly resilient porous material, and an innersole. The midsole of athletic shoes is typically formed of a softly elastic material such as foamed polyurethane or an ethylene-vinyl acetate copolymer. A softly elastic material is provided to absorb impact associated with movement of the user's foot such as walking, running, jumping, etc., and to provide a cushioning effect to the user's foot.

Although shoe midsoles must be flexible, they must nonetheless be stable to prevent a less than ideal foot strike which often results in over-supination or over-pronation of the user's stride. Over-supination or over-pronation occurs when the user's foot strikes the ground at an angle relative to the horizontal axis. Stated differently, the inside or outside of the user's foot bears the impact as the foot strikes the ground as opposed to the impact being uniformly distributed across the user's foot. This, in turn, may result in injuries to the user's joints.

It is desirable for shoe soles to relieve stresses that are imposed on a human foot during activities such as athletic activities by providing a spring arrangement. The spring arrangement stores and releases energy caused by compression of the midsole when portions of the foot (i.e., the heel and ball of the foot) impact upon the ground. The stored energy, which compresses the midsole, may be returned to the user's benefit while also assisting to avoid overuse injuries caused by repetitive impact to the body joints as the foot strikes the ground. A problem associated with shoe midsoles is wear due to creep. Creep is caused by strain experienced by the sole, e.g. the midsole, when subjected to repetitive, applied stress and results in a permanent deformation and loss of resiliency in the midsole. Creep may be particularly imminent with a less than ideal foot strike, e.g., supination or pronation of the foot. As a result, the midsole may no longer be flat when only a portion of the midsole experiences creep due to uneven repetitive stress. In turn, the useful life of the midsole is diminished thereby decreasing the life of the shoe.

SUMMARY OF THE INVENTION

In accordance with preferred embodiments of the present invention, a flexible structural reinforcement is provided for storing and releasing energy and providing stability and structured resiliency characteristics to the member it is reinforcing. Preferably, the structural reinforcement is placed within or as part of a midsole or as the midsole to provide a lightweight reinforcement for reinforcing a shoe sole to maximize its useful life. For the sake of illustration, use of the structural reinforcement within a shoe midsole will be described, but it is to be apparent that the structural reinforcement described herein has many applications in addition for a use in a shoe midsole. For example, the gridwork may serve as the midsole of the shoe sole. Thus, an outsole and an innersole may be positioned on opposing sides of the gridwork, thereby eliminating the need and expense of the softly elastic material. The structural reinforcement preferably also provides a midsole that returns stored energy resulting from foot impact upon the ground to the user's benefit by providing spring-like characteristics to the sole. A sole possessing spring-like capabilities to propel or encourage the natural foot strike of the

user to lengthen the user's stride, increase the stride speed, and stabilize the user's foot and prevent permanent compression of the midsole as a result of creep is also provided by preferred embodiments of the present invention.

According to one embodiment, the invention provides a gridwork comprising sets
5 of warp strands and sets of weft strands which has been substantially impregnated throughout with a thermosettable-B stage or fully cured resin for reinforcing resilient, compressible foam material such as is used in the midsole of shoes, e.g., athletic shoes. Shoe properties such as stored energy return, foot stability, sole expansion and/or wear may be enhanced by employing such a gridwork used in combination with compressible
10 foam material employed in shoe midsoles, especially athletic shoes. This is achieved according to embodiments of the present invention by providing a resilient polymer cushioning material that either encapsulates or is positioned adjacent to a structural reinforcement provided in the midsole that imparts spring-like characteristics to the polymer material. In addition to enhancing various performance characteristics, the
15 structural reinforcement provided in the midsole imparts structural integrity to the midsole contributing to its wear resistance. In preferred embodiments of the present invention, the structural member also stabilizes elongation properties of the midsole to decrease or prevent over-supination and over-pronation, particularly when used as an athletic shoe midsole.

20 The gridwork comprises a set of warp strands and a set of weft strands disposed at substantially right angles to each other, with each of the strands comprising at least one continuous filament, and with at least some of the strands of each set being spaced apart so as to define an open structure, and with the gridwork being impregnated substantially throughout with a thermosettable B-stage or fully cured resin. According to one
25 embodiment, the gridwork is positioned within or as part of a compressible midsole. Alternatively, the gridwork may form the midsole of the shoe sole without the need for compressible material. One aspect of the present invention provides for a generally flat gridwork. In another embodiment, the set of warp strands of the gridwork is corrugated, e.g., into a sinusoidal configuration, having alternating high and low portions, and

wherein the set of weft strands is substantially linear, so that the gridwork has a three-dimensional configuration when formed within the midsole, as part of the midsole, or as the midsole. In yet another embodiment of the present invention, the gridwork has a double corrugated shape consisting of a juxtapositioned pair of corrugated gridwork elements fixedly connected to one another in a face-to-face relationship and the gridwork is positioned within the midsole, as part of the midsole, or as the midsole. According to any one of the aforementioned embodiments, the structural reinforcement is impregnated substantially throughout with a thermosettable B-stage or fully cured resin as described previously so as to interlock the strands at their crossover points and to retain the gridwork in a semi-rigid configuration.

Alternatively, the structural reinforcement may be formed from a grid material. The grid material may be formed of a composite fabric, impregnated with a thermoset resin, and formed to include apertures. The grid material may then be corrugated according to one embodiment and mated with another corrugated grid material to form a double corrugated reinforcement. For the sake of discussion, use of the term "gridwork" encompasses woven and non-woven materials such as a grid material.

According to one preferred embodiment, the gridwork, be it flat, corrugated or double corrugated, may be positioned within the resilient midsole by an injection molding operation which also typically forms the midsole or a relatively resilient composite sheet from which midsoles can be formed. Alternatively, the gridwork may be joined with pre-formed resilient material. With respect to one embodiment of the present invention, the structural reinforcement in the form of a flat gridwork is positioned between layers of pre-formed resilient material or between a layer of pre-formed resilient material and a rubber layer. With respect to another embodiment of the present invention, the structural reinforcement in the form of a corrugated gridwork is positioned adjacent a layer of pre-formed resilient material on one side with discrete members of the pre-formed resilient material positioned beneath the convex portions of the gridwork. A rubber layer may also be used according to this embodiment. According to another embodiment of the present invention, the structural reinforcement member in the form of

a double corrugated gridwork may be positioned between pre-formed resilient material layers with pre-formed resilient material preferably being positioned within the cavities defined by the double corrugated configuration. Alternatively, a rubber layer may be used adjacent one surface of the gridwork. According to a further embodiment, the
5 gridwork constitutes the midsole, i.e., compressible material may be eliminated.

The rigidity, resilience, and/or weight of the gridwork may be altered by changing the filament utilized, changing the number of filaments per strand, altering the number of strands per square meter, modifying the grid pattern such as by widening or making more narrow the openings of the open mesh structure, or utilizing different resins. Moreover,
10 the rigidity need not be uniform throughout the gridwork. The stability and spring-like characteristics offered by the structural reinforcement may be varied also by utilizing different resins, or changing the amplitude and/or period of the wave shape of the corrugated reinforcement. These variables are advantageous in the design of structural reinforcements for different end uses or for different end users.

15 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective, partially broken away, view of a shoe embodying one embodiment of the present invention;

Figure 2 is a perspective view of a structural reinforcement according to one embodiment of the present invention;

20 Figure 3 is a perspective view of a structural reinforcement according to another embodiment of the present invention;

Figure 4 is a perspective view of a structural reinforcement according to another embodiment of the present invention;

25 Figure 5 is a cross-sectional view of a midsole embodying the structural reinforcement of Figure 4 according to one embodiment of the present invention;

Figure 6 is a cross-sectional view of a midsole according to an alternative embodiment embodying the same structural reinforcement;

Figure 7 is a cross-sectional view of a midsole according to another embodiment with the same structural reinforcement;

Figure 8 is a cross-sectional view of a midsole embodying the structural reinforcement of Figure 3 according to an embodiment of the present embodiment;

Figure 9 is a cross-sectional view of a midsole according to an alternative embodiment embodying the same structural reinforcement;

5 Figure 10 is a cross-sectional view of a midsole according to an alternative embodiment with the same structural reinforcement;

Figure 11 is a cross-sectional view of a midsole embodying the structural reinforcement of Figure 2 according to an embodiment of the present invention;

10 Figure 12 is a cross-sectional view of a midsole according to an alternative embodiment embodying the same structural reinforcement;

Figure 13 is a cross-sectional view of a midsole according to another embodiment with the same structural reinforcement;

Figure 14 is a perspective, partially broken away, view of a shoe embodying an embodiment of the present invention; and

15 Figure 15 is a perspective view of a structural reinforcement according to another embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The present invention will now be described in detail hereinafter by reference to the accompanying drawings. The invention is not intended to be limited to the
20 embodiments described; rather, this detailed description is included to enable any person skilled in the art to make and use the invention.

In Figure 2, a structural reinforcement member **10** for reinforcing a product is shown which embodies the present invention, and which comprises a gridwork **12** comprising a set of warp strands **14** and a set of weft strands **16** disposed at substantially
25 right angles to each other. Each of the strands comprises a plurality of continuous filaments, composed for example of glass, carbon, aramid, or nylon, with glass filaments being the most preferred. An E-type glass is particularly suitable. Any fabric, woven or non-woven could be employed to form the gridwork **12**. For example, a non-woven fabric forms the open grid as described in more detail below.

The set of warp strands **14** is separated into groups each containing two contiguous strands in the illustrated embodiment. The set of weft strands **16** is separated into groups, each containing four contiguous strands in the illustrated embodiment. The groups of strands of each set are spaced apart from each other so as to define an open structure. Also, it will be noted that in the illustrated embodiment, one strand of each group of the warp strands lies on one side of the set of weft strands, and the other strand of each group of the warp strands lies on the other side of the weft strands. Thus, the sets of strands are non-interlaced. Also, the resulting superimposition of the warp strands achieves a "pinching or encapsulation" effect of the strands in the weft direction creating a mechanical and chemical bond at the crossover points.

The gridwork **12** is impregnated substantially throughout with a thermosettable B-stage or fully cured resin so as to interlock the strands at their crossover points and maintain the gridwork in a semi-flexible or rigid state. In the semi-flexible state, the gridwork conforms to the shape of the product to be reinforced. The gridwork **12** is designed to be incorporated into a finished product. The material may either be conformed to the shape or the functionality of the midsole **26** and then cured to form a structural composite or it may be fully cured and then positioned within or as part of the midsole **26** or used without compressible material to form the midsole **26**. If the material is cured to the B-stage, the process for forming the midsole **26** may be employed to bring the material to the fully cured state. For example, the injection molding process may provide final curing of the material.

The crossover of the strands can form openings of various shapes including square or rectangular which can range from less than an inch up to several, e.g., 2 to 6 inches in grids such as that shown in Figure 2. The size of the glass fiber bundles in each strand can vary. A range of glass strands with a yield from 1800 yards per pound up to 56 yards per pound can be used. One preferred embodiment is having each group of warp strands composed of two 247 yards per pound superimposed strands, and each group of weft strands composed of four side by side or overlapping strands of 433 yards per pound.

The rigidity of the structural reinforcement member **10** may be modified or enhanced by the type of glass fiber utilized and by the density of the fibers within the gridwork **12**. The degree of rigidity may also be altered by altering the grid pattern. The size of the openings between adjacent weft and/or warp strands may be altered. For instance, the larger the openings, the less rigid the gridwork **12** and vice versa. It is not necessary for the gridwork **12** to have uniform characteristics. It may be desirable, e.g., to alter the degree of rigidity of a portion of the gridwork **12** by modifying the fiber selected, the density of fibers in a portion of the gridwork **12**, or the grid pattern in a desired portion of the gridwork **12**. As such, a non-uniform grid is provided and may be employed, for example, to combat over-supination or pronation.

The gridwork **12** may be constructed using a conventional machine, such as the web production machine disclosed in U.S. Patent No. 4,242,779 to Curinier et al., the disclosure of which is expressly incorporated by reference herein.

The flat gridwork **12** may be impregnated substantially throughout with a thermosettable B-stage resin so as to interlock the strands at their crossover points and maintain the gridwork **12** in a semi-flexible state. A B-stage resin is a thermosetting type resin which has been thermally reactive beyond the A-stage so that the product has only partial solubility in common solvents and is not fully fusible even at 150C – 180C. Suitable resins include epoxy, phenolic, melamine, vinyl ester, cross linkable PVC, and isophthalic polyester. A common characteristic of all of these resins is that they are of the thermoset family, in that they will cross link into a rigid composite, which when fully cured cannot be resoftened and remolded. They also have the capability to be "B-staged", in which they are not fully cured and can be softened and reshaped either to conform to the shape of the end use product or corrugated into a three dimensional shape as described below. The preferred embodiment will use a urethane epoxy resin applied to the flat open mesh scrim by means of a water emulsion. Advantageously, the resin can be selected or modified to achieve improved chemical bonding or adherence of the gridwork to or within the resilient foam, rubber layer, or the like. Also, the resin may be selected, modified, or enhanced to vary the stiffness characteristics of the resin to enhance the

stiffness and spring characteristics of the structural reinforcement **10**. For instance, the degree of rigidity of thermosetting resin may be varied to accommodate variations in users' weight, e.g., men and women, adults and children.

A preferred method of producing the gridwork **12** is set forth in U.S. Patent No. 5,836,715, entitled *Structural Reinforcement Member and Method of Utilizing the Same to Reinforce a Product*, the disclosure of which is expressly incorporated herein by reference. Once cured, the gridwork **12** is relatively rigid. Such a rigid gridwork **12** would be structurally composed of the same strand configurations and compositions as the flat gridwork impregnated with a B-stage resin, except that the B-stage resin has been advanced to a fully cured C-stage. The resulting rigid state of the gridwork **12** provides added reinforcement to the product.

The structural reinforcement **10** according to the present invention may be alternatively configured and the three embodiments discussed herein for illustrative purposes include a flat gridwork **12** as represented in Figure 2, a corrugated, three-dimensional gridwork **18** as represented in Figure 3, and a double corrugated, three-dimensional gridwork **20** as represented in Figure 4. According to each embodiment, the gridwork is similarly formed but the three-dimensional embodiments are further processed as described below. In each instance, the structural reinforcement **10** is positioned either within the midsole **26** of a shoe **22**, such as an athletic shoe, as represented in Figure 1 or as the midsole without compressible material as represented in Figure 14.

The athletic shoe **22** illustrated in Figure 1 includes a patterned, ground engaging, tread layer forming the outsole **24**, a midsole **26** consisting of highly resilient porous material, and an innersole **28**. The midsole **26** may be formed of a soft elastic and compressible material such as foamed polyurethane or the like. Preferably, the midsole **26** is formed of ethylene-vinyl acetate (EVA). The structural reinforcement member **10** may also be used as the midsole of the shoe as illustrated in Figure 14. That is, it may be used within a shoe with a reduced amount of or without any soft elastic and compressible material. This thereby decreases shoe weight, sole thickness, and material costs while

increasing shoe performance and durability. As illustrated in Figure 14, the gridwork **12** is positioned between the innersole **28** and the outsole **24**.

Figures 5-7 illustrate a midsole **26** including a structural reinforcement **10** according to one embodiment of the present invention wherein the gridwork **20** is double corrugated. One each of a pair of gridwork **12** elements is formed as set forth above and then each are further processed. The further processing preferably includes placing each of the flat gridwork elements **12** between two matingly configured, corrugated plates with pressure applied in the presence of heat to soften the gridwork **12**.

The corrugated plates are closed to form a single shaped gridwork. As illustrated in Figure 3, a sinusoidal shaped gridwork is formed. It is to be understood, however, that the gridwork **12** may be configured into any corrugated, three-dimensional configuration. For the sake of illustration and discussion, a sinusoidal configuration is illustrated and described. The corrugated gridwork is removed. More specifically, the set of warp strands **14** is formed into alternating portions, such as high (concave) **30** and low (convex) **32** portions, so as to define a sinusoidal or sinusoidal-like configuration. It is to be appreciated, as used herein, "corrugated" refers to any three-dimensional configuration including non-uniform or non-symmetrical configurations or even configurations having sharper angles than a sinusoidal, smoothly contoured configuration. Each gridwork element is positioned one above the other, in a face-to-face relationship preferably so that the crossover points of each grid are adjacent one another. An adhesive, such as a polyurethane adhesive, applied where the high and low portions of the upper and lower corrugated gridwork contact (shown at **36**), can be used to fixedly secure the pair together. The resiliency of the springs of the double corrugated gridwork **20** is maximized when the two individual corrugated grids are secured with the adhesive wherein the gridwork becomes a single structure. The adhesive or other material or structure used to bond the contact points **36** of the pair of gridwork **20** provides effective load transfer and consequently better spring action. The resulting structural reinforcement member **10** is substantially three dimensionally corrugated so as to define cavities **38** between a high **32** portion of one gridwork element and a low portion **30** of the other gridwork **12**.

The dimensions of the double-corrugated gridwork **20** may vary uniformly or non-uniformly throughout the grid. The grid height, that is the distance between the high point of an individual grid of the upper grid and the low point of the adjacent corrugation of the lower grid, may be any desired height, such as, between 1/4 inches and 1-1/2 inches, e.g., about 0.6 to 0.7 inches. For example, the grid height may be greater in the heel portion of the gridwork than the ball of the foot portion in the instance wherein the gridwork **20** extends the length of the shoe.

When the springs are compressed, elongation is permitted in only one direction, namely along the length of the user's foot, that is, in the longitudinal direction.

Elongation in the lateral direction, that is, transverse to the length of the foot, is precluded thereby providing stability to the midsole **26**. The reinforcement provided by the non-corrugated strands minimizes a less than ideal foot strike such as over-supination and over-pronation due, at least in part, to the inherent strength of the filaments of the structural reinforcement **10**. Moreover, the resilient reinforcing member can add to the longevity of the midsole **26** and hence the useful life of the shoe **22**, when positioned adjacent to resilient foam material **40** such as EVA. This is because the EVA **40**, under normal use, experiences creep due to repetitive compression thereof during use of the shoe **22**. The structural reinforcement **10** according the present invention encourages the midsole **26** to assume its original configuration thereby counteracting at least some of the effects associated with creep.

The structural reinforcement member **20** possesses advantageous energy return characteristics. The elongation properties of the gridwork enhance the users performance. For example, upon initial foot impact, that is, contact of the heel to the stepping surface, the effected springs are deflected under the weight of the foot resulting in elongation of the individual springs. The gridwork **20** reverts to its relaxed, or unelongated, condition. As such, it retracts, thereby propelling the user's foot in the forward direction. The energy return forces of the individual springs may be deemed substantially perpendicular, but the energy return forces of the gridwork **20**, in use, are generally directed in a direction similar to the foot movement, i.e., in a more forward direction. While not being

bound to a particular theory, this benefit is believed to result from a combination of the substantially perpendicular spring deflection and the elongation characteristics of the reinforcement member **10**. One of the three illustrated embodiments of forming the midsole **26** with the structural reinforcement **10** as described is represented in Figure 5.

5 According to this embodiment of the present invention, the structural reinforcement **10** is encapsulated within resilient foam material **40** such as by an injection molding process. Accordingly, foam material **40** surrounds the upper **42** and lower **44** surfaces of the three-dimensional gridwork **20**. Foam material **40** also substantially fills the cavities **38** defined by the structural reinforcement **10**. This thereby prevents the springs of the
10 structural reinforcement **10** from compressing to the extent that would cause the convex **32** portion of one gridwork **20** to contact the respective concave portion **30** of the adjacent gridwork **20** (assuming a sinusoidal, corrugated configuration) and prevent damaging deformation of the structural reinforcement **10**.

An alternative arrangement of forming the midsole **26** includes providing pre-
15 formed layers **46** of foam material **40** which are positioned on opposing upper **42** and lower **44** surfaces of the three-dimensional structural reinforcement **10** as represented in Figure 6. The pre-formed foam material layers **46** may include a surface for mating with the structural reinforcement, for example, each may include a surface having a correspondingly configured sinusoidal shape. Pre-formed foam material portions **50** may
20 also be positioned within the cavities **38** defined by the three-dimensional structural reinforcement **10** to prevent potentially damaging deformation of the individual springs.

Another alternative midsole is illustrated in Figure 7. This embodiment includes a pre-formed upper foam layer **46** for mating with the upper surface of the structural reinforcement **10** and a rubber, i.e., natural or synthetic rubber or rubber-like elastomeric,
25 layer **54** on the lower surface **44**. The rubber layer **54** may be a discrete layer or may be applied to the structural reinforcement's lower surface as a coating by any known method.

Figures 8-10 illustrate another embodiment of the present invention. According to this embodiment, a single, corrugated, three-dimensional gridwork **18** constitutes the

structural reinforcement **10**. The gridwork **18** according to this embodiment is substantially the same as one of the pair of gridwork **20** of the structural member illustrated in Figure 4. The shaped warp strands define high **30** and low **32** portions (concave and convex, as illustrated). The high **30** portions define leaf springs providing the aforementioned benefits.

The cavities **38** of the reinforcement member **10** provide a spring for the midsole **26** akin to a leaf-type spring. The springs thereby absorb the impact of the user's stride, i.e., when the user's heel or ball of foot strike the ground, and release the stored energy in the substantially vertical or "Z" direction to the user's benefit. This may result in an increased stride length, quicker stride as the foot is urged forward upon the heel striking the ground, and reduction in impact experienced by the user's joints such as the feet, ankles, and/or knees. The energy return characteristics of the springs provided by the individual corrugations, combined with the rigidity and elongation properties of the gridwork **18**, results in energy return forces directed in a substantially vertical direction and in a forward direction (albeit to a lesser extent than the double corrugated gridwork **20** described above). The dimensions of the gridwork **18** may vary uniformly or non-uniformly throughout the grid. The height, that is, the vertical distance between the upper surface of a high portion and the lower surface of an adjacent low portion, may vary. For example, the gridwork **18** may have a greater grid height in the heel portion relative to the ball of the foot area. The height may, for example, be between 1/4 inches and 1-1/2 inches, such as 0.6 to 0.7 inches.

Like the previous embodiment, the structural reinforcement **10** may be formed with the shoe sole **26** according to the various embodiments. First, the foam material **40** may encapsulate the corrugated, three-dimensional gridwork **18** as represented in Figure 8. Second, a pre-formed foam layer **46** may be positioned adjacent the upper surface **42** of the gridwork **18** as represented in Figure 9. Pre-formed foam portions **50** may also be positioned beneath convex portions **32** of the corrugated gridwork **18** to at least slightly limit the compression of the springs of the structural reinforcement **10**. Third, a pre-formed foam layer **46** may be positioned adjacent the upper surface **42** of the gridwork

18, pre-formed foam portions **50** may be positioned within the cavities **38** defined by the convex portions **32** of the gridwork **12**, and a rubber layer **54** may coat or be positioned adjacent to the lower surface **44** of the gridwork **18**. Fourth, the single corrugated gridwork **18** may be positioned between the outsole **24** and innersole **28** without
5 compressible material or at least with a reduced amount of compressible material.

The structural reinforcement **10** illustrated in Figure 2, described above, according to another embodiment of the present invention also benefits midsole **26** construction. Although the gridwork **12** according to this embodiment is substantially flat, a “spring” nonetheless results, although differently than the other embodiments. A “spring” effect
10 results due to the inherent resiliency of the gridwork **12** when it is bent, that is, subjected to forces in the longitudinal direction. For example, when a user’s heel strikes the ground, the sole of the foot, and hence the shoe **22**, bends in the longitudinal direction. The structural reinforcement **10** urges the foot forward to counteract the bending forces caused by the foot flexing. Additionally, the structural reinforcement **10** provides
15 stability to the midsole **26** because elongation in the lateral direction is precluded.

The gridwork **12** may be formed with the midsole **26** according to one embodiment of the present invention by a variety of manners, three of which are illustrated. First, the structural reinforcement **10** member may be encapsulated with the foam material **40** as represented in Figure 11 by, e.g., an injection molding process.
20 Second, pre-formed foam layers **46** may be positioned on opposing sides of the structural reinforcement **10** as represented in Figure 12. Third, a pre-formed foam layer **46** may be positioned adjacent the upper side **42** of the gridwork **12** and a rubber material **54** may be coated or positioned on or adjacent to the lower surface **44** of the gridwork **12** as illustrated in Figure 13. Fourth, the gridwork **12** may be positioned between the outsole
25 **24** and innersole **28** without compressible material, or at least with a reduced amount of compressible material.

The structural reinforcement members **10** according to the various embodiments, as illustrated in Figs. 2, 3, and 4, may alternatively be provided above the midsole **26** as a shoe insert (not shown).

The structural reinforcement **10** according to each embodiment is lightweight and does not significantly contribute to the weight of the shoe sole. The number of filaments utilized for each strand and the size of the openings of the gridwork may be altered for specific end uses and such modifications would inherently effect the weight of the structural reinforcement **10**. One exemplary structural reinforcement **10** having a width of 5 in. and a length of 16.5 in. has a weight of about 42 grams for a three-dimensional, honeycomb-shaped structural reinforcement. The structural reinforcement **10** of similar size having a sinusoidal three-dimensional configuration has a weight of about 20 grams and a flat structural reinforcement of like size has a weight of about 17.8 grams.

With respect to the corrugated gridwork embodiments, Figures 3-10, the pitch and amplitude of the corrugated configuration may be varied to selectively alter the rigidity, spring characteristics, and weight of the gridwork, either uniformly throughout the gridwork **18,20** or at discrete locations, e.g., the heel portion thereof. Grid height can be varied to accommodate restrictions of end products. With respect to all embodiments, grids of varying width can also be provided, for example, the gridwork need not extend the entire width of the shoe sole. Additionally, the gridwork **12,18,20** may be positioned in discrete locations within the midsole **26** and may not extend the entire length of the shoe sole.

Alternatively, a grid material **56** may form the gridwork **12,18,20**. The grid material **56**, illustrated in Figure 15, may be formed of a composite fabric such as one with continuous glass fibers in both the warp and weft directions. The grid material **56** is impregnated with a thermoset resin and either fully cured or cured to the B-stage as described above. The grid material is processed to include apertures to permit the resilient material, according to one aspect of the invention, to be applied therethrough and around. A substantially flat grid material **56** is illustrated in Figure 15, but it is to be apparent that the grid material may be corrugated and either a single layer of the material or a double corrugated grid material may be formed in the midsole similar to the corrugated embodiments described above and as illustrated in Figures 3 and 4. The grid material **56**, corrugated or not, may also constitute the midsole, thereby eliminating the need for

resilient foam material **26**. For instance, the apertures may be die punched, formed with water jets or otherwise cut. The apertures may be variously configured throughout the material **56** or, as illustrated, uniformly configured. The apertures may have various geometric shapes, e.g., oval, circular, rectangular, etc.

5 According to one embodiment of the present invention, the grid, with a thermosettable B-stage resin as described previously, permits the gridwork to be semi-flexible and conform to the shape of the product to be reinforced. Once the gridwork is conformed to the shape of the product to be reinforced, the B-stage resin would be cured providing added rigidity and enhanced properties to the resulting product. Thus, the
10 gridwork can be conformed to the shape of the product desired to be reinforced and cured *in situ* using either the heat available in the normal manufacturing process, such as midsole formation, or by heating from an external heat source. The structural reinforcement **10**, preferably, is cured to a rigid state prior to incorporation into the midsole.

15 In the drawings and the specification, there has been set forth preferred embodiments of the invention and, although specific terms are employed, the terms are used in a generic and descriptive sense only and not for the purpose of limitation, the scope of the invention being set forth in the following claims.

WHAT IS CLAIMED IS:

- 5 1. A structural reinforcement comprising:
 a corrugated structural reinforcement in the form of an open gridwork defined by
 strands extending in a first direction and strands extending in a second direction
 transverse to said first direction and being impregnated substantially throughout with a
 thermosettable B-stage or fully cured thermoset resin;
- 10 said strands extending in the first direction being corrugated so as to define
 alternating high and low portions extending across said gridwork;
 said strands extending in said second direction being substantially straight so as to
 prevent elongation of said gridwork in said second direction;
 said gridwork being resilient in a substantially vertical direction and comprising at
- 15 least one continuous filament selected from the group consisting of glass, carbon, and
 aramid; and
 said corrugated structural reinforcement having a grid height, defined by a vertical
 distance between an upper surface of a high portion of said gridwork and a lower surface
 of an adjacent low portion of said gridwork, less than 0.5 inches.
- 20 2. A structural reinforcement according to Claim 1 wherein said gridwork
 comprises a set of warp strands and a set of weft strands disposed transversely with
 respect to the warp strands.
- 25 3. A structural reinforcement according to Claim 2 wherein said gridwork is
 formed of a composite fabric.
4. A structural reinforcement according to Claim 1 wherein said gridwork
 has a grid height which is non-uniform.

5. A structural reinforcement according to Claim 1 wherein said elongation occurs in a substantially longitudinal direction.

5 6. A structural reinforcement according to Claim 2 wherein at least some of the strands of each set are spaced apart so as to define an open structure, and wherein the set of warp strands is separated into groups each containing a plurality of contiguous strands.

10 7. A structural reinforcement according to Claim 6 wherein at least one strand of each group lies on one side of the set of weft strands and at least one other strand of each group lies on the other side of the set of weft strands.

15 8. A structural reinforcement according to Claim 2 wherein the sets of strands are non-interlaced.

 9. A structural reinforcement according to Claim 1 wherein said thermosettable resin is epoxy resin.

20 10. A structural reinforcement according to Claim 1 wherein said resin is a thermosettable B-stage resin selected from the group consisting of epoxy, phenolic, melamine, vinyl ester, cross linkable PVC, and isophthalic polyester so as to maintain the gridwork in a semi-flexible state.

25 11. A structural reinforcement according to Claim 2 wherein each of the strands comprises a plurality of continuous glass filaments.

 12. A structural reinforcement according to Claim 1 wherein said resin is a fully cured thermoset resin selected from the group consisting of epoxy, phenolic, melamine,

vinyl ester, cross linkable PVC, and isophthalic polyester so as to maintain the gridwork in a relatively rigid state.

13. A structural reinforcement according to Claim 1 wherein said corrugated
5 structural reinforcement is sinusoidal.

14. A structural reinforcement according to Claim 1 wherein said corrugated structural reinforcement is double corrugated.

10 15. A structural reinforcement comprising:
a sinusoidal structural reinforcement in the form of an open gridwork defined by strands extending in a first direction and strands extending in a second direction transverse to said first direction and being impregnated substantially throughout with a thermosettable B-stage or fully cured thermoset resin;

15 said strands extending in the first direction being sinusoidal so as to define alternating concave and convex portions of said structural reinforcement;
said strands extending in said second direction being substantially straight so that elongation of said gridwork is substantially prevented in said second direction; and
said gridwork being resilient in a substantially vertical direction and comprising at
20 least one continuous filament selected from the group consisting of glass, carbon, and aramid.

16. A structural reinforcement according to Claim 15 wherein said gridwork comprises a set of warp strands and a set of weft strands disposed transversely with
25 respect to the warp strands.

17. A structural reinforcement according to Claim 15 wherein said gridwork is formed of a composite fabric.

18. A structural reinforcement according to Claim 15 wherein said gridwork has a grid height, defined as a vertical distance between an upper surface of a convex portion of said gridwork and an adjacent lower surface of a concave portion of said gridwork, of less than 1.5 inches.

5

19. A structural reinforcement according to Claim 18 wherein said grid height is less than 0.7 inches.

20. A structural reinforcement according to Claim 15 wherein said gridwork has a grid height, defined as a vertical distance between an upper surface of a convex portion of said gridwork and an adjacent lower surface of a concave portion of said gridwork, which is non-uniform.

21. A structural reinforcement according to Claim 15 wherein said gridwork is double corrugated.

22. A structural reinforcement according to Claim 15 wherein said elongation occurs in the substantially longitudinal direction.

23. A structural reinforcement according to Claim 16 wherein at least some of the strands of each set are spaced apart so as to define an open structure, and wherein the set of warp strands is separated into groups each containing a plurality of contiguous strands.

24. A structural reinforcement according to Claim 23 wherein at least one strand of each group lies on one side of the set of weft strands and at least one other strand of each group lies on the other side of the set of weft strands.

25. A structural reinforcement according to Claim 15 wherein said thermosettable resin is epoxy resin.

26. A structural reinforcement according to Claim 15 wherein said resin is a thermosettable B-stage resin selected from the group consisting of epoxy, phenolic, melamine, vinyl ester, cross linkable PVC, and isophthalic polyester so as to maintain the gridwork in a semi-flexible state.

27. A structural reinforcement according to Claim 16 wherein the sets of strands are non-interlaced.

28. A structural reinforcement according to Claim 16 wherein each of the strands comprises a plurality of continuous glass filaments.

29. A structural reinforcement according to Claim 15 wherein said resin is a fully cured thermoset resin selected from the group consisting of epoxy, phenolic, melamine, vinyl ester, cross linkable PVC, and isophthalic polyester so as to maintain the gridwork in a relatively rigid state.

30. A structural reinforcement comprising:

a double corrugated structural reinforcement in the form of an open gridwork comprising a pair of gridwork elements, each defined by strands extending in a first direction and strands extending in a second direction transverse to said first direction and being impregnated substantially throughout with a thermosettable B-stage or fully cured thermoset resin;

said strands in said first direction being corrugated to define high and low portions, and said strands in said second direction being substantially straight;

said pair of gridwork elements being fixedly connected in a face-to-face relationship;

said first and second strands of said gridwork elements being oriented in like directions, respectively, and at least a portion of said high portions of one gridwork

element being positioned substantially adjacent a lower surface of a portion of said low portions of the other gridwork element so as to define a cavity between said gridwork elements;

5 elongation of said reinforcement being substantially prevented in said second direction by said second strands; and

said structural gridwork comprising at least one continuous filament selected from the group consisting of glass, carbon, and aramid.

10 31. A structural reinforcement according to Claim 30 wherein each of said pair of gridwork comprises a set of warp strands and a set of weft strands disposed transversely with respect to the warp strands.

15 32. A structural reinforcement according to Claim 30 wherein each of said pair of gridwork is formed of a composite fabric.

33. A structural reinforcement according to Claim 30 wherein said structural reinforcement has a grid height, defined as a vertical distance between an upper surface of a high portion of one gridwork and a lower surface of an adjacent low portion of the other gridwork, of less than 1.5 inches.

20 34. A structural reinforcement according to Claim 33 wherein said grid height is less than 0.7.

25 35. A structural reinforcement according to Claim 30 wherein said structural reinforcement has a grid height, defined as a vertical distance between an upper surface of a high portion of one gridwork and a lower surface of an adjacent low portion of the other gridwork, which is non-uniform.

36. A structural reinforcement according to Claim 30 wherein said elongation occurs in the substantially longitudinal direction.

5 37. A structural reinforcement according to Claim 31 wherein at least some of the strands of each set are spaced apart so as to define an open structure, and wherein the set of warp strands is separated into groups each containing a plurality of contiguous strands.

10 38. A structural reinforcement according to Claim 37 wherein at least one strand of each group lies on one side of the set of weft strands and at least one other strand of each group lies on the other side of the set of weft strands.

39. A structural reinforcement according to Claim 30 wherein said thermosettable resin is epoxy resin.

15 40. A structural reinforcement according to Claim 30 wherein said resin is thermosettable B-stage resin selected from the group consisting of epoxy, phenolic, melamine, vinyl ester, cross linkable PVC, and isophthalic polyester so as to maintain the structural reinforcement in a semi-flexible state.

20 41. A structural reinforcement according to Claim 31 wherein the sets of strands are non-interlaced.

42. A structural reinforcement according to Claim 31 wherein each of the strands comprises a plurality of continuous glass filaments.

25 43. A structural reinforcement according to Claim 30 wherein resin is a fully cured thermoset resin selected from the group consisting of epoxy, phenolic, melamine, vinyl ester, cross linkable PVC, and isophthalic polyester so as to interlock the strands at their crossover points and maintain the structural reinforcement in a relatively rigid state.

44. A structural reinforcement according to Claim 30 wherein each gridwork of said double corrugated structural reinforcement is sinusoidal and said cavities are defined by opposing concave and convex portions of each gridwork.

5

45. A shoe sole comprising:

a tread layer;

an inner sole;

10 a structural reinforcement in the form of an open gridwork defined by strands extending in a first direction and strands extending in a second direction transverse to said first direction wherein said strands extending in the first direction are sinusoidal so as to define alternating high and low portions and said strands extending in said second direction are substantially straight so that elongation of said gridwork is substantially prevented in said second direction, said gridwork being resilient in a substantially vertical
15 direction and, said structural reinforcement being positioned between said tread layer and said inner sole, said gridwork comprising at least one continuous filament selected from the group consisting of glass, carbon, and aramid, said gridwork being impregnated substantially throughout with a thermosetting resin.

20 46. A shoe sole according to Claim 45 wherein said gridwork comprises a set of warp strands and a set of weft strands disposed transversely with respect to the warp strands.

25 47. A shoe sole according to Claim 45 wherein said gridwork is formed of a composite fabric.

48. A shoe sole according to Claim 45 comprising a resilient polymer forming at least one resilient polymer cushioning layer.

49. A shoe sole according to Claim 48 wherein said cushioning layer and said gridwork substantially define a midsole of said shoe sole.

50. A shoe sole according to Claim 45 wherein said gridwork is corrugated.

5

51. A shoe sole according to Claim 50 wherein said corrugated gridwork is sinusoidal.

52. A shoe sole according to Claim 51 wherein said gridwork is double
10 corrugated.

53. A shoe sole according to Claim 52 wherein said double corrugated gridwork is sinusoidal.

54. A shoe sole according to Claim 50 wherein said structural reinforcement
15 imparts spring characteristics by releasing stored energy in a direction defined by a combination of a substantially vertical component and a substantially forward component.

55. A shoe sole according to Claim 45 wherein said elongation occurs in the
20 substantially longitudinal direction.

56. A shoe sole according to Claim 46 wherein at least some of the strands of
each set are spaced apart so as to define an open structure, and wherein the set of warp
25 strands is separated into groups each containing a plurality of contiguous strands.

57. A shoe sole according to Claim 56 wherein at least one strand of each
group lies on one side of the set of weft strands and at least one other strand of each
group lies on the other side of the set of weft strands.

58. A shoe sole according to Claim 45 wherein said thermosettable resin is epoxy resin.

5 59. A shoe sole according to Claim 45 wherein said resin is a thermosettable B-stage resin selected from the group consisting of epoxy, phenolic, melamine, vinyl ester, cross linkable PVC, and isophthalic polyester so as to interlock the strands at their crossover points and maintain the gridwork in a semi-flexible state.

10 60. A shoe sole according to Claim 46 wherein the sets of strands are non-interlaced.

61. A shoe sole according to Claim 46 wherein each of the strands comprises a plurality of continuous glass filaments.

15 62. A shoe sole according to Claim 45 wherein said resin is a fully cured thermoset resin selected from the group consisting of epoxy, phenolic, melamine, vinyl ester, cross linkable PVC, and isophthalic polyester so as to interlock the strands at their crossover points and maintain the gridwork in a relatively rigid state.

20 63. A shoe midsole comprising:
a resilient polymer forming at least one resilient polymer cushioning layer;
a structural reinforcement in the form of an open gridwork defined by
strands extending in a first direction and strands extending in a second direction
25 transverse to said first direction and said strands extending in said second direction being substantially straight so that elongation of said gridwork is substantially prevented in said second direction, said gridwork being positioned adjacent said at least one polymer layer to enhance spring characteristics to said polymer layer by releasing stored energy, said open gridwork comprising at least one continuous filament selected from the group

consisting of glass, carbon, and aramid, said gridwork being impregnated substantially throughout with a thermosetting resin.

64. A midsole according to Claim 63 wherein said gridwork comprises a set of warp strands and a set of weft strands disposed transversely with respect to the warp strands.

65. A midsole according to Claim 63 wherein said gridwork is formed of a composite fabric.

66. A midsole according to Claim 63 wherein said elongation occurs in the substantially longitudinal direction.

67. A midsole according to Claim 63 wherein said resilient polymer cushioning layer is foamed polyurethane.

68. A midsole according to Claim 63 wherein said resilient polymer cushioning layer is ethylene-vinyl acetate.

69. A midsole according to Claim 63 wherein said structural reinforcement comprises a substantially linear gridwork.

70. A midsole according to Claim 69 wherein said structural reinforcement is encapsulated within said resilient polymer.

71. A midsole according to Claim 70 wherein said midsole is injection molded and said gridwork defines an open structure with openings substantially filled by said resilient polymer.

72. A midsole according to Claim 69 wherein said resilient polymer forms a pre-formed layer defining said at least one resilient polymer cushioning layer positioned adjacent said structural reinforcement.

5 73. A midsole according to Claim 72 wherein said resilient polymer forms a pair of said pre-formed layers positioned on opposing sides of said structural reinforcement.

10 74. A midsole according to Claim 73 wherein each of said pair of pre-formed layers includes an outer surface configured so as to mate with the adjacent one of said pair of linear gridwork forming said structural reinforcement.

75. A midsole according to Claim 72 wherein said midsole further comprises a rubber layer positioned adjacent an outer surface of structural reinforcement.

15 76. A midsole according to Claim 75 wherein said rubber layer is positioned adjacent a bottom surface of said structural reinforcement and said pre-formed layer is positioned adjacent an upper surface of said structural reinforcement.

20 77. A midsole according to Claim 64 wherein at least some of the strands of each set are spaced apart so as to define an open structure, and wherein the set of warp strands is separated into groups each containing a plurality of contiguous strands.

25 78. A midsole according to Claim 77 wherein at least one strand of each group lies on one side of the set of weft strands and at least one other strand of each group lies on the other side of the set of weft strands.

79. A midsole according to Claim 63 wherein said thermosettable resin is epoxy resin.

80. A midsole according to Claim 63 wherein said resin is a thermosettable B-stage resin selected from the group consisting of epoxy, phenolic, melamine, vinyl ester, cross linkable PVC, and isophthalic polyester so as to interlock the strands at their crossover points and maintain the gridwork in a semi-flexible state.

81. A midsole according to Claim 64 wherein the sets of strands are non-interlaced.

82. A midsole according to Claim 64 wherein each of the strands comprises a plurality of continuous glass filaments.

83. A midsole according to Claim 63 wherein said resin is a fully cured thermoset resin selected from the group consisting of epoxy, phenolic, melamine, vinyl ester, cross linkable PVC, and isophthalic polyester so as to maintain the gridwork in a relatively rigid state.

84. A midsole according to Claim 63 wherein said structural reinforcement comprises a corrugated gridwork.

85. A midsole according to Claim 84 wherein said corrugated gridwork is substantially sinusoidal.

86. A midsole according to Claim 85 wherein said sinusoidal gridwork has a grid height of less than 1.5 inches.

87. A midsole according to Claim 84 wherein said gridwork defines alternating high and low portions so as to define said corrugated gridwork.

88. A midsole according to Claim 87 wherein each set of said gridwork defines alternating concave and convex portions so as to define said sinusoidal gridwork.

5 89. A midsole according to Claim 84 wherein said stored energy is released in a direction defined by a combination of a substantially vertical component and a substantially forward component.

10 90. A midsole according to Claim 85 wherein said structural reinforcement is encapsulated within said resilient polymer.

91. A midsole according to Claim 85 wherein said midsole is injection molded so that each of said concave and convex portions of said gridwork are substantially filled by said resilient polymer.

15 92. A midsole according to Claim 85 wherein said resilient polymer forms a pre-formed layer defining said at least one resilient polymer cushioning layer positioned adjacent said structural reinforcement.

20 93. A midsole according to Claim 92 wherein said pre-formed layer includes an outer surface having a sinusoidal configuration so as to mate with said sinusoidal configuration of said gridwork.

25 94. A midsole according to Claim 92 wherein said resilient polymer forms a pair of said pre-formed layers positioned on opposing sides of said structural reinforcement.

95. A midsole according to Claim 94 wherein each of said pre-formed layers includes an outer surface having a sinusoidal configuration so as to mate with said sinusoidal configuration of said gridwork.

96. A midsole according to Claim 92 further comprising pre-formed foam portions positioned beneath said convex portions of said structural reinforcement.

5 97. A midsole according to Claim 92 wherein said midsole further comprises a rubber layer positioned adjacent an outer surface of structural reinforcement.

98. A midsole according to Claim 97 wherein said rubber layer is positioned adjacent a bottom surface of said structural reinforcement and said pre-formed layer is
10 positioned an upper surface of said structural reinforcement.

99. A midsole according to Claim 64 wherein said structural reinforcement comprises a pair of substantially sinusoidal gridwork which are positioned adjacent one another so as to define a double corrugated structural reinforcement.

15 100. A midsole according to Claim 99 wherein said gridwork defines alternating high and low portions so as to define said corrugated gridwork.

101. A midsole according to Claim 100 wherein each of said gridwork define
20 alternating concave and convex portions so as to define a double-sinusoidal gridwork.

102. A midsole according to Claim 99 wherein said stored energy is released in a direction defined by a combination of a substantially vertical component and a substantially forward component.

25 103. A midsole according to Claim 101 wherein said pair of substantially sinusoidal gridwork are positioned one above another so that crossover points are adjacent on another so as to define cavities between adjacent high and low portions of adjacent gridwork.

104. A midsole according to Claim 103 comprising a polyurethane adhesive to secure said pair of said gridwork.

5 105. A midsole according to Claim 103 wherein said structural reinforcement is encapsulated within said resilient polymer.

106. A midsole according to Claim 105 wherein said midsole is injection molded so that each of said cavities are substantially filled by said resilient polymer.

10

107. A midsole according to Claim 103 wherein said resilient polymer forms a pre-formed layer defining said at least one resilient polymer cushioning layer positioned adjacent said structural reinforcement.

15 108. A midsole according to Claim 107 wherein said resilient polymer forms a pair of said pre-formed layers positioned on opposing sides of said structural reinforcement.



20 109. A midsole according to Claim 107 wherein said pre-formed layer defines a sinusoidal configuration so as to mate with said sinusoidal configuration of one said pair of gridwork.



25 110. A midsole according to Claim 108 wherein each of said pair of pre-formed layers includes an outer surface having a sinusoidal configuration so as to mate with the adjacent one of said pair of sinusoidal gridwork forming said honeycomb-shaped structural reinforcement.

111. A midsole according to Claim 107 further comprising pre-formed foam portions positioned within said cavities of said structural reinforcement.

112. A midsole according to Claim 107 wherein said midsole further comprises a rubber layer positioned adjacent an outer surface of said structural reinforcement.

- 5 113. A midsole according to Claim 112 wherein said rubber layer is positioned adjacent a bottom surface of said structural reinforcement and said pre-formed layer is positioned adjacent an upper surface of said structural reinforcement.

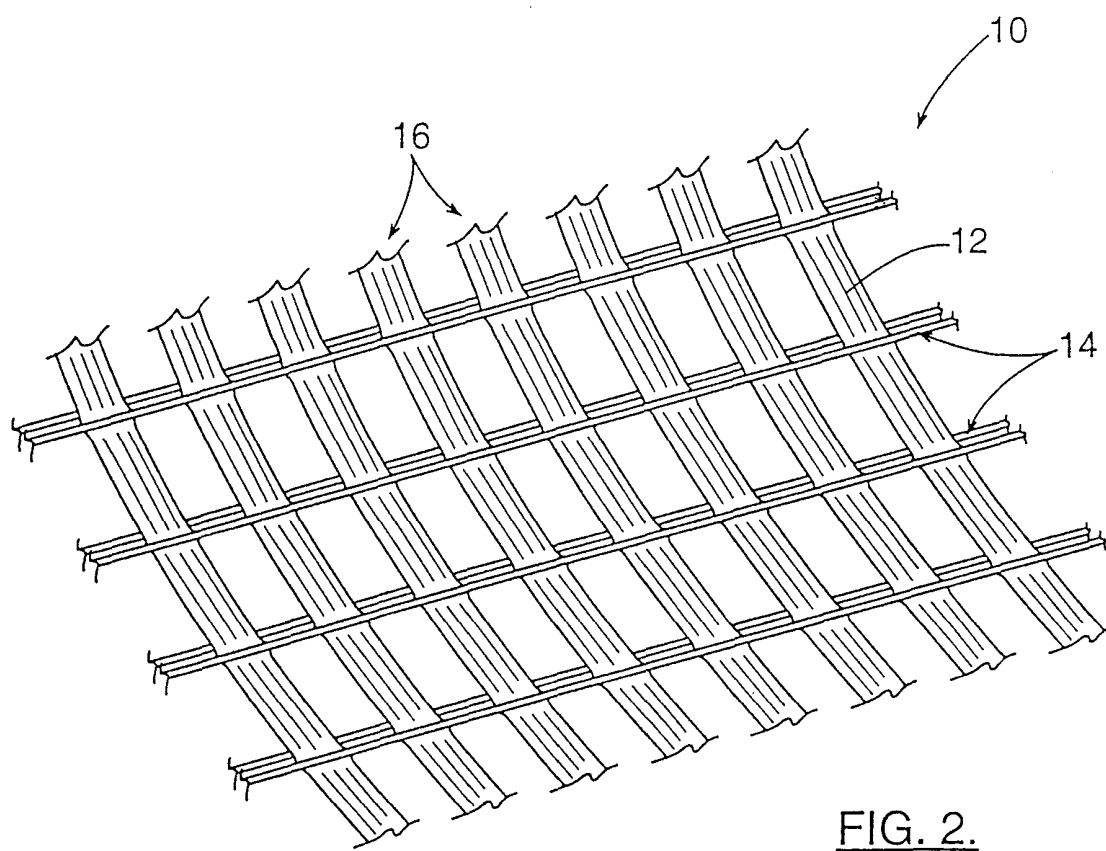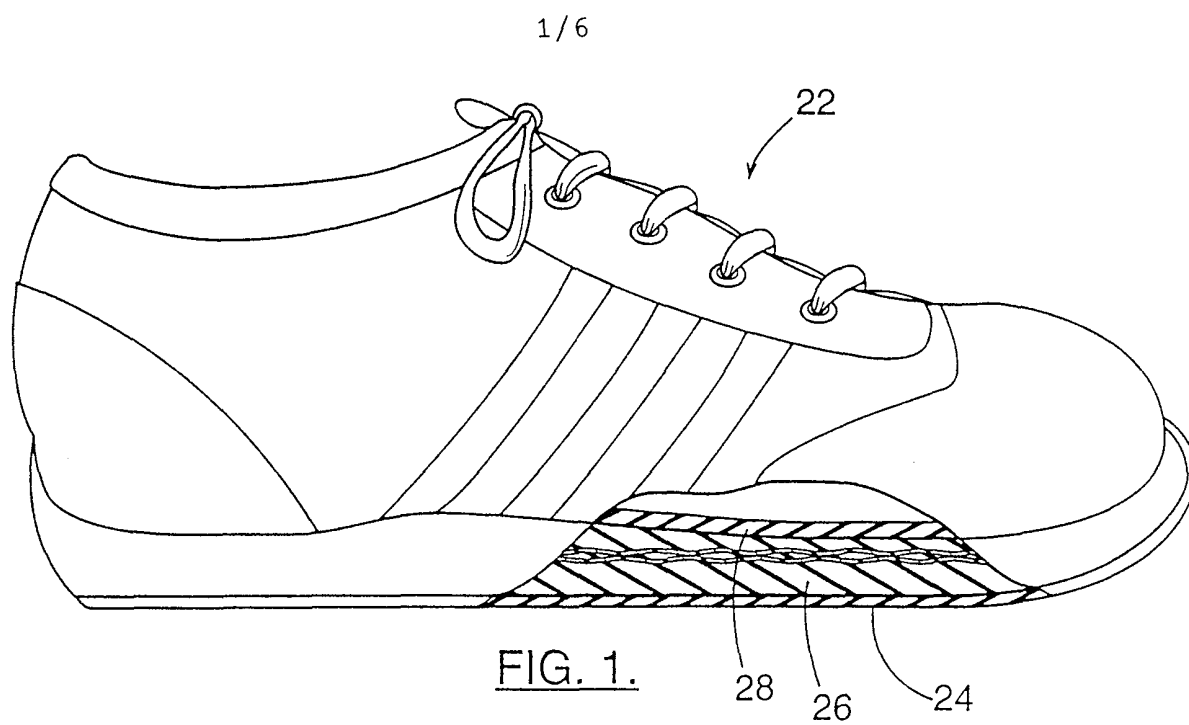

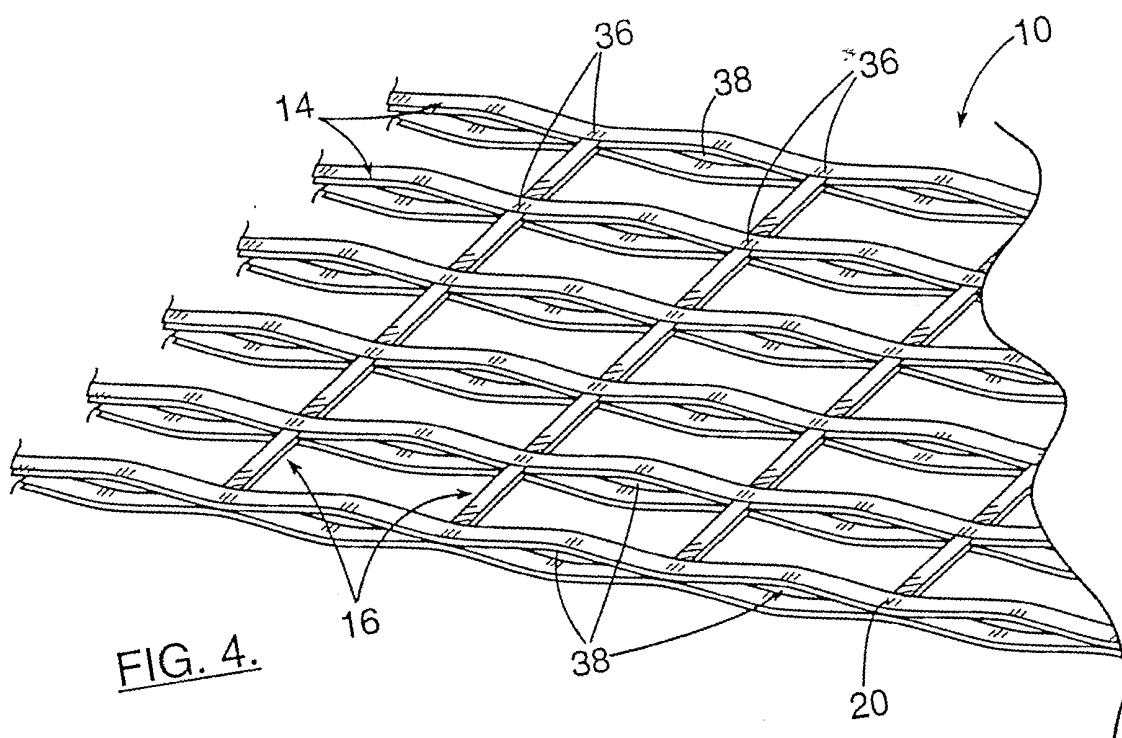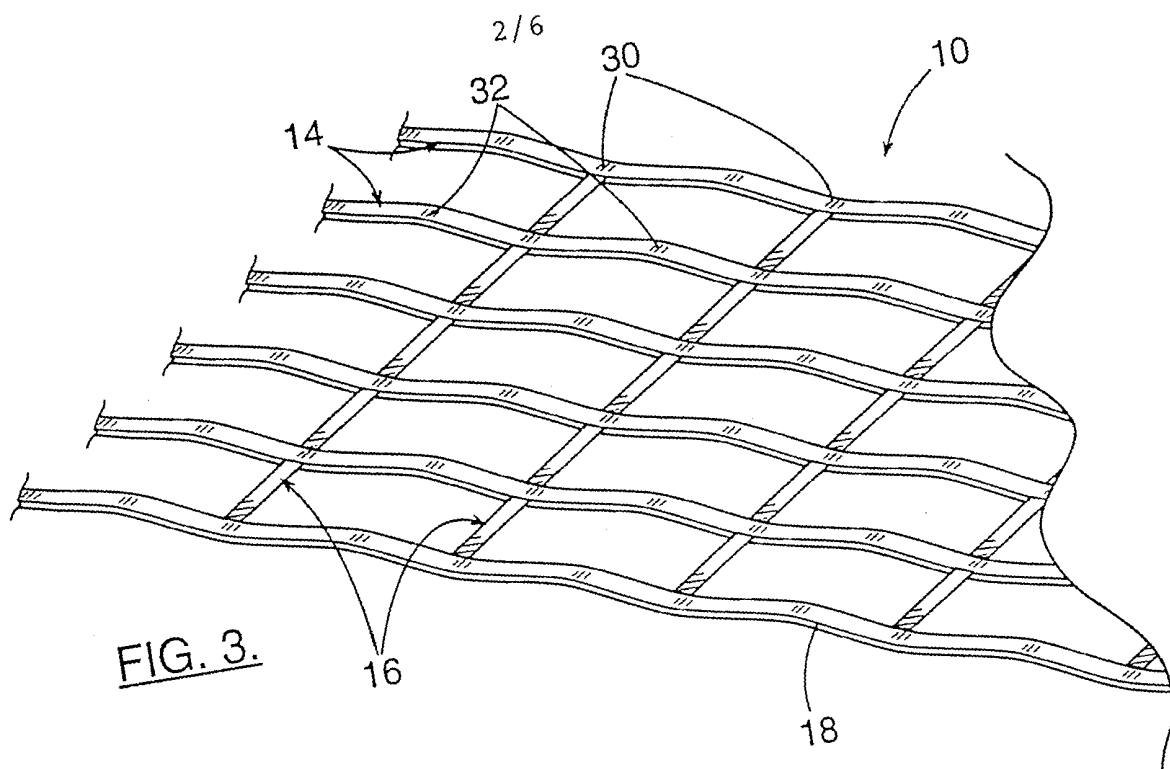

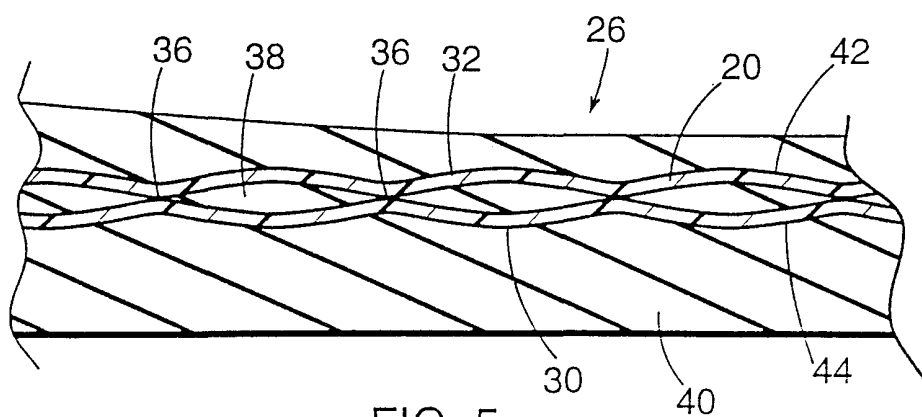


FIG. 5.

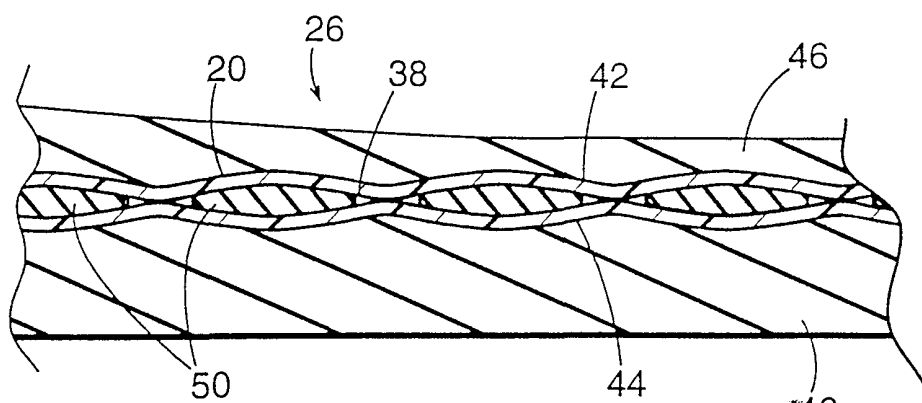


FIG. 6.

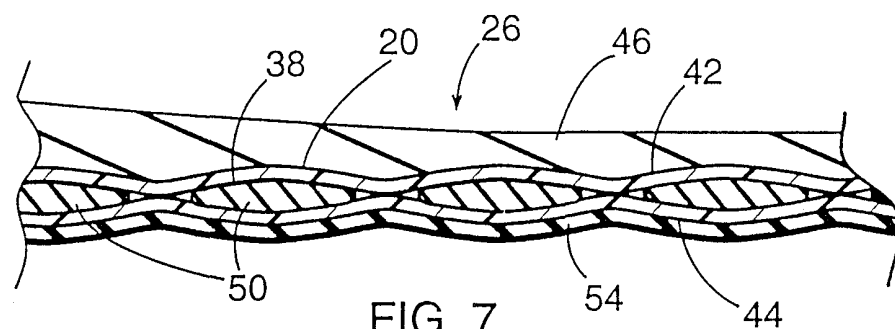


FIG. 7.

4/6

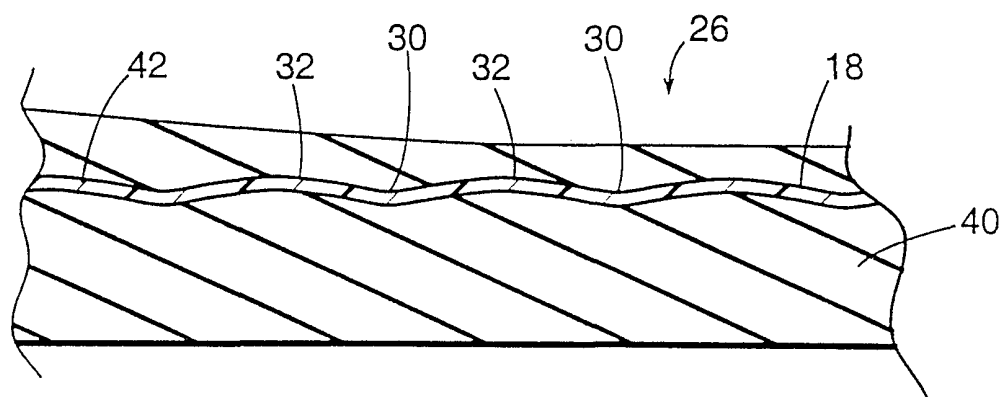


FIG. 8.

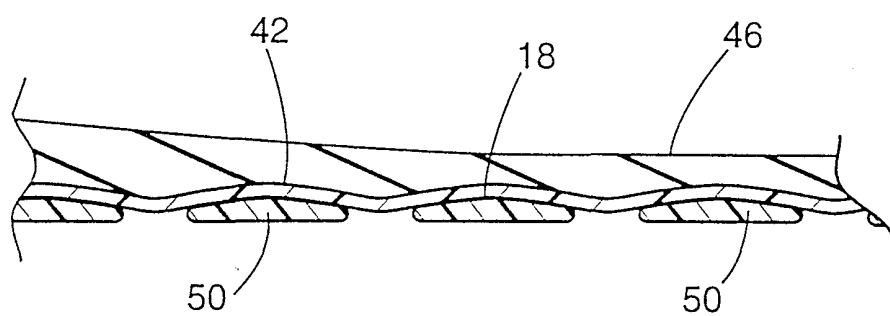


FIG. 9.

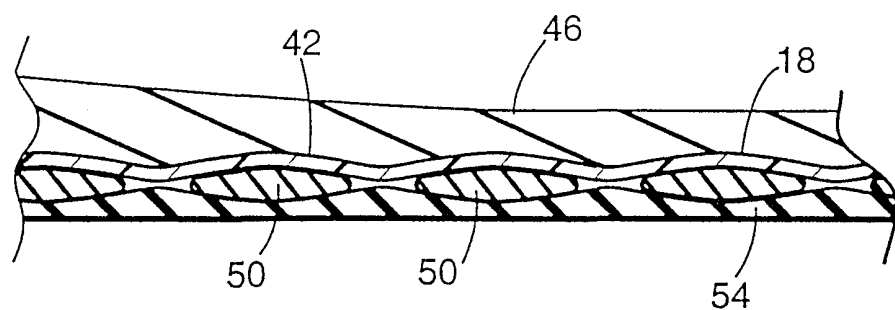


FIG. 10.

5/6

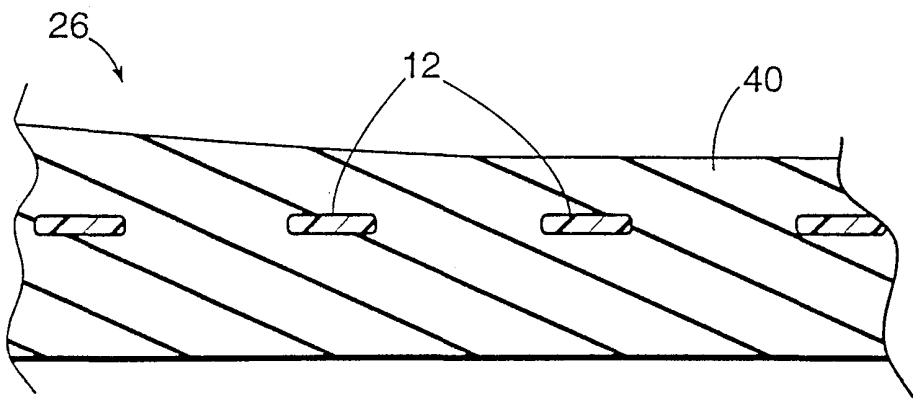


FIG. 11.

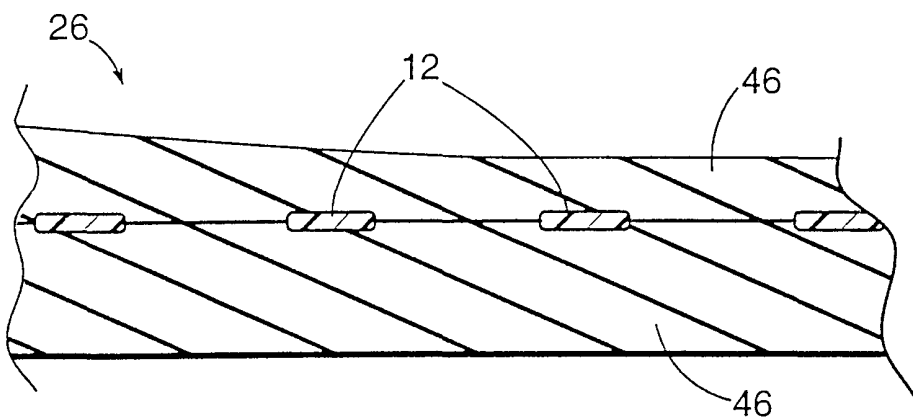


FIG. 12.

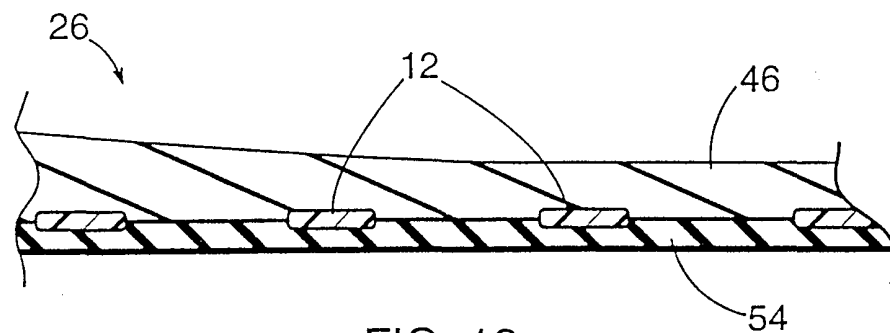


FIG. 13.

6/6

