



(51) International Patent Classification:

H04L 5/00 (2006.01)

(21) International Application Number:

PCT/US2019/019472

(22) International Filing Date:

26 February 2019 (26.02.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/937,943

28 March 2018 (28.03.2018)

US

(71) Applicant: INTEL CORPORATION [US/US]; 2200

Mission College Boulevard, Santa Clara, CA 95054 (US).

(72) Inventors: BADIC, Biljana; Ottilienstr 12, 81825 Munich (DE). MUECK, Markus, Dominik; Jaegerstrasse 4b, 82008 Unterhaching (DE).

(74) Agent: NICHOLS, Benjeman L.; Viering, Jentschura & Partner mbB, c/o 444 Brickell Ave., Suite 51270, Miami, FL 33131 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHODS AND DEVICES FOR RADIO RESOURCE ALLOCATION

FIG 9

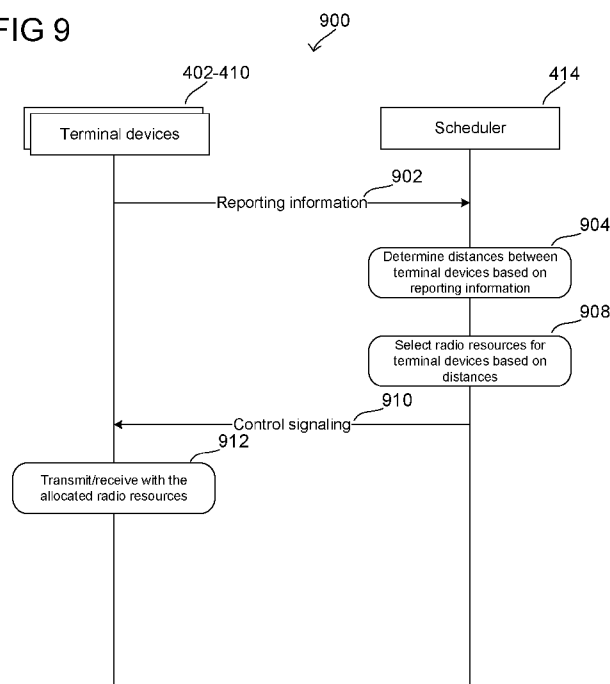

(57) Abstract: A method of allocating radio resources includes identifying a first grouping of terminal devices and a second grouping of terminal devices based on reporting information that indicates terminal device positions, selecting first radio resources and second radio resources based on a distance between the first grouping and the second grouping, and assigning the first radio resources to the first grouping and assigning the second radio resources to the second grouping.



METHODS AND DEVICES FOR RADIO RESOURCE ALLOCATION

Cross-Reference to Related Applications

[0001] This application claims priority to US Patent Application No. 15/937,943, filed March 28, 2018, the entirety of which is incorporated herein by reference.

Technical Field

[0002] Various embodiments relate generally to methods and devices for radio resource allocation.

Background

[0003] The near-far problem can lead to interference in various radio communication scenarios. This effect can be caused when a device attempts to receive an information signal from a distant transmitter when an interfering transmitter transmits a simultaneous interfering signal proximate to the device. As the interfering transmitter is close to the device and the distant transmitter is distant, the device may receive the interfering signal with higher received signal strength than the information signal. This can be problematic when the device attempts to receive and decode the information signal, as the interfering signal may corrupt the information signal.

Brief Description of the Drawings

[0004] In the drawings, like reference characters generally refer to the same parts throughout the different views. The drawings are not necessarily to scale, emphasis instead generally being placed upon illustrating the principles of the invention. In the following description, various embodiments of the invention are described with reference to the following drawings, in which:

FIG. 1 shows an exemplary depiction of the near-far problem according to some aspects;

FIG. 2 shows an exemplary demonstration of a resource allocation according to some aspects;

FIG. 3 shows an exemplary resource grid illustrating a received signal at a vehicle according to some aspects;

FIG. 4 shows an exemplary network illustration including a scheduler deployed with a network-side deployment according to some aspects;

FIG. 5 shows an exemplary message sequence chart describing a resource allocation routine using groupings according to some aspects;

FIG. 6 shows an exemplary network illustration where a scheduler uses groupings to perform a resource allocation routine according to some aspects;

FIG. 7 shows an exemplary resource grid with radio resource allocations separated in frequency according to some aspects;

FIG. 8 shows an exemplary resource grid with radio resource allocations separated in frequency according to some aspects;

FIG. 9 shows an exemplary message sequence chart describing a resource allocation routine according to some aspects;

FIG. 10 shows an exemplary network illustration including a scheduler deployed with a user-side deployment according to some aspects;

FIG. 11 shows an exemplary configuration of a scheduler according to some aspects;

FIG. 12 shows an exemplary configuration of a terminal device according to some aspects;

FIG. 13 shows an exemplary flow chart describing operation of a terminal device according to some aspects;

FIG. 14 shows a first exemplary method of allocating radio resources according to some aspects; and

FIG. 15 shows a second exemplary method of allocating radio resources according to some aspects.

Description

[0005] The following detailed description refers to the accompanying drawings that show, by way of illustration, specific details and aspects of embodiments in which the invention may be practiced.

[0006] The word “exemplary” is used herein to mean “serving as an example, instance, or illustration”. Any embodiment or design described herein as “exemplary” is not necessarily to be construed as preferred or advantageous over other embodiments or designs.

[0007] The words “plurality” and “multiple” in the description or the claims expressly refer to a quantity greater than one. The terms “group (of)”, “set [of]”, “collection (of)”, “series (of)”, “sequence (of)”, “grouping (of)”, among others, and the like in the description or in the claims refer to a quantity equal to or greater than one, i.e. one or more. Any term expressed in plural form that does not expressly state “plurality” or “multiple” likewise refers to a quantity equal to or greater than one. The terms “proper subset”, “reduced subset”, and “lesser subset” refer to a subset of a set that is not equal to the set, i.e. a subset of a set that contains less elements than the set.

[0008] Any vector and/or matrix notation utilized herein is exemplary in nature and is employed solely for purposes of explanation. Accordingly, aspects of this disclosure accompanied by vector and/or matrix notation are not limited to being implemented solely using vectors and/or matrices, and that the associated processes and computations may be equivalently performed with respect to sets, sequences, groups, among others, of data, observations, information, signals, samples, symbols, elements, among others.

[0009] As used herein, “memory” are understood as a non-transitory computer-readable medium in which data or information can be stored for retrieval. References to “memory” included herein may thus be understood as referring to volatile or non-volatile memory, including random access memory (RAM), read-only memory (ROM), flash memory, solid-state storage, magnetic tape, hard disk drive, optical drive, among others, or any combination thereof. Furthermore, registers, shift registers, processor registers, data buffers, among others, are also embraced herein by the term memory. A single component referred to as “memory” or “a memory” may be composed of more than one different type of memory, and thus may refer to a collective component comprising one or more types of memory. Any single memory component may be separated into multiple collectively equivalent memory components, and vice versa. Furthermore, while memory may be depicted as separate from one or more other components (such as in the drawings), memory may also be integrated with other components, such as on a common integrated chip or a controller with an embedded memory.

[0010] The term “software” refers to any type of executable instruction, including firmware.

[0011] The term “terminal device” utilized herein refers to user-side devices (both portable and fixed) that can connect to a core network and/or external data networks via a radio access network. “Terminal device” can include any mobile or immobile wireless communication device, including User Equipments (UEs), Mobile Stations (MSs), Stations (STAs), cellular phones, tablets, laptops, personal computers, wearables, multimedia playback and other handheld or body-mounted electronic devices, consumer/home/office/commercial appliances, vehicles, and any other electronic device capable of user-side wireless communications. Without loss of generality, in some cases terminal devices can also include application-layer components, such as application processors or other general processing components, that are directed to functionality other

than wireless communications. Terminal devices can optionally support wired communications in addition to wireless communications. Furthermore, terminal devices can include vehicular communication devices that function as terminal devices.

[0012] The term “network access node” as utilized herein refers to a network-side device that provides a radio access network with which terminal devices can connect and exchange information with a core network and/or external data networks through the network access node. “Network access nodes” can include any type of base station or access point, including macro base stations, micro base stations, NodeBs, evolved NodeBs (eNBs), Home base stations, Remote Radio Heads (RRHs), relay points, Wi-Fi/WLAN Access Points (APs), Bluetooth master devices, DSRC RSUs, terminal devices acting as network access nodes, and any other electronic device capable of network-side wireless communications, including both immobile and mobile devices (e.g., vehicular network access nodes, moving cells, and other movable network access nodes). As used herein, a “cell” in the context of telecommunications may be understood as a sector served by a network access node.

Accordingly, a cell may be a set of geographically co-located antennas that correspond to a particular sectorization of a network access node. A network access node can thus serve one or more cells (or sectors), where the cells are characterized by distinct communication channels. Furthermore, the term “cell” may be utilized to refer to any of a macrocell, microcell, femtocell, picocell, among others. Certain communication devices can act as both terminal devices and network access nodes, such as a terminal device that provides network connectivity for other terminal devices.

[0013] Various aspects of this disclosure may utilize or be related to radio communication technologies. While some examples may refer to specific radio communication technologies, the examples provided herein may be similarly applied to various other radio communication technologies, both existing and not yet formulated, particularly in cases where such radio communication technologies share similar features as disclosed regarding

the following examples. Various exemplary radio communication technologies that the aspects described herein may utilize include, but are not limited to: a Global System for Mobile Communications (GSM) radio communication technology, a General Packet Radio Service (GPRS) radio communication technology, an Enhanced Data Rates for GSM Evolution (EDGE) radio communication technology, and/or a Third Generation Partnership Project (3GPP) radio communication technology, for example Universal Mobile Telecommunications System (UMTS), Freedom of Multimedia Access (FOMA), 3GPP Long Term Evolution (LTE), 3GPP Long Term Evolution Advanced (LTE Advanced), Code division multiple access 2000 (CDMA2000), Cellular Digital Packet Data (CDPD), Mobitex, Third Generation (3G), Circuit Switched Data (CSD), High-Speed Circuit-Switched Data (HSCSD), Universal Mobile Telecommunications System (Third Generation) (UMTS (3G)), Wideband Code Division Multiple Access (Universal Mobile Telecommunications System) (W-CDMA (UMTS)), High Speed Packet Access (HSPA), High-Speed Downlink Packet Access (HSDPA), High-Speed Uplink Packet Access (HSUPA), High Speed Packet Access Plus (HSPA+), Universal Mobile Telecommunications System-Time-Division Duplex (UMTS-TDD), Time Division-Code Division Multiple Access (TD-CDMA), Time Division-Synchronous Code Division Multiple Access (TD-CDMA), 3rd Generation Partnership Project Release 8 (Pre-4th Generation) (3GPP Rel. 8 (Pre-4G)), 3GPP Rel. 9 (3rd Generation Partnership Project Release 9), 3GPP Rel. 10 (3rd Generation Partnership Project Release 10), 3GPP Rel. 11 (3rd Generation Partnership Project Release 11), 3GPP Rel. 12 (3rd Generation Partnership Project Release 12), 3GPP Rel. 13 (3rd Generation Partnership Project Release 13), 3GPP Rel. 14 (3rd Generation Partnership Project Release 14), 3GPP Rel. 15 (3rd Generation Partnership Project Release 15), 3GPP Rel. 16 (3rd Generation Partnership Project Release 16), 3GPP Rel. 17 (3rd Generation Partnership Project Release 17) and subsequent Releases (such as Rel. 18, Rel. 19, among others), 3GPP 5G, 3GPP LTE Extra, LTE-Advanced Pro, LTE Licensed-Assisted Access (LAA), MuLTEfire, UMTS Terrestrial

Radio Access (UTRA), Evolved UMTS Terrestrial Radio Access (E-UTRA), Long Term Evolution Advanced (4th Generation) (LTE Advanced (4G)), cdmaOne (2G), Code division multiple access 2000 (Third generation) (CDMA2000 (3G)), Evolution-Data Optimized or Evolution-Data Only (EV-DO), Advanced Mobile Phone System (1st Generation) (AMPS (1G)), Total Access Communication System/Extended Total Access Communication System (TACS/ETACS), Digital AMPS (2nd Generation) (D-AMPS (2G)), Push-to-talk (PTT), Mobile Telephone System (MTS), Improved Mobile Telephone System (IMTS), Advanced Mobile Telephone System (AMTS), OLT (Norwegian for Offentlig Landmobil Telefoni, Public Land Mobile Telephony), MTD (Swedish abbreviation for Mobiltelefonisystem D, or Mobile telephony system D), Public Automated Land Mobile (Autotel/PALM), ARP (Finnish for Autoradiopuhelin, "car radio phone"), NMT (Nordic Mobile Telephony), High capacity version of NTT (Nippon Telegraph and Telephone) (Hicap), Cellular Digital Packet Data (CDPD), Mobitex, DataTAC, Integrated Digital Enhanced Network (iDEN), Personal Digital Cellular (PDC), Circuit Switched Data (CSD), Personal Handy-phone System (PHS), Wideband Integrated Digital Enhanced Network (WiDEN), iBurst, Unlicensed Mobile Access (UMA), also referred to as also referred to as 3GPP Generic Access Network, or GAN standard), Zigbee, Bluetooth(r), Wireless Gigabit Alliance (WiGig) standard, mmWave standards in general (wireless systems operating at 10-300 GHz and above such as WiGig, IEEE 802.11ad, IEEE 802.11ay, among others), technologies operating above 300 GHz and THz bands, (3GPP/LTE based or IEEE 802.11p and other) Vehicle-to-Vehicle (V2V) and Vehicle-to-X (V2X) and Vehicle-to-Infrastructure (V2I) and Infrastructure-to-Vehicle (I2V) communication technologies, 3GPP cellular V2X, DSRC (Dedicated Short Range Communications) communication systems such as Intelligent-Transport-Systems and others, the European ITS-G5 system (i.e. the European flavor of IEEE 802.11p based DSRC, including ITS-G5A (i.e., Operation of ITS-G5 in European ITS frequency bands dedicated to ITS for safety related applications in the frequency range 5,875 GHz to 5,905 GHz), ITS-G5B

(i.e., Operation in European ITS frequency bands dedicated to ITS non- safety applications in the frequency range 5,855 GHz to 5,875 GHz), ITS-G5C (i.e., Operation of ITS applications in the frequency range 5,470 GHz to 5,725 GHz)), among others. Aspects described herein can be used in the context of any spectrum management scheme including dedicated licensed spectrum, unlicensed spectrum, (licensed) shared spectrum (such as LSA = Licensed Shared Access in 2.3-2.4 GHz, 3.4-3.6 GHz, 3.6-3.8 GHz and further frequencies and SAS = Spectrum Access System in 3.55-3.7 GHz and further frequencies). Applicable spectrum bands include IMT (International Mobile Telecommunications) spectrum as well as other types of spectrum/bands, such as bands with national allocation (including 450 - 470 MHz, 902-928 MHz (e.g., allocated for example in US (FCC Part 15)), 863-868.6 MHz (e.g., allocated for example in European Union (ETSI EN 300 220)), 915.9-929.7 MHz (e.g., allocated for example in Japan), 917-923.5 MHz (e.g., allocated for example in South Korea), 755-779 MHz and 779-787 MHz (e.g., allocated for example in China), 790 - 960 MHz, 1710 - 2025 MHz, 2110 - 2200 MHz, 2300 - 2400 MHz, 2.4-2.4835 GHz (e.g., it is an ISM band with global availability and it is used by Wi-Fi technology family (11b/g/n/ax) and also by Bluetooth), 2500 - 2690 MHz, 698-790 MHz, 610 - 790 MHz, 3400 - 3600 MHz, 3400 - 3800 MHz, 3.55-3.7 GHz (e.g., allocated for example in the US for Citizen Broadband Radio Service), 5.15-5.25 GHz and 5.25-5.35 GHz and 5.47-5.725 GHz and 5.725-5.85 GHz bands (e.g., allocated for example in the US (FCC part 15), consists four U-NII bands in total 500 MHz spectrum), 5.725-5.875 GHz (e.g., allocated for example in EU (ETSI EN 301 893)), 5.47-5.65 GHz (e.g., allocated for example in South Korea, 5925-7125 MHz and 5925-6425MHz band (e.g., under consideration in US and EU, respectively, where next generation Wi-Fi system may also include the 6 GHz spectrum as operating band), IMT-advanced spectrum, IMT-2020 spectrum (expected to include 3600-3800 MHz, 3.5 GHz bands, 700 MHz bands, bands within the 24.25-86 GHz range, among others), spectrum made available under FCC's "Spectrum Frontier" 5G initiative (including 27.5 - 28.35 GHz, 29.1 - 29.25

GHz, 31 - 31.3 GHz, 37 - 38.6 GHz, 38.6 - 40 GHz, 42 - 42.5 GHz, 57 - 64 GHz, 71 - 76 GHz, 81 - 86 GHz and 92 - 94 GHz, among others), the ITS (Intelligent Transport Systems) band of 5.9 GHz (typically 5.85-5.925 GHz) and 63-64 GHz, bands currently allocated to WiGig such as WiGig Band 1 (57.24-59.40 GHz), WiGig Band 2 (59.40-61.56 GHz) and WiGig Band 3 (61.56-63.72 GHz) and WiGig Band 4 (63.72-65.88 GHz), 57-64/66 GHz (e.g., where this band has near-global designation for Multi-Gigabit Wireless Systems (MGWS)/WiGig . In US (FCC part 15) allocates total 14 GHz spectrum, while EU (ETSI EN 302 567 and ETSI EN 301 217-2 for fixed P2P) allocates total 9 GHz spectrum), the 70.2 GHz - 71 GHz band, any band between 65.88 GHz and 71 GHz, bands currently allocated to automotive radar applications such as 76-81 GHz, and future bands including 94-300 GHz and above. Furthermore, the scheme can be used on a secondary basis on bands such as the TV White Space bands (typically below 790 MHz) where in particular the 400 MHz and 700 MHz bands are promising candidates. Besides cellular applications, specific applications for vertical markets may be addressed such as PMSE (Program Making and Special Events), medical, health, surgery, automotive, low-latency, drones, among others applications.

[0014] Aspects described herein can also implement a hierarchical application of the scheme is possible, e.g. by introducing a hierarchical prioritization of usage for different types of users (e.g., low/medium/high priority, among others), based on a prioritized access to the spectrum e.g. with highest priority to tier-1 users, followed by tier-2, then tier-3, and so forth users. Aspects described herein can also be applied to different Single Carrier or OFDM flavors (CP-OFDM, SC-FDMA, SC-OFDM, filter bank-based multicarrier (FBMC), OFDMA, among others) and in particular 3GPP NR (New Radio) by allocating the OFDM carrier data bit vectors to the corresponding symbol resources.]. Some of the features in this disclosure are defined for the network side, such as Access Points, eNodeBs, among others In some cases, a User Equipment (UE) may also take this role and act as an Access Points,

eNodeBs, or the like. some or all features defined for network equipment may be implemented by a UE.

[0015] For purposes of this disclosure, radio communication technologies may be classified as one of a Short Range radio communication technology or Cellular Wide Area radio communication technology. Short Range radio communication technologies may include Bluetooth, WLAN (e.g., according to any IEEE 802.11 standard), and other similar radio communication technologies. Cellular Wide Area radio communication technologies may include Global System for Mobile Communications (GSM), Code Division Multiple Access 2000 (CDMA2000), Universal Mobile Telecommunications System (UMTS), Long Term Evolution (LTE), General Packet Radio Service (GPRS), Evolution-Data Optimized (EV-DO), Enhanced Data Rates for GSM Evolution (EDGE), High Speed Packet Access (HSPA; including High Speed Downlink Packet Access (HSDPA), High Speed Uplink Packet Access (HSUPA), HSDPA Plus (HSDPA+), and HSUPA Plus (HSUPA+)), Worldwide Interoperability for Microwave Access (WiMax) (e.g., according to an IEEE 802.16 radio communication standard, e.g., WiMax fixed or WiMax mobile), for example, and other similar radio communication technologies. Cellular Wide Area radio communication technologies also include “small cells” of such technologies, such as microcells, femtocells, and picocells. Cellular Wide Area radio communication technologies may be generally referred to herein as “cellular” communication technologies.

[0016] The terms “radio communication network” and “wireless network” as utilized herein encompasses both an access section of a network (e.g., a radio access network (RAN) section) and a core section of a network (e.g., a core network section). The term “radio idle mode” or “radio idle state” used herein in reference to a terminal device refers to a radio control state in which the terminal device is not allocated at least one dedicated communication channel of a mobile communication network. The term “radio connected mode” or “radio connected state” used in reference to a terminal device refers to a radio

control state in which the terminal device is allocated at least one dedicated uplink communication channel of a radio communication network.

[0017] Unless explicitly specified, the term “transmit” encompasses both direct (point-to-point) and indirect transmission (via one or more intermediary points). Similarly, the term “receive” encompasses both direct and indirect reception. Furthermore, the terms “transmit”, “receive”, “communicate”, and other similar terms encompass both physical transmission (e.g., the transmission of radio signals) and logical transmission (e.g., the transmission of digital data over a logical software-level connection). For example, a processor or controller may transmit or receive data over a software-level connection with another processor or controller in the form of radio signals, where the physical transmission and reception is handled by radio-layer components such as RF transceivers and antennas, and the logical transmission and reception over the software-level connection is performed by the processors or controllers. The term “communicate” encompasses one or both of transmitting and receiving, i.e. unidirectional or bidirectional communication in one or both of the incoming and outgoing directions. The term “calculate” encompass both ‘direct’ calculations via a mathematical expression/formula/relationship and ‘indirect’ calculations via lookup or hash tables and other array indexing or searching operations.

[0018] In vehicle-to-vehicle (V2V) networks, vehicles may transmit to each other from different positions as they move dynamically. The received signal power seen at each of the vehicles can therefore vary based on the changing distances between vehicles. In an exemplary scenario, a first vehicle may be positioned closer to a second vehicle than a third vehicle. When the second and third vehicles transmit simultaneously, the transmission from the closer second vehicle may have higher received signal power at the first vehicle than the transmission from the distant third vehicle. The transmission from the closer second vehicle can therefore interfere with the transmission from the distant third vehicle due to its stronger received signal power seen at the first vehicle.

[0019] This interference can occur even when the second and third vehicles transmit on different spectrum, as neighboring channels can leak onto each other and corrupt desired signals. For example, if the first vehicle is trying to receive a desired signal from the distant third vehicle and the closer second vehicle transmits at the same time on a neighboring channel, the transmission from the closer second vehicle may leak onto the desired signal transmitted by the distant third vehicle. As the second vehicle is closer to the first vehicle than the third vehicle, the transmission by the second vehicle may have higher power and interfere with the weaker desired signal. The desired signal may be too weak for the first vehicle to receive it in the presence of the interfering transmission by the second vehicle. This can result in the loss of information in the desired signal. While undesirable in many scenarios, this information loss can be particularly adverse in autonomous driving use cases where the loss of information can result in life-threatening scenarios.

[0020] This problem with varying received signal power is termed the near-far problem. As further described herein, various aspects of this disclosure may utilize a specific resource allocation routine that can mitigate the impact of the near-far problem. In some aspects, this resource allocation routine can allocate radio resources to terminal devices based on their distances from each other. For example, the resource allocation routine can allocate radio resources for terminal devices where the radio resources are separated by a distance (e.g., in frequency and/or time) that depends on the on the proximity of the terminal devices. As further described below, this can yield an allocation that provides proximate radio resources (e.g., in frequency and/or time) to terminal devices that are close to each other and distant radio resources to terminal devices that are distant from each other. While some examples may be presented herein for vehicular use cases, these techniques can likewise be implemented in any radio communication use case.

[0021] FIG. 1 shows an example of the near-far problem according to some aspects. As shown in FIG. 1, vehicle 102 may be located proximate to vehicle 104 and vehicle 106 may

be located distant from vehicle **104**. In an exemplary scenario, vehicle **104** may attempt to receive an information signal from vehicle **106**. Resource grids **108** and **112** show the transmission activity of vehicles **102** and **106**, respectively, while resource grid **116** shows the reception activity of vehicle **104**. As shown in resource grid **112**, vehicle **106** may transmit the information signal on radio resource **114** (e.g., a time-frequency radio resource on a specific subcarrier and symbol slot, such as a resource element (RE)). Vehicle **102** may perform a simultaneous transmission on radio resource **110**, as shown in resource grid **108**, which may be adjacent to radio resource **114**. This simultaneous transmission by vehicle **102** may be the interfering signal.

[0022] As shown in resource grid **116**, vehicle **104** may receive the information signal from vehicle **106** on radio resource **114** and receive the interfering signal from vehicle **102** on radio resource **110**. As vehicle **102** is closer to vehicle **104** than vehicle **106**, the interfering signal may have higher power than the information signal (as denoted by the darker shading of radio resource **110** in resource grid **116**; e.g., assuming approximately equal transmit power by vehicles **102** and **106**). Even though the information signal and the interfering signal are on different radio resources, the interfering signal in radio resource **110** may leak into radio resource **114** and consequently interfere with the information signal. Vehicle **104** may therefore have difficulty in receiving and decoding the information signal, and in some cases may not be able to successfully recover the information included therein.

[0023] Accordingly, various aspects of this disclosure relate to a resource allocation routine for allocating radio resources to terminal devices (e.g., vehicular, portable, or any other type of terminal device) to help mitigate impacts of the near-far problem. FIG. 2 shows an introductory example of this resource allocation routine. As shown in FIG. 2, vehicles **202a** and **202b** may be located proximate to each other (e.g., within a distance threshold, such as a geographic distance threshold or within a signal strength threshold). Similarly, vehicles **204a**

and **204b** may be located proximate to each other while vehicles **206a** and **206b** may also be located proximate to each other.

[0024] The resource allocation routine may operate to allocate radio resources for vehicles **202a-206b** to use for transmitting and receiving to each other. In some aspects, the resource allocation routine may be executed by a network-side component, such as at a network access node or a core network server. In some aspects, the resource allocation routine may be executed by a user-side component, such as at one of vehicles **202a-206b**. The implementation of these aspects is described below in full. In various aspects, the resource allocation routine may attempt to allocate radio resources to vehicles **202a-206b** to mitigate harmful impacts of the near-far problem. For example, the resource allocation routine may attempt to allocate proximate radio resources to vehicles that are close together and to allocate distant radio resources to vehicles that are far apart. In one example, the separation (e.g., separation in frequency and/or time) between the radio resources allocated to two vehicles may depend on the geographic distance between the two vehicles.

[0025] In one example using FIG. 2, the resource allocation routine may allocate radio resources **208a** to vehicles **202a** and **202b** (e.g., to use for transmitting and/or receiving), radio resources **208b** to vehicles **204a** and **204b**, and radio resources **208c** to vehicles **206a** and **206b**. As shown in the example of resource grid **208**, radio resources **208a** and **208b** may be adjacent in frequency (or, in other examples, may be proximate to each other) while radio resources **208c** may be distant in frequency from radio resources **208a** and **208b** (e.g., on opposite ends of a predefined pool of radio resources) For instance, radio resources **208a** may be lower frequencies (e.g., one or more subcarriers at the lower end of a resource block), radio resources **208b** may be adjacent higher frequencies (e.g., one or more subcarriers) to radio resources **208a**, and radio resources **208c** may be higher frequencies (e.g., one or more subcarriers at the higher end of a resource block). The separation in radio resources between different vehicles may therefore depend on the geographic distance between the vehicles. For

example, as shown by the linear positioning of vehicles **202a-206b** in FIG. 2, vehicles **202a** and **202b** may be located proximate to each other and may also be located proximate to vehicles **204a** and **204b**. Vehicles **202a**, **202b**, **204a**, and **204b** may therefore be allocated proximate radio resources. However, vehicles **206a** and **206b** may be located distant from vehicles **202a-204b**, and may therefore be allocated distant radio resources from vehicles **202a-204b**.

[0026] This allocation of radio resources based on the distance between vehicles may help to mitigate the near-far problem. FIG. 3 shows an example of the signal received by vehicle **302a** according to some aspects. The shading of the radio resources in resource grid **308** indicates the received signal power seen by vehicle **302a**, where darker shades indicate stronger received signal power and lighter shades indicate weaker received signal power. In particular, radio resources **308a** may have the strongest received signal power (out of radio resources **308a**, **308b**, and **308c**) because they are allocated to vehicle **302b**, which is closest to vehicle **302a** (out of vehicles **302b-306b**). Radio resources **308b** may have the second strongest received signal power as they are allocated to vehicles **304a** and **304b**, which are located between vehicle **302a** and vehicles **306a** and **306b**. Radio resources **308c** may have the weakest received signal power as they are allocated to vehicles **306a** and **306b**, which are located furthest from vehicle **302a** (out of vehicles **302b-306b**). This example assumes that the transmit power is approximately equal, and therefore that closer transmissions will have stronger received signal power at vehicle **302a** than more distant transmissions.

[0027] In an exemplary demonstration of near-far problem mitigation, vehicle **302a** may attempt to receive an information signal from vehicle **306a**. Vehicle **306a** may therefore transmit the information signal on radio resources **308c** (the radio resources allocated to vehicle **306a**), which vehicle **302a** may use to receive the information signal. Even if another vehicle proximate to vehicle **302a**, such as vehicle **304a**, transmits at the same time as vehicle **306b**, interference may be avoided due to the separation in radio resources. In particular,

vehicle **304** will transmit this interfering signal on radio resources **308b**, which are separated from radio resources **308c** on which vehicle **306b** transmitted the information signal on. This separation (e.g., separation in frequency in the example of FIG. **3**) in radio resources may avoid leakage, even in cases where the interfering signal has stronger received signal power than the information signal.

[0028] As previously introduced, various aspects may implement a resource allocation routine that is configured to allocate radio resources. This resource allocation routine may be executed by a scheduler responsible for allocating radio resources in a radio communication network, where the scheduler can be located on the user-side (e.g., in a terminal device) or on the network-side (e.g., in a network access node or in a core network server). FIG. **4** shows an example according to some aspects where scheduler **414** may be deployed on the network-side. As shown in FIG. **4**, scheduler **414** may interface with network access node **412**, which may provide a radio access network for terminal devices **402-410** (which may be vehicles, mobile phones, or any other type of terminal device). In some aspects, scheduler **414** may be an internal component of network access node **412**, such as part of a baseband unit (BBU) of network access node **412**. In some aspects, scheduler **414** may be an external component to network access node **412**, such as a core network server located in a core network to which network access node **412** is connected.

[0029] Scheduler **414** may be configured to execute the resource allocation routine to allocate radio resources to terminal devices, such as to terminal devices **402-410**.

Accordingly, scheduler **414** may be configured to select radio resources for allocation to each of terminal devices **402-410** and to allocate the selected radio resources to terminal devices **402-410**, such as by transmitting control signaling to terminal devices **402-410** that specifies their allocated radio resources. Scheduler **414** may use network access node **412** to transmit this control signaling to terminal devices **402-410**. For example, after generating the control signaling, scheduler **414** may transmit the control signaling to terminal devices **402-410** via

network access node **412**. Scheduler **414** may therefore transmit the control signaling by sending the control signaling to network access node **412**, which may then wirelessly transmit the control signaling to terminal devices **402-410** via the radio access network.

[0030] As previously introduced, scheduler **414** may be configured to allocate radio resources to terminal devices **402-410** where the separation in radio resources allocated to different vehicles depends on their geographical distance from each other. For example, scheduler **414** may be configured to allocate proximate radio resources (e.g., in terms of separation in time and/or frequency) to terminal devices that are close to each other and to allocate distant radio resources to terminal devices that are distant from each other. Expressed another way, scheduler **414** may be configured to allocate radio resource to terminal devices where the separation between radio resources allocated to terminal devices that are close together is less than the separation between radio resources allocated to terminal devices that are further apart.

[0031] In some aspects, scheduler **514** may be configured to use groupings to allocate radio resources. FIG. 5 shows exemplary message sequence chart **500** according to some aspects, which illustrates a grouping-based resource allocation routine executed by scheduler **414**. In some aspects, scheduler **414** may be one or more processors configured to retrieve and execute program code that defines the resource allocation routine as executable instructions. The algorithmic functionality shown in FIG. 5 and described herein may therefore be embodied as executable instructions for scheduler **414** to execute on its one or more processors.

[0032] As shown in FIG. 5, terminal devices **402-410** may first provide reporting information to scheduler **414** in stage **502**. Scheduler **414** may use this reporting information to identify groupings of terminal devices and to allocate radio resources to the groupings. In some aspects, the reporting information may include position reports from terminal devices **402-410**. In an example using terminal device **402**, terminal device **402** may determine its

position, such as by using a geopositional sensor. Terminal device **402** may then transmit this position as reporting information to scheduler **414** (e.g., by transmitting the reporting information to scheduler **414** via network access node **412**). Scheduler **414** may therefore receive the position of terminal device **402** as part of the reporting information. In some aspects, scheduler **414** may additionally or alternatively determine the position of terminal device **402** using other methods, such as by using triangulation by network access nodes. Scheduler **414** may include this as a position report in the reporting information

[0033] In some aspects, the reporting information may additionally or alternatively include radio measurements performed by terminal devices **402-410**. In one example using terminal device **402**, terminal device **402** may perform a radio measurement such as a signal strength measurement on a signal received from terminal device **404**. Terminal device **402** may then transmit the radio measurement to scheduler **414** as reporting information.

[0034] Scheduler **414** may therefore receive the reporting information from terminal devices **402-410**. Scheduler **414** may then identify groupings of terminal devices **402-410** based on the reporting information in stage **504**. For example, scheduler **414** may identify terminal devices that are proximate to each other, e.g., within a predefined distance from each other, and assign these proximate terminal devices to a grouping. FIG. 6 shows an exemplary result of this grouping for terminal devices **402-410**. As shown in FIG. 6, scheduler **414** may assign terminal device **402** into its own grouping **602** (e.g., as terminal device **402** may not be proximate to any other terminal devices), assign terminal devices **404** and **406** into grouping **604** (e.g., as terminal devices **404** and **406** are proximate), and assign terminal devices **408** and **410** into grouping **606** (e.g., as terminal devices **408** and **410** are proximate to each other).

[0035] As previously indicated, the reporting information may include position reports and/or radio measurements for terminal devices **402-410**. In some aspects where the reporting information includes position reports for terminal devices **402-410**, scheduler **414** may identify the groupings in stage **504** by determining, based on the position reports, which

terminal devices and/or groups of terminal devices are within a predefined distance of each other. In the example of Fig. 6, scheduler **414** may identify the positions of each of terminal devices **402-410** with their position reports in the reporting information. Scheduler **414** may then compare the positions with each other to determine the distances between each of terminal devices **402-410** (e.g., by calculating the distance as a difference between the positions). Scheduler **414** may then determine whether any of the distances are less than a predefined distance (e.g., a predefined value set by a designer) and, if so, may assign the corresponding terminal devices to a grouping.

[0036] In the example of FIG. 6, scheduler **414** may determine that terminal device **402** is not within the predefined distance of any of terminal devices **404-410**, and may therefore assign terminal device **402** to its own grouping **602**. Scheduler **414** may determine that terminal devices **404** and **406** are within the predefined distance of each other and may assign terminal devices **404-406** to grouping **604**. Scheduler **414** may also determine that terminal devices **408** and **410** are within the predefined distance of each other and may assign terminal devices **408** and **410** to grouping **606**. In other examples, scheduler **414** may assign any number of terminal devices to a given grouping, such as by determining that each of a group of terminal devices are within the predefined distance of each of the other terminal devices (e.g., a group of three terminal devices for which each terminal device is within the predefined distance of each of the other two terminal devices) and/or determining that each of the group of terminal devices is within the predefined distance of at least a certain proportion of the other terminal devices (e.g., a group of three terminal devices for which each terminal device is within the predefined distance of at least one of the other two terminal devices).

[0037] As previously indicated, in some aspects scheduler **414** may additionally or alternatively use radio measurements to identify the groupings in stage **504**. For example, the reporting information may include radio measurements such as signal strength measurements by terminal devices **402-410**. The signal strength measurements may therefore characterize

the received signal strength of a signal received at one of terminal devices **402-410** from another of terminal devices **402-410**, such as a signal strength measurement by terminal device **402** on a signal transmitted by terminal device **410**. As signal strength measurements may generally scale inversely with distance (e.g., when disregarding other attenuation factors), higher signal strength measurements may indicate that the terminal devices are proximate while lower signal strength measurements may indicate that the terminal devices are distant. Accordingly, scheduler **414** may therefore in stage **504** compare the signal strength measurements between terminal devices **402-410** to a predefined signal strength threshold. If the signal strength measurement between a given pair of terminal devices **402-410** is greater than the predefined signal strength threshold, scheduler **414** may assign the pair of terminal devices to a grouping. With reference to the example of FIG. 6, scheduler **414** may determine that the received signal strength between terminal device **402** and each of terminal devices **404-410** is less than the predefined signal strength threshold, and may therefore assign terminal device **402** to its own grouping **602**. Scheduler **414** may determine that the received signal strength between terminal devices **404** and **406** is greater than the predefined signal strength threshold and may therefore assign terminal devices **404** and **406** to grouping **604**. Scheduler **414** may determine that the received signal strength between terminal devices **408** and **410** is greater than the predefined signal strength threshold and then assign terminal devices **408** and **410** to grouping **606**.

[0038] Scheduler **414** may also assign groupings of any number of terminal devices based on the signal strength measurements. For example, scheduler **414** may identify a group of terminal devices for which the received signal strength between each terminal device in the group is greater than the predefined signal strength threshold and assign the group of terminal devices to a grouping (e.g., a group of three terminal devices for which each terminal device has a received signal strength with each of the other two terminal devices that is above the predefined signal strength threshold). In another example, scheduler **414** may identify a group

of terminal devices for which each terminal device has a received signal strength above the predefined signal strength threshold with at least a certain proportion of the other terminal devices (e.g., a group of three terminal devices for which each terminal device has a received signal strength with at least one of the other two terminal devices that is above the predefined signal strength threshold).

[0039] According to these examples, scheduler **414** may therefore be configured to identify groupings of terminal devices based on the reporting information in stage **504**. After identifying the groupings, scheduler **414** may be configured to determine the distance between the groupings in stage **506**. In some aspects, scheduler **414** may be configured to determine the distance between the groupings based on the reporting information. For example, scheduler **414** may use the position reports in the reporting information to identify the positions of terminal devices in each grouping and subsequently use these positions to determine the distances between groupings. Referring to the example of FIG. 6, scheduler **414** may use the positions of the terminal devices in grouping **602** (e.g., of terminal device **402**) and the positions of terminal devices in grouping **604** (e.g., of terminal devices **404** and **406**) to determine the distance between groupings **602** and **604**. In various aspects, scheduler **414** may determine the distance between groupings in stage **506** as the distance between the closest terminal devices in each grouping, the distance between the furthest terminal devices in each grouping, the average distance between terminal devices in each grouping, the distance between a center position of each grouping, or any other distance metric that quantifies the distance between groupings.

[0040] As previously indicated, the signal strength measurements between terminal devices may scale inversely with distance. In another example, scheduler **414** may therefore additionally or alternatively use signal strength measurements to determine the distances between groupings in stage **506**. Scheduler **414** may use signal strength measurements between terminal devices in groupings as representative of the distance between groupings

and/or may estimate the distance between groupings based on the signal strength measurements between terminal devices in the groupings (e.g., by using a free-space pathloss model to approximate distance based on received signal strength). Referring to the example of FIG. 6, scheduler 414 may determine the distance between groupings 602 and 604 based on the received signal strength between terminal device 402 and terminal devices 404 and 406 (e.g., based on an average of the received signal strength between terminal devices 402 and 404 and the received signal strength between terminal devices 402 and 406). As shown by the positioning of groupings 602-606 in FIG. 6, groupings 604 and 606 may be closer to each other than grouping 602. This may be reflected in the distances determined by scheduler 414 in stage 506, which may indicate that the distance between grouping 604 and 606 is less than the distance between groupings 602 and 604 and the distance between groupings 602 and 606.

[0041] At the conclusion of stage 506, scheduler 414 may have distances between the groupings, where the distances may be expressed as geographic distances (e.g., the distance between two geographic points, including estimated distances based on received signal strength) or signal strength measurements. Scheduler 414 may then in stage 508 select radio resources for the groupings based on the distances. As previously indicated, scheduler 414 may be configured to select radio resources for terminal devices based on their geographic distances from each other, which can assist in mitigating near-far problems as shown for FIG.

3. In one example, scheduler 414 may be configured to select radio resources for terminal devices where the separation in radio resources (e.g., in time and/or frequency) depends on the distances between the terminal devices, such as where scheduler 414 allocates proximate radio resources (e.g., directly adjacent or proximate) to terminal devices that are proximate to each other and allocates distant radio resources (e.g., separated by a distance in frequency and/or time) to terminal devices that are distant to each other. In some aspects where scheduler 414 uses signal strength measurements as representative of distance, scheduler 414 may allocate proximate radio resources to terminal devices with high received signal strength

between them and may allocate distant radio resources to terminal devices with low received signal strength.

[0042] FIG. 7 shows an exemplary resource grid **700** according to some aspects that illustrates an exemplary resource allocation to terminal devices **402-410**. The resource allocation of FIG. 7 shows a resource allocation that separates allocated radio resources in time, while FIG. 8 shows a resource allocation that separates allocated radio resources in time and frequency. As previously described for the example of FIG. 6, scheduler **414** may determine the distances between groupings **602-606** in stage **506**, which may indicate that groupings **604** and **606** are closer than grouping **602** relative to both grouping **604** and **606** (e.g., that the geographic distance is less or that the received signal strength is greater). As scheduler **414** is configured to allocate proximate radio resources to proximate terminal devices and distant radio resources to distant terminal devices, scheduler **414** may be configured to allocate radio resources to groupings **604** and **606** that are proximate and to allocate radio resources to grouping **602** that are distant from those allocated to groupings **604** and **606**. Accordingly, in the example of FIG. 7, scheduler **414** may be configured to allocate radio resources **702** to grouping **606**, allocate radio resources **704** to grouping **604**, and allocate radio resources **706** to grouping **602**. Radio resources **702**, **704**, and **706** may be separated from each other in frequency (e.g., on different subcarriers, spectrum, or channels). As shown for the example of resource grid **700** in FIG. 7, scheduler **414** may allocate radio resources **702** and **704** (for groupings **606** and **604**, respectively) as being proximate to each other and may allocate radio resources **706** as being distant to radio resources **702** and **704**.

[0043] FIG. 7 shows only one example of a resource allocation by scheduler **414** based on the distances between terminal devices. Various aspects may therefore use differing techniques to determine this resource allocation based on the distances between terminal devices (e.g., where the separation in allocated radio resources between terminal devices depends on the distances between the terminal devices). For example, in some aspects,

scheduler **414** may be configured to allocate adjacent radio resources for the closest groupings (e.g., radio resources that are on adjacent subcarriers, spectrum, or channels in frequency), or may be configured to allocate proximate radio resources for the closest groupings (e.g., radio resources that are not directly adjacent but still proximate, such as subcarriers or channels that are separated by several subcarriers or channels).

[0044] In some aspects, scheduler **414** may be configured to allocate radio resources that are separated by a maximum possible separation to the groupings that are furthest apart. For example, there may be a predefined pool of radio resources available for allocation (e.g., as defined by the system bandwidth, such as a number of resource blocks or subcarriers available for allocation). For the groupings that are furthest from each other, scheduler **414** may therefore allocate radio resources to one grouping that are at one end of the predefined pool (e.g., the lowest frequencies) and allocate radio resources to the other grouping that are on the opposite end of the predefined pool (e.g., the highest frequencies).

[0045] While FIG. 7 shows an exemplary allocation where scheduler **414** separates resource allocations to groupings in frequency, FIG. 8 shows an exemplary allocation for resource grid **800** according to some aspects where scheduler **414** separates resource allocations to groupings in time and frequency. For example, with continued reference to the example of FIG. 6, scheduler **414** may allocate radio resources **802** to grouping **606**, allocate radio resources **804** to grouping **604**, and allocate radio resources **806** to grouping **602**. As shown in FIG. 8, radio resources **802** may be in the lower-left corner of resource grid **800** (e.g., lower frequencies and earlier time slots within the subframe) while radio resources **804** may be adjacent to radio resources **802** (e.g., adjacent over time and/or frequency). Radio resources **806** may be in the upper-right corner of resource grid **800** (e.g., higher frequencies and later time slots within the subframe). Scheduler **414** may therefore separate the radio resources allocated to groupings **602-606** depending on the distances between groupings **602-606**, namely by allocating radio resources to groupings **604** and **606** that are closer together in time

and frequency than the radio resources allocated to grouping **602**. Scheduler **414** may therefore allocate radio resource to terminal devices where the separation between radio resources allocated to groupings that are close together is less than the separation between radio resources allocated to groupings that are further apart. The allocation of resource grid **800** is exemplary, and various aspects may separate the radio resources allocated to groupings **602-606** in different ways (e.g., by positioning the allocated radio resources at different locations in resource grid **800**).

[0046] With continued reference to FIG. 5, scheduler **414** may therefore use any of a variety of techniques to select the radio resources for groupings based on the distances between the groupings in stage **508**, where the selected radio resources for the groupings may be separated from each other depending on the distance between the groupings. After selecting the radio resources in stage **508**, scheduler **414** may in stage **510** send control signaling to terminal devices **402-410** that specifies the radio resources allocated to each of terminal devices **402-410**. Scheduler **414** may send the control signaling via network access node **412**, where scheduler **414** may send the control signaling to network access node **412** for wireless transmission to terminal devices **402-410**.

[0047] Terminal devices **402-410** may receive the control signaling from scheduler **414** and subsequently transmit and/or receive with the allocated radio resources in stage **512**. For example, the control signaling may specify the radio resources (e.g., the time-frequency resources on a resource grid, such as certain subcarriers and/or certain time slots) allocated to each terminal device. A counterpart scheduler (e.g., in the baseband modems of terminal devices **402-410**) may read the control signaling and subsequently control radio activity based on the control signaling, such as by transmitting and/or receiving on the radio resources allocated to each respective terminal device.

[0048] As previously introduced, in some cases this resource allocation routine by scheduler **414** may mitigate impacts of the near-far problem. For example, scheduler **414** may allocate

radio resources **704** to terminal devices **404** and **406** (e.g., to grouping **604**) for transmission and may allocate radio resources **706** to terminal device **402** (e.g., to grouping **602**) for transmission, where radio resources **702** and **706** may be separated as shown in resource grid **700** in FIG. 7. In an exemplary scenario, terminal device **402** may attempt to transmit an information signal to terminal device **410**, and may therefore use radio resources **706** for the transmission. Terminal device **404** may perform a simultaneous transmission, which may therefore be an interference signal. Terminal device **410** may attempt to receive the information signal by receiving and decoding radio resources **706**.

[0049] As radio resources **702** and **706** are separated in frequency, terminal device **410** may still be able to successfully receive and decode the interference signal even in the face of the interference signal transmitted by terminal device **404**. Even though terminal device **410** may see the interference signal with a higher received signal strength than the interference signal (due to the smaller distance between terminal devices **404** and **410** compared to the distance between terminal devices **402** and **410**), the separation between radio resources **702** and **706** may avoid leakage from the interference signal onto the information signal. Accordingly, the resource allocation (to allocate radio resources to terminal devices that are separated depending on the distance between the terminal devices) by scheduler **414** may help to avoid the near-far problem.

[0050] Scheduler **414** can similarly mitigate the near-far problem when separating radio resources in time and frequency depending on the distance between terminal devices, such as shown in resource grid **800** in FIG. 8. For example, in a similar scenario to that described immediately above, scheduler **414** may allocate radio resources **802** to grouping **606**, allocate radio resources **804** to grouping **604**, and allocate radio resources **806** to grouping **602**. Accordingly, when terminal device **602** attempts to transmit an information signal to terminal device **606** simultaneous to transmission of an interference signal by terminal device **404**, the separation of radio resources **802** and **806** in time and frequency may avoid leakage of the

interference signal onto the information signal. Terminal device **410** may therefore still be able to receive and decode the information signal.

[0051] Various aspects described above provide a resource allocation routine with which scheduler **414** may use groupings to allocate radio resources to terminal devices that are separated (e.g., in time and/or frequency) based on the geographic distance between the terminal devices. For example, as described for FIG. 5, scheduler **414** may identify groupings of terminal devices that are proximate, determine distances between the groupings, and use these distances between groupings to select radio resources for the groupings. In other aspects, scheduler **414** may select the radio resources to allocate to terminal devices based directly on the distances between them (e.g., without assigning the terminal devices to groups). FIG. 9 shows exemplary message sequence chart **900** illustrating this procedure according to some aspects. As shown in FIG. 9, terminal devices **402-410** may provide reporting information (e.g., position reports and/or radio measurements) to scheduler **414** in stage **902**. Scheduler **414** may then determine the distances (e.g., by determining the distance between positions, estimating the distance based on a signal strength measurement, and/or by using a signal strength measurement to represent distance) between terminal devices **402-410** based on the reporting information in stage **904**. For example, with reference to FIG. 4, scheduler **414** may determine the distances between each of terminal devices **402-410**.

[0052] Scheduler **414** may then select radio resources for terminal devices **402-410** in stage **908** based on the distances, where the separation in radio resources for terminal devices **402-410** are separated in time and/or frequency depending on the distances between terminal devices **402-410**. For example, as described for previous examples, scheduler **414** may allocate radio resources to proximate terminal devices that are closer (e.g., closer in time and/or frequency) than the radio resources allocated to distant terminal devices. In other words, the separation between radio resources allocated to proximate terminal devices may be less than the separation between radio resources allocated to distant terminal devices. In the

example of FIG. 4, the radio resources that scheduler 414 allocates to terminal devices 404 and 406 may be separated by less than the radio resources allocated to terminal devices 402 and 404 (e.g., the radio resources allocated to terminal device 402 may be further from the radio resources allocated to terminal device 404 than the radio resources allocated to terminal device 406). As previously described for resource grids 700 and 800, scheduler 414 may use any of a number of techniques to select the specific radio resources to allocate to terminal devices 402-410, such as by allocating adjacent radio resources to the closest terminal devices and/or allocating the furthest possible radio resources to the furthest terminal devices. In some aspects, scheduler 414 may use a brute force approach and may evaluate different resource allocations to identify a resource allocation that provides maximum separation between radio resources allocated to the furthest terminal devices.

[0053] After selecting the radio resources to allocate to terminal devices 402-410 in stage 908, scheduler 414 may send control signaling to terminal devices 402-410 that specifies the radio resources allocated to terminal devices 402-410. Terminal devices 402-410 may then transmit and/or receive with their respectively allocated radio resources in stage 912.

[0054] In various aspects described above, scheduler 414 may be a network-side component, such as a component of a network access node or as a core network server. While applicable for many use cases, this network-side deployment of scheduler 414 may be used for vehicular communication scenarios such as Cellular Vehicle-to-Anything (C-V2X). For example, C-V2X provides several different modes including Mode 3, which specifies that the network is responsible for allocating radio resources to vehicles. Accordingly, in some aspects terminal devices 402-410 may be vehicles served by scheduler 414, where scheduler 414 may allocate radio resources to terminal devices 402-410 using Mode 3. As described in various aspects above, scheduler 414 may provide control signaling to terminal devices 402-410 that specify radio resources allocated to terminal devices 402-410. Terminal devices 402-410 may then utilize the allocated radio resources for C-V2X communications.

[0055] In some aspects, scheduler **414** may be a user-side component. For example, instead of having a network-side deployment in a network access node or core network server, scheduler **414** may be deployed as part of a terminal device. FIG. **10** shows an exemplary network configuration in which scheduler **414** is deployed as an internal component of terminal device **402**. Scheduler **414** may function in a same or similar manner as previously described for network-side deployments. For example, with reference to FIG. **5**, scheduler **414** may follow the procedure of message sequence chart **500** to obtain reporting information from terminal devices **402-410** in stage **502**, identify groupings based on the reporting information in stage **504**, determine distances between the groupings in stage **506**, select radio resources for the groupings based on the distances in stage **508**, and send control signaling to terminal devices **402-410** in stage **510**. Similarly, with reference to FIG. **9**, scheduler **414** may follow the procedure of message sequence chart **500** to obtain reporting information from terminal devices **402-410** in stage **902**, determine distances between terminal devices **402-410** based on the reporting information in stage **904**, select radio resources for terminal devices based on the distances in stage **908**, and send control signaling to terminal devices **402-410** in stage **910**.

[0056] As scheduler **414** may be deployed in terminal device **402** in these user-side deployments, scheduler **414** may transmit and receive signaling with terminal devices via terminal device **402**. For example, as shown in FIG. **10**, terminal device **402** may include radio communication system **1002** in addition to scheduler **414**. Radio communication system **1002** may include components of terminal device **402** configured to perform radio communications, such as antennas, RF transceivers, and baseband modems. Scheduler **414** may transmit and receive signaling, such as reporting information and control signaling specifying resource allocations, using radio communication system **1002**. For example, when terminal devices **402-410** send reporting information to scheduler **414**, they may send the reporting information to terminal device **402**. Scheduler **414** may then receive the reporting

information via radio communication system **1002**. In the case of terminal device **402**, radio communication system **1002** may provide the reporting information for terminal device **402** to scheduler **414**, which may then use this reporting information in the same manner as the reporting information for terminal devices **404-410**.

[0057] Scheduler **414** may likewise transmit signaling, such as the control signaling of stages **510** and **910**, via radio communication system **1002**. For example, scheduler **414** may transmit the control signaling for terminal devices **404-410** via radio communication system **1002** to terminal device **404-410**. Terminal devices **404-410** may receive their respective control signaling and identify their respectively allocated radio resources. As scheduler **414** may be deployed within terminal device **402**, scheduler **414** may provide the control signaling for terminal device **402** to radio communication system **1002**, which may determine the radio resources allocated to terminal device **402** from the control signaling.

[0058] In some aspects, this user-side deployment of scheduler **414** may be used with vehicular communication use cases such as C-V2X. For example, C-V2X provides a Mode 4 in which vehicles use autonomous resource allocation, e.g., where the vehicles are responsible for allocating radio resources (compared to the network resource allocation of Mode 3).

Accordingly, in an exemplary scenario where terminal devices **402-410** are vehicles, terminal devices **402-410** may provide their reporting information (e.g., position reports and/or radio measurements) to scheduler **414** (e.g., by transmitting the reporting information to terminal device **402**). Scheduler **414** may then select radio resources to allocate to terminal devices **402-410** based on the distances between terminal devices **402-410**, after which scheduler **414** may send control signaling to terminal devices **402-410** that identifies the radio resources respectively allocated to terminal devices **402-410**. Terminal devices **402-410** may then use the radio resources to transmit and receive with C-V2X.

[0059] FIG. 11 shows an exemplary configuration of scheduler **414** according to some aspects, where scheduler **414** includes one or more processors **1102** and memory **1104**. As

previously indicated, in some aspects one or more processors **1102** may be configured to retrieve, from memory **1104**, program code that defines the resource allocation routine as executable instructions. The resource allocation routine may operate according to any principles described herein.

[0060] FIG. 12 shows an exemplary configuration of terminal device **1200** according to some aspects. In various aspects, any vehicle or terminal device shown or described for FIGs. 1-11 may be configured in the manner of or include terminal device **1200**. For example, a vehicle may include terminal device **1200** as part of its communication circuitry, while a standalone terminal device (e.g., a mobile phone, laptop, IoT device, and the like) may be configured in the manner of terminal device **1200** (optionally with additional components).

[0061] As shown in FIG. 12, terminal device **1200** may include antenna system **1202**, RF transceiver **1204**, and baseband modem **1206**. Terminal device **1200** may be configured to transmit and receive radio signals via antenna system **1202**, which may include one or more antennas. RF transceiver **1204** may perform transmit and receive radio processing, such as up RF upmixing/downmixing, ADC/DAC, amplification, and/or any other RF processing. In the receive direction, RF transceiver **1204** may provide received baseband data to baseband modem **1206**, which may perform baseband processing on the received baseband data. In the transmit direction, baseband modem may provide outgoing baseband data to RF transceiver **1204**, which may then transmit the baseband data via antenna system **1202**.

[0062] In some aspects, baseband modem **1206** may include one or more processors configured to execute program code that defines the control operations of terminal device **1200**. For example, with reference to the procedures of flow chart **500** in FIG. 5 and flow chart **900** in FIG. 9, baseband modem **1206** may be configured to execute the described functionality of the various terminal devices. As previously described, this can include collecting and sending reporting information to scheduler **414** (e.g., located in the NW or in another terminal device), receiving and reading control signaling to identify respectively

allocated radio resources, and transmitting/receiving with the allocated radio resources specified in the control signaling. A baseband modem **1206** included in the various terminal devices and/or vehicles may therefore handle such functionality.

[0063] FIG. 13 shows exemplary flow chart **1300** describing operation of terminal device **1200** according to some aspects. In some aspects, baseband modem **1206** of terminal device **1200** may be configured to perform the procedure of flow chart **1300**, such as by executing program code that controls baseband modem **1206** to perform the functionality.

[0064] As shown in FIG. 13, terminal device **1200** may identify a trigger for sending reporting information to scheduler **414** in stage **1302**. In some aspects, scheduler **414** may be configured to transmit a reporting information request to various terminal devices, and terminal device **1200** may be configured to identify the trigger based on receiving a reporting information request from scheduler **414**. In some aspects, terminal device **1200** may identify the trigger autonomously, such as based on a periodic reporting timer (e.g., where the expiry prompts terminal device **1200** to send the reporting information) or based on detection of an environmental condition (e.g., a radio measurement meeting a certain criteria).

[0065] After identifying the trigger in stage **1302**, terminal device **1200** may send the reporting information to scheduler **414** in stage **1304**. In various aspects, the reporting information can include any type of reporting information described above. In some aspects, baseband modem **1206** may perform a radio measurement (e.g., a signal strength measurement) to include in the reporting information. In some aspects, baseband modem **1206** may use a geopositional sensor to determine a position of terminal device **1200**, and may include the position in the reporting information.

[0066] Scheduler **414** may then determine resource allocations, e.g., for multiple terminal devices including terminal device **1200**, as previously described above. Then, terminal device **1200** may receive a control signaling from scheduler **414** in response to the reporting information in stage **1306**. Terminal device **1200** may read the control signaling and

determine the resource allocation for terminal device **1200**. Terminal device **1200** may then transmit and/or receive according to the resource allocation in stage **1308**.

[0067] FIG. **14** shows exemplary method **1400** of allocating radio resources according to some aspects. As shown in FIG. **14**, method **1400** includes identifying a first grouping of terminal devices and a second grouping of terminal devices based on reporting information that indicates terminal device positions (**1402**), selecting first radio resources and second radio resources based on a distance between the first grouping and the second grouping (**1404**), and assigning the first radio resources to the first grouping and assigning the second radio resources to the second grouping (**1406**).

[0068] FIG. **15** shows exemplary method **1500** of allocating radio resources according to some aspects. As shown in FIG. **15**, method **1500** includes receiving reporting information from a plurality of terminal devices that indicates distances between the plurality of terminal devices (**1502**), selecting, for the plurality of terminal devices, respective radio resources that are separated in time or frequency depending on the distances between the plurality of terminal devices indicated by the reporting information (**1504**), and assigning the respective radio resources to the plurality of terminal devices (**1506**).

[0069] While the above descriptions and connected figures may depict electronic device components as separate elements, skilled persons will appreciate the various possibilities to combine or integrate discrete elements into a single element. Such may include combining two or more circuits for form a single circuit, mounting two or more circuits onto a common chip or chassis to form an integrated element, executing discrete software components on a common processor core, etc. Conversely, skilled persons will recognize the possibility to separate a single element into two or more discrete elements, such as splitting a single circuit into two or more separate circuits, separating a chip or chassis into discrete elements originally provided thereon, separating a software component into two or more sections and executing each on a separate processor core, etc.

[0070] It is appreciated that implementations of methods detailed herein are demonstrative in nature, and are thus understood as capable of being implemented in a corresponding device. Likewise, it is appreciated that implementations of devices detailed herein are understood as capable of being implemented as a corresponding method. It is thus understood that a device corresponding to a method detailed herein may include one or more components configured to perform each aspect of the related method.

[0071] All acronyms defined in the above description additionally hold in all claims included herein.

[0072] The following examples pertain to further aspects of this disclosure:

[0073] Example 1 is a method of allocating radio resources, the method including identifying a first grouping of terminal devices and a second grouping of terminal devices based on reporting information that indicates terminal device positions, selecting first radio resources and second radio resources based on a distance between the first grouping and the second grouping, and assigning the first radio resources to the first grouping and assigning the second radio resources to the second grouping.

[0074] In Example 2, the subject matter of Example 1 can optionally include wherein identifying the first grouping of terminal devices and the second grouping of terminal devices includes determining a distance between a first terminal device and a second terminal device based on the reporting information, and determining that the distance is less than a predefined distance, and identifying the first and second terminal device as the first grouping.

[0075] In Example 3, the subject matter of Example 2 can optionally include wherein the reporting information includes position reports from the first terminal device and the second terminal device that indicate their positions, and wherein determining the distance between the first terminal device and the second terminal device includes comparing their positions to determine the distance.

[0076] In Example 4, the subject matter of Example 2 can optionally include wherein the reporting information includes a received signal strength between the first terminal device and the second terminal device, and wherein determining the distance between the first terminal device and the second terminal device includes estimating the distance based on the received signal strength.

[0077] In Example 5, the subject matter of Example 1 can optionally include wherein the reporting information includes a received signal strength between the first terminal device and the second terminal device, and wherein identifying the first grouping of terminal devices and the second grouping of terminal devices based on the reporting information includes determining that the received signal strength between the first terminal device and the second terminal device is greater than a predefined signal strength threshold, and identifying the first and second terminal device as the first grouping.

[0078] In Example 6, the subject matter of any one of Examples 1 to 5 can optionally include wherein the reporting information includes position reports or received signal strength measurements from the first grouping of terminal devices and the second grouping of terminal devices.

[0079] In Example 7, the subject matter of any one of Examples 1 to 6 can optionally include wherein selecting the first and second radio resources based on the distance between the first and the second grouping includes selecting radio resources that are separated in time or frequency depending on the distance between the first grouping and the second grouping.

[0080] In Example 8, the subject matter of any one of Examples 1 to 7 can optionally include wherein assigning the first radio resources to the first grouping and assigning the second radio resources to the second grouping includes transmitting control signaling to the first grouping that specifies the first radio resources and transmitting control signaling to the second grouping that specifies the second radio resources.

[0081] In Example 9, the subject matter of Example 8 can optionally include wherein transmitting the control signaling to the first grouping includes transmitting the control signaling via a network access node.

[0082] In Example 10, the subject matter of Example 8 can optionally include wherein transmitting the control signaling to the first grouping includes transmitting the control signaling via a radio communication system of a terminal device.

[0083] In Example 11, the subject matter of any one of Examples 1 to 10 can optionally further include identifying a third grouping of terminal devices that is closer to the second grouping of the terminal devices than the first grouping of terminal devices, selecting third radio resources based on distances between the first grouping, the second grouping, and the third grouping, and assigning the third radio resources to the third grouping.

[0084] In Example 12, the subject matter of Example 11 can optionally include wherein selecting the third radio resources includes selecting, as the third radio resources, radio resources that are closer to the second radio resources than the first radio resources.

[0085] Example 13 is a method of allocating radio resources, the method including receiving reporting information from a plurality of terminal devices that indicates distances between the plurality of terminal devices, selecting, for the plurality of terminal devices, respective radio resources that are separated in time or frequency depending on the distances between the plurality of terminal devices indicated by the reporting information, and assigning the respective radio resources to the plurality of terminal devices.

[0086] In Example 14, the subject matter of Example 13 can optionally include wherein the reporting information includes position reports from the plurality of terminal devices or received signal strength measurements between the plurality of terminal devices.

[0087] In Example 15, the subject matter of Example 13 or 14 can optionally further include determining the distances between the plurality of terminal devices based on the reporting information.

[0088] In Example 16, the subject matter of Example 15 can optionally include wherein the reporting information includes position reports for the plurality of terminal devices, and wherein determining the distances between the plurality of terminal devices includes determining the distances between the terminal devices with the position reports.

[0089] In Example 17, the subject matter of Example 15 can optionally include wherein the reporting information includes received signal strength measurements between the plurality of terminal devices, and wherein determining the distances between the plurality of terminal devices based on the reporting information includes estimating the distances between the plurality of terminal devices based on the received signal strength measurements.

[0090] In Example 18, the subject matter of Example 13 can optionally include wherein the reporting information includes received signal strength measurements between the terminal devices that indicate the distances between the terminal devices, and wherein selecting the respective radio resources includes selecting the respective radio resources based on the distances indicated by the received signal strength measurements.

[0091] In Example 19, the subject matter of any one of Examples 13 to 18 can optionally include wherein the plurality of terminal devices include a first terminal device, a second terminal device, and a third terminal device that is closer to the second terminal device than the first terminal device, and wherein selecting, for the plurality of terminal devices, the respective radio resources includes selecting radio resources for the third terminal device that are closer to radio resources for the second terminal device than the radio resources for the first terminal device.

[0092] In Example 20, the subject matter of any one of Examples 13 to 19 can optionally include wherein assigning the respective radio resources to the plurality of terminal devices includes transmitting control signaling to the plurality of terminal devices that specifies the respective radio resources selected for the plurality of terminal devices.

[0093] In Example 21, the subject matter of Example 20 can optionally include wherein transmitting the control signaling to the plurality of terminal devices includes transmitting the control signaling via a network access node.

[0094] In Example 22, the subject matter of Example 20 can optionally include wherein transmitting the control signaling includes transmitting the control signaling via a radio communication system of a terminal device.

[0095] Example 23 is a scheduler device including one or more processors configured to identify a first grouping of terminal devices and a second grouping of terminal devices based on reporting information that indicates terminal device positions, select first radio resources and second radio resources based on a distance between the first grouping and the second grouping, and assign the first radio resources to the first grouping and assign the second radio resources to the second grouping.

[0096] In Example 24, the subject matter of Example 23 can optionally include wherein the one or more processors are configured to identify the first grouping of terminal devices and the second grouping of terminal devices by determining a distance between a first terminal device and a second terminal device based on the reporting information, determining that the distance is less than a predefined distance, and identifying the first and second terminal device as the first grouping.

[0097] In Example 25, the subject matter of Example 24 can optionally include wherein the reporting information includes position reports from the first terminal device and the second terminal device that indicate their positions, and wherein the one or more processors are configured to determine the distance between the first terminal device and the second terminal device by comparing their positions to determine the distance.

[0098] In Example 26, the subject matter of Example 24 can optionally include wherein the reporting information includes a received signal strength between the first terminal device and the second terminal device, and wherein the one or more processors are configured to

determine the distance between the first terminal device and the second terminal device by estimating the distance based on the received signal strength.

[0099] In Example 27, the subject matter of Example 23 can optionally include wherein the reporting information includes a received signal strength between the first terminal device and the second terminal device, and wherein the one or more processors are configured to identify the first grouping of terminal devices and the second grouping of terminal devices based on the reporting information by determining that the received signal strength between the first terminal device and the second terminal device is greater than a predefined signal strength threshold and identifying the first and second terminal device as the first grouping.

[0100] In Example 28, the subject matter of any one of Examples 23 to 27 can optionally include wherein the reporting information includes position reports or received signal strength measurements from the first grouping of terminal devices and the second grouping of terminal devices.

[0101] In Example 29, the subject matter of any one of Examples 23 to 28 can optionally include wherein the one or more processors are configured to select the first and second radio resources based on the distance between the first and the second grouping by selecting radio resources that are separated in time or frequency depending on the distance between the first grouping and the second grouping.

[0102] In Example 30, the subject matter of any one of Examples 23 to 29 can optionally include wherein the one or more processors are configured to assign the first radio resources to the first grouping and assigning the second radio resources to the second grouping by transmitting control signaling to the first grouping that specifies the first radio resources and transmitting control signaling to the second grouping that specifies the second radio resources.

[0103] In Example 31, the subject matter of Example 30 can optionally include wherein the one or more processors are configured to transmit the control signaling to the first grouping by transmitting the control signaling via a network access node.

[0104] In Example 32, the subject matter of Example 30 can optionally include wherein the one or more processors are configured to transmit the control signaling to the first grouping by transmitting the control signaling via a radio communication system of a terminal device.

[0105] In Example 33, the subject matter of any one of Examples 23 to 32 can optionally include wherein the one or more processors are further configured to identify a third grouping of terminal devices that is closer to the second grouping of the terminal devices than the first grouping of terminal devices, select third radio resources based on distances between the first grouping, the second grouping, and the third grouping, and assign the third radio resources to the third grouping.

[0106] In Example 34, the subject matter of Example 33 can optionally include wherein the one or more processors are configured to select, as the third radio resources, radio resources that are closer to the second radio resources than the first radio resources.

[0107] Example 35 is a scheduler device including one or more processors configured to receive reporting information from a plurality of terminal devices that indicates distances between the plurality of terminal devices, select, for the plurality of terminal devices, respective radio resources that are separated in time or frequency depending on the distances between the plurality of terminal devices indicated by the reporting information, and assign the respective radio resources to the plurality of terminal devices.

[0108] In Example 36, the subject matter of Example 35 can optionally include wherein the reporting information includes position reports from the plurality of terminal devices or received signal strength measurements between the plurality of terminal devices.

[0109] In Example 37, the subject matter of Example 35 or 36 can optionally include wherein the one or more processors are further configured to determine distances between the plurality of terminal devices based on the reporting information.

[0110] In Example 38, the subject matter of Example 37 can optionally include wherein the reporting information includes position reports for the plurality of terminal devices, and

wherein the one or more processors are configured to determine the distances between the plurality of terminal devices by determining the distances between the terminal devices with the position reports.

[0111] In Example 39, the subject matter of Example 37 can optionally include wherein the reporting information includes received signal strength measurements between the plurality of terminal devices, and wherein the one or more processors are configured to determine the distances between the plurality of terminal devices by estimating the distances between the plurality of terminal devices based on the received signal strength measurements.

[0112] In Example 40, the subject matter of Example 35 can optionally include wherein the reporting information includes received signal strength measurements between the terminal devices that indicate the distances between the terminal devices, and wherein the one or more processors are configured to select the respective radio resources by selecting the respective radio resources based on the distances indicated by the received signal strength measurements.

[0113] In Example 41, the subject matter of any one of Examples 35 to 40 can optionally include wherein the plurality of terminal devices include a first terminal device, a second terminal device, and a third terminal device that is closer to the second terminal device than the first terminal device, and wherein the one or more processors are configured to select, for the plurality of terminal devices, the respective radio resources by selecting radio resources for the third terminal device that are closer to radio resources for the second terminal device than the radio resources for the first terminal device.

[0114] In Example 42, the subject matter of any one of Examples 35 to 41 can optionally include wherein the one or more processors are configured to assign the respective radio resources to the plurality of terminal devices by transmitting control signaling to the plurality of terminal devices that specifies the respective radio resources selected for the plurality of terminal devices.

[0115] In Example 43, the subject matter of Example 42 can optionally include wherein the one or more processors are configured to transmit the control signaling to the plurality of terminal devices by transmitting the control signaling via a network access node.

[0116] In Example 44, the subject matter of Example 42 can optionally include wherein the one or more processors are configured to transmit the control signaling by transmitting the control signaling via a radio communication system of a terminal device.

[0117] Example 45 is a terminal device including a radio communication system and the scheduler device of any one of Examples 23 to 44.

[0118] Example 46 is a network access node including the scheduler device of any one of Examples 23 to 44.

[0119] Example 47 is a non-transitory computer readable medium storing instructions that when executed by one or more processors cause the one or more processors to perform the method of any one of Examples 1 to 22.

[0120] Example 48 is a device including one or more processors, and a memory storing instructions that when executed by the one or more processors cause the one or more processors to perform the method of any one of Examples 1 to 22.

[0121] Example 49 is a terminal device including one or more processors configured to identify a trigger for sending reporting information to a scheduler, send the reporting information to the scheduler, where the reporting information indicates a position of the terminal device, receive, in response to the reporting information, control signaling from the scheduler that indicates a resource allocation, and transmit or receive according to the resource allocation.

[0122] In Example 50, the subject matter of Example 49 can optionally further include one or more antennas and a radio frequency (RF) transceiver, wherein the one or more processors are configured to transmit or receive according to the resource allocation via the one or more antennas and the RF transceiver.

[0123] In Example 51, the subject matter of Example 49 or 50 can optionally include wherein the one or more processors are configured to identify the trigger for sending the reporting information by receiving a reporting information request from the scheduler.

[0124] In Example 52, the subject matter of any one of Examples 49 to 51 can optionally include wherein the one or more processors are further configured to perform a signal strength measurement, and to include the signal strength measurement in the reporting information.

[0125] In Example 53, the subject matter of any one of Examples 49 to 52 can optionally include wherein the one or more processors are further configured to use a geopositional sensor to determine a position of the terminal device and to include the position in the reporting information.

[0126] Example 54 is a method of operating a terminal device, the method including identifying a trigger for sending reporting information to a scheduler, sending the reporting information to the scheduler, where the reporting information indicates a position of the terminal device, receiving, in response to the reporting information, control signaling from the scheduler that indicates a resource allocation, and transmitting or receiving according to the resource allocation.

[0127] In Example 55, the subject matter of Example 54 can optionally include wherein transmitting or receiving according to the resource allocation includes transmitting or receiving via the one or more antennas and the RF transceiver.

[0128] In Example 56, the subject matter of Example 54 or 55 can optionally include wherein identifying the trigger for sending the reporting information includes receiving a reporting information request from the scheduler.

[0129] In Example 57, the subject matter of any one of Examples 54 to 56 can optionally further include performing a signal strength measurement and including the signal strength measurement in the reporting information.

[0130] In Example 58, the subject matter of any one of Examples 54 to 57 can optionally further include using a geopositional sensor to determine a position of the terminal device and including the position in the reporting information.

[0131] Example 59 is a non-transitory computer readable medium storing instructions that, when executed by one or more processors, cause the one or more processors to perform a method of allocating radio resources including identifying a first grouping of terminal devices and a second grouping of terminal devices based on reporting information that indicates terminal device positions, selecting first radio resources and second radio resources based on a distance between the first grouping and the second grouping, and assigning the first radio resources to the first grouping and assigning the second radio resources to the second grouping.

[0132] In Example 60, the subject matter of Example 59 can optionally include wherein identifying the first grouping of terminal devices and the second grouping of terminal devices includes determining a distance between a first terminal device and a second terminal device based on the reporting information, and determining that the distance is less than a predefined distance, and identifying the first and second terminal device as the first grouping.

[0133] In Example 61, the subject matter of Example 60 can optionally include wherein the reporting information includes position reports from the first terminal device and the second terminal device that indicate their positions, and wherein determining the distance between the first terminal device and the second terminal device includes comparing their positions to determine the distance.

[0134] In Example 62, the subject matter of Example 60 can optionally include wherein the reporting information includes a received signal strength between the first terminal device and the second terminal device, and wherein determining the distance between the first terminal device and the second terminal device includes estimating the distance based on the received signal strength.

[0135] In Example 63, the subject matter of Example 59 can optionally include wherein the reporting information includes a received signal strength between the first terminal device and the second terminal device, and wherein identifying the first grouping of terminal devices and the second grouping of terminal devices based on the reporting information includes determining that the received signal strength between the first terminal device and the second terminal device is greater than a predefined signal strength threshold, and identifying the first and second terminal device as the first grouping.

[0136] In Example 64, the subject matter of any one of Examples 59 to 63 can optionally include wherein the reporting information includes position reports or received signal strength measurements from the first grouping of terminal devices and the second grouping of terminal devices.

[0137] In Example 65, the subject matter of any one of Examples 59 to 64 can optionally include wherein selecting the first and second radio resources based on the distance between the first and the second grouping includes selecting radio resources that are separated in time or frequency depending on the distance between the first grouping and the second grouping.

[0138] In Example 66, the subject matter of any one of Examples 59 to 65 can optionally include wherein assigning the first radio resources to the first grouping and assigning the second radio resources to the second grouping includes transmitting control signaling to the first grouping that specifies the first radio resources and transmitting control signaling to the second grouping that specifies the second radio resources.

[0139] In Example 67, the subject matter of Example 66 can optionally include wherein transmitting the control signaling to the first grouping includes transmitting the control signaling via a network access node.

[0140] In Example 68, the subject matter of Example 66 can optionally include wherein transmitting the control signaling to the first grouping includes transmitting the control signaling via a radio communication system of a terminal device.

[0141] In Example 69, the subject matter of any one of Examples 59 to 68 can optionally further include identifying a third grouping of terminal devices that is closer to the second grouping of the terminal devices than the first grouping of terminal devices, selecting third radio resources based on distances between the first grouping, the second grouping, and the third grouping, and assigning the third radio resources to the third grouping.

[0142] In Example 70, the subject matter of Example 69 can optionally include wherein selecting the third radio resources includes selecting, as the third radio resources, radio resources that are closer to the second radio resources than the first radio resources.

[0143] While the invention has been particularly shown and described with reference to specific embodiments, it should be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention as defined by the appended claims. The scope of the invention is thus indicated by the appended claims and all changes which come within the meaning and range of equivalency of the claims are therefore intended to be embraced.

Claims

What is claimed is:

1. A scheduler device comprising:
one or more processors configured to:
identify a first grouping of terminal devices and a second grouping of terminal devices based on reporting information that indicates terminal device positions;
select first radio resources and second radio resources based on a distance between the first grouping and the second grouping; and
assign the first radio resources to the first grouping and assign the second radio resources to the second grouping.
2. The scheduler device of claim 1, wherein the one or more processors are configured to identify the first grouping of terminal devices and the second grouping of terminal devices by determining a distance between a first terminal device and a second terminal device based on the reporting information, determining that the distance is less than a predefined distance, and identifying the first and second terminal device as the first grouping.
3. The scheduler device of claim 2, wherein the reporting information comprises position reports from the first terminal device and the second terminal device that indicate their positions, and wherein the one or more processors are configured to determine the distance between the first terminal device and the second terminal device by comparing their positions to determine the distance.

4. The scheduler device of claim 1, wherein the reporting information comprises a received signal strength between the first terminal device and the second terminal device, and wherein the one or more processors are configured to identify the first grouping of terminal devices and the second grouping of terminal devices based on the reporting information by determining that the received signal strength between the first terminal device and the second terminal device is greater than a predefined signal strength threshold and identifying the first and second terminal device as the first grouping.

5. The scheduler device of any one of claims 1 to 4, wherein the one or more processors are configured to select the first and second radio resources based on the distance between the first and the second grouping by selecting radio resources that are separated in time or frequency depending on the distance between the first grouping and the second grouping.

6. The scheduler device of any one of claims 1 to 4, wherein the one or more processors are configured to assign the first radio resources to the first grouping and assigning the second radio resources to the second grouping by transmitting control signaling to the first grouping that specifies the first radio resources and transmitting control signaling to the second grouping that specifies the second radio resources.

7. The scheduler device of claim 6, wherein the one or more processors are configured to transmit the control signaling to the first grouping by transmitting the control signaling via a network access node.

8. The scheduler device of claim 6, wherein the one or more processors are configured to transmit the control signaling to the first grouping by transmitting the control signaling via a radio communication system of a terminal device.

9. The scheduler device of any one of claims 1 to 4, wherein the one or more processors are further configured to:

identify a third grouping of terminal devices that is closer to the second grouping of the terminal devices than the first grouping of terminal devices;

select third radio resources based on distances between the first grouping, the second grouping, and the third grouping; and

assign the third radio resources to the third grouping.

10. The scheduler device of claim 9, wherein the one or more processors are configured to select, as the third radio resources, radio resources that are closer to the second radio resources than the first radio resources.

11. A scheduler device comprising:

one or more processors configured to:

receive reporting information from a plurality of terminal devices that indicates distances between the plurality of terminal devices;

select, for the plurality of terminal devices, respective radio resources that are separated in time or frequency depending on the distances between the plurality of terminal devices indicated by the reporting information; and

assign the respective radio resources to the plurality of terminal devices.

12. The scheduler device of claim 11, wherein the one or more processors are further configured to determine distances between the plurality of terminal devices based on the reporting information.

13. The scheduler device of claim 11 or 12, wherein the plurality of terminal devices comprise a first terminal device, a second terminal device, and a third terminal device that is closer to the second terminal device than the first terminal device,

and wherein the one or more processors are configured to select, for the plurality of terminal devices, the respective radio resources by selecting radio resources for the third terminal device that are closer to radio resources for the second terminal device than the radio resources for the first terminal device.

14. A method of allocating radio resources, the method comprising:

identifying a first grouping of terminal devices and a second grouping of terminal devices based on reporting information that indicates terminal device positions;

selecting first radio resources and second radio resources based on a distance between the first grouping and the second grouping; and

assigning the first radio resources to the first grouping and assigning the second radio resources to the second grouping.

15. The method of claim 14, wherein identifying the first grouping of terminal devices and the second grouping of terminal devices comprises:

determining a distance between a first terminal device and a second terminal device based on the reporting information; and

determining that the distance is less than a predefined distance; and

identifying the first and second terminal device as the first grouping.

16. The method of claim 15, wherein the reporting information comprises position reports from the first terminal device and the second terminal device that indicate their

positions, and wherein determining the distance between the first terminal device and the second terminal device comprises comparing their positions to determine the distance.

17. The method of claim 15, wherein the reporting information comprises a received signal strength between the first terminal device and the second terminal device, and wherein determining the distance between the first terminal device and the second terminal device comprises estimating the distance based on the received signal strength.

18. The method of any one of claims 14 to 17, wherein selecting the first and second radio resources based on the distance between the first and the second grouping comprises selecting radio resources that are separated in time or frequency depending on the distance between the first grouping and the second grouping.

19. The method of any one of claims 14 to 17, further comprising:
identifying a third grouping of terminal devices that is closer to the second grouping of the terminal devices than the first grouping of terminal devices;
selecting third radio resources based on distances between the first grouping, the second grouping, and the third grouping; and
assigning the third radio resources to the third grouping.

20. The method of claim 19, wherein selecting the third radio resources comprises selecting, as the third radio resources, radio resources that are closer to the second radio resources than the first radio resources.

21. A method of allocating radio resources, the method comprising:

receiving reporting information from a plurality of terminal devices that indicates distances between the plurality of terminal devices;

selecting, for the plurality of terminal devices, respective radio resources that are separated in time or frequency depending on the distances between the plurality of terminal devices indicated by the reporting information; and

assigning the respective radio resources to the plurality of terminal devices.

22. The method of claim 21, wherein the reporting information comprises position reports from the plurality of terminal devices or received signal strength measurements between the plurality of terminal devices.

23. The method of claim 21 or 22, further comprising:
determining the distances between the plurality of terminal devices based on the reporting information.

24. The method of claim 21 or 22, wherein the plurality of terminal devices comprise a first terminal device, a second terminal device, and a third terminal device that is closer to the second terminal device than the first terminal device,

and wherein selecting, for the plurality of terminal devices, the respective radio resources comprises:

selecting radio resources for the third terminal device that are closer to radio resources for the second terminal device than the radio resources for the first terminal device.

25. A non-transitory computer readable medium storing instructions that, when executed by one or more processors, cause the one or more processors to perform a method of allocating radio resources comprising:

identifying a first grouping of terminal devices and a second grouping of terminal devices based on reporting information that indicates terminal device positions;

selecting first radio resources and second radio resources based on a distance between the first grouping and the second grouping; and

assigning the first radio resources to the first grouping and assigning the second radio resources to the second grouping.

FIG 1



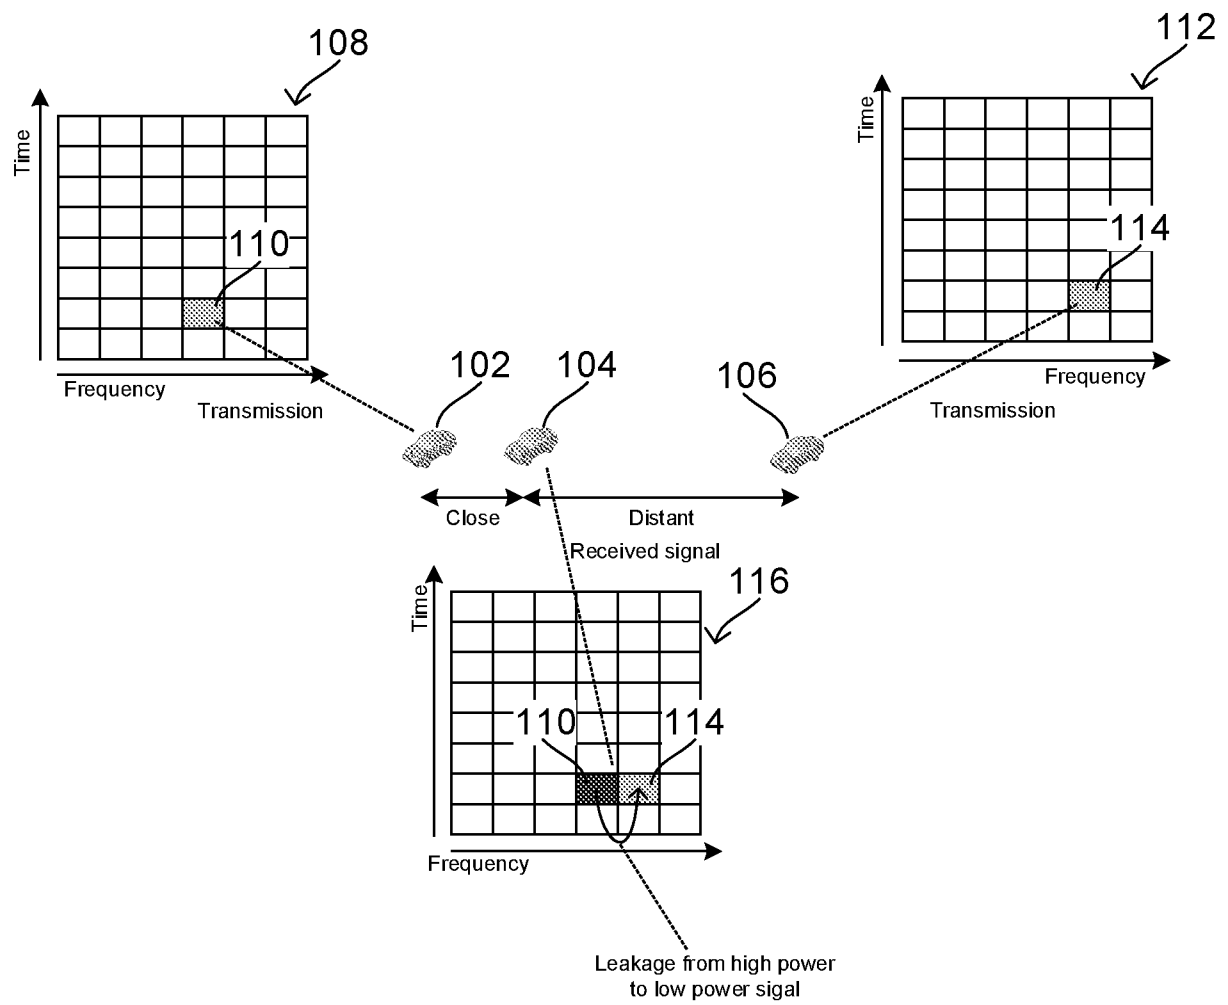


FIG 2

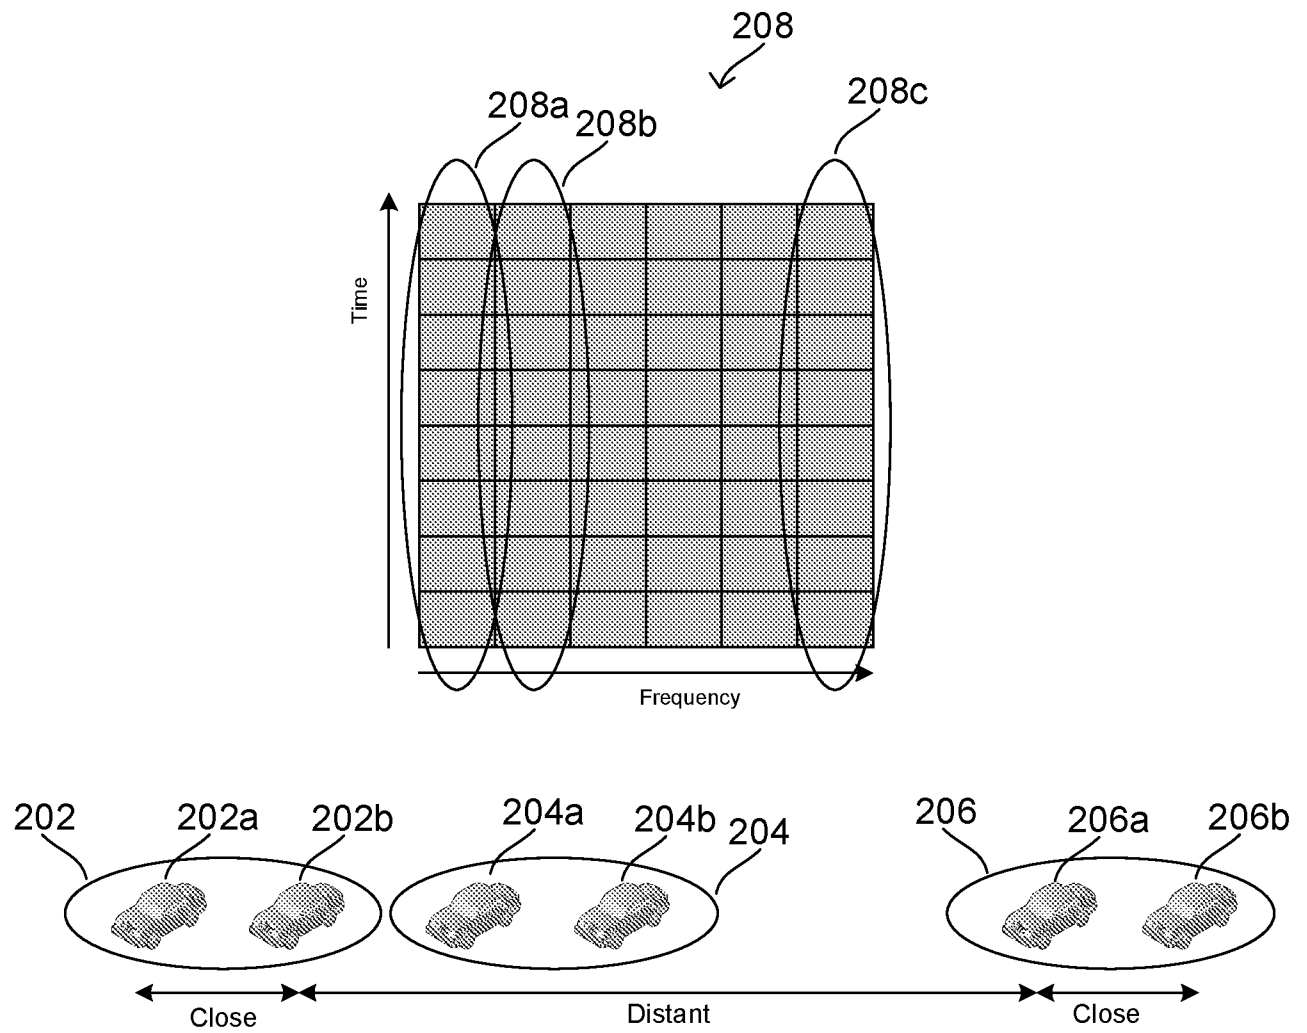


3/15

FIG 3

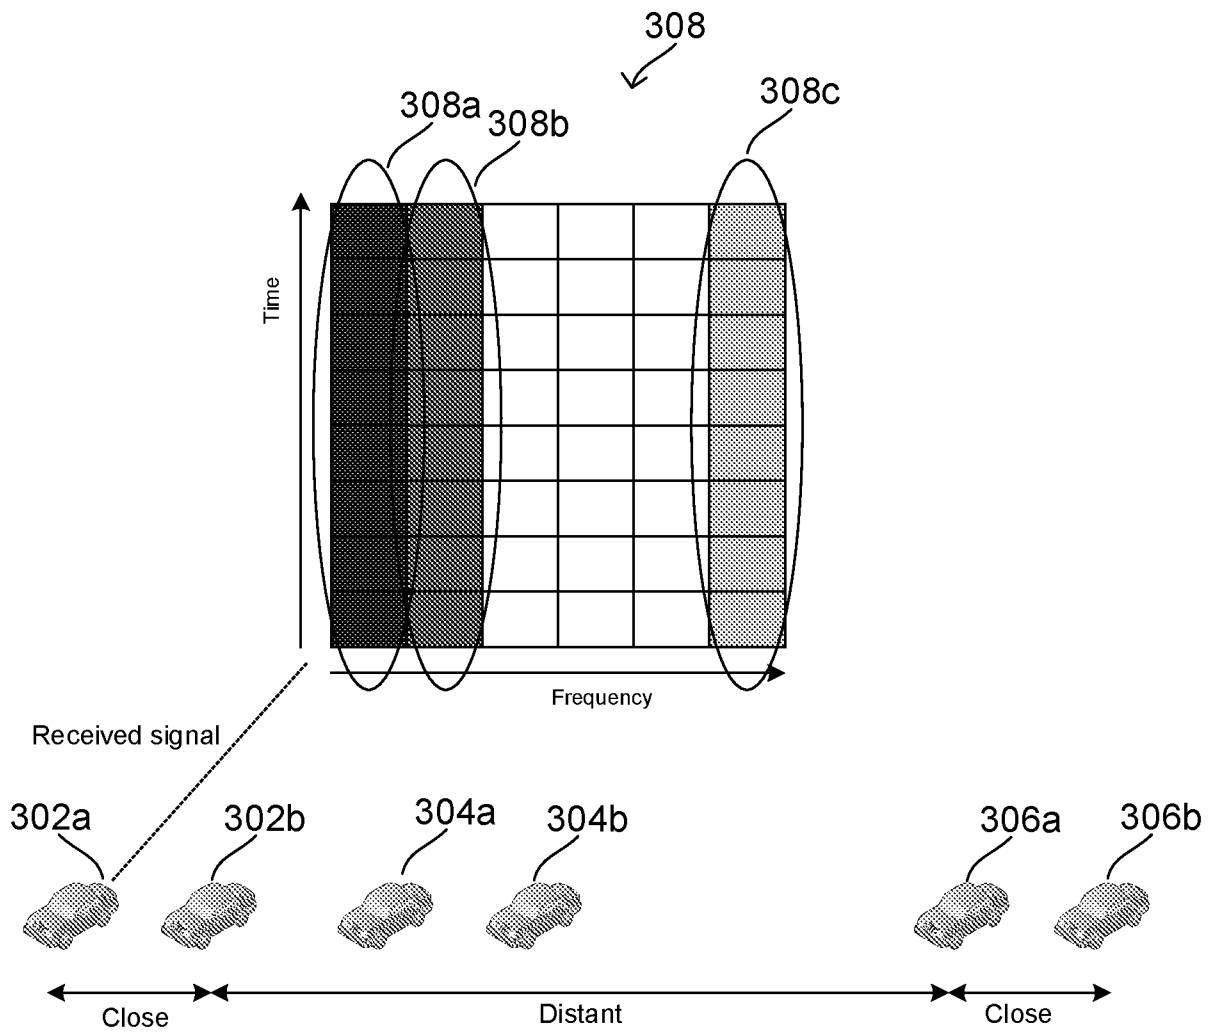


4/15

FIG 4

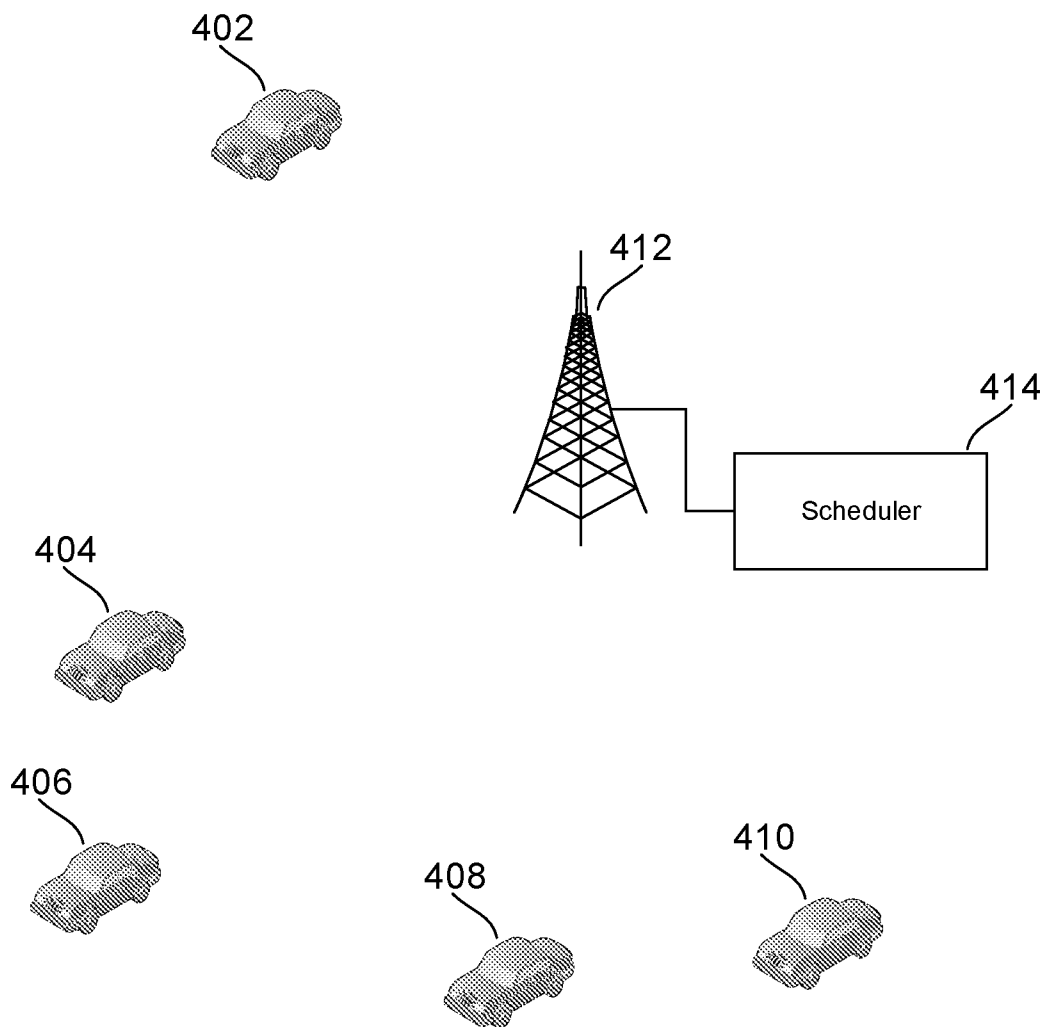


5/15

FIG 5

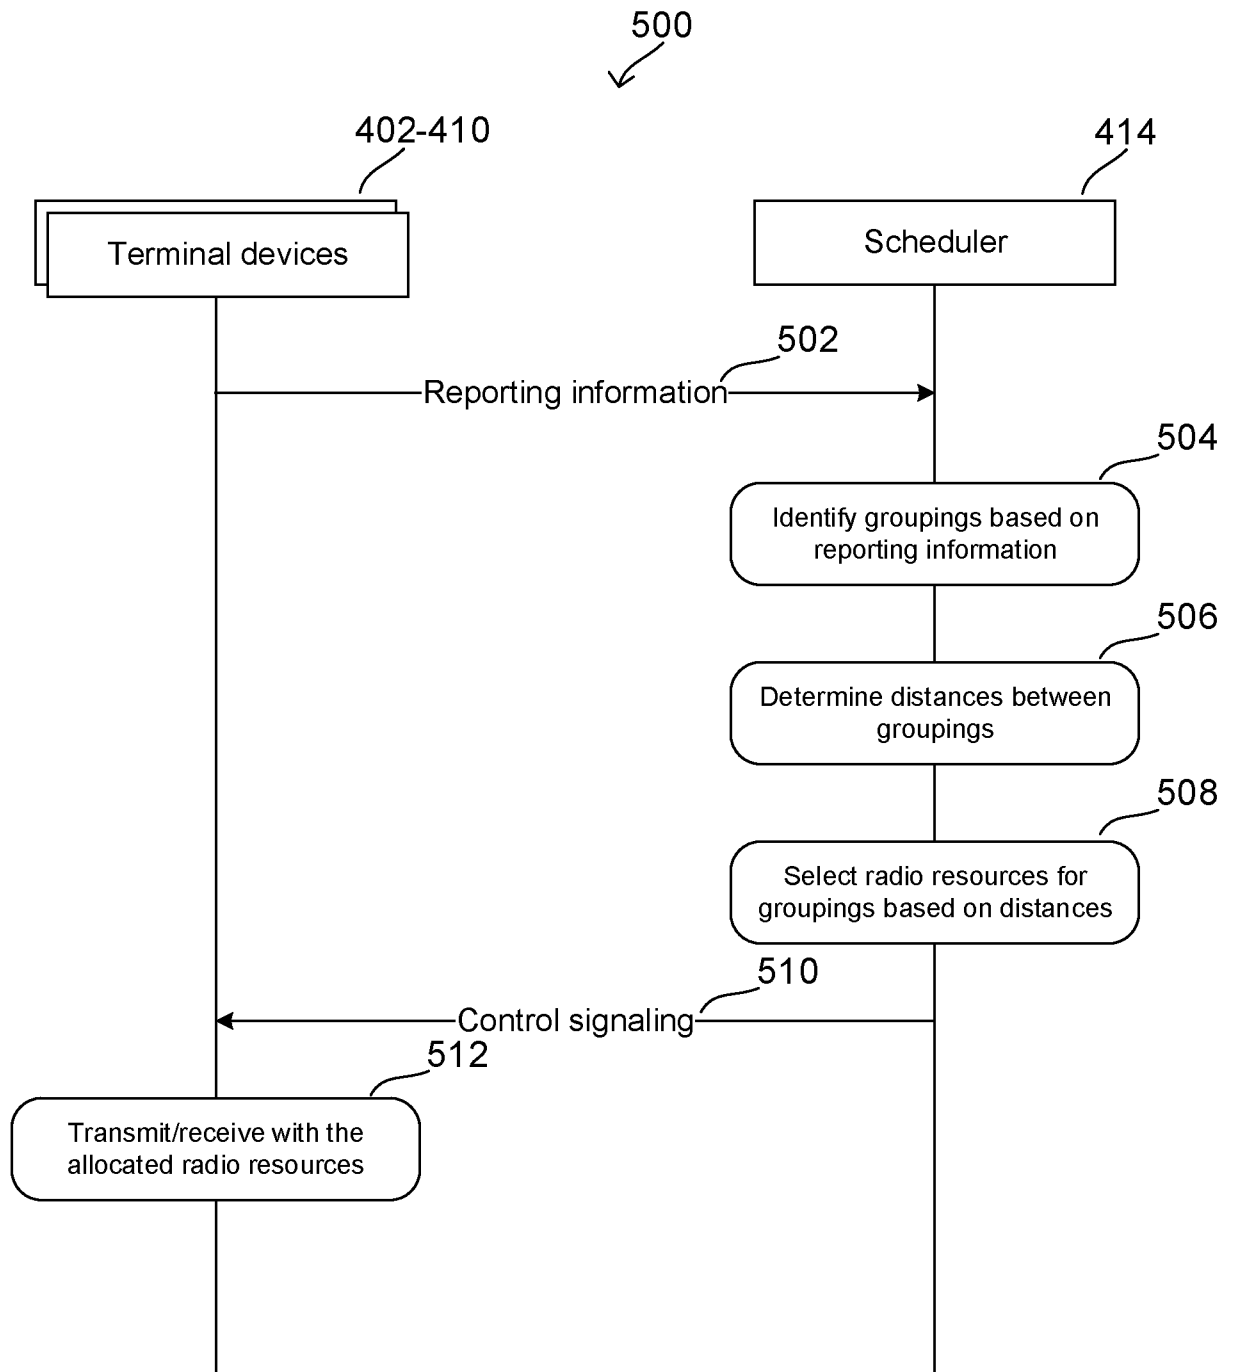

6/15

FIG 6

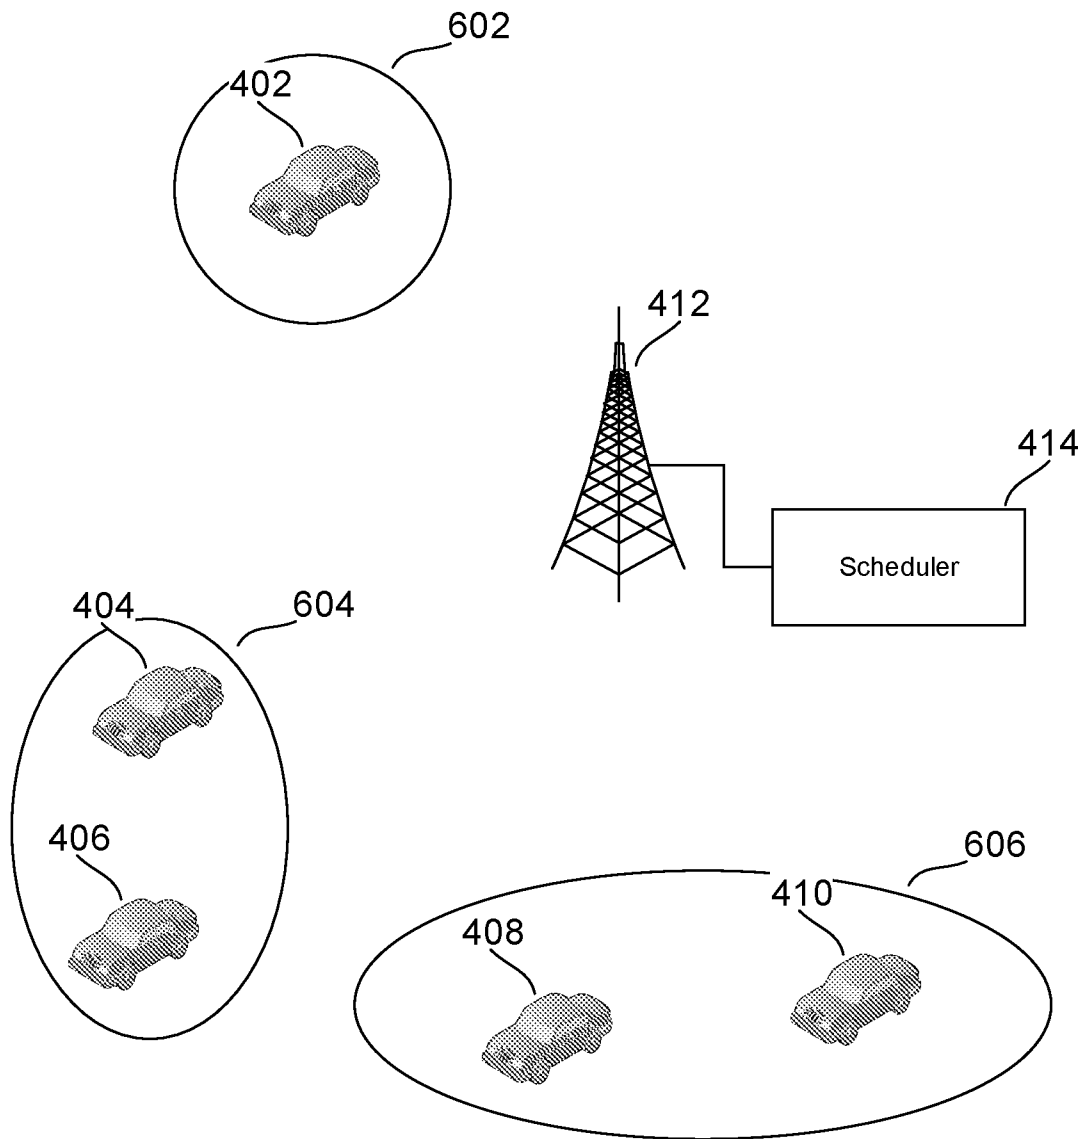

7/15

FIG 7



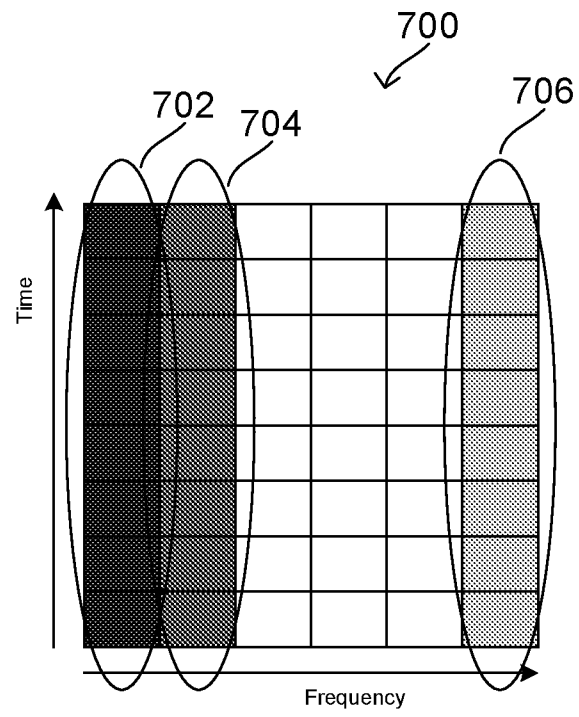


FIG 8

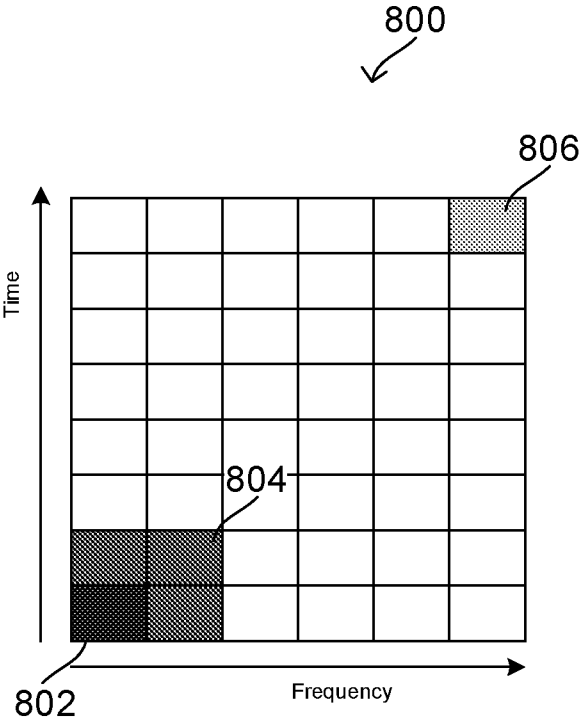


9/15

FIG 9

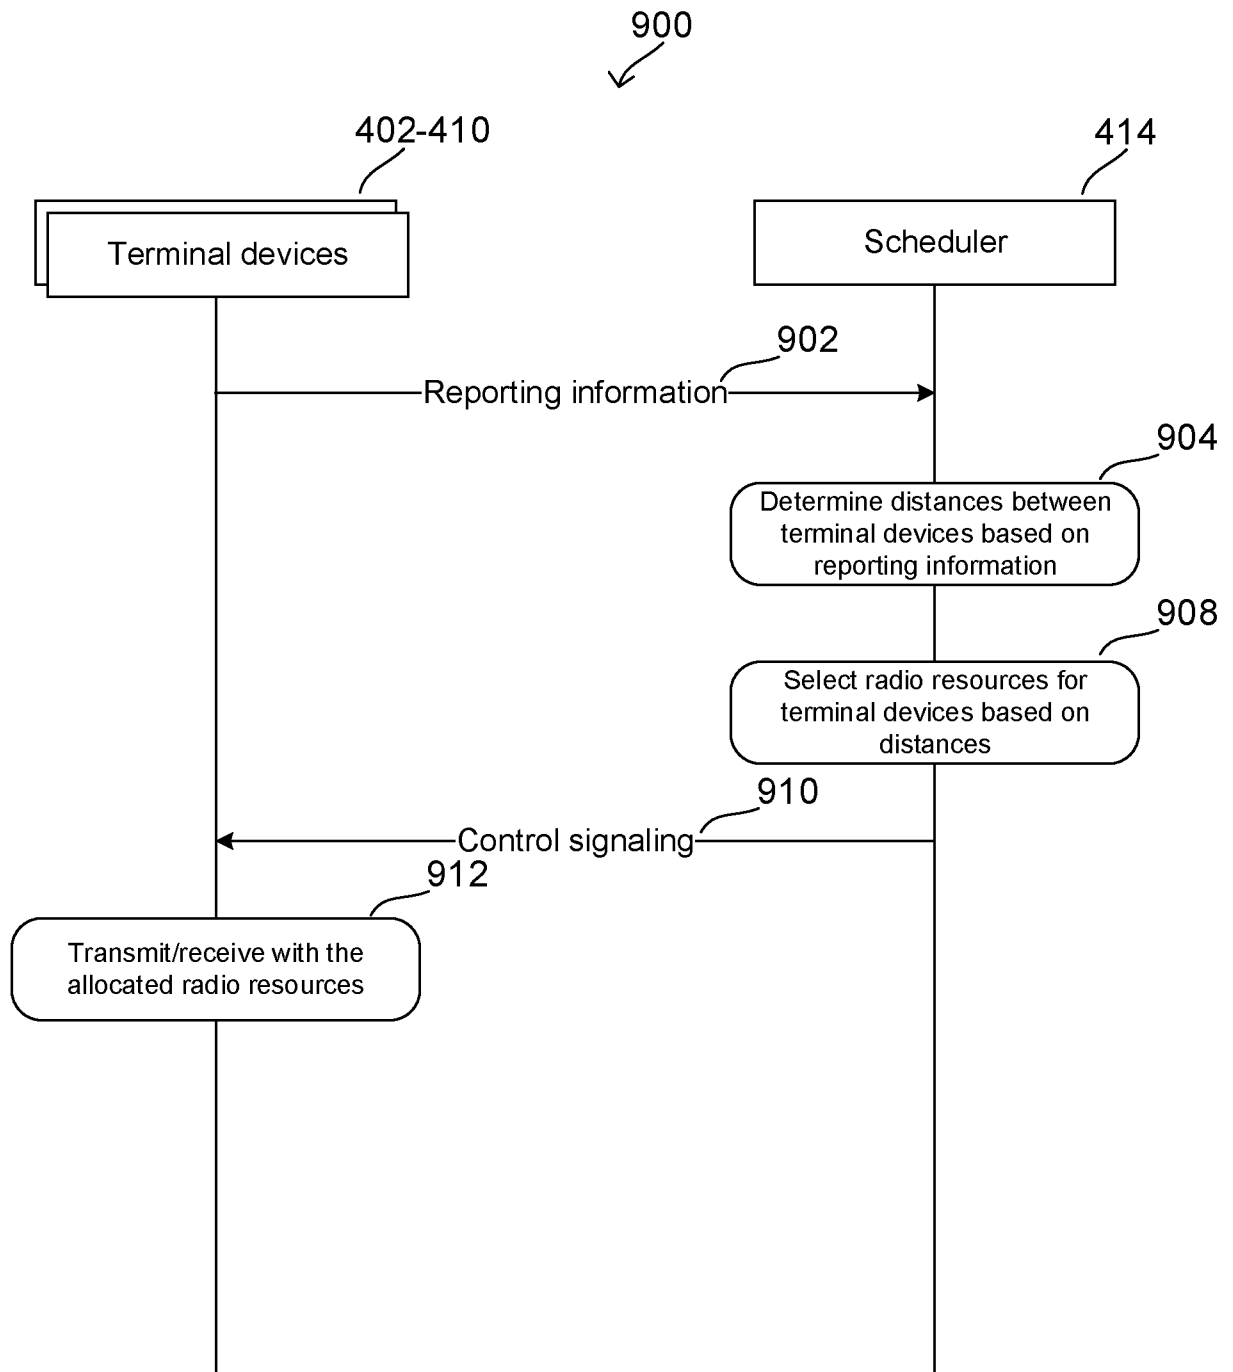


10/15

FIG 10

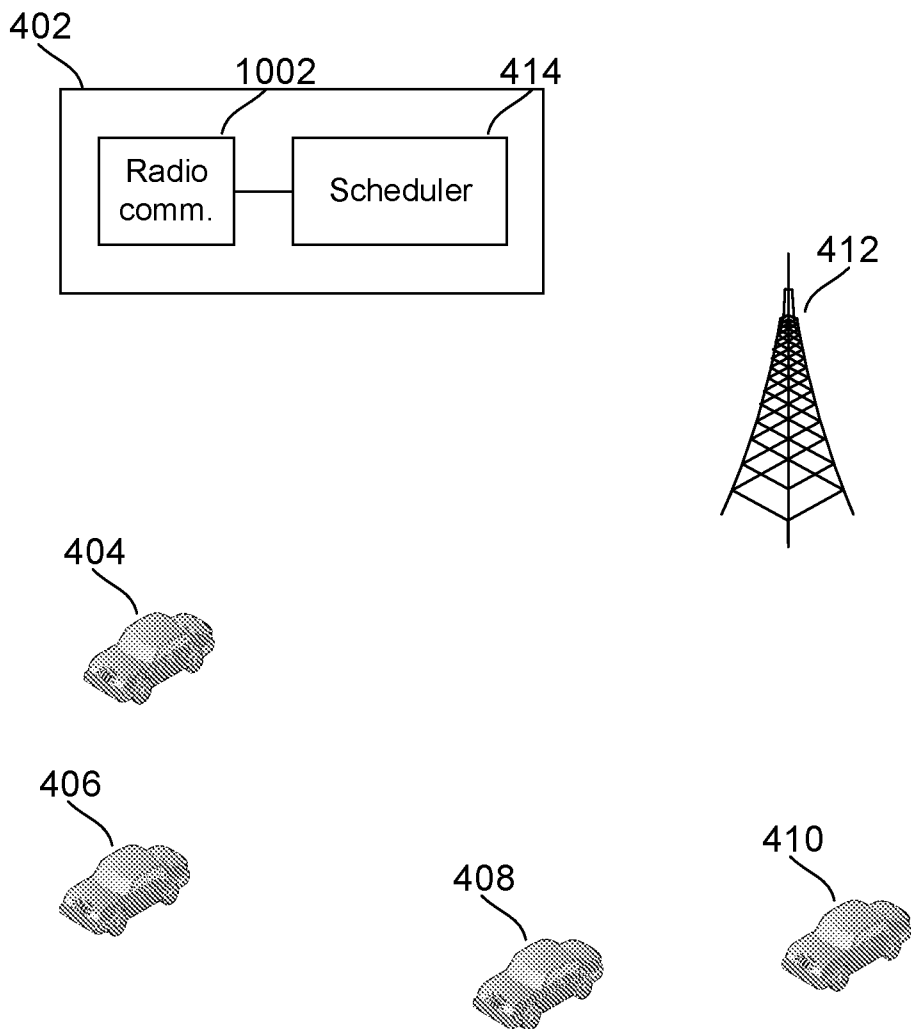


11/15

FIG 11

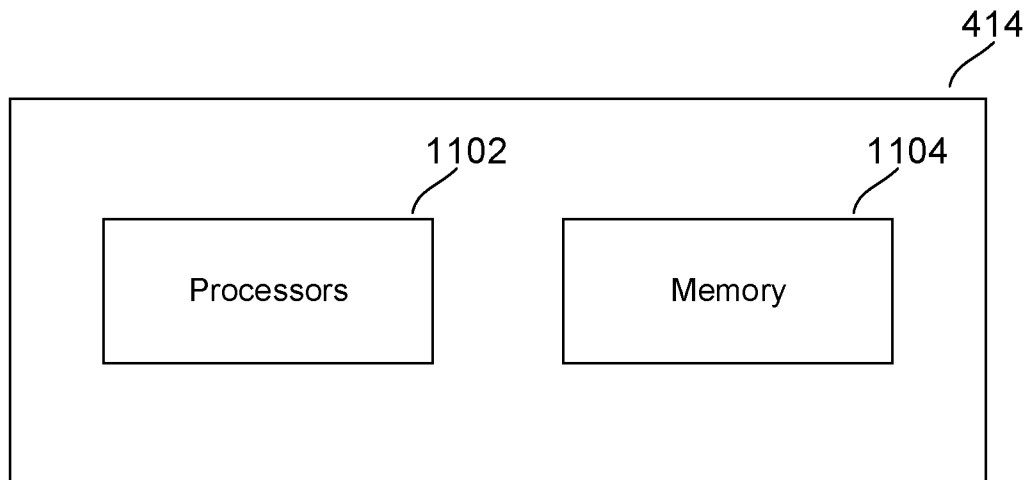


12/15

FIG 12

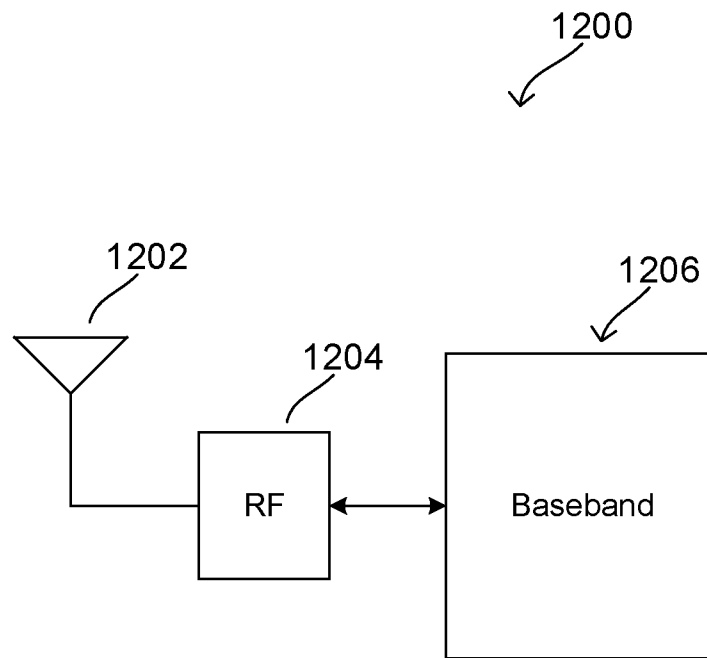


13/15

FIG 13

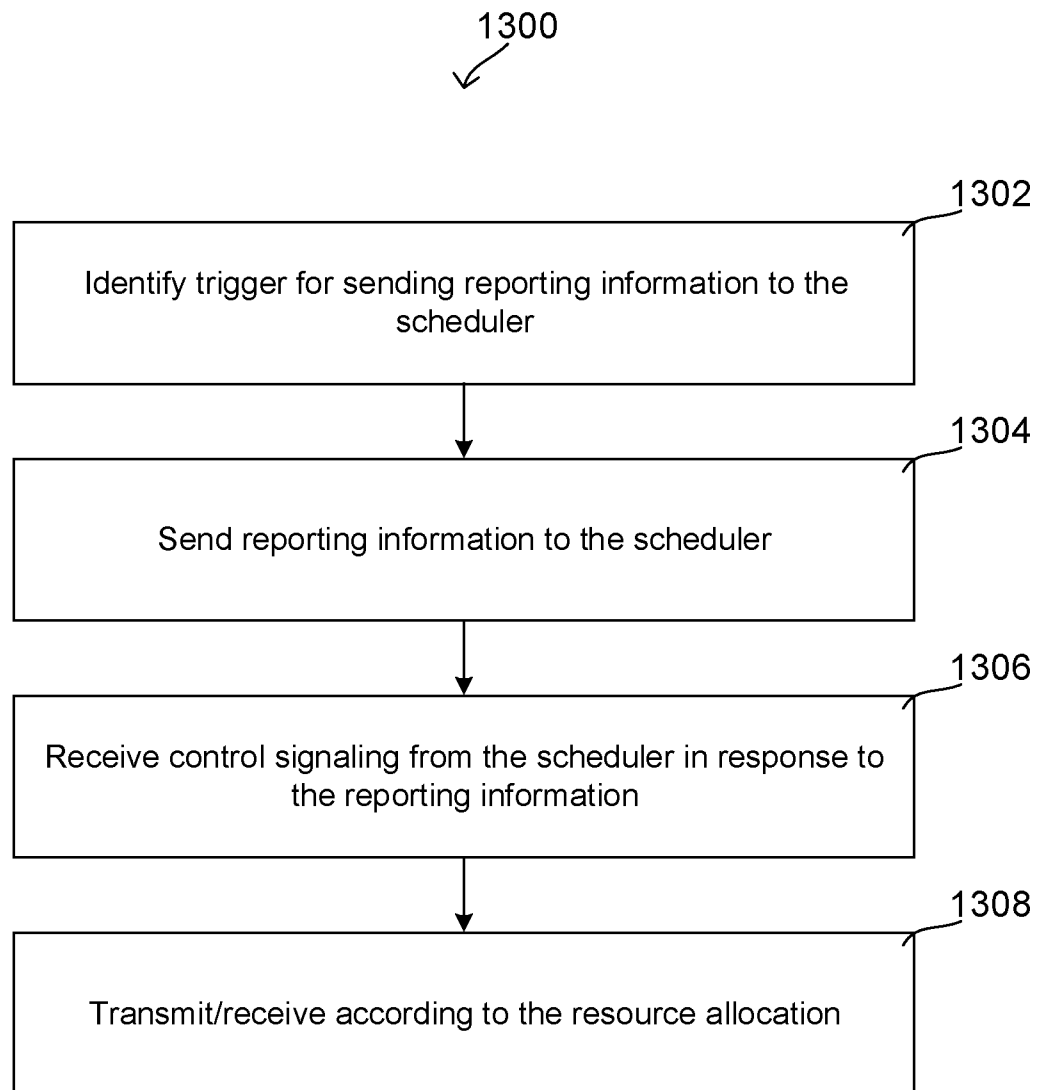


14/15

FIG 14

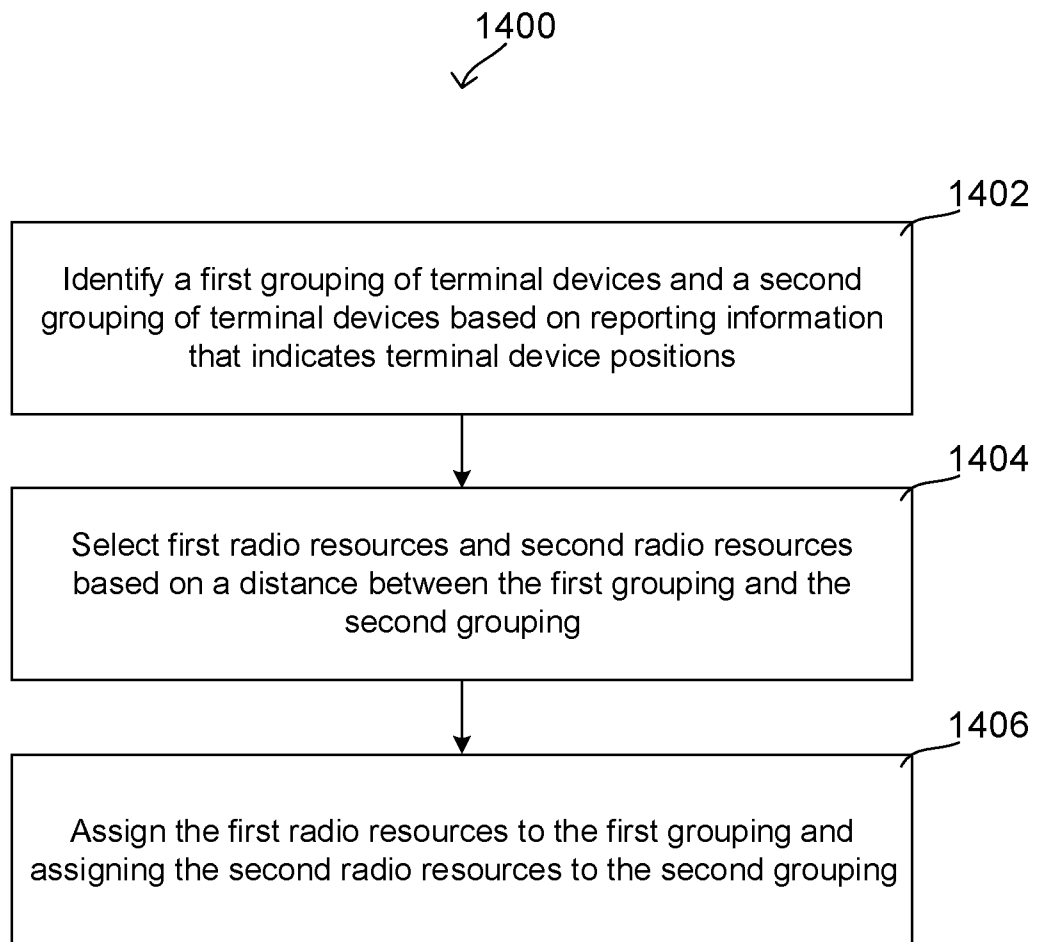

15/15

FIG 15

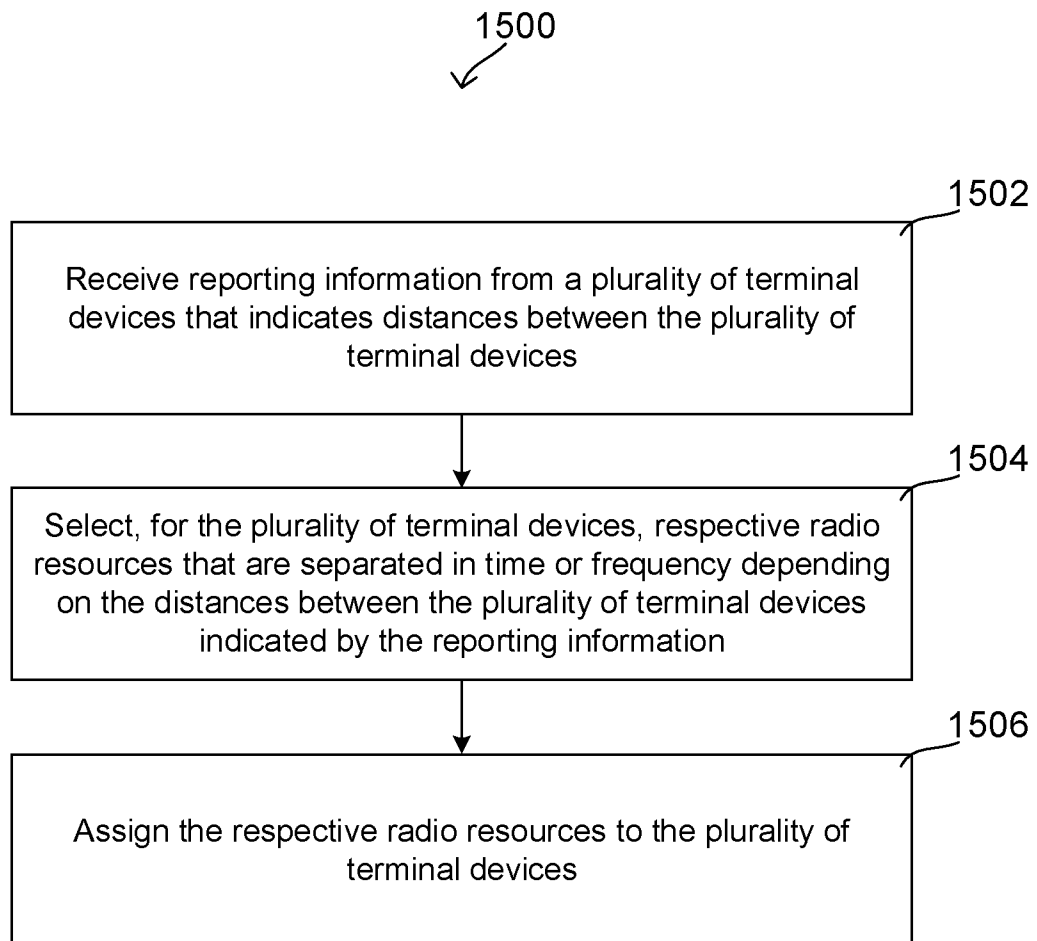

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2019/019472**A. CLASSIFICATION OF SUBJECT MATTER****H04L 5/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04L 5/00; H04B 7/02; H04W 28/02; H04W 52/24; H04W 64/00; H04W 72/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: grouping, resources, distance, separated resource, received signal strength, close

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GUANGDONG OPPO MOBILE TELECOM, "Discussion on the mode-2 resource allocation for V2V", R1-164466, 3GPP TSG RAN WG1 Meeting #85, Nanjing, China, 13 May 2016 See pages 1-5; and figures 1-2.	1-3, 5, 11, 12, 14-16, 18, 21, 23, 25
Y A		4, 6-9, 17, 19, 22, 10, 13, 20, 24
Y	TERUAKI KITASUKA et al., "Positioning Technique of Wireless LAN Terminals Using RSSI between Terminals", 2005 [retrieved on 2019.05.20]. Retrieved from the internet: (URL: https://www.semanticscholar.org/paper/Positioning-Technique-of-Wireless-LAN-Terminals-Kitasuka-Hisazumi/753e9166d78118ebfc17a12a829d75024dbb9965) See sections 2-4; and figures 4, 8.	4, 17, 22
Y	US 2012-0287848 A1 (HAK SEONG KIM et al.) 15 November 2012 See paragraph [0058]; and figure 17.	6-8
Y	US 2015-0103778 A1 (ELECTRONICS AND TELECOMMUNICATIONS RESEARCH INSTITUTE) 16 April 2015 See paragraphs [0018], [0069]-[0070]; and figure 6.	9, 19



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

14 June 2019 (14.06.2019)

Date of mailing of the international search report

14 June 2019 (14.06.2019)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea



Facsimile No. +82-42-481-8578

Authorized officer

KANG, Hee Gok

Telephone No. +82-42-481-8264



INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2019/019472

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	KR 10-2017-0138458 A (LG ELECTRONICS INC.) 15 December 2017 See paragraphs [0103]-[0116]; and figure 10.	1-25

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2019/019472

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012-0287848 A1	15/11/2012	CA 2787891 A1 CA 2787891 C CN 102726109 A CN 102726109 B CN 105450379 A CN 105450379 B EP 2529588 A2 JP 05736391 B2 JP 05973617 B2 JP 2013-518502 A JP 2015-167375 A KR 10-1761624 B1 KR 10-2011-0088432 A MX 2012008588 A US 2014-0348057 A1 US 8817692 B2 US 9107189 B2 WO 2011-093644 A2 WO 2011-093644 A3	04/08/2011 12/01/2016 10/10/2012 20/01/2016 30/03/2016 27/11/2018 05/12/2012 17/06/2015 23/08/2016 20/05/2013 24/09/2015 04/08/2017 03/08/2011 09/10/2012 27/11/2014 26/08/2014 11/08/2015 04/08/2011 05/01/2012
US 2015-0103778 A1	16/04/2015	KR 10-2015-0043968 A	23/04/2015
KR 10-2017-0138458 A	15/12/2017	CN 107439036 A EP 3280172 A2 JP 06501905 B2 JP 2018-513626 A US 2018-0115970 A1 WO 2016-159715 A2 WO 2016-159715 A3	05/12/2017 07/02/2018 17/04/2019 24/05/2018 26/04/2018 06/10/2016 24/11/2016