

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 May 2010 (14.05.2010)

PCT

(10) International Publication Number
WO 2010/054072 A1

(51) International Patent Classification:
H02J 3/00 (2006.01)

(21) International Application Number:
PCT/US2009/063390

(22) International Filing Date:
5 November 2009 (05.11.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/111,814 6 November 2008 (06.11.2008) US

(72) Inventor: and

(71) Applicant : LANCASTER, Mark [US/US]; 525 Grant Road, Brooks, GA 30205 (US).

(74) Agent: BRUESS, Steven, C.; Merchant & Gould P.C., P.O. Box 2903, Minneapolis, MN 55402-0903 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: REAL-TIME POWER LINE RATING

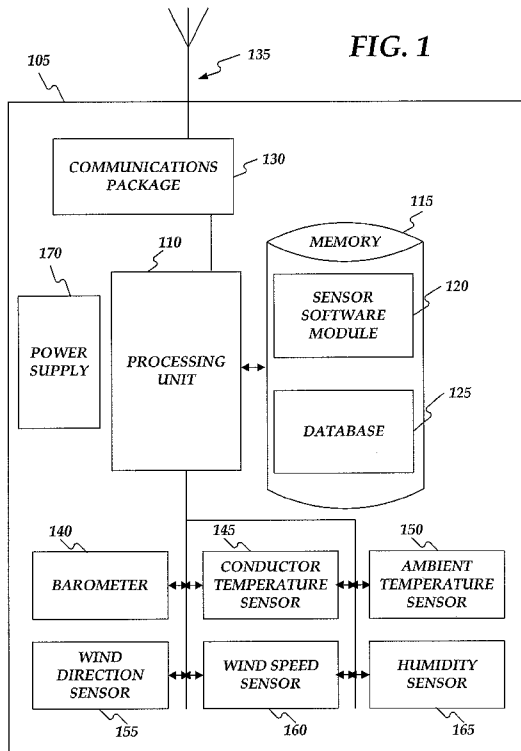

(57) Abstract: Real-time power line rating may be provided. First, sensor data may be received corresponding to a conductor of a power line. The sensor data may provide real-time weather conditions for the conductor's environment. The sensor data may be received from a sensor device configured to collect the sensor data. The sensor data may correspond to the weather conditions at a location of the sensor device on the power line. Next, design limitations for the power line having the conductor may be received. The conductor of the power line may have a design ampacity based upon the design limitations and assumed weather conditions for the conductor's environment. Then a dynamic ampacity may be calculated for the power line based upon the received sensor data and the received design limitations for the power line. The power line may then be operated according to the calculated dynamic ampacity instead of the design ampacity.

WO 2010/054072 A1

TITLE

REAL-TIME POWER LINE RATING

RELATED APPLICATION

5 [001] This application is being filed on 06 November 2009, as a PCT International Patent application in the name of Mark Lancaster, a citizen of the U.S., applicant for the designation of all countries, and claims priority to U.S. Provisional Patent Application Serial No. 61/111,814 filed on 06 November 2008.

10

COPYRIGHTS

[002] All rights, including copyrights, in the material included herein are vested in and the property of the Applicants. The Applicants retain and reserve all rights in the material included herein, and grant permission to reproduce the material only in connection with reproduction of the granted patent and for no other purpose.

15

BACKGROUND

[003] Power line operators assume that the ampacity of a power line is a constant value. When calculating power line ampacity, conservative assumptions about weather in the power line's environment are used. In some environmental situations, these conservative assumptions about the weather may result in not using the power line to its fullest safe capacity. For example, the power line's real-time environment may be cloudy and cool, however, conservative assumptions when initially rating the power line may have been for direct sunlight and high temperatures. Thus, the conventional strategy is to make conservative assumptions about weather in the power line's environment and not consider real-time environmental conditions. This often causes problems because the conventional strategy results in underutilizing a power line's capacity in some situations.

25

SUMMARY

30

[004] This Summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description. This

Summary is not intended to identify key features or essential features of the claimed subject matter. Nor is this Summary intended to be used to limit the claimed subject matter's scope.

5 [005] Real-time power line rating may be provided. First, sensor data may be received corresponding to a conductor of a power line. The sensor data may provide real-time weather conditions for the conductor's environment. The sensor data may be received from a sensor device configured to collect the sensor data. The sensor data may correspond to the weather conditions at a location of the sensor device on the power line. Next, design limitations for the power line having the conductor may be received. The conductor of the power line may have a design ampacity based upon the design limitations and assumed weather conditions for the conductor's environment. Then a dynamic ampacity may be calculated for the power line based upon the received sensor data and the received design limitations for the power line. The power line may then be operated according to the calculated dynamic ampacity instead of the design ampacity.

15 [006] Both the foregoing general description and the following detailed description provide examples and are explanatory only. Accordingly, the foregoing general description and the following detailed description should not be considered to be restrictive. Further, features or variations may be provided in addition to those set forth herein. For example, embodiments may be directed to various feature combinations and sub-combinations described in the detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

25 [007] The accompanying drawings, which are incorporated in and constitute a part of this disclosure, illustrate various embodiments of the present invention. In the drawings:

[008] FIG. 1 shows a sensor device;

[009] FIG. 2 shows an operating environment for the sensor device;

[010] FIG. 3 shows a SCADA system; and

30 [011] FIG. 4 is a flow chart of a method for providing a real-time power line rating.

DETAILED DESCRIPTION

[012] The following detailed description refers to the accompanying drawings. Wherever possible, the same reference numbers are used in the drawings and the following description to refer to the same or similar elements. While
5 embodiments of the invention may be described, modifications, adaptations, and other implementations are possible. For example, substitutions, additions, or modifications may be made to the elements illustrated in the drawings, and the methods described herein may be modified by substituting, reordering, or adding stages to the disclosed methods. Accordingly, the following detailed description
10 does not limit the invention.

[013] Electric utilities, when evaluating conductor capacity (ampacity), assume variables required for capacity calculation are constant, which results in a constant (static) rating for a power line (e.g. transmission line, distribution line, etc.). There are many variables used in the ampacity calculation, including ambient
15 temperature, wind speed, solar radiation, and maximum conductor temperature. Weather conditions corresponding to these aforementioned assumptions, however, are not constant, thus creating the problem of attempting to model a dynamic system with a static model. Consequently, during less favorable weather conditions, for example, when: i) ambient temperature is higher than an assumed value; or ii) when
20 the wind speed is lower than an assumed value, operating the power line at the calculated ampacity may result in the power line exceeding its temperature rating. This may damage to the power line's conductor or may result in a clearances violation causing an unanticipated line outage.

[014] Consistent with embodiments of the invention, adapting power line
25 ratings to actual weather conditions may prevent damage, unanticipated outages, or allow for an increase in conductor ampacity. Accordingly, a dynamic line rating system may provide protection for the power line from overheating, or may provide an increase in capacity during a critical power demand period by providing real-time data to calculate the conductor's actual ampacity.

30 [015] FIG. 1 shows a sensor device 105. Sensor device 105 may include a processing unit 110 and a memory 115. Memory 115 may include a sensor software module 120 and a database 125. While executing on processing unit 110, sensor

software module 120 may perform processes for collecting and transmitting real-time sensor data.

[016] Sensor device 105 may also include a communications package 130 that may include an antenna 135 and may be connected to processing unit 110.

5 Communications package 130 may transmit real-time sensor data collected from sensor device 105 and may receive other data including control data.

Communications package 130 may communicate over a network (not shown.) The network may comprise, for example, a local area network (LAN) or a wide area network (WAN). When a LAN is used as the network, a network interface located
10 at sensor device 105 may be used to interconnect any other processor on the network. When the network is implemented in a WAN networking environment, such as the Internet, sensor device 105 may include an internal or external modem (not shown) or other means for establishing communications over the WAN.

Further, in utilizing the network, data sent over the network may be encrypted to
15 insure data security by using encryption/decryption techniques.

[017] In addition to utilizing a wire line communications system, a wireless communications system, or a combination of wire line and wireless may be utilized as the network. Wireless may be defined as radio transmission via the airwaves. However, it may be appreciated that various other communication techniques can be
20 used to provide wireless transmission, including infrared line of sight, cellular, microwave, satellite, packet radio, and spread spectrum radio. For example, sensor device 105 may communicate across a wireless interface such as, for example, a cellular interface (e.g., general packet radio system (GPRS), enhanced data rates for global evolution (EDGE), global system for mobile communications (GSM)), a
25 wireless local area network interface (e.g., WLAN, IEEE 802), a bluetooth interface, WiFi, WiMax, another RF communication interface, and/or an optical interface. Furthermore, sensor device 105 may communicate over a power line carrier system.

[018] Sensor device 105 may include sensor transducers. The sensor transducers may include, but are not limited to, a barometer 140, a conductor
30 temperature sensor 145, an ambient temperature sensor 150, a wind direction sensor 155, a wind speed sensor 160, and a humidity sensor 165, all of which may collect and communicate sensor data to processing unit 110. Barometer 140 may collect sensor data comprising barometric pressure readings at a location where sensor

device 105 is located. Ambient temperature sensor 150 may collect sensor data comprising ambient temperature readings at the location where sensor device 105 is located. Wind direction sensor 155 may collect sensor data comprising wind direction readings at the location where sensor device 105 is located. Wind speed sensor 160 may collect sensor data comprising wind speed readings at the location where sensor device 105 is located. Humidity sensor 165 may collect sensor data comprising humidity readings at the location where sensor device 105 is located.

[019] Because sensor device 105 may be in close proximity to a power line (e.g. coupled to the power line,) conductor temperature sensor 145 may comprise a thermal couple coupled to the power line. Conductor temperature sensor 145 may collect sensor data comprising the temperature of a conductor comprising the power line.

[020] All elements within sensor device 105 may be supplied with power from a power supply 170. Again, because sensor device 105 may be in close proximity to the power line (e.g. coupled to the power line,) power supply 170 may scavenge power from the power line using a current transformer (CT,) for example.

[021] FIG. 2 shows an operating environment 200 for sensor device 105 consistent with embodiments of the invention. As shown in FIG. 2, a power line 205 may connect a first substation 210 and a second substation 215. Power line 205 may be tens or even hundreds of miles long and may pass through many different weather zones. RUS BULLETIN 1724E-200, "DESIGN MANUAL FOR HIGH VOLTAGE TRANSMISSION LINES", published by the Electric Staff Division, Rural Utilities Service, U.S. Department of Agriculture shows how power lines may be designed and is incorporated herein by reference.

[022] Any number of sensor devices 105 may be placed on power line 205. Sensor devices 105 in environment 200 may include any one or more of a combination of the sensor transducers shown in FIG. 1. Each of the sensor devices 105 may collect sensor data at a location where the sensor device is located on power line 105. After collection, each of the sensor devices 105 may transmit its collected sensor data to a central station 220. At central station 220, the received sensor data may be fed into a real-time rating software and/or supervisory control and data acquisition (SCADA) system 300 as shown in FIG. 3.

[023] FIG. 3 shows real-time rating software and/or supervisory control and data acquisition (SCADA) system 300 in more detail. SCADA system 300 may include a processing unit 310 and a memory 315. Memory 315 may include a real-time rating software module 320 and a database 325. While executing on processing
5 unit 310, sensor software module 320 may perform, for example, processes for providing a real-time power line rating as described in greater detail below with respect to FIG. 4.

[024] Consistent with embodiments of the invention, SCADA system 300 may adapt power line 205's ampacity rating to actual conditions experienced by
10 power line 205 to increase power line 205's conductor ampacity. In other words, SCADA system 300 may provide a dynamic line rating for power line 205 in order to provide an increase in power line ampacity by considering a given conductor's heat-storage capacity in power line 205. For example, if according to the sensor
15 data the conductor's temperature is already at 98 degrees Fahrenheit with a low current load, SCADA system 300 may de-rate the conductor and suggest not loading it to its assumed full capacity. Moreover, if the conductor temperature according to the sensor data is at 15 degrees Fahrenheit with a high current load, SCADA system
300 may up-rate the conductor and suggest loading it above its assumed full capacity.

[025] In addition, other data within the sensor data may be used by SCADA
20 system 300 to accurately predict a rate of change in the conductor's temperature. With an accurately predicted rate of temperature change, SCADA system 300 can help power system operators, for example, to plan on how to load power line 205
latter in the day and take into consideration predicted dynamic line ratings for power
25 line 205. For example, the sensor data may be used to predict weather along power line 205 and thus predict a real-time rating for power line 205 hours or even days into the future.

[026] FIG. 4 is a flow chart setting forth the general stages involved in a
30 method 400 consistent with embodiments of the invention for providing a real-time power line rating. Method 400 may be implemented using SCADA system 300 as described in more detail above with respect to FIG. 3. Ways to implement the stages of method 400 will be described in greater detail below.

[027] Method 400 may begin at starting block 405 and proceed to stage 410 where SCADA system 300 may receive design limitations for power line 205 having a conductor. The conductor of power line 205 may have a design ampacity based upon the design limitations and assumed weather conditions for the conductor's environment. For example, a power line operator (e.g. an electric utility company) may build power line 205. Power line 205 may be built to certain design limitations under assumed weather conditions. For example, power line 205 may be built to have a maximum amount of sag in certain worst case scenarios. Such worst case scenarios may comprise the "hot curve" (i.e. maximum sag) condition. For example, the hot curve condition may comprise, but is not limited to, maximum conductor operating temperature (e.g. 212 degrees Fahrenheit), no ice, no wind, and final sag curve. The hot curve may be used to check for minimum vertical clearances for power line 205. In this case, power line 205 may have the design ampacity based upon these design limitations and assumed weather conditions for the conductor's environment. Making these worst case scenarios helps the designer of power line 205 make sure that power line 205 is placed on tall enough structures and does not sag down too much and violate minimum vertical clearances for power line 205 set out by applicable safety codes (e.g. the National Electric Safety Code (NESC).) In reality, however, such worst case scenarios rarely exist.

[028] From stage 410, where SCADA system 300 receives the design limitations for power line 205, method 400 may advance to stage 420 where SCADA system 300 may receive sensor data corresponding to the conductor of power line 205. The sensor data may provide real-time weather conditions for the conductor's environment. For example, as shown in FIG. 2, any number of sensor devices 105 may be placed on power line 205. Sensor devices 105 in environment 200 may include any one or more of a combination of the sensor transducers shown in FIG. 1. Each of the sensor devices 105 may collect sensor data at a location where the sensor device is located on power line 105. After collection, each of the sensor devices 105 may transmit its collected sensor data to a central station 220 where it is received by SCADA system 300.

[029] The received sensor data may comprise, but is not limited to: i) ambient temperature of the environment around the conductor at a point along power line 205 where a corresponding sensor device happens to be; ii) wind speed

around the conductor at a point along power line 205 where the corresponding sensor device happens to be; iii) a solar radiation level (e.g. amount of cloudiness) at the conductor at a point along power line 205 where a corresponding sensor device happens to be; or iv) a temperature of the conductor itself at a point along power line
5 205 where a corresponding sensor device happens to be. The sensor data may also include barometric pressure readings, wind direction, and humidity at the conductor at a point along power line 205 where a corresponding sensor device happens to be. The aforementioned are examples and the sensor data may comprise any data helpful for calculating real-time conductor ratings.

10 [030] Once SCADA system 300 receives the sensor data in stage 420, method 400 may continue to stage 430 where SCADA system 300 may calculate a dynamic ampacity for power line 205 based upon the received sensor data and the received design limitations for power line 205. For example, if the sensor data is received at multiple points along power line 205, like readings may be averaged.
15 For example, conductor temperature at several points along power line may be averaged to provide an average conductor temperature. Or the reading that would produce the most conservative dynamically calculated ampacity for power line 205 may be used. For example, the highest conductor temperature at one of the several points along power line may be used.

20 [031] Regardless of the process, sensor data used, or calculations used, an objective of calculating the dynamic (e.g. real-time) ampacity for power line 205 may be to calculate a more accurate ampacity for power line 205 not based on assumed or worst case environmental conditions, but rather on actual conditions for power line 205's conductors. Notwithstanding, the calculated dynamic ampacity for
25 power line 205 should not cause power line 205's conductors to sag down too much and violate minimum vertical clearances for power line 205 set out by applicable safety codes. Also, the calculated dynamic ampacity for power line 205 should not cause power line 205's conductors to become "annealed" or damaged in anyway.

[032] In other words, the objective of calculating the dynamic ampacity for
30 power line 205 is to consider the heat-storage capacity of the conductor. If the conductor gets too hot, minimum vertical clearances may be violated or the conductor may be damaged. At least two conditions contribute to the conductor's temperature, the amount of current running through the conductor and the

environmental conditions. If the environmental conditions are favorable and contribute less heat to the conductor than assumed environmental conditions, then heat caused by current running through the conductor may be increased. Thus with these favorable environmental conditions, more current may be allowed to run
5 through the conductor than can be allowed under the assumed environmental conditions while still maintaining minimum vertical clearances and not damaging the conductor. Consequently, by knowing the real-time environmental conditions, the ampacity of the conductor may be calculated dynamically thus increasing the current carried by power line 205 resulting in increasing the power delivered by
10 power line 205.

[033] After SCADA system 300 calculates the dynamic ampacity for power line 205 in stage 430, method 400 may proceed to stage 440 where SCADA system 300 may operate power line 205 according to the dynamic ampacity instead of the design ampacity. The design ampacity may be based on environmental assumptions
15 when power line 205 is designed. For example, by operating power line 205 according to the dynamic ampacity instead of the design ampacity, more power may be delivered between first substation 210 and second substation 215 without the expense of upgrading the size of power line 205's conductors. Once SCADA system 300 operates power line 205 according to the dynamic ampacity in stage 440,
20 method 400 may then end at stage 450.

[034] Embodiment of the present invention may, for example, be implemented using a memory, a processing unit, and other components. Any suitable combination of hardware, software, and/or firmware may be used to implement the memory, processing unit, or other components. The processing unit
25 may implement program modules. Generally, consistent with embodiments of the invention, program modules may include routines, programs, components, data structures, and other types of structures that perform particular tasks or implement particular abstract data types.

[035] Moreover, embodiments of the invention may be practiced with other
30 computer system configurations, including hand-held devices, multiprocessor systems, microprocessor-based or programmable consumer electronics, minicomputers, mainframe computers, and the like. Embodiments of the invention may also be practiced in distributed computing environments where tasks are

performed by remote processing devices that are linked through a communications network. In a distributed computing environment, program modules may be located in both local and remote memory storage devices.

[036] Furthermore, embodiments of the invention may be practiced in an
5 electrical circuit comprising discrete electronic elements, packaged or integrated electronic chips containing logic gates, a circuit utilizing a microprocessor, or on a single chip containing electronic elements or microprocessors. Embodiments of the invention may also be practiced using other technologies capable of performing logical operations such as, for example, AND, OR, and NOT, including but not
10 limited to mechanical, optical, fluidic, and quantum technologies. In addition, embodiments of the invention may be practiced within a general purpose computer or in any other circuits or systems.

[037] Embodiments of the invention, for example, may be implemented as a computer process (method), a computing system, or as an article of manufacture,
15 such as a computer program product or computer readable media. The computer program product may be a computer storage media readable by a computer system and encoding a computer program of instructions for executing a computer process. The computer program product may also be a propagated signal on a carrier readable by a computing system and encoding a computer program of instructions for
20 executing a computer process. Accordingly, the present invention may be embodied in hardware and/or in software (including firmware, resident software, micro-code, etc.). In other words, embodiments of the present invention may take the form of a computer program product on a computer-usable or computer-readable storage medium having computer-usable or computer-readable program code embodied in
25 the medium for use by or in connection with an instruction execution system. A computer-usable or computer-readable medium may be any medium that can contain, store, communicate, propagate, or transport the program for use by or in connection with the instruction execution system, apparatus, or device.

[038] The computer-usable or computer-readable medium may be, for
30 example but not limited to, an electronic, magnetic, optical, electromagnetic, infrared, or semiconductor system, apparatus, device, or propagation medium. More specific examples (a non-exhaustive list) of the computer-readable medium would include the following: an electrical connection having one or more wires, a portable

computer diskette, a random access memory (RAM), a read-only memory (ROM), an erasable programmable read-only memory (EPROM or Flash memory), an optical fiber, and a portable compact disc read-only memory (CD-ROM). Note that the computer-usable or computer-readable medium could even be paper or another
5 suitable medium upon which the program is printed, as the program can be electronically captured, via, for instance, optical scanning of the paper or other medium, then compiled, interpreted, or otherwise processed in a suitable manner, if necessary, and then stored in a computer memory.

[039] Embodiments of the present invention are described above with
10 reference to block diagrams and/or operational illustrations of methods, systems, and computer program products according to embodiments of the invention. It is to be understood that the functions/acts noted in the blocks may occur out of the order noted in the operational illustrations. For example, two blocks shown in succession may in fact be executed substantially concurrently or the blocks may sometimes be
15 executed in the reverse order, depending upon the functionality/acts involved.

[040] While certain features and embodiments of the invention have been described, other embodiments of the invention may exist. Furthermore, although embodiments of the present invention have been described as being associated with data stored in memory and other storage mediums, aspects can also be stored on or
20 read from other types of computer-readable media, such as secondary storage devices, like hard disks, floppy disks, or a CD-ROM, a carrier wave from the Internet, or other forms of RAM or ROM. Further, the steps of the disclosed methods may be modified in any manner, including by reordering stages and/or inserting or deleting stages, without departing from the principles of the invention.

[041] While certain embodiments of the invention have been described,
25 other embodiments may exist. While the specification includes examples, the invention's scope is indicated by the following claims. Furthermore, while the specification has been described in language specific to structural features and/or methodological acts, the claims are not limited to the features or acts described
30 above. Rather, the specific features and acts described above are disclosed as example for embodiments of the invention.

WHAT IS CLAIMED IS:

1. A system for providing a real-time power line rating, the system comprising:
- 5 a sensor device configured to collect sensor data, the sensor data corresponding to a conductor of a power line and corresponding to weather conditions at a location of the sensor device on the power line; and
- 10 a supervisory control and data acquisition (SCADA) system configured to; receive the sensor data from the sensor device, and calculate a dynamic ampacity for the power line based on a heat-storage capacity of the conductor, the heat-storage capacity being determined from the sensor data.
2. The system of claim 1, wherein the supervisory control and data acquisition (SCADA) system being configured to calculate the dynamic ampacity
- 15 comprises the supervisory control and data acquisition (SCADA) system being configured to calculate the dynamic ampacity having a value not to cause the maximum sag for which the conductor of the power line was designed to be exceeded.
- 20 3. The system of claim 1, wherein the supervisory control and data acquisition (SCADA) system being configured to calculate the dynamic ampacity comprises the supervisory control and data acquisition (SCADA) system being configured to calculate the dynamic ampacity having a value not to cause damage to the conductor.
- 25 4. The system of claim 1, wherein the supervisory control and data acquisition (SCADA) system is further configured to allow operation of the power line up to the calculated dynamic ampacity.
- 30 5. The system of claim 1, wherein the sensor device receives its power to operate from the power line.

6. The system of claim 1, wherein the sensor device scavenge power to operate from the power line by using a current transformer (CT).

7. The system of claim 1, wherein the sensor device being configured to collect sensor data comprises the sensor device being configured to collect sensor data comprising ambient temperature of an environment around the conductor at the location.

8. The system of claim 1, wherein the sensor device being configured to collect sensor data comprises the sensor device being configured to collect sensor data comprising temperature of the conductor at the location.

9. A method of providing a real-time power line rating, the method comprising:

15 receiving design limitations for a power line having a conductor, the conductor of the power line having a design ampacity based upon the design limitations and assumed weather conditions for the conductor's environment;

receiving sensor data corresponding to the conductor of the power line, the sensor data providing real-time weather conditions for the conductor's environment;

20 calculating a dynamic ampacity for the power line based upon the received sensor data and the received design limitations for the power line; and

operating the power line according to the dynamic ampacity instead of the design ampacity.

10. The method of claim 9, wherein receiving the sensor data comprises receiving the sensor data comprising an ambient temperature of an environment around the conductor at a point along the power line.

11. The method of claim 9, wherein receiving the sensor data comprises receiving the sensor data comprising a wind speed around the conductor at a point along the power line.

12. The method of claim 9, wherein receiving the sensor data comprises receiving the sensor data comprising a solar radiation level at the conductor at a point along the power line.

5 13. The method of claim 9, wherein receiving the sensor data comprises receiving sensor data comprising a temperature of the conductor at a point along the power line.

10 14. The method of claim 9, wherein receiving the sensor data comprises receiving the sensor data comprising the sensor data taken at a plurality of points along the power line.

15 15. The method of claim 9, wherein receiving the design limitations comprises receiving data indicating the maximum sag the conductor of the power line was designed to have.

20 16. The method of claim 9, wherein calculating the dynamic ampacity comprises calculating the dynamic ampacity having a value not to cause the maximum sag for which the conductor of the power line was designed to be exceeded.

25 17. The method of claim 9, wherein calculating the dynamic ampacity comprises calculating the dynamic ampacity having a value not to cause damage to the conductor.

30 18. The method of claim 9, wherein operating the power line according to the dynamic ampacity instead of the design ampacity comprises causing the power line to operate between the calculated dynamic ampacity and the design ampacity when the calculated dynamic ampacity is greater than the design ampacity.

19. The method of claim 9, wherein operating the power line according to the dynamic ampacity instead of the design ampacity comprises causing the

power line to operate at less than the calculated dynamic ampacity when the calculated dynamic ampacity is less than the design ampacity.

20. A computer-readable medium that stores a set of instructions which
5 when executed perform a method for providing a real-time power line rating, the method executed by the set of instructions comprising:


receiving design limitations for a power line having a conductor, the conductor of the power line having a design ampacity based upon the design limitations and assumed weather conditions for the conductor's environment
10 wherein receiving design limitations comprises receiving data indicating the maximum sag the conductor of the power line was designed to have;

receiving sensor data from a sensor device configured to collect the sensor data, the sensor data corresponding to the conductor of the power line, the sensor data providing real-time weather conditions for the conductor's environment
15 wherein receiving the sensor data comprises receiving the sensor data comprising the sensor data taken at a plurality of points along the power line wherein receiving sensor data comprises receiving at least one of the following: sensor data comprising ambient temperature of environment around the conductor at a point along the power line, receiving sensor data comprising receiving sensor data comprising wind
20 speed around the conductor at a point along the power line, sensor data comprising solar radiation at the conductor at a point along the power line, and sensor data comprising temperature of the conductor at a point along the power line;

calculating a dynamic ampacity for the power line based upon the received sensor data and the received design limitations for the power line wherein
25 calculating the dynamic ampacity comprises calculating the dynamic ampacity having a value not to cause the maximum sag for which the conductor of the power line was designed to be exceeded and calculating the dynamic ampacity having a value not to cause damage to the conductor; and

operating the power line according to the dynamic ampacity instead of the
30 design ampacity wherein operating the power line according to the dynamic ampacity instead of the design ampacity comprises one of the following: causing the power line to operate between the calculated dynamic ampacity and the design ampacity when the calculated dynamic ampacity is greater than the design ampacity

and causing the power line to operate at less than the calculated dynamic ampacity when the dynamic ampacity is less than the design ampacity.

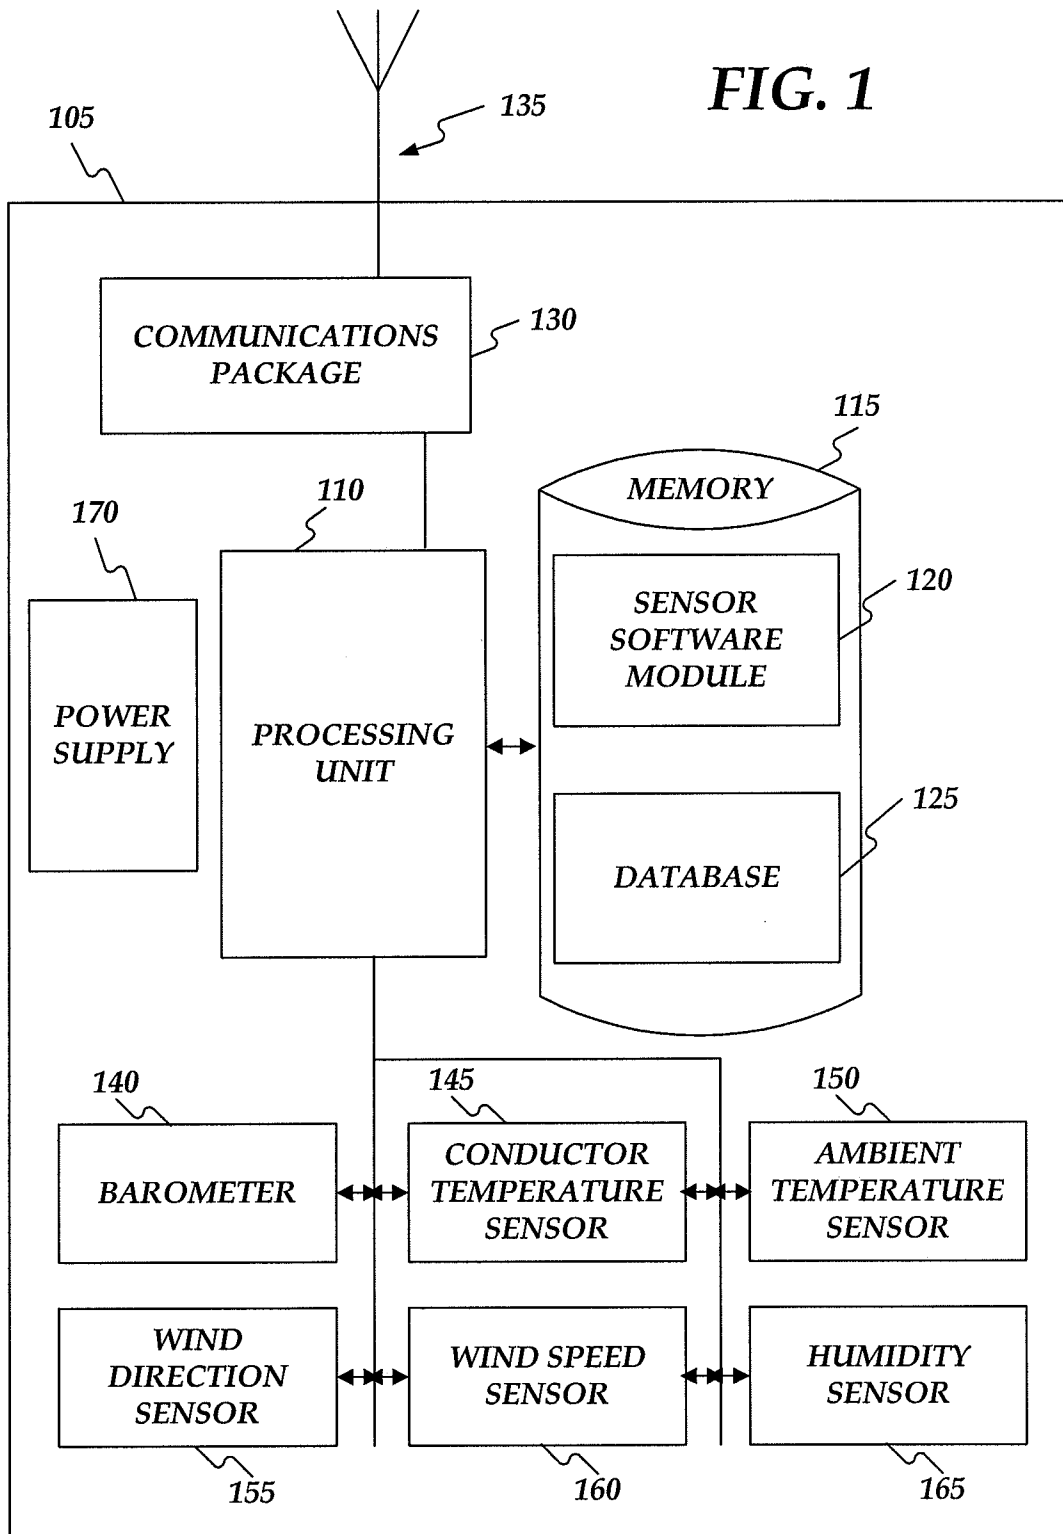

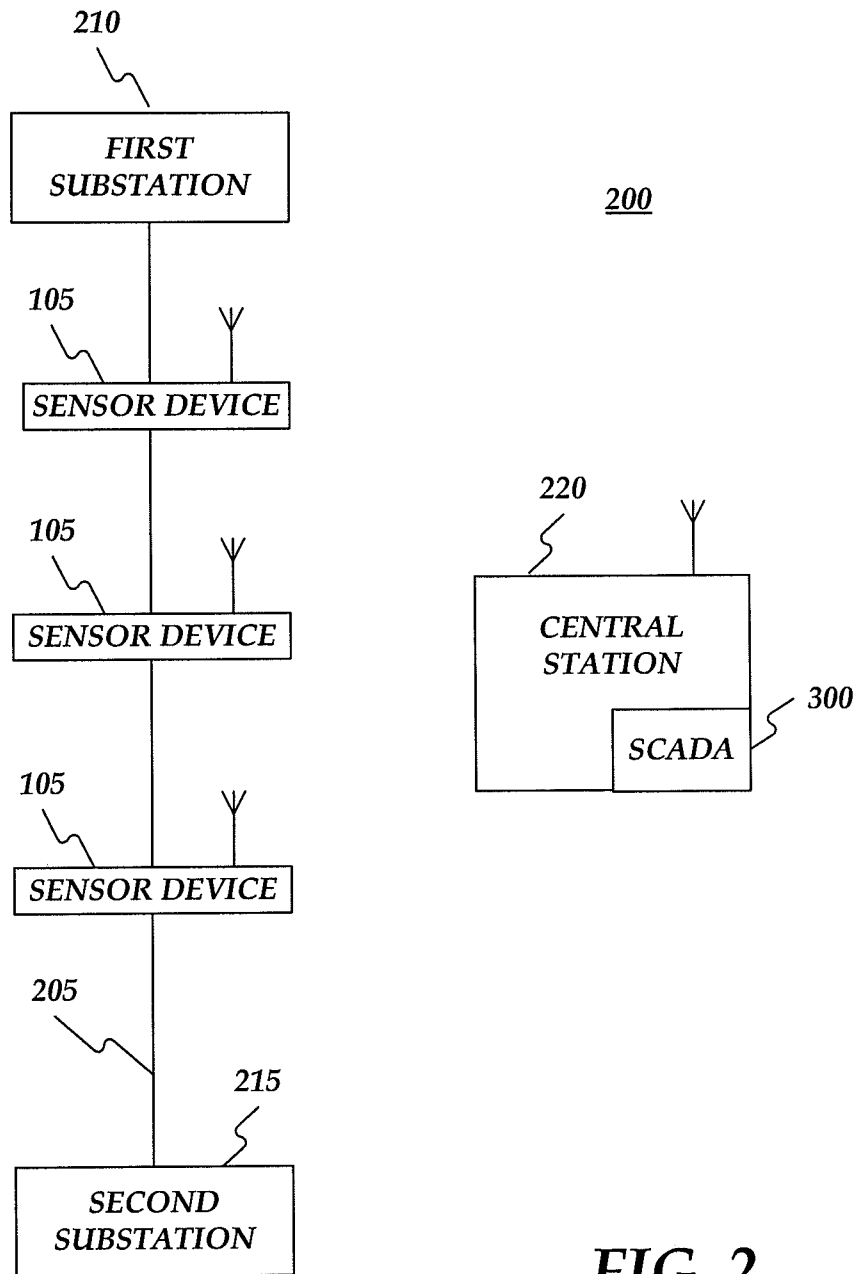


FIG. 2

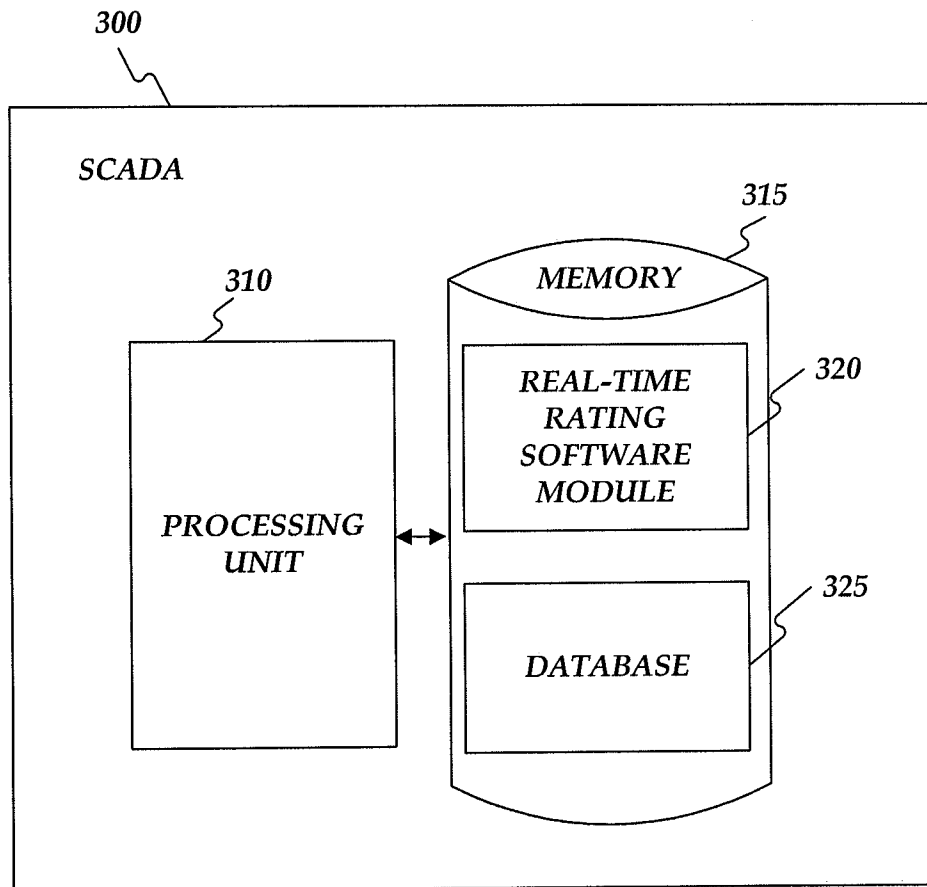


FIG. 3

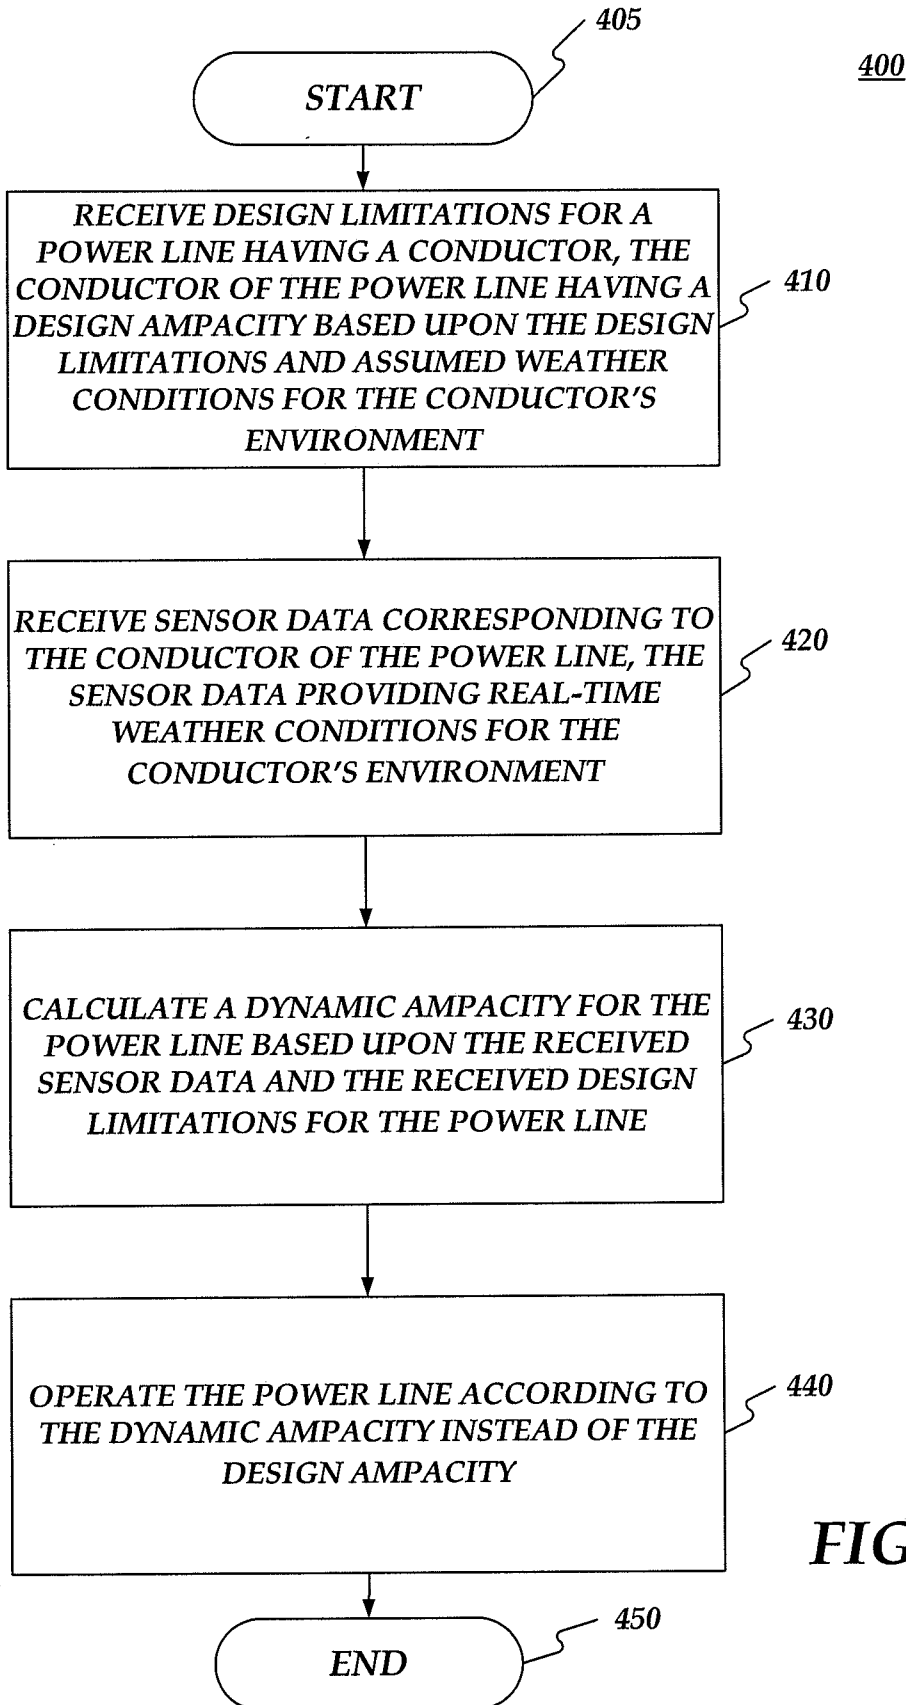


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2009/063390

A. CLASSIFICATION OF SUBJECT MATTER
INV. H02J3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H02J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 728 887 A (DAVIS MURRAY W [US]) 1 March 1988 (1988-03-01) column 1, lines 56-62 column 2, lines 30-38 column 2, lines 61-68 column 3, lines 18-64 column 4, lines 27-41 column 7, lines 20-33 column 10, lines 53-54 column 25, lines 59-62 column 26, line 62 - column 27, line 58; figures 1,27,29-31	1-20
X	US 5 933 355 A (DEB ANJAN KUMAR [US]) 3 August 1999 (1999-08-03) column 1, line 25 - column 35	1,9
A		2-8, 10-20
	----- -/--	

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"J" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier document but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 2 March 2010	Date of mailing of the international search report 09/03/2010
--	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Iwansson, Kaj
--	--

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2009/063390

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 703 428 A2 (ABB PATENT GMBH [DE]) 20 September 2006 (2006-09-20) claim 1	1
A	EP 1 385 013 A1 (GEN ELECTRIC [US]) 28 January 2004 (2004-01-28) paragraph [0002]	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2009/063390

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4728887	A	01-03-1988	CA 1249335 A1	24-01-1989
US 5933355	A	03-08-1999	NONE	
EP 1703428	A2	20-09-2006	DE 102005013080 A1	28-09-2006
EP 1385013	A1	28-01-2004	NONE	