



(22) Date de dépôt/Filing Date: 2020/09/10

(41) Mise à la disp. pub./Open to Public Insp.: 2021/03/13

(45) Date de délivrance/Issue Date: 2023/07/04

(30) Priorités/Priorities: 2019/09/13 (US62/899,971);
2020/06/05 (US16/946,079)

(51) Cl.Int./Int.Cl. *E21B 41/00* (2006.01),
E21B 43/26 (2006.01)


(72) Inventeurs/Inventors:
YEUNG, TONY, US;
RODRIGUEZ-RAMON, RICARDO, US;
FOSTER, JOSEPH, US;
TEW, NICHOLAS, US

(73) Propriétaire/Owner:
BJ ENERGY SOLUTIONS, LLC, US

(74) Agent: BERESKIN & PARR LLP/S.E.N.C.R.L.,S.R.L.

(54) Titre : SOURCES D'ALIMENTATION ET RESEAUX DE TRANSMISSION POUR DU MATERIEL AUXILIAIRE A BORD D'UNITES DE FRACTURATION HYDRAULIQUE ET METHODES CONNEXES

(54) Title: POWER SOURCES AND TRANSMISSION NETWORKS FOR AUXILIARY EQUIPMENT ONBOARD HYDRAULIC FRACTURING UNITS AND ASSOCIATED METHODS

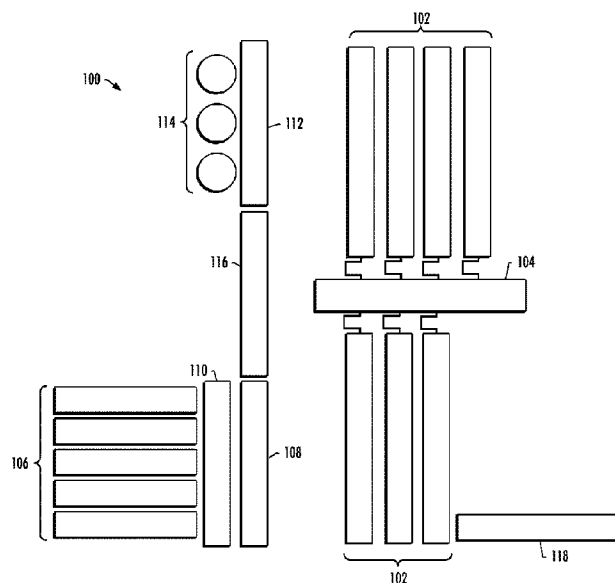

(57) **Abrégé/Abstract:**

Embodiments of systems and methods disclosed provide a hydraulic fracturing unit that includes a reciprocating plunger pump configured to pump a fracturing fluid and a powertrain configured to power the reciprocating plunger pump. The powertrain includes a prime mover and a drivetrain, the prime mover including a gas turbine engine. The hydraulic fracturing unit also includes auxiliary equipment configured to support operation of the hydraulic fracturing unit including the reciprocating plunger pump and the powertrain. A power system is configured to power the auxiliary equipment. The power system includes a power source and a power network. The power source is configured to generate power for the auxiliary equipment. The power network is coupled to the power source and the auxiliary equipment, and configured to deliver the power generated by the power source to the auxiliary equipment. Associated systems including a plurality of hydraulic fracturing units are also provided.



ABSTRACT

Embodiments of systems and methods disclosed provide a hydraulic fracturing unit that includes a reciprocating plunger pump configured to pump a fracturing fluid and a powertrain configured to power the reciprocating plunger pump. The powertrain includes a prime mover and a drivetrain, the prime mover including a gas turbine engine. The hydraulic fracturing unit also includes auxiliary equipment configured to support operation of the hydraulic fracturing unit including the reciprocating plunger pump and the powertrain. A power system is configured to power the auxiliary equipment. The power system includes a power source and a power network. The power source is configured to generate power for the auxiliary equipment. The power network is coupled to the power source and the auxiliary equipment, and configured to deliver the power generated by the power source to the auxiliary equipment. Associated systems including a plurality of hydraulic fracturing units are also provided.

**POWER SOURCES AND TRANSMISSION NETWORKS FOR
AUXILIARY EQUIPMENT ONBOARD HYDRAULIC FRACTURING UNITS
AND ASSOCIATED METHODS**

TECHNOLOGICAL FIELD

[0001] This disclosure relates generally to fracturing operations for oil and gas wells, and in particular, to power sources and networks for auxiliary equipment onboard hydraulic fracturing units and associated methods.

BACKGROUND

[0002] Fracturing is an oilfield operation that stimulates production of hydrocarbons, such that the hydrocarbons may more easily or readily flow from a subsurface formation to a well. For example, a fracturing system may be configured to fracture a formation by pumping a fracking fluid into a well at high pressure and high flow rates. Some fracking fluids may take the form of a slurry including water, proppants (e.g., sand), and/or other additives, such as thickening agents and/or gels. The slurry may be forced via one or more pumps into the formation at rates faster than can be accepted by the existing pores, fractures, faults, or other spaces within the formation. As a result, pressure builds rapidly to the point where the formation fails and begins to fracture.

[0003] By continuing to pump the fracking fluid into the formation, existing fractures in the formation are caused to expand and extend in directions farther away from a well bore, thereby creating flow paths to the well bore. The proppants may serve to prevent the expanded fractures from closing when pumping of the fracking fluid is ceased or may reduce the extent to which the expanded fractures contract when pumping of the fracking fluid is ceased. Once the formation is fractured, large quantities of the injected fracking fluid are allowed to flow out of the well, and the production stream of hydrocarbons may be obtained from the formation.

[0004] Hydraulic fracturing has commonly been performed with the use of a diesel engine that acts as the prime mover in the powertrain. This diesel engine is then directly mated with a transmission that in turn is coupled to a drive shaft that then is connected to a reciprocating plunger pump. When a gear is selected at the transmission the diesel engine may then transfer power and torque through to the pump resulting in the pumps crank turning and displacing fracturing fluid. Commonly, the use of diesel engines onboard hydraulic fracturing units may yield between 2,000 and 3,000 hydraulic horsepower (HHP). These kind of power outputs may at times result in up to twenty hydraulic fracturing units on location to be able to meet the flow and resultant pressure demand to fracture the sub-surface geological formation.

[0005] Diesel engine hydraulic fracturing units like all variations of hydraulic fracturing units have onboard auxiliary equipment that is required to operate in conjunction with the powertrain to ensure that equipment is lubricated and protected, and also to enhance to efficiency of the equipment. Examples of these onboard auxiliary equipment include lubrication pumps that provide low-pressure and high-pressure gear oil injection into the reciprocating pump crank case and bearing housings. The injection of this oil into the pump's power end ensures that friction between mating surfaces is reduced, and it also mitigates the heat rejection from this friction and prevents it from elevating to a temperature that may cause wear and premature failure.

[0006] Cooling equipment is another example of auxiliary equipment onboard many hydraulic fracturing units. The cooling equipment includes multiple cooling circuits for engine cooling, transmission cooling, pump lube oil cooling, hydraulic cooling and the like. This cooling equipment may include tube and shell heat exchangers, but it is more common to utilize fan-driven heat exchangers that allow for the control of fan speed that permits operators to mitigate the amount of cooling performed and conserve energy used to drive fan motors.

[0007] The auxiliary equipment onboard a diesel engine hydraulic fracturing unit, including the lubrication and cooling equipment, needs driving power to allow the equipment to perform respective functions and operate efficiently. The power used to drive these onboard auxiliary equipment is commonly hydraulic power from a power

takeoff (PTO) that is located on the main diesel engine, and at times may see up to 100 HHP drawn from the diesel engine.

[0008] As an alternative to the diesel engine, electric fracking (or e-frac) uses an electric motor to drive a reciprocating fracturing pump. Electric fracturing sees power generated at a single source (usually from a turbine generator). This power source conditions and distributes the power through electric switching and drives, eventually providing power to the main electric motor that is equipped with a dual shaft that may power two pumps onboard a fracturing unit.

[0009] The use of electric power to drive fracturing pumps does not eliminate the requirement for onboard auxiliary equipment, but the utilization of high-voltage power may be conditioned and transformed into low voltages to run pumps, cooling equipment and other auxiliary equipment. The use of a single standalone turbine generator allows the auxiliary equipment to be powered from a standalone power source, and avoids the removal of power from the prime mover driving the pump as does a diesel engine hydraulic fracturing unit.

[0010] Although it may appear that an electric fracturing well site is also less congested than a diesel engine fracturing well site, both are often comparably congested. The assembly of two pumps per fracturing unit at an electric fracturing well site does see the pump count reduce by half. But the electric fracturing well site adds multiple drive and transformer trailers, as well as primary and backup turbine generators. Despite the vehicle and machinery count on location, the power utilization to both the pump and auxiliary equipment does often prove to be more efficient with electric motor efficiencies being greater than that of its hydraulic counterpart; however, the capital cost to implement such electric equipment and circuitry is far greater.

SUMMARY

[0011] In view of both diesel and electric fracturing technologies, a direct drive turbine (DDT) hydraulic fracturing unit has been developed that utilizes a dual fuel, dual shaft gas turbine engine as the prime mover in the hydraulic fracturing pump powertrain. The gas turbine engine is installed in a sound proof enclosure that allows the engine to

be protected from adverse weather conditions. The gas turbine engine is directly mounted and coupled to a reduction transmission (e.g., gearbox) that in turn is connected to a drive shaft that finally connects to a reciprocating pump via a drive flange. These hydraulic fracturing units may output the HHP of two conventional diesel engines, or one electric fracturing unit, without the need for other electric-generation equipment.

[0012] A fundamental difference in the assembly of DDT hydraulic fracturing units is their onboard auxiliary equipment. There are more auxiliary circuits and equipment onboard a DDT hydraulic fracturing unit in comparison to a diesel engine hydraulic fracturing units due to the complexity and requirements of a gas turbine engine. The gas turbine engine has dual shafts with the output shaft reaching speeds of up to 16,000 revolutions per minute (RPM), and this makes running a PTO directly from the engine's output shaft a complex and costly development. Example implementations of the present disclosure are directed to power generation onboard a mobile turbine-engine driven hydraulic fracturing unit, and may include hydraulic power, electric power, or both hydraulic power and electric power.

[0013] The present disclosure includes, without limitation, the following example implementations.

[0014] Some example implementations provide a system for fracturing a well. The system includes one or more one or more hydraulic fracturing units. Each hydraulic fracturing unit includes a chassis, a reciprocating plunger pump connected to the chassis and configured to pump a fracturing fluid, and a powertrain connected to the chassis and configured to power the reciprocating plunger pump. The powertrain includes a direct drive gas turbine engine and a drivetrain, and the direct drive gas turbine engine is operable using of two or more different types of fuel. The hydraulic fracturing unit also includes auxiliary equipment located onboard the chassis, and driven by electric motors to support operation of the hydraulic fracturing unit including the reciprocating plunger pump and the powertrain.

[0015] The system also includes one or more electric power arrangements configured to power the auxiliary equipment. Each electric power arrangement includes

an engine-generator set configured to generate electric power, and an electric power network coupled to the engine-generator set and the electric motors. The electric power network is also coupled or coupleable to a utility power grid, a battery bank or a second engine-generator set of a neighboring hydraulic fracturing unit. The electric power network is configured to deliver the electric power generated by the engine-generator set to the electric motors to drive the auxiliary equipment. And the electric power network is configured to switchably connect the utility power grid, the battery bank or the second engine-generator set to deliver power to the electric motors responsive to a failure or fault of the engine-generator set.

[0016] In some examples, the engine-generator set includes a diesel engine and an electric motor generator, and the diesel engine is configured to drive the electric motor generator to generate the electric power. In some other examples, the engine-generator set includes a gas turbine engine and an electric generator, and the gas turbine engine is configured to drive the electric generator to generate the electric power.

[0017] In some examples, the hydraulic fracturing unit(s) are a plurality of hydraulic fracturing units, and the electric power arrangement(s) are a plurality of electric power arrangements each of which is connected to the chassis of a respective one of the hydraulic fracturing units. In some other examples, the electric power arrangement(s) include the electric power arrangement that is configured to power the auxiliary equipment across the hydraulic fracturing units.

[0018] Some other example implementations provide a system for fracturing a well. The system includes also one or more one or more hydraulic fracturing units, and the auxiliary equipment is driven by hydraulic motors to support operation of the hydraulic fracturing unit including the reciprocating plunger pump and the powertrain. The system of these other example implementations also includes one or more hydraulic power arrangements configured to power the auxiliary equipment. Each hydraulic power arrangement includes a hydraulic power source and a hydraulic power network. The hydraulic power source includes an electric motor configured to drive a plurality of pumps via a hydraulic pump drive to generate hydraulic power, and the

electric motor is powered by shore power from an external source of electric power. The hydraulic power network is coupled to the hydraulic power source and the hydraulic motors, and configured to deliver the hydraulic power generated by the hydraulic power source to the hydraulic motors to drive the auxiliary equipment.

[0019] Some yet other example implementations provide a system for fracturing a well. The system includes also one or more one or more hydraulic fracturing units, and the auxiliary equipment is driven by hydraulic motors to support operation of the hydraulic fracturing unit including the reciprocating plunger pump and the powertrain. The system also includes one or more hydraulic power arrangements configured to power the auxiliary equipment. Each hydraulic power arrangement includes a plurality of power takeoffs (PTOs) connected to a transmission of the drivetrain. The PTOs are equipped with respective electric motor generators and pump, and the transmission is configured to drive the respective electric motor generators to generate electric power from which the respective pumps are powered to generate hydraulic power. The hydraulic power arrangement also includes a hydraulic power network coupled to the PTOs and the hydraulic motors. The hydraulic power network is configured to deliver the hydraulic power generated by the multi-stage pump to the hydraulic motors to drive the auxiliary equipment.

[0020] Example implementations also provide methods of fracturing a well. The methods of some example implementations includes arranging hydraulic fracturing unit(s) with auxiliary equipment driven by electric or hydraulic motors. The method includes arranging electric or hydraulic power arrangement(s) to power the auxiliary equipment. And the method includes operating the powertrain to power reciprocating plunger pump to pump fracturing fluid, and the electric / hydraulic power arrangement to power the auxiliary equipment.

[0021] These and other features, aspects, and advantages of the present disclosure will be apparent from a reading of the following detailed description together with the accompanying figures, which are briefly described below. The present disclosure includes any combination of two, three, four or more features or elements set forth in this disclosure, regardless of whether such features or elements are expressly

combined or otherwise recited in a specific example implementation described herein. This disclosure is intended to be read holistically such that any separable features or elements of the disclosure, in any of its aspects and example implementations, should be viewed as combinable, unless the context of the disclosure clearly dictates otherwise.

[0022] It will therefore be appreciated that this Brief Summary is provided merely for purposes of summarizing some example implementations so as to provide a basic understanding of some aspects of the disclosure. Accordingly, it will be appreciated that the above described example implementations are merely examples and should not be construed to narrow the scope or spirit of the disclosure in any way. Other example implementations, aspects and advantages will become apparent from the following detailed description taken in conjunction with the accompanying figures which illustrate, by way of example, the principles of some described example implementations.

BRIEF DESCRIPTION OF THE FIGURES

[0023] Having thus described aspects of the disclosure in the foregoing general terms, reference will now be made to the accompanying figures, which are not necessarily drawn to scale, and wherein:

[0024] FIG. 1 is a block diagram of a system for fracturing a well according to some example implementations of the present disclosure;

[0025] FIG. 2 is a block diagram of a hydraulic fracturing unit according to some example implementations;

[0026] FIG. 3 illustrates a power arrangement configured to power auxiliary equipment onboard the hydraulic fracturing unit, according to some example implementations;

[0027] FIG. 4 illustrates an example in which the power arrangement is an electric power arrangement, according to some example implementations;

[0028] FIGS. 5 and 6 illustrate examples in which the power arrangement is a hydraulic power arrangement, according to some example implementations;

[0029] FIG. 7 illustrates an example in which the power arrangement is onboard the hydraulic fracturing unit, according to some example implementations;

[0030] FIGS. 8, 9 and 10 are block diagrams of a system with a plurality of hydraulic fracturing units with respective onboard power arrangements configured to power to respective auxiliary equipment, according to some example implementations;

[0031] FIGS. 11, 12, 13 and 14 are block diagrams of a system with a plurality of hydraulic fracturing units, and a power arrangement configured to power to respective auxiliary equipment across the plurality of hydraulic fracturing units, according to some example implementations;

[0032] FIG. 15 illustrates another example of an electric power arrangement according to some example implementations;

[0033] FIG. 16 illustrates an example of a variable frequency drive (VFD) with connections to an AC motor, according to some example implementations;

[0034] FIG. 17 is a block diagram another example hydraulic power arrangement according to some example implementations;

[0035] FIG. 18 is a block diagram another power arrangement according to some example implementations;

[0036] FIG. 19 illustrates an active front end (AFE) according to some example implementations; and

[0037] FIGS. 20 and 21 are flowcharts illustrating various operations in methods of fracturing a well, according to various example implementations.

DETAILED DESCRIPTION

[0038] Some implementations of the present disclosure will now be described more fully hereinafter with reference to the accompanying figures, in which some, but not all implementations of the disclosure are shown. Indeed, various implementations of the disclosure may be embodied in many different forms and should not be construed as limited to the implementations set forth herein; rather, these example implementations are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the disclosure to those skilled in the art. Like reference

numerals refer to like elements throughout.

[0039] Unless specified otherwise or clear from context, references to first, second or the like should not be construed to imply a particular order. A feature may be described as being above another feature (unless specified otherwise or clear from context) may instead be below, and vice versa; and similarly, features described as being to the left of another feature else may instead be to the right, and vice versa. Also, while reference may be made herein to quantitative measures, values, geometric relationships or the like, unless otherwise stated, any one or more if not all of these may be absolute or approximate to account for acceptable variations that may occur, such as those due to engineering tolerances or the like.

[0040] As used herein, unless specified otherwise or clear from context, the “or” of a set of operands is the “inclusive or” and thereby true if and only if one or more of the operands is true, as opposed to the “exclusive or” which is false when all of the operands are true. Thus, for example, “[A] or [B]” is true if [A] is true, or if [B] is true, or if both [A] and [B] are true. Further, the articles “a” and “an” mean “one or more,” unless specified otherwise or clear from context to be directed to a singular form.

[0041] FIG. 1 illustrates a system **100** for fracturing a well according to some example implementations of the present disclosure. As shown, the system generally includes a plurality of plurality of hydraulic fracturing units **102** configured to pump a fracturing fluid, and a manifold **104** from which the fracturing fluid is delivered to the well.

[0042] More particularly, in the system **100** shown in FIG. 1, water from tanks **106** and gelling agents dispensed by a chemical unit **108** are mixed in a hydration unit **110**. The discharge from hydration unit, along with sand carried on conveyors **112** from sand tanks **114** is fed into a blender **116** that mixes the gelled water and sand into fracturing fluid (a slurry). The blender discharges the fracturing fluid through low-pressure hoses that convey it into two or more low-pressure lines in the manifold **104**. The low-pressure lines in the manifold feed the fracturing fluid to the hydraulic fracturing units **102**, perhaps as many as a dozen or more, through low-pressure “suction” hoses.

[0043] The hydraulic fracturing units **102** take the fracturing fluid and discharge it at high pressure through individual high-pressure “discharge” lines into two or more high-pressure lines or “missiles” on the manifold **104**. The missiles flow together, i.e., they are manifolded on the manifold. Several high-pressure flow lines run from the manifolded missiles to a “goat head” that delivers the fracturing fluid into a “zipper” manifold. The zipper manifold allows the fracturing fluid to be selectively diverted to, for example, one of two well heads. Once fracturing is complete, flow back from the fracturing operation discharges into a flowback manifold which leads into flowback tanks.

[0044] Because systems for fracturing a well are required on site for a relatively short period of time, the larger components of the system **100** typically are transported to a well site on skids, trailers, or trucks as more or less self-contained units. They then are connected to the system by one kind of conduit or another. In FIG. 1, for example, the hydraulic fracturing units, chemical unit **108**, hydration unit **110** and blender **116** may be mounted on a trailer that is transported to the well site by a truck. Because they are designed to be more or less self-contained units, however, they are complex machines and incorporate several distinct subsystems and a large number of individual components.

[0045] FIG. 2 illustrates a hydraulic fracturing unit **102** according to some example implementations of the present disclosure. The hydraulic fracturing unit includes a chassis **204**, and a pump **206**, such as a reciprocating pump, connected to the chassis and configured to pump a fracturing fluid. In some examples, the chassis may include a trailer (e.g., a flat-bed trailer) and/or a truck body to which the components of the hydraulic fracturing unit may be connected. For example, the components may be carried by trailers and/or incorporated into trucks, so that they may be easily transported between well sites.

[0046] The pump **206** may be reciprocating plunger pump including a power end and a fluid end. The power end transforms rotational motion and energy from a powertrain **208** into the reciprocating motion that drives plungers in the fluid end. In the fluid end, the plungers force fluid into a pressure chamber that is used to create high

pressure for well servicing. The fluid end may also include a discharge valve assembly and a suction valve assembly.

[0047] The hydraulic fracturing unit **102** includes the powertrain **208** also connected to the chassis and configured to power the pump. In this regard, the powertrain includes a prime mover **210** and a drivetrain **212**. In some examples, the hydraulic fracturing unit is a direct drive turbine (DDT) unit in which the prime mover is or includes a gas turbine engine (GTE) **214**. As also shown, the drivetrain includes a reduction transmission **216** (e.g., gearbox) connected to a drive shaft **218**, which, in turn, is connected to the pump such as via an input shaft or input flange of the pump. Other types of GTE-to-pump arrangements are contemplated.

[0048] In some examples, the GTE **214** may be a direct drive GTE. The GTE may be a dual-fuel or bi-fuel GTE, for example, operable using two or more different types of fuel, such as natural gas and diesel fuel, although other types of fuel are contemplated. For example, a dual-fuel or bi-fuel GTE may be capable of being operated using a first type of fuel, a second type of fuel, and/or a combination of the first type of fuel and the second type of fuel. For example, the fuel may include compressed natural gas (CNG), natural gas, field gas, pipeline gas, methane, propane, butane, and/or liquid fuels, such as, for example, diesel fuel (e.g., #2 Diesel), bio-diesel fuel, bio-fuel, alcohol, gasoline, gasohol, aviation fuel, etc. Gaseous fuels may be supplied by CNG bulk vessels, a gas compressor, a liquid natural gas vaporizer, line gas, and/or well-gas produced natural gas. Other types and sources of fuel are contemplated. The GTE may be operated to provide horsepower to drive the pump **206** via the drivetrain **212** to safely and successfully fracture a formation during a well stimulation project.

[0049] As also shown, the hydraulic fracturing unit **102** includes auxiliary equipment **220** located onboard the chassis **204**, and configured to support operation of the hydraulic fracturing unit including the pump **206** and the powertrain **208**. As described above, the auxiliary equipment onboard the hydraulic fracturing unit may include lubrication and cooling equipment such as cooling fans and lubrication pumps. More particular examples of auxiliary equipment include a lube oil pump coupled to the reduction transmission **216**, a cooling fan coupled to a reduction transmission lube oil

pump, a lube oil pump coupled to the power end of the pump, a cooling fan coupled to a power end lube oil pump, a cooling fan to the GTE **214**, a GTE air cooling fan, a screw type air compressor, an air dryer, greaser equipment for the pump **206**, an air intake blower fan motor, a GTE controller, a hydraulic starter pump, a GTE lube cooling fan, a telescope exhaust winch, a master programmable logic controller (PLC), and the like.

[0050] As shown in FIG. 3, example implementations of the present disclosure provide a power arrangement **300** configured to power the auxiliary equipment **220**. As explained in greater detail below, the system **100** may include the power arrangement may be located onboard the hydraulic fracturing unit **102**, such as on the gooseneck of a trailer. Additionally or alternatively, the system **100** may include the power arrangement configured to power the auxiliary equipment across the plurality of hydraulic fracturing units if not also backside equipment such as the chemical unit **108**, hydration unit **110**, conveyors **112**, sand tanks **114**, blender **116** and the like. In some examples, the backside equipment may also include a data center **118**.

[0051] As shown, the power arrangement **300** generally includes a power source **302** and a power network **304**. The power source is configured to generate power for the auxiliary equipment. The power network is coupled to the power source and the auxiliary equipment, and configured to deliver the power generated by the power source to the auxiliary equipment.

[0052] In various examples, the power arrangement **300** may be an electric power arrangement or a hydraulic power arrangement. FIG. 4 illustrates an example in which the power arrangement **300** is an electric power arrangement **400**. In this example, the power source **224** is an electric power source **402** configured to generate electric power for the auxiliary equipment **220**, and the power network is an electric power network **404** configured to deliver the electric power to the auxiliary equipment, which may include one or more electric motors **406**.

[0053] As shown in FIG. 4, in some examples, the electric power source **402** includes an engine-generator set **408** with an engine **410**, such as a reciprocating engine or GTE **412**, and an electric generator such as an electric motor generator **414**. One example of a suitable reciprocating engine is a diesel engine such as a tier four

diesel engine, and one example of a suitable electric motor generator is a permanent magnet (PM) motor generator.

[0054] One particular example of a suitable GTE **412** that could be made part of the electric power source **402** is a microturbine from Capstone Turbine Corporation, although other turbines with similar technology and compact foot print could also be used. Gas turbine engines such as Capstone microturbines can be installed individually or in a parallel multipack configuration to create a local power grid that can be quiet, lightweight, modular and have low maintenance. Capstone microturbines and others like them have similar fuel capabilities to that of the Vericor TF50F turbine engine in such a way that even though natural gas is their preferred fuel source, diesel can be introduced as fuel for the turbine for a short period of time making this turbine adaptable to operating conditions and fuel shortage scenarios.

[0055] The utilization of a microturbine as the GTE **412** in the electric power source **402** may result in lower emissions to that of a reciprocating engine such as a diesel engine. This may allow for a single fuel hook up for CNG, reduce total operating costs, and reduce the power generation package size on the hydraulic fracturing unit **102**. Other machinery and components associated with the main turbine air intake conditioning such as chillers and filters may also be shared with this microturbine.

[0056] In some examples, the electric power arrangement **400** further includes a connection **416** to shore power from an external source of electric power, such as a utility power grid, another engine-generator set or the like, from which the auxiliary equipment **220** are also powerable. Additionally or alternatively, in some examples, the electric power arrangement further includes a battery bank **418** chargeable from the power generated by the electric motor generator **414**, and from which the auxiliary equipment are also powerable. The battery bank may include one or more batteries such as lithium ion or lead acid batteries. In some examples in which the power arrangement **300** is onboard the hydraulic fracturing unit **102**, and the hydraulic fracturing units of the system **100** include respective power arrangements, the electric power arrangement further includes a connection **420** to a second power arrangement

of a neighboring hydraulic fracturing unit from which the auxiliary equipment are also powerable.

[0057] The auxiliary equipment **220** may be powered from the engine-generator set **408**, the shore power from the external source of electric power, the second electric power arrangement from a neighboring hydraulic fracturing unit **102**, or the battery bank **418**. In some examples, the electric power network **404** is configured to deliver the electric power generated by the engine-generator set to the electric motors **406** to drive the auxiliary equipment. In some of these examples in which the engine-generator set experiences a fault or failure, the electric power network may then, in response, switchably connect the utility power grid, the battery bank or the second engine-generator set to deliver power to the electric motors.

[0058] FIG. 5 illustrates an example in which the power arrangement **300** is a hydraulic power arrangement **500**. In this example, the power source **224** is a hydraulic power source **502** configured to generate hydraulic power for the auxiliary equipment **220**, and the power network is a hydraulic power network **504** configured to deliver the hydraulic power to the auxiliary equipment, which may include one or more hydraulic motors **506**. As shown in FIG. 5, the hydraulic power source **502** includes a second prime mover **508**, such as a reciprocating engine or an electric motor **510**, connected to a plurality of pumps **512** via a hydraulic pump drive **514**. One example of a suitable electric motor is a PM motor. In some examples, the hydraulic power arrangement further includes a connection **516** to shore power from an external source of electric power, such as a utility power grid, another engine-generator set or the like, from which the electric motor may be powered.

[0059] FIG. 6 illustrates another example in which the power arrangement **300** is a hydraulic power arrangement **600**. Similar to FIG. 5, in this example, the power source **224** is a hydraulic power source **602** configured to generate hydraulic power for the auxiliary equipment **220**, and the power network is a hydraulic power network **504** configured to deliver the hydraulic power to the auxiliary equipment, which may include hydraulic motors **606**. As shown in FIG. 6, however, the hydraulic power source includes a plurality of power takeoffs (PTOs) **608** connected to the transmission **216** of the

hydraulic fracturing unit **102**. Each of the plurality of PTOs is equipped with a second prime mover **610**, such as an electric motor generator **612**, and a pump **614**. The hydraulic power source therefore including a plurality of PTOs with respective second prime movers and pumps.

[0060] As indicated above, the power arrangement **300** the power arrangement may be located onboard the hydraulic fracturing unit **102**. FIG. 7 illustrates an example implementation of a hydraulic fracturing unit **702** in which the power arrangement **300** is connected to the chassis and configured to power the auxiliary equipment **220**. FIGS. 8, 9 and 10 illustrate examples of a system **800** including a plurality of these hydraulic fracturing units **702** with respective power arrangements.

[0061] As shown in FIGS. 7 and 8, the system **800** for fracturing a well includes a plurality of hydraulic fracturing units **702** including respective pumps **206** configured to pump a fracturing fluid. The plurality of hydraulic fracturing units include respective powertrains **208** configured to power the respective pumps, and respective auxiliary equipment **220** configured to support operation of respective ones of the plurality of hydraulic fracturing units including the respective pumps and the respective powertrains. In addition, the plurality of hydraulic fracturing units further includes respective power arrangements **300** configured to power to the respective auxiliary equipment.

[0062] In some examples, the plurality of hydraulic fracturing units **702** include neighboring hydraulic fracturing units, and the respective power arrangements **300** of the neighboring hydraulic fracturing units are connected to one another, and from which the respective auxiliary equipment **220** of the neighboring hydraulic fracturing units are also powerable. This is shown by power cables **802** between neighboring hydraulic fracturing units in FIG. 8.

[0063] In the event power is lost on a hydraulic fracturing unit **702** equipped with a respective power arrangement **300**, an automatic switching mechanism may allow neighboring hydraulic fracturing units joined by a receptacle and plug to share power. The neighboring hydraulic fracturing unit, then, may be able to provide power to the hydraulic fracturing unit allowing its auxiliary equipment. If for some reason both

hydraulic fracturing units wanted to operate at the same time and distribute both of their power to a third hydraulic fracturing unit, the inclusion of synchronizing components such as a synchro scope may ensure the speed and frequency of their power arrangements are the same.

[0064] As shown in FIGS. 9 and 10, in some examples, the system **800** further includes a battery bank **904** connected to the respective power arrangements of the hydraulic fracturing units **702** that are configured to generate power from which the battery bank is chargeable. In some of these examples, the battery bank is configured to power the respective auxiliary equipment **220** from the power generated by the respective power arrangements. In addition, backside equipment such as one or more of the chemical unit **108**, hydration unit **110**, conveyors **112**, sand tanks **114**, blender **116** or data center **118** may be powered by the battery bank.

[0065] In FIG. 9, the battery bank **904** is directly connected to the respective power arrangements by respective power cables **906**. In FIG. 10, in some examples, the system **800** further includes an electric bus **1008** connecting the respective power arrangements of the hydraulic fracturing units **702**, if not also the backside equipment, to the battery bank. The electric bus may also function as the power share and distribution path. In some of these other examples, the electric bus is connected to the manifold **104**. Even further, in some examples, the battery bank is also connected to shore power from an external source of electric power (e.g., utility power grid), from which the battery bank may also be chargeable and/or the respective auxiliary equipment may also be powerable. This is shown in FIGS. 9 and 10 in which the battery bank is connected to the data center **118** that is in turn connected to shore power from the external source of electric power.

[0066] In other example implementations, the system may include the power arrangement configured to power the auxiliary equipment across the plurality of hydraulic fracturing units **102** if not also backside equipment such as the chemical unit **108**, hydration unit **110**, conveyors **112**, sand tanks **114**, blender **116**, data center **118** and the like. FIGS. 11, 12, 13 and 14 illustrate examples of a system **1100** including a plurality of hydraulic fracturing units, and a power arrangement **300** connected to the

hydraulic fracturing units, and configured to power the respective auxiliary equipment **220** across hydraulic fracturing units. In addition, backside equipment may be powered by power arrangement.

[0067] Due to high amperage draw from hydraulic fracturing units **102**, single power cables carrying the necessary voltage from the power arrangement **300** to the hydraulic fracturing units may not be suitable due to this amperage rating being unachievable. Each hydraulic fracturing unit that relies on the power arrangement to power its auxiliary equipment may have a divided bus to allow the total amperage to the hydraulic fracturing unit to be halved over an aluminum or copper bus bar allowing a single power cable to power each bus. Some backside equipment such as the chemical unit **108** and data center **118** may not require high continuous power and can be equipped with a single power distribution such as a bus bar.

[0068] In FIG. 11, the power arrangement **300** is directly connected to the hydraulic fracturing units **102** (and perhaps also the backside equipment) by respective power cables **1102**. In FIG. 12, in some examples, the system **1100** further includes an electric bus **1204** connecting the hydraulic fracturing units (and perhaps also the backside equipment) to the power arrangement. Similar to before, in some of these other examples, the electric bus is connected to the manifold **104**. Even further, in some examples, the power arrangement is also connected to shore power from an external source of electric power (e.g., utility power grid), from which the respective auxiliary equipment may also be powerable. This is shown in FIGS. 11 and 12 in which the power arrangement is connected to the data center **118** that is in turn connected to shore power from the external source of electric power.

[0069] As shown in FIGS. 13 and 14, in some examples in which the power arrangement **300** is an electric power arrangement **400**, and includes is an electric power source **402**, the system further includes a battery bank **1306** chargeable from the power generated by the electric power arrangement. The battery bank may supply power to the equipment as required. Prior to commencing operations, if the battery bank is charged and fuel to the power arrangement **300**, the battery bank may act as a buffer to complete a job. In some examples, when the battery bank is charged, the power

arrangement **300** may bypass the battery bank, and the battery bank may act as a hub to supply power to the hydraulic fracturing units **102** (and perhaps also the backside equipment).

[0070] FIG. 13 is similar to FIG. 11 in that the battery bank **1306** is directly connected to the hydraulic fracturing units **102** (and perhaps also the backside equipment) by respective power cables **1102**. FIG. 14 is similar to FIG. 12 in that the system **1100** further includes the electric bus **1204** connecting the hydraulic fracturing units (and perhaps also the backside equipment) to the battery bank. In FIGS. 13 and 14, the battery bank is configured to power the respective auxiliary equipment **220** across the plurality of hydraulic fracturing units **102**. Even further, in some examples, the battery bank is also connected to shore power from the external source of electric power (e.g., utility power grid via connection to the data center **118**), from which the battery bank may also be chargeable and/or the respective auxiliary equipment may also be powerable.

[0071] To further illustrate example implementations of the present disclosure, FIG. 15 is a block diagram a particular electric power arrangement **1500** that in some examples may correspond to electric power arrangement **400** shown in FIG. 4. As shown, the electric power arrangement may include a diesel engine **1512** and an electric generator **1514** to supply power to the system. In some examples, the diesel engine is a 225 – 300 HP Caterpillar C7 (maximum power rating of 300 HP and a speed between 1,800 to 2,200 RPM), a 335 - 456 BHP Caterpillar C9 (maximum power rating of 456 HP and a speed between 1,800 to 2,200 RPM), or similar.

[0072] The diesel engine **1512** may be operatively coupled to the electric generator **1514** to supply electrical power to multiple electric drivers that power one or more auxiliary equipment such as cooling fans and lube oil pumps. Examples of a suitable electric generator include a Caterpillar Model SR4 200KW, a Kato 200 KW Model A250180000, and the like. In some examples, the electric generator may be configured to provide 230/240-volt, 3-phase power or 460/480-volt, 3-phase power to individual variable frequency drives (VFDs) **1504** to power various motors **1506** of the auxiliary equipment.

[0073] The VFD **1504** may include a full wave three-phase rectifier configured to convert incoming three-phase AC voltage to a desired DC voltage through a plurality (e.g., 9) of silicon controlled rectifiers (SCRs) or diodes. This DC voltage may then power those of the motors **1506** that are DC motors. Alternatively, the generated electrical current may be sent through an inverter at the prescribed voltage and synthesized sine wave frequency such that the VFDs may selectively control the operation of AC motors. This may be by the providing prescribed voltage and synthesized sine wave frequency the VFD selectively controls the speed and direction of the AC motors. In some examples, the VFDs may be configured to directly supply AC power to the AC motors, thereby eliminating the use on an external inverter. One example of a suitable VFD with connections to an AC motor is depicted in FIG. 16. Examples of suitable VFDs include a Delta #CP 2000 VFD rated for 230 or 460 VAC, max power 1 to 536 HP, a Danfoss #130B0888 FC301 460V 3-phase, A Danfoss Vacon 100X, and the like.

[0074] The VFDs **1504** may power the motors **1506** of various auxiliary equipment **1520**, the operation of each of which may add a load onto the electric power arrangement **1500**. Examples of various auxiliary equipment and respective approximate loads include:

- lube oil pump to the gearbox (1 HP)
- cooling fan to gearbox lube oil pump (15 HP)
- lube oil pump to the power end (15 HP)
- cooling fan to the power end lube oil pump x 2 (15 HP each)
- cooling fan to the CAT C9 engine (10 HP)
- CAT C9 engine air cooling fan (10 HP)
- screw type air compressor to provide 150 pounds per square inch (PSI) air for fuel equipment intensifier to amplify to > 200 PSI (7.5 HP) with air dryer (0.75 HP)
- greaser equipment for the fracturing pump (0.25 HP)
- air intake blower fan motors x 2 (40 HP each)
- GTE controller (1 HP)

- hydraulic starter pump equipment (60 HP)
- turbine lube cooling fan (4 HP)
- telescope exhaust winch x 2 (1 HP each)
- master PLC for VFD / electric generator (2 HP)
- Total 236.5 HP / 176 kW

Each auxiliary equipment may add a horsepower drag on the overall electric power arrangement **1500**, and this drag may depend on characteristics of the auxiliary equipment.

[0075] As suggested above, in some examples, the electric power arrangement **1500** may be more efficient with finer control of cooling and lubrication through feedback loops continuously monitored by processing circuitry such as a programmable logic controller (PLC). Examples of suitable controllers include a Parker IQAN™ controller, a Danfoss Plus+One® controller, or a custom process controller.

[0076] In some examples, the electric power arrangement **1500** may also be powered by shore power **1516** through a separate connection to an external source of electric power. If using shore power, a selectable switch may be configured to selectably separate the electric generator **1514** from the shore power. In some examples, the electric power arrangement may include or be connected to a battery bank **1518** that may supply power in the case of diesel engine failure or shore power failure.

[0077] Further consider examples of the system **1100** in FIGS. 11-14 in which the hydraulic fracturing units are connected to a power arrangement **300** configured to power the respective auxiliary equipment **220** across hydraulic fracturing units **102**. Also consider a particular example in which the system includes seven hydraulic fracturing units. Taking into account efficiency of the electric generator **1514** (commonly 80%), a minimum of 300 HP may be distributed per hydraulic fracturing unit. The total demand of the hydraulic fracturing units may depend on how many are rigged up. Further including backside equipment, the electric generator may power the following with respective approximate loads:

- hydraulic fracturing units (x7) = 1655.5 HP
- chemical unit = 107 HP

- hydration unit = 665 HP
- sand tanks = 750 HP
- blender = 1433 HP
- data center = 500 HP

The total horsepower supplied may be approximately 5110 HP (3806 kW). In the case of an electric generator **1514** driven by a GTE, one example of a suitable GTE is a Vericor TF50 turbine with a rated to 5600 HP (4200 kW).

[0078] FIG. 17 is a block diagram a particular hydraulic power arrangement **1700** that in some examples may correspond to hydraulic power arrangement **500** shown in FIG. 5. As shown, the hydraulic power arrangement includes an electric motor **1710** such as a 300 HP electric motor coupled to a module hydraulic pump drive **1714** with multiple (e.g., four) output gear shafts. The number of module hydraulic pump drives and output gear shafts may be varied to suit a particular application. Examples of a suitable electric motor include a Grainger 300 HP fire pump motor (460 V, 3-phase, 1780 RPM), a Baldor 300 HP motor (460 V, 3-phase, 1780 RPM), or the like. One example of a suitable module hydraulic pump drive is a Durst hydraulic pump drive gearbox #4PD08.

[0079] The module hydraulic pump drive **1714** may power auxiliary equipment **1720** though motors and hydraulic pumps **1712**, which may be coupled to the module hydraulic pump drive individually or in tandem. In this regard, the hydraulic pumps may be configured to supply hydraulic fluid to corresponding hydraulic motors of various auxiliary equipment. These again may power auxiliary equipment such as cooling fans and lube oil pumps. Examples of various auxiliary equipment and respective approximate loads include:

- lube oil pump to the gearbox (1 HP)
- cooling fan to gearbox lube oil pump (8 HP)
- lube oil pump to the power end low pressure (11 HP)
- lube oil pump to the power end high pressure (18 HP)
- cooling fan to the power end lube oil pump (40 HP)
- greaser equipment for the fracturing pump (1 HP)

- Turbine Fuel Pump (1.5 HP)
- Turbine Washing System (1 HP)
- Turbine/Gearbox/Hydraulic Cooler Fan (40 HP)
- Air exchange Fans (10 HP)
- Hydraulic Pump for Turbine Starter, Lid openings, Compressor etc (70HP)
- Total 201 HP / 150.37 kW

[0080] This hydraulic power arrangement **1700** does not rely on a diesel engine but instead an electric motor that may operate off shore power from an external source of electric power that may supply power to multiple units on a jobsite, thereby eliminating at least several components that may be required for a diesel engine (e.g., a fuel pump, an air compressor, an engine cooling fan).

[0081] FIG. 18 is a block diagram another particular power arrangement **1800** that may be connected to a powertrain **1802** that corresponds to powertrain **208**. As shown, the powertrain includes a housing with a GTE **1810** coupled to a turbine gearbox **1816** (reduction transmission) connected to a drive shaft **1818**, which, in turn, may be connected to the pump such as via an input shaft or input flange of the pump. The hydraulic power source includes a plurality of PTOs **1804** connected to the turbine gearbox, and at least one of the PTOs may be connected to an alternator **1806** or other electric generator. The alternator may be configured to generate electric power from which auxiliary equipment may be powered, and any unused electric power may be feedback to an external source such as the utility power grid.

[0082] In some examples, the alternator **1806** may be engaged with or disengaged from the PTO **1804** via a hydraulic or pneumatic clutch to allow the GTE **1814** to direct more power through the drivetrain and into the pump if needed. When disengaged from the PTO, the auxiliary equipment may be powered from shore power connections and other generated grid power. When the alternator is engaged with the PTO, as well as feeding auxiliary equipment such as cooling fans and compressors, an uninterrupted power source (UPS) **1808** may be constantly charged during pumping operations. This UPS may be used to solely drive a hydraulic pump that will be used to start the GTE by feeding hydraulic power to the motor starter.

[0083] An active front end (AFE) **1810** may be placed on the two outputs of the alternator **1806** to change AC voltage to DC. FIG. 19 illustrates one example of a suitable AFE. As shown, the AFE may include IBGTs (insulated bipolar gate resistors), which may ensue that harmonics and other power sent through the AFE are dampened and power efficiency is increased. As well as treating alternator power, another AFE may also treat raw shore power coming into the grid in the same way.

[0084] FIG. 20 is a flowchart illustrating various operations in a method **2000** of fracturing a well, according to various example implementations. The method includes arranging one or more hydraulic fracturing units **102**, **702**, as shown at block **2002**. Each hydraulic fracturing unit includes a reciprocating plunger pump **206** configured to pump a fracturing fluid, a powertrain **208** configured to power the reciprocating plunger pump, and auxiliary equipment **220** driven to support operation of the hydraulic fracturing unit including the reciprocating plunger pump and the powertrain. The method includes arranging one or more electric power arrangements **400** to power the auxiliary equipment, as shown at block **2004**. And the method includes operating the powertrain to power the reciprocating plunger pump to pump the fracturing fluid, and the electric power arrangement to power the auxiliary equipment, as shown at block **2006**.

[0085] FIG. 21 is a flowchart illustrating various operations in a method **2100** of fracturing a well, according to various other example implementations. The method includes arranging one or more hydraulic fracturing units **102**, **702**, as shown at block **2102**. Each hydraulic fracturing unit includes a reciprocating plunger pump **206** configured to pump a fracturing fluid, a powertrain **208** configured to power the reciprocating plunger pump, and auxiliary equipment **220** driven to support operation of the hydraulic fracturing unit including the reciprocating plunger pump and the powertrain. The method includes arranging one or more hydraulic power arrangements **500**, **600** to power the auxiliary equipment, as shown at block **2104**. And the method includes operating the powertrain to power the reciprocating plunger pump to pump the fracturing fluid, and the hydraulic power arrangement to power the auxiliary equipment, as shown at block **2106**.

[0086] As described above and reiterated below with further example implementation details, various example implementations are disclosed herein that provide power arrangements and methods for powering of auxiliary equipment onboard a hydraulic fracturing unit such as a DDT hydraulic fracturing unit or trailer. The auxiliary equipment include, for example, cooling of process fluids through heat exchangers, pumping equipment, compressor units, winches and linear actuators, electrical control equipment, heats/coolers and hydraulic equipment. The power arrangements of example implementations may be configurable and may be adjusted to suit the needs of each individual scenario and situation.

[0087] Some example implementations of a power arrangement include an engine or prime mover onboard the gooseneck area of a GTE-driven hydraulic fracturing unit. The engine / prime mover may be connected to an electric power generator such as a PM motor or a hydraulic pump drive with one or more pumps.

[0088] Some example implementations include a diesel reciprocating engine onboard the GTE-driven hydraulic fracturing unit, and other example implementations includes an electric motor in place of the diesel engine. The location of the engine / motor may be the gooseneck area of a trailer, but the design of the trailer may permit installation of the engine / motor on the rear axles of the trailer.

[0089] In examples including the diesel engine, it may be equipped with supporting equipment such as fuel reservoirs, coolant reservoirs, battery banks, diesel exhaust fluid tanks and cooling fans. The cooling fan on the diesel engine may be supplied by the engine manufacturer and mounted from a PTO located on the engine or it may be made external and powered from the hydraulic power network coming from the hydraulic pump drive. In another implementation, the diesel engine may be replaced with an electric motor that when installed is accompanied by electric switch gear that houses overload protection as well as a form of isolating the electric motor. Directly mounted from the diesel engine may be the hydraulic pump drive, which may be connected to the electric motor in another implementation.

[0090] The hydraulic pump drive may have a female spur shaft connection that is installed onto the diesel engine or electric motor, and the two components may be

secured via a bell housing that connects a face of the engine/motor to a face of the hydraulic pump drive. Once installed the hydraulic pump drive may be configured to house up to four pumps but will be rated by the total amount of horse power and torque it may yield at each output gear. Depending on the application, the use of a large displacement single pump directly coupled to the diesel engine may be beneficial. But there may be equal portion of components over the trailer that are operating at different pressures, such as a compressor and fans that operate at a flow that will generate 2000 PSI, and the pumps may operate at 3000 PSI at rated flow. Therefore, a variable displacement hydraulic pump with a compensator setting of 2000 PSI, and another pump with a compensator setting of 3000 PSI, may meet pressure requirements of each circuit bearing in mind that the output flow rate of each pumps should meet the flow demand from all components.

[0091] Depending on the configuration of pumps there may be multiple hydraulic reservoirs installed on the hydraulic fracturing unit that would allow for each individual pump installed on the hydraulic pump drive to draw fluid from. This may mean that a pump with a greater suction vacuum would not take away fluid from a pump with a small displacement therefore a smaller suction pressure. Alternatively pump suction lines may be positioned in a way this does not happen, but the size of the reservoir and mounting location of the reservoir dictate this. The space taken up by the hydraulic reservoir may depend on flow demand within the auxiliary equipment. The dwell time for fluid may be greater in the individual or group of reservoirs due to the hydraulic power network being open circuit, meaning that the displaced fluid from the pump may go to the desired component and then return to tank opposed to returning to the pumps suction side.

[0092] The hydraulic power network coming from the hydraulic pump drive may be equipped with filtration in the form of single or double housings that ensure fluid cleanliness is maintained to the best industry standard that is usually dictated by the International Organization for Standardization (ISO) fluid cleanliness classification.

[0093] A diesel engine directly coupled to a hydraulic pump drive that is installed with hydraulic pumps may allow for great versatility. The adjustment of pump pressure

and flow settings may allow the pumps to operate at their maximum efficiency while still ensuring they meet the power demands of the auxiliary equipment.

[0094] Working in conjunction with the hydraulic pumps may be hydraulic directional control valves that isolate fluid going to individual circuits, and when actuated, allow a valve spool to shift and direct flow through the ports. In the case of hydraulic motors driving fluid pumps and fans, these components may be controlled to operate in a single direction to avoid damage to pumps and mis-operation of fans. This may be done by selecting a directional control valve with a closed center and two positions.

[0095] In a de-energized state there may be no flow through the valve, resulting in the pump swash plate to move to the neutral position and stop displacing fluid. When operated via an electric signal energizing the solenoid from an electric control system, or commonly referred to as a supervisory control system (SCS), flow may be allowed to pass through the control valve to the designated auxiliary equipment that may operate a hydraulic motor. Return fluid may also be plumbed back to the hydraulic control valve and passed to a return line where it may be diverted back to the hydraulic reservoir. The control valves may be installed in multiple valves assemblies, commonly referred to as a “valve bank.”

[0096] Another part of the hydraulic power arrangement may be cooling circuits. The operation of hydraulic power networks may generate heat as the fluid flowing through different orifices, and the resulting pressure drop yields heat into the fluid that may not only degrade fluid lubrication properties but also cause problems to the components being operated with the fluid. To mitigate this, hydraulic cooling circuits may be installed that are activated by thermostatic control valves. When the fluid gets too hot, the valve may open and diverts fluid through a fan driven heat exchanger ensuring that it's cooled prior to returning to the reservoir and being introduced back into the hydraulic power network.

[0097] The diesel engine and hydraulic package may be configured to easily fit onto the gooseneck of a standard hydraulic fracturing unit while still ensuring space for additional components such as reservoirs, heat exchangers and compressors.

Hydraulic pumps installed from the hydraulic pump drive or directly from the engine are often very versatile. Ensuring that the flow requirements may be met, the pumps pressure compensator setting, as well as the introduction of load sensing, may ensure that only the required amount of power is drawn from the hydraulic pump. This may mean that the engine is operated at the power required, and that wasted energy and fuel is eradicated, thereby improving efficiency.

[0098] The complexity of an individual hydraulic power network is not high, and the introduction of a hydraulic pump drive with multiple individual network branches may still maintain a simple approach without the need to interface all pumps into a single common pressure line. The versatility of adding hydraulic pump drives with different output gears while still maintaining the same circuitry in place may be a benefit of a driven hydraulic network branch and allow for expansion in circuitry without the need to perform complex adjustments.

[0099] Operation of a circuit during hydraulic fracturing may be as follows. The SCS may operate from a battery storage device, which may be charged from an alternator or shore power provided to the implementation inclusive of an electric motor driving the hydraulic power network. The SCS may interface with the diesel engine through the engines electric control module (ECM), and from this, the engine may be given start, stop or throttle commands. Engine equipment information may also be sent through J1939 communication protocol.

[0100] During startup of the hydraulic fracturing unit, the diesel engine may be sent a start command and reach idle speed; or in another example implementation, electric power brought onboard may enter a VFD. The SCS may send a digital output to the drive to start up. In addition to that digital signal, an analog signal in the state of 4-20mA or 0-10V may be used to control the speed. The SCS may command the prime mover on the diesel engine to then go to a run speed which is typically 1900 RPM for most systems but could be as high as 2100 or as low as 1700 RPM. This speed may allow the hydraulic power source to operate at maximum power output and begin supplying flow into the hydraulic power network. The directional control valves may then

be operated in a sequence ensuring that all pre-conditions are met before bringing the turbine engine online.

[0101] When the fuel and lubrication pumps are operating within the correct parameters, the GTE start motor may be operated. This axial motor may be installed on a gearbox or other transmission toward a cold end of the turbine engine, and it may receive hydraulic flow. When the GTE reaches an idle speed, a sprag clutch in the turbine starter motor assembly may disengage, allowing combustion within the turbine combustion chamber to maintain the turbine speed. Upon reaching the idle speed, a signal may be removed from the hydraulic control valves to halt fluid to the starter motor. The hydraulic power arrangement may then operate the turbine engine and pump auxiliary equipment to distribute hydraulic flow through the control valves as per logic programmed into the SCS. As with startup of the diesel engine or operation of the electric motor, the SCS may be responsible for sending shutdown signals to either the diesel engine's ECM or electric motor frequency drive.

[0102] In other example implementations, the hydraulic power arrangement may be replaced with an electric motor such as a PM motor that is directly coupled to the engine output shaft and connected to the engine housing via a bell housing adapter. However, a splined coupling may interface the two shafts, and a coupling may connect these splined adapters together. The PM motor may operate at an optimal speed of 1900 RPM to generate 500 VAC power. At this speed and power generation, an electric generator may yield a power factor of 0.93 making the generator highly efficient.

[0103] The electric generator may also include a cooling circuit that is operable between 5-10 gallons per minute (GPM) and acts as a heat exchanger through the generator ensuring that the temperature on the generator winding does not exceed 175 degrees Celsius. A small pump to circulate this fluid may be first driven from battery storage device until the electric generator comes online and begins to re-charge the battery storage device and then power its own cooling pump.

[0104] Coming from the generator may be the electric conditioning station that may also be located on the gooseneck in a water and dust proof IP66 enclosure. A cable carrying three-phase power may enter the enclosure into a main isolation breaker

with overload protection, and from this, the power cable may be run into an AFE drive that may condition the signal into a DC voltage. Control of this AFE may be through the SCS, and communication may be carried out via modbus protocol. Downstream of the AFE may be a main DC bus bar that may hold the electric potential to distribute power to each individual control circuit around the hydraulic fracturing unit.

[0105] From the bus bar there may be an individual circuit protection breaker for each control circuit that may be equipped with overload protection. In the event the current drawn from the motor in the control circuit is too great, the overload protection may trip the breaker resulting in power loss to that circuit and protection of all components in that circuit. From these individual circuit breakers, armored and shielded cables may then leave the enclosure through bulkhead connections equipped with explosion proof glands and assembly methods that ensure the integrity of the main switch gear assembly may be protected from potentially combustible gases. The cables may be secured in a cable tray that may then run to areas in which the electric motors may be in place.

[0106] Prior to terminating the electric supply cables to the motor, the cables may first be terminated to an inverter drive that may convert the DC voltage into an AC voltage. The benefit of this may be the ease of sourcing AC electric motors and their lower capital costs. The inverter may condition the power coming in and leaving the drive. The inverter may also allow for proportional speed control of the motor and soft start functioning of the motor to reduce a current rush into the motor potentially tripping any circuit overload protection in the drive or back at the main isolator coming from the common bus bar.

[0107] The electric motors connected to the electric drives may be used in place of hydraulic motors as detailed in other example implementation but may still be fluidly connected to the driven equipment such as pumps, fans, compressors with the use of couplings and bell housing adapters. Other driven equipment may be driven with the use of electric motors and are contemplated herein.

[0108] A method of operation of the power arrangement of some examples may be as follows. The engine may be brought online in a similar manor to the previously

described implementation in which the SCS may send a start signal to the diesel engine ECM via J1939 communication protocol. The engine may be brought online to a speed of 1900RPM, at which point the electric generator may be producing 500VAC electric power with the electric potential of up to 223KW.

[0109] The alternating current power from the electric generator may enter the electric conditioning assembly including the main isolator and the AFE rectifier that may convert the power to DC and distribute it over the electric bus bar. Current may be then able to flow into the main isolator for each electric circuit. The current may then flow around the hydraulic fracturing unit via the correctly sized armor shielded electric cable into the inverter drive. The inverters may be networked and communicated with from the SCS. The SCS may function the inverter drive and alter the frequency in which the IGBTs of the AFE sequence, which may result in the frequency leaving the drive to the motor to be controlled, and thereby controlling the speed of which the motors turn.

[0110] The power arrangement of these example implementations may allow for very accurate control of the individual circuitry. The analog signals to the drives may ensure that the frequency provided to the electric motors allows for exact RPMs to be met within 5-10 RPM tolerance. Electric motors may also provide a robust option for driving pumps and other auxiliary equipment. The lack of potential fluid contamination or fluid degradation usually allows these motors to stay in service longer ensuring that load bearings are greased and correct mounting of the motor may be performed. This implementation to drive auxiliary equipment of the hydraulic fracturing unit with electric motors may also provide benefit from lack of fluid travelling the entirety of the hydraulic fracturing unit, which may be susceptible to pressure drops and leaks.

[0111] As previously mentioned, the ability to share generated power may be a benefit of the diesel engine and generator set up. For example, if ten hydraulic fracturing units are on location, and each generator produces more power than may be required on the individual hydraulic fracturing unit, a shared power configuration could see a portion of the ten hydraulic fracturing unit gen-sets taken offline and the remainder of the hydraulic fracturing units providing all hydraulic fracturing units with the total amount of electric energy required.

[0112] Another example implementation of a method to power auxiliary equipment onboard hydraulic fracturing units may utilize the GTE transmission and include PTOs on the transmission to power a smaller electric generator and a single multistage pump. In some of these examples, a transmission such as a gearbox with a single input and output shaft may be modified to account for two additional PTOs positioned either side of the main output shaft or flange. These PTOs may be equipped with clutches that may be operated either pneumatically or hydraulically (or electrically in other example implementations).

[0113] As well as the installation of the transmission with the PTOs, additional equipment may be installed onto the GTE-driven hydraulic fracturing unit to ensure that a controlled startup may be performed to get to a point where it may be self-sustained from its own operation. Taking this into account, a battery bank with one or more high-powered lithium ion batteries may be used to provide the starting power for onboard auxiliary equipment such as lube and fuel pumps as well as powering the electric motor that may be coupled to the GTE starter gear. Once the GTE is at running speed and there is motion at the output shaft, the clutches may be engaged to allow for the pumps and electric generator to receive torque and motion from the transmission and start to displace fluid and generate power.

[0114] A single pump may address the needs of the reciprocating fracturing pump, and the single pump be a multistage pump that allows fluid to enter both low and high pressure sides of the pump. In other example implementations, the electric generator installed onto the diesel engine may supply enough power to all of the onboard auxiliary equipment. This may be not feasible when using a PTO from the transmission due to the footprint available and the large cantilever loading from the transmission as it may already support the mass of the GTE. Therefore, by taking away the reciprocating pump lube power requirements from the total KW load, there may or may not be use of a smaller generator capable of driving small motors coupled to fans that could range from 1 to 5 HP, as well as low pressure low flow fuel pumps and transmission lube pumps.

[0115] As in other implementations, the SCS may be powered from a separate battery bank but may still allow for generated power to replenish the battery charge when operational. The remaining auxiliary equipment to be powered from the smaller generator coupled to the transmission may follow the same assembly methodology as stated above with respect to an earlier example implementation.

[0116] According to these more recently-described example implementations, a method of operation may be as follows. The SCS may be online and command the GTE's primary auxiliary equipment to come online, which may result in fuel pumps and lube pumps to start. The GTE starter motor may then be functioned, allowing the GTE to reach an idle speed, after which the electric motor coupled to the starter gear may be disengaged and its power may be isolated. Once the power output shaft is functioned, and the GTE torque and power are transferred to the transmission, the clutches may be operated allowing the multistage pump and electric generator to be engaged and start rotating. The power from the electric generator may be then converted to DC through an AFE rectifier as described above, and distributed over a common DC bus. The power may be then distributed over the hydraulic fracturing unit and sent to drives that are controlling the speed of electric motors.

[0117] Many modifications and other implementations of the disclosure will come to mind to one skilled in the art to which this disclosure pertains having the benefit of the teachings presented in the foregoing descriptions and the associated figures. Therefore, it is to be understood that the disclosure is not to be limited to the specific implementations disclosed herein and that modifications and other implementations are intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

WHAT IS CLAIMED IS:

1. A system for fracturing a well, the system comprising:
one or more hydraulic fracturing units, each hydraulic fracturing unit comprising:
a chassis;
a reciprocating plunger pump connected to the chassis and configured to pump a fracturing fluid;
a powertrain connected to the chassis and configured to power the reciprocating plunger pump, the powertrain including a direct drive gas turbine engine and a drivetrain, the direct drive gas turbine engine operable using of two or more different types of fuel; and
auxiliary equipment located onboard the chassis, the auxiliary equipment driven by electric motors to support operation of the hydraulic fracturing unit including the reciprocating plunger pump and the powertrain; and
one or more electric power arrangements configured to power the auxiliary equipment, each electric power arrangement comprising:
an engine-generator set configured to generate electric power; and
an electric power network coupled to the engine-generator set and the electric motors, and coupled or coupleable to a utility power grid, a battery bank or a second engine-generator set of a neighboring hydraulic fracturing unit, the electric power network configured to deliver the electric power generated by the engine-generator set to the electric motors to drive the auxiliary equipment, and switchably connect the utility power grid, the battery bank or the second engine-generator set to deliver power to the electric motors responsive to a failure or fault of the engine-generator set.
2. The system of claim 1, wherein the engine-generator set includes a diesel engine and an electric motor generator, the diesel engine configured to drive the electric motor generator to generate the electric power.

3. The system of claim 1, wherein the engine-generator set includes a gas turbine engine and an electric generator, the gas turbine engine configured to drive the electric generator to generate the electric power.
4. The system of claim 1, wherein the electric power arrangement further comprises a connection to the utility power grid, and the electric power network is configured to switchably connect the utility power grid to deliver power to the electric motors responsive to the failure or fault of the engine-generator set.
5. The system of claim 1, wherein the electric power arrangement further comprises the battery bank that is chargeable from the power generated by the engine-generator set, and the electric power network is configured to switchably connect the battery bank to deliver power to the electric motors responsive to the failure or fault of the engine-generator set.
6. The system of claim 1, wherein the electric power arrangement further comprises a connection to the second engine-generator set of the neighboring hydraulic fracturing unit, and the electric power network is configured to switchably connect the second engine-generator set to deliver power to the electric motors responsive to the failure or fault of the engine-generator set.
7. The system of claim 1, wherein the one or more hydraulic fracturing units are a plurality of hydraulic fracturing units, and the one or more electric power arrangements are a plurality of electric power arrangements each of which is connected to the chassis of a respective one of the plurality of hydraulic fracturing units.
8. The system of claim 7, wherein plurality of hydraulic fracturing units includes the hydraulic fracturing unit and the neighboring hydraulic fracturing unit, and the electric power arrangement of the hydraulic fracturing unit is connected to the second engine-generator set of the neighboring hydraulic fracturing unit, and

wherein the electric power network is configured to switchably connect the second engine-generator set to deliver power to the electric motors of the hydraulic fracturing unit responsive to the failure or fault of the engine-generator set of the hydraulic fracturing unit.

9. The system of claim 7 further comprising the battery bank that is connected to the plurality of electric power arrangements that include respective engine-generator sets configured to generate electric power from which the battery bank is chargeable, and

wherein the electric power network of the hydraulic fracturing unit is configured to switchably connect the battery bank to deliver power to the electric motors of the hydraulic fracturing unit responsive to the failure or fault of the engine-generator set of the hydraulic fracturing unit.

10. The system of claim 9, wherein the battery bank is also connected to the utility power grid, and the electric power arrangement is connected to the utility power grid via the battery bank.

11. The system of claim 9 further comprising:

a manifold connected to respective reciprocating plunger pumps of the plurality of hydraulic fracturing units, the manifold configured to deliver the fracturing fluid from the respective reciprocating plunger pumps to the well; and

an electric bus affixed to the manifold and connecting the plurality of electric power arrangements to the battery bank.

12. The system of claim 1, wherein the one or more hydraulic fracturing units are a plurality of hydraulic fracturing units, and the one or more electric power arrangements include the electric power arrangement that is configured to power the auxiliary equipment across the plurality of hydraulic fracturing units.

13. The system of claim 12 further comprising the battery bank that is connected to the electric power arrangement that includes the engine-generator set configured to generate electric power from which the battery bank is chargeable, and

wherein the electric power network is configured to switchably connect the battery bank to deliver power to the electric motors of the hydraulic fracturing unit responsive to the failure or fault of the engine-generator set of the hydraulic fracturing unit.

14. The system of claim 12, wherein the electric power arrangement further comprises a connection to the utility power grid, and the electric power network is configured to switchably connect the utility power grid to deliver power to the electric motors of the hydraulic fracturing unit responsive to the failure or fault of the engine-generator set of the hydraulic fracturing unit.

15. The system of claim 12 further comprising:

a manifold connected to respective reciprocating plunger pumps of the plurality of hydraulic fracturing units, the manifold configured to deliver the fracturing fluid from the respective reciprocating plunger pumps to the well; and

an electric bus affixed to the manifold and connecting the plurality of hydraulic fracturing units to the electric power arrangement.

16. A system for fracturing a well, the system comprising:

one or more hydraulic fracturing units, each hydraulic fracturing unit comprising:

a chassis;

a reciprocating plunger pump connected to the chassis and configured to pump a fracturing fluid;

a powertrain connected to the chassis and configured to power the reciprocating plunger pump, the powertrain including a direct drive gas turbine engine and a drivetrain, the direct drive gas turbine engine operable using of two or more different types of fuel; and

auxiliary equipment located onboard the chassis, the auxiliary equipment driven by hydraulic motors to support operation of the hydraulic fracturing unit including the reciprocating plunger pump and the powertrain; and one or more hydraulic power arrangements configured to power the auxiliary equipment, each hydraulic power arrangement comprising:

- a hydraulic power source including an electric motor configured to drive a plurality of pumps via a hydraulic pump drive to generate hydraulic power, the electric motor powered by shore power from an external source of electric power; and

- a hydraulic power network coupled to the hydraulic power source and the hydraulic motors, the hydraulic power network configured to deliver the hydraulic power generated by the hydraulic power source to the hydraulic motors to drive the auxiliary equipment.

17. The system of claim 16, wherein the one or more hydraulic fracturing units are a plurality of hydraulic fracturing units, and the one or more hydraulic power arrangements are a plurality of hydraulic power arrangements each of which is connected to the chassis of a respective one of the plurality of hydraulic fracturing units.

18. The system of claim 17, wherein the electric motor of the hydraulic power source is powered by shore power from an external source of electric power that is connected to respective hydraulic power sources of the plurality of hydraulic fracturing units.

19. A method of fracturing a well, the method comprising:

- arranging one or more hydraulic fracturing units, each hydraulic fracturing unit comprising:

- a chassis;

- a reciprocating plunger pump connected to the chassis and configured to pump a fracturing fluid;

a powertrain connected to the chassis and configured to power the reciprocating plunger pump, the powertrain including a direct drive gas turbine engine and a drivetrain, the direct drive gas turbine engine operable using of two or more different types of fuel; and

auxiliary equipment located onboard the chassis, the auxiliary equipment driven by electric motors to support operation of the hydraulic fracturing unit including the reciprocating plunger pump and the powertrain;

arranging one or more electric power arrangements to power the auxiliary equipment, each electric power arrangement comprising:

an engine-generator set configured to generate electric power; and

an electric power network coupled to the engine-generator set and the electric motors, and coupled or coupleable to a utility power grid, a battery bank or a second engine-generator set of a neighboring hydraulic fracturing unit, the electric power network configured to deliver the electric power generated by the engine-generator set to the electric motors to drive the auxiliary equipment, and switchably connect the utility power grid, the battery bank or the second engine-generator set to deliver power to the electric motors responsive to a failure or fault of the engine-generator set; and

operating the powertrain to power the reciprocating plunger pump to pump the fracturing fluid, and the electric power arrangement to power the auxiliary equipment.

20. The method of claim 19, wherein the engine-generator set includes a diesel engine and an electric motor generator, and operating the electric power arrangement includes the diesel engine driving the electric motor generator to generate the electric power.

21. The method of claim 19, wherein the engine-generator set includes a gas turbine engine and an electric generator, and operating the electric power arrangement includes the gas turbine engine driving the electric generator to generate the electric power.

22. The method of claim 19, wherein the electric power arrangement further comprises a connection to the utility power grid, and operating the electric power arrangement includes the electric power network switchably connecting the utility power grid to deliver power to the electric motors responsive to the failure or fault of the engine-generator set.

23. The method of claim 19, wherein the electric power arrangement further comprises the battery bank that is chargeable from the power generated by the engine-generator set, and operating the electric power arrangement includes switchably connecting the battery bank to deliver power to the electric motors responsive to the failure or fault of the engine-generator set.

24. The method of claim 19, wherein the electric power arrangement further comprises a connection to the second engine-generator set of the neighboring hydraulic fracturing unit, and operating the electric power arrangement includes switchably connecting the second engine-generator set to deliver power to the electric motors responsive to the failure or fault of the engine-generator set.

25. The method of claim 19, wherein arranging the one or more hydraulic fracturing units, and arranging the one or more electric power arrangements, includes arranging a plurality of hydraulic fracturing units and a plurality of electric power arrangements each of which is connected to the chassis of a respective one of the plurality of hydraulic fracturing units.

26. The method of claim 19, wherein arranging the one or more hydraulic fracturing units includes arranging a plurality of hydraulic fracturing units, and arranging the one or more electric power arrangements includes connecting the plurality of hydraulic fracturing units to the electric power arrangement to power the auxiliary equipment across the plurality of hydraulic fracturing units.

27. A method for fracturing a well, the method comprising:
arranging one or more hydraulic fracturing units, each hydraulic fracturing unit comprising:
a chassis;
a reciprocating plunger pump connected to the chassis and configured to pump a fracturing fluid;
a powertrain connected to the chassis and configured to power the reciprocating plunger pump, the powertrain including a direct drive gas turbine engine and a drivetrain, the direct drive gas turbine engine operable using of two or more different types of fuel; and
auxiliary equipment located onboard the chassis, the auxiliary equipment driven by hydraulic motors to support operation of the hydraulic fracturing unit including the reciprocating plunger pump and the powertrain;
arranging one or more hydraulic power arrangements power the auxiliary equipment, each hydraulic power arrangement comprising:
a hydraulic power source including an electric motor configured to drive a plurality of pumps via a hydraulic pump drive to generate hydraulic power, the electric motor powered by shore power from an external source of electric power; and
a hydraulic power network coupled to the hydraulic power source and the hydraulic motors, the hydraulic power network configured to deliver the hydraulic power generated by the hydraulic power source to the hydraulic motors to drive the auxiliary equipment; and
operating the powertrain to power the reciprocating plunger pump to pump the fracturing fluid, and the hydraulic power arrangement to power the auxiliary equipment.
28. The method of claim 27, wherein arranging the one or more hydraulic fracturing units, and arranging the one or more hydraulic power arrangements, includes arranging a plurality of hydraulic fracturing units and a plurality of hydraulic power arrangements

each of which is connected to the chassis of a respective one of the plurality of hydraulic fracturing units.

29. The method of claim 28, wherein operating the hydraulic power arrangement includes powering the electric motor of the hydraulic power source by shore power from an external source of electric power that is connected to respective hydraulic power sources of the plurality of hydraulic fracturing units.

30. A system for fracturing a well, the system comprising:

one or more hydraulic fracturing units, each of the one or more hydraulic fracturing units comprising:

a chassis;

a reciprocating plunger pump connected to the chassis and configured to pump a fracturing fluid;

a powertrain connected to the chassis and configured to power the reciprocating plunger pump, the powertrain including a direct drive gas turbine engine and a drivetrain, the direct drive gas turbine engine operable by use of two or more different types of fuel; and

auxiliary equipment located onboard the chassis, the auxiliary equipment driven by one or more electric motors to support operation of the hydraulic fracturing unit including the reciprocating plunger pump and the powertrain;

one or more electric power arrangements configured to power the auxiliary equipment of each of the one or more hydraulic fracturing units, each electric power arrangement of the one or more electric power arrangements comprising an engine-generator set configured to generate electric power;

an electric power network configured to deliver electric power generated by the engine-generator set of at least one electric power arrangement of the one or more electric power arrangements to the one or more electric motors of at least one hydraulic fracturing unit of the one or more hydraulic fracturing units, the electric power network being coupled to the engine-generator set of the at least one electric power

arrangement and the one or more electric motors of the at least one hydraulic fracturing unit, the electric power network being switchably connectable to a utility power grid, a battery bank, or another engine-generator set and being configured to deliver electric power generated by the engine-generator set of the at least one electric power arrangement to the one or more electric motors of the at least one hydraulic fracturing unit to drive the auxiliary equipment of the at least one hydraulic fracturing unit and to be switchably connected to the utility power grid, the battery bank, or the another engine-generator set to deliver power to the one or more electric motors of the at least one hydraulic fracturing unit responsive to a failure or fault of the engine-generator set of the at least one electric power arrangement; and

a manifold connected to each reciprocating plunger pump of the one or more hydraulic fracturing units, the manifold configured to deliver fracturing fluid from the reciprocating plunger pump to the well, and wherein the electric power network comprises electric buses affixed to the manifold and connecting the one or more hydraulic fracturing units to the one or more electric power arrangements to power the one or more hydraulic fracturing units.

31. The system of claim 30, wherein each engine-generator set includes a diesel engine and an electric motor generator, the diesel engine configured to drive the electric motor generator to generate the electric power.

32. The system of claim 30, wherein each engine-generator set includes a gas turbine engine and an electric generator, the gas turbine engine configured to drive the electric generator to generate the electric power.

33. The system of claim 30, wherein the one or more electric power arrangements further comprises a connection to the utility power grid, and the electric power network is configured to switchably connect the utility power grid to the one or more electric motors of the at least one hydraulic fracturing unit to deliver power to the one or more

electric motors of the at least one hydraulic fracturing unit responsive to the failure or fault of the engine-generator set of the at least one electric power arrangement.

34. The system of claim 30, wherein the battery bank is chargeable from power generated by the engine-generator set of the one or more electric power arrangements, and wherein the electric power network is configured to switchably connect the battery bank to the one or more electric motors of the at least one hydraulic fracturing unit to deliver power to the one or more electric motors of the at least one hydraulic fracturing unit responsive to the failure or fault of the engine-generator set of the at least one electric power arrangement.

35. The system of claim 30, wherein the one or more electric power arrangements further comprises a connection to a second engine-generator set of the one or more electric power arrangements, and the electric power network is configured to switchably connect the second engine-generator set to the one or more electric motors of the at least one hydraulic fracturing unit to deliver power to the one or more electric motors of the at least one hydraulic fracturing unit responsive to the failure or fault of the engine-generator set of the at least one electric power arrangement.

36. The system of claim 30, wherein the one or more electric power arrangements include a plurality of electric power arrangements, each of the plurality of electric power arrangements being connected to a chassis of a respective one of the one or more hydraulic fracturing units.

37. The system of claim 36, wherein the plurality of electric power arrangements are connected to another, and

wherein the electric power network is configured to switchably connect the engine-generator set of another of the plurality of electric power arrangements to the one or more electric motors of the at least one hydraulic fracturing unit to deliver power

to the one or more electric motors of the at least one hydraulic fracturing unit responsive to the failure or fault of the engine-generator set of the at least one electric power arrangement.

38. The system of claim 36, further comprising the battery bank connected to the plurality of electric power arrangements, each engine-generator set configured to generate electric power from which the battery bank is chargeable, and

wherein the electric power network is configured to switchably connect the battery bank to the one or more electric motors of at least one hydraulic fracturing unit to deliver power to the one or more electric motors of the at least one hydraulic fracturing unit responsive to the failure or fault of the engine-generator set of the at least one electric power arrangement.

39. The system of claim 38, wherein the battery bank is configured to be connected to the utility power grid, and the plurality of electric power arrangements are switchably connectable to the utility power grid via the battery bank.

40. The system of claim 38, wherein the electric buses of the electric power network connect the plurality of electric power arrangements to the battery bank.

41. The system of claim 30, further comprising the battery bank connected to the one or more electric power arrangements, wherein the electric power network is configured to switchably connect the battery bank to the one or more electric motors of the at least one hydraulic fracturing unit to deliver power to the one or more electric motors of the at least one hydraulic fracturing unit responsive to the failure or fault of the engine-generator set of the at least one electric power arrangement.

42. The system of claim 41, wherein the one or more electric power arrangements further comprise a connection to the utility power grid, and the electric power network is configured to switchably connect the utility power grid to the one or more electric motors

of the at least one hydraulic fracturing unit to deliver power to the one or more electric motors of the at least one hydraulic fracturing unit responsive to the failure or fault of the engine-generator set of the at least one electric power arrangement.

43. A method of fracturing a well, the method comprising:

(A) providing one or more hydraulic fracturing units, each hydraulic fracturing unit comprising:

a chassis;

a reciprocating plunger pump connected to the chassis and configured to pump a fracturing fluid;

a powertrain connected to the chassis and configured to power the reciprocating plunger pump, the powertrain including a direct drive gas turbine engine and a drivetrain; and

auxiliary equipment located onboard the chassis, the auxiliary equipment driven by one or more electric motors to support operation of the hydraulic fracturing unit including the reciprocating plunger pump and the powertrain;

(B) arranging one or more electric power arrangements to power the auxiliary equipment of the one or more hydraulic fracturing units, each electric power arrangement comprising an engine-generator set configured to generate electric power;

(C) arranging an electric power network to deliver electric power generated by the engine-generator set of at least one electric power arrangement of the one or more electric power arrangements to the one or more electric motors of at least one hydraulic fracturing unit of the one or more hydraulic fracturing units, the electric power network comprising an electric bus coupled to an engine-generator set of the at least one electric power arrangement and the one or more electric motors of the at least one hydraulic fracturing unit, the electric power network also being connectable to one or more of a utility power grid, a battery bank, or another engine-generator set, and the electric power network being configured to deliver electric power generated by the engine-generator set of the at least one electric power arrangement to the one or more electric motors of the at least one hydraulic fracturing unit to drive the auxiliary

equipment and to be connected to the one or more of the utility power grid, the battery bank, or the another engine-generator set to deliver power to the one or more electric motors of the at least one hydraulic fracturing unit responsive to a failure or fault of the engine-generator set of the at least one electric power arrangement;

(D) connecting a manifold to respective reciprocating plunger pumps of the one or more hydraulic fracturing units, the manifold being configured to deliver fracturing fluid from the respective reciprocating plunger pumps to the well;

(E) operating the powertrain of the one or more hydraulic fracturing units to power the reciprocating plunger pump of the one or more hydraulic fracturing units to pump the fracturing fluid; and

(F) operating the one or more electric power arrangements to power the auxiliary equipment.

44. The method of claim 43, wherein each engine-generator set of the one or more electric power arrangements includes a diesel engine and an electric motor generator, and wherein the step of operating the one or more electric power arrangements includes operating the diesel engine of the engine-generator set to drive the electric motor generator to generate electric power.

45. The method of claim 43, wherein each engine-generator set of the one or more electric power arrangements includes a gas turbine engine and an electric generator, and wherein the step of operating the one or more electric power arrangements includes operating the gas turbine engine of the electric generator set to drive the electric generator to generate electric power.

46. The method of claim 43, wherein the one or more electric power arrangements further comprises a connection to the utility power grid, and wherein the step of operating the one or more electric power arrangements includes connecting the electric power network to the utility power grid to deliver power to the one or more electric

motors of the at least one hydraulic fracturing unit responsive to the failure or fault of the engine-generator set of the at least one electric power arrangement.

47. The method of claim 43, wherein the battery bank is configured to be charged by power generated by the engine-generator set of the one or more electric power arrangements, and wherein the step of operating the one or more electric power arrangements includes connecting the at least one electric power arrangement to the battery bank to deliver power to the one or more electric motors responsive to the failure or fault of the engine-generator set of the at least one electric power arrangement.

48. The method of claim 43, wherein the step of operating the one or more electric power arrangements includes connecting the at least one electric power arrangement to the another engine-generator set to deliver power to one or more electric motors of the at least one hydraulic fracturing unit responsive to the failure or fault of the engine-generator set of the at least one electric power arrangement.

49. The method of claim 43, wherein the one or more electric power arrangements include a plurality of electric power arrangements, wherein the one or more hydraulic fracturing units include a plurality of hydraulic fracturing units, and wherein the step of arranging the plurality of electric power arrangements includes connecting each of the plurality of electric power arrangements to a respective chassis of each of the plurality of hydraulic fracturing units.

50. The method of claim 43, wherein the step of arranging the one or more electric power arrangements includes connecting the at least one or more hydraulic fracturing unit to the at least one electric power arrangement to supply power to the auxiliary equipment of the at least one hydraulic fracturing unit.

51. The method of claim 50, further comprising connecting the at least one electric power arrangement to the another engine-generator set, and connecting the another

engine-generator set to the one or more electric motors to deliver power to the one or more electric motors responsive to the failure or fault of the engine-generator set of the at least one electric power arrangement.

52. The method of claim 51, wherein the one or more electric power arrangements include a plurality of electric power arrangements, the method further comprising:
connecting the battery bank to the plurality of electric power arrangements;
operating engine-generator sets of the plurality of electric power arrangements to charge the battery bank; and
supplying the one or more electric motors of the one or more hydraulic fracturing units with power from the battery bank responsive to the failure or fault of the engine-generator set of the at least one electric power arrangement.

53. A system for fracturing a well, the system comprising:
a hydraulic fracturing unit comprising:
a chassis;
a reciprocating plunger pump connected to the chassis and configured to pump a fracturing fluid;
a powertrain connected to the chassis and configured to power the reciprocating plunger pump; and
auxiliary equipment located onboard the chassis, the auxiliary equipment driven by an electric motor to support operation of the hydraulic fracturing unit including the reciprocating plunger pump and the powertrain;
an electric power arrangement configured to power the auxiliary equipment, the electric power arrangement comprising an engine-generator set configured to generate electric power;
an electric power network configured to deliver electric power generated by the engine-generator set to the electric motor, the electric power network being connected to the engine-generator set and the electric motor, the electric power network being switchably connectable to a utility power grid, a battery bank, or another engine-

generator set and being configured to deliver electric power generated by the engine-generator set to the electric motor to drive the auxiliary equipment and to be switchably connected to the utility power grid, the battery bank, or the another engine-generator set responsive to a failure or fault of the engine-generator set of the electric power arrangement; and

a manifold connected to the reciprocating plunger pump, the manifold configured to deliver fracturing fluid from the reciprocating plunger pump to the well, and wherein the electric power network comprises an electric bus affixed to the manifold and connecting the hydraulic fracturing unit to the electric power arrangement.

54. The system of claim 53, wherein the engine-generator set includes a diesel engine and an electric motor generator, the diesel engine configured to drive the electric motor generator to generate the electric power.

55. The system of claim 53, wherein the engine-generator set includes a gas turbine engine and an electric generator, the gas turbine engine configured to drive the electric generator to generate the electric power.

56. The system of claim 53, wherein the electric power arrangement further comprises a connection to the utility power grid, and the electric power network is configured to switchably connect the utility power grid to the electric motor to deliver power to the electric motor responsive to the failure or fault of the engine-generator set of the electric power arrangement.

57. The system of claim 53, further comprising a battery bank chargeable by the engine-generator set of the electric power arrangement, and the electric power network is configured to switchably connect the battery bank to the electric motor responsive to the failure or fault of the engine-generator set of the electric power arrangement.

58. The system of claim 53, wherein the electric power arrangement further comprises a connection to the another engine-generator set, and the electric power network is configured to switchably connect the another engine-generator set to the electric motor responsive to the failure or fault of the engine-generator set of the electric power arrangement.

59. The system of claim 53, further comprising a plurality of hydraulic fracturing units and a plurality of electric power arrangements, wherein the hydraulic fracturing unit is one of the plurality of hydraulic fracturing units, and wherein the electric power arrangement is one of the plurality of electric power arrangements, each of the plurality of electric power arrangements being connected to a chassis of a respective one of the plurality of hydraulic fracturing units.

60. The system of claim 59, wherein each of the plurality of electric power arrangements is connected to the engine-generator set of an associated one of the plurality of electric power arrangements, and

wherein the electric power network is configured to switchably connect the engine-generator set of a first of the plurality of electric power arrangements to the electric motor of a first of the plurality of hydraulic fracturing units responsive to the failure or fault of a second of the plurality of electric power arrangements.

61. The system of claim 59, wherein the battery bank is connected to the plurality of electric power arrangements, wherein each engine-generator set is configured to generate electric power from which the battery bank is chargeable, and wherein the electric power network is configured to switchably connect the battery bank to the electric motors of the plurality of hydraulic fracturing units responsive to a failure or fault of the engine-generator set of a first of the plurality of electric power arrangements.

62. The system of claim 61, wherein the battery bank is configured to be connected to the utility power grid, and the electric power network is configured to switchably

connect the plurality of electric power arrangements to the utility power grid via the battery bank.

63. The system of claim 61, wherein the electric bus connects the plurality of electric power arrangements to the battery bank.

64. The system of claim 53, wherein the battery bank is connected to the electric power arrangement, wherein the electric power network is configured to switchably connect the battery bank to the electric motor responsive to the failure or fault of the engine-generator set of the electric power arrangement.

65. The system of claim 64, wherein the electric power arrangement further comprises a connection to the utility power grid, and the electric power network is configured to switchably connect the utility power grid to the electric motor responsive to the failure or fault of the engine-generator set of the electric power arrangement.

66. The system of claim 53, wherein the powertrain includes a direct drive gas turbine engine and a drivetrain.

67. A method of fracturing a well, the method comprising:
 (A) providing a hydraulic fracturing unit, the hydraulic fracturing unit comprising:
 a chassis;
 a reciprocating plunger pump connected to the chassis and configured to pump a fracturing fluid;
 a powertrain connected to the chassis and configured to power the reciprocating plunger pump; and
 auxiliary equipment located onboard the chassis, the auxiliary equipment driven by an electric motor to support operation of the one or more of the hydraulic fracturing units including the reciprocating plunger pump and the powertrain;

(B) arranging an electric power arrangement to power the auxiliary equipment, the electric power arrangement comprising an engine-generator set configured to generate electric power;

(C) arranging an electric power network to deliver electric power generated by the electric power arrangement to the electric motor, the electric power network comprising an electric bus being connected to the engine-generator set and the electric motor, the electric power network also being connectable to one or more of a utility power grid, a battery bank, or another engine-generator set, and the electric power network being configured to deliver electric power generated by the engine-generator set to the electric motor and to be connected to the one or more of the utility power grid, the battery bank, or the another engine-generator set responsive to a failure or fault of the engine-generator set of the electric power arrangement;

(D) connecting a manifold to the reciprocating plunger pump, the manifold being configured to deliver fracturing fluid from the reciprocating plunger pump to the well;

(E) operating the powertrain to power the reciprocating plunger pump to pump the fracturing fluid; and

(F) operating the electric power arrangement to power the auxiliary equipment.

68. The method of claim 67, wherein the engine-generator set includes a diesel engine and an electric motor generator, and wherein the step of operating the electric power arrangement includes operating the diesel engine to drive the electric motor generator.

69. The method of claim 67, wherein the engine-generator set includes a gas turbine engine and an electric generator, and wherein the step of operating the electric power arrangement includes operating the gas turbine engine to drive the electric generator.

70. The method of claim 67, wherein the electric power arrangement further comprises a connection to the utility power grid, and wherein the step of operating the electric power arrangement includes connecting the electric power network to the utility

power grid to deliver power to the electric motor responsive to the failure or fault of the engine-generator set of the electric power arrangement.

71. The method of claim 67, further comprising providing the battery bank such that the battery bank is configured to be charged by the engine-generator set of the electric power arrangement, and wherein the step of operating the electric power arrangement includes connecting the electric power arrangement to the battery bank to deliver electric power to the electric motors responsive to the failure or fault of the engine-generator set of the electric power arrangement.

72. The method of claim 67, wherein the electric power arrangement further comprises a connection to the another engine-generator set, and wherein the step of operating the electric power arrangement includes connecting the electric power arrangement to the another engine-generator set to deliver power to electric motor responsive to the failure or fault of the engine-generator set of the electric power arrangement.

73. The method of claim 67, wherein the providing the hydraulic fracturing unit further comprises providing a plurality of hydraulic fracturing units and a plurality of electric power arrangements, wherein the hydraulic fracturing unit is one of the plurality of hydraulic fracturing units, wherein the electric power arrangement is one of a plurality of electric power arrangements, and wherein the step of arranging the plurality of electric power arrangements includes connecting each of the plurality of electric power arrangements to a respective chassis of each of the plurality of hydraulic fracturing units.


74. The method of claim 67, wherein the step of arranging the electric power arrangement includes connecting the hydraulic fracturing unit to the electric power arrangement to supply electric power to the auxiliary equipment of the hydraulic fracturing unit.

75. The method of claim 74, further comprising connecting the electric power arrangement to the another engine-generator set, and connecting the another engine-generator set to the electric motor responsive to the failure or fault of the engine-generator set of the electric power arrangement.

76. The method of claim 75, further comprising providing a plurality of electric power arrangements, wherein the electric power arrangement is one of the plurality of electric power arrangements, the method further comprising:

- connecting the battery bank to the plurality of electric power arrangements;
- operating engine-generator sets of the plurality of electric power arrangements to charge the battery bank; and
- supplying the electric motor with electric power from the battery bank responsive to the failure or fault of the engine-generator set of at least one of the plurality of electric power arrangements.

77. The method of claim 67, wherein the powertrain includes a direct drive gas turbine engine and a drivetrain.

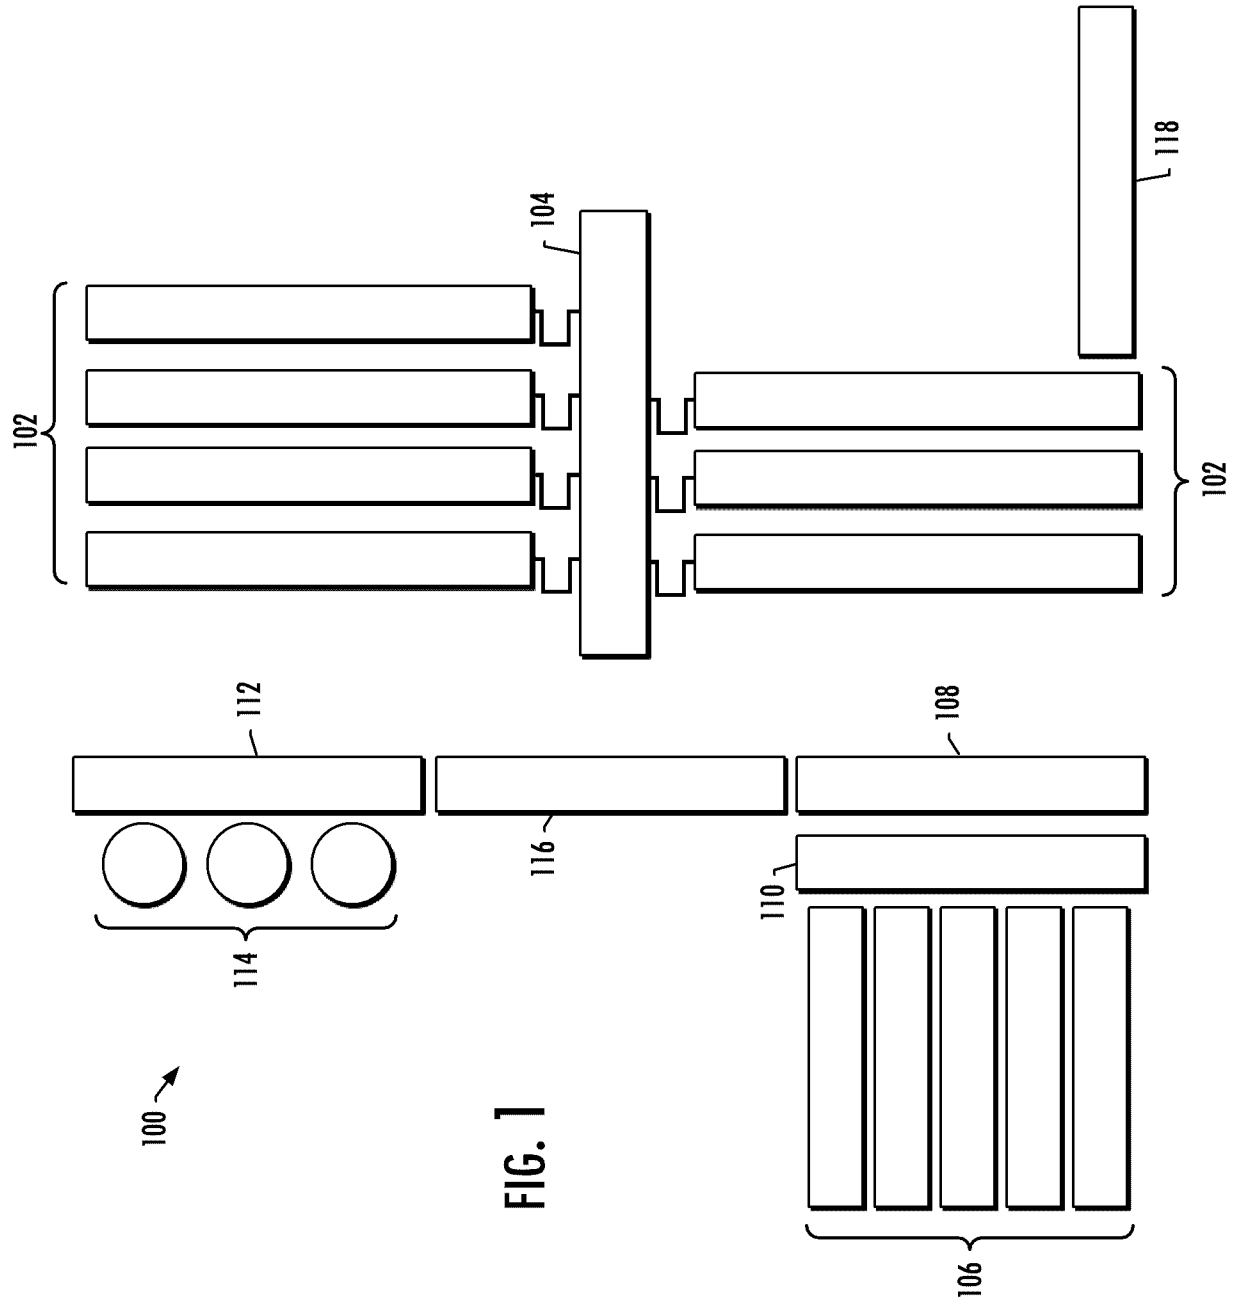

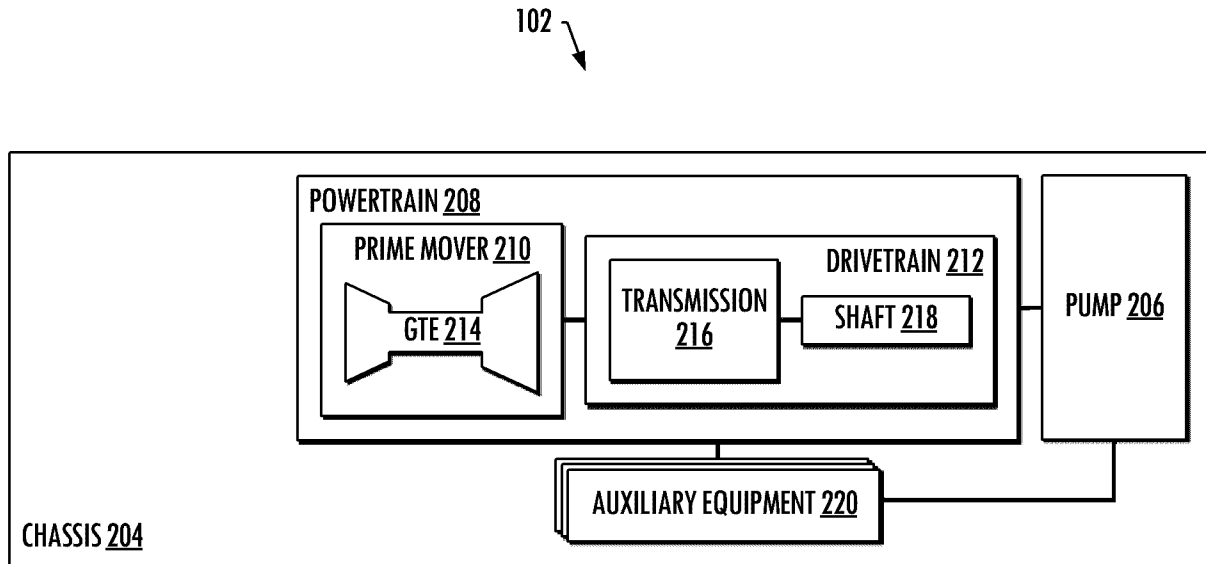


FIG. 2




FIG. 3

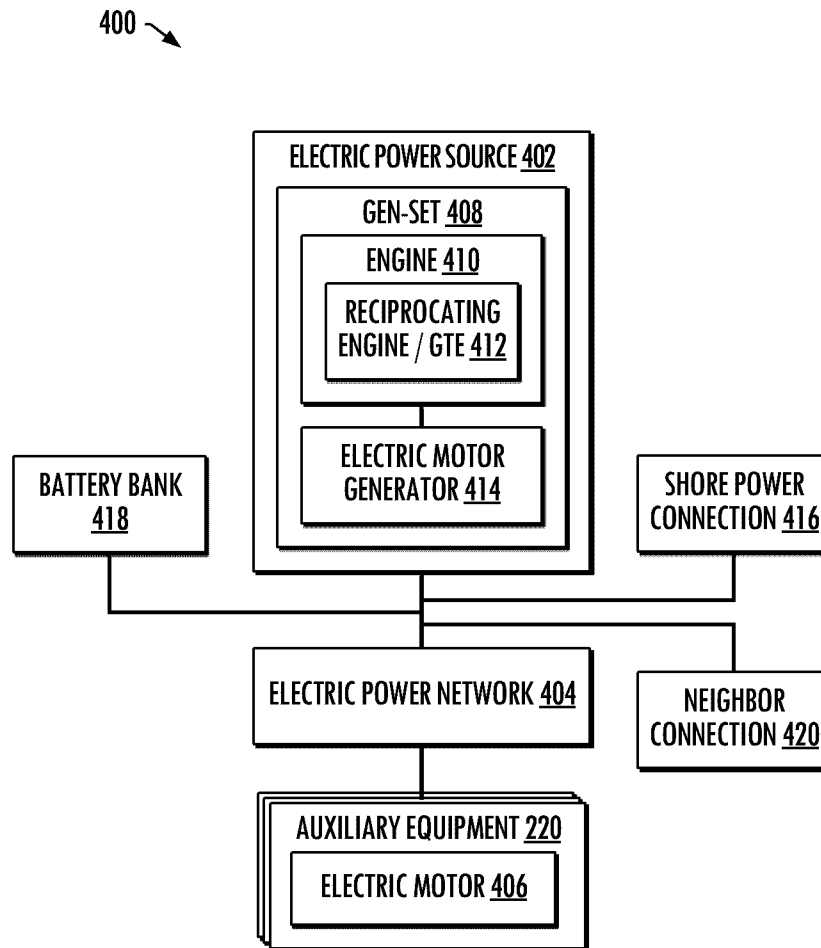


FIG. 4

500 →

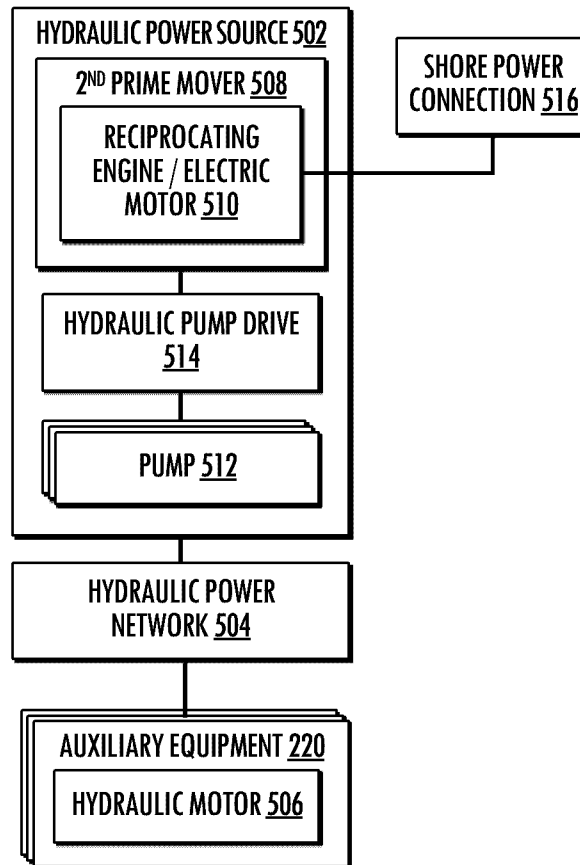


FIG. 5

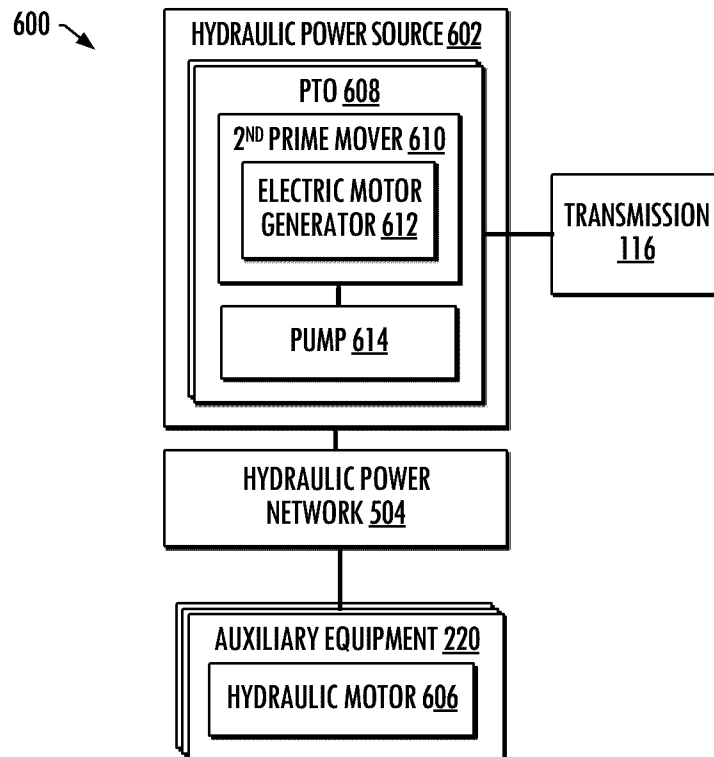


FIG. 6

702 ↗

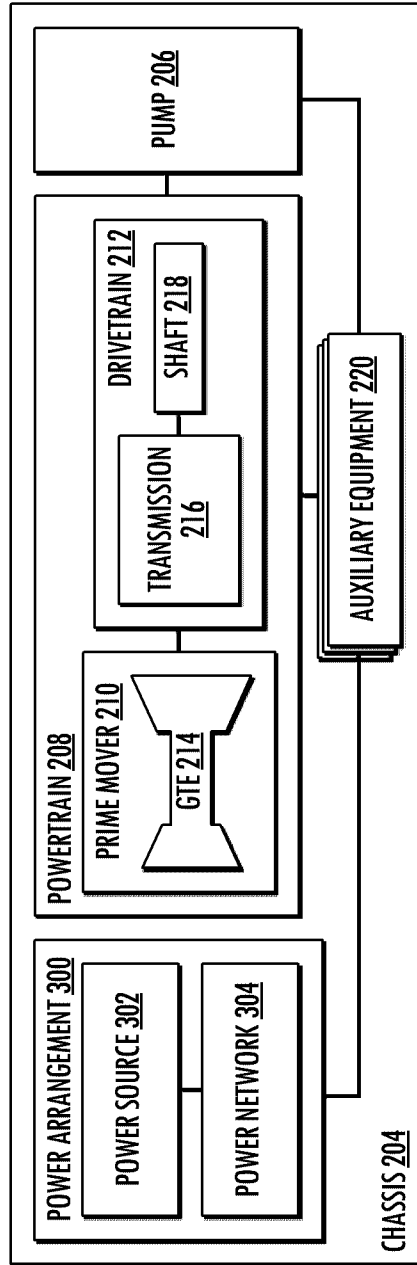


FIG. 7

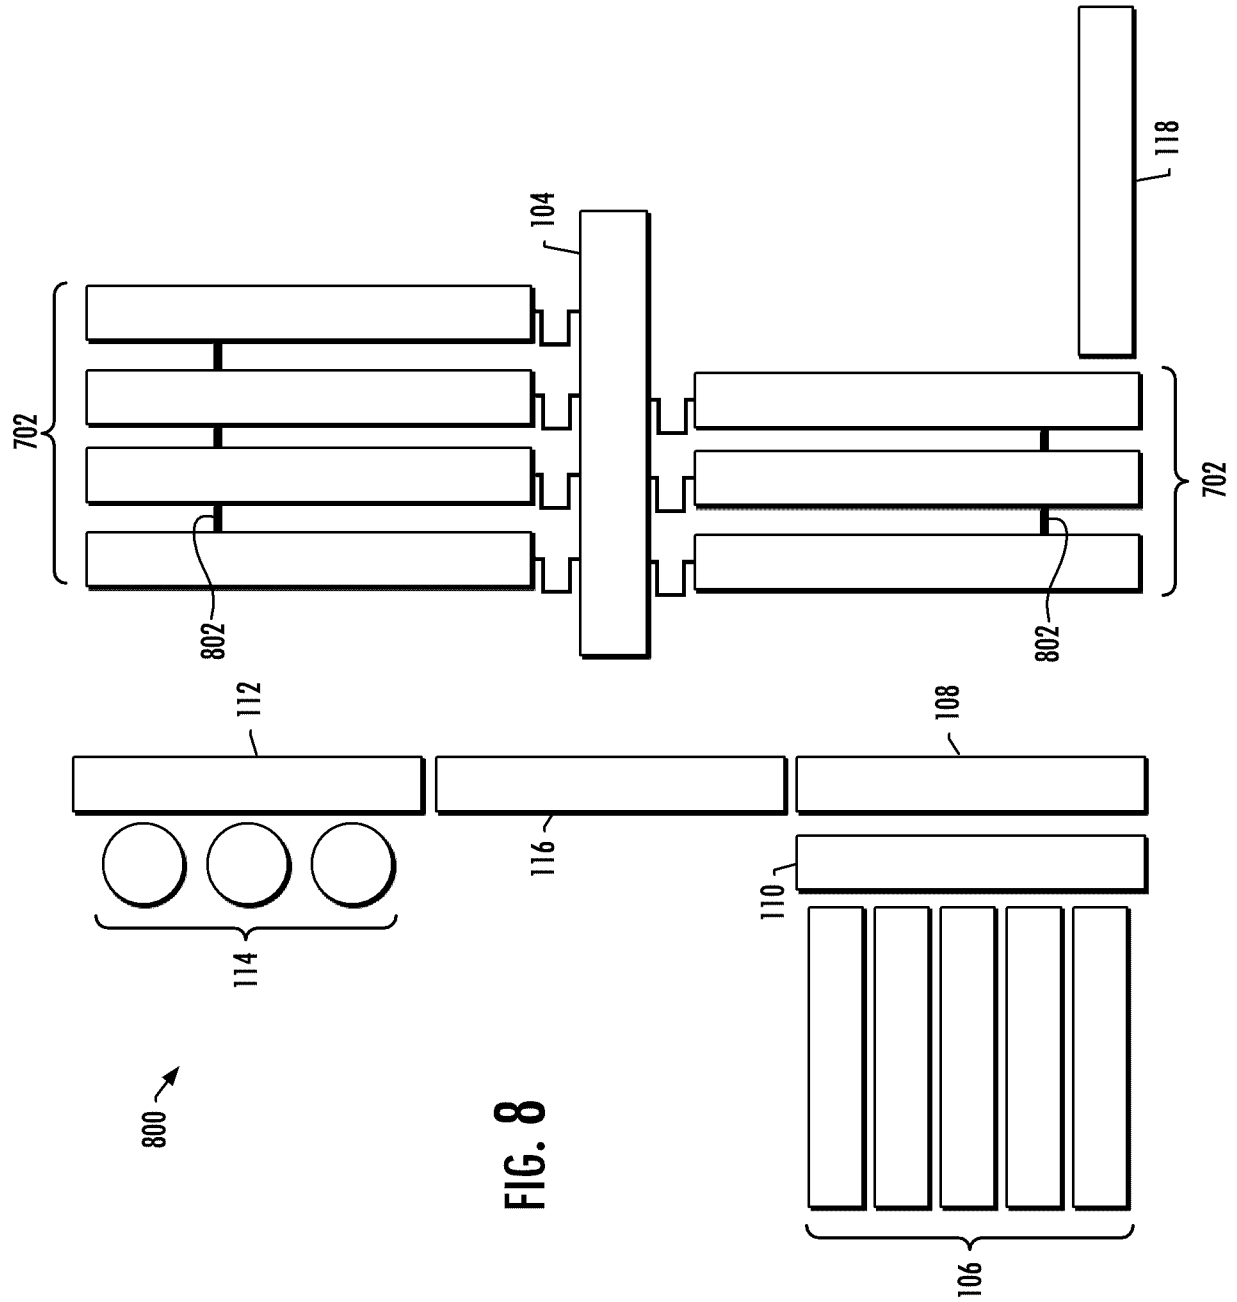


FIG. 8

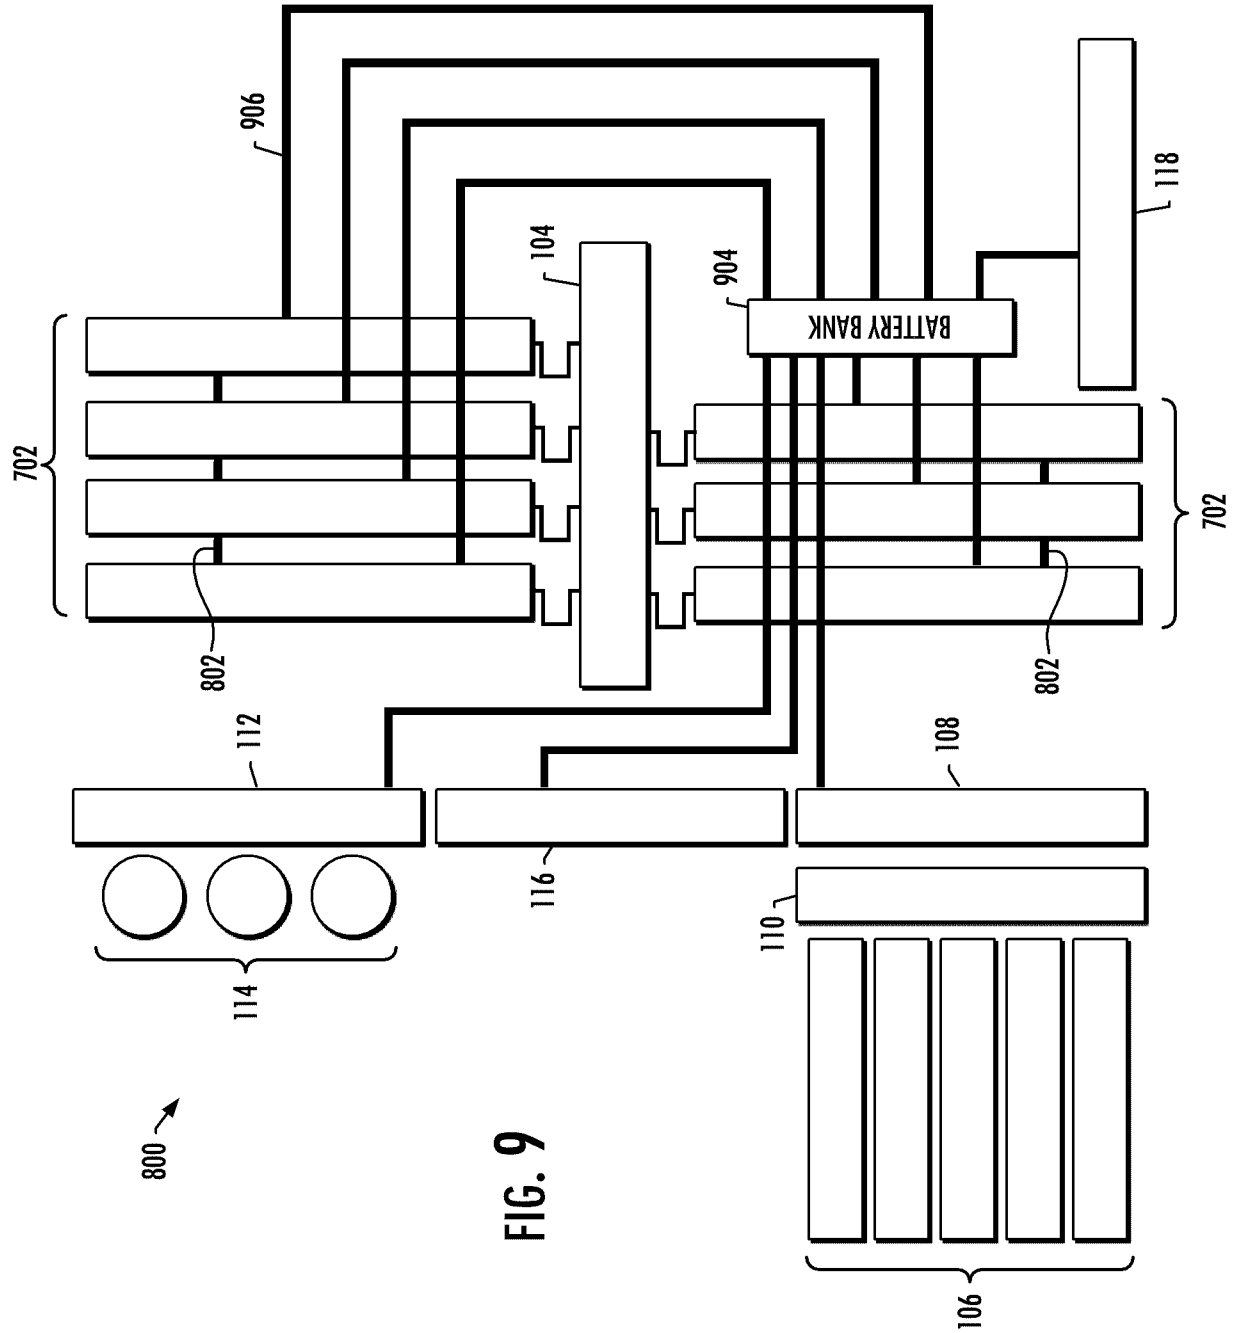


FIG. 9

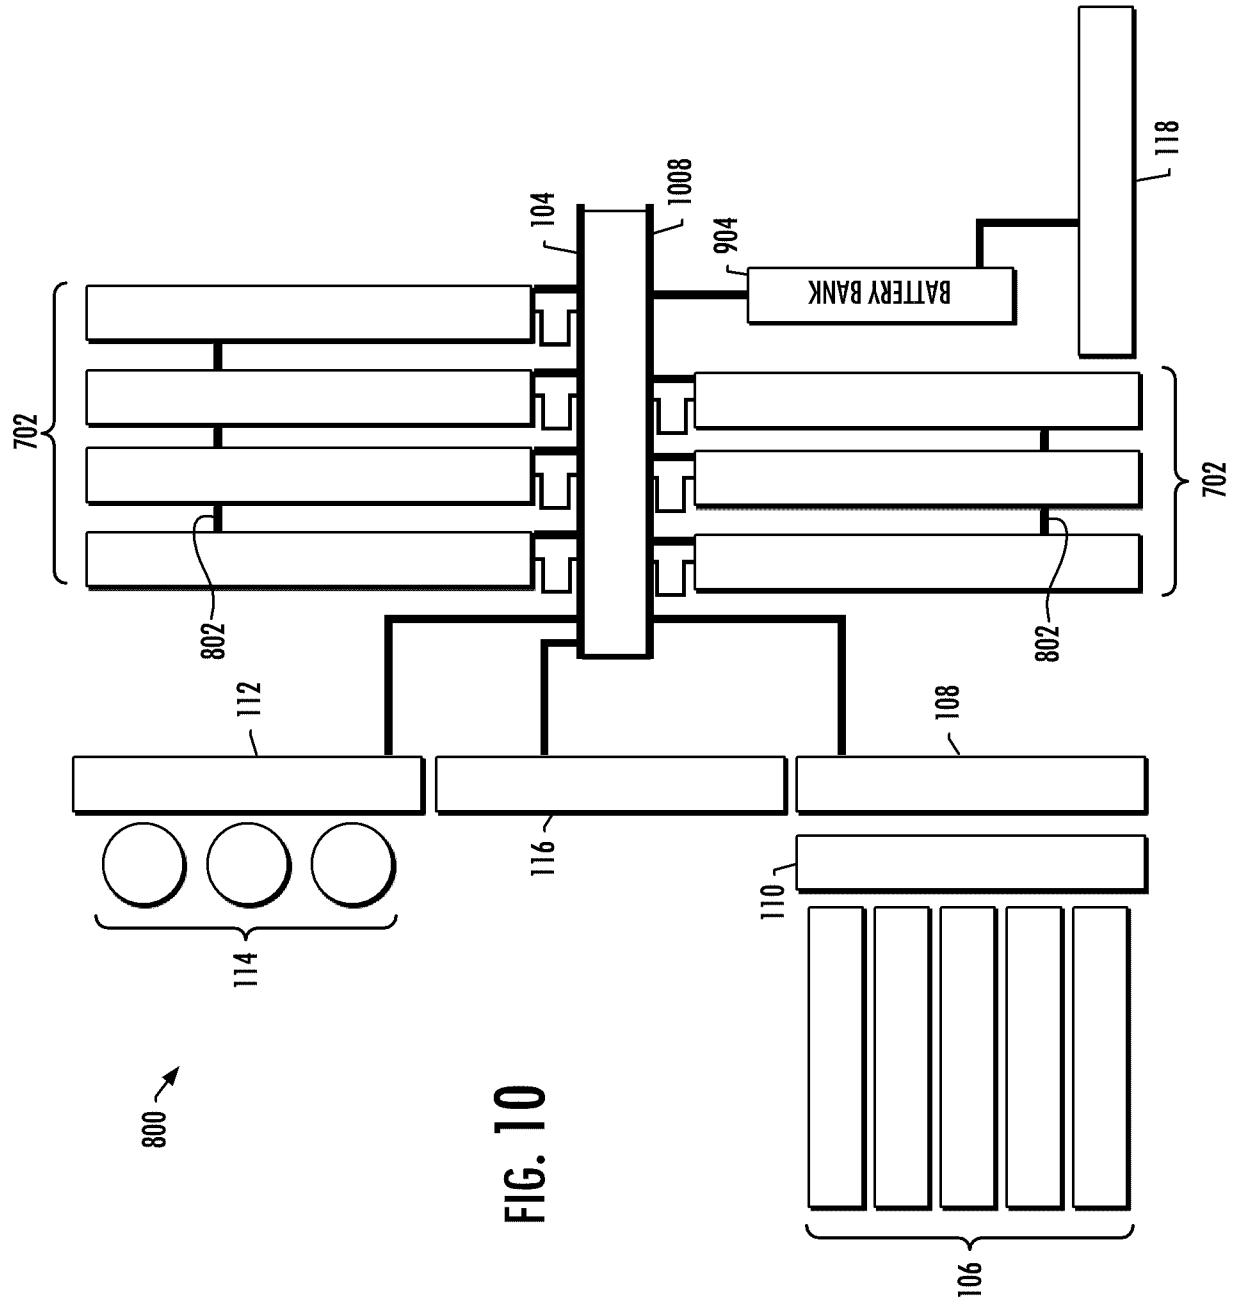


FIG. 10

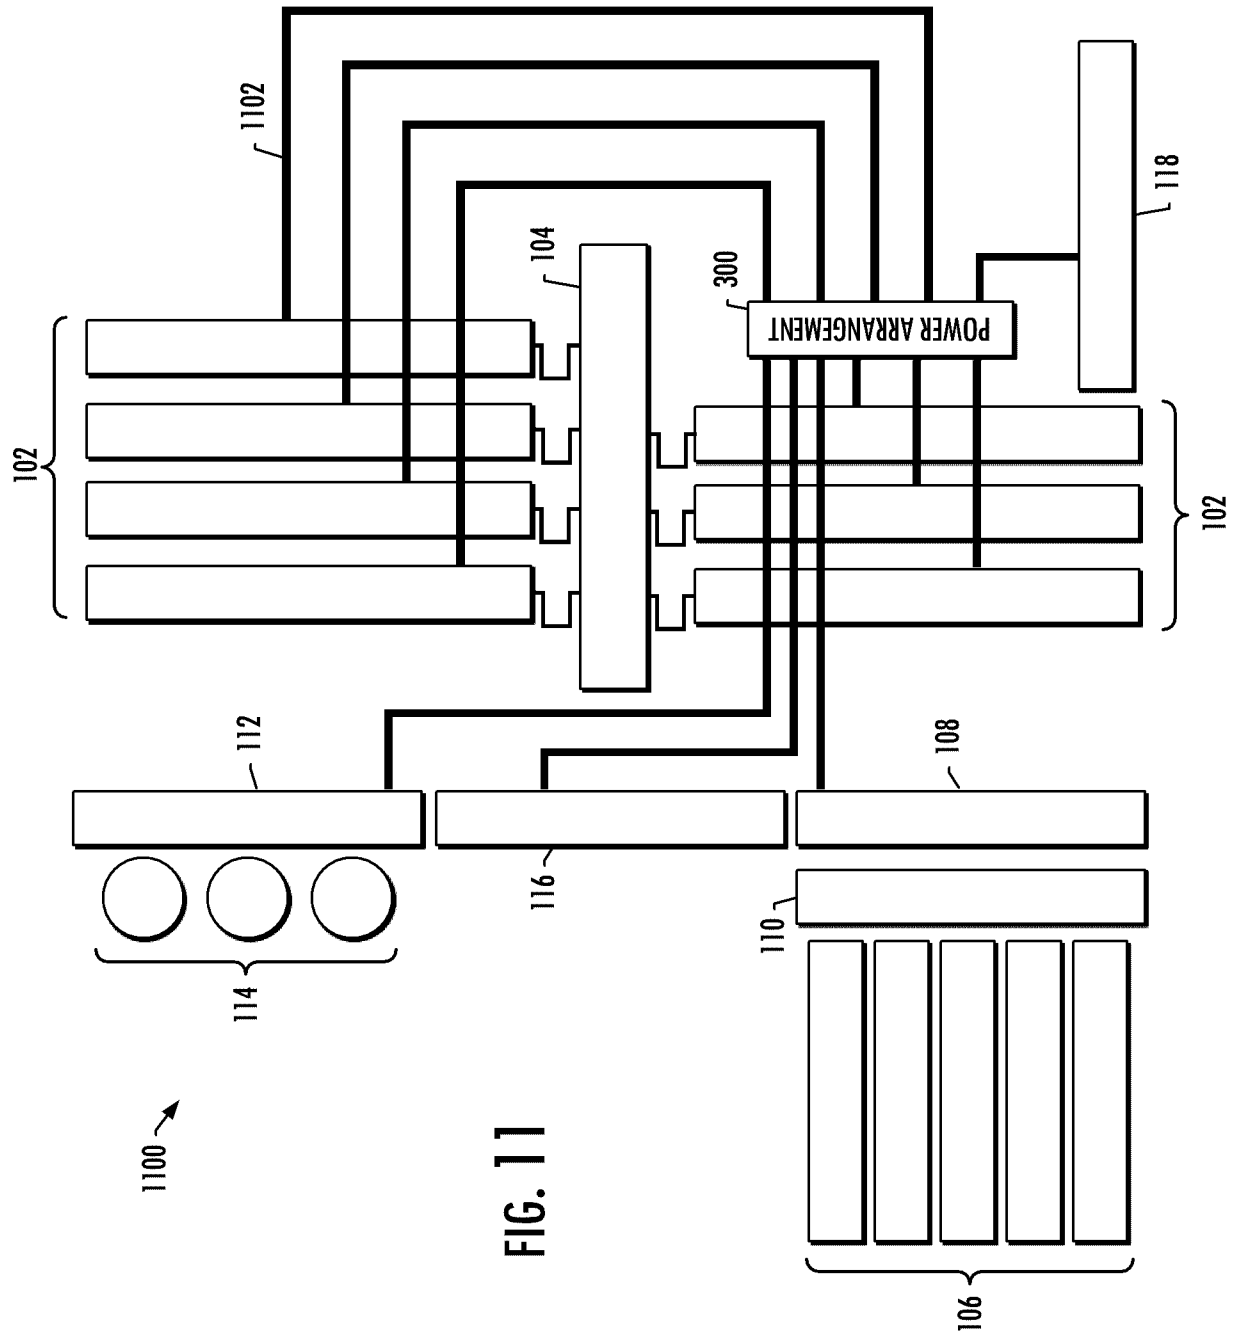


FIG. 11

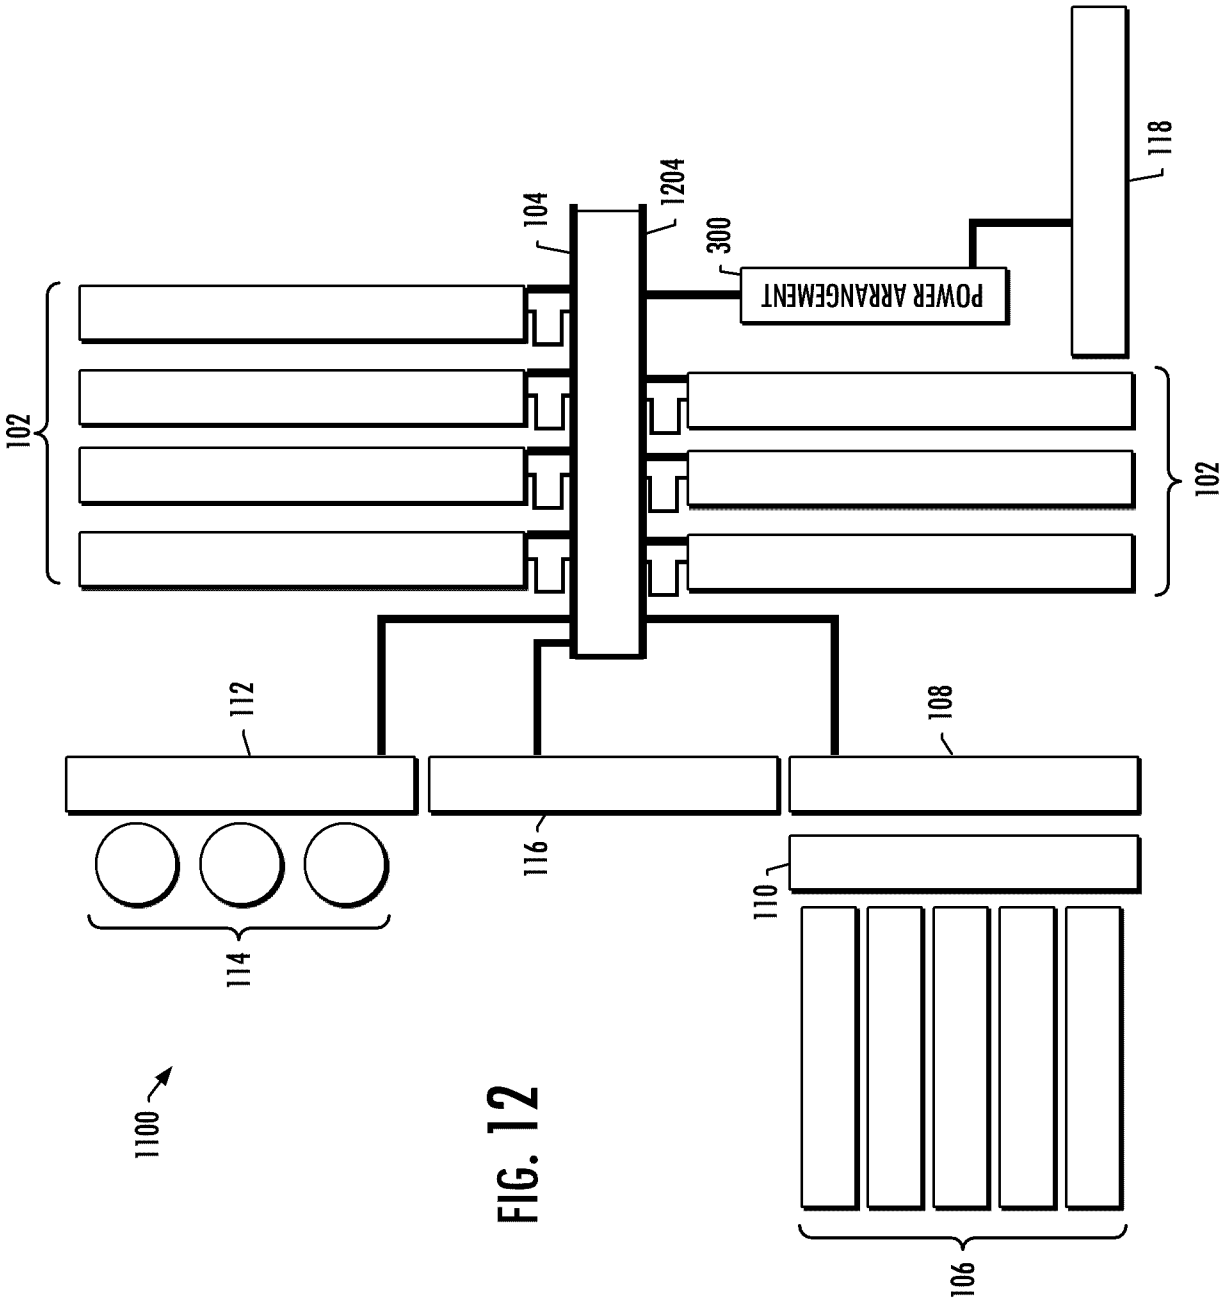


FIG. 12

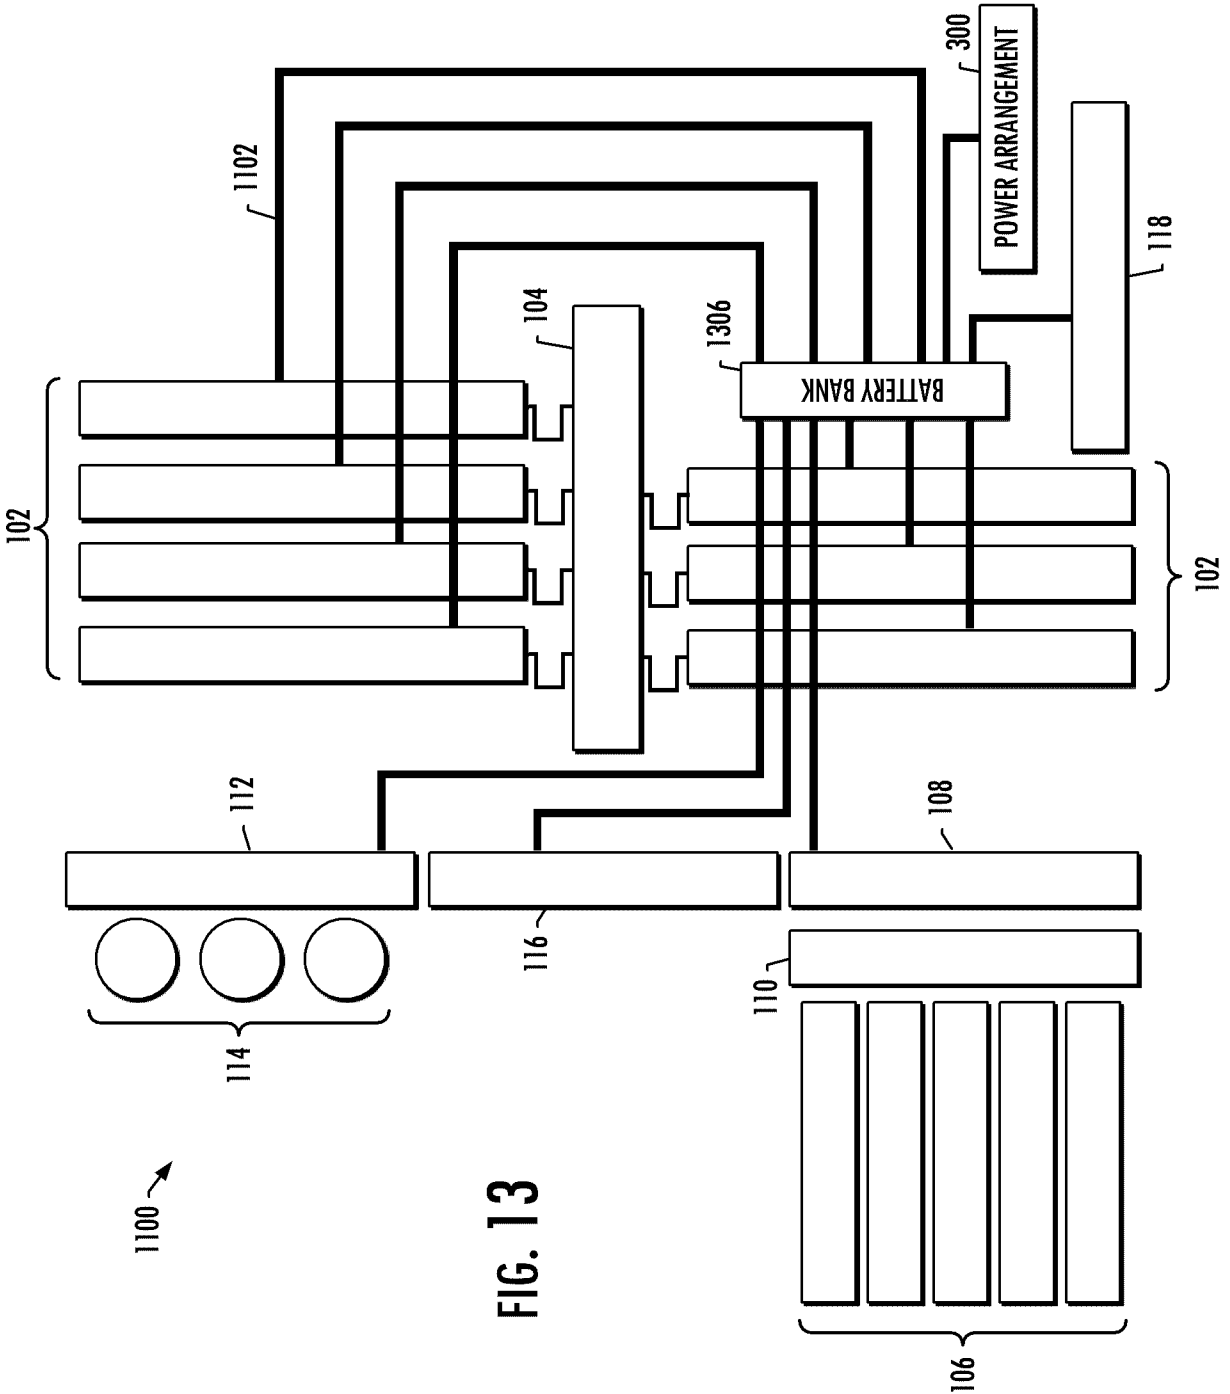


FIG. 13

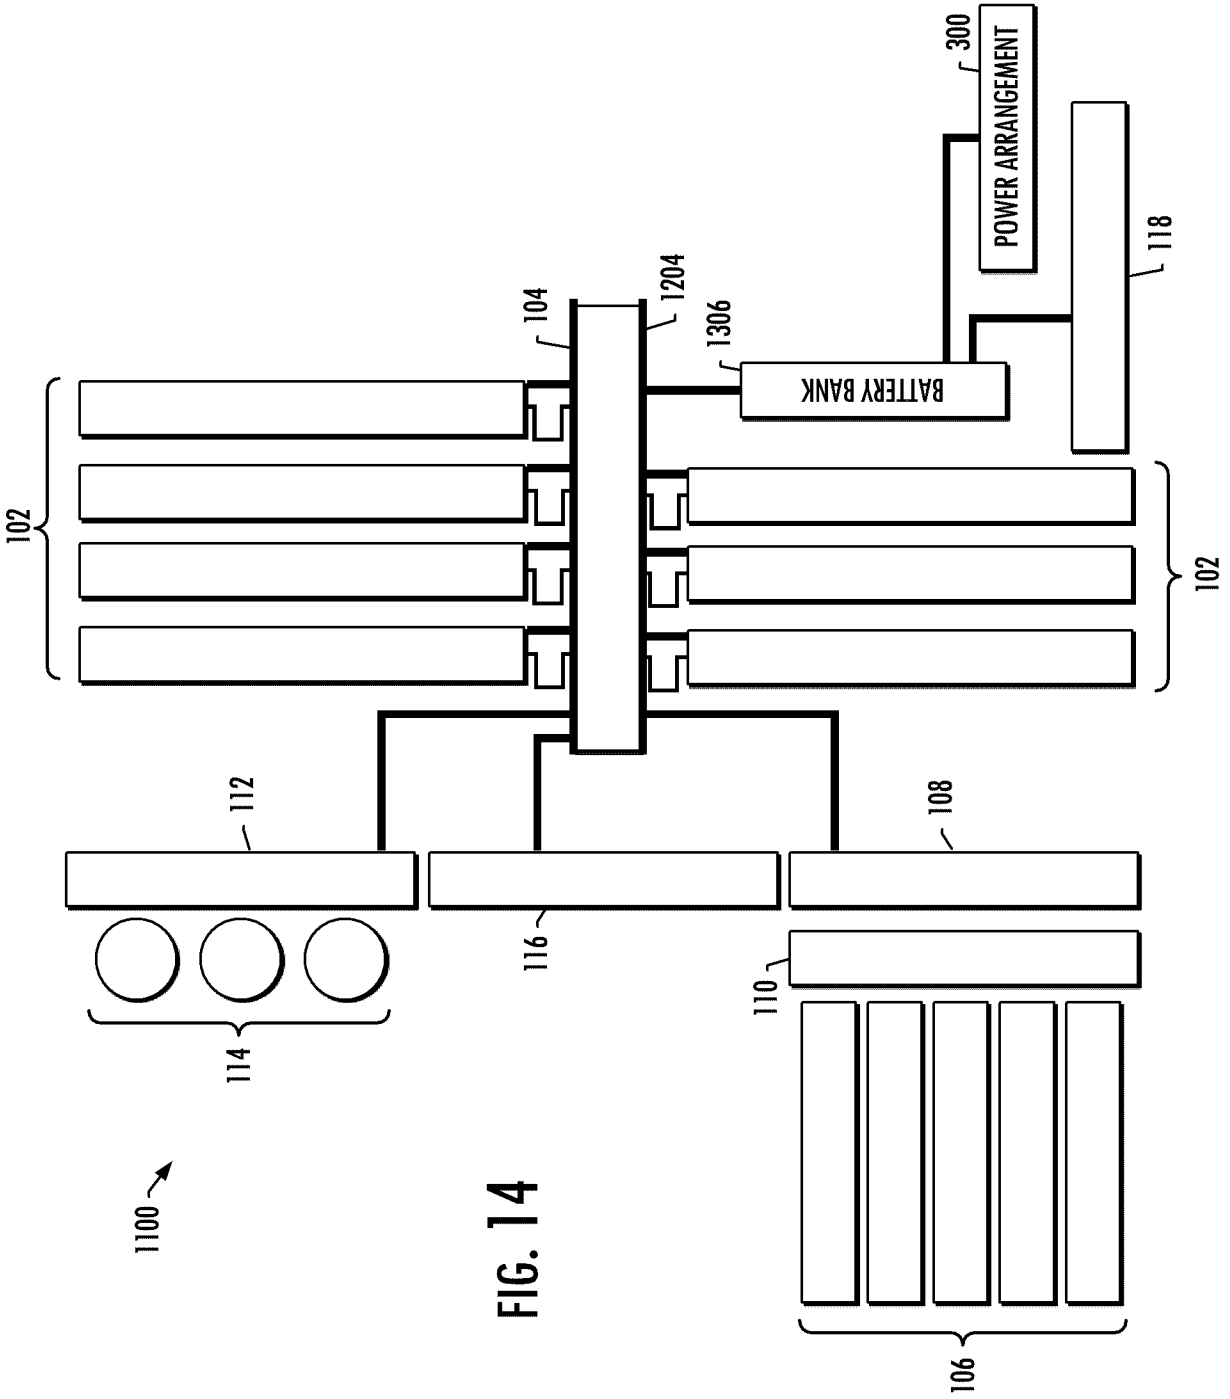


FIG. 14

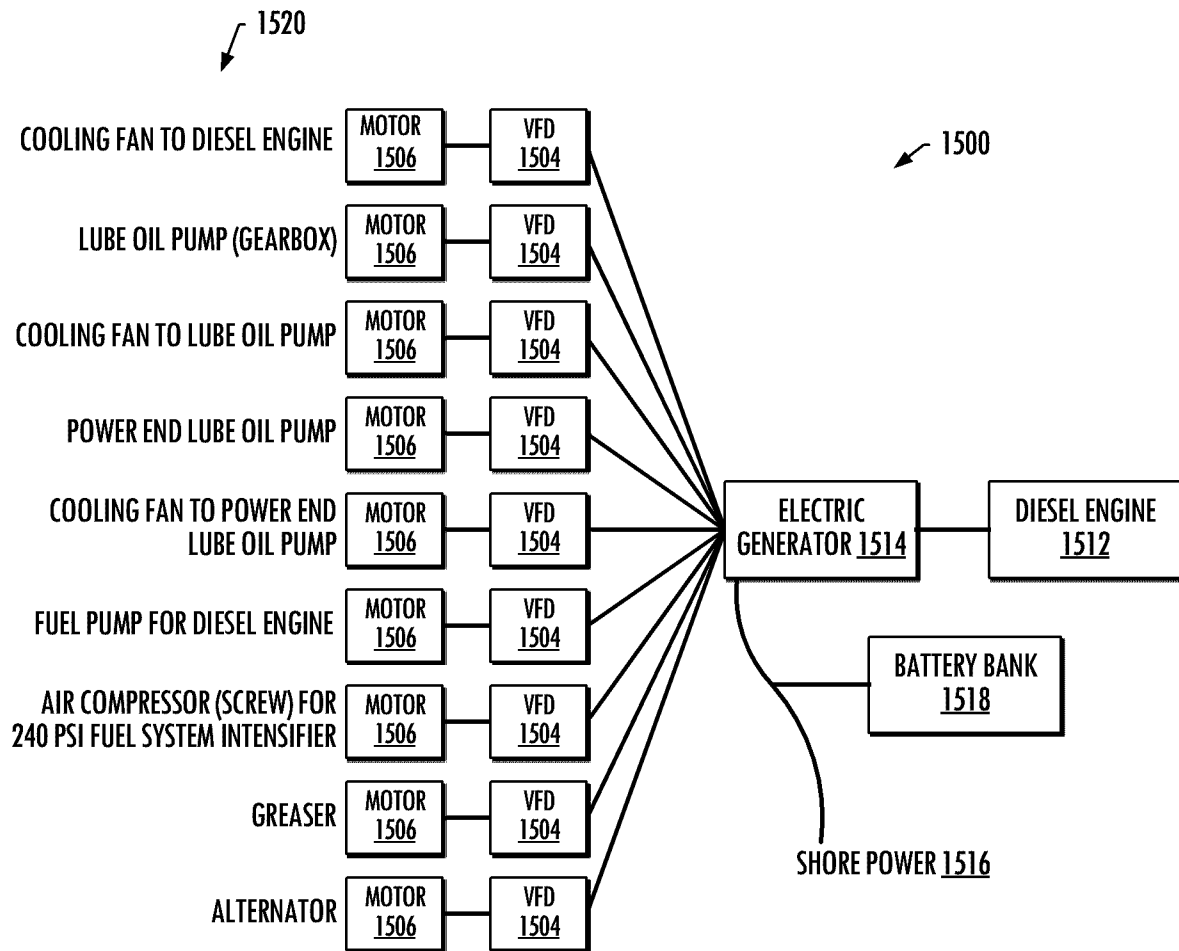


FIG. 15

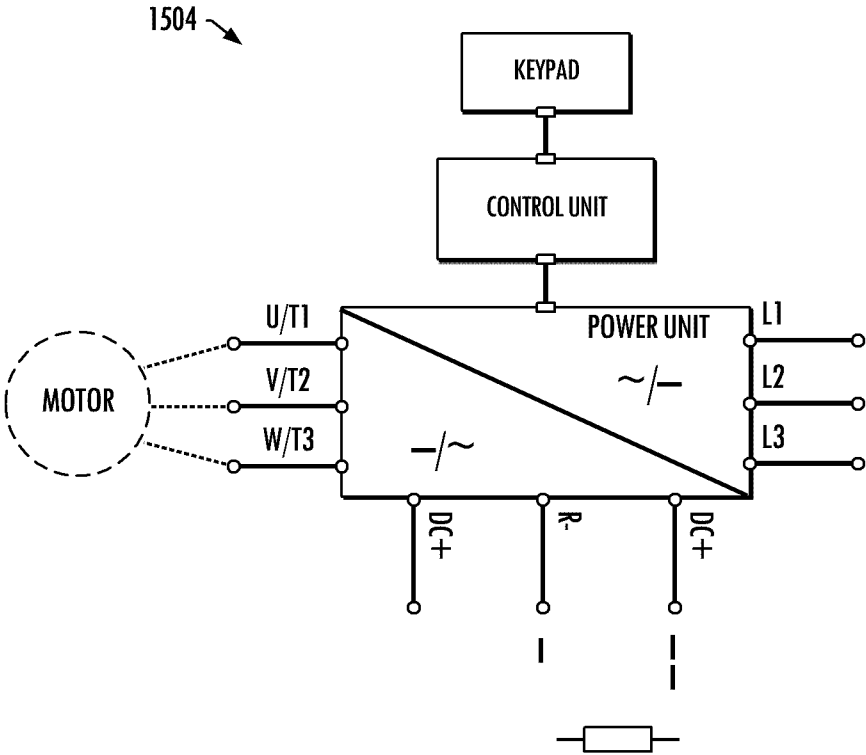


FIG. 16

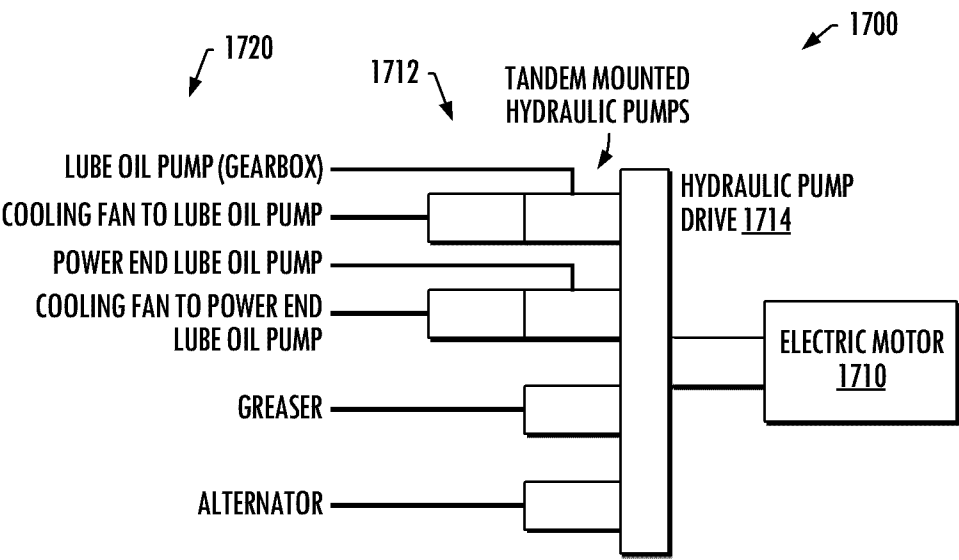


FIG. 17

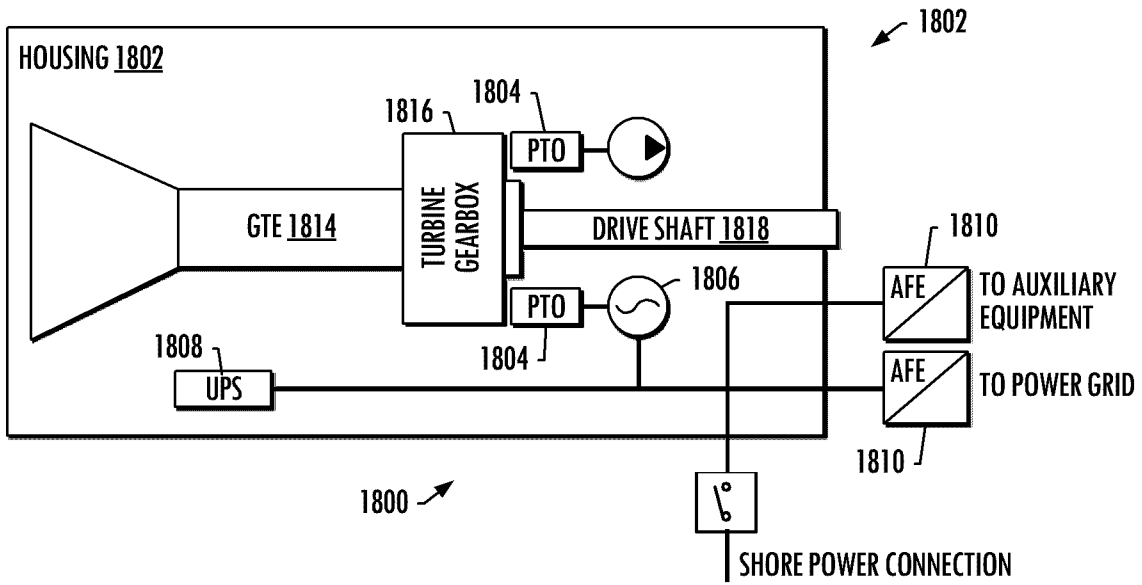


FIG. 18

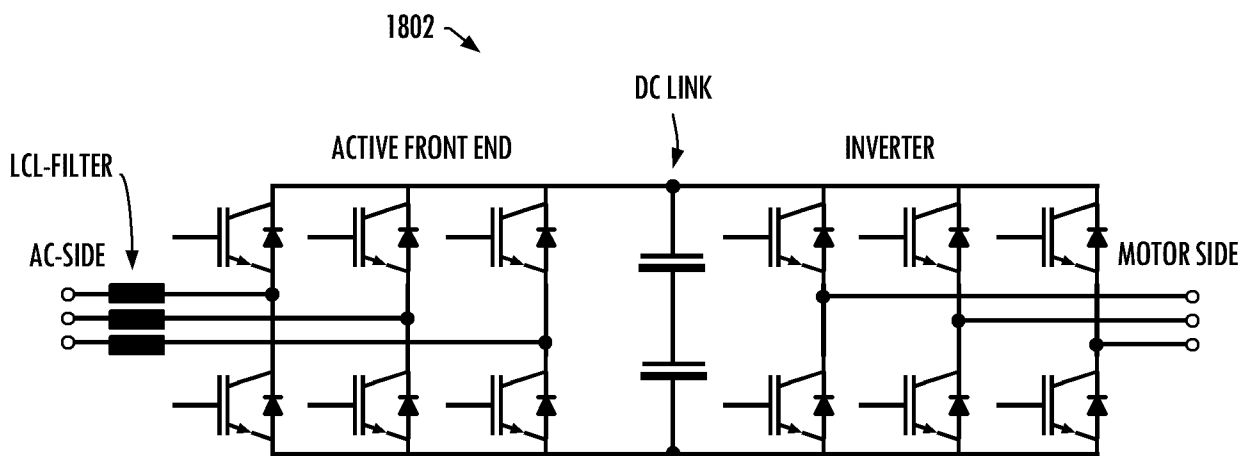


FIG. 19

18/18

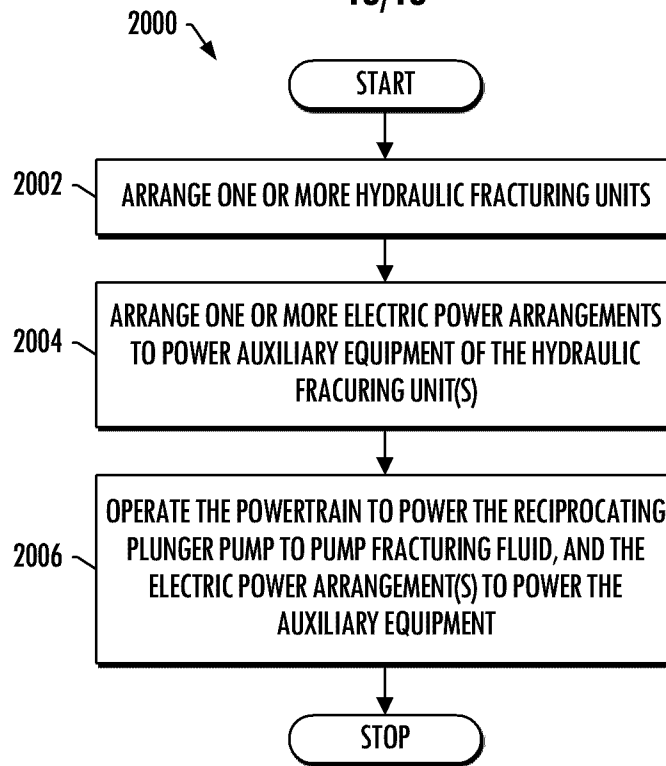


FIG. 20

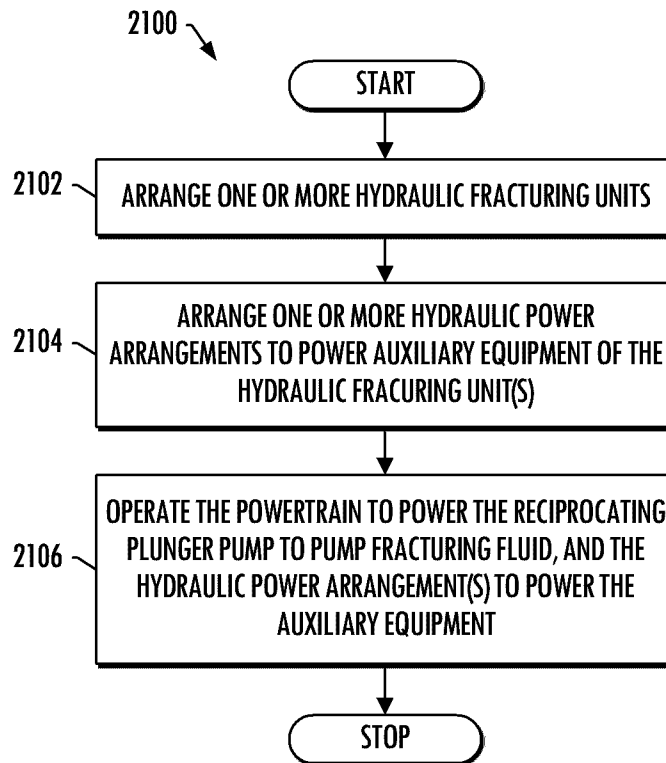


FIG. 21

