



(51) International Patent Classification:

C08F 210/16 (2006.01) C08F 4/659 (2006.01)
C08L 23/08 (2006.01) C08F 4/64 (2006.01)

Point Court, Easton, PA 18075 (US). CAO, Phuong, A.; 51 North Street, Old Bridge, NJ 08857 (US).

(21) International Application Number:

PCT/US20 18/024074

(74) Agent: ARECHEDERRA, Leandro, III et al; ExxonMobil Chemical Company, Law Department, P.O. Box 2149, Baytown, TX 77522-2149 (US).

(22) International Filing Date:

23 March 2018 (23.03.2018)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:


62/483,596 10 April 2017 (10.04.2017) US

(71) Applicant: EXXONMOBIL CHEMICAL PATENTS INC. [US/US]; 5200 Bayway Drive, Baytown, TX 77520 (US).

(72) Inventors: LUE, Ching-Tai; 802 Newington Lane, Sugarland, TX 77479 (US). DAVIS, Mark, K.; 18702 Dempsey Oaks Drive, Humble, TX 77346 (US). MARIOTT, Wesley, R.; 2301 North Brazosport Boulevard, B-181 1, Freeport, TX 77541 (US). ZILKER, Daniel, P.; 2217 High

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(54) Title: METHODS FOR MAKING POLYOLEFIN POLYMER COMPOSITIONS

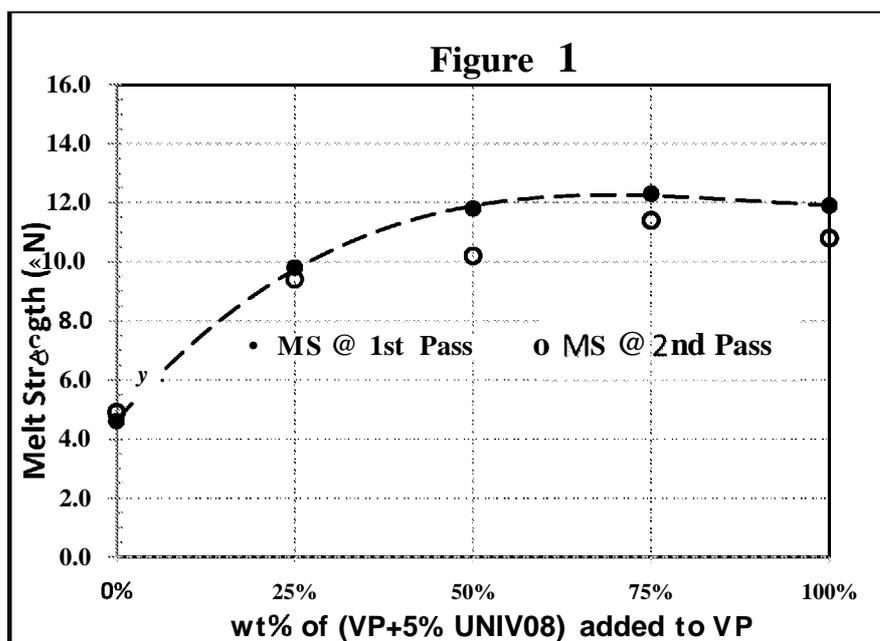

(57) Abstract: A method for increasing the melt strength of a polyolefin polymer composition is provided. The method includes mixing a first polyolefin composition derived from at least one olefin polymerization catalyst (a) and at least one olefin polymerization catalyst (b) with a second polyolefin composition derived from the at least one olefin polymerization catalyst (b) or from at least one olefin polymerization catalyst (c), and obtaining the polyolefin polymer composition.

WO 2018/191000 A1

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

METHODS FOR MAKING POLYOLEFIN POLYMER COMPOSITIONS

INVENTORS: Ching-Tai Lue; Mark K. Davis; Wesley R. Mariott; Daniel Zilker; and
Phuong A. Cao

5

PRIORITY CLAIM

[0001] This application claims the benefit of Serial No. 62/483,596, filed April 10, 2017 and is incorporated by reference in its entirety.

FIELD OF THE INVENTION

10 [0002] The invention relates to methods for making polyolefin polymer compositions. In particular, the invention relates for increasing the melt strength of polyolefin polymer compositions.

BACKGROUND OF THE INVENTION

15 [0003] The use of metallocene catalysts in polymerization processes to produce polyolefin polymers is known and has gained much notoriety in the global market place. However, there remains an ongoing effort to develop catalyst systems comprising metallocene catalysts, polymerization processes using such catalyst systems, and polyolefin polymers and products made therewith, each having advantageous properties and performance extending beyond recent advancements in the art. *See, for example*, U.S. Patent Nos. 4,530,914; 4,937,299;
20 5,470,811; 5,516,848; 5,696,045; 6,492,472; 7,141,632; 7,163,906; and 7,172,987.

[0004] In particular, an area of focus for polyolefin polymers made from catalyst systems including at least one metallocene catalyst has been directed the processability of these polymers. Processability generally refers to the ability to economically process and shape a polymer uniformly. Processability involves such elements as how easily the polymer flows,
25 melt strength, and whether or not the extrudate is distortion free. *See, for example*, U.S. Patent No. 8,598,287. Historically metallocene catalyzed polyethylenes (mPE) are somewhat more difficult to process than low-density polyethylenes (LDPE) made in high-pressure polymerization processes. Generally, mPEs require more motor power and produce higher extruder pressures to match the extrusion rate of LDPEs. Typical mPEs also have lower melt
30 strength which, for example, adversely affects bubble stability and drawdown capability during blown film extrusion, and they are prone to melt fracture at commercial shear rates. Nevertheless, mPEs exhibit superior physical properties as compared to LDPEs that make mPEs so attractive in the market place.


[0005] As a result, it is not unusual in the industry to add various levels of an LDPE to an
35 mPE to increase melt strength, to increase shear sensitivity, i.e., to increase flow at commercial

shear rates and to reduce the tendency of melt fracturing. Despite these efforts, these blends generally have poor mechanical properties as compared with neat mPE.

[0006] Traditionally, metallocene catalysts produce polymers having a narrow molecular weight distribution. Narrow molecular weight distribution polymers tend to be more difficult to process. Generally, the broader the polymer molecular weight distribution, the easier the polymer is to process. A technique to improve the processability of mPEs is to broaden the products' molecular weight distribution (MWD) by blending two or more mPEs with significantly different molecular weights or by changing to a polymerization catalyst or mixture of catalysts that produce broad MWD polymers.

10 [0007] For example, U.S. Publication No. 2009/0306323 discloses a film of an ethylene polymer comprising: an ethylene polymer produced in a gas phase process comprising a catalyst system comprising a first catalyst compound and a second catalyst compound disposed on a support, wherein the first catalyst compound is a metallocene catalyst compound; and wherein the second catalyst compound has the following formula I:

formula I

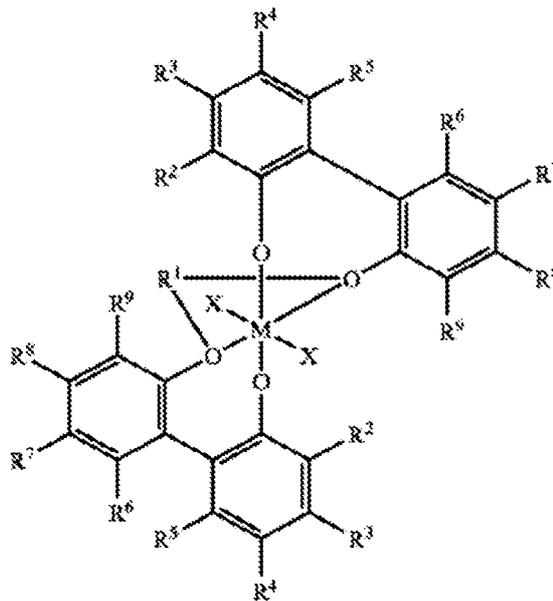

15

[0008] wherein M is selected from the group consisting of Ti, Zr, and Hf; each R¹ through R⁹ may be independently selected from the group consisting of hydride, hydrocarbyl, lower hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl, alkyl, lower alkyl, substituted alkyl, heteroalkyl, alkenyl, lower alkenyl, substituted alkenyl, heteroalkenyl, alkynyl, lower alkynyl, substituted alkynyl, heteroalkynyl, alkoxy, lower alkoxy, aryloxy, hydroxyl, alkylthio, lower alkyl thio, arylthio, thioxy, aryl, substituted aryl, heteroaryl, aralkyl, aralkylene, alkaryl,

20

alkarylene, halide, haloalkyl, haloalkenyl, haloalkynyl, heteroalkyl, heterocycle, heteroaryl, heteroatom-containing group, silyl, boryl, phosphino, phosphine, amino, and amine; wherein X is least one leaving group; and optionally, a cocatalyst; wherein the film of the ethylene polymer has improved gloss as determined by ASTM D2457-08, a reduced haze as determined by
5 ASTM D2103-08, an improved dart drop impact strength as determined by ASTM D1709, and improved Elmendorf Tear in the machine direction as determined by ASTM 1922, an improved Elmendorf Tear in the Transverse direction as determined by ASTM 1922, or a combination thereof, when compared to a comparative film produced in essentially the same way from a comparative resin, the comparative resin produced in essentially the same way
10 using essentially the same components except that the comparative resin is produced in the absence of the second catalyst compound. Improved melt strength is also shown in the "spider web" charts in Figures 1-4. *See also* U.S. Patent No. 8,586,497.

[0009] Despite these past endeavors, there remains a need to improve the melt strength of polyolefin polymer compositions that offer greater processability and other benefits.

15 **SUMMARY OF THE INVENTION**

[0010] Embodiments disclosed herein provide for a method for increasing the melt strength of a polyolefin polymer composition, the method comprising: mixing a first polyolefin composition derived from at least one olefin polymerization catalyst (a) and at least one olefin polymerization catalyst (b) with a second polyolefin composition derived from the at least one
20 olefin polymerization catalyst (b) or from at least one olefin polymerization catalyst (c), and obtaining the polyolefin polymer composition.

[0011] In any of the embodiments described herein, the polyolefin polymer composition may comprise from 50 wt% to 99 wt% of the first polyolefin composition and from 50 wt% to 1 wt% of the second polyolefin composition, based upon the total weight of the polyolefin
25 polymer composition.

[0012] In any of the embodiments described herein, the polyolefin polymer composition may comprise from 65 wt% to 99 wt% of the first polyolefin composition and from 35 wt% to 1 wt% of the second polyolefin composition, based upon the total weight of the polyolefin polymer composition.

30 [0013] In any of the embodiments described herein, the polyolefin polymer composition may comprise from 75 wt% to 99 wt% of the first polyolefin composition and from 25 wt% to 1 wt% of the second polyolefin composition, based upon the total weight of the polyolefin polymer composition.

[0014] Other embodiments of the invention are described and claimed herein and are apparent by the following disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] Figure 1 and Figure 2 are plots of the melt strength of certain examples of polyolefin polymer compositions as the concentration of one polymer component changes in the polyolefin polymer compositions.

DETAILED DESCRIPTION OF THE INVENTION

[0016] Before the present compounds, components, compositions, and/or methods are disclosed and described, it is to be understood that unless otherwise indicated this invention is not limited to specific compounds, components, compositions, reactants, reaction conditions, ligands, metallocene and/or other catalyst structures, or the like, as such may vary, unless otherwise specified. It is also to be understood that the terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting.

[0017] For the purposes of this patent specification and the claims thereto, the term terms "cocatalyst" and "activator" are used herein interchangeably and are defined to be any compound which can activate any one of the catalyst compounds described herein by converting the neutral catalyst compound to a catalytically active catalyst compound cation. The term "catalyst" refers to a metal compound that when combined with an activator polymerizes olefins, and the term "catalyst system" refers to the combination of a catalyst and an activator with a support. The terms "support" or "carrier," for purposes of this patent specification, are used interchangeably and generally refers to any medium upon which a catalyst optionally with other materials may be contacted with or disposed thereon.

[0018] "Catalyst system" is used to describe a catalyst compound/activator combination, optionally with other materials. For example, it may mean the unactivated catalyst complex (pre-catalyst) together with an activator and, optionally, a co-activator. When it is used to describe the combination after activation, it means the activated complex and the activator or other charge-balancing moiety. The transition metal compound may be neutral as in a pre-catalyst, or a charged species with a counter ion as in an activated catalyst system. For the purposes of this invention and the claims thereto, when catalyst systems are described as comprising neutral stable forms of the components, it is well understood by one of ordinary skill in the art, that the ionic form of the component is the form that reacts with the monomers to produce polymers.

[0019] In the description herein, the catalyst may be described as a catalyst, catalyst precursor, pre-catalyst compound, catalyst compound, transition metal complex, or transition

metal compound, and these terms are used interchangeably. A "polymerization catalyst system" or simply an "olefin polymerization catalyst" is a catalyst system that can polymerize monomers to polymers.

5 [0020] An "anionic ligand" is a negatively charged ligand which donates one or more pairs of electrons to a metal ion. A "neutral donor ligand" is a neutrally charged ligand which donates one or more pairs of electrons to a metal ion. "Activator" and "co-catalyst" are also used interchangeably and generally refer to a catalyst system component that is capable of changing a catalyst into a form that can polymerize monomers to polymers.

10 [0021] A "scavenger" is a compound that is typically added to facilitate polymerization by removing and/or inhibiting impurities. Some scavengers may also act as activators and may be referred to as co-activators. A "co-activator," that is not a scavenger, may also be used in conjunction with an activator in order to form an active catalyst. Often, a co-activator can be pre-mixed with the transition metal compound to form an alkylated transition metal compound.

15 [0022] As used herein, the new notation for the Periodic Table Groups is used as described in Chemical and Engineering News, 63(5), 27 (1985), unless otherwise noted.

[0023] The terms "hydrocarbyl radical," "hydrocarbyl," "hydrocarbyl group," "alkyl radical," and "alkyl" are used interchangeably throughout this document. Likewise, the terms "group," "radical," and "substituent" are also used interchangeably in this document. For purposes of this disclosure, "hydrocarbyl radical" is defined to be C_i-C₁₀₀ radicals, that may be
20 linear, branched, or cyclic, and when cyclic, aromatic or non-aromatic. Examples of such radicals include, but are not limited to, methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, sec-butyl, tert-butyl, pentyl, isoamyl, hexyl, octyl cyclopropyl, cyclobutyl, cyclopentyl, cyclohexyl, cyclooctyl, and the like, including their substituted analogues. Substituted hydrocarbyl radicals are radicals in which at least one hydrogen atom of the hydrocarbyl radical
25 has been substituted with at least one halogen (such as, for example, Br, Cl, F or I) or at least one functional group such as NR*₂, OR*, SeR*, TeR*, PR*₂, AsR*₂, SbR*₂, SR*, BR*₂, SiR*₃, GeR*₃, SnR*₃, PbR*₃, and the like, or where at least one heteroatom has been inserted within a hydrocarbyl ring. For purposes of this disclosure, "hydrocarbenyl" means a hydrocarbyl radical containing at least one olefinic double bond.

30 [0024] The term "substituted" means that a hydrogen group has been replaced with a hydrocarbyl group, a heteroatom, or a heteroatom containing group. For example, methyl cyclopentadiene (Cp) is a Cp group substituted with a methyl group and ethyl alcohol is an ethyl group substituted with an -OH group.

[0025] An "olefin," alternatively referred to as "alkene," is a linear, branched, or cyclic compound of carbon and hydrogen having at least one double bond. For purposes of this specification and the claims appended thereto, when a polymer or copolymer is referred to as comprising an olefin, including, but not limited to, ethylene and or propylene, the olefin present in such polymer or copolymer is the polymerized form of the olefin. For example, when a copolymer is said to have an "ethylene" content of 35 wt% to 55 wt%, it is understood that the mer unit in the copolymer is derived from ethylene in the polymerization reaction and said derived units are present at 35 wt% to 55 wt%, based upon the weight of the copolymer. A "polymer" has two or more of the same or different mer units. A "homopolymer" is a polymer having mer units that are the same. A "copolymer" is a polymer having two or more mer units that are different from each other. "Different" as used to refer to mer units indicates that the mer units differ from each other by at least one atom or are different isomerically. An ethylene polymer (or ethylene copolymer) is a polymer having at least 50 mol%, 60 mol%, 70 mol%, 80 mol%, or 90 mol% of ethylene, a propylene polymer (or propylene copolymer) is a polymer having at least 50 mol%, 60 mol%, 70 mol%, 80 mol%, or 90 mol% of propylene, and so on.

[0026] For the purposes of this invention and the claims thereto, the term "alpha olefin" or "a-olefin" refers to an olefin where the carbon-carbon double bond occurs between the alpha and beta carbons of the chain. Alpha olefins may be represented by the formula: $H_2C=CH-R^*$, wherein each R^* is independently, hydrogen or a C_1 to C_{30} hydrocarbyl; preferably, a C_2 to C_{20} hydrocarbyl; preferably, a C_3 to C_{12} hydrocarbyl; preferably, methyl, ethyl, propyl, butyl, pentyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl, and substituted analogs thereof. For example, ethylene, propylene, 1-butene, 1-pentene, 1-hexene, 1-heptene, 1-octene, 1-nonene, and 1-decene are alpha olefins that are particularly useful in embodiments herein. For the purposes of this invention, ethylene shall be considered an alpha-olefin.

[0027] A "metallocene" catalyst or compound is defined as an organometallic compound with at least one π -bound cyclopentadienyl moiety (or substituted cyclopentadienyl moiety) and more frequently two π -bound cyclopentadienyl moieties or substituted cyclopentadienyl moieties.

[0028] Unless otherwise noted all melting points (T_m) are DSC second melt.

[0029] The term "continuous" means a system that operates without interruption or cessation. For example, a continuous process to produce a polymer would be one where the reactants are continually introduced into one or more reactors and polymer product is continually withdrawn. However, a continuous system does contemplate some downtime for normal maintenance, upgrade, "debottlenecking," and/or idling due to market factors.

[0030] The following abbreviations may be used herein: Me is methyl, Et is ethyl, Pr is propyl, cPR is cyclopropyl, nPr is n-propyl, iPr is isopropyl, Bu is butyl, nBu is normal butyl, iBu is isobutyl, sBu is sec-butyl, tBu is tert-butyl, Oct is octyl, Ph is phenyl, Bz is benzyl, MAO is methylalumoxane, MMAO is modified methylalumoxane, Ind is indenyl, Cp is cyclopentadienyl, Flu is fluorenyl, TnOAl is tri-n-octyl aluminum, and RT is room temperature or ambient temperature (~23°C-25°C, unless otherwise indicated).

[0031] In a class of embodiments, the invention provides for a method for increasing the melt strength of a polyolefin polymer composition, the method comprising: mixing a first polyolefin composition derived from at least one olefin polymerization catalyst (a) and at least one olefin polymerization catalyst (b) with a second polyolefin composition derived from the at least one olefin polymerization catalyst (b), and obtaining the polyolefin polymer composition. The melt strength of a polymer at a particular temperature may be determined with a Gottfert Rheotens Melt Strength Apparatus. To determine the melt strength, a polymer melt strand extruded from a capillary die is gripped between two counter-rotating wheels on the apparatus. The take-up speed is increased at a constant acceleration of 2.4 mm/sec². The maximum pulling force (in the unit of cN) achieved before the strand breaks or starts to show draw-resonance is determined as the melt strength. The temperature of the rheometer is set at 190°C. The capillary die has a length of 30 mm and a diameter of 2 mm. The polymer melt is extruded from the die at a speed of 10 mm/sec. The distance between the die exit and the wheel contact point should be 122 mm.

[0032] In several embodiments of the invention, a polyolefin polymer composition may comprise a first polyolefin composition and a second polyolefin composition, wherein the polyolefin polymer composition may have a melt strength of 10% or greater, 15% or greater, 20% or greater, 25% or greater, 30% or greater, or 35% or greater, than the melt strength of either the first polyolefin composition and/or the second polyolefin composition.

[0033] Without being bound to theory, it is believed that polyolefin polymer compositions made from different species of polymer components, i.e., derived or polymerized from different catalysts, optionally, at different reactor conditions, must not only have a high molecular weight species present but the different polymer components must exhibit some minimum level of "entanglement" to obtain good melt strength. Entanglement represents a certain degree of interspersion or distribution of the different polymer components at the molecular level, perhaps, even with some chemical interaction, in the polyolefin polymer composition. Thus, when entanglement of the different polymer components occurs or at least to some level of entanglement, improvements in melt strength and/or strain hardening may be

achieved. Surprisingly, such improvements may even surpass the melt strengths and strain hardening of each individual polymer component when measured separately.


[0034] As such, the poly olefin polymer compositions may have a melt strength of 9 cN or greater, 10 cN or greater, 11 cN or greater, 12 cN or greater, 13 cN or greater, or 14 cN or greater.

[0035] The olefin polymerization catalyst may include any of the following catalysts.

Olefin Polymerization Catalyst


Metallocene Catalysts

[0036] The at least one olefin polymerization catalyst may comprise one or more metalocene catalysts, for example, at least one olefin polymerization catalyst (a) or (c). Often, the metallocene catalyst compounds for use herein are represented by the formula (I):

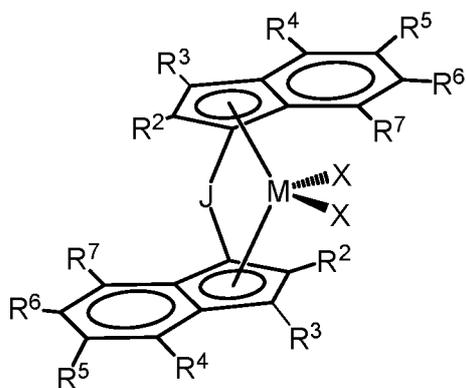

(I); or

by the formula (II):

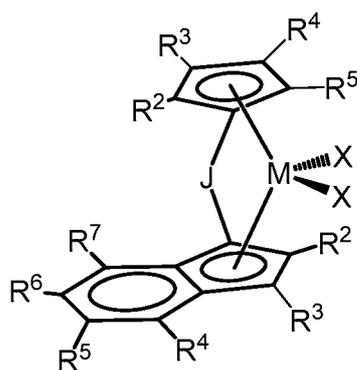

(II);

15 where: (1) J is a divalent bridging group (preferably comprising C, Si, or both); (2) M is a group 4 transition metal (preferably Hf or Zr); (3) each X is independently an anionic ligand, or two Xs are joined and bound to the metal atom to form a metallocycle ring, or two Xs are joined to form a chelating ligand, a diene ligand, or an alkylidene ligand; and (4) each R², R³, R⁴, R⁵, R⁶, and R⁷ is independently hydrogen, C1-C50 substituted or unsubstituted hydrocarbyl (such as Ci-
20 C50 substituted or unsubstituted halocarbyl), provided that any one or more of the pairs R⁴ and

R⁵, R⁵ and R⁶, and R⁶ and R⁷ may optionally be bonded together to form a saturated or partially saturated cyclic or fused ring structure.

[0037] In any embodiment, each X may be, independently, selected from the group consisting of hydrocarbyl radicals having from 1 to 20 carbon atoms, hydrides, amides, 5 alkoxides, sulfides, phosphides, halides, dienes, amines, phosphines, ethers, and a combination thereof. Two Xs may form a part of a fused ring or a ring system. In particular embodiments of the invention, each X is independently selected from halides and C₁ to C₅ alkyl groups. For instance, each X may be a chloro, bromo, methyl, ethyl, propyl, butyl, or pentyl group. In specific embodiments, each X is a methyl group.

10 [0038] In any embodiment, each R², R³, R⁴, R⁵, R⁶, and R⁷ may be independently hydrogen, hydrocarbyl or substituted hydrocarbyl; preferably selected from the group consisting of: H, CH₃; H₂CH₃; CH₂CH₂CH₃; CH₂(CH₂)₂CH₃; CH₂(CH₂)₃₋₃₀CH₃; CH₂C(CH₃)₃; CH=CH₂; CH(CH₃)₂; CH₂CH(CH₃)₂; CH₂CH₂CH(CH₃)₂; C(CH₃)₂CH(CH₃)₂; CH(C(CH₃)₃)CH(CH₃)₂; C(CH₃)₃; CH₂C(CH₃)₃; CH₂Si(CH₃)₃; CH₂Ph; C₃H₅; C₄H₇; C₅H₉; C₆H₁₁; C_vH_i₃; C₈H₁₅; C₉H₁₇; 15 CH₂Si(CH₃)₃; CH₂CH=CH₂; CH₂CH₂CH=CH₂; CH₂CH₂(CF₂)₇CF₃; CF₃; N(CH₃)₂; N(C₂H₅)₂; and OC(CH₃)₃.


[0039] Often, each R², R³, R⁴, R⁵, R⁶, and R⁷ is independently selected from hydrogen, or C₁-C₁₀ alkyl (preferably hydrogen, methyl, ethyl, propyl, butyl, pentyl, heptyl, hexyl, octyl, nonyl, decyl or an isomer thereof). Often, each R³ is hydrogen; each R⁴ is independently a C₁-C₁₀ 20 alkyl (preferably methyl, ethyl, propyl, butyl, pentyl, heptyl, hexyl, octyl, nonyl, decyl or an isomer thereof); each R², and R⁷ are independently hydrogen, or C₁-C₁₀ alkyl (preferably hydrogen, methyl, ethyl, propyl, butyl, pentyl, heptyl, hexyl, octyl, nonyl, decyl or an isomer thereof); each R⁵ and R⁶ are independently hydrogen, or C₁-C₅₀ substituted or unsubstituted hydrocarbyl (preferably hydrogen, methyl, ethyl, propyl, butyl, pentyl, heptyl, hexyl, octyl, 25 nonyl, decyl or an isomer thereof); and R⁴ and R⁵, R⁵ and R⁶, and/or R⁶ and R⁷ may optionally be bonded together to form a ring structure.

[0040] In any embodiment, each R² may independently be a C₁ to C₃ alkyl group, preferably methyl, ethyl, n-propyl, isopropyl or cyclopropyl, each R³, R⁵, R⁶, and R⁷ may be hydrogen, and each R⁴ may independently be a C₁ to C₄ alkyl group, preferably methyl, ethyl, 30 n-propyl, cyclopropyl, or n-butyl. Alternatively, each R² may be a C₁ to C₃ alkyl group, preferably methyl, ethyl, n-propyl, isopropyl or cyclopropyl, each R³, R⁵, and R⁶ may be hydrogen, and R⁴ and R⁷ may be, independently, a C₁ to C₄ alkyl group, preferably methyl, ethyl, propyl, butyl, or an isomer thereof. Yet, alternatively, each R², R⁴, and R⁷ may independently be methyl, ethyl, or n-propyl, each R⁵ and R⁶ may independently be a C₁ to C₁₀

alkyl group, preferably methyl, ethyl, propyl, butyl, pentyl, heptyl, hexyl, octyl, nonyl, decyl or an isomer thereof, R³ may be hydrogen, and R⁵ and R⁶ may be joined together to form a 5-membered partially unsaturated ring. Often, each R², R⁴, and R⁷ are the same and are selected from the group consisting of C₁ to C₃ alkyl group, preferably methyl, ethyl, propyl, and isomers thereof, and R³, R⁵, and R⁶ are hydrogen.

[0041] Often, R⁴ is not an aryl group (substituted or unsubstituted). An aryl group is defined to be a single or multiple fused ring group where at least one ring is aromatic. A substituted aryl group is an aryl group where a hydrogen has been replaced by a heteroatom or heteroatom containing group. Examples of substituted and unsubstituted aryl groups include phenyl, benzyl, tolyl, carbazolyl, naphthyl, and the like. Likewise, often, R², R⁴, and R⁷ are not a substituted or unsubstituted aryl group. Likewise, often, R², R⁴, R⁵, R⁶, and R⁷ are not a substituted or unsubstituted aryl group.

[0042] J may be represented by the formula (III):




wherein J' is a carbon or silicon atom, x is 1, 2, 3, or 4, preferably 2 or 3, and each R is, independently, hydrogen or C₁-C₁₀ hydrocarbyl, preferably hydrogen. Particular examples of J groups where J' is silicon include cyclopentamethylenesilylene, cyclotetramethylenesilylene, cyclotrimethylenesilylene, and the like. Particular examples of J groups where J' is carbon include cyclopropandiyl, cyclobutandiyl, cyclopentandiyl, cyclohexandiyl, and the like.

[0043] In any embodiment, J may be represented by the formula (R^aJ')_n where each J' is independently C or Si, n is 1 or 2, and each R^a is, independently, C₁ to C₂₀ substituted or unsubstituted hydrocarbyl, provided that two or more R^a, optionally, may be joined together to form a saturated or partially saturated or aromatic cyclic or fused ring structure that incorporates at least one J'. Particular examples of J groups include dimethylsilylene, diethylsilylene, isopropylene, ethylene, and the like.

[0044] Often, the metallocene compound used herein is at least 90% rac isomer and the indenyl groups are substituted at the 4 position with a C₁ to C₁₀ alkyl group, the 3 position is hydrogen, the bridge is carbon or silicon which is incorporated into a 4, 5, or 6 membered ring. For instance, the catalyst compound may either the rac or meso form of


cyclotetramethylenesilylene-bis(2,4j4rimethylinden-1-yl)hafnium dimethyl, represented by the formula (IVa):



(IVa).

[0045] As noted, the catalyst compounds can be in rac or meso form. For instance, at least 5 90 wt% of the catalyst compound may be in the rac form, based upon the weight of the rac and meso forms present. More particularly, at least any one of about 92 wt%, 93 wt%, 94 wt%, 95 wt%, 96 wt%, 97 wt%, 98 wt%, and 99 wt% of the catalyst compound may be in rac form. For example, all of the catalyst compound may be in rac form.

[0046] In a class of embodiments, the metallocene catalyst may be represented by the 10 formula (IVb):




wherein: Cp^1 and Cp^2 are the same or different cyclopentadienyl rings; R^1 and R^2 are each, independently, a halogen, a hydrogen, or a hydrocarbyl, halocarbyl, hydrocarbyl-substituted organometalloid or halocarbyl-substituted organometalloid group having 1 to 20 carbon atoms; 15 m is 0 to 5; n is 0 to 5; two R^1 and/or R^2 substituents on adjacent carbon atoms of the cyclopentadienyl ring associated therewith can be joined together to form a ring containing from 4 to about 20 carbon atoms; Y is a bridging group; n is the number of atoms in the direct chain between the two ligands and is 0 to 8; M is a transition metal having a valence of from 3 to 6; each X is, independently, a hydrogen, a halogen, or a hydrocarbyl, oxyhydrocarbyl, 20 halocarbyl, hydrocarbyl-substituted organometalloid, oxyhydrocarbyl-substituted organometalloid, or halocarbyl-substituted organometalloid group having 1 to 20 carbon atoms; and q is equal to the valence of M minus 2.

[0047] In another class of embodiments, the metallocene catalyst may comprise 25 bis(cyclopentadienyl)zirconium dichloride, bis(*n*-butylcyclopentadienyl)zirconium dichloride, bis(*n*-butylcyclopentadienyl)zirconium dimethyl, bis(pentamethylcyclopentadienyl)zirconium dichloride, bis(pentamethylcyclopentadienyl)zirconium dimethyl, bis(pentamethylcyclopentadienyl)hafnium dichloride, bis(pentamethylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-3-*n*-butylcyclopentadienyl)zirconium dichloride, bis(1-methyl-3-*n*-

butylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-3-n-butylcyclopentadienyl)hafnium dichloride, bis(1-methyl-3-n-butylcyclopentadienyl)zirconium dimethyl, bis(indenyl)zirconium dichloride, bis(indenyl)zirconium dimethyl, bis(tetrahydro-1-indenyl)zirconium dichloride, bis(tetrahydro-1-indenyl)zirconium dimethyl, (n-propyl cyclopentadienyl, pentamethyl cyclopentadienyl)zirconium dichloride, dimethylsilylbis(tetrahydroindenyl)zirconium dichloride, dimethylsilylbis(tetrahydroindenyl)zirconium dimethyl, dimethylsilylbis(indenyl)zirconium dichloride, dimethylsilyl(bisindenyl)zirconium dimethyl, dimethylsilylbis(cyclopentadienyl)zirconium dichloride, dimethylsilylbis(cyclopentadienyl)zirconium dimethyl, or (n-propyl cyclopentadienyl, pentamethyl cyclopentadienyl)zirconium dimethyl.

[0048] In another class of embodiments, the metallocene catalyst may comprise bis(n-propyl cyclopentadienyl) hafnium dichloride, dimethyl, or dihydride; bis(n-butyl cyclopentadienyl) hafnium dichloride or dimethyl; bis(n-pentyl cyclopentadienyl) hafnium dichloride, or dimethyl; (n-propyl cyclopentadienyl)(n-butyl cyclopentadienyl) hafnium dichloride or dimethyl; bis[(2-trimethylsilyl-ethyl)cyclopentadienyl] hafnium dichloride or dimethyl; bis(trimethylsilyl cyclopentadienyl) hafnium dichloride, dimethyl, or dihydride; bis(2-n-propyl indenyl) hafnium dichloride or dimethyl; bis(2-n-butyl indenyl) hafnium dichloride or dimethyl; dimethylsilyl bis(n-propyl cyclopentadienyl) hafnium dichloride or dimethyl; dimethylsilyl bis(n-butyl cyclopentadienyl) hafnium dichloride or dimethyl; bis(9-n-propyl fluorenyl) hafnium dichloride or dimethyl; bis(9-n-butyl fluorenyl) hafnium dichloride or dimethyl; (9-n propyl fluorenyl)(2-n-propyl indenyl) hafnium dichloride or dimethyl; bis(1,2-n-propyl, methyl cyclopentadienyl) hafnium dichloride or dimethyl; (n-propyl cyclopentadienyl)(1,3-n-propyl, n-butyl cyclopentadienyl) hafnium dichloride or dimethyl; bis(n-propyl cyclopentadienyl) hafnium dimethyl; bis(n-butyl cyclopentadienyl) hafnium dimethyl; bis(n-pentyl cyclopentadienyl) hafnium dimethyl; (n-propyl cyclopentadienyl)(n-butyl cyclopentadienyl) hafnium dimethyl; bis[(2-trimethylsilyl-ethyl)cyclopentadienyl] hafnium dimethyl; bis(trimethylsilyl cyclopentadienyl) hafnium dimethyl; bis(2-n-propyl indenyl) hafnium dimethyl; bis(2-n-butyl indenyl) hafnium dimethyl; dimethylsilyl bis(n-propyl cyclopentadienyl) hafnium dimethyl; dimethylsilyl bis(n-butyl cyclopentadienyl) hafnium dimethyl; bis(9-n-propyl fluorenyl) hafnium dimethyl; bis(9-n-butyl fluorenyl) hafnium dimethyl; (9-n-propyl fluorenyl)(2-n-propyl indenyl) hafnium dimethyl; bis(1,2-n-propyl, methyl cyclopentadienyl) hafnium dimethyl; or (n-propyl cyclopentadienyl)(1,3-n-propyl, n-butyl cyclopentadienyl) hafnium dimethyl.

[0049] Suitable catalysts also include, for example, mono-Cp amido group 4 complexes, bridged fluorenyl-cyclopentadienyl group 4 complexes, and biphenyl phenol (BPP) transition metal complexes. Suitable mono-Cp amido group 4 complexes include compounds represented by the formula (V):




5

wherein: (1) M is a group 4 metal, preferably titanium; (2) L¹ is a divalent substituted or unsubstituted monocyclic or polycyclic arenyl ligand pi-bonded to M; (3) J is a divalent bridging group; (4) Z is a group 15 or 16 element with a coordination number of three if from group 15 or with a coordination number of two if from group 16 of the Periodic Table of
 10 Elements, and z is the coordination number of the element Z such that when Z is a group 16 element, z is 2 and R¹⁵ is absent; (5) R¹⁵ is a radical group which is a hydrocarbyl, substituted hydrocarbyl, halocarbyl, or substituted halocarbyl; (6) L'_w is a neutral Lewis base and w represents the number of L' bonded to M where w is 0, 1, or 2, and, optionally, any L' and any X may be bonded to one another; and (7) each of the Xs are independently halogen radicals,
 15 hydride radicals, hydrocarbyl radicals, substituted hydrocarbyl radicals, halocarbyl radicals, substituted halocarbyl radicals, silylcarbyl radicals, substituted silylcarbyl radicals, germylcarbyl radicals, or substituted germylcarbyl radicals; or both X are joined and bound to the metal atom to form a metallacycle ring containing from about 3 to about 20 carbon atoms; or both together can be an olefin, diolefin or aryne ligand. In any embodiment, both X may,
 20 independently, be a halogen, alkoxide, aryloxy, amide, phosphide or other univalent anionic ligand or both X can also be joined to form an anionic chelating ligand. Suitable L¹ monocyclic or polycyclic arenyl ligands include substituted and unsubstituted cyclopentadienyl, indenyl, fluorenyl, heterocyclopentadienyl, heterophenyl, heteropentalenyl, heterocyclopentapentalenyl, heteroindenyls, heterofluorenyl, heterocyclopentanaphthyls, heterocyclopentaindenyls, heterobenzocyclopentaindenyls, and the like.

25

[0050] In any embodiment, the mono-Cp amido group 4 complexes may include compounds represented by the formula (VI):

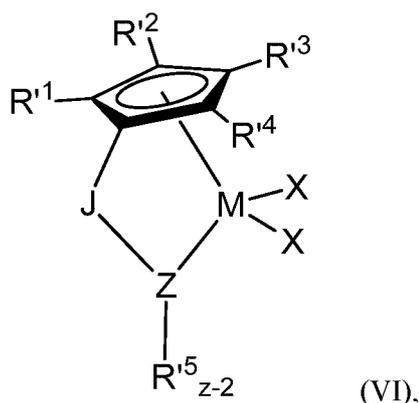

where: (1) J is a divalent bridging group, preferably comprising C, Si, or both; (2) M is a group 4 metal (for instance, Hf, Zr, or Ti, with Ti being preferred); (3) each X is independently a univalent anionic ligand, or two Xs are joined and bound to the metal atom to form a metallocycle ring, or two Xs are joined to form a chelating ligand, a diene ligand, or an alkylidene ligand; (4) each R¹, R², R³, R⁴, and R⁵ is independently hydrogen, C1-C50 hydrocarbyl, substituted hydrocarbyl, halocarbyl, or substituted halocarbyl provided that any one or more of the pairs R¹ and R², R² and R³, and R³ and R⁴, may, optionally, be bonded together to form a saturated or partially saturated cyclic or fused ring structure; and (5) Z is a group 15 or 16 element with a coordination number of three if from group 15 or with a coordination number of two if from group 16 of the Periodic Table of Elements, and z is the coordination number of the element Z. Preferably, Z is N, O, S, or P, preferably N, O, or P, preferably N. When Z is a group 16 element, z is 2 and R⁵ is absent.

[0051] In any embodiment, the bridging group, J, may be represented by **R*2C**, **R*2Si**, **R*2CCR*2**, **R*C=CR***, **R*2CSiR*2**, or **R*2SiSiR*2**, where each R* is, independently, hydrogen or a C1 to C20 containing hydrocarbyl or substituted hydrocarbyl, halocarbyl or substituted halocarbyl, and, optionally, two or more adjacent R* may join to form a substituted or unsubstituted, saturated or partially unsaturated aromatic, cyclic, or polycyclic substituent. Alternatively, J is a bridging group comprising carbon and/or silicon atoms, such as dialkylsilyl, preferably J is selected from CH₂, CH₂CH₂, C(CH₃)₂, SiMe₂, SiEt₂, SiPh₂, SiMePh, Ph₂C, (*p*-(Et)₃SiPh)₂C, Si(CH₂)₃, Si(CH₂)₄, and Si(CH₂)₅. Alternatively, J may be any of the compounds described for "J" in the catalysts above.


[0052] In any embodiment, each X may be selected in accordance with the previously-described catalyst compounds. That is, each X may independently be selected from the group consisting of hydrocarbyl radicals having from 1 to 20 carbon atoms, halogens, hydrides, amides, alkoxides, sulfides, phosphides, halides, dienes, amines, phosphines, ethers, and a combination thereof. Two Xs may form a part of a fused ring or a ring system. Preferably,

each X is independently selected from halides and C₁ to C₅ alkyl groups. For instance, each X may be a chloro, bromo, methyl, ethyl, propyl, butyl, or pentyl group. Often, each X is a methyl group.

[0053] In any embodiment, each R¹, R², R³, R⁴, and R⁵ may be independently selected from the following: H; CH₃; CH₂CH₃; CH₂CH₂CH₃; CH₂(CH₂)₂CH₃; CH₂(CH₂)₃CH₃; CH₂C(CH₃)₃; CH=CH₂; CH(CH₃)₂; CH₂CH(CH₃)₂; CH₂CH₂CH(CH₃)₂; C(CH₃)₂CH(CH₃)₂; CH(C(CH₃)₃)CH(CH₃)₂; C(CH₃)₃; CH₂Si(CH₃)₃; CH₂Ph; C₄H₇; C₅H₉; C₆H₁₁; C_vH_i₃; C₈H_i₅; C₉H_i₇; C_i₂H₂₃, C₁₀H₁₅, C₆H₅; CH₂Si(CH₃)₃; CH₂CH=CH₂; CH₂CH₂CH=CH₂; CH₂CH₂(CF₂)_vCF; CF₃; N(CH₃)₂; N(C₂H₅)₂; and OC(CH₃)₃.


[0054] Preferably, each of R¹, R², R³, and R⁴ is independently C₁-C₁₀ alkyl or hydrogen. For instance, each of R¹, R², R³, and R⁴ may be methyl or hydrogen. Often, each of R¹, R², R³, and R⁴ is methyl, as is the case in dimethylsilylene(tetramethylcyclopentadienyl)(cyclododecylamido)titanium dimethyl. Alternatively, one of R¹, R², R³, and R⁴ is hydrogen, the remaining R¹, R², R³, and R⁴ are each methyl (as is the case in, e.g., dimethylsilylene(trimethylcyclopentadienyl)(cyclododecylamido)titanium dimethyl). Yet, alternatively, any of the pairs R¹ and R², R² and R³, or R³ and R⁴ may be bonded together so as to form, together with the cyclopentadienyl moiety to which those pairs are attached, an indenyl, s-indacenyl, or as-indacenyl group (as is the case, for instance, with dimethylsilylene(6-methyl-1,2,3,4-tetrahydro-5H-indacen-5-yl)(tert-butylamido)titanium dimethyl). Yet, alternatively, Z is nitrogen, and R⁵ is selected from C₁-C₃₀ hydrocarbyl, substituted hydrocarbyl, halocarbyl, or substituted halocarbyl groups. Yet alternatively, Z is nitrogen, and R⁵ is a C₁ to C₁₂ hydrocarbyl group such as methyl, ethyl, propyl (*n*- or *iso*-), butyl (*n*-, *iso*-, *sec*-, or *tert*-), etc. For instance, R⁵ may be *tert*-butyl. Alternatively, R⁵, in certain embodiments, may be a cyclic group, e.g., adamantyl, cyclopropyl, cyclobutyl, cyclopentyl, cyclohexyl, cycloheptyl, cyclooctyl, cyclononyl, cyclodecyl, cyclododecyl, or norbornyl. Alternatively, R⁵, in certain embodiments, may be an aromatic group, e.g., phenyl, tolyl, naphthyl, anthracenyl, etc. Often, R⁵ is *t*-butyl and/or cyclododecyl, and preferably Z is N.

[0055] As noted, other suitable catalyst compounds may be characterized as bridged fluorenyl-cyclopentadienyl group 4 complexes. Suitable compounds according to such embodiments include compounds represented by the formula (VII):



wherein: (1) M is a group 4 metal, preferably hafnium; (2) L² is a divalent substituted or unsubstituted fluorenyl, heterocyclopentadienyl, or heterofluorenyls ligand pi-bonded to M; (3) L³ is a divalent cyclopentadienyl ring, a substituted cyclopentadienyl ring, a heterocyclopentadienyl ring, or a substituted heterocyclopentadienyl ligand pi-bonded to M; (4) J is a divalent bridging group; and (5) X are, independently, halogen radicals, hydride radicals, hydrocarbyl radicals, substituted hydrocarbyl radicals, halocarbyl radicals, substituted halocarbyl radicals, silylcarbyl radicals, substituted silylcarbyl radicals, germylcarbyl radicals, or substituted germylcarbyl radicals; or both Xs are joined and bound to the metal atom to form a metallacycle ring containing from about 3 to about 20 carbon atoms; or both together can be an olefin, diolefin, or aryne ligand. In any embodiment, both Xs may, independently, be a halogen, alkoxide, aryloxy, amide, phosphide, or other univalent anionic ligand; or both Xs can also be joined to form an anionic chelating ligand.

[0056] Suitable fluorenyl-cyclopentadienyl group 4 complexes include compounds represented by the formula (VIII):

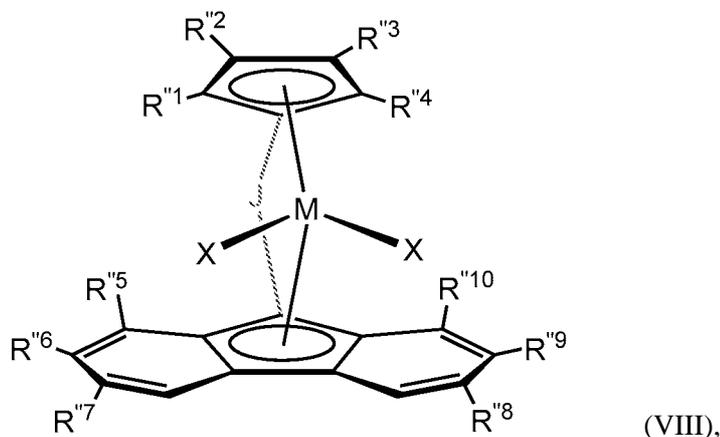


where: (1) J is a divalent bridging group preferably comprising C, Si, or both; (2) M is a group 4 metal (for instance, Hf, Zr, or Ti, with Hf being preferred); (3) each X is, independently, a univalent anionic ligand, or two Xs are joined and bound to the metal atom to form a metallacycle ring, or two Xs are joined to form a chelating ligand, a diene ligand, or an alkylidene ligand; and (4) each R¹, R², R³, R⁴, R⁵, R⁶, R⁷, R⁸, R⁹, and R¹⁰ is, independently hydrogen, C₁-C₅₀ hydrocarbyl, substituted hydrocarbyl, halocarbyl, or substituted halocarbyl, provided that any one or more of the pairs R¹ and R², R³ and R⁴, R⁵ and R⁶, R⁶ and R⁷, R⁸ and R⁹, and R⁹ and R¹⁰, may, optionally, be bonded together

to form a saturated or partially saturated cyclic or fused ring structure. In any embodiment, the bridging group, J, may be represented by R^*C , R^*Si , R^*CCR^* , $R^*C=CR^*$, R^*CSiR^* , or R^*SiSiR^* , where each R^* is, independently, hydrogen or a C₁ to C₂₀ containing hydrocarbyl or substituted hydrocarbyl, and, optionally, two or more adjacent R^* may join to form a substituted or unsubstituted, saturated or partially unsaturated or aromatic, cyclic, or polycyclic substituent. In any embodiment, J may be a bridging group comprising carbon and/or silicon atoms, such as dialkylsilyl; preferably J is selected from CH₂, CH₂CH₂, C(CH₃)₂, SiMe₂, SiEt₂, SiPh₂, SiMePh, Ph₂C, (Et)₃SiPh₂C, Si(CH₂)₃, Si(CH₂)₄, and Si(CH₂)₅. Alternately, J may be any of the compounds described for "J" in the catalysts above.

[0057] Each X may independently be selected from the group consisting of hydrocarbyl radicals having from 1 to 20 carbon atoms, halogens, hydrides, amides, alkoxides, sulfides, phosphides, halides, dienes, amines, phosphines, ethers, and a combination thereof. Two Xs may form a part of a fused ring or a ring system. Preferably, each X is independently selected from halides and C₁ to C₅ alkyl groups. For instance, each X may be a chloro, bromo, methyl, ethyl, propyl, butyl, or pentyl group. For example, each X is a methyl group.

[0058] In any embodiment, each R¹, R², R³, R⁴, R⁵, R⁶, R⁷, R⁸, R⁹, and R¹⁰ may be independently selected from the following: H; CH₃; CH₂CH₃; CH₂CH₂CH₃; CH₂(CH₂)₂CH₃; CH₂(CH₂)₃₋₃₀CH₃; CH₂C(CH₃)₃; CH=CH₂; CH(CH₃)₂; CH₂CH(CH₃)₂; CH₂CH₂CH(CH₃)₂; C(CH₃)₂CH(CH₃)₂; CH(C(CH₃)₃)CH(CH₃)₂; C(CH₃)₃; CH₂Si(CH₃)₃; CH₂Ph; C₄H₇; C₅H₉; C₆H₁₁; C_vH_i₃; C₈H₁₅; C₉H₁₇; C₆H₅; CH₂Si(CH₃)₃; CH₂CH=CH₂; CH₂CH₂CH=CH₂; CH₂CH₂(CF₂)₇CF₃; CF₃; N(CH₃)₂; N(C₂H₅)₂; and OC(CH₃)₃. Often, any one or more of R¹, R², R³, R⁴, R⁵, R⁶, R⁷, R⁸, R⁹, and R¹⁰ may be hydrogen, methyl, ethyl, *is*-propyl, *z*-propyl, *s*-butyl, *z*-butyl, *w*-butyl, *t*-butyl, and so on for various isomers for C₅ to C₁₀ alkyls. Often, R⁶ and R⁹ may be *t*-butyl. For instance, R¹, R², R³, R⁴, R⁵, R⁷, R⁸, and R¹⁰ may each be independently selected from H, methyl, and ethyl. Often, each R¹-R¹⁰ group other than R⁶ and R⁹ is H.

[0059] In any embodiment, the fluorenyl-cyclopentadienyl group 4 complexes may be represented by the formula (IX):

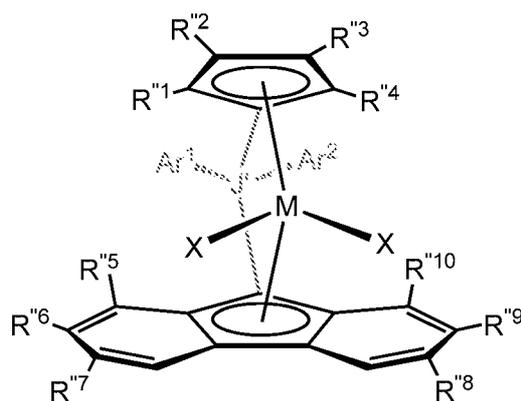

(IX),

wherein M, X, R''¹-R''¹⁰ are defined as above, J' is a silicon or carbon atom, and Ar¹ and Ar² are independently C₆-C₃₀ aryl or substituted aryl groups, wherein the substituents, independently, each occurrence are selected from the group consisting of hydrocarbyl, substituted hydrocarbyl, halocarbyl, and substituted halocarbyl.


[0060] Often, at least one of the Ar¹ and Ar² contains at least one hydrocarbyl silyl substituent group having the formula R*' _nSiR''³, where each R'' is independently a C₁-C₂₀ hydrocarbyl, substituted hydrocarbyl, halocarbyl, substituted halocarbyl, silylcarbyl, or substituted silylcarbyl substituent, R*' is a C₁-C₁₀ substituted or unsubstituted alkyl, alkenyl, and/or alkynyl linking group between Si and the aryl group, and n = 0 or 1. For example, when n is 0, one or both of Ar¹ and Ar² may be trimethylsilylphenyl (Me₃SiPh), triethylsilylphenyl (Et₃SiPh), tripropylsilylphenyl (PnSiPh), etc. Similarly, when n is 1, R*' is present as a linking group, for example a C₂ linking group (e.g., ethyl linking group), then one or both of Ar¹ and Ar² may be (trimethylsilyl)ethyl phenyl (Me₃SiCH₂CH₂Ph), and so on. Thus, for example, wherein (1) R''⁶ and R''⁹ are each t-butyl as discussed above; (2) R''¹- R''⁴, R''⁵, R''⁷, R''⁸, and R''¹⁰ are each H, as also discussed above; (3) Ar¹ and Ar² are each Et₃SiPh; (4) J is C; (5) M is Hf; and (6) each X is methyl, an exemplary catalyst accordingly can be given as 1,1'-bis(4-triethylsilylphenyl)methylene-(cyclopentadienyl)(2,7-di-terti-butyl-fluoren-9-yl)hafnium dimethyl.

20 Biphenyl Phenol Catalysts (BPP)

[0061] The at least one olefin polymerization catalyst may also comprise one or more biphenyl phenol catalysts (BPP) or also known as biphenyl phenol transition metal catalysts, for example, at least one olefin polymerization catalyst (b) or (c), or wherein the at least one olefin polymerization catalyst (b) is not a metallocene catalyst. Such catalysts and their use in polymerization processes have been described in, for example, U.S. Publication Nos. 2009/0306323; 2006/0025548; 2006/020588; 2006/00211892; and U.S. Patent Nos. 7,091,282;

7,030,256; 7,060,848; 7,126,031; 6,841,502; and 8,586,497; and PCT Publication Nos. WO 2006/020624; WO 2005/108406; WO 2003/091262; and WO 2016/094861.

[0062] The BPP catalyst may comprise a pyridyldiamido transition metal complex represented by the formula (X):

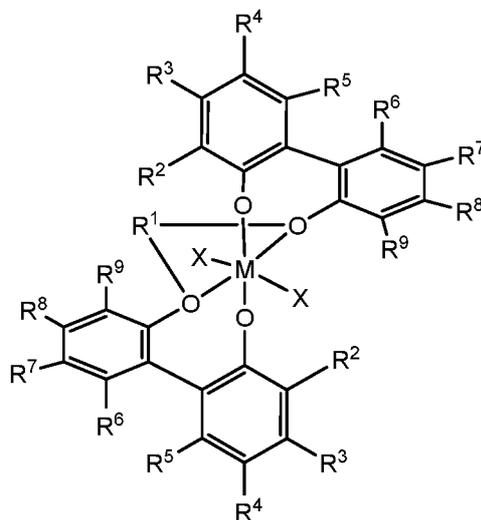

5

wherein M may be Ti, Zr, or Hf. M may be selected from the group consisting of Ti, Zr, and Hf; each R¹ through R⁹ may be independently selected from the group consisting of hydride, hydrocarbyl, lower hydrocarbyl, substituted hydrocarbyl, heterohydrocarbyl, alkyl, lower alkyl, substituted alkyl, heteroalkyl, alkenyl, lower alkenyl, substituted alkenyl, heteroalkenyl, alkynyl, lower alkynyl, substituted alkynyl, heteroalkynyl, alkoxy, lower alkoxy, aryloxy, hydroxyl, alkylthio, lower alkyl thio, arylthio, thioxy, aryl, substituted aryl, heteroaryl, aralkyl, aralkylene, alkaryl, alkarylene, halide, haloalkyl, haloalkenyl, haloalkynyl, heteroalkyl, heterocycle, heteroaryl, heteroatom-containing group, silyl, boryl, phosphino, phosphine, amino, and amine; wherein X is at least one leaving group.

10

15

[0063] In any embodiment described herein, M is selected from the group consisting of Ti, Zr, and Hf. R² is, optionally, selected from the group consisting of alkyls, aryls, and heteroaryls; each R⁴ is selected from the group consisting of H, alkyls, and aryls. X is selected from the group consisting of F, Cl, Br, I, Me, benzonitrile (Bnz), CH₂SiMe₃, and C₁ to C₅ alkyls or alkenyls.

20


[0064] In any embodiment described herein, R¹ may be selected from the group consisting of CH₂CH₂, (CH₂)₃, (CH₂)₄, CH₂CHMeCH₂, CH₂CMe₂CH₂, Me₂Si, CH₂SiMe₂CH₂, and CH₂SiR₂CH₂; each R² may be any aryl group with substituents in the 2 and 6 positions; each R³ and R⁵ through R⁹ are H; each R⁴ is selected from the group consisting of H, methyl, ethyl,

propyl, butyl, and pentyl; and X is selected from the group consisting of F, Cl, Br, I, Me, Bnz, CH₂SiMe₃, and C₁ to C₅ alkyls or alkenyls.

[0065] Additionally, or alternatively, M is either Zr or Hf; each R¹ is either (CH₂)₃ or (CH₂)₄; each R² is selected from the group consisting of 2,6-Me₂Ph, 2,6-Et₂Ph, 2,6-Pr₂-Ph, 2,6-Bu₂Ph, 2-MeNaphthyl, 2,4,6-Me₃Ph, 2,4,6-Et₃Ph, 2,4,6-Pr₃Ph, and carbazole; each R⁴ is selected from the group consisting of H, methyl and butyl; and X is selected from the group consisting of F, Cl, and Me.


[0066] Additionally, or alternatively, R¹ is (CH₂)₃; each R² is either 2,4,6-Me₃Ph or 2-MeNaphthyl; each R⁴ is CH₃; X is Cl; and M is Zr.

10 [0067] In one embodiment, the phenoxide transition metal catalyst is a biphenyl phenol catalyst represented by the formula (XI):




(XI),

[0068] In another embodiment, the phenoxide transition metal catalyst is a biphenyl phenol catalyst represented by the formula (XIIa):



(XIIa),

15

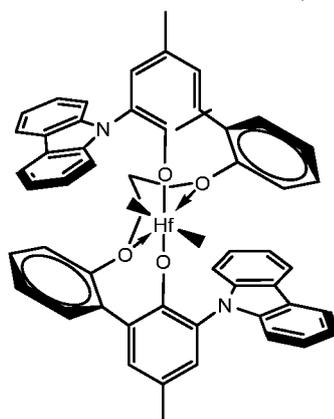

(XIIb),

20

Activators/Co-catalyst


[0069] The catalyst system may comprise one or more activators or, alternatively, the catalyst(s) may be contacted with one or more activators. Non-limiting limiting examples include alumoxanes, aluminum alkyls, ionizing activators, which may be neutral or ionic, and
5 conventional-type co-catalysts. Particular co-activators include alumoxane compounds, modified alumoxane compounds, and ionizing anion precursor compounds that abstract a reactive, σ -bound, metal ligand making the metal complex cationic and providing a charge-balancing non-coordinating or weakly coordinating anion.

[0070] Alumoxane activators may be utilized as an activator for an olefin polymerization
10 catalyst. Alumoxanes are generally oligomeric compounds containing $-A^R-O-$ sub-units, where R^1 is an alkyl group. Examples of alumoxanes include methylalumoxane (MAO), modified methylalumoxane (MMAO), ethylalumoxane, isobutylalumoxane, and mixtures thereof. Alkylalumoxanes and modified alkylalumoxanes are suitable as catalyst activators, particularly when the abstractable ligand is an alkyl, halide, alkoxide, or amide. Mixtures of
15 different alumoxanes and modified alumoxanes may also be used. It may be preferable to use a visually clear methylalumoxane. A cloudy or gelled alumoxane can be filtered to produce a clear solution or clear alumoxane can be decanted from the cloudy solution. A useful alumoxane is a modified methyl alumoxane (MMAO) cocatalyst type 3A (commercially available from Akzo Chemicals, Inc. under the trade name Modified Methylalumoxane type
20 3A, *see, also*, U.S. Patent No. 5,041,584).

[0071] When the co-activator is an alumoxane (modified or unmodified), the maximum amount of co-activator is generally a 5000-fold molar excess Al/M over the catalyst compound (per metal catalytic site). The minimum alumoxane-to-catalyst-compound is a 1:1 molar ratio. Other ranges may include from 1:1 to 1000:1, such as 1:1 to 500:1. For instance, alumoxane
25 may be employed at any one of about 500, 450, 400, 350, 300, 250, 200, 150, 100, 50, 25, and 1 mole(s) or less, per mole catalyst compound.

[0072] In addition or instead, catalyst systems may include at least one non-coordinating anion (NCA) co-activator. Non-coordinating anions useful in accordance with this invention are those that are compatible, stabilize the transition metal cation in the sense of balancing its
30 ionic charge at +1, and yet retain sufficient ability to permit displacement during polymerization.

[0073] Preferred boron containing NCA activators are represented by the formula below:



where: Z is (L-H) or a reducible Lewis acid; L is a neutral Lewis base; H is hydrogen; (L-H) is

a Bronsted acid; A^{d-} is a boron containing non-coordinating anion having the charge $d-$; d is 1, 2, or 3. The cation component, Z^{d+} may include Bronsted acids such as protons or protonated Lewis bases or reducible Lewis acids capable of protonating or abstracting a moiety, such as an alkyl or aryl, from the bulky ligand metallocene containing transition metal catalyst precursor, resulting in a cationic transition metal species.

5 [0074] The activating cation Z^{d+} may also be a moiety such as silver, tropylium, carboniums, ferroceniums, and mixtures, preferably carboniums and ferroceniums. Often, Z^{d+} is triphenyl carbonium. Preferred reducible Lewis acids can be any triaryl carbonium (where the aryl can be substituted or unsubstituted, such as those represented by the formula: $(Ar)_3C^+$), where Ar is aryl or aryl substituted with a heteroatom, a C_1 to C_{40} hydrocarbyl, or a substituted C_1 to C_{40} hydrocarbyl), preferably the reducible Lewis acids in formula (14) above as "Z" include those represented by the formula: $(PI)3C$, where Ph is a substituted or unsubstituted phenyl, preferably substituted with C_1 to C_{40} hydrocarbyls or substituted a C_1 to C_{40} hydrocarbyls, preferably C_1 to C_{20} alkyls or aromatics or substituted C_1 to C_{20} alkyls or aromatics, preferably Z is a triphenyl carbonium.

15 [0075] When Z^{d+} is the activating cation $(L-H)^{d+}$, it is preferably a Bronsted acid, capable of donating a proton to the transition metal catalytic precursor resulting in a transition metal cation, including ammoniums, oxoniums, phosphoniums, silyliums, and mixtures thereof, preferably ammoniums of methylamine, aniline, dimethyl amine, diethyl amine, N-methylaniline, diphenylamine, trimethylamine, triethylamine, N,N-dimethylaniline, methyl diphenylamine, pyridine, p-bromo N,N-dimethylaniline, p-nitro-N,N-dimethylaniline, phosphoniums from triethylphosphine, triphenylphosphine, and diphenylphosphine, oxoniums from ethers such as dimethyl ether diethyl ether, tetrahydrofuran and dioxane, sulfoniums from thioethers, such as diethyl thioethers, tetrahydrothiophene, and mixtures thereof.

25 [0076] The anion component A^{d-} includes those having the formula $[M^{k+}Q_n]^{d-}$ wherein k is 1, 2, or 3; n is 1, 2, 3, 4, 5, or 6 (preferably 1, 2, 3, or 4); $n - k = d$; M is an element selected from Group 13 of the Periodic Table of the Elements, preferably boron or aluminum, and Q is independently a hydride, bridged or unbridged dialkylamido, halide, alkoxide, aryloxy, hydrocarbyl, substituted hydrocarbyl, halocarbyl, substituted halocarbyl, and halo substituted-hydrocarbyl radicals, said Q having up to 20 carbon atoms with the proviso that in not more than 1 occurrence is Q a halide. Preferably, each Q is a fluorinated hydrocarbyl group having 1 to 20 carbon atoms, more preferably each Q is a fluorinated aryl group, and most preferably each Q is a pentafluoryl aryl group. Examples of suitable A^{d-} also include diboron compounds as disclosed in U.S. Patent No. 5,447,895. Illustrative, but not limiting, examples of boron

compounds which may be used as an activating cocatalyst are the compounds described as (and particularly those specifically listed as) activators in U.S. Patent No. 8,658,556.

- [0077] Non-limiting examples include N,N-dimethylanilinium tetra(perfluorophenyl)borate, N,N-dimethylanilinium tetrakis(perfluoronaphthyl)borate, N,N-dimethylanilinium tetrakis(perfluorobiphenyl)borate, N,N-dimethylanilinium tetrakis(3,5-bis(trifluoromethyl)phenyl)borate, triphenylcarbenium tetrakis(perfluoronaphthyl)borate, triphenylcarbenium tetrakis(perfluorobiphenyl)borate, triphenylcarbenium tetrakis(3,5-bis(trifluoromethyl)phenyl)borate, or triphenylcarbenium tetra(perfluorophenyl)borate. *See* U.S. Patent No. 8,658,556.
- 10 [0078] Other non-limiting examples include N,N-dimethylanilinium tetrakis(pentafluorophenyl)borate; N,N-dimethylanilinium tetrakis(perfluoronaphthyl)borate, N,N-dimethylanilinium tetrakis(perfluorobiphenyl)borate, N,N-dimethylanilinium tetrakis(3,5-bis(trifluoromethyl)phenyl)borate, triphenylcarbenium tetrakis(perfluoronaphthyl)borate, triphenylcarbenium tetrakis(perfluorobiphenyl)borate, triphenylcarbenium tetrakis(3,5-bis(trifluoromethyl)phenyl)borate, triphenylcarbenium tetrakis(perfluorophenyl)borate, $[\text{Ph}_3\text{C}^+][\text{B}(\text{C}_6\text{F}_5)_4]^-$, $[\text{Me}_3\text{NH}^+][\text{B}(\text{C}_6\text{F}_5)_4]^-$; 1-(4-(tris(pentafluorophenyl)borate)-2,3,5,6-tetrafluorophenyl)pyrrolidinium; tetrakis(pentafluorophenyl)borate, 4-(tris(pentafluorophenyl)borate)-2,3,5,6-tetrafluoropyridine, bis(C4-C2o alkyl)methylammonium tetrakis(pentafluorophenyl)borate and
- 20 bis(hydrogenated tallow alkyl)methylammonium tetrakis(pentafluorophenyl)borate. *See, also*, U.S. Patent No. 6,211,105. Any of the activators described herein may optionally be mixed together before or after combination with the catalyst(s).

- [0079] Further, the typical NCA-to-catalyst ratio for each of the catalysts (e.g., all NCA-to-catalyst or all NCAs-to-catalysts ratio) is a 1:1 molar ratio. Alternative preferred ranges include from 0.1:1 to 100:1. For instance, NCA-to-catalyst ratio may be any one of about 0.5, 1, 2, 5, 10, 50, 75, 100, 200, 250, 300, 350, 400, 450, 500, 600, 700, 800, 900, and 1000 to 1. Often, the NCA-to-catalyst ratio may be within a range between any two of the foregoing. It is also within the scope of this invention that either or both of the mono-Cp amido group 4 complexes, bridged fluorenyl-cyclopentadienyl group 4 complexes, biphenyl phenol (BPP) transition metal complexes, pyridyl amide transition metal complexes and/or pyridyl diamide transition metal complexes and other catalyst compounds can be combined with combinations of alumoxanes and NCAs.
- 30

[0080] Often, the activator(s) is/are contacted with a catalyst(s) to form the catalyst system comprising activated catalyst(s) and activator or other charge-balancing moiety, before the

catalyst system is contacted with one or more monomers. Alternatively, the activator(s) may be co-fed to catalyst(s) together with one or more monomers. Where two or more catalysts are utilized (i.e., a mixed catalyst system or dual catalyst system), each of the catalyst compounds may be contacted with their respective activator(s) (which, again, may be the same or different) before being mixed together. Where the same activator is used for each, a mixture of catalyst(s) may be contacted with activator (either before or along with feeding of monomers to the catalyst mixture).

Supports

[0081] The catalyst system may comprise at least one support or the catalyst and activator, in any order, may be contacted with at least one support. The catalyst system may optionally be supported. The terms "support" or "carrier" are used interchangeably herein and refer to any support material, including inorganic or organic support materials. The term "supported" as used herein refers to one or more compounds that are deposited on, contacted with, vaporized with, bonded to, or incorporated within, adsorbed or absorbed in, or on, a support or carrier. In some embodiments, the support material can be a porous or semi-porous support material. In other embodiments, the support material can be a non-porous support material.

[0082] Non-limiting examples of support materials include inorganic oxides and inorganic chlorides, and in particular such materials as talc, clay, silica, alumina, magnesia, zirconia, iron oxides, boria, calcium oxide, zinc oxide, barium oxide, thoria, aluminum phosphate gel, and polymers such as polyvinylchloride and substituted polystyrene, functionalized or cross-linked organic supports such as polystyrene divinyl benzene polyolefins or polymeric compounds, and mixtures thereof, and graphite, in any of its various forms. Non-limiting examples of inorganic support materials include inorganic oxides and inorganic chlorides.

[0083] Commercial supports include the ES70 and ES757 family of silicas available from PQ Corporation, Malvern, Pennsylvania. Other commercial supports include Sylopol™ Silica Supports including 955 silica and 2408 silica available from Grace Catalyst Technologies, Columbia, Maryland.

[0084] Examples of supporting a catalyst system are described in U.S. Patent Nos.: 4,701,432; 4,808,561; 4,912,075; 4,925,821; 4,937,217; 5,008,228; 5,238,892; 5,240,894; 5,332,706; 5,346,925; 5,422,325; 5,466,649; 5,466,766; 5,468,702; 5,529,965; 5,554,704; 5,629,253; 5,639,835; 5,625,015; 5,643,847; 5,665,665; 5,468,702; and 6,090,740; and PCT Publications WO 95/32995; WO 95/14044; WO 96/06187; and WO 97/02297.

[0085] The support may also be a silicate support. *See, for example*, WO 2016/094861. The silicate support may be an ion exchanged layered silicate support. Ion-exchange layered

silicate useful in the present invention are silicate compounds having crystal structures wherein layers formed by strong ionic and covalent bonds are laminated in parallel with weak ionic bonding, and the ions contained between the layers are exchangeable. Most ion-exchange layered silicates naturally occur as the main component of clay minerals, but these ion-exchange layered silicates may be artificially synthesized materials. Preferred ion-exchange layered silicates useful in this invention include natural or synthetic montmorillonite, nontronite, beidellite, volkonskoite, laponite, hectorite, saponite, sauconite, stevensite, vermiculite, halloysite, aluminate oxides, bentonite, kaolinite, dickite, smectic clays, mica, magadiite, kenyaite, octosilicate, kanemite, makatite, attapulgite, sepiolite, zeolitic layered materials (such as ITQ-2, MCM-22, and ferrierite precursors) and mixtures thereof. Preferably, the ion-exchange layered silicate is acidified by contacting with an acid (such as sulfuric acid, hydrochloric acid, a carboxylic acid, an amino acid, or the like.)

[0086] Preferred ion-exchange layered silicates useful in this invention include those having a 1:1 type structure or a 2:1 type structure. Examples of the ion-exchange layered silicate include layered silicates having a 1:1 type structure or a 2:1 type structure as described in "Clay Mineralogy" written by R. E. Grim (published by McGraw Hill in 1968) and "Chemistry of Clays and Clay Minerals" written by A. C. Newman (published by John Wiley and Sons: New York in 1987). The 1:1 type structure is a structure formed by laminating 1:1 layered structures having one layer of tetrahedral sheet and one layer of octahedral sheet combined as described in the above literature "Clay Mineralogy," and the 2:1 type structure is a structure formed by laminating 2:1 layered structures having one layer of octahedral sheet sandwiched between two layers of tetrahedral sheets. Examples of ion exchange layered silicate comprising the 1:1 layer as the main constituting layer include kaolin group silicates such as dickite, nacrite, kaolinite, meta-halloysite, halloysite, or the like, and serpentine group silicates such as chrysotile, lizardite, antigorite, or the like. Examples of ion-exchange layered silicate comprising the 2:1 layer as the main constituting layer include smectite group silicates such as montmorillonite, beidellite, nontronite, saponite, hectorite, stephensite, or the like, vermiculite group silicates such as vermiculite, or the like, mica group silicates such as mica, illite, sericite, glauconite, or the like, and attapulgite, sepiolite, palygorskite, bentonite, pyrophyllite, talc, chlorites, and the like. Mixed layer silicates are also included. Often, an ion-exchange layered silicate having the 2:1 type structure is preferable. Preferably, a smectite group silicate is used and in a particularly preferable example the ion exchange layered silicate comprises montmorillonite.

Polymerization Processes and Olefin Monomers

[0087] The catalysts, catalyst system components, and catalyst systems described above are suitable for polymerization processes for the production of polyolefin polymers over a wide range of temperatures and pressures. Polymerization processes include solution, gas phase, 5 slurry phase, super critical, a high pressure process, or a combination thereof, for example the same or different reactors in series or parallel.

[0088] A particularly preferred process is a gas phase or slurry phase polymerization process for the production of ethylene-based polymers and propylene-based polymers. For the sake of brevity and illustration purposes only, embodiments of the present invention will be 10 further described below with an emphasis to the polymerization of ethylene monomer to make polyethylene polymers using a gas phase, fluidized bed polymerization process. However, in no way shall this be limiting to the scope of the claims unless affirmatively recited therein.

[0089] In any embodiment, the process of the invention may be directed toward a solution, high pressure, slurry or gas phase polymerization process of one or more olefin monomers 15 having from 2 to 30 carbon atoms, preferably 2 to 12 carbon atoms, and more preferably 2 to 8 carbon atoms. In a class of embodiments, the polymerization of two or more olefin monomers of ethylene, propylene, butene-1, pentene-1, 4-methyl-pentene-1, hexene-1, octene-1 and decene-1 is preferred.

[0090] Other monomers include ethylenically unsaturated monomers, diolefins having 4 to 20 18 carbon atoms, conjugated or nonconjugated dienes, polyenes, vinyl monomers, cyclic olefins, and combinations thereof. Non-limiting examples of monomers useful include norbornene, 5-vinyl-2-norbornene, norbornadiene, isobutylene, isoprene, vinylbenzocyclobutane, styrenes, alkyl substituted styrene, ethylidene norbornene, dicyclopentadiene and cyclopentene.

25 [0091] Alternatively, a copolymer of ethylene is produced, where with ethylene, a comonomer having at least one alpha-olefin having from 4 to 15 carbon atoms, preferably from 4 to 12 carbon atoms, and most preferably from 4 to 8 carbon atoms, is polymerized in a gas phase process. Yet alternatively, ethylene or propylene is polymerized with at least two different comonomers, optionally one of which may be a diene, to form a terpolymer.

30 [0092] The catalyst system may be employed in liquid phase (solution, slurry, suspension, bulk phase, or combinations thereof), in high pressure liquid, supercritical fluid, or gas phase processes. Each of these processes may be employed in single, parallel, or series reactors. The liquid processes comprise contacting the ethylene and/or alpha-olefin and at least one vicinally disubstituted olefin monomer with the catalyst system described herein in a suitable diluent or

solvent and allowing the monomers to react for a sufficient time to produce copolymers. One or more of the monomers used in the polymerization may be utilized as a solvent and/or diluent, generally in homogeneous polymerizations in the liquid monomer or monomers. Hydrocarbon solvents are also suitable, both aliphatic and aromatic, including hexane and toluene. Bulk and slurry processes may typically be accomplished by contacting the catalysts with a slurry of liquid monomer, the catalyst system being supported.

[0093] Gas phase processes may use the supported catalyst and may be conducted in any manner known to be suitable for producing ethylene homopolymers or copolymers via coordination polymerization.

10 [0094] Generally, the polymerization reaction temperature may vary from -50°C to 250°C. The reaction temperature conditions may be from -20°C to 220°C, or below 200°C. The pressure may vary from 1 mm Hg to 2500 bar, or from 0.1 bar to 1600 bar, or from 1.0 to 500 bar. Where lower molecular weight copolymers, e.g., $M_n \leq 10,000$, are sought, it may be suitable to conduct the reaction processes at temperatures above 0°C and pressures under 500

15 bar.
[0095] The gas phase process can be operated in a condensed mode, where an inert or induced condensable/condensing agent/fluid is introduced to the process to increase the cooling capacity of the reactor system. These inert condensable fluids are referred to as induced condensing agents or ICA's. Condensed mode processes are further described in U.S. Patent
20 Nos. 5,342,749 and 5,436,304.

[0096] Additional polymerization process and related equipment details are more fully described in, for example, U.S. Patent Nos. 4,543,399; 4,588,790; 5,028,670; 5,317,036; 5,352,749; 5,382,638; 5,405,922; 5,436,304; 5,453,471; 5,462,999; 5,616,661; 5,627,242; 5,665,818; 5,668,228; 5,677,375; 5,804,678; 6,362,290; and 6,689,847.

25 Polymer Products

[0097] The polymers produced by the process of the invention can be used in a wide variety of products and end-use applications. The polymers produced can be homo- and co-polymers of ethylene and propylene and include linear low density polyethylene, elastomers, plastomers, high-density polyethylenes, medium density polyethylenes, low density polyethylenes, polypropylene and polypropylene copolymers. The term "polyethylene" or "polyethylene polymer" refers to a polymer having at least 50 wt% ethylene-derived units, at least 70 wt% ethylene-derived units, at least 80 wt% ethylene-derived units, or 90 wt% ethylene-derived units, or 95 wt% ethylene-derived units, or 100 wt% ethylene-derived units.

[0098] Polyolefin polymers, for example, polyethylene polymers, may have a density of from 0.860 g/cm³ to 0.970 g/cm³. In several embodiments, the density may be about ≥ 0.890 g/cm³, about ≥ 0.900 g/cm³, about ≥ 0.912 g/cm³, about ≥ 0.915 g/cm³, about ≥ 0.918 g/cm³, about ≥ 0.920 g/cm³, e.g., about ≥ 0.922 g/cm³, about ≥ 0.928 g/cm³, about ≥ 0.930 g/cm³, about ≥ 0.932 g/cm³ and the density may be about ≤ 0.945 g/cm³, e.g., about ≤ 0.940 g/cm³, about ≤ 0.937 g/cm³, about ≤ 0.935 g/cm³, about ≤ 0.933 g/cm³, about ≤ 0.930 g/cm³, or about ≤ 0.925 g/cm³. Ranges expressly disclosed include, but are not limited to, ranges formed by combinations any of the above-enumerated values, e.g., about 0.900 to about 0.940 g/cm³, about 0.912 to about 0.930 g/cm³, about 0.915 to about 0.925 g/cm³, about 0.920 to about 0.940 g/cm³, etc. Density is determined using chips cut from plaques compression molded in accordance with ASTM D-1928 Procedure C, aged in accordance with ASTM D-618 Procedure A, and measured as specified by ASTM D-1505.

[0099] Mn is number average molecular weight, Mw is weight average molecular weight, and Mz is z average molecular weight. Molecular weight distribution (MWD) is defined to be Mw divided by Mn. Unless otherwise noted, methods for determining such measurements are provided below and all molecular weight units (e.g., Mw, Mn, Mz) are g/mol.

[00100] Polyethylene polymers may have a weight average molecular weight (M_w) of from 20,000 up to 2,000,000 g/mol, 50,000 to 1,500,000 g/mol, 50,000 to 250,000 g/mol, 80,000 g/mol to 150,000 g/mol, 100,000 to 1,300,000 g/mol, 300,000 to 1,300,000 g/mol, or 500,000 to 1,300,000 g/mol.

[00101] Propylene based polymers produced include isotactic polypropylene, atactic polypropylene, and random, block, or impact copolymers. Preferred propylene polymer, preferably homopolymer, produced herein has an Mw of 20,000 up to 2,000,000 g/mol.

[00102] Polyolefin polymers, for example, polyethylene polymers, may have a melt index, I2.16, or I2 as a "shorthand," according to ASTM D-1238 (190°C/2.16 kg), of about ≥ 0.05 g/10 min, about ≥ 0.10 g/10 min, about ≥ 0.15 g/10 min, about ≥ 0.18 g/10 min, about ≥ 0.20 g/10 min, about ≥ 0.22 g/10 min, about ≥ 0.25 g/10 min, about ≥ 0.28 g/10 min, about ≥ 0.30 g/10 min, about ≥ 0.35 g/10 min, about ≥ 0.40 g/10 min, about ≥ 0.50 g/10 min and a melt index (I2.16) about ≤ 10.00 g/10 min, about ≤ 7.00 g/10 min, about ≤ 5.00 g/10 min, about ≤ 3.00 g/10 min, about ≤ 2.00 g/10 min, about ≤ 1.00 g/10 min, about ≤ 0.70 g/10 min, about ≤ 0.50 g/10 min, about ≤ 0.40 g/10 min, or about ≤ 0.30 g/10 min. Ranges expressly disclosed include, but are not limited to, ranges formed by combinations any of the above-enumerated values, e.g., about 0.05 to about 10.00 g/10 min, about 0.10 to about 7.00 g/10 min, about 0.18 to about 0.22 g/10 min, about 0.50 to about 5.00 g/10 min, etc.

Preparation of Blends

[00103] The polyolefin polymers be blended and/or coextruded with any other polymers and/or or materials. Non-limiting examples of other polymers include linear low density polyethylenes, elastomers, plastomers, high pressure low density polyethylene, high density
5 polyethylenes, isotactic polypropylene, ethylene/propylene copolymers, propylene-based polymers and propylene-base elastomers, and the like.

[00104] The polymer blend can be formed using conventional equipment and methods, such as by dry blending the individual components and subsequently melt mixing in a mixer or by mixing the components together directly in a mixer, such as, for example, a Banbury mixer, a
10 Haake mixer, a Brabender internal mixer, or a single or twin-screw extruder, which can include a compounding extruder and a side-arm extruder. In an embodiment, the mixing comprises mixing the polyolefin polymer composition with an extruder and/or mixer.

[00105] In another embodiment, the polymer blend can be produced *in situ* using a multistage polymerization reactor arrangement and process. In a multistage reactor
15 arrangement two or more reactors, the same or different, can be connected in series where a mixture of a first polymer component derived from one catalyst system can be transferred from a first reactor to a second reactor where a second polymer component derived another catalyst system or the same catalyst system of the first reactor but under different polymerization conditions can be produced and blended *in situ* with the first polymer component to produce a
20 polyolefin polymer composition. A multi-stage polymerization reactor and methods for using the same is described, for example, in U.S. Patent No. 5,677,375. Thus, in this embodiment, the mixing comprises mixing the polyolefin polymer composition *in situ* in a reactor, and, optionally, the mixing comprises mixing the polyolefin polymer composition in a series of reactors.

[00106] The polyolefin polymer composition may include at least 0.1 percent by weight (wt%) and up to 99.9 wt% of the first polymer composition and at least 0.1 wt% and up to 99.9 wt% of the second polymer composition, based on the total weight of the polyolefin polymer composition. The amount of the second polymer composition in the polyolefin polymer composition may range from a low of about 5 wt%, about 10 wt%, about 20 wt%, about 30
30 wt%, or about 40 wt% to a high of about 60 wt%, about 70 wt%, about 80 wt%, about 90 wt%, or about 95 wt%, based on the total weight of the polyolefin polymer composition. In a class of embodiments, the amount of the second polymer composition in the polyolefin polymer composition may range from about 15 wt% to about 40 wt%, about 10 wt% to about 35 wt%, or about 20 wt% to about 45 wt%, based on the total weight of the polyolefin polymer

composition. In another class of embodiments, the amount of the second polymer composition in the polyolefin polymer composition may be at least 5 wt%, at least 10 wt%, at least 15 wt%, at least 20 wt%, at least 25 wt%, at least 30 wt%, or at least 35 wt% and less than about 50 wt%, based on the total weight of the polyolefin polymer composition. In an embodiment, the polyolefin polymer composition may include from about 20 wt% to about 35 wt% of the second polymer composition and from about 65 wt% to about 80 wt% of the first polymer composition, based on the total weight of the polyolefin polymer composition.

End-Use Applications

[00107] The polyolefin polymer composition may be used for any number of end-use applications. The polyolefin polymer composition can be used alone or in combination with one or more other polymers or materials, blends of polymers, and the like, to produce a variety of end-use articles. Such end-uses articles include, without limitation, films (e.g., blown and cast, optionally, oriented MD and/or TD), film-based products, film cells, film membranes, wrap films, diaper components, diaper backsheets, housewrap, personal care containers, pouches, stand-up pouches, liners, geo membranes, greenhouse films, bags, packaging, wire and cable coating compositions, articles formed by molding techniques, e.g., injection or blow molding, extrusion coating, foaming, casting, and combinations thereof. Exemplary end uses can include, but are not limited to, films, film-based products, diaper backsheets, housewrap, wire and cable coating compositions, articles formed by molding techniques, e.g., injection or blow molding, extrusion coating, foaming, casting, and combinations thereof. End-use articles can also include products made from films, e.g., bags, packaging, and personal care films, pouches, medical products, such as for example, medical films and intravenous (IV) bags. For end uses that include films, either or both of the surfaces of the films can be modified by known and conventional post-forming techniques such as corona discharge, chemical treatment, flame treatment, metallization, and the like.

[00108] Specific end use films can include, for example, stretch films. Illustrative stretch films or stretch-type films can include, but are not limited to, stretch cling films, stretch handwrap films, and machine stretch films. Other types of films can include, but are not limited to, high stock films, shrink films, shrink wrap films, green house films, laminates, and laminate films. The films can be prepared by any conventional technique known to those skilled in the art, such as for example, techniques utilized to prepare blown, extruded, and/or cast stretch and/or shrink films (including shrink-on-shrink applications). The term "stretch film" refers to films capable of stretching and applying a bundling force and includes films stretched at the time of application as well as "pre-stretched" films, i.e., films which are provided in a pre-

stretched form for use without additional stretching. The films can be monolayer films or multilayer films.

Test Methods

³/₄ NMR

5 [00109] ³/₄ NMR spectroscopic studies were performed using a Bruker 400 or 500 MHz NMR. Data was collected using samples prepared by dissolving 10-20 mg the compound in 1 mL of C₆D₆. Samples were then loaded into 5 mm NMR tubes for data collection. The chemical shifts (δ) presented are relative to the residual protium in the deuterated solvent at 7.15 ppm.

10 Gel Permeation Chromatography with Three Detectors (GPC-3D)

[00110] Mw, Mn, and Mw/Mn are determined by using a High Temperature Gel Permeation Chromatography (Agilent PL-220), equipped with three in-line detectors, a differential refractive index detector (DRI), a light scattering (LS) detector, and a viscometer. Experimental details, including detector calibration, are described in: T. Sun, P. Brant, R. R. Chance, and W. W. Graessley, *Macromolecules*, Volume 34, Number 19, pp. 6812-6820, (2001) and references therein. Three Agilent PLgel IO μ m Mixed-B LS columns are used. The nominal flow rate is 0.5 mL/min, and the nominal injection volume is 300 μ L. The various transfer lines, columns, viscometer and differential refractometer (the DRI detector) are contained in an oven maintained at 145°C. Solvent for the experiment is prepared by dissolving 20 6 grams of butylated hydroxytoluene as an antioxidant in 4 liters of Aldrich reagent grade 1,2,4-trichlorobenzene (TCB). The TCB mixture is then filtered through a 0.1 μ m Teflon filter. The TCB is then degassed with an online degasser before entering the GPC-3D. Polymer solutions are prepared by placing dry polymer in a glass container, adding the desired amount of TCB, then heating the mixture at 160°C with continuous shaking for about 2 hours. All quantities are measured gravimetrically. The TCB densities used to express the polymer concentration 25 in mass/volume units are 1.463 g/ml at room temperature and 1.284 g/ml at 145°C. The injection concentration is from 0.5 to 2.0 mg/ml, with lower concentrations being used for higher molecular weight samples. Prior to running each sample the DRI detector and the viscometer are purged. Flow rate in the apparatus is then increased to 0.5 ml/minute, and the 30 DRI is allowed to stabilize for 8 hours before injecting the first sample. The LS laser is turned on at least 1 to 1.5 hours before running the samples. The concentration, *c*, at each point in the chromatogram is calculated from the baseline-subtracted DRI signal, *I*_{DRI}, using the following equation:

$$c = K_{DRI} I_{DRI} / (dn/dc),$$

where K_{DRI} is a constant determined by calibrating the DRI, and (dn/dc) is the refractive index increment for the system. The refractive index, $n = 1.500$ for TCB at 145°C and $\lambda = 690$ nm. Units on parameters throughout this description of the GPC-3D method are such that concentration is expressed in g/cm^3 , molecular weight is expressed in g/mole , and intrinsic viscosity is expressed in dL/g .

[00111] The LS detector is a Wyatt Technology High Temperature DAWN HELEOS. The molecular weight, M , at each point in the chromatogram is determined by analyzing the LS output using the Zimm model for static light scattering (M.B. Huglin, **LIGHT SCATTERING FROM POLYMER SOLUTIONS**, Academic Press, 1971):

$$\frac{K_o c}{\Delta R(\theta)} = \frac{1}{MP(\theta)} + 2A_2 c,$$

[00112] Here, $AR(Q)$ is the measured excess Rayleigh scattering intensity at scattering angle θ , c is the polymer concentration determined from the DRI analysis, A_2 is the second virial coefficient. $P(\theta)$ is the form factor for a monodisperse random coil, and K_o is the optical constant for the system:

$$K_o = \frac{4\pi V (dn/dc)^2}{\lambda^4 N_A},$$

where N_A is Avogadro's number, and (dn/dc) is the refractive index increment for the system, which take the same value as the one obtained from DRI method. The refractive index, $n = 1.500$ for TCB at 145°C and $\lambda = 690$ nm.

[00113] A high temperature Viscotek Corporation viscometer, which has four capillaries arranged in a Wheatstone bridge configuration with two pressure transducers, is used to determine specific viscosity. One transducer measures the total pressure drop across the detector, and the other, positioned between the two sides of the bridge, measures a differential pressure. The specific viscosity, η_s , for the solution flowing through the viscometer is calculated from their outputs. The intrinsic viscosity, $[\eta]$, at each point in the chromatogram is calculated from the following equation:

$$\eta_s = c[r,] + 0.3(c[r,])^2,$$

where c is concentration and was determined from the DRI output.

[00114] Experimental and analysis details not described above, including how the detectors are calibrated and how to calculate the composition dependence of Mark-Houwink parameters

and the second-virial coefficient, are described by T. Sun, P. Brant, R. R. Chance, and W. W. Graessley (*Macromolecules*, 2001 volume 34(19), pages 6812-6820).

[00115] All molecular weights are weight average unless otherwise noted. All molecular weights are reported in g/mol unless otherwise noted.

5 [00116] Comonomer content such as hexene wt% is obtained by ^{13}C NMR.

[00117] Melt Index (MI, also referred to as I₂) is measured according to ASTM D1238 at 190°C, under a load of 2.16 kg unless otherwise noted. The units for MI are g/10 min or dg/min.

10 [00118] High Load Melt Index (HLMI, also referred to as I₂₁) is the melt flow rate measured according to ASTM D-1238 at 190°C, under a load of 21.6 kg. The units for HLMI are g/10 min or dg/min.


[00119] Melt Index Ratio (MIR) is the ratio of the high load melt index to the melt index or I₂₁/I₂.

EXAMPLES

15 [00120] It is to be understood that while the invention has been described in conjunction with the specific embodiments thereof, the foregoing description is intended to illustrate and not limit the scope of the invention. Other aspects, advantages and modifications will be apparent to those skilled in the art to which the invention pertains.

20 [00121] Therefore, the following examples are put forth so as to provide those skilled in the art with a complete disclosure and description and are not intended to limit the scope of that which the inventors regard as their invention.

[00122] A first polyolefin composition was polymerized using a dual catalyst system including a metallocene catalyst and a biphenyl phenol catalyst co-supported on silica and activated with MAO in accordance with the methods and equipment used to prepare the
25 inventive examples disclosed in U.S. Patent No. 8,586,497. A second polyolefin composition was also polymerized using a catalyst system using a single metallocene catalyst supported on silica and activated with MAO using the same methods and equipment used for the production of the first polyolefin composition. Specific process details and properties may be found in Table 1. The metallocene catalyst was bis(n-propyl cyclopentadienyl) hafnium dichloride
30 (Catalyst A) (VP). The biphenyl phenol catalyst was of the following structure:



(Catalyst B) (UNIV08).

Table 1

Run Part No.	1	3	13	5
Part Description	VP-100 Control	VP-100+2.5m% UNIV08	VP-100+3.5m% UNIV08	VP-100+5m% UNIV08
Catalyst Cylinder or Batch ID	2652-M	1760-50	1760-52	1760-48
REACTION CONDITIONS				
Prod Rate (lbs/hr)	39.93	42.70	47.29	46.53
STY (lb/hr/ft ³)	5.6447	6.3727	6.9681	6.7923
Residence Time (hrs)	2.80	2.65	2.36	2.51
C2 Partial Pressure (psia)	219.96	220.03	212.45	219.97
H2/C2 Conc Ratio (ppm/m%)	4.79	6.43	6.57	9.34
C6/C2 Conc Ratio (m/m)	0.0160	0.0132	0.0127	0.0117
Isopentane (mole%)	3.37	2.90	2.77	2.88
Rxn Temperature (°)	79.00	79.00	79.01	79.00
Fluid Bulk Density (lb/ft ³)	15.87	17.01	16.08	17.14
Continuity Additive Conc (ppmw prod)	29.1	26.4	20.6	28.7
PRODUCT PROPERTIES				
Melt Index (dg/min)	0.936	1.031	0.907	0.882
MI-5 (dg/min)	2.780	3.522	3.226	3.644
High Load Melt Index (dg/min)	27.467	37.572	35.516	48.493
MFR (HLMI/MI)	29.4	36.4	39.2	55.0
MFR I21/I5	9.9	10.7	11.0	13.3
Density (g/cc)	0.9186	0.9181	0.9185	0.9179
Screen APS (in)	0.272	0.0307	0.0297	0.0329
Screen +No 10 (wt%)	0.28	0.89	0.56	0.28
Screen Fines L T No 120 (wt%)	0.11	0.25	0.19	0.27
CATALYST PRODUCTIVITY				
Cat Prod (matl Bal)	10008	10497	11019	18390
Cat Prod (Al XRF)	5448	10404	7815	10666
Cat Prod (Hf XRF)	11184	19378	22828	60000

[00123] In a first study, polyethylene compositions were made from the first polyolefin composition (Catalyst A + 5 mol% Catalyst B) (BCT145629) and the second polyolefin composition (Catalyst A) (BCT146530) using extruder mixing. Polyethylene compositions were produced in the following ratios with Irganox™ 1076 antioxidant and Irgafos™ 168 antioxidant (both from BASF Corp., Florham Park, New Jersey): 100/0, 75/25, 50/50, 25/75, and 0/100 of the first polyethylene composition and the second polyethylene composition as shown in Table 2. A miniature twin screw extruder (fully configurable 40 L/D co-rotating screws) utilizing the Thermo Scientific Process 11 was employed. In particular, a multiple-pass (e.g., two passes) extrusion process using a "restrictive" screw configuration was employed. The extruder temperature was set as follows: 170°C/175°C/180°C/185°C/185°C/190°C/193°C /198°C, at 200 rpm with a 15% feed rate. 140 g batch was prepared, extruded, and pelletized, in the first pass. In the second pass, about half of the pellets were re-extruded, passing about 70 g for each of the two passes. The polyethylene compositions and their properties are shown below in Table 2. As can be seen in Table 2 and Figure 1, the polyethylene compositions made from the first polyolefin composition and the second polyolefin composition have higher melt strengths than either of its individual components.

Table 2
First Pass

Description	100% BCTI145629 (VP+5%UNIV08)	1st Pass	75% BCTI145629 25% BCTI146530	50% BCTI145629 50% BCTI146530	25% BCTI145629 75% BCTI146530	100% BCTI146530 (VP/G5 Control)
Description	100% BCTI145629 (VP+5%UNIV08)	1st Pass	75% BCTI145629 25% BCTI146530	50% BCTI145629 50% BCTI146530	25% BCTI145629 75% BCTI146530	100% BCTI146530 (VP/G5 Control)
Description	UT00454-091-010	UT00454-091-020	UT00454-091-030	UT00454-091-040	UT00454-091-050	UT00454-091-050
Description	100% BCTI145629 (VP+5%UNIV08)	75% BCTI145629 25% BCTI146530	50% BCTI145629 50% BCTI146530	25% BCTI145629 75% BCTI146530	100% BCTI146530 (VP/G5 Control)	100% BCTI146530 (VP/G5 Control)
S131121: Small NGMCN/UHMW Blends	BCT-158562	BCT-158563	BCT-158564	BCT-158565	BCT-158566	BCT-158566
MKD - #	340114-A1	340114-A2	340114-A3	340114-A4	340114-A5	340114-A5
CTL- NB#	UT00454-091-010	UT00454-091-020	UT00454-091-030	UT00454-091-040	UT00454-091-050	UT00454-091-050
TSP - FP#	782241	782242	782243	782244	782245	782245
BCT-145629	(g)	70	52.5	35	17.5	0
BCT-146530	(g)	0	17.5	35	52.5	70
Irganox 1076	(g)	0.021	0.021	0.021	0.021	0.021
Irgafos 168	(g)	0.098	0.098	0.098	0.098	0.098
wt% of (VP+5% UNIV08) added to VP/G5-Control	(%)	1	0.75	0.5	0.25	0
Extrusion Pass		1	1	1	1	1
DSR @ 190°C		BCT-158562	BCT-158563	BCT-158564	BCT-158565	BCT-158566
A1 (Pa.s)	(Pa.s)	123534.8848	47392.03694	21217.15473	13730.29276	9539.676846
A2 (sec)	(sec)	147.6034182	18.38079322	1.995412672	0.493729714	0.140633278
A3		0.483663234	0.468088887	0.501268619	0.53332806	0.600350987
a		0.734356729	0.766935029	0.742482876	0.7483409	0.726480253
EXI		0.76393591	0.707171744	0.692230203	0.655863685	0.626946108
G'/G" @ 0.1 sec-1		0.941885807	0.683855624	0.467073869	0.281127468	0.101942742

Table 2
First Pass (continued)

Description	100% BCTI45629 (VP+5%UNIV08)	75% BCTI45629 25% BCTI46530	50% BCTI45629 50% BCTI46530	25% BCTI45629 75% BCTI46530	100% BCTI46530 (VP/G5 Control)
Description	100% BCTI45629 (VP+5%UNIV08)	75% BCTI45629 25% BCTI46530	50% BCTI45629 50% BCTI46530	25% BCTI45629 75% BCTI46530	100% BCTI46530 (VP/G5 Control)
Description	UT00454-091-010 100% BCTI45629 (VP+5%UNIV08)	UT00454-091-020 75% BCTI45629 25% BCTI46530	UT00454-091-030 50% BCTI45629 50% BCTI46530	UT00454-091-040 25% BCTI45629 75% BCTI46530	UT00454-091-050 100% BCTI46530 (VP/G5 Control)
S131121: Small NGMCN/UHMW Blends	BCT-158562	BCT-158563	BCT-158564	BCT-158565	BCT-158566
MKD - #	340114-A1	340114-A2	340114-A3	340114-A4	340114-A5
CTL- NB#	UT00454-091-010	UT00454-091-020	UT00454-091-030	UT00454-091-040	UT00454-091-050
Density					
I-2 CLB/DSR	(dg/min)	0.882135832	0.847613792	0.872728995	0.866223992
I-5 CLB/DSR	(dg/min)	3.70268981	3.18322851	3.065715775	2.770245572
I-10 CLB/DSR	(dg/min)	12.33145614	9.879068409	9.417919079	8.125234715
I-21 CLB/DSR	(dg/min)	47.41757375	35.683351	35.04174067	30.17833241
I-10/I-2 from CLB/DSR		13.97908994	11.65515297	10.79134431	9.380061959
I-21/I-2 from CLB/DSR		53.75314326	42.09859646	40.15191526	34.83894777
I-21/I-5 from CLB/DSR		12.80625064	11.20979876	11.43019876	10.89373907
Cal. ETA (PaS) @ Shear Rate of	100				
Rheotens @ Freeport		782241	782242	782243	782244
Melt Strng.	(cN)	11.9	12.3	11.8	9.8
Draw Ratio @ Osc	(V/Vo)				
Draw Ratio @ Brk	(V/Vo)	11.7	11.4	12.4	13.4
nMS	(cN)				
					31.08422158
					10.6719562
					782245
					4.6
					11.8
					19.4

Table 2
First Pass (continued)

Description	100% BCTI45629 (VP+5%UNIV08)	75% BCTI45629 25% BCTI46530	50% BCTI45629 50% BCTI46530	25% BCTI45629 75% BCTI46530	100% BCTI46530 (VP/G5 Control)
Description	1st Pass 100% BCTI45629 (VP+5%UNIV08)	1st Pass 75% BCTI45629 25% BCTI46530	1st Pass 50% BCTI45629 50% BCTI46530	1st Pass 25% BCTI45629 75% BCTI46530	1st Pass 100% BCTI46530 (VP/G5 Control)
Description	UT00454-091-010 100% BCTI45629 (VP+5%UNIV08)	UT00454-091-020 75% BCTI45629 25% BCTI46530	UT00454-091-030 50% BCTI45629 50% BCTI46530	UT00454-091-040 25% BCTI45629 75% BCTI46530	UT00454-091-050 100% BCTI46530 (VP/G5 Control)
S131121: Small NGMCN/UHMW Blends	BCT-158562	BCT-158563	BCT-158564	BCT-158565	BCT-158566
MKD - #	340114-A1	340114-A2	340114-A3	340114-A4	340114-A5
CTL- NB#	UT00454-091-010	UT00454-091-020	UT00454-091-030	UT00454-091-040	UT00454-091-050
H-NMR	hctf201312020921	hctf201312020922	hctf201312020923	hctf201312020924	hctf201312020925
C13-NMR					
SCB (/1000 C)	16.7	16.2	15.7	15.1	14.6
wt% C4					
wt% C6	10.02	9.72	9.42	9.06	8.76
mole% C4					
mole% C6	3.579082726	3.464499572	3.350405463	3.214133674	3.101104503
Vinylene/1000 C	0.02	0.04	0.03	0.04	0.02
TSO/1000 C	0.01	0.06	0.04	0.07	0.03
Vinyl/1000 C	0	0.01	0.01	0.01	0
Vinylidene/1000 C	0.01	0.01	0.01	0.01	0
Total Unsaturation/1000 C	0.04	0.12	0.09	0.13	0.05
GPC-3D	hac825	hac826	hac827	hac828	hac829

Table 2
First Pass (continued)

Description	100% BCTI45629 (VP+5%UNIV08)	75% BCTI45629 25% BCTI46530	50% BCTI45629 50% BCTI46530	25% BCTI45629 75% BCTI46530	100% BCTI46530 (VP/G5 Control)
Description	1st Pass 100% BCTI45629 (VP+5%UNIV08)	1st Pass 75% BCTI45629 25% BCTI46530	1st Pass 50% BCTI45629 50% BCTI46530	1st Pass 25% BCTI45629 75% BCTI46530	1st Pass 100% BCTI46530 (VP/G5 Control)
Description	UT00454-091-010 100% BCTI45629 (VP+5%UNIV08)	UT00454-091-020 75% BCTI45629 25% BCTI46530	UT00454-091-030 50% BCTI45629 50% BCTI46530	UT00454-091-040 25% BCTI45629 75% BCTI46530	UT00454-091-050 100% BCTI46530 (VP/G5 Control)
S131121: Small NGMCN/UHMW Blends	BCT-158562	BCT-158563	BCT-158564	BCT-158565	BCT-158566
MKD - #	340114-A1	340114-A2	340114-A3	340114-A4	340114-A5
CTL- NB#	UT00454-091-010	UT00454-091-020	UT00454-091-030	UT00454-091-040	UT00454-091-050
DRI Detector					
Mn	27734	27180	28923	33429	37282
Mw	166343	153721	147554	136696	128601
Mz	805450	652030	553372	440526	326282
Mw/Mn	5.997800534	5.6556665931	5.101614632	4.089144156	3.449412585
Mz/Mw	4.842103365	4.241645579	3.750301585	3.222669281	2.537165341
Recovery (%)	0.931	0.929	0.929	0.945	0.937
g' (Vis. Ave.)	0.875	0.894	0.919	0.956	0.983
[η] Intr Vis (dl/g)	1.693	1.682	1.665	1.655	1.649

Table 2
Second Pass

Description	100% BCTI45629 (VP+5%UNIV08)	75% BCTI45629 25% BCTI46530	50% BCTI45629 50% BCTI46530	25% BCTI45629 75% BCTI46530	100% BCTI46530 (VP/G5 Control)
Description	2nd Pass 100% BCTI45629 (VP+5%UNIV08)	2nd Pass 75% BCTI45629 25% BCTI46530	2nd Pass 50% BCTI45629 50% BCTI46530	2nd Pass 25% BCTI45629 75% BCTI46530	2nd Pass 100% BCTI46530 (VP/G5 Control)
Description	UT00454-091-010 100% BCTI45629 (VP+5%UNIV08)	UT00454-091-070 75% BCTI45629 25% BCTI46530	UT00454-091-080 50% BCTI45629 50% BCTI46530	UT00454-091-090 25% BCTI45629 75% BCTI46530	UT00454-091-050 100% BCTI46530 (VP/G5 Control)
S131121: Small NGMCN/UHMW Blends	BCT-158567	BCT-158568	BCT-158569	BCT-158570	BCT-158571
MKD - #	340114-A6	340114-B1	340114-B2	340114-B3	340114-B4
CTL- NB#	UT00454-091-060	UT00454-091-070	UT00454-091-080	UT00454-091-090	UT00454-091-100
TSP - FP#	782246	782247	782248	782249	782250
BCT-145629	(g) 70	(g) 52.5	(g) 35	(g) 17.5	(g) 0
BCT-146530	(g) 0	(g) 17.5	(g) 35	(g) 52.5	(g) 70
Irganox 1076	(g) 0.021	(g) 0.021	(g) 0.021	(g) 0.021	(g) 0.021
Irgafos 168	(g) 0.098	(g) 0.098	(g) 0.098	(g) 0.098	(g) 0.098
wt% of (VP+5% UNIV08) added to VP/G5-Control	(%) 1	(%) 0.75	(%) 0.5	(%) 0.25	(%) 0
Extrusion Pass	2	2	2	2	2
DSR @ 190°C	BCT-158567	BCT-158568	BCT-158569	BCT-158570	BCT-158571
A1 (Pa.s)	177201.9136	41288.5379	20007.04554	13916.31142	9614.495433
A2 (sec)	456.1619921	13.75342819	1.901570524		0.142189304
A3	0.468662836	0.472403714	0.497783648	0.532020085	0.593781913
a	0.660069679	0.723416531	0.701133422	0.763547484	0.729634691
EXI	0.746502334	0.709616176	0.686729759	0.652192258	0.619680705

Table 2
Second Pass (continued)

Description	100% BCTI45629 (VP+5%UNIV08)	75% BCTI45629 25% BCTI46530	50% BCTI45629 50% BCTI46530	25% BCTI45629 75% BCTI46530	100% BCTI46530 (VP/G5 Control)
Description	2nd Pass 100% BCTI45629 (VP+5%UNIV08)	75% BCTI45629 25% BCTI46530	50% BCTI45629 50% BCTI46530	25% BCTI45629 75% BCTI46530	2nd Pass 100% BCTI46530 (VP/G5 Control)
Description	UT00454-091-010 100% BCTI45629 (VP+5%UNIV08)	UT00454-091-070 75% BCTI45629 25% BCTI46530	UT00454-091-080 50% BCTI45629 50% BCTI46530	UT00454-091-090 25% BCTI45629 75% BCTI46530	UT00454-091-050 100% BCTI46530 (VP/G5 Control)
S131121: Small NGMCN/UHMW Blends	BCT-158567	BCT-158568	BCT-158569	BCT-158570	BCT-158571
MKD - #	340114-A6	340114-B1	340114-B2	340114-B3	340114-B4
CTL- NB#	UT00454-091-060	UT00454-091-070	UT00454-091-080	UT00454-091-090	UT00454-091-100
TSP - FP#	782246	782247	782248	782249	782250
G'/G" @ 0.1 sec-1	0.899838867	0.652509199	0.44910322	0.27559268	0.106510167
Density					
I-2 CLB/DSR	(dg/min) 0.972034194	0.893904211	0.919450795	0.850494536	0.886147903
I-5 CLB/DSR	(dg/min) 3.987176121	3.357709118	3.208491179	2.707820631	2.571227083
I-10 CLB/DSR	(dg/min) 12.92709362	10.46375403	9.781860288	7.903002298	7.119229322
I-21 CLB/DSR	(dg/min) 48.04023486	38.07735799	36.04124448	29.17367128	26.68545326
I-10/I-2 from CLB/DSR	13.29901119	11.70567708	10.6388078	9.292243465	8.033906411
I-21/I-2 from CLB/DSR	49.42237131	42.59668712	39.19866587	34.30200905	30.11399469
I-21/I-5 from CLB/DSR	12.04868644	11.34027894	11.23308199	10.77385664	10.37848949
Cal. ETA (PaS) @ Shear Rate of	100				
Rheotens @ Freeport	782246	782247	782248	782249	782250
TSP - FP#	782246	782247	782248	782249	782250

Table 2
Second Pass (continued)

Description	100% BCTI45629 (VP+5%UNIV08)	75% BCTI45629 25% BCTI46530	50% BCTI45629 50% BCTI46530	25% BCTI45629 75% BCTI46530	100% BCTI46530 (VP/G5 Control)
Description	2nd Pass 100% BCTI45629 (VP+5%UNIV08)	2nd Pass 75% BCTI45629 25% BCTI46530	2nd Pass 50% BCTI45629 50% BCTI46530	2nd Pass 25% BCTI45629 75% BCTI46530	2nd Pass 100% BCTI46530 (VP/G5 Control)
Description	UT00454-091-010 100% BCTI45629 (VP+5%UNIV08)	UT00454-091-070 75% BCTI45629 25% BCTI46530	UT00454-091-080 50% BCTI45629 50% BCTI46530	UT00454-091-090 25% BCTI45629 75% BCTI46530	UT00454-091-050 100% BCTI46530 (VP/G5 Control)
S131121: Small NGMCN/UHMW Blends	BCT-158567	BCT-158568	BCT-158569	BCT-158570	BCT-158571
MKD - #	340114-A6	340114-B1	340114-B2	340114-B3	340114-B4
CTL- NB#	UT00454-091-060	UT00454-091-070	UT00454-091-080	UT00454-091-090	UT00454-091-100
Melt Strng.	10.8	11.4	10.2	9.4	4.9
Draw Ratio @ Osc (V/Vo)					15.6
Draw Ratio @ Brk (V/Vo)	11.1	11.5	12.5	13.6	20.6
nMS					
H-NMR	hct1201312020926	hct1201312020927	hct1201312020928	hct1201312020929	hct1201312020910
C13-NMR					
SCB (/1000 C)	16.9	16.3	15.6	15.1	14.5
wt% C4					
wt% C6	10.14	9.78	9.36	9.06	8.7
mole% C4					
mole% C6	3.625053625	3.487376979	3.327645051	3.214133674	3.078556263
Vinylene/1000 C	0.02	0.03	0.01	0.04	0.05
TSO/1000 C	0.02	0.05	0.02	0.05	0.07
Vinyl/1000 C	0.01	0.01	0.01	0	0
Vinylidene/1000 C	0	0.01	0.01	0	0

Table 2
Second Pass (continued)

Description	100% BCTI45629 (VP+5%UNIV08)	75% BCTI45629 25% BCTI46530	50% BCTI45629 50% BCTI46530	25% BCTI45629 75% BCTI46530	100% BCTI46530 (VP/G5 Control)
Description	2nd Pass 100% BCTI45629 (VP+5%UNIV08)	2nd Pass 75% BCTI45629 25% BCTI46530	2nd Pass 50% BCTI45629 50% BCTI46530	2nd Pass 25% BCTI45629 75% BCTI46530	2nd Pass 100% BCTI46530 (VP/G5 Control)
Description	UT00454-091-010 100% BCTI45629 (VP+5%UNIV08)	UT00454-091-070 75% BCTI45629 25% BCTI46530	UT00454-091-080 50% BCTI45629 50% BCTI46530	UT00454-091-090 25% BCTI45629 75% BCTI46530	UT00454-091-050 100% BCTI46530 (VP/G5 Control)
S131121: Small NGMCN/UHMW Blends	BCT-158567	BCT-158568	BCT-158569	BCT-158570	BCT-158571
MKD - #	340114-A6	340114-B1	340114-B2	340114-B3	340114-B4
CTL- NB#	UT00454-091-060	UT00454-091-070	UT00454-091-080	UT00454-091-090	UT00454-091-100
TSP - FP#	782246	782247	782248	782249	782250
Total Unsaturation/1000 C	0.05	0.1	0.05	0.09	0.12
GPC-3D	hac830	hac831	hac832	hac833	hac834
DRI Detector					
Mn	25622	29725	27233	32389	34422
Mw	154614	156890	141518	138869	128734
Mz	670010	704301	518511	446932	339146
Mw/Mn	6.034423542	5.27804878	5.196562993	4.287535892	3.739875661
Mz/Mw	4.333436817	4.489138887	3.663922611	3.218371271	2.63447108
Recovery (%)	0.955	0.927	0.942	0.97	0.993
g' (Vis. Ave.)	0.875	0.908	0.929	0.936	0.974
[η] Intr Vis (dl/g)	1.67	1.717	1.657	1.632	1.611

[00124] In a second study, polyethylene compositions were made from the first polyolefin composition (Catalyst A + 5 mol% Catalyst B) (BCT145629) and the second polyolefin composition (Catalyst A) (BCT146530) using extruder mixing. Polyethylene compositions were produced in the following ratios with Irganox™ 1076 antioxidant and Irgafos™ 168 antioxidant (both from BASF Corp., Florham Park, New Jersey): 100/0, 75/25, 50/50, 25/75, and 0/100 of the first polyethylene composition and the second polyethylene composition as shown in Table 3. A miniature twin screw extruder (fully configurable 40 L/D co-rotating screws) utilizing the Thermo Scientific Process 11 was employed. In particular, a multiple-pass (e.g., two passes) extrusion process using a "standard" screw configuration was employed.

10 The extruder temperature was set as follows: 170°C/175°C/180°C/185°C/185°C/190°C/195°C/ 200°C, at 200 rpm with a 25% feed rate. 200 g batch was prepared, extruded, and pelletized, in the first pass. In the second pass, about half of the pellets were re-extruded, passing about 100 g for each of the two passes. The polyethylene compositions and their properties are shown below in Table 3. As can be seen in

15 Table 3 and Figure 2, the polyethylene compositions made from the first polyolefin composition and the second polyolefin composition have higher melt strengths than either of its individual components in both passes.

Table 3
First Pass

Description	1st Pass 100% BCT145629 (VP+5%UNIV08)	1st Pass 75% BCT145629 25% BCT146530	1st Pass 50% BCT145629 50% BCT146530	1st Pass 25% BCT145629 75% BCT146530	1st Pass 100% BCT146530 (VP/G5 Control)
BCT #	BCT-163102	BCT-163103	BCT-163104	BCT-163105	BCT-163106
CTL NB#	UT00454-101-010	UT00454-101-020	UT00454-101-030	UT00454-101-040	UT00454-101-050
MKD'S NB#	00466-04-01	00466-05-01	00466-05-03	00466-05-05	00466-04-03
wt% of (VP+5% UNIV08) added to VP/G5-Control	1	0.75	0.5	0.25	0
BCT-145629	100	75	50	25	0
BCT-146530	0	25	50	75	100
Irganox 1076	0.03	0.03	0.03	0.03	0.03
Irgafos 168	0.14	0.14	0.14	0.14	0.14
Compounding	Thermal Scientific Process 11 Standard Screw	Thermal Scientific Process 11 Standard Screw	Thermal Scientific Process 11 Standard Screw	Thermal Scientific Process 11 Standard Screw	Thermal Scientific Process 11 Standard Screw
Extruder Passes	1	1	1	1	1
Torque (%)	57-58	60-62	59-60	55-56	54-55
Melt Temp. (°C)	204	202	203	203	202
Melt Press. (bar)	17-23	30-34	26-30	26-30	22-26
Resin Testing					
Density (g/cm ³)	0.91849734	0.918789894	0.919095745	0.919335106	0.919933511
I2-ASTM (dg/min)	0.3112	0.3504	0.4418	0.5836	0.8276
I21-ASTM (dg/min)	27.597	23.482	21.297	22.079	26.342
MFR-ASTM (I21/I2)	88.67930591	67.01484018	48.20507017	37.83241947	31.82938618
SAOS	DFS @ 190 C				
A1 (Pa.s)	91396526.48	487530.838	68720.53964	22209.11435	10394.25246
A2 (sec)	64399353.51	4479.641881	62.77114357	2.463867699	0.168644405
A3	0.496558469	0.448748073	0.432549821	0.464308026	0.585510641

Table 3
First Pass (continued)

Description	1st Pass 100% BCT145629 (VP+5%UNIV08)	1st Pass 75% BCT145629 25% BCT146530	1st Pass 50% BCT145629 50% BCT146530	1st Pass 25% BCT145629 75% BCT146530	1st Pass 100% BCT146530 (VP/G5 Control)
BCT #	BCT-163102	BCT-163103	BCT-163104	BCT-163105	BCT-163106
CTL NB#	UT00454-101-010	UT00454-101-020	UT00454-101-030	UT00454-101-040	UT00454-101-050
MKD'S NB#	00466-04-01	00466-05-01	00466-05-03	00466-05-05	00466-04-03
wt% of (VP+5%UNIV08) added to VP/G5-Control	1	0.75	0.5	0.25	0
a (shifting)	0.945358473	0.867624534	0.802138659	0.770934517	0.764307373
EXI	0.802410669	0.72010948	0.665133383	0.637193996	0.623893315
(G'/G'') ^{0.1s-1}					
I-2 (CLB/DSR)	0.701153529	0.757768012	0.813596291	0.843234788	0.849501938
I-5 (CLB/DSR)	3.198390554	2.99549463	2.916715796	2.786568771	2.492038202
I-10 (CLB/DSR)	11.20229769	9.362457875	8.567073568	7.97185134	6.951668183
I-21 (CLB/DSR)	45.09286484	33.29274265	28.79953998	27.01367974	26.03722894
I21/I2 (CLB/DSR)	64.31239808	43.93527057	35.39782603	32.03577476	30.64999358
I21/I5 (CLB/DSR)	14.09861119	11.11427219	9.873961671	9.694244771	10.44816605
I10/I2 (CLB/DSR)	15.97695402	12.35530891	10.52988277	9.453892857	8.183228163
H-NMR	hctf20140301661	hctf20140301662	hctf20140301663	hctf20140301664	hctf20140301665
SCB (/1000 C)	16.8	16.5	15.7	15.4	14.7
wt% C4					
wt% C6	10.08	9.9	9.42	9.24	8.82
mole% C4					
mole% C6	3.602058319	3.533190578	3.350405463	3.282182438	3.123671908
Rheotens (@ Freeport	792526	792527	792528	792529	792530
Melt Strng. (cN)	13.6	14	13.2	11.4	5.1
Draw Ratio (@ Osc (V/Vo)					

Table 3
First Pass (continued)

Description	1st Pass 100% BCT145629 (VP+5%UNIV08)	1st Pass 75% BCT145629 25% BCT146530	1st Pass 50% BCT145629 50% BCT146530	1st Pass 25% BCT145629 75% BCT146530	1st Pass 100% BCT146530 (VP/G5 Control)
BCT #	BCT-163102	BCT-163103	BCT-163104	BCT-163105	BCT-163106
CTL NB#	UT00454-101-010	UT00454-101-020	UT00454-101-030	UT00454-101-040	UT00454-101-050
MKD'S NB#	00466-04-01	00466-05-01	00466-05-03	00466-05-05	00466-04-03
wt% of (VP+5%UNIV08) added to VP/G5-Control	1	0.75	0.5	0.25	0
Draw Ratio @ Brk (V/Vo)	9.7	11.7	11.6	12.2	21.4
mMS (cN)					
GPC-3D	had077	had078	had079	had080	had081
DRI Detector					
Mn	27719	26889	30299	30807	37624
Mw	167327	169311	146480	142477	139248
Mz	745678	817291	515715	469245	403733
Mw/Mn	6.03654533	6.296664063	4.834482986	4.624825527	3.701041888
Mz/Mw	4.456411697	4.827158306	3.520719552	3.293478947	2.899380961
Recovery (%)	0.922	0.996	0.93	0.965	0.942
g' (Vis. Avc.)	0.873	0.9	0.928	0.948	0.985
[η] Intr Vis (dl/g)	1.748	1.714	1.689	1.648	1.685

Table 3
Second Pass

Description	2nd Pass 100% BCT145629 (VP+5%/UNIV08)	2nd Pass 75% BCT145629 25% BCT146530	2nd Pass 50% BCT145629 50% BCT146530	2nd Pass BCT-163108	2nd Pass BCT-163110	2nd Pass BCT-163111
BCT #	BCT-163107	BCT-163108	BCT-163109	BCT-163110	BCT-163111	BCT-163111
CTL NB#	UT00454-101-060	UT00454-101-070	UT00454-101-080	UT00454-101-090	UT00454-101-100	UT00454-101-100
MKD'S NB#	00466-04-02	00466-05-02	00466-05-04	00466-05-06	00466-04-04	00466-04-04
wt% of (VP+5% UNIV08) added to VP/G5-Control	1	0.75	0.5	0.25	0	0
BCT-145629	100	75	50	25	0	0
BCT-146530	0	25	50	75	100	100
Irganox 1076	0.03	0.03	0.03	0.03	0.03	0.03
Irgafos 168	0.14	0.14	0.14	0.14	0.14	0.14
Compounding	Thermal Scientific Process 11 Standard Screw					
Extruder Passes	2	2	2	2	2	2
Torque (%)	57-58	60-61	53-58	54-56	55-56	55-56
Melt Temp. (°C)	204	203	203	203	203	203
Melt Press. (bar)	17-23	26-28	24-29	26-28	22-26	22-26
Resin Testing						
Density (g/cm ³)	0.918430851	0.918922872	0.91900266	0.919574468	0.919734043	0.919734043
I2-ASTM (dg/min)	0.3549	0.375	0.4537	0.5858	0.8398	0.8398
I21-ASTM (dg/min)	30.275	23.509	21.394	22.388	26.38	26.38
MFR-ASTM (121/12)	85.30571992	62.69066667	47.15450738	38.21782178	31.41224101	31.41224101
SAOS	DFS @ 190 C					

Table 3
Second Pass (continued)

Description	2nd Pass 100% BCT145629 (VP+5%/UNIV08)	2nd Pass 75% BCT145629 25% BCT146530	2nd Pass 50% BCT145629 50% BCT146530	2nd Pass 25% BCT145629 75% BCT146530	2nd Pass 100% BCT146530 (VP/G5 Control)
BCT #	BCT-163107	BCT-163108	BCT-163109	BCT-163110	BCT-163111
CTL NB#	UT00454-101-060	UT00454-101-070	UT00454-101-080	UT00454-101-090	UT00454-101-100
MKD'S NB#	00466-04-02	00466-05-02	00466-05-04	00466-05-06	00466-04-04
wt% of (VP+5% UNIV08) added to VP/G5-Control	1	0.75	0.5	0.25	0
A1 (Pa.s)	90418846.75	378990.059	70915.67066	24470.41104	10887.00011
A2 (sec)	65007560.94	2530.06323	65.67276854	3.081086578	0.188094358
A3	0.49599459	0.448395752	0.433289576	0.459422481	0.577491225
a (shifting)	0.936494337	0.872941928	0.815687564	0.805811685	0.782643318
EXI	0.801499409	0.718038884	0.666818497	0.636363251	0.623247359
(G'/G'') ^{0.1s-1}					
I-2 (CLB/DSR)	0.707189202	0.753551628	0.801290415	0.809956183	0.831378896
I-5 (CLB/DSR)	3.220449044	2.96611962	2.879849019	2.684872855	2.451356897
I-10 (CLB/DSR)	11.26374611	9.249586776	8.4750607	7.670998115	6.842292465
I-21 (CLB/DSR)	45.2696355	32.83294985	28.54662081	25.85576777	25.40226263
I21/I2 (CLB/DSR)	64.01347101	43.5709361	35.6258109	31.92242781	30.55437511
I21/I5 (CLB/DSR)	14.05693271	11.06932762	9.912540767	9.630164692	10.36253133
I10/I2 (CLB/DSR)	15.92748599	12.27465568	10.57676535	9.470880374	8.23005311
H-NMR	hctf20140301666	hctf20140301667	hctf20140301668	hctf20140301669	hctf201403016610
SCB (/1000 C)	16.8	16.3	15.7	15	14.6
wt% C4					
wt% C6	10.08	9.78	9.42	9	8.76
mole% C4					

Table 3
Second Pass (continued)

Description	2nd Pass 100% BCT145629 (VP+5%/UNIV08)	2nd Pass 75% BCT145629 25% BCT146530	2nd Pass 50% BCT145629 50% BCT146530	2nd Pass 25% BCT145629 75% BCT146530	2nd Pass 100% BCT146530 (VP/G5 Control)
BCT #	BCT-163107	BCT-163108	BCT-163109	BCT-163110	BCT-163111
CTL NB#	UT00454-101-060	UT00454-101-070	UT00454-101-080	UT00454-101-090	UT00454-101-100
MKD'S NB#	00466-04-02	00466-05-02	00466-05-04	00466-05-06	00466-04-04
wt% of (VP+5% UNIV08) added to VP/G5-Control	1	0.75	0.5	0.25	0
mole% C6	3.602058319	3.487376979	3.350405463	3.191489362	3.101104503
Rheotens @ Freepoint	792531	792532	792533	792534	792535
Melt Strng. (cN)	12.4	14	13.63	11.5	5.3
Draw Ratio @ Osc (V/Vo)					
Draw Ratio @ Brk (V/Vo)	12.8	12.1	12	13.4	21.3
nMS (cN)					
GPC-3D	had082	had083	had084	had085	had086
DRI Detector					
Mn	26952	29313	32022	30638	35480
Mw	175885	155729	157536	147351	132626
Mz	831357	602459	618223	523490	347683
Mw/Mn	6.52586079	5.312625797	4.919617763	4.809419675	3.738049605
Mz/Mw	4.726707792	3.868637184	3.924328407	3.552673548	2.621529715
Recovery (%)	0.949	0.949	0.923	0.952	0.952
g' (Vis. Ave.)	0.86	0.9	0.928	0.951	1.002
[η] Intr Vis (dl/g)	1.723	1.692	1.705	1.672	1.687

[00125] As shown above, the inventive examples exhibit higher melt strength which is an indication of the ability to impart greater bubble stability and drawdown capability when blowing films such as high stalk films.

[00126] The phrases, unless otherwise specified, "consists essentially of" and "consisting essentially of" do not exclude the presence of other steps, elements, or materials, whether or not, specifically mentioned in this specification, so long as such steps, elements, or materials, do not affect the basic and novel characteristics of the invention, additionally, they do not exclude impurities and variances normally associated with the elements and materials used.

[00127] For the sake of brevity, only certain ranges are explicitly disclosed herein. However, ranges from any lower limit may be combined with any upper limit to recite a range not explicitly recited, as well as, ranges from any lower limit may be combined with any other lower limit to recite a range not explicitly recited, in the same way, ranges from any upper limit may be combined with any other upper limit to recite a range not explicitly recited. Additionally, within a range includes every point or individual value between its end points even though not explicitly recited. Thus, every point or individual value may serve as its own lower or upper limit combined with any other point or individual value or any other lower or upper limit, to recite a range not explicitly recited.

[00128] All priority documents are herein fully incorporated by reference for all jurisdictions in which such incorporation is permitted and to the extent such disclosure is consistent with the description of the present invention. Further, all documents and references cited herein, including testing procedures, publications, patents, journal articles, etc. are herein fully incorporated by reference for all jurisdictions in which such incorporation is permitted and to the extent such disclosure is consistent with the description of the present invention.


[00129] While the invention has been described with respect to a number of embodiments and examples, those skilled in the art, having benefit of this disclosure, will appreciate that other embodiments can be devised which do not depart from the scope and spirit of the invention as disclosed herein.

CLAIMS

What is claimed is:

1. A method for increasing the melt strength of a polyolefin polymer composition, the
5 method comprising:
 mixing a first polyolefin composition derived from at least one olefin polymerization
 catalyst (a) and at least one olefin polymerization catalyst (b) with a second polyolefin
 composition derived from the at least one olefin polymerization catalyst (b), and
 obtaining the polyolefin polymer composition.
10
2. The method of claim 1, wherein the polyolefin polymer composition has a melt strength
10% or greater than the melt strength of the first polyolefin composition or the second
polyolefin composition.
- 15 3. The method of claim 1, wherein the polyolefin polymer composition has a melt strength
20% or greater than the melt strength of the first polyolefin composition or the second
polyolefin composition.
4. The method of claim 1, wherein the polyolefin polymer composition has a melt strength
20 30% or greater than the melt strength of the first polyolefin composition or the second
polyolefin composition.
5. The method of any one of the preceding claims, wherein the polyolefin polymer
composition has a melt strength of 10 cN or greater.
25
6. The method of any one of the preceding claims, wherein the polyolefin polymer
composition has a melt strength of 11 cN or greater.
7. The method of any one of the preceding claims, wherein the polyolefin polymer
30 composition has a melt strength of 12 cN or greater.
8. The method of any one of the preceding claims, wherein the at least one olefin
polymerization catalyst (a) comprises a metallocene catalyst.

9. The method of claim 8, wherein the metallocene catalyst is represented by the formula:



wherein: Cp^1 and Cp^2 are the same or different cyclopentadienyl rings; R^1 and R^2 are each, independently, a halogen, a hydrogen, or a hydrocarbyl, halocarbyl, hydrocarbyl-substituted organometalloid or halocarbyl-substituted organometalloid group having 1 to 20 carbon atoms; m is 0 to 5; p is 0 to 5; two R^1 and/or R^2 substituents on adjacent carbon atoms of the cyclopentadienyl ring associated therewith can be joined together to form a ring containing from 4 to about 20 carbon atoms; Y is a bridging group; n is the number of atoms in the direct chain between the two ligands and is 0 to 8; M is a transition metal having a valence of from 3 to 6; each X is independently, a hydrogen, a halogen or a hydrocarbyl, oxyhydrocarbyl, halocarbyl, hydrocarbyl-substituted organometalloid, oxyhydrocarbyl-substituted organometalloid, or halocarbyl-substituted organometalloid group having 1 to 20 carbon atoms; and q is equal to the valence of M minus 2.


15 10. The method of claim 8, wherein the metallocene catalyst comprises bis(cyclopentadienyl)zirconium dichloride, bis(*n*-butylcyclopentadienyl)zirconium dichloride, bis(*n*-butylcyclopentadienyl)zirconium dimethyl, bis(pentamethylcyclopentadienyl)zirconium dichloride, bis(pentamethylcyclopentadienyl)zirconium dimethyl, bis(pentamethylcyclopentadienyl)hafnium dichloride, bis(pentamethylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-3-*n*-butylcyclopentadienyl)zirconium dichloride, bis(1-methyl-3-*n*-butylcyclopentadienyl)zirconium dimethyl, bis(1-methyl-3-*n*-butylcyclopentadienyl)hafnium dichloride, bis(1-methyl-3-*n*-butylcyclopentadienyl)zirconium dimethyl, bis(indenyl)zirconium dichloride, bis(indenyl)zirconium dimethyl, bis(tetrahydro-1-indenyl)zirconium dichloride, bis(tetrahydro-1-indenyl)zirconium dimethyl, (*n*-propyl cyclopentadienyl, pentamethyl cyclopentadienyl)zirconium dichloride, dimethylsilylbis(tetrahydroindenyl)zirconium dichloride, dimethylsilylbis(tetrahydroindenyl)zirconium dimethyl, dimethylsilylbis(indenyl)zirconium dichloride, dimethylsilyl(bisindenyl)zirconium dimethyl, dimethylsilylbis(cyclopentadienyl)zirconium dichloride, dimethylsilylbis(cyclopentadienyl)zirconium dimethyl, or (*n*-propyl cyclopentadienyl, pentamethyl cyclopentadienyl)zirconium dimethyl.

11. The method of claim 8, wherein the metallocene catalyst comprises bis(n-propyl cyclopentadienyl) hafnium dichloride, dimethyl, or dihydride; bis(n-butyl cyclopentadienyl) hafnium dichloride or dimethyl; bis(n-pentyl cyclopentadienyl) hafnium dichloride or dimethyl; (n-propyl cyclopentadienyl)(n-butyl cyclopentadienyl) hafnium dichloride or dimethyl; bis[(2-trimethylsilyl-ethyl)cyclopentadienyl] hafnium dichloride or dimethyl; bis(trimethylsilyl cyclopentadienyl) hafnium dichloride or dimethyl or dihydride; bis(2-n-propyl indenyl) hafnium dichloride or dimethyl; bis(2-n-butyl indenyl) hafnium dichloride or dimethyl; dimethylsilyl bis(n-propyl cyclopentadienyl) hafnium dichloride or dimethyl; dimethylsilyl bis(n-butyl cyclopentadienyl) hafnium dichloride or dimethyl; bis(9-n-propyl fluorenyl) hafnium dichloride or dimethyl; bis(9-n-butyl fluorenyl) hafnium dichloride or dimethyl; (9-n propyl fluorenyl)(2-n-propyl indenyl) hafnium dichloride or dimethyl; bis(1,2-n-propyl, methyl cyclopentadienyl) hafnium dichloride or dimethyl; (n-propyl cyclopentadienyl)(1,3-n-propyl, n-butyl cyclopentadienyl) hafnium dichloride or dimethyl; bis(n-propyl cyclopentadienyl) hafnium dimethyl; bis(n-butyl cyclopentadienyl) hafnium dimethyl; bis(n-pentyl cyclopentadienyl) hafnium dimethyl; (n-propyl cyclopentadienyl)(n-butyl cyclopentadienyl) hafnium dimethyl; bis[(2-trimethylsilyl-ethyl)cyclopentadienyl] hafnium dimethyl; bis(trimethylsilyl cyclopentadienyl) hafnium dimethyl; bis(2-n-propyl indenyl) hafnium dimethyl; bis(2-n-butyl indenyl) hafnium dimethyl; dimethylsilyl bis(n-propyl cyclopentadienyl) hafnium dimethyl; dimethylsilyl bis(n-butyl cyclopentadienyl) hafnium dimethyl; bis(9-n-propyl fluorenyl) hafnium dimethyl; bis(9-n-butyl fluorenyl) hafnium dimethyl; (9-n propyl fluorenyl)(2-n-propyl indenyl) hafnium dimethyl; bis(1,2-n-propyl, methyl cyclopentadienyl) hafnium dimethyl; or (n-propyl cyclopentadienyl)(1,3-n-propyl, n-butyl cyclopentadienyl) hafnium dimethyl.


12. The method of any one of the preceding claims, wherein the at least one olefin polymerization catalyst (b) is not a metallocene catalyst.

13. The method of any one of the preceding claims, wherein the at least one olefin polymerization catalyst (b) is a biphenyl phenol catalyst.


14. The method of claim 13, wherein the biphenyl phenol catalyst is represented by the formula:



;



; or

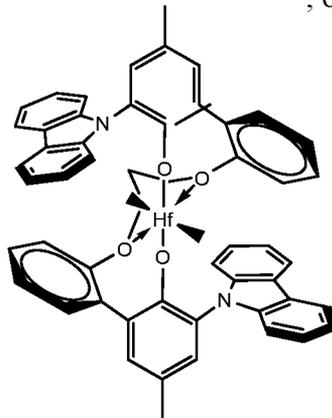

5

10

15. The method of any one of the preceding claims, wherein the mixing comprises mixing the polyolefin polymer composition with an extruder and/or mixer.

15

16. The method of any one of claims 1-14, wherein the mixing comprises mixing the polyolefin polymer composition *in situ* in one or more reactors.

17. The method of any one of claims 1-14, wherein the mixing comprises mixing the polyolefin polymer composition in a series of reactors.


20

18. The method of any one of the preceding claims, wherein the polyolefin polymer composition has a density of from 0.900 g/cm³ to 0.940 g/cm³.


19. The method of any one of the preceding claims, wherein the polyolefin polymer composition has a density of from 0.912 g/cm³ to 0.930 g/cm³.
- 5 20. The method of any one of the preceding claims, wherein the polyolefin polymer composition has a density of from 0.915 g/cm³ to 0.925 g/cm³.
21. The method of any one of the preceding claims, wherein the polyolefin polymer composition has a weight average molecular weight (M_w) of from 50,000 g/mol to 250,000
10 g/mol.
22. The method of any one of the preceding claims, wherein the polyolefin polymer composition has a weight average molecular weight (M_w) of from 80,000 g/mol to 150,000 g/mol.
15
23. The method of any one of the preceding claims, wherein the polyolefin polymer composition has a melt index ($I_{2.16}/190^\circ\text{C}$) of from 0.05 g/10 min to 10.00 g/10 min.
24. The method of any one of the preceding claims, wherein the polyolefin polymer composition has a melt index ($I_{2.16}/190^\circ\text{C}$) of from 0.10 g/10 min to 7.00 g/10 min.
20
25. The method of any one of the preceding claims, wherein the polyolefin polymer composition has a melt index ($I_{2.16}/190^\circ\text{C}$) of from 0.50 g/10 min to 5.00 g/10 min.
- 25 26. The method of any one of the preceding claims, wherein the polyolefin polymer composition comprises from 50 wt% to 99 wt% of the first polyolefin composition and from 50 wt% to 1 wt% of the second polyolefin composition, based upon the total weight of the polyolefin polymer composition.
- 30 27. The method of any one of claims 1-25, wherein the polyolefin polymer composition comprises from 65 wt% to 99 wt% of the first polyolefin composition and from 35 wt% to 1 wt% of the second polyolefin composition, based upon the total weight of the polyolefin polymer composition.

28. The method of any one of claims 1-25, wherein the polyolefin polymer composition comprises from 75 wt% to 99 wt% of the first polyolefin composition and from 25 wt% to 1 wt% of the second polyolefin composition, based upon the total weight of the polyolefin polymer composition.

1 / 2

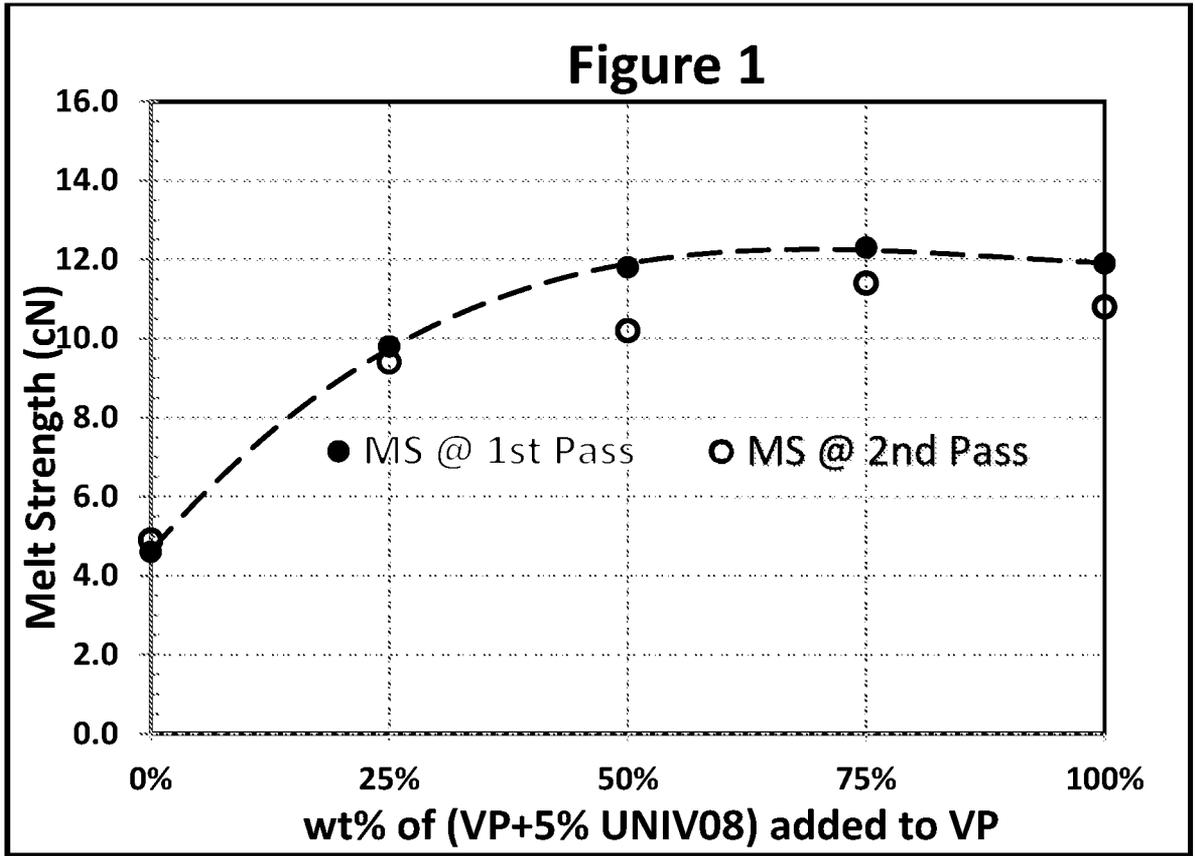

2 / 2

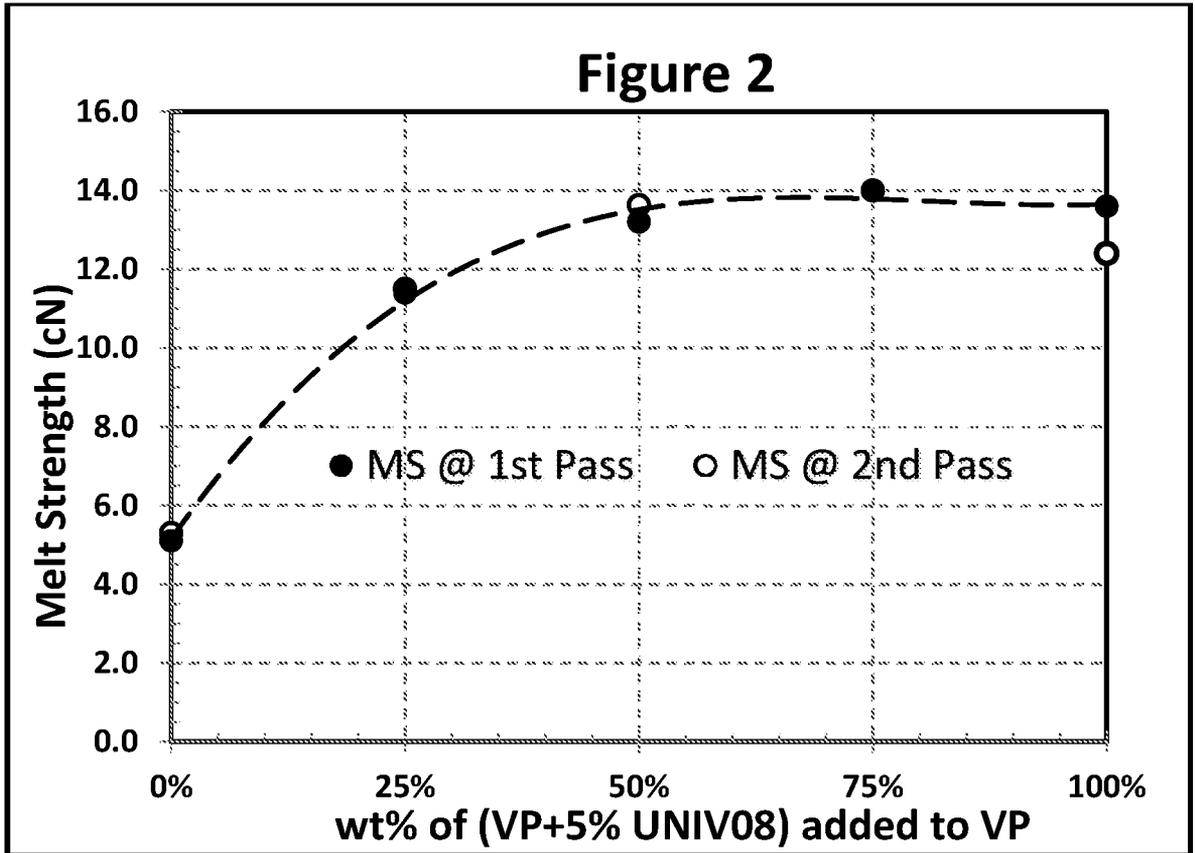

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2018/024074

A. CLASSIFICATION OF SUBJECT MATTER
 INV. C08F210/16 C08L23/08 C08F4/659 C08F4/64
 ADD.
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 C08L C08F
 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal , WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2011/136982 AI (TSE MUN F [US] ET AL) 9 June 2011 (2011-06-09) paragraph [0132] - paragraph [0143] ; figure 9; tabl e 4	1-28
X	US 2004/220359 AI (ABHARI RAMIN [US] ET AL) 4 November 2004 (2004-11-04) examples la-lf, 2a-2f, 3a-3e, 4a-4e, 6a-6c; tabl es 1-4, 6	1-28

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 27 June 2018	Date of mailing of the international search report 06/07/2018
--	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Balmer, J
--	--

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2018/024074

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011136982	A1	09-06-2011	NONE
US 2004220359	A1	04-11-2004	AT 519795 T 15-08-2011
		CN 101018815 A	15-08-2007
		EP 1753796 A1	21-02-2007
		JP 5348732 B2	20-11-2013
		JP 2007532762 A	15-11-2007
		KR 20070015579 A	05-02-2007
		US 2004220359 A1	04-11-2004
		W0 2005113622 A1	01-12-2005