

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 October 2006 (05.10.2006)

PCT

(10) International Publication Number
WO 2006/105299 A1

(51) International Patent Classification:
H01R 27/00 (2006.01)

(21) International Application Number:
PCT/US2006/011654

(22) International Filing Date: 29 March 2006 (29.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/096,977 31 March 2005 (31.03.2005) US

(71) Applicant (for all designated States except US): **UNITED PARCEL SERVICE OF AMERICA, INC.** [US/US]; 55 Glenlake Parkway, N.E., Atlanta, GA 30328 (US).

(72) Inventor: **SUTTON, Stephen, Douglas**; 4011 Halisport View, Kennesaw, GA 30152 (US).

(74) Agents: **ANDREWS, Cecilia, M.** et al.; ALSTON & BIRD LLP, Bank of America Plaza, 101 South Tryon Street, Suite 4000, Charlotte, NC 28280-4000 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RELAY RETROFIT APPARATUS

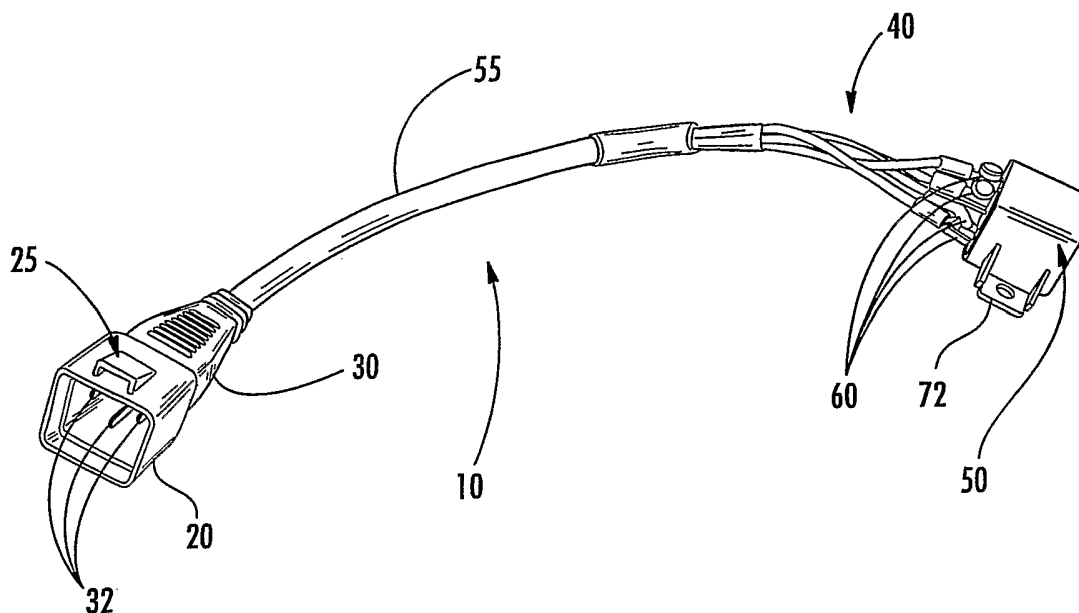

(57) Abstract: The invented apparatus is designed for use within a vehicle's electrical system. The apparatus electrically couples a plug having a first electrical contact configuration with a relay having a different electrical contact configuration. The apparatus provides an easy and inexpensive solution for replacing relay's that have different electrical contact configurations.

WO 2006/105299 A1

RELAY RETROFIT APPARATUS

BACKGROUND OF THE INVENTION

Currently, replacing a relay located within a vehicle's electrical system requires a labor intensive effort on the part of a mechanic. Never is the case truer
5 than when the new relay has a different electrical contact configuration than the original. The vehicle's socket, which is configured to receive a relay having a specific electrical configuration, is not capable of connecting with a relay having a different contact configuration. Therefore, the mechanic is forced to either replace the socket with one that fits the new relay, or cut the vehicle's socket out and splice
10 the new relay directly into the vehicle's electrical system. Either procedure is both time consuming and labor intensive. In addition, each procedure introduces the possibility of human error not subject to routine quality control measures. If the work is performed improperly, particularly if the relay is related to a critical safety system of the vehicle, a dangerous condition may result which could lead to
15 damage to the vehicle and its human occupants. Accordingly, there is a need for a device that can easily replace relays having different electrical contact configurations, and do so with assurance of proper connection of the new relay to the vehicle's electrical system.

20

BRIEF SUMMARY OF THE INVENTION

The present invention overcomes the deficiencies of the prior art by providing an apparatus for replacing one relay with a new relay when the two have different electrical contact configurations.

Generally described, the invention is directed toward an apparatus
25 comprising a plug having electrical contacts and a relay electrically coupled to the plug, in which the plug and the relay have electrical contacts configured differently from one another.

In other embodiments, the apparatus can use wiring to connect the relay with the plug. In addition, in some embodiments, the wiring can be insulated. The
30 apparatus can further comprise a shroud that is attached adjacent the plug wherein the shroud encases at least a portion of the electrical contacts of the plug to provide a weatherproof connection when the plug is inserted into a socket. In one embodiment, the relay has a 75 amp dual pole configuration.

In an alternative embodiment, the invention is directed to an apparatus comprising a plug having electrical contacts configured to be inserted into a first socket configured for a first relay, wiring having first ends connected to the electrical contacts of the plug and second ends opposite the first ends, and a
5 connector having electrical contacts connected to the second ends of the wiring, wherein the connector is configured to receive contacts of a second relay having electrical contacts with a different configuration than the electrical contacts of the first relay.

In some embodiments, the wiring is insulated while other embodiments
10 include a detachable connector. In one embodiment, the connector is a socket. In yet another embodiment, the apparatus further comprises a shroud attached adjacent the plug. In a different embodiment, the shroud encases at least a portion of the electrical contacts of the plug when the plug is inserted into a first socket. In yet another embodiment, the first and second relays have different amperage
15 ratings. In still another embodiment, the first socket is configured to receive a first relay having a 40 amp single pole configuration and the second relay has a 75 amp dual pole configuration.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING(S)

20 Having thus described the invention in general terms, reference will now be made to the accompanying drawings, which are not necessarily drawn to scale, and wherein:

FIG. 1 shows one embodiment of the relay retrofit apparatus.

FIG. 2 shows a 40 amp single pole relay.

25 FIG. 3 shows a close up view of the relay retrofit apparatus of Fig. 1.

FIG. 4 illustrates a prior art method of attaching a relay to a vehicle's wiring harness. As shown, the relay is mounted to a vehicle's brake booster housing.

FIG. 5 shows the relay retrofit apparatus of FIG. 1 installed within a
30 vehicle's brake system. In this embodiment, the relay retrofit apparatus is plugged into a socket and the relay is mounted to the vehicle's brake booster assembly.

DETAILED DESCRIPTION OF THE INVENTION

The present inventions now will be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all embodiments of the inventions are shown. Indeed, these inventions may be embodied in many
5 different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will satisfy applicable legal requirements. Like numbers refer to like elements throughout.

Many modifications and other embodiments of the inventions set forth herein will come to mind to one skilled in the art to which these inventions pertain
10 having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is to be understood that the inventions are not to be limited to the specific embodiments disclosed and that modifications and other embodiments are intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and
15 descriptive sense only and not for purposes of limitation.

I. Structure of the Relay Retrofit Apparatus

A relay retrofit apparatus 10 is formed by electrically coupling a relay 50 having a first electrical contact configuration 60 to a plug 30 having a second
20 electrical contact configuration. The first contact configuration of the relay 50 is different than the second electrical contact configuration of the plug 30. Provided below is a written description of the elements that comprise the embodiment of the relay retrofit apparatus 10 as shown in Figure 1.

The Plug

In the embodiment illustrated in Figure 1, one end of the relay retrofit apparatus 10 comprises a plug 30. In this particular embodiment, the plug includes “male” contact configurations designed to be inserted into an electrical socket. The plug’s contact configuration is identical to the contact configuration 45 of the
30 original relay 35, shown in Figure 2. In this embodiment, the original relay 35 and the plug 30 of the relay retrofit apparatus 10 comprise a 4 pin, flat contact configuration 45. In alternative embodiments, the original relay 35 and the plug 30 of the relay retrofit apparatus 10 comprise contact configurations such as the European 7 pin configuration, a 6 way round configuration, or any other contact

configuration known in the art. Additionally, other embodiments (not shown) of the relay retrofit apparatus 10 can be equipped with plugs 30 having a female contact configuration. In the embodiment depicted in Figure 1, the relay retrofit apparatus 10 is equipped with a weather protective shroud 20. The shroud 20 is attached adjacent to the end of the plug 30 and is configured to protect the electrical pins 32 of the plug 30 from exposure to moisture, dirt, or any other substance that could adversely effect the electrical connection between the plug 30 and socket 70. The socket 70 is shown in Figure 5 and will be described in greater detail below. In the embodiment depicted in Figure 1, the shroud 20 includes a tab 25 designed to secure the shroud 20 to the electrical socket 70, as shown in Figure 5. The tab 25 prevents the plug 30 and socket 70 from detaching under normal operating conditions; thereby reducing the likelihood that the electrical current flowing from the socket 70 to the relay retrofit apparatus 10 will be lost.

15 Electrical Conductor

In the embodiment shown in Figure 1, the plug 30 is coupled to a second relay 50 via wires 40 having first and second ends. In this embodiment, the relay retrofit apparatus includes four wires 40 that are encased within a protective insulative material 55. The wires 40 can be made from any material that conducts electricity such as copper, zinc, tungsten, or iron. In addition, wires 40 of various length and thickness can be used to electrically couple the new relay 50 to the plug 30. In alternate embodiments (not shown) the wiring could be braided copper wires, wound wiring, or electrical filaments. In short, anything with the capability to conduct electricity between the plug 30 and the new relay 50 can be used.

25

Relay

In the embodiment of the relay retrofit apparatus 10 shown in Figure 1, the first ends of the wires 40 are connected to the plug 30 and the second ends are connected to a new relay 50. In this particular embodiment, the new relay 50 is a 75 amp relay having a Double Pole Single Throw configuration. Alternate relays can be utilized in other embodiments of the present invention. As known in the art, a relay is an electrically-activated switch. A relay allows current to flow in one of two circuits, depending upon the switch's position or state. In general, relays allow electrical currents to flow between different sets of electrical contacts

through the use of a “relay coil”. For example, particular relays are designed so that when the relay coil is not energized, a movable contact allows electricity to flow to one set of contacts. When the relay coil is energized from a power source, the contact will be moved to allow current to flow to a separate set of contacts.

5 Relays come in a multitude of configurations. For example, there are Single Pole Single Throw (SPST) relays, Single Pole Double Throw (SPDT) relays, Double Pole Single Throw (DPST) relays, and Double Pole Double Throw (DPDT) relays. In a Single Pole Single Throw relay, a current will only flow through a set of contacts when the relay coil is energized. In the Single Pole Double Throw relay,

10 current will flow between the movable contact and a first fixed contact when the relay coil is deenergized and between the movable contact and a second fixed contact when the relay coil is energized. In the Double Pole Single Throw relay, when the relay coil is energized, two separate and electrically isolated sets of contacts are moved to allow current to flow to two separate sets of contacts. In a

15 Double Pole Double Throw configuration, the relay operates like the Single Pole Double Throw relay but with twice as many contacts, i.e., there are two completely isolated sets of contacts.

As illustrated by Figure 3, the second ends of the wires 40 are connected directly to the new relay 50. As stated above, the new relay used in this particular

20 embodiment of the relay retrofit apparatus 10 is a 75 amp double pole single throw relay having an electrical contact configuration 60 that differs from the plug’s 30 electrical contact configuration. Again referring to Figure 3, in this particular embodiment, the electrical contact configuration 60 of the new relay 50 comprises two ring terminals, one vertical spade socket and one horizontal spade socket. As

25 shown in Figure 3, the ring terminals utilize screws to connect the wires 40 to the relay’s 50 electrical contacts 60. The remaining two wires plug into the relay 50 via spade pins. Again referring to Figure 3, two wires configured with spade pin electrical contacts enter a connector 52 and plug into the relay 50. One spade plugs into a substantially horizontal relay socket and the other spade plugs into a

30 substantially vertical relay socket. Relays having different electrical contact configurations can be used in the present invention.

As shown in embodiments depicted in Figures 1 and 3, the new relay 50 includes attachment tabs 72. The attachment tabs 72 comprise a hole and a plastic tab that extends outwardly from the new relay 50. The attachment tabs 72 are configured to secure the new relay 50 to a structure using any means of attachment known in the art, such as a screw. For example, in Figure 5 the new relay 50 is shown secured to the vehicle's brake booster housing.

II. Use of a Relay in a Vehicle's Brake System

As described in greater detail below, the relay retrofit apparatus 10 described above can be used to replace or convert a first relay with a new relay without having to either: 1) install a new socket configured to receive the new relay, or 2) without having to splice and modify the socket to fit a new relay. The term socket 70 is also referred to as a "wiring harness" or a "wiring harness pigtail" by those skilled in the art. The terms "socket," "vehicle socket," "vehicle wiring harness," and "vehicle wiring harness pigtail" can be used interchangeably and all refer generally to any electrical socket attached to wires. For example, the relay retrofit apparatus 10 can be used to replace relays used within a vehicle's braking system. It is important to note that replacing relays within a vehicle's braking system is an exemplary context for using the relay retrofit apparatus 10 and does not limit the use of the relay retrofit apparatus 10 in additional settings or environments.

Many vehicles utilize relays to provide electricity to an electric brake motor (not shown). In this context, the relay has contact points which are open when the relay coil is deenergized. On one side of the contacts is a power supply. The other side of the contacts goes to the load, which in this case is an electric brake motor. In order for the relay coil to energize and close the circuit to the brake motor, the coil must first be grounded. In this embodiment, a flow switch (not shown) is used to complete the ground. The flow switch monitors the hydraulic flow within the vehicle's brake system. If the flow switch detects pressure, the switch stays open, thereby keeping the ground open. If hydraulic pressure or flow is lost, either due to the engine being off or due to a broken belt leading to the vehicle's brake pump, the flow switch will close and complete the ground. Once grounded, the circuit is complete and the relay coil is energized. The energized relay coil in turn completes the circuit for the electric brake motor.

Therefore, when the ignition key is in the “on” position and the engine is running, the engine (i.e. the belts) provides hydraulic power to the vehicle’s braking system. If the engine dies, or a belt brakes, the flow switch energizes the relay’s coil which in turn completes a circuit and activates an electric brake motor.

5 The brake motor provides enough power to the vehicle’s brake system to allow the driver to safely bring the vehicle to a stop. Likewise, if the vehicle’s ignition key is in the “off” position and the engine is not running, the flow switch will activate the relay when the brake pedal is depressed and power will be supplied to the vehicle’s brake system.

10

III. Method of Using the Relay Retrofit Apparatus

Figure 4 illustrates a prior art method of attaching a relay to a vehicle’s electrical system. In this particular embodiment, the original relay 35 is connected to a vehicle’s electrical system via a socket 70. In the embodiment shown in
15 Figure 4, the original relay 35 is a 40 amp relay having a Single Pole Single Throw configuration. The original relay 35 is shown mounted to the vehicle’s brake booster housing 80. In this embodiment, the brake booster housing 80 serves only as a convenient structure on which to secure the original relay 35. Other structures within a vehicle can be used to secure the original relay 35. In fact, the original
20 relay 35 does not have to be secured at all.

In the past, replacing the original relay 35 with a new relay having a different electrical contact configuration would require that the vehicle socket 70 (or “vehicle wiring harness”) be replaced. This would require splicing and modifying the vehicle’s wiring harness to fit the new relay. To avoid this problem,
25 the relay retrofit apparatus 10 allows the user to easily convert or replace the original relay 35 with a new relay 50 without having to splice a new vehicle socket into the vehicle’s electrical system.

The method for replacing the original relay 35 with a new relay 50 comprises the following steps. First, the original relay 35 is disconnected and
30 removed from the vehicle’s electrical system. As shown in Figure 4, the original relay 35 is mounted to the vehicle’s brake booster housing 80. Next, the user connects the wires 40 to a new relay 50 having a different contact configuration 60 than the original relay 35. The new relay 50 shown in Figure 3 is a 75 amp double pole relay. After the new relay 50 is coupled to the plug 30, the new relay 50 is

secured in the same area as the original relay **35** and the plug **30** is connected to the vehicle socket **70**. After the relay retrofit apparatus **10** is installed and connected to the vehicle's electrical system, the user can test to ensure that the circuit is working correctly. In this embodiment, wherein the relay is used in the context of a vehicle's brake system, the brake motor should run when 1) the engine is off, 2) the ignition key is in the "off" position, and 3) the brake pedal is depressed. In addition, the brake motor should also run when 1) the engine is off, and 2) the ignition key is in the "on" position. When the engine is running, the brake motor should not run. If the above test are successful, the relay retrofit apparatus **10** has been properly installed into the vehicle's brake system.

Certain of the following claims are set forth in means plus function terminology. Here follows a description of the various means used to accomplish each claimed function. The coupling means include wiring, braided copper wires, wound wiring, electrical filaments, or a long piece of metal, for example. In short, anything with the capability to conduct electricity between the plug **30** and the new relay **50** can be used. The coupling means may be made from any material that conducts electricity such as copper, zinc, tungsten, or iron. In addition, coupling means of various length and thickness can be used. The connector means includes a socket, a wiring harness, or any device capable of connecting to the electrical contacts of a relay. For example, a connector means **52** is shown in Figure 3.

THAT WHICH IS CLAIMED:

1. A relay retrofit apparatus comprising:
a plug having electrical contacts; and
5 a relay electrically coupled to said plug, and having
electrical contacts configured differently from the electrical contacts of said plug.
2. The apparatus of claim 1, further comprising wiring connecting said
relay with said plug.
10
3. The apparatus of claim 2, wherein said wiring is insulated.
4. The relay retrofit apparatus as claimed in claim 1 further comprising
a shroud fixed to said plug.
15
5. The relay retrofit apparatus of claim 4, wherein said shroud encases
at least a portion of said electrical contacts of said plug to provide a weatherproof
connection when said plug is inserted into a socket.
- 20 6. The relay retrofit apparatus as claimed in claim 1, wherein said
relay has a 75 amp dual pole configuration.
7. A relay retrofit apparatus comprising:
a plug having electrical contacts configured to be inserted into a first socket
25 configured for a first relay;
wiring having first ends connected to the electrical contacts of said plug
and second ends opposite the first ends; and
a connector having electrical contacts connected to the second ends of said
wiring, wherein said connector is configured to receive contacts of a second relay
30 having electrical contacts with a different configuration than the electrical contacts
of said first relay.

8. The apparatus of claim 7, wherein said wiring is insulated.
9. The apparatus of claim 7, wherein said connector is detachable.
- 5 10. The apparatus of claim 7, wherein said connector is a socket.
11. The apparatus of claim 7, further comprising a shroud fixed to said plug.
- 10 12. The relay retrofit apparatus of claim 11, wherein said shroud encases at least a portion of said electrical contacts of said plug when said plug is inserted into said first socket.
13. The apparatus of claim 7, further comprising a second relay
15 electrically coupled to said connector.
14. The apparatus of claim 13, wherein said first and second relays have different amperage ratings.
- 20 15. The apparatus of claim 13, wherein said first socket is configured to receive a first relay having a 40 amp single pole configuration and said second relay has a 75 amp dual pole configuration.
- 25 16. A relay retrofit apparatus comprising;
a connector means having electrical contacts configured for insertion into a first socket configured for a first relay;
a second relay having electrical contacts with a different configuration than said connector means;
a coupling means for electrically coupling said connector with said second
30 relay.

17. The apparatus of claim 16, wherein said coupling means is wiring.
18. The apparatus of claim 16, where said wiring is insulated.
- 5 19. The apparatus of claim 16, further comprising a means for protecting said electrical contacts of said connector means from the weather.

1/4

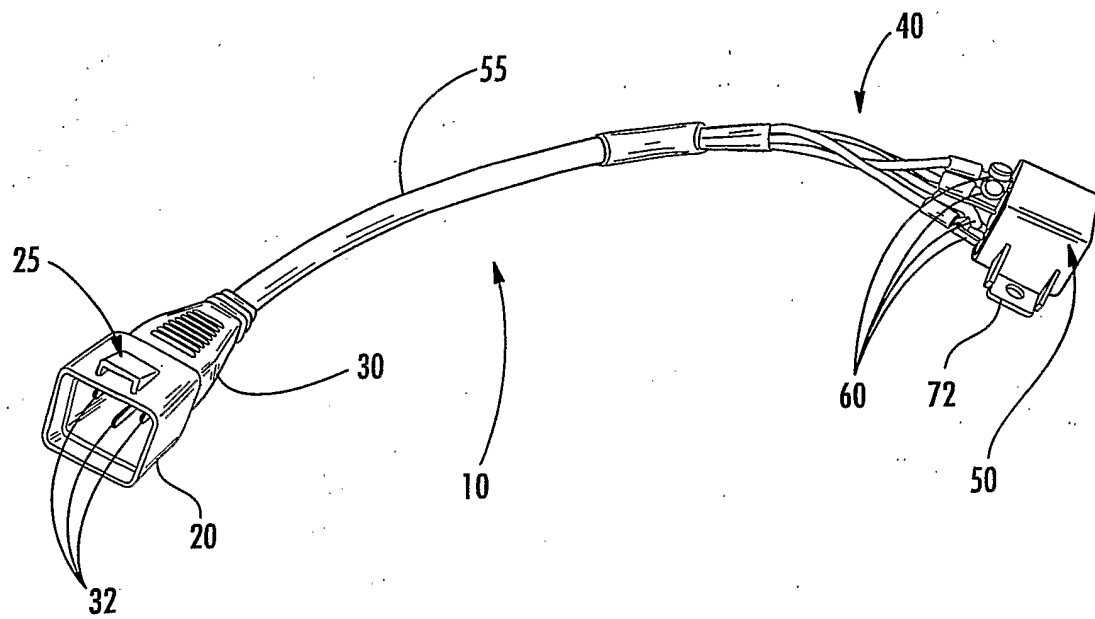


FIG. 1

2/4




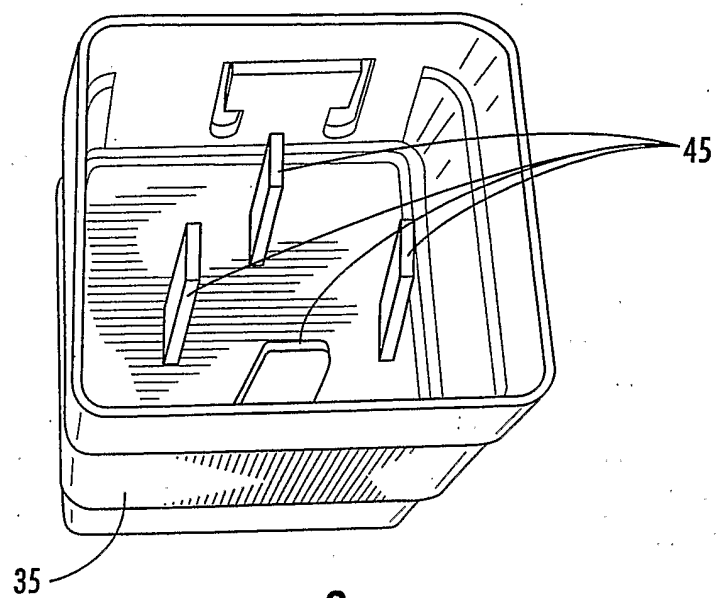


FIG. 2

3/4

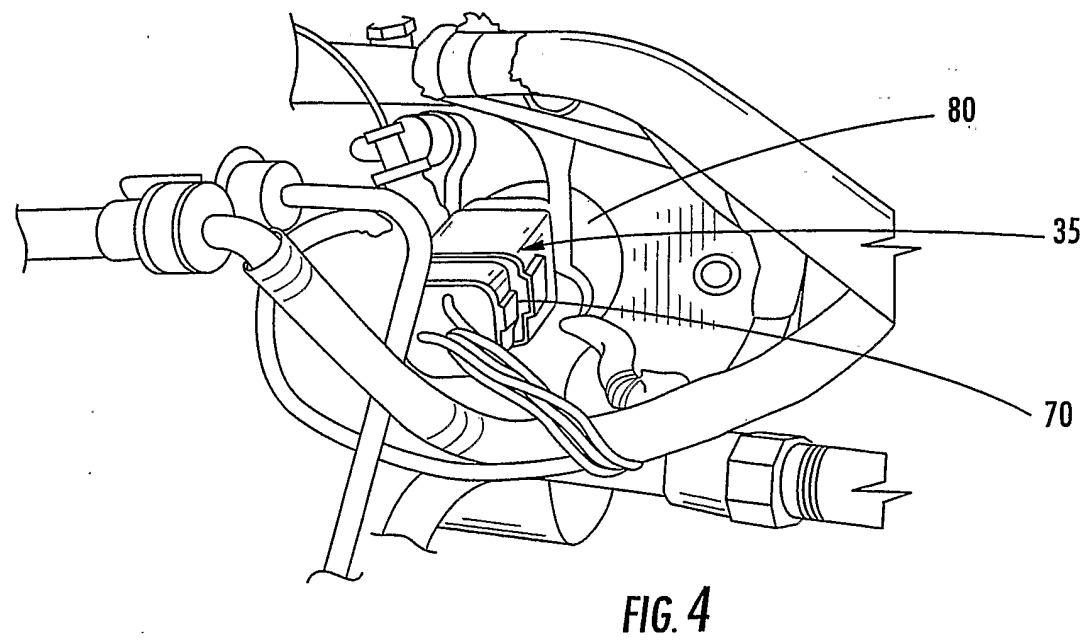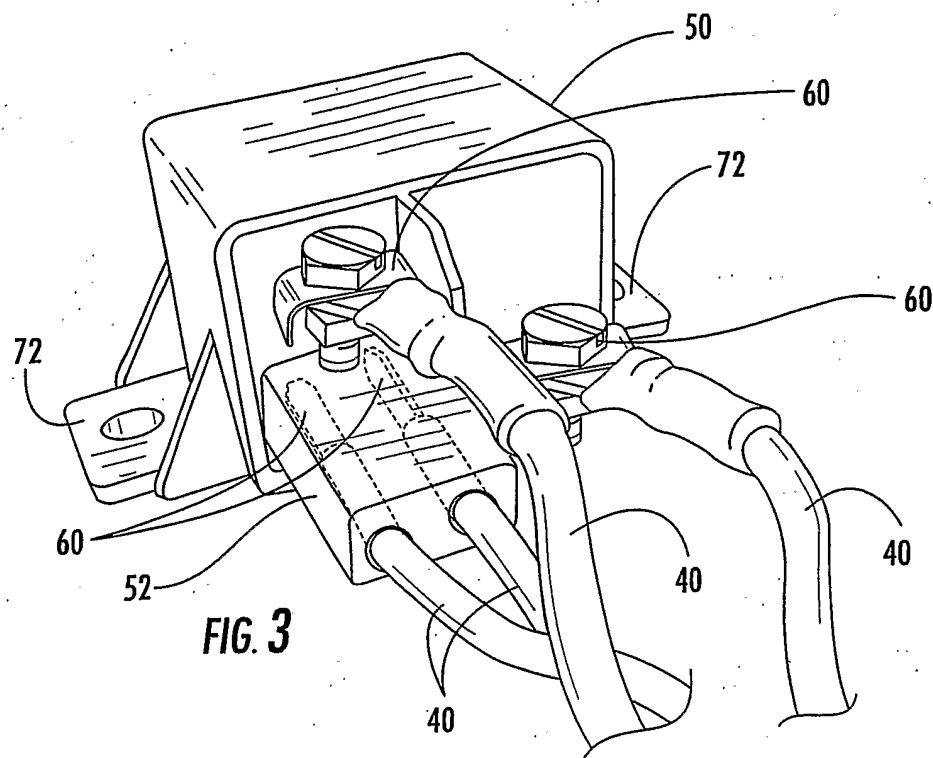

4/4

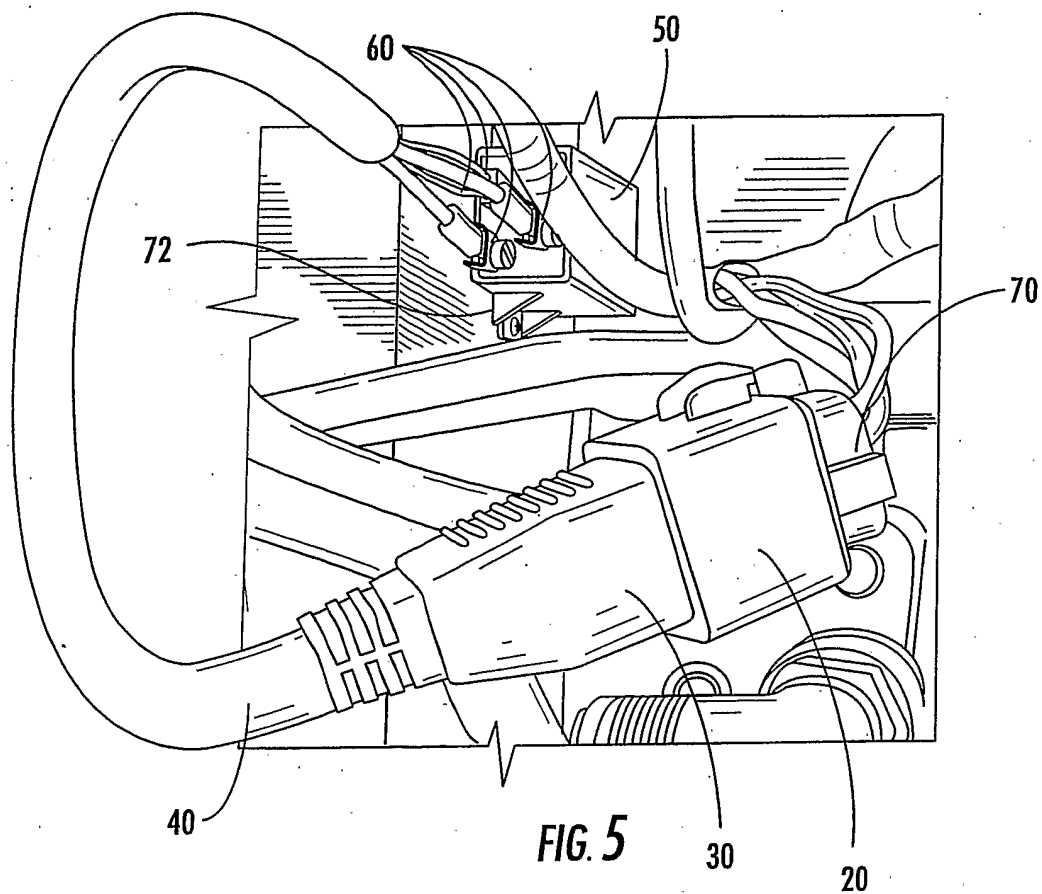

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2006/011654

A. CLASSIFICATION OF SUBJECT MATTER
 INV. H01R27/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 H01R H01H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 413 935 A (WEBASTO AG FAHRZEUGTECHNIK) 27 February 1991 (1991-02-27)	1
A	the whole document	2-19
X	US 5 340 331 A (BOHLEN ET AL) 23 August 1994 (1994-08-23)	1,7,16
A	abstract; claims; figures	2-6, 8-15, 17-19
X	DE 199 21 967 A1 (VOLKSWAGEN AG) 16 November 2000 (2000-11-16)	1,2,7
A	the whole document	3-6, 8-15, 17-19
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

13 July 2006

Date of mailing of the international search report

24/07/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Durand, F

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2006/011654

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 301 234 A (DAVID ANTHONY * RYDER) 27 November 1996 (1996-11-27) the whole document -----	1-19
A	EP 0 317 475 A (INTERNATIONAL BUSINESS MACHINES CORPORATION) 24 May 1989 (1989-05-24) claims; figures -----	2
A	US 6 846 198 B1 (RASMUSSEN JOHN) 25 January 2005 (2005-01-25) abstract; claims; figures -----	1-19
A	PATENT ABSTRACTS OF JAPAN vol. 017, no. 578 (E-1450), 20 October 1993 (1993-10-20) & JP 05 168124 A (YAZAKI CORP), 2 July 1993 (1993-07-02) abstract -----	1-19
A	US 6 036 533 A (HUANG ET AL) 14 March 2000 (2000-03-14) abstract; claims; figures -----	1-19

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/US2006/011654

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0413935	A	27-02-1991	DE 3927745 A1 JP 3118253 A	28-02-1991 20-05-1991
US 5340331	A	23-08-1994	DE 4040610 C1 EP 0491260 A1 ES 2085408 T3	17-06-1992 24-06-1992 01-06-1996
DE 19921967	A1	16-11-2000	NONE	
GB 2301234	A	27-11-1996	NONE	
EP 0317475	A	24-05-1989	BR 8805874 A CA 1295387 C JP 1149380 A JP 2095247 C JP 7118345 B US 4815983 A	01-08-1989 04-02-1992 12-06-1989 02-10-1996 18-12-1995 28-03-1989
US 6846198	B1	25-01-2005	NONE	
JP 05168124	A	02-07-1993	JP 2752015 B2	18-05-1998
US 6036533	A	14-03-2000	NONE	