




(86) **Date de dépôt PCT/PCT Filing Date:** 2009/08/05
(87) **Date publication PCT/PCT Publication Date:** 2010/02/11
(45) **Date de délivrance/Issue Date:** 2018/04/24
(85) **Entrée phase nationale/National Entry:** 2012/02/02
(86) **N° demande PCT/PCT Application No.:** US 2009/052868
(87) **N° publication PCT/PCT Publication No.:** 2010/017306
(30) **Priorité/Priority:** 2008/08/05 (US12/186,436)

(51) **Cl.Int./Int.Cl. A01M 23/02** (2006.01)
(72) **Inventeurs/Inventors:**
VICKERY, ETHAN, US;
COVINGTON, LARRY, US
(73) **Propriétaire/Owner:**
VM PRODUCTS INC., US
(74) **Agent:** DEETH WILLIAMS WALL LLP

(54) **Titre : POSTE D'APPAT POUR RONGEURS DU TYPE LESTE ET PROCEDES S'Y RAPPORTANT**
(54) **Title: WEIGHTED RODENT BAIT STATIONS AND RELATED METHODS**

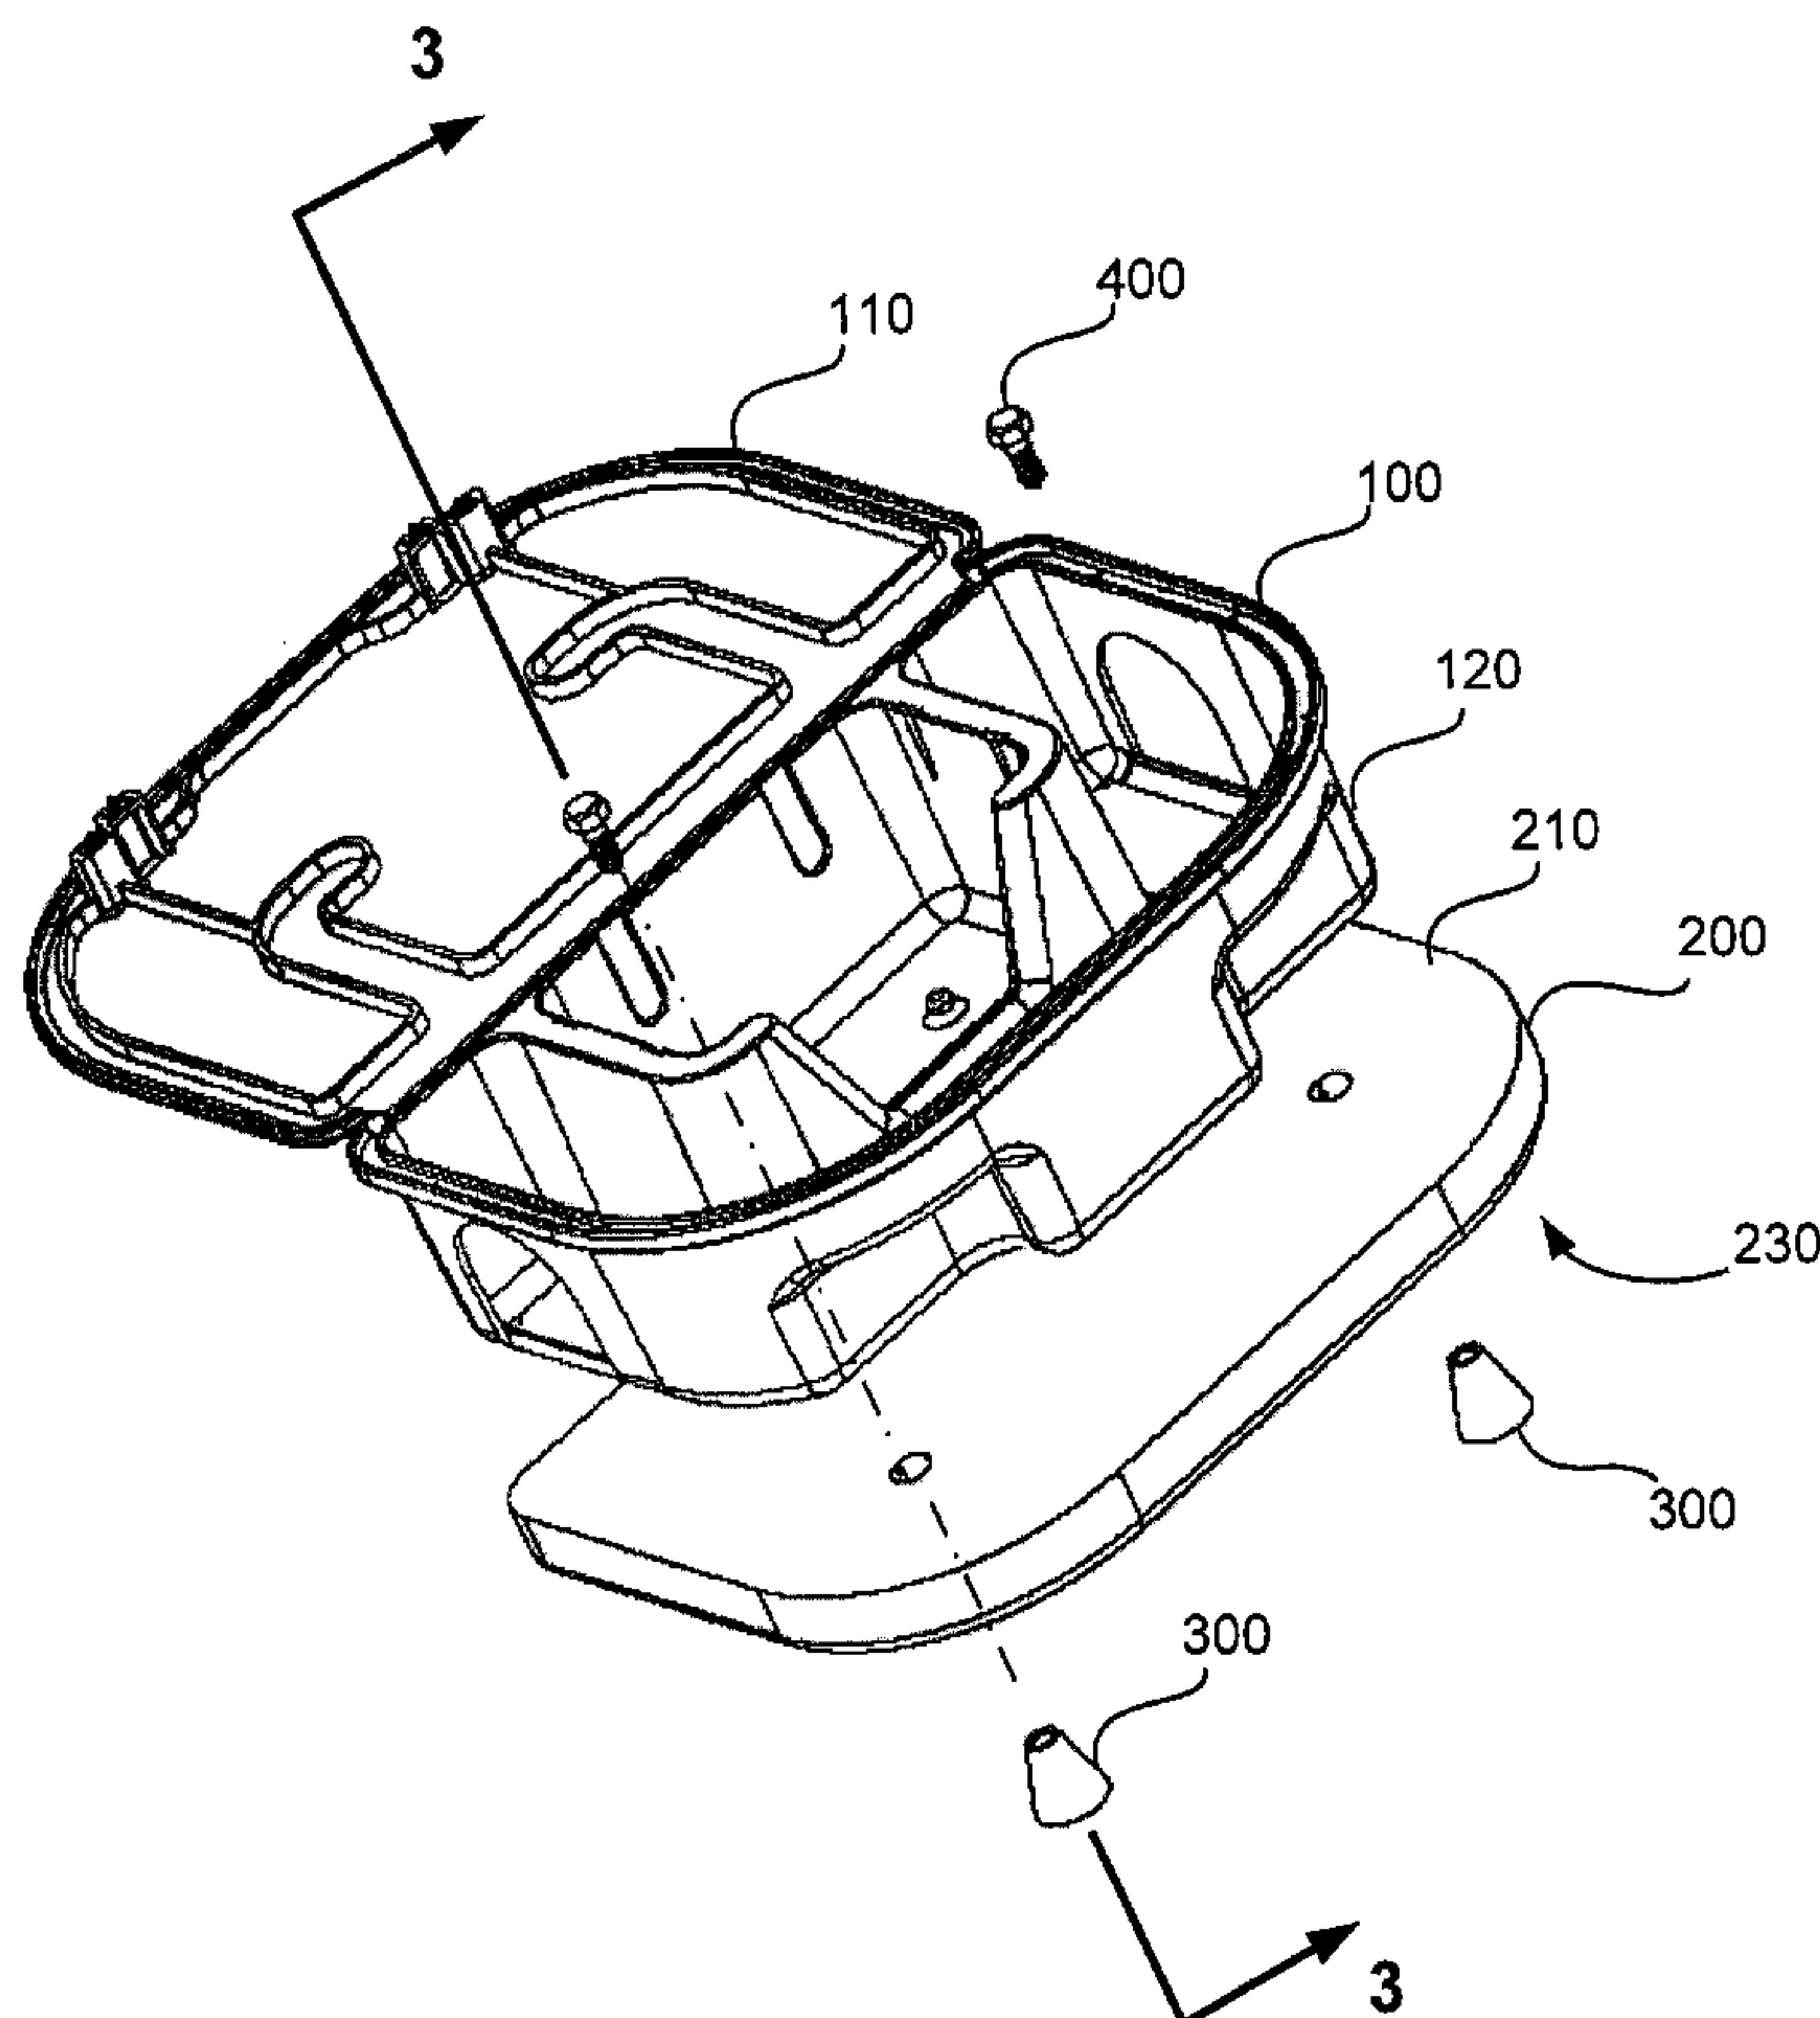

(57) **Abrégé/Abstract:**

Rodent bait station assemblies which include a bait station, an anchoring base, attachment pieces respectively in contact with anchoring base attachment surfaces, and fastening members. The anchoring base is fixed to the bait station by a compressive force that is normal to the anchoring base top surface. The compressive force is applied to the anchoring base by the attachment pieces.

WEIGHTED RODENT BAIT STATIONS AND RELATED METHODS

ABSTRACT

Rodent bait station assemblies which include a bait station, an anchoring base,
5 attachment pieces respectively in contact with anchoring base attachment surfaces,
and fastening members. The anchoring base is fixed to the bait station by a
compressive force that is normal to the anchoring base top surface. The compressive
force is applied to the anchoring base by the attachment pieces.

DESCRIPTION

WEIGHTED RODENT BAIT STATIONS AND RELATED METHODS

5

BACKGROUND

The present methods, devices, and systems relate generally to the field of rodent bait stations.

SUMMARY

Some embodiments of the present rodent bait station assemblies have a bait
10 station fixed to an anchoring base by one or more fastening members that are
respectively coupled to one or more frusto-conically shaped attachment pieces that are
each in contact with the anchoring base. In some embodiments, the attachment pieces
may be frusto-conically shaped fastening plugs that are respectively in contact with
the one or more fastening members.

15 In some embodiments of the present rodent bait station assemblies, the
anchoring base may comprise ceramic or concrete. Some embodiments include bait
stations that are configured with a lid. Some of these embodiments include a
removable key, and are configured such that the lid can be unlocked from the bait
station using the key.

20 Some embodiments of the present rodent bait station assemblies have a base
portion and a lid that is integrally attached to the base portion. Some of these
embodiments include a removable key, and are configured such that the lid can be
unlocked from the bait station using the key.

Some embodiments of the present rodent bait station assemblies contain bait located within the bait station. Some of these embodiments also include bait-holding rods that couple the bait to the bait station.

5 In some embodiments of the present rodent bait station assemblies, the attachment pieces contain plastic. In some embodiments, the attachment pieces are part of an attachment tray. In some of these embodiments, the fastening members are coupled to the attachment pieces using frusto-conically shaped fastening plugs that are in contact with the fastening members and with the attachment pieces.

10 Some embodiments of the present rodent bait station assemblies have fastening members that are self-tapping screws.

Some embodiments of the present rodent bait station assemblies have a bait station, an anchoring base, an attachment piece, and a fastening member that is in contact with the bait station and is coupled to the attachment piece. In these embodiments, the anchoring base may include an anchoring base top surface having a
15 portion that is in contact with the bait station, and an anchoring base attachment surface that are is not parallel to the anchoring base top surface. In these embodiments, the attachment piece may be in contact with the anchoring base attachment surfaces.

In these embodiments, the anchoring base may fixed to the bait station by a
20 compressive force that is normal to the anchoring base top surface. The compressive force may be applied to the anchoring base by the attachment piece.

In these embodiments, the attachment piece may not be integral to the anchoring base prior to coupling the fastening member to the attachment piece. In other words, prior to coupling fastening member to the attachment piece, the
25 attachment piece may be separable from the anchoring base.

Some embodiments of the present rodent bait station assemblies include features that prevent rotation of the attachment piece during coupling to the fastening member. Such anti-rotational features may include, for example, a configuration having a slightly eccentric radial cross-section (e.g., an oblong-shaped cross-section) of a generally frusto-conical attachment surface of the anchoring base. When such a configuration is coupled to a frusto-conical fastening plug serving as the attachment piece, the fastening plug may deform to comply with the eccentric cross-section of the attachment surface, thereby limiting the rotation of fastening plug.

In some embodiments of the present rodent bait station assemblies, the anchoring base includes an anchoring base bottom surface that is substantially parallel and opposite the anchoring base top surface. In these embodiments, the anchoring base bottom surface may have indented features, such as, for example, channels or grid-like impressions. The term “substantially parallel” in this respect means that the magnitude of the angle between the surface normals is about ten degrees or less.

In some embodiments of the present rodent bait station assemblies, projecting the outer perimeter of the anchoring base onto the plane of the anchoring base attachment surface circumscribes an area that is about 110% or less than the area circumscribed by projecting the outer perimeter of the bait station onto the plane of the anchoring base attachment surface.

In some embodiments of the present rodent bait station assemblies, the shape resulting from projecting the outer perimeter of the anchoring base onto the plane of the anchoring base attachment surface is substantially the same as the shape resulting from projecting the outer perimeter of the bait station onto the plane of the anchoring base attachment surface. The term “substantially the same” in this respect means that the two shapes can be aligned such that the offset between the two shapes (e.g., for

any given point on either shape, the shortest distance to a point on the other shape) does not deviate by more than 10% from the median offset between the two shapes.

Embodiments of the present rodent bait station packaged bundle contain a packaging container and a bait station assembly having a bait station fixed to an anchoring base. In these embodiments, the bait station assembly may be within the
5 packaging container.

Some embodiments of the present rodent bait station packaged bundle include bait located within the bait station. In some of these embodiments, the bait is coupled to the bait station using bait-holding rods.

10 In some embodiments of the present rodent bait station packaged bundle, the packaging container is paper. Some embodiments of the packaging container are paperboard, corrugated fiberboard, or plastic.

Embodiments of the present shipping bundles include a transport pallet, rodent bait station assemblies, and a plastic film wrapped around a portion of the plurality of
15 rodent bait station assemblies to secure the rodent bait station assemblies to the transport pallet and restrict movement of rodent bait station assemblies relative to each other.

Some embodiments of the present shipping bundles include bait located within the bait station. In some of these embodiments, bait-holding rods couple the bait to
20 the bait station.

Some embodiments of the present shipping bundles include a strap securing the rodent bait station assemblies to the transport pallet.

Embodiments of the present methods for assembling a rodent bait station assembly include the steps of positioning a base attachment piece in a fixture, positioning an anchoring base over the base attachment piece so that the base
25

attachment piece contacts an anchoring base attachment surface of the anchoring base, positioning a bait station on the anchoring base such that an attachment position of the bait station aligns with the attachment piece, and fixing the anchoring base to the bait station by positioning a fastening member at the attachment position and coupling the
5 fastening member to the base attachment piece.

Embodiments of the present methods for bundling a plurality of rodent bait station assemblies includes the steps of placing a plurality of rodent bait station assemblies on a transport pallet, and wrapping a plastic film around a portion of the plurality of rodent bait station assemblies to secure the rodent bait station assemblies
10 to the transport pallet and restrict movement of rodent bait station assemblies relative to each other. In these embodiments each rodent bait station assembly may include a bait station fixed to an anchoring base.

Any embodiment of any of the present methods, devices, and systems may consist of or consist essentially of—rather than comprise/include/contain/have—the
15 described functions, steps and/or features. Thus, in any of the claims, the term “consisting of” or “consisting essentially of” may be substituted for any of the open-ended linking verbs recited above, in order to change the scope of a given claim from what it would otherwise be using the open-ended linking verb. Furthermore, the features of the present methods, devices, and systems disclosed above, below
20 (including the claims), and in the figures are interchangeable between embodiments to the extent that they are not inconsistent with the remaining features of a given embodiment.

BRIEF DESCRIPTION OF THE DRAWINGS

The following drawings illustrate by way of example and not limitation.
25 Identical reference numerals do not necessarily indicate an identical structure, system,

or display. Rather, the same reference numeral may be used to indicate a similar feature or a feature with similar functionality. Every feature of each embodiment is not always labeled in every figure in which that embodiment appears, in order to keep the figures clear. **FIGS. 1A, 1B, 2A, 2B, 5A, 5B, 6, and 7** are drawn to scale, meaning the sizes of the depicted elements are accurate relative to each other.

FIGS. 1A and 1B depict perspective views of embodiments of the present rodent bait station assemblies. **FIG. 1B** depicts an embodiment having an attachment tray.

FIGS. 2A and 2B depict exploded perspective views of embodiments of the present rodent bait station assemblies. **FIG. 2B** depicts an embodiment having an attachment tray.

FIG. 3 is a cross-sectional view of the embodiment of **FIG. 1A**, taken along line 3-3.

FIG. 4A is a detailed cross-sectional view of attachment piece **300**, anchoring base attachment surface **220**, and fastening member **400** of the embodiment of **FIG. 1A**. The detailed area shown in **FIG. 4A** is denoted as **4** in **FIG. 3**.

FIGS. 4B-4G are detailed cross-sectional views of alternate embodiments to the embodiment shown in **FIG. 4A**.

FIGS. 5A and 5B illustrate the interior of embodiments of the present bait stations. Bait and bait-holding rods are depicted.

FIG. 6 is a cross-sectional view of an embodiment of the present rodent bait station assemblies having an attachment tray.

FIG. 7 is a bottom view of an embodiment of the present rodent bait station assemblies that does not have an attachment tray.

FIG. 8 depicts an embodiment of a present rodent bait station packaged bundle, having an embodiment of a rodent bait station assembly (depicted generically) packaged within a packaging container.

FIG. 9 depicts an embodiment of a present shipping bundle, having a plurality
5 of present rodent bait station packaged bundles on a transport pallet.

FIG. 10 is a flow chart showing an embodiment of a method for assembling a rodent bait station assembly.

FIG. 11 is a flow chart showing an embodiment of a method for bundling a plurality of rodent bait station assembly.

10 **DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS**

The terms “comprise” (and any form of comprise, such as “comprises” and “comprising”), “have” (and any form of have, such as “has” and “having”), “include” (and any form of include, such as “includes” and “including”) and “contain” (and any form of contain, such as “contains” and “containing”) are open-ended linking verbs.
15 Thus, a method comprising certain steps is a method that includes at least the recited steps, but is not limited to only possessing the recited steps. Likewise, a device or system comprising certain elements includes at least the recited elements, but is not limited to only possessing the recited elements.

The terms “a” and “an” are defined as one or more than one, unless this
20 disclosure expressly requires otherwise. The term “another” is defined as at least a second or more.

In one aspect, the present disclosure provides embodiments that are rodent bait station assemblies. In another aspect, the present disclosure provides embodiments that are rodent bait station packaged bundles that include embodiments of the rodent
25 bait station assemblies. Another aspect of the present disclosure provides shipping

bundles that include a plurality of embodiments of the rodent bait station assemblies. Yet another aspect of the present disclosure provides methods for assembling rodent bait station assemblies.

Embodiments of the present rodent bait station assemblies are depicted in
5 **FIGS. 1A-7.** Rodent bait station assembly **10** includes bait station **100** fixed to anchoring base **200** by attachment piece **300** and fastening member **400**. Anchoring base **200** provides rodent bait station assembly **10** with additional stability compared to an implementation having bait station **100** alone. Bait station **100** is typically formed from plastic (through, for example, injection molding techniques), but may
10 alternately be fabricated from other materials or combinations of materials. Anchoring base **200** may be very heavy relative to bait station **100**, and may be fabricated from materials such as concrete. The concrete may be formed using a vertical mixer that drops a shot of concrete into a form that is then shaken to achieve the desired shape, after which multiple bases can be cured together using any suitable
15 technique. An example of suitable concrete for making bases **200** can be created using a 5 sack mix that yields about 4000 psi (pounds per square inch) concrete; the amount of water in the mix can be minimized and any resulting slump also kept to a minimum. A die or dies can be added to the concrete to achieve a desired color for the base. Soap in the form of an admixture may also be added, such as those that are
20 available from Grace Construction Products. Bases formed from such concrete may be cured by enclosing them, such as with a tarp (e.g., a 3 millimeter thick plastic sheet), and allowing the cure temperature in or around the bases to reach about 105 to about 135 degrees F (Fahrenheit).

Other embodiments of anchoring base **200** may be fabricated from ceramic,
25 rubber, plastic, wood, stone, metal, or another suitable material or combination of

materials. The additional weight provided by anchoring base **200** reduces the likelihood that rodent bait station assembly **10** will be unintentionally moved or tipped, compared to a bait station alone.

Bait station **100** may include lid **110** and base **120**. The lid and base may be
5 integral with each other, and include a “living” hinge, or they may be separate pieces that can be coupled together. Some embodiments include key **160**, and are configured to lock lid **110** to base **120** in a closed position to restrict access to bait **140** within bait station **100**. Some embodiments are configured such that lid **110** can be unlocked from bait station **100** using the key.

10 Referring to **FIGS. 1A-1B** and **2A-2B**, some embodiments of anchoring base **200** and bait station **100** may have substantially the same shape. In this respect, the shape resulting from projecting the outer perimeter of anchoring base **200** onto the plane of anchoring base top surface **210** may be substantially the same as the shape resulting from projecting the outer perimeter of the bait station **200** onto the same
15 plane.

In some embodiments, projecting the outer perimeter of anchoring base **200** onto the plane of anchoring base top surface **210** circumscribes an area that is about 150% or less of the area circumscribed by projecting the outer perimeter of bait station **200** onto the same plane. For example, the projection of the perimeter of
20 anchoring base **200** onto the plane of anchoring base top surface **210** may circumscribe an area that is equal or less than 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 120, 125, 130, 135, 140, 145, or 150 percent of the area circumscribed by the projection of the perimeter of bait station **100** onto the plane of anchoring base top surface **210**.

Referring to **FIGS. 3 and 4A**, fastening member **400** and attachment piece **300** are respectively coupled (one-to-one coupled) to fix bait station **100** (at bait station attachment location **130**) to portion **211** of anchoring base top surface **210** of anchoring base **200**. In the embodiment depicted, fastening member **400** is a self-tapping screw, such as a lag screw. In this embodiment, attachment piece **300** is a fastening plug (labeled as fastening plug **410** in embodiments where a tray is part of the assembly, such as in **FIG. 6**), which is fabricated from plastic and has a through hole having a slightly smaller diameter than the thread major diameter of self-tapping screw fastening member **400**. During the coupling of fastening member **400** and attachment piece **300**, the self-tapping threads of fastening member **400** cut mating threads into attachment piece **300** as fastening member **400** advances along the inner bore of the through hole of attachment piece **300**.

One of ordinary skill in the art, with the benefit of this disclosure, will appreciate that, in other embodiments of the present assemblies, attachment piece **300** may be coupled to fastening member **400** in other ways. For example, fastening member **400** may be a machine screw, and attachment piece **300** may be fabricated with mating threads. Also, in some embodiments, attachment piece **300** may be fabricated from material other than plastic (e.g., metal). Other embodiments of the present assemblies may use attachment piece **300** and fastening member **400** that mate by way of a quarter-turn fastening mechanism. Still other embodiments may use attachment piece **300** that has an externally threaded portion that extends through anchoring base **200**, and bait station **100**, and couples to fastening member **400** that has internal threads, such as a nut.

FIGS. 4B-4G depict examples of other embodiments of the present assemblies in which bait station **100** is coupled to anchoring base **200** in other ways

from what is shown in **FIG. 4A**. In the embodiment shown in **FIG. 4B**, fastening member **400** is a bolt (e.g., a bolt or a screw) and attachment piece **300** is a mating nut.

Attachment piece **300** is not part of the embodiments shown in **FIGS. 4C-4E**.

5 **FIG. 4C** depicts fastening member **400** that is a rivet, such as a solid rivet or a blind rivet. The rivet may be plastic, and may have radially protruding ridges or threads (not shown) that increase the friction force between the rivet and the wall of the passageway in base **200**. In **FIG. 4D**, fastening member **400** may be one or more cable ties (e.g., half-inch cable ties), each of which is threaded through matching pairs
10 of holes in bait station **100** and anchoring base **200**. The pairs of holes may be positioned in any suitable location in the station and the base. For example, in some embodiments, the pairs of holes that comprise a matching pair of holes may be located very near each other, as is depicted in **FIG. 4C**. In other embodiments, a longer cable tie may be used and the pairs of holes that comprise a matching pair of
15 holes may be farther apart, such as the hole locations depicted in **FIGS. 2A, 2B**, and **7**.

FIG. 4E depicts an embodiment in which bait station **100** may be coupled to anchoring base **200** using fastening member **400** that is an adhesive, two-sided tape, or that includes hook-and-loop fasteners.

20 The embodiments depicted in **FIGS. 4B-4D** include a counterbore in anchoring base bottom surface **230** to provide clearance for attachment piece **300** and/or fastening member **400**. In some embodiments, the counterbore may be configured to correspond to the shape of attachment piece **300** and/or fastening member **400** (e.g., a hexagonal counterbore to correspond to attachment piece **300**
25 that is a hexagonal nut).

FIG. 4F depicts an embodiment that does not have a counterbore. Instead, bottom surface **230** includes surface features such as, for example, ridges or ribs, that are configured such that when rodent bait station assembly **10** is deployed (e.g., placed in a location and orientation for use as a rodent bait station), bottom surface **230** contacts the deployment surface (e.g., the ground or the floor of a building), and attachment piece **300** and fastening member **400** do not contact the deployment surface.

In other embodiments, such as the one shown in **FIG. 4G**, attachment piece **300** and/or fastening member **400** may contact the deployment surface. In some of these embodiments, attachment piece **300** and/or fastening member **400** may be configured with features for contacting the ground. For example, fastening member **400** may be a threaded bolt and attachment piece **300** may be a rubber or plastic “foot” that contains mating threads.

In some embodiments, both attachment piece **300** and fastening member **400** may be configured to be located exterior to the volume defined by bait station **100**. This may be accomplished by the use of, for example, a mounting flange on bait station **100**, or brackets that couple to a side of bait station **100** and to anchoring base **200**.

Referring to **FIG. 4A**, the coupling of attachment piece **300** and fastening member **400** may result in compressive force **90** being applied by attachment piece **300** to anchoring base **200**, thereby fixing anchoring base **200** to bait station **100**. Attachment piece **300** may contact anchoring base **200** at anchoring base attachment surface **220**. In the depicted embodiment, anchoring base attachment surface **220** and attachment piece **300** are frusto-conical in shape (shaped like a frustum, or cone, with the top portion removed). This may facilitate simplified alignment during assembly,

and allow attachment piece **300** to be drawn into anchoring base attachment surface **220** of anchoring base **200** as fastening member **400** is coupled to attachment piece **300**.

Some embodiments include features that prevent rotation of attachment piece **300** during coupling to fastening member **400**. Such anti-rotational features may include, for example, a configuration having a slightly eccentric radial cross-section (e.g., an oblong-shaped cross-section) of a generally frusto-conical attachment surface **220** of anchoring base **200**. When such a configuration is coupled to a frusto-conical fastening plug serving as attachment piece **300**, the fastening plug may deform to comply with the eccentric cross-section of attachment surface **220**, thereby limiting the rotation of the fastening plug. **FIG. 7** is a bottom view depicting a fastening plug positioned within an oblong attachment surface **220**. Other embodiment may include attachment piece **300** and/or anchoring base attachment surface **220** that are not frusto-conical in shape.

Referring to **FIGS. 1B, 2B, 5B, and 6**, some embodiments of the present rodent bait station assemblies include attachment tray **350**, which may serve to partially enclose anchoring base **200**. Partially enclosing anchoring base **200** may serve to protect, and to contain fragments of, embodiments of anchoring base **200** that are prone to breaking or fragmenting (e.g., embodiments comprising concrete). Enclosure of anchoring base **200** may also provide improved aesthetics.

In some embodiments, attachment piece **300** is part of attachment tray **350**. In some of these embodiments, the coupling of fastening member **400** to attachment piece **300** (and therefore to attachment tray **350**) does not involve direct contact between fastening member **400** and attachment piece **300**, but instead is accomplished

using a fastening plug **410** that is in contact with both fastening member **400** and attachment piece **300**.

Referring to **FIGS 5A, 5B, and 6**, bait **140** may be held in place within bait station **100** by bait-holding rods **150**, which may be constrained within bait station **100** by physical means such as, for example, slots configured to constrain holding rods **150**. One of ordinary skill in the art will appreciate that other methods of constraining bait **140** may be used in other embodiments of the present disclosure.

Indented feature **231** located on anchoring base bottom surface **230** of some embodiments of anchoring base **200** is depicted in **FIG. 6** and **FIG. 7**. Indented feature **231** may serve to reduce the amount of material and the weight of anchoring base **200**. In embodiments that do not include attachment tray **350**, indented feature **231** may serve the additional purpose of increasing resistance to sliding for a deployed rodent bait station assembly **10**. The embodiment depicted in **FIGS. 6-7** have indented feature **231** that is a channel. Those of ordinary skill in the art will recognize that many other geometries are possible (e.g., a waffle-like grid).

An embodiment of the present rodent bait station packaged bundles is depicted in **FIG. 8**. In this embodiment rodent bait station packaged bundle **20** includes rodent bait station assembly **10** contained within packaging container **500**. Packaging container **500** may be fabricated using paper, such as paperboard (e.g., non-corrugated boxes), corrugated fiberboard (e.g., corrugated cardboard boxes), plastic (e.g., plastic packaging), or any other suitable packaging material. Embodiments of packaging container **500** may include a combination of materials (e.g., blister packs that include formed plastic as well as paperboard). Some embodiments of rodent bait station packaged bundle **20** may include packaging container **500** that is a shrink-wrap plastic film. Packing material **510** may also be included within packaging container **500** to

protect rodent bait station assembly **10** from possible damage incurred during shipping. Examples of packing material **510** include bubble wrap and polystyrene foam.

An embodiment of the present shipping bundle **30** is depicted in **FIG. 9**. In this embodiment, several rodent bait station assemblies **10** (depicted generically) are positioned on transport pallet **700**. Multiple rows of rodent bait station assembly **10** may be positioned on transport pallet **700**, and layer stacking material **710** may be used as a separator between the individual rows of rodent bait station assemblies **10**. Transport pallet **700** may be a wooden pallet, a plastic pallet, or any other suitable pallet or skid that can be used to aid in shipping large numbers of products such as rodent bait station assemblies **10**. The individual rodent bait station assemblies **10** that are part of shipping bundle **30** may or may not be individually packaged within rodent bait station packaged bundles **20**. In some embodiments of shipping bundle **30**, plastic film **600** and/or strap **800** may be used to tie down the individual rodent bait station assemblies **10** to transport pallet **700**, so as to restrict the movement of individual rodent bait station assemblies **10** relative to each other. Furthermore, bundle **30** may include a film that is wrapped around multiple groups of assemblies that have been wrapped together with a similar film, thus creating a large bundle comprising multiple smaller bundles that each comprise multiple assemblies **10**. For example, in some embodiments, bundle **30** comprises 240 total assemblies **10** wrapped with a film and grouped as follows: four stacked (one on top of the other) smaller bundles that each includes a pallet (e.g., 40 inches by 48 inches) on which four stacked layers of 15 assemblies **10** each have been positioned and wrapped with a film, where two of the smaller bundles that are stacked and that each comprises 60 assemblies have also been wrapped with a film to form an intermediate bundle, and

the two intermediate bundles are stacked on each other to form the embodiment of bundle 30 that comprises the 240 total assemblies 10.

FIG. 10 presents a flow chart of the steps involved in an embodiment of the present methods for assembling a rodent bait station assembly. This embodiment includes positioning a base attachment piece (e.g., attachment piece 300) in a fixture (step 901), positioning an anchoring base (e.g., anchoring base 200) over the base attachment piece such that the base attachment piece contacts an anchoring base attachment surface (e.g., anchoring base attachment surface 220) of the anchoring base (step 902), positioning a bait station (e.g., bait station 100) on the anchoring base such that an attachment position (e.g., bait station attachment location 110) of the bait station aligns with the attachment piece (step 903), and fixing the anchoring base to the bait station by positioning a fastening member (e.g., fastening member 400) at the attachment position and coupling the fastening member to the base attachment piece (step 904). These steps may be performed manually by an operator, by an operator with the aid of assembly automation equipment, and/or by a fully automated assembly system. One of ordinary skill in the art will appreciate that the “fixture” of step 901 may be any device that is used for holding parts in one or more positions during an assembly process using those parts.

FIG. 11 presents a flow chart of the steps involved in an embodiment of the present method for bundling a plurality of rodent bait station assemblies for shipment. This embodiment includes placing a plurality of rodent bait station assemblies (e.g., rodent bait station assembly 10) on a transport pallet (e.g., transport pallet 700) (step 1101) and wrapping a plastic film (e.g., plastic film 600) around a portion of the plurality of rodent bait station assemblies to secure the rodent bait station assemblies to the transport pallet and restrict movement of rodent bait station assemblies relative

to each other (step **1102**). Such wrapping may be accomplished using, for example, a conventional stretch wrap machine.

* * *

Descriptions of well known assembly techniques, components, and equipment
5 have been omitted so as not to unnecessarily obscure the present methods, apparatuses, and systems in unnecessary detail. The descriptions of the present methods and apparatuses are exemplary and non-limiting. Certain substitutions, modifications, additions and/or rearrangements falling within the scope of the claims, but not explicitly listed in this disclosure, may become apparent to those of ordinary
10 skill in the art based on this disclosure. For example, some embodiments may use attachment piece **300** that has an externally threaded portion that extends through anchoring base **200**, and bait station **100**, and couples to fastening member **400** that has internal threads, such as a nut. Some embodiments may include attachment piece **300** and/or anchoring base attachment surface **220** that are not frusto-conical in shape.

15 The appended claims are not to be interpreted as including means-plus-function limitations, unless such a limitation is explicitly recited in a given claim using the phrase(s) “means for” and/or “step for,” respectively.

CLAIMS

1. A rodent bait station assembly comprising:
 - a bait station;
 - an anchoring base including:
 - an anchoring base top surface having a portion that is in contact with the bait station; and
 - one or more anchoring base attachment surfaces that are disposed at an oblique angle relative to the anchoring base top surface;
 - one or more attachment pieces respectively in contact with the one or more anchoring base attachment surfaces; and
 - one or more fastening members in contact with the bait station and respectively coupled to the one or more attachment pieces;
 where:
 - the anchoring base is fixed to the bait station by a compressive force that is normal to the anchoring base top surface, the compressive force being applied to the anchoring base by the one or more attachment pieces; and
 - the one or more attachment pieces are peripheral to the anchoring base prior to respectively coupling the one or more fastening members to the one or more attachment pieces.
2. The rodent bait station assembly of claim 1, where the one or more attachment pieces are frusto-conically shaped fastening plugs that are respectively in contact with the one or more fastening members.
3. The rodent bait station assembly of claim 1, where:

the anchoring base further includes an anchoring base bottom surface that is substantially parallel and opposite the anchoring base top surface; and
the anchoring base bottom surface comprises indented features.

4. The rodent bait station assembly of claim 1, where the anchoring base comprises concrete.
5. The rodent bait station assembly of claim 1, where the bait station is configured with a lid.
6. The rodent bait station assembly of claim 5, further comprising a removable key, where the bait station includes a lock configured such that the lid can be unlocked from the bait station using the key.
7. The rodent bait station assembly of claim 1, where the one or more attachment pieces comprise plastic.
8. The rodent bait station assembly of claim 1, where the bait station comprises a base portion and a lid that is integrally attached to the base portion via a hinge.
9. The rodent bait station assembly of claim 1, further comprising bait located within the bait station.
10. The rodent bait station assembly of claim 1, where the one or more anchoring base attachment surfaces are frusto-conically shaped.
11. The rodent bait station assembly of claim 1, where the one or more attachment pieces are part of an attachment tray.
12. The rodent bait station assembly of claim 11, where the one or more fastening members are coupled to the one or more attachment pieces using one or more frusto-conically shaped

fastening plugs that are respectively in contact with the one or more fastening members and with the one or more attachment pieces.

13. The rodent bait station assembly of claim 1, where projecting an outer perimeter of the anchoring base onto a plane of the anchoring base attachment surface circumscribes a first area that is 110% or less than a second area circumscribed by projecting the outer perimeter of the bait station onto the plane of the anchoring base attachment surface.

14. The rodent bait station assembly of claim 1, where a first shape resulting from projecting the outer perimeter of the anchoring base onto a plane of the anchoring base attachment surface is substantially the same as a second shape resulting from projecting the outer perimeter of the bait station onto the plane of the anchoring base attachment surface.

15. The rodent bait station assembly of claim 1, where the anchoring base comprises ceramic material.

16. The rodent bait station assembly of claim 9, further comprising bait-holding rods that couple the bait to the bait station.

17. The rodent bait station assembly of claim 1, where the one or more attachment pieces are frusto-conically shaped prior to being coupled to the base attachment surface.

18. The rodent bait station assembly of claim 1, where the one or more fastening members comprise self-tapping screws.

19. A rodent bait station packaged bundle comprising:

a packaging container; and

a bait station assembly within a plastic container, the bait station assembly comprising:

a bait station;

an anchoring base including:

an anchoring base top surface having a portion that is in contact with the
 bait station; and
 one or more anchoring base attachment surfaces that are disposed at an
 oblique angle relative to the anchoring base top surface;
 one or more attachment pieces respectively in contact with the one or more
 anchoring base attachment surfaces; and
 one or more fastening members in contact with the bait station and respectively
 coupled to the one or more attachment pieces;

where:

the anchoring base is fixed to the bait station by a compressive force that
 is normal to the anchoring base top surface, the compressive force
 being applied to the anchoring base by the one or more attachment
 pieces; and

the one or more attachment pieces are peripheral to the anchoring base
 prior to respectively coupling the one or more fastening members
 to the one or more attachment pieces.

20. The rodent bait station packaged bundle of claim 19, further comprising bait located within the bait station.

21. The rodent bait station assembly of claim 20, further comprising bait-holding rods that couple the bait to the bait station.

22. The rodent bait station packaged bundle of claim 19, where the container comprises paper.

23. The rodent bait station packaged bundle of claim 22, where the container comprises paperboard.
24. The rodent bait station packaged bundle of claim 22, where the container comprises corrugated fiberboard.
25. The rodent bait station packaged bundle of claim 19, where the container comprises plastic.
26. A shipping bundle comprising:
 - a transport pallet;
 - a plurality of rodent bait station assemblies, each comprising:
 - a bait station;
 - an anchoring base including:
 - an anchoring base top surface having a portion that is in contact with the bait station; and
 - one or more anchoring base attachment surfaces that are disposed at an oblique angle relative to the anchoring base top surface;
 - one or more attachment pieces respectively in contact with the one or more anchoring base attachment surfaces; and
 - one or more fastening members in contact with the bait station and respectively coupled to the one or more attachment pieces;
 - where:
 - the anchoring base is fixed to the bait station by a compressive force that is normal to the anchoring base top surface, the compressive force

being applied to the anchoring base by the one or more attachment pieces; and

the one or more attachment pieces are peripheral to the anchoring base prior to respectively coupling the one or more fastening members to the one or more attachment pieces; and

a plastic film wrapped around a portion of the plurality of rodent bait station assemblies to secure the rodent bait station assemblies to the transport pallet and restrict movement of rodent bait station assemblies relative to each other.

27. The shipping bundle of claim 26, further comprising bait located within each bait station.

28. The shipping bundle of claim 27, further comprising bait-holding rods that couple the bait to the bait station.

29. A shipping bundle comprising:

a transport pallet;

a plurality of rodent bait station assemblies, each comprising:

a bait station;

an anchoring base including:

an anchoring base top surface having a portion that is in contact with the bait station; and

one or more anchoring base attachment surfaces that are disposed at an oblique angle relative to the anchoring base top surface;

one or more attachment pieces respectively in contact with the one or more anchoring base attachment surfaces; and

one or more fastening members in contact with the bait station and respectively
coupled to the one or more attachment pieces;

where:

the anchoring base is fixed to the bait station by a compressive force that
is normal to the anchoring base top surface, the compressive force
being applied to the anchoring base by the one or more attachment
pieces; and

the one or more attachment pieces are peripheral to the anchoring base
prior to respectively coupling the one or more fastening members
to the one or more attachment pieces; and

a strap securing the rodent bait station assemblies to the transport pallet, the strap
restricting movement of rodent bait station assemblies relative to each other.

30. The shipping bundle of claim 29, further comprising bait located within each bait station.

31. The shipping bundle of claim 30, further comprising bait-holding rods that couple the bait
to the bait station.

1/14

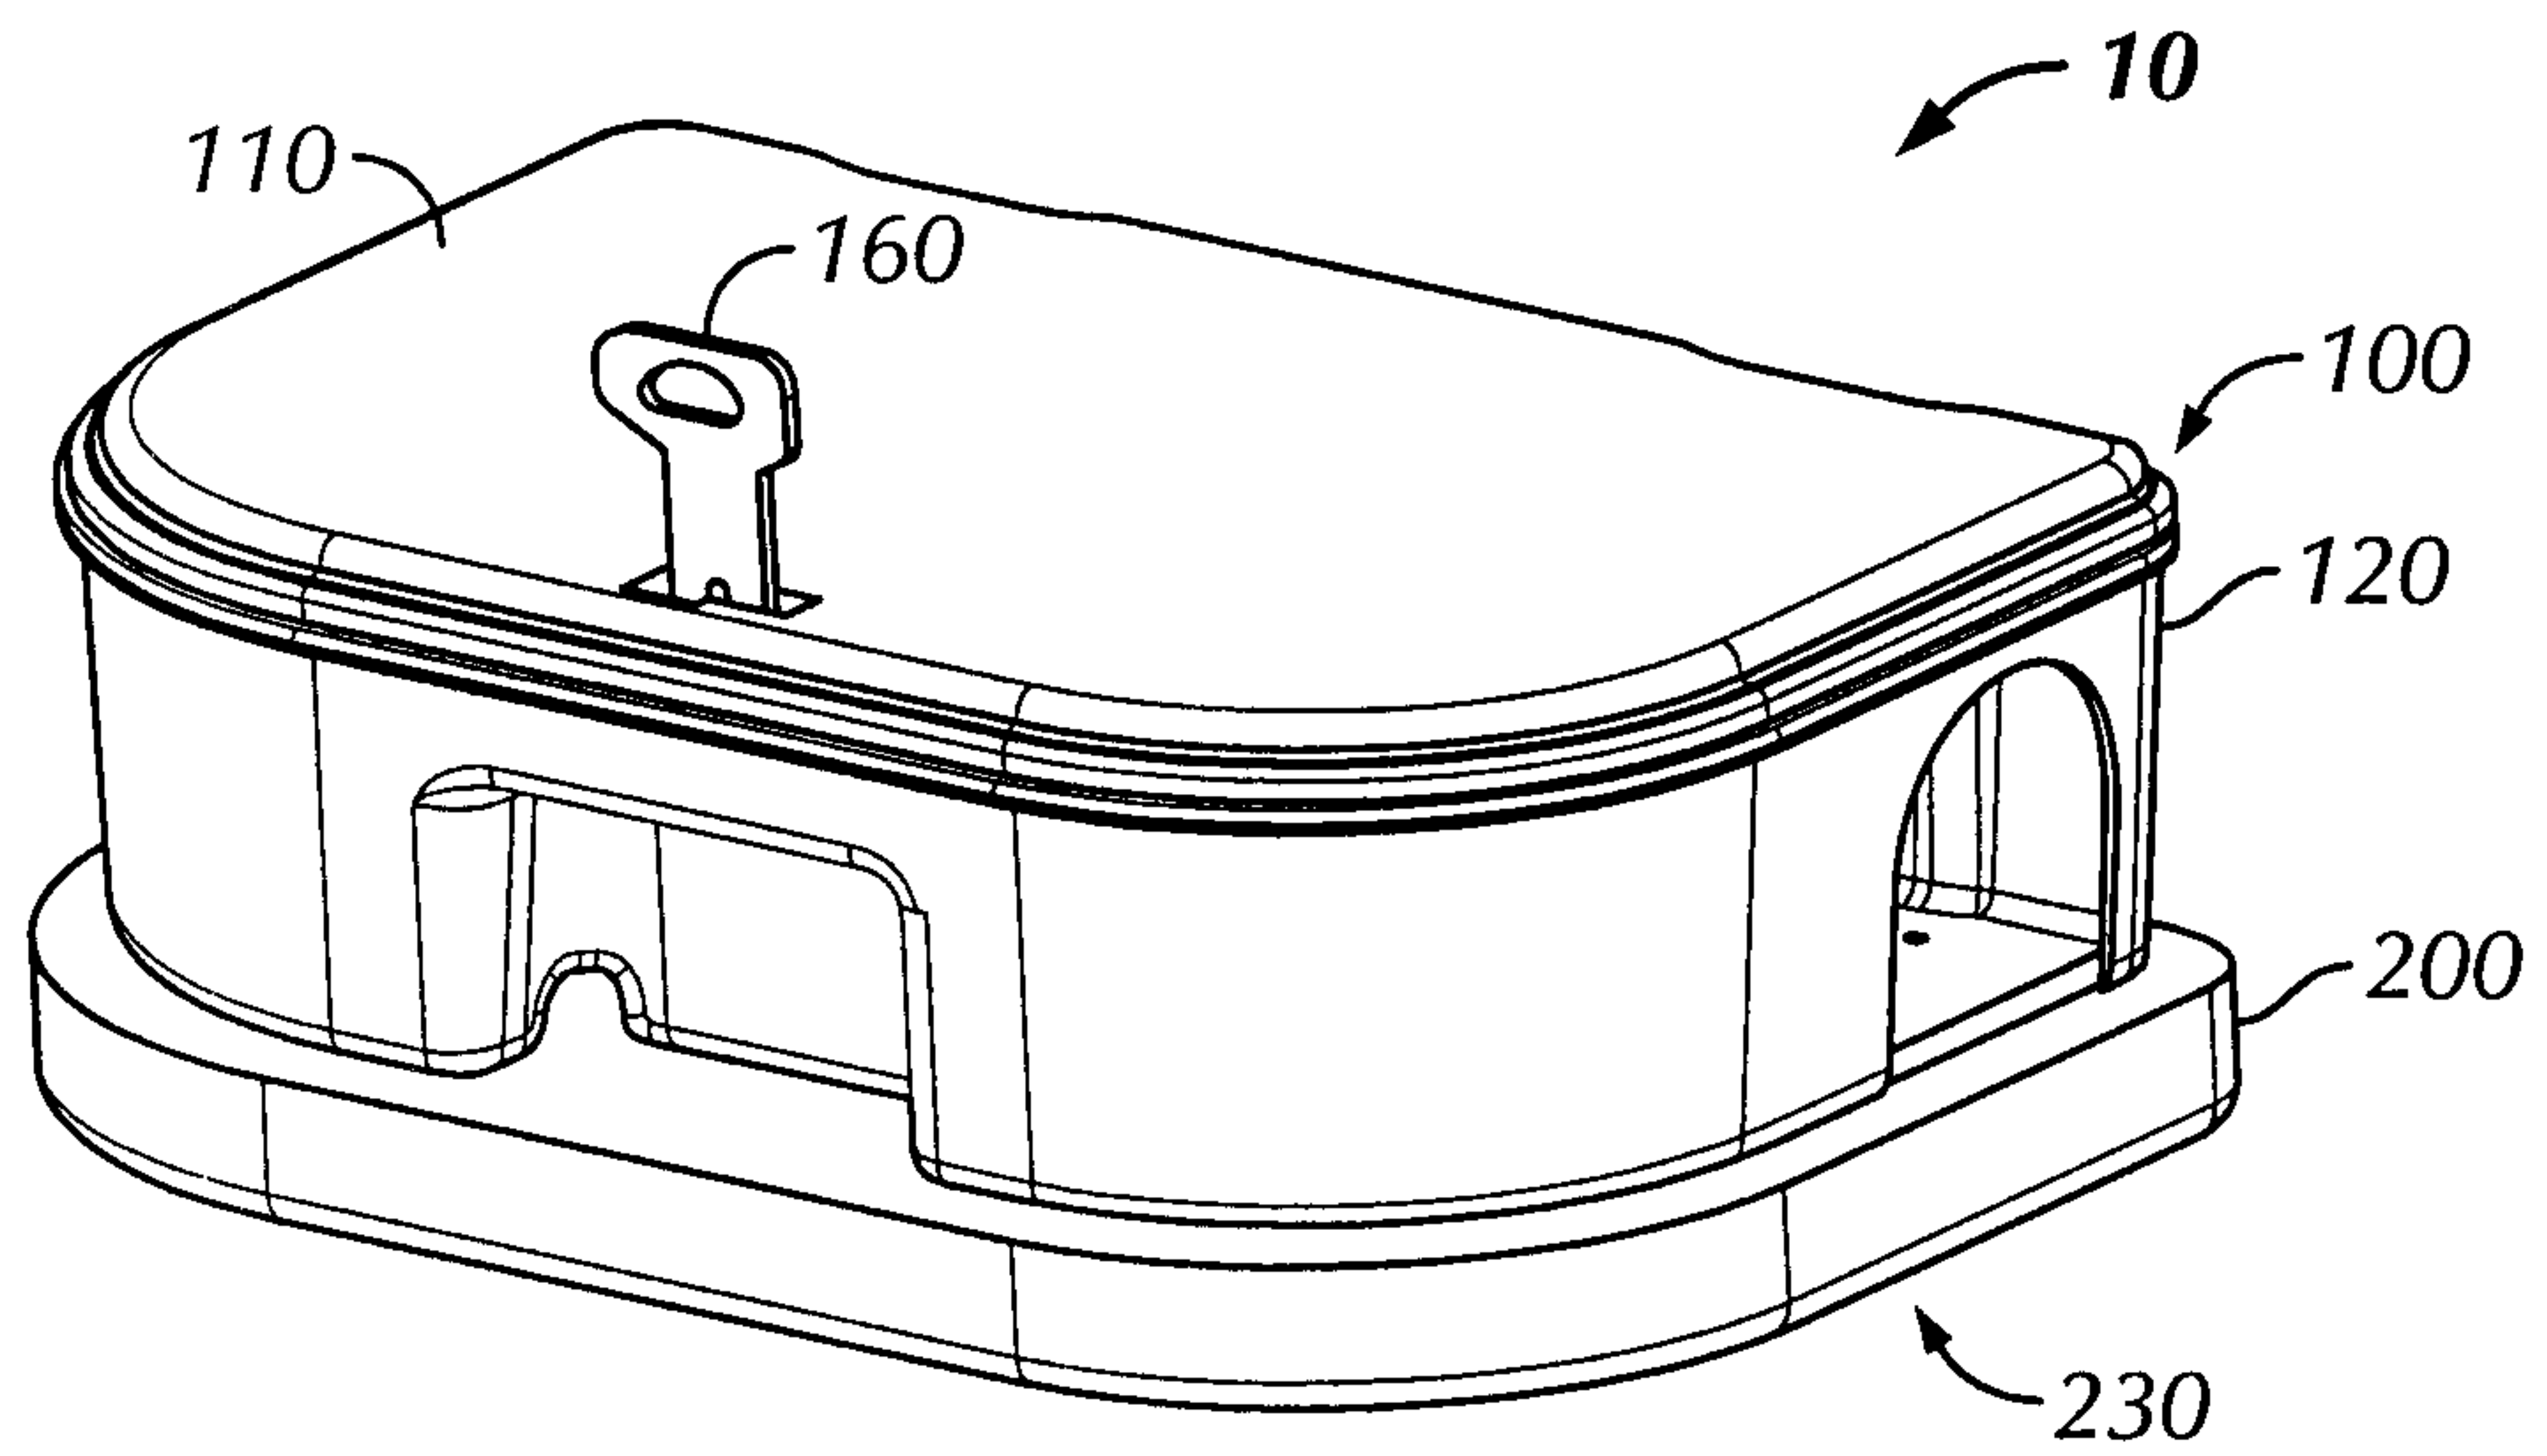


FIG. 1A

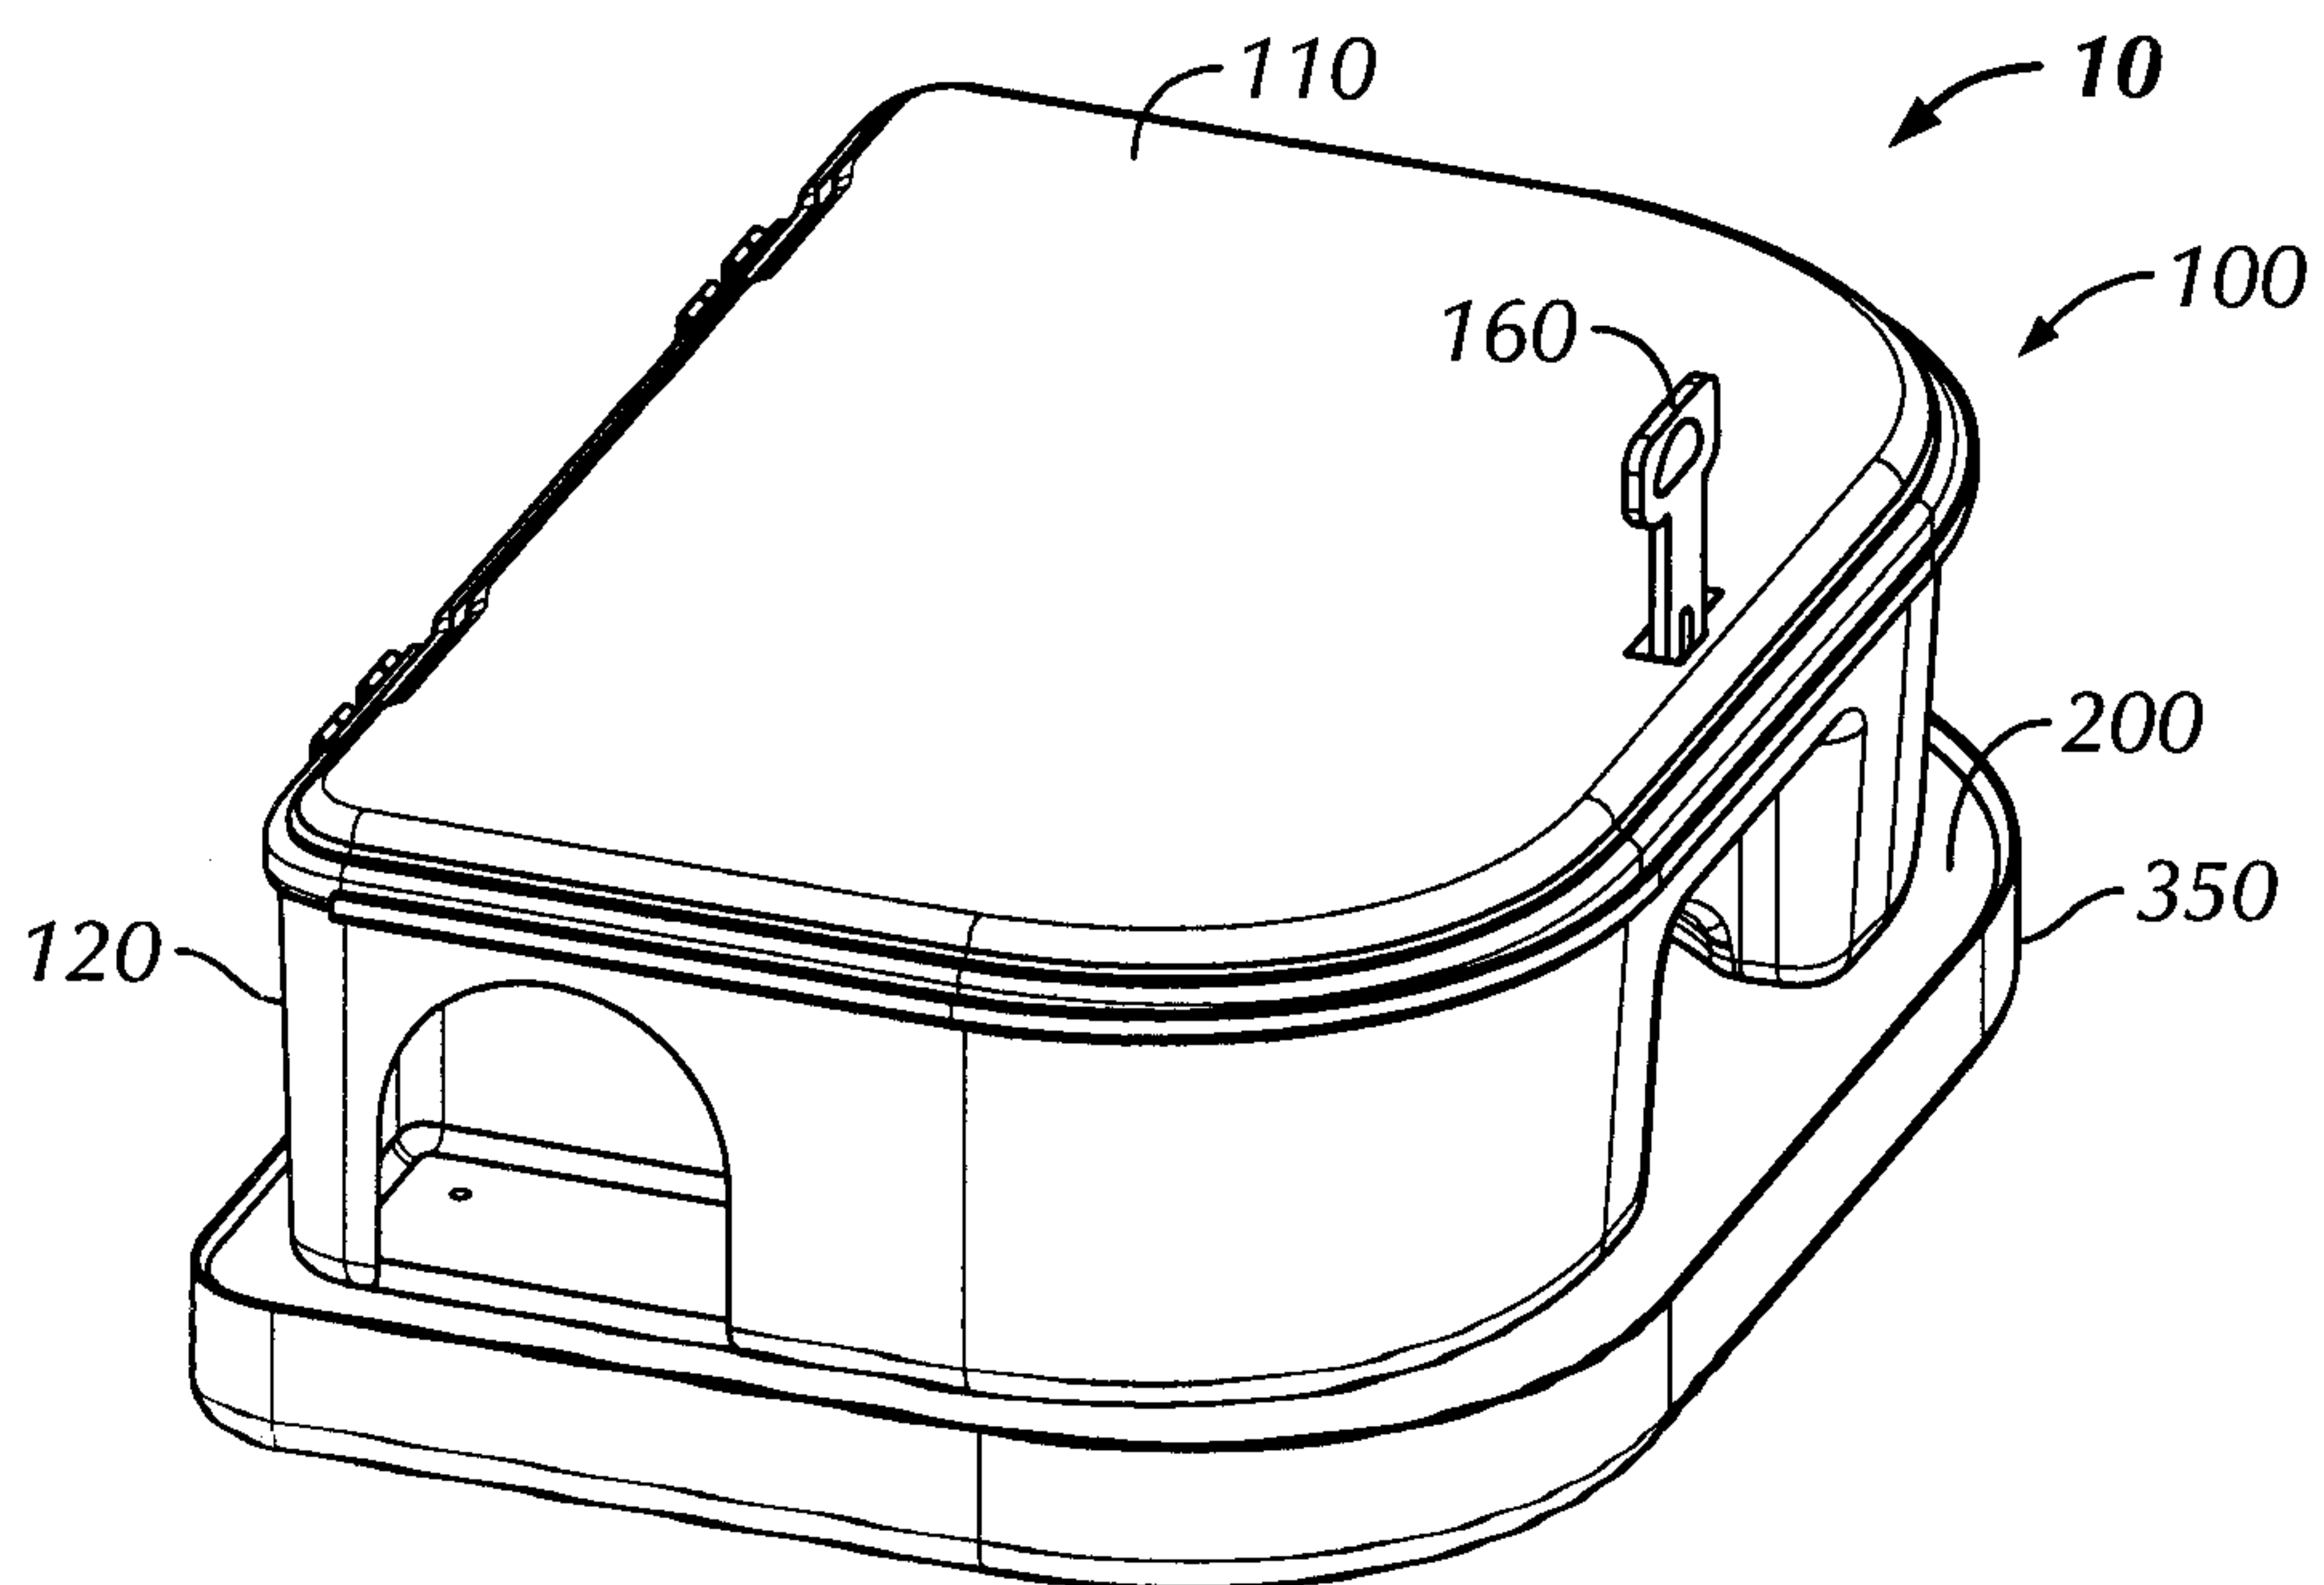


FIG. 1B

2/14

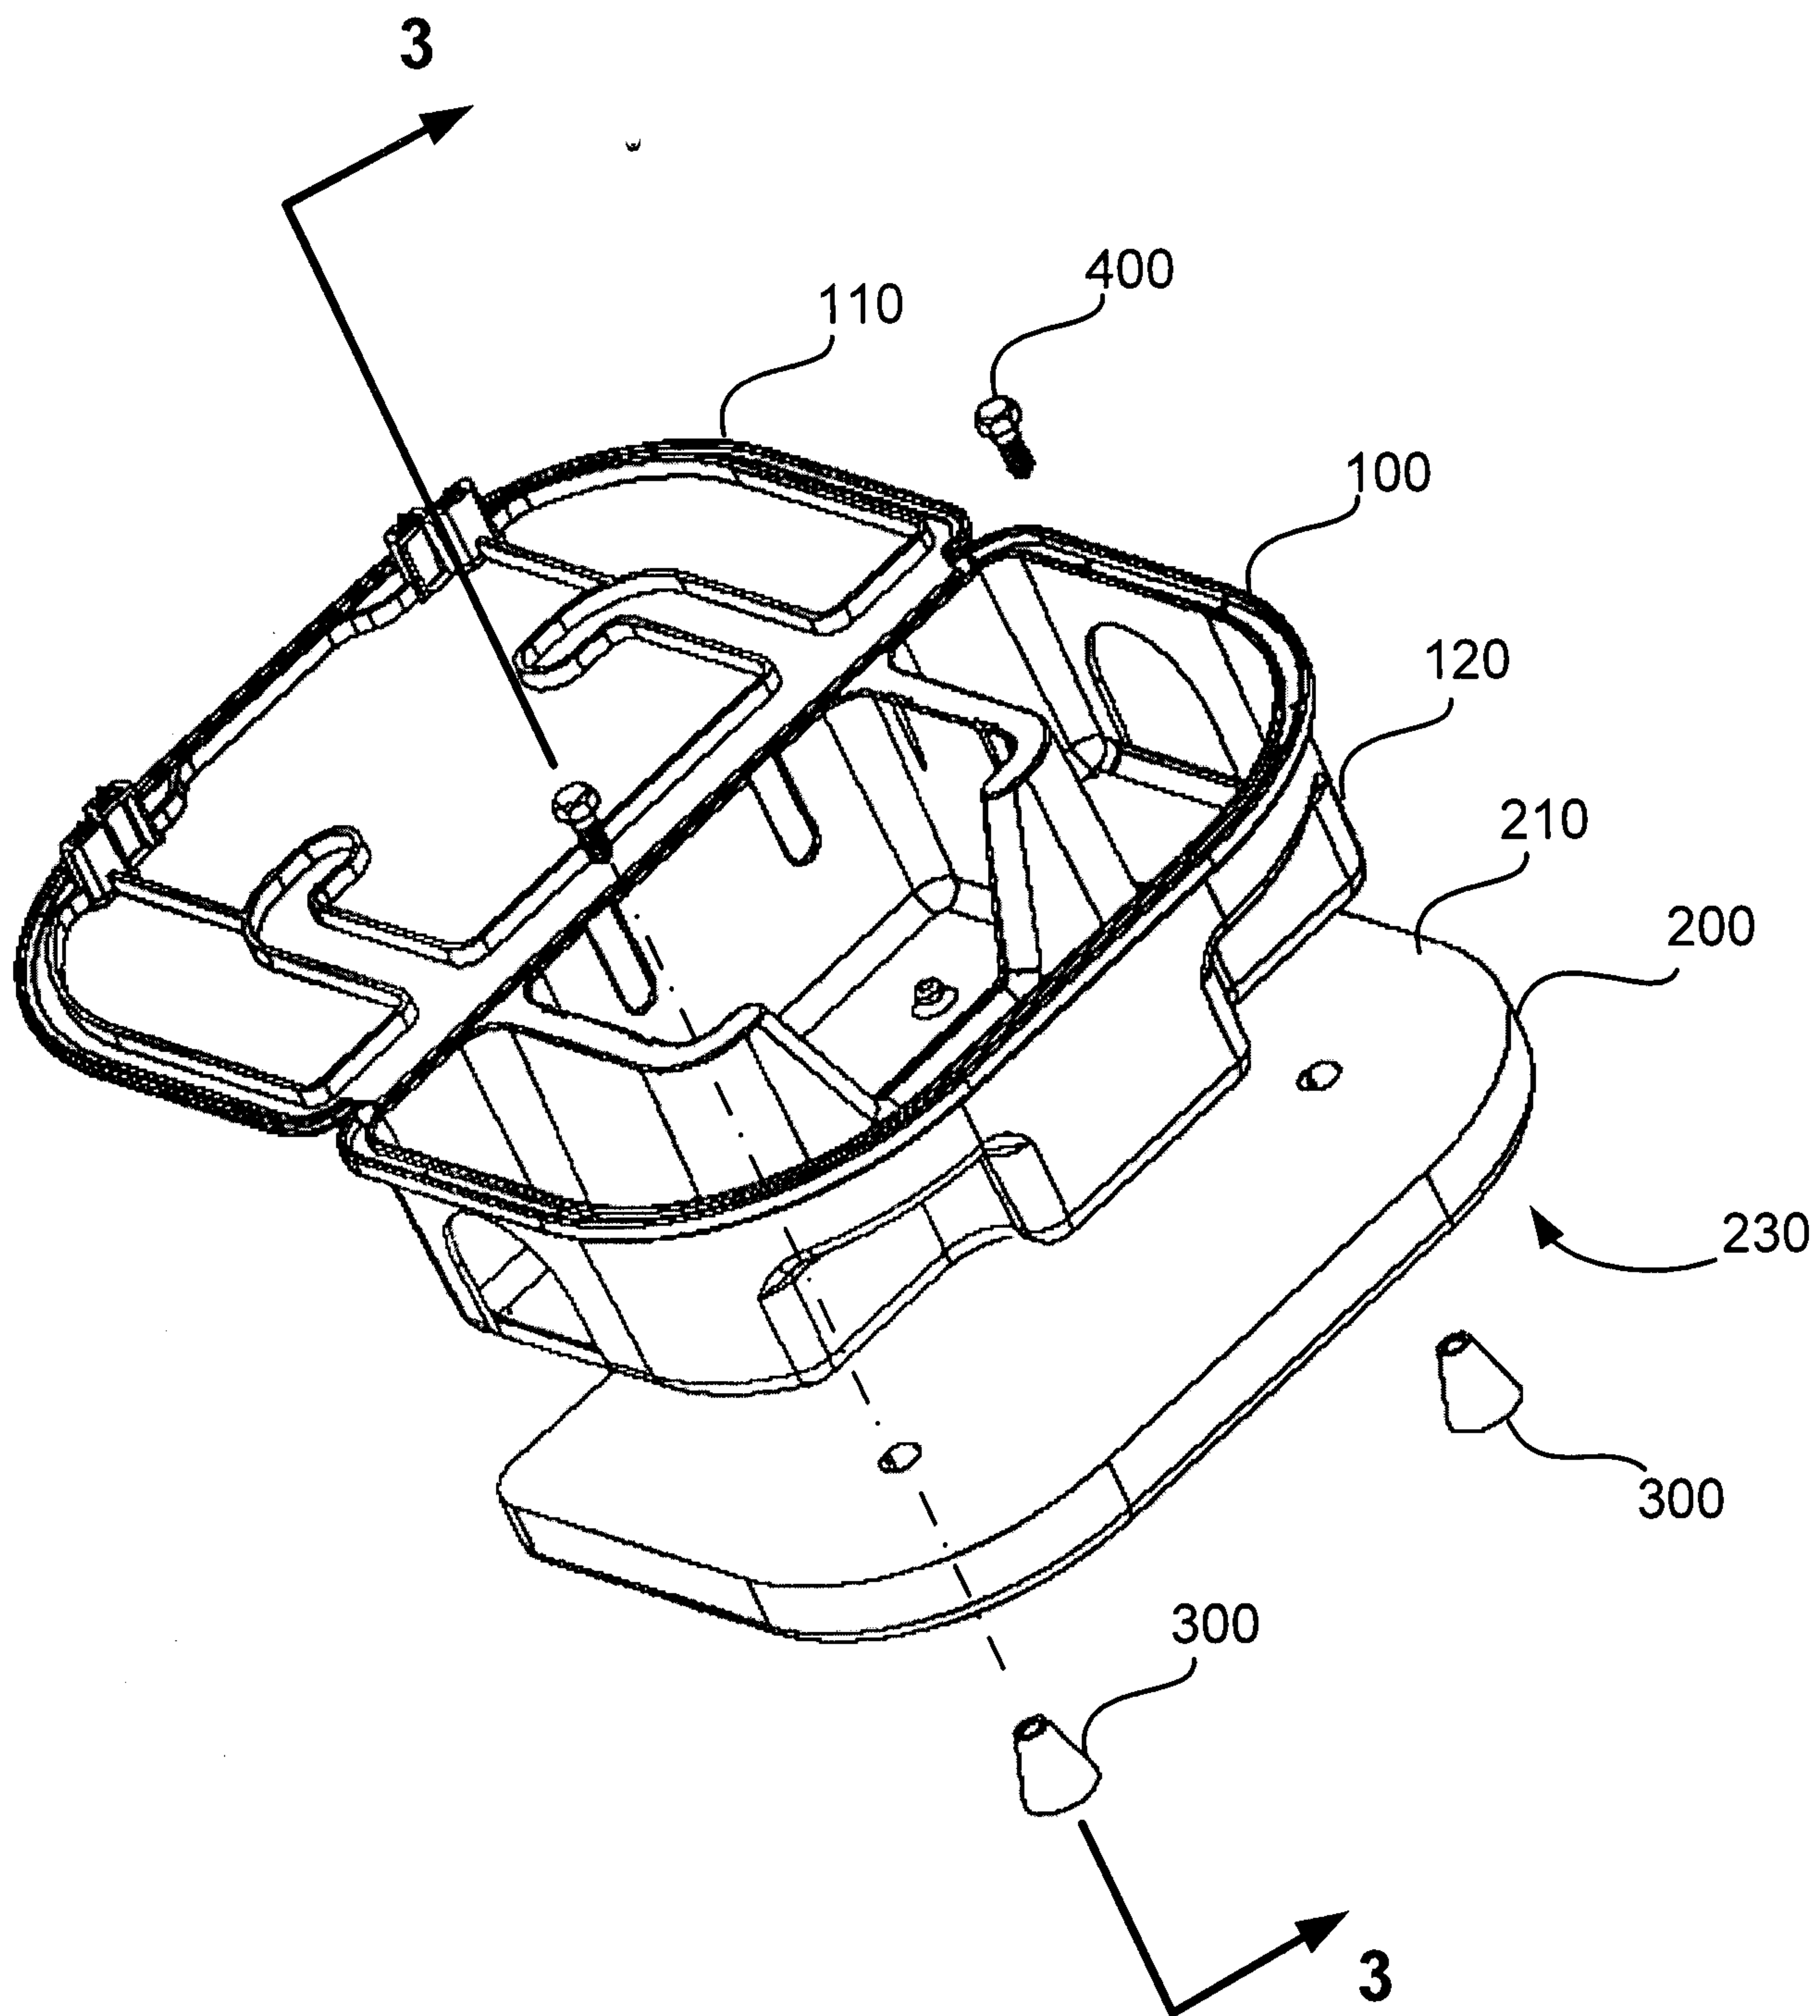


FIG. 2A

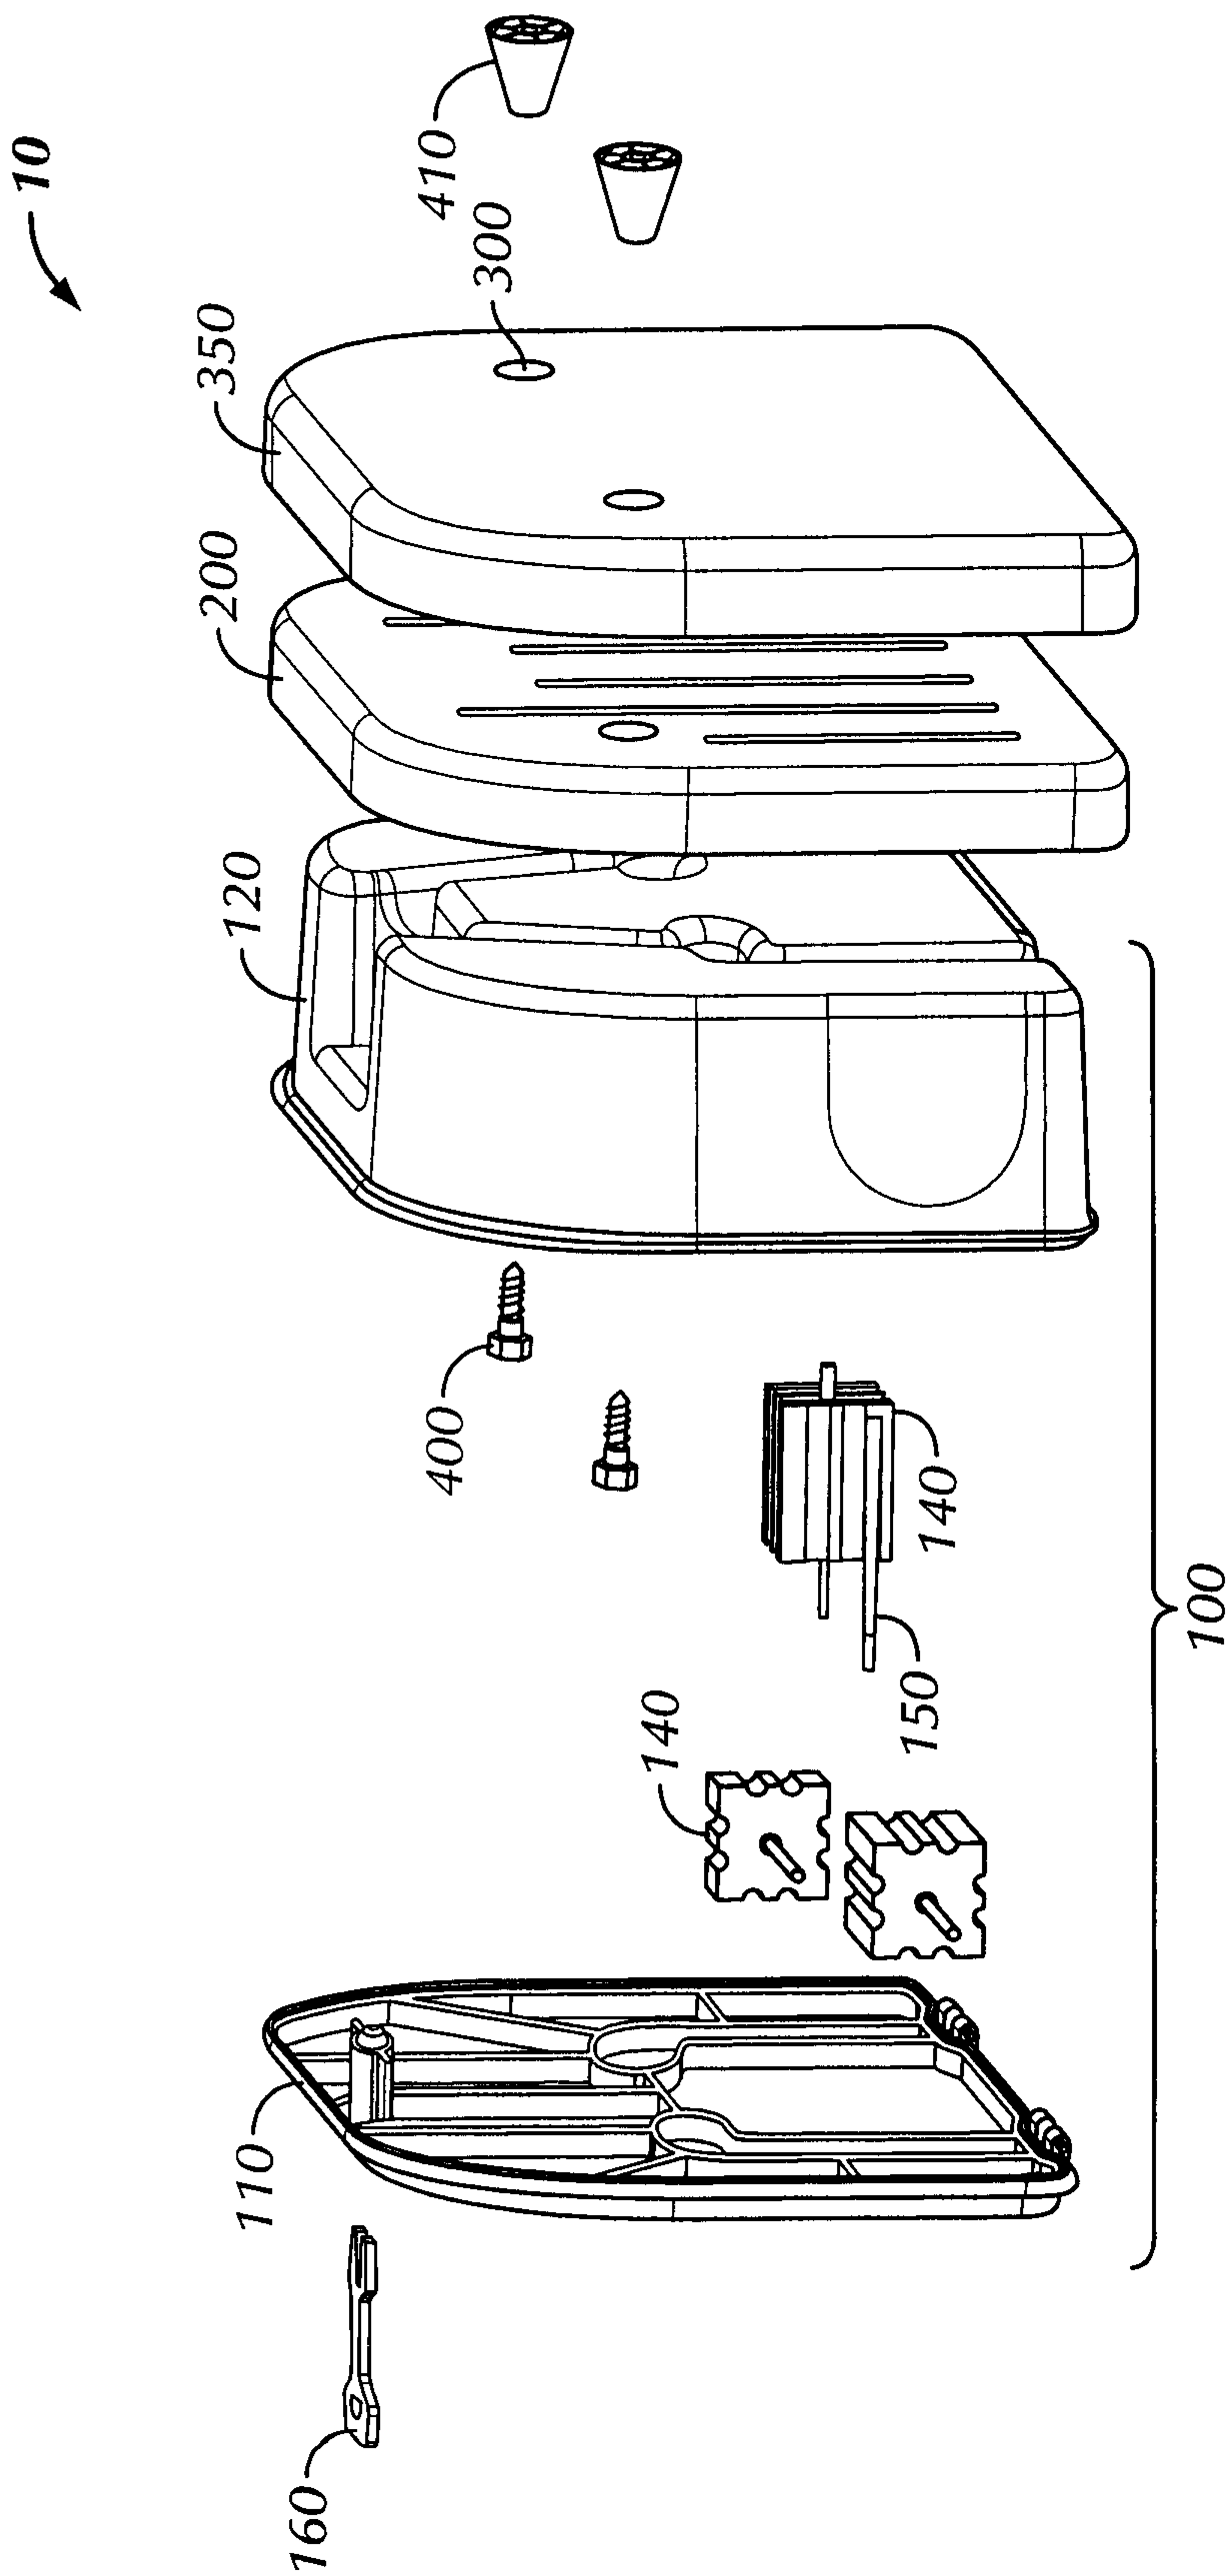
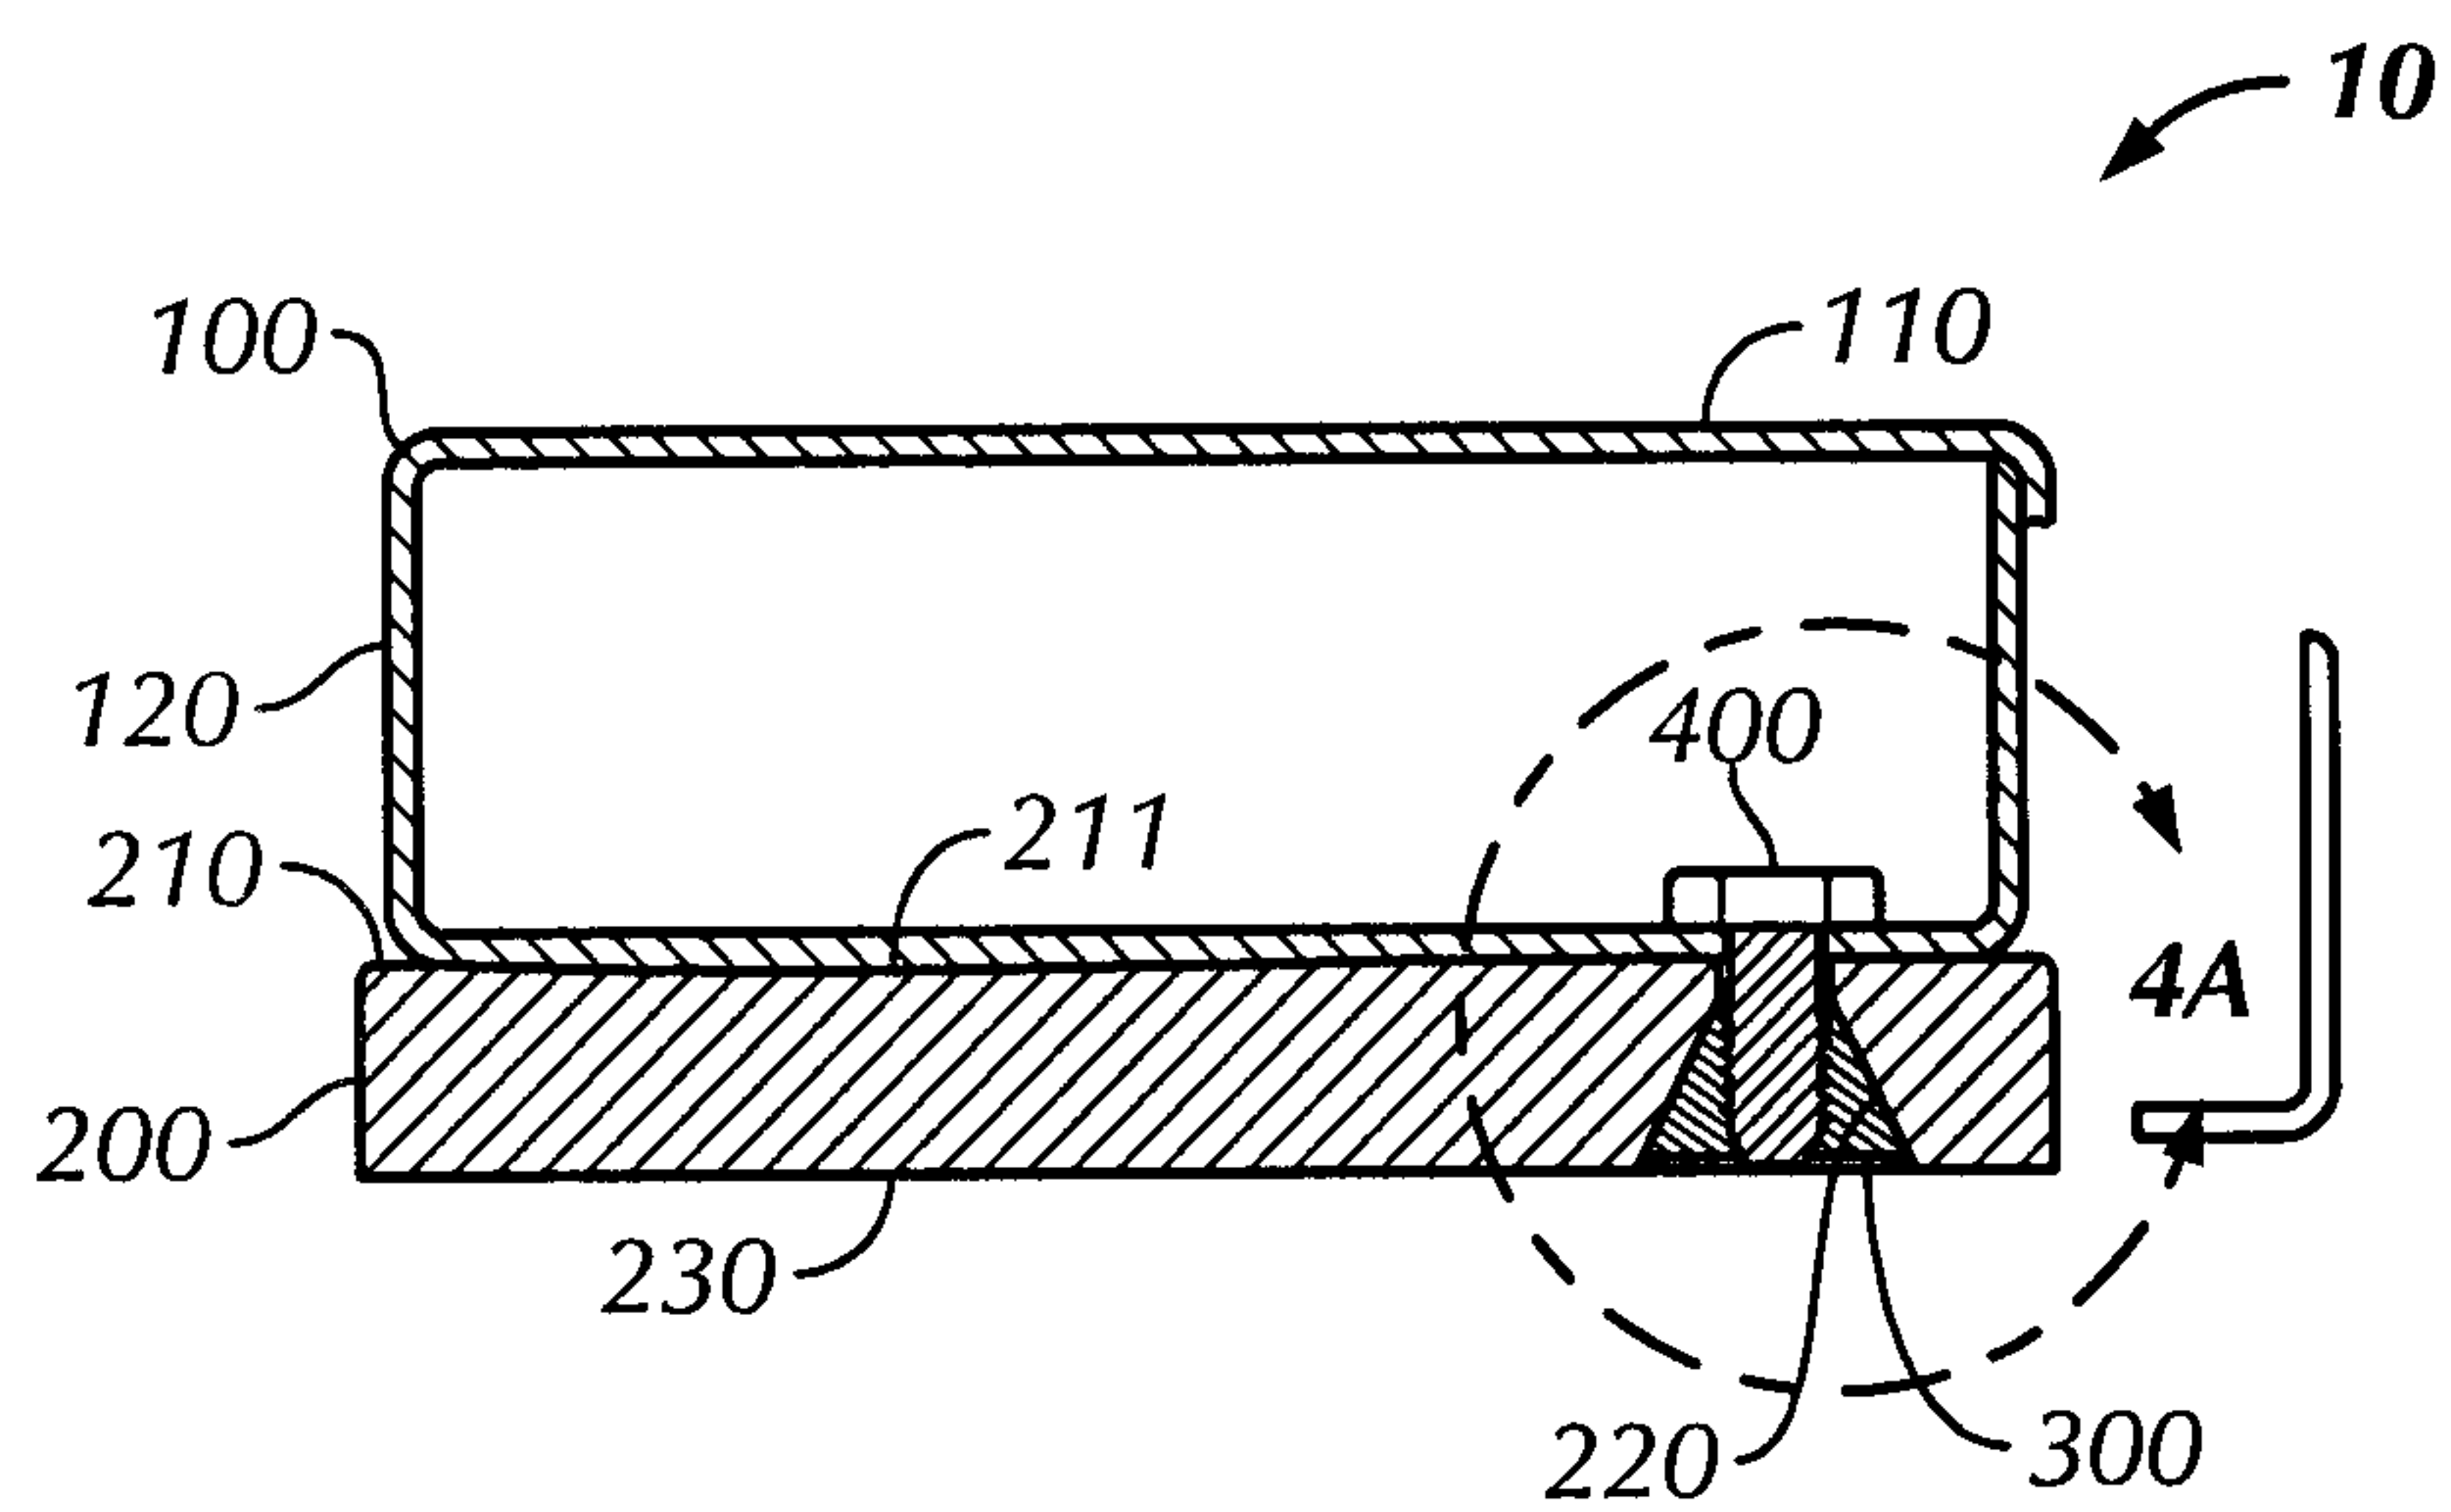
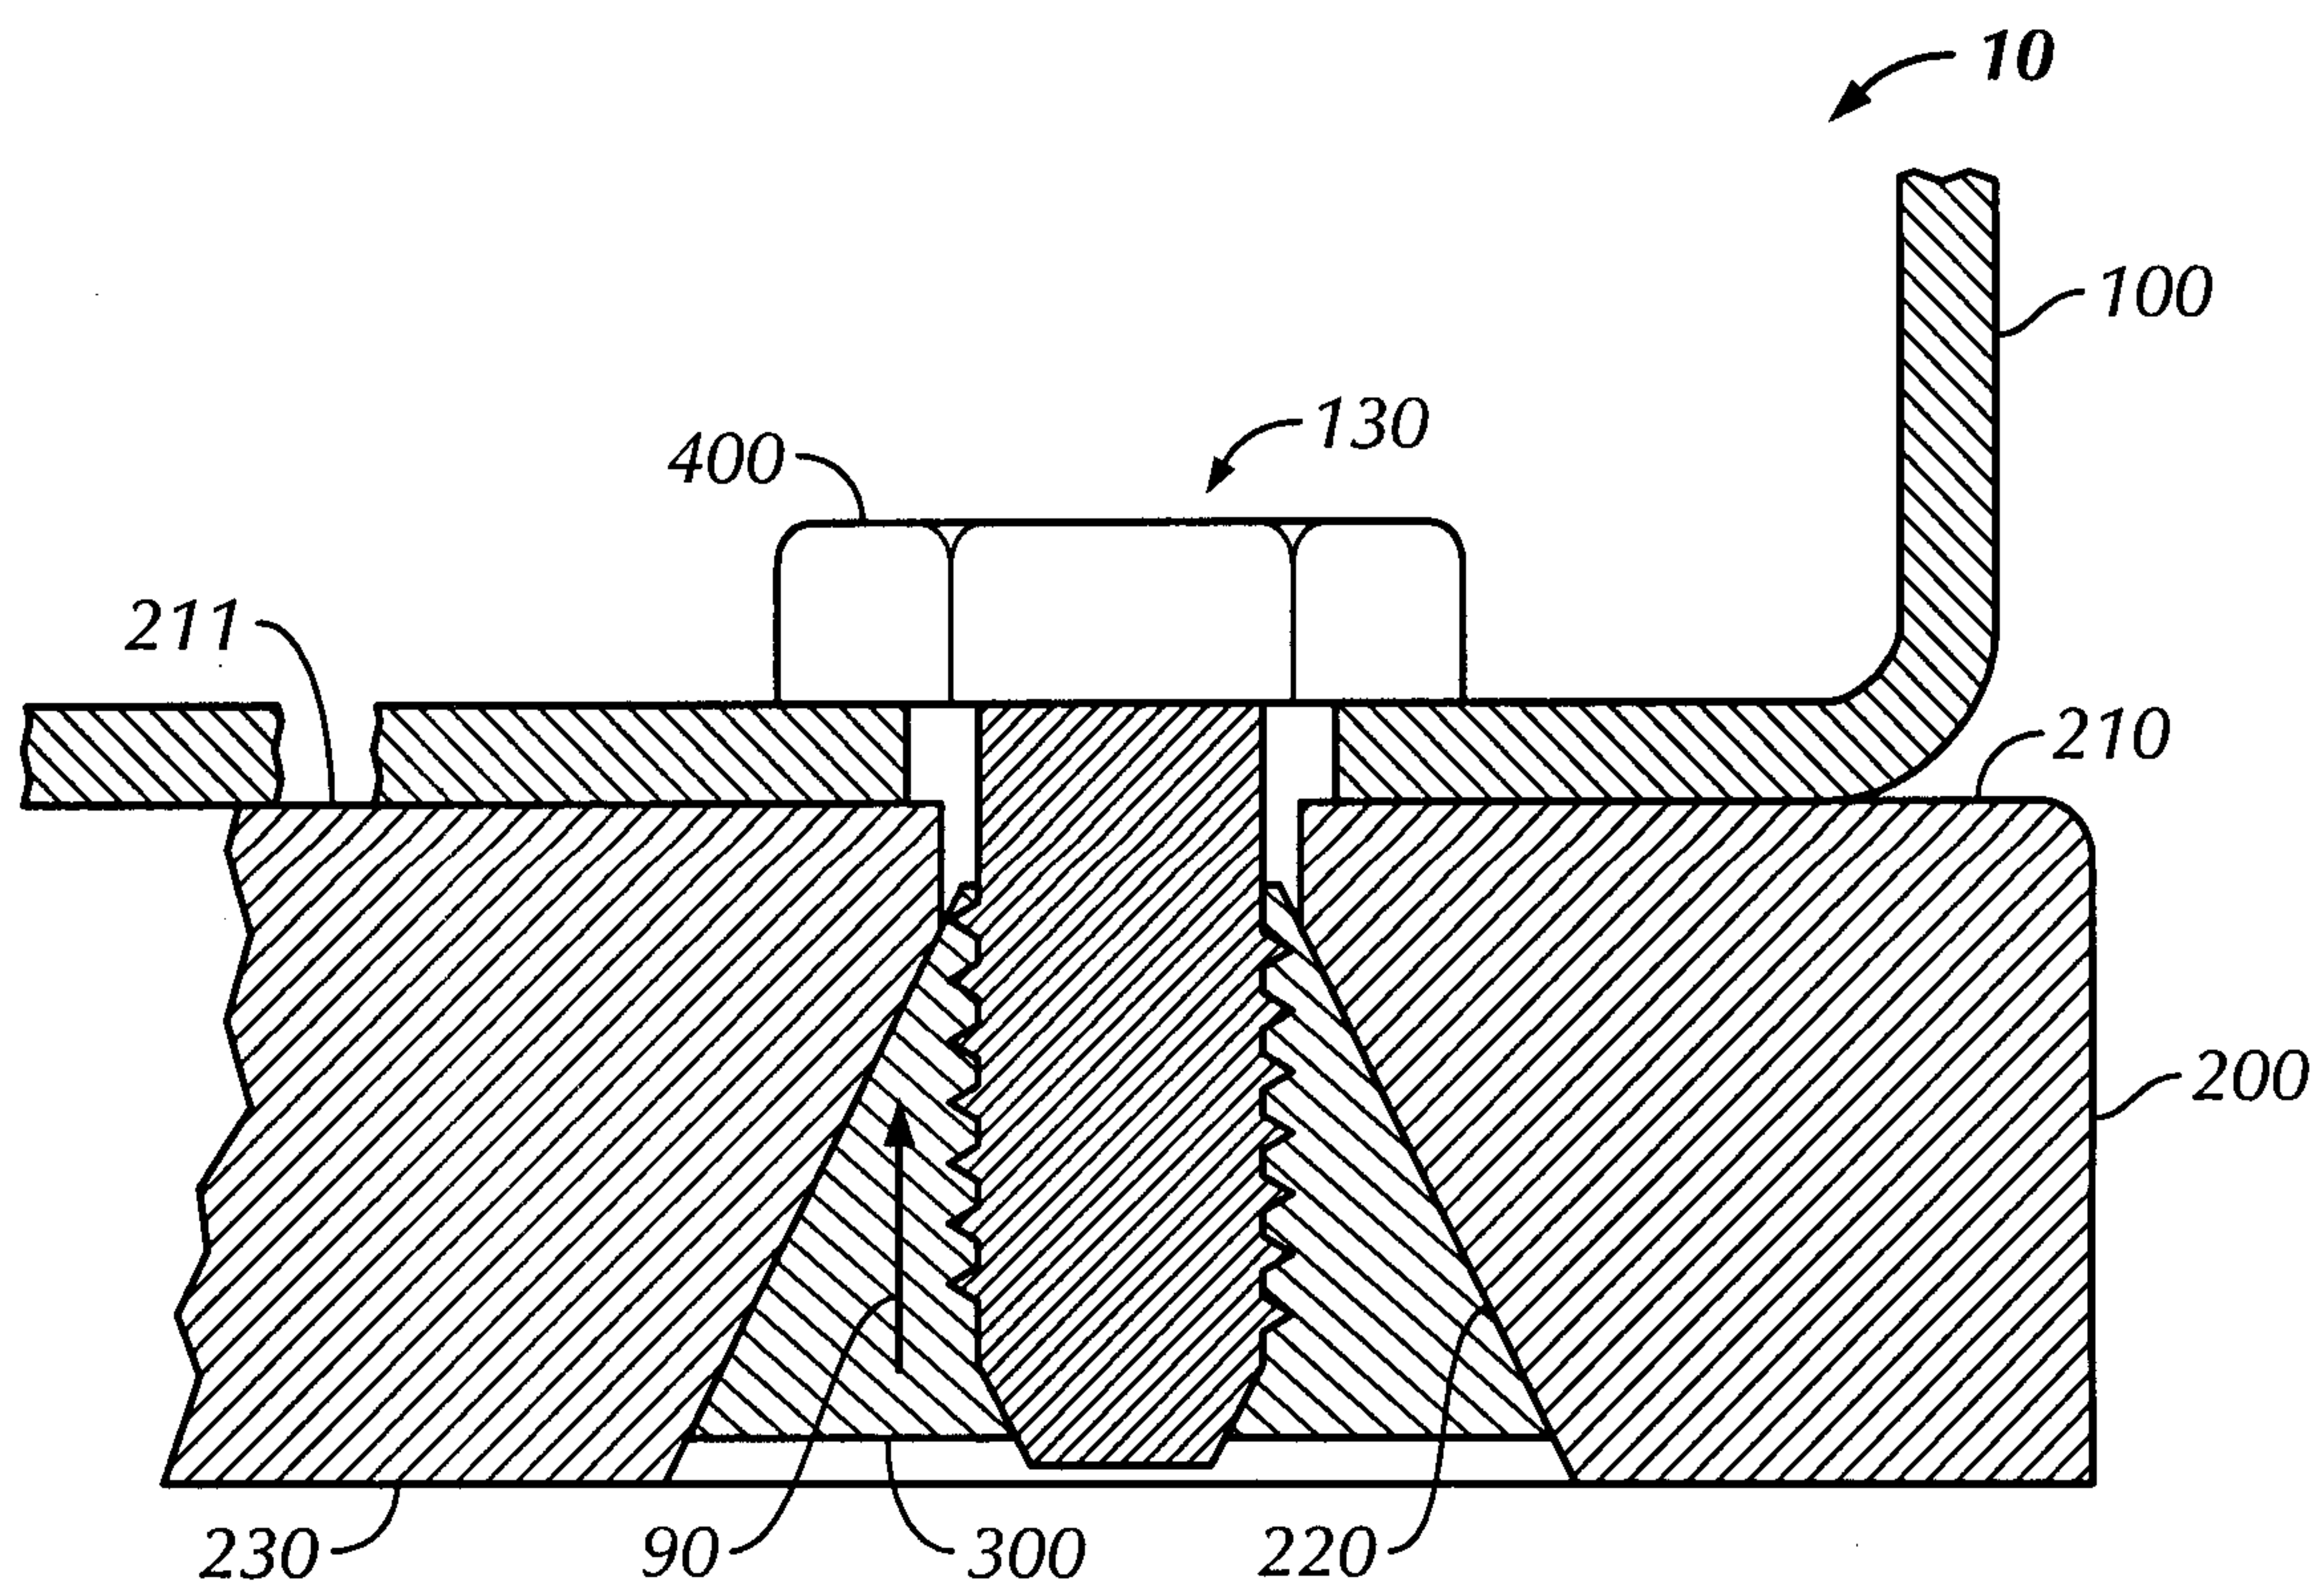


FIG. 2B

4/14

**FIG. 3****FIG. 4A**

5/14

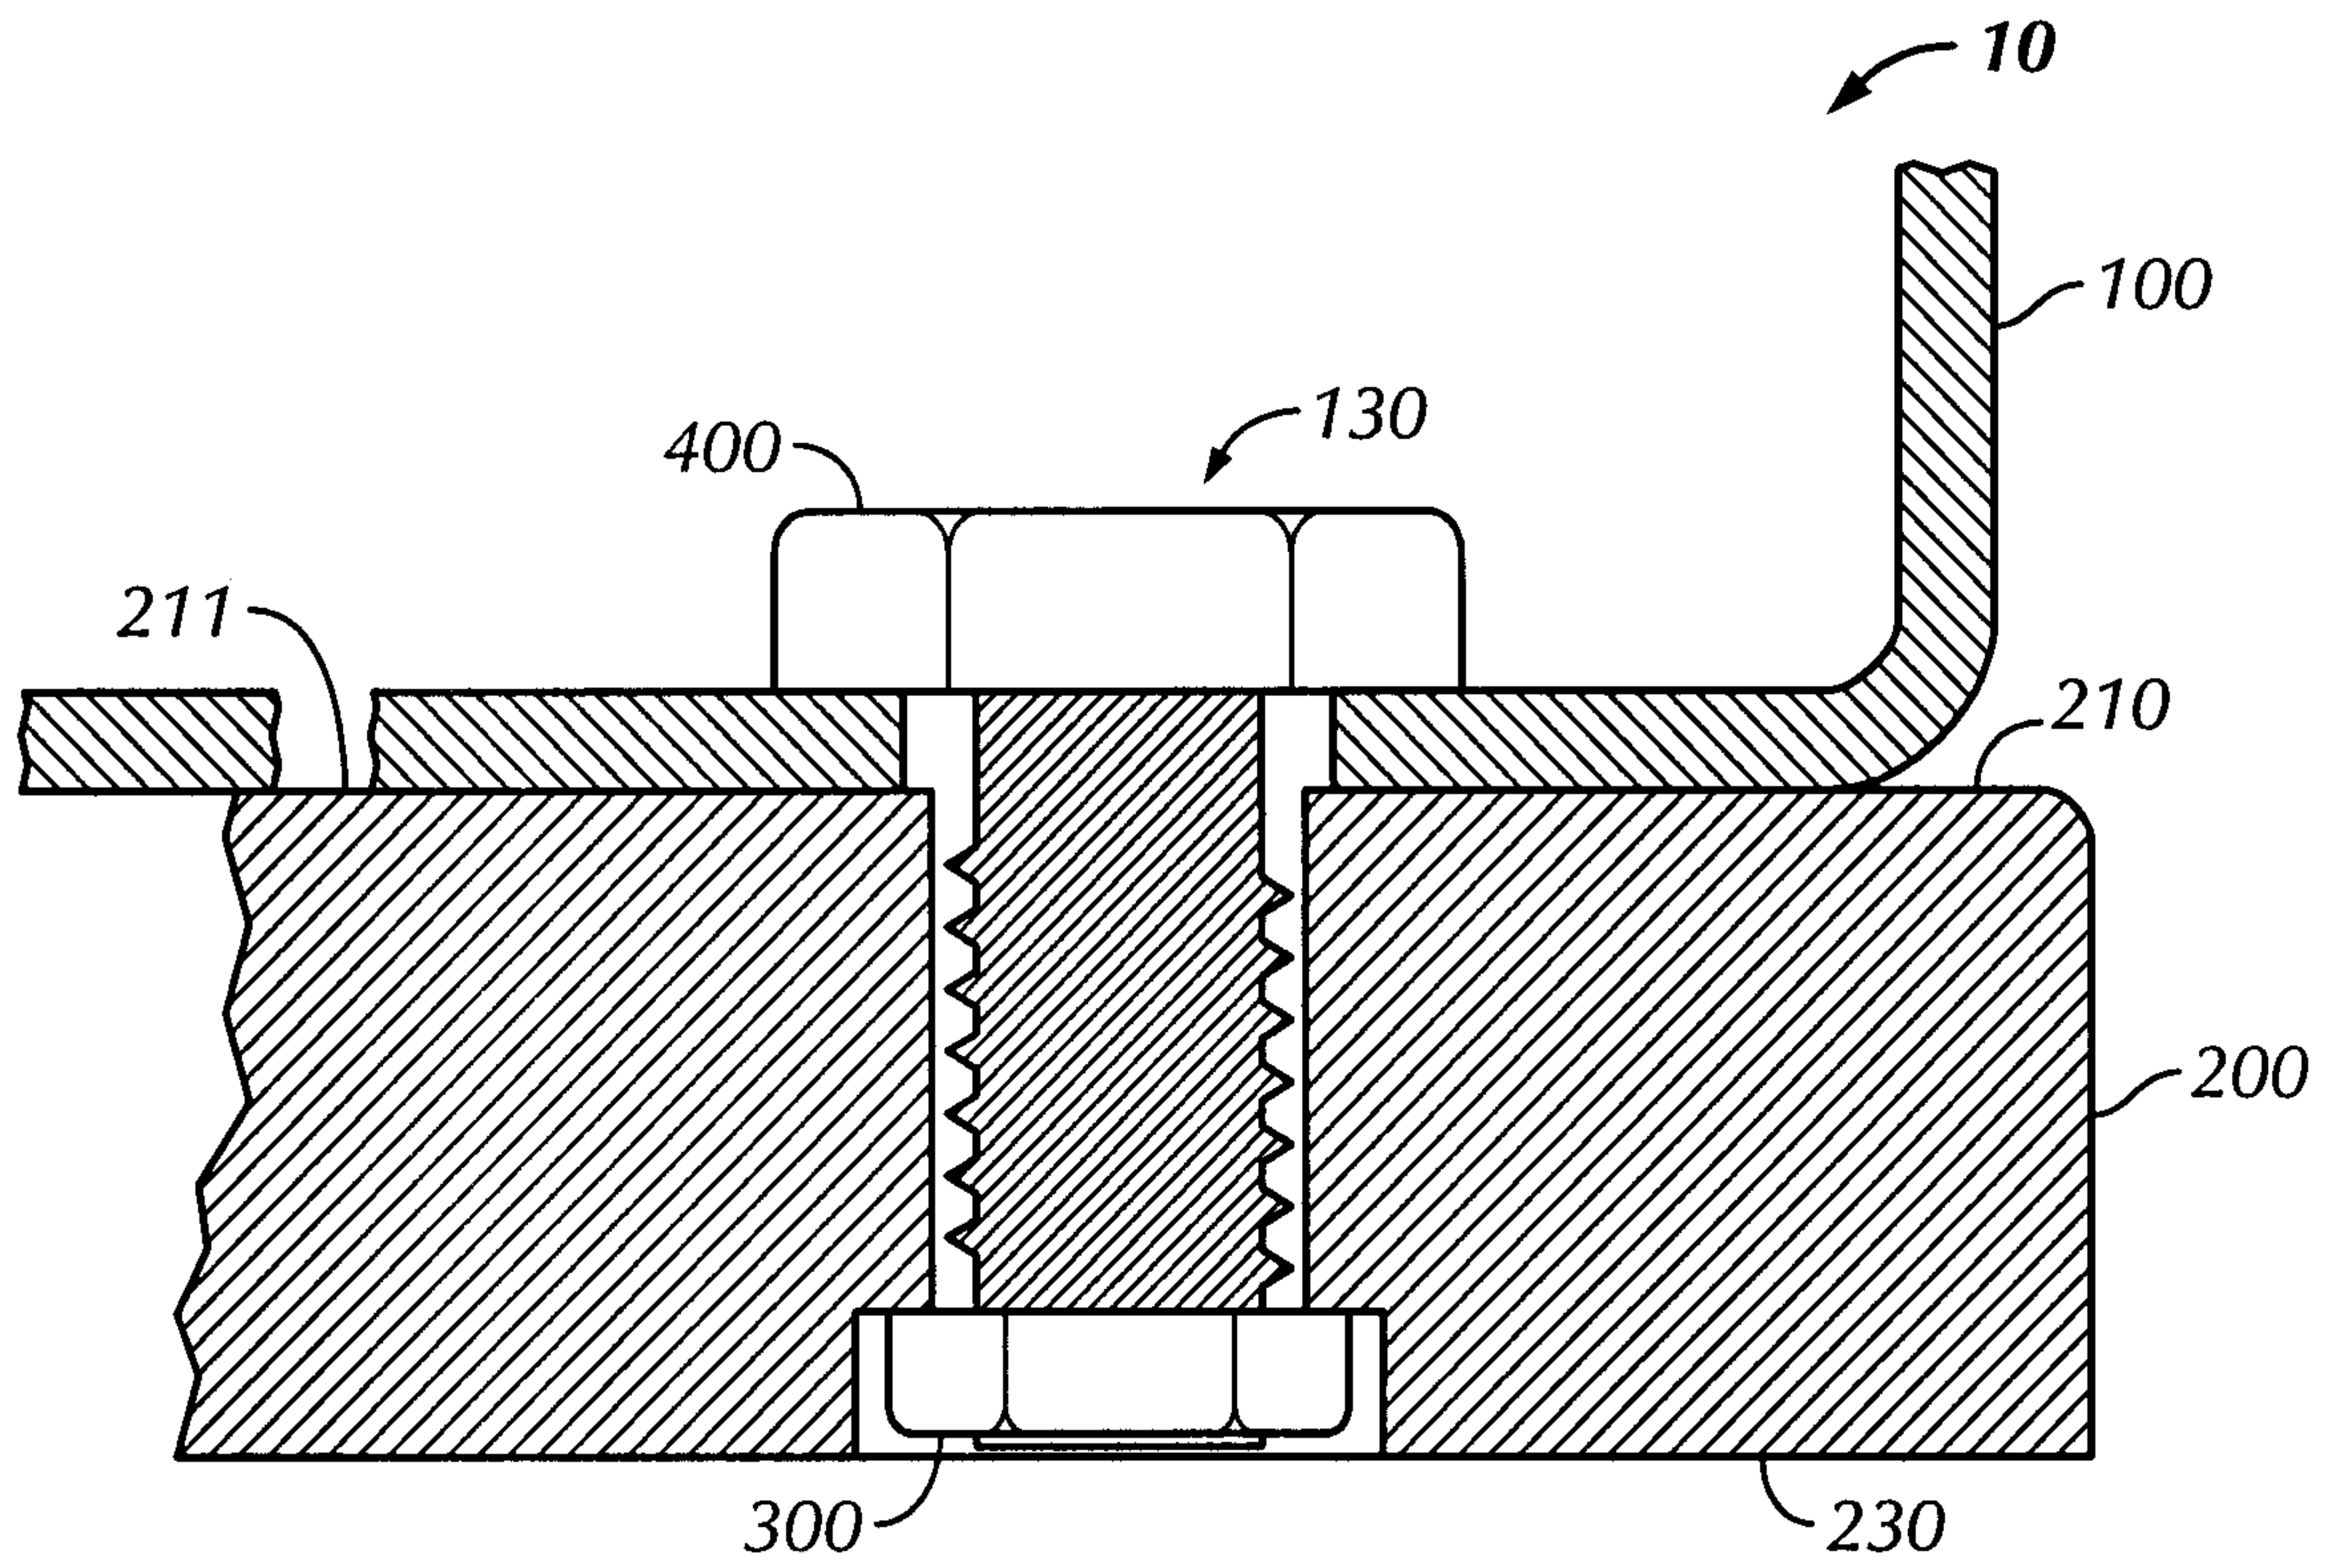


FIG. 4B

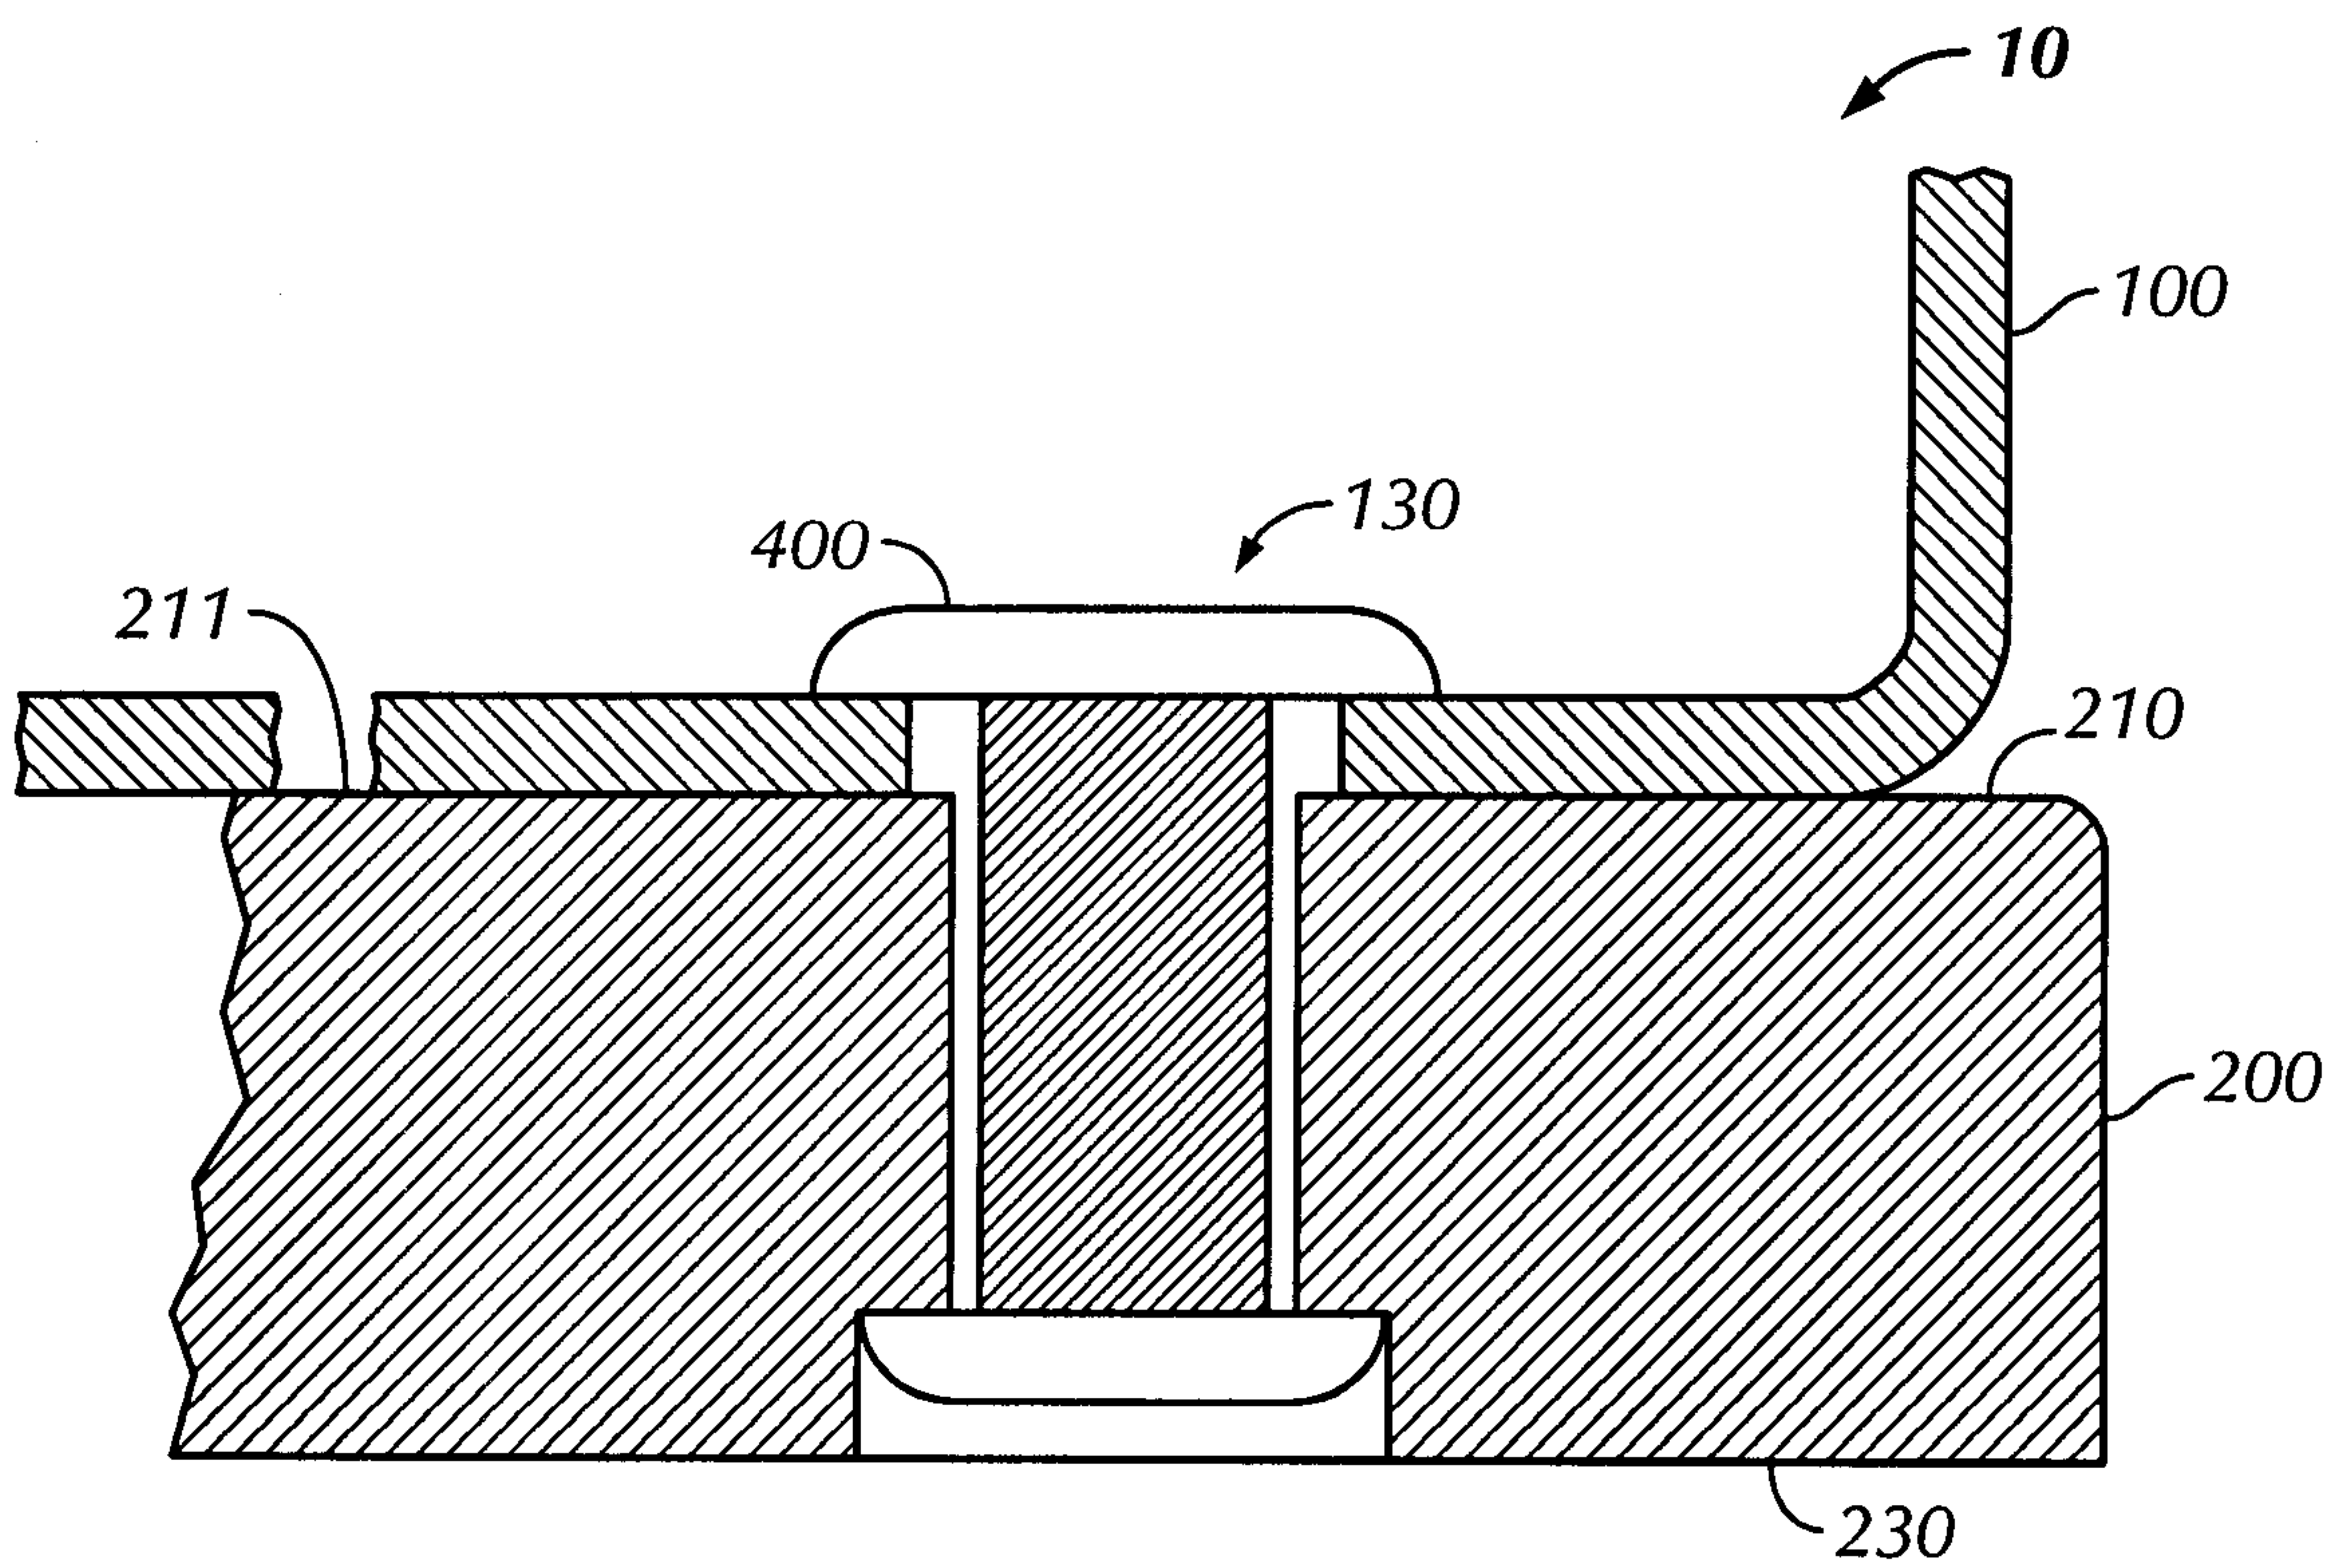
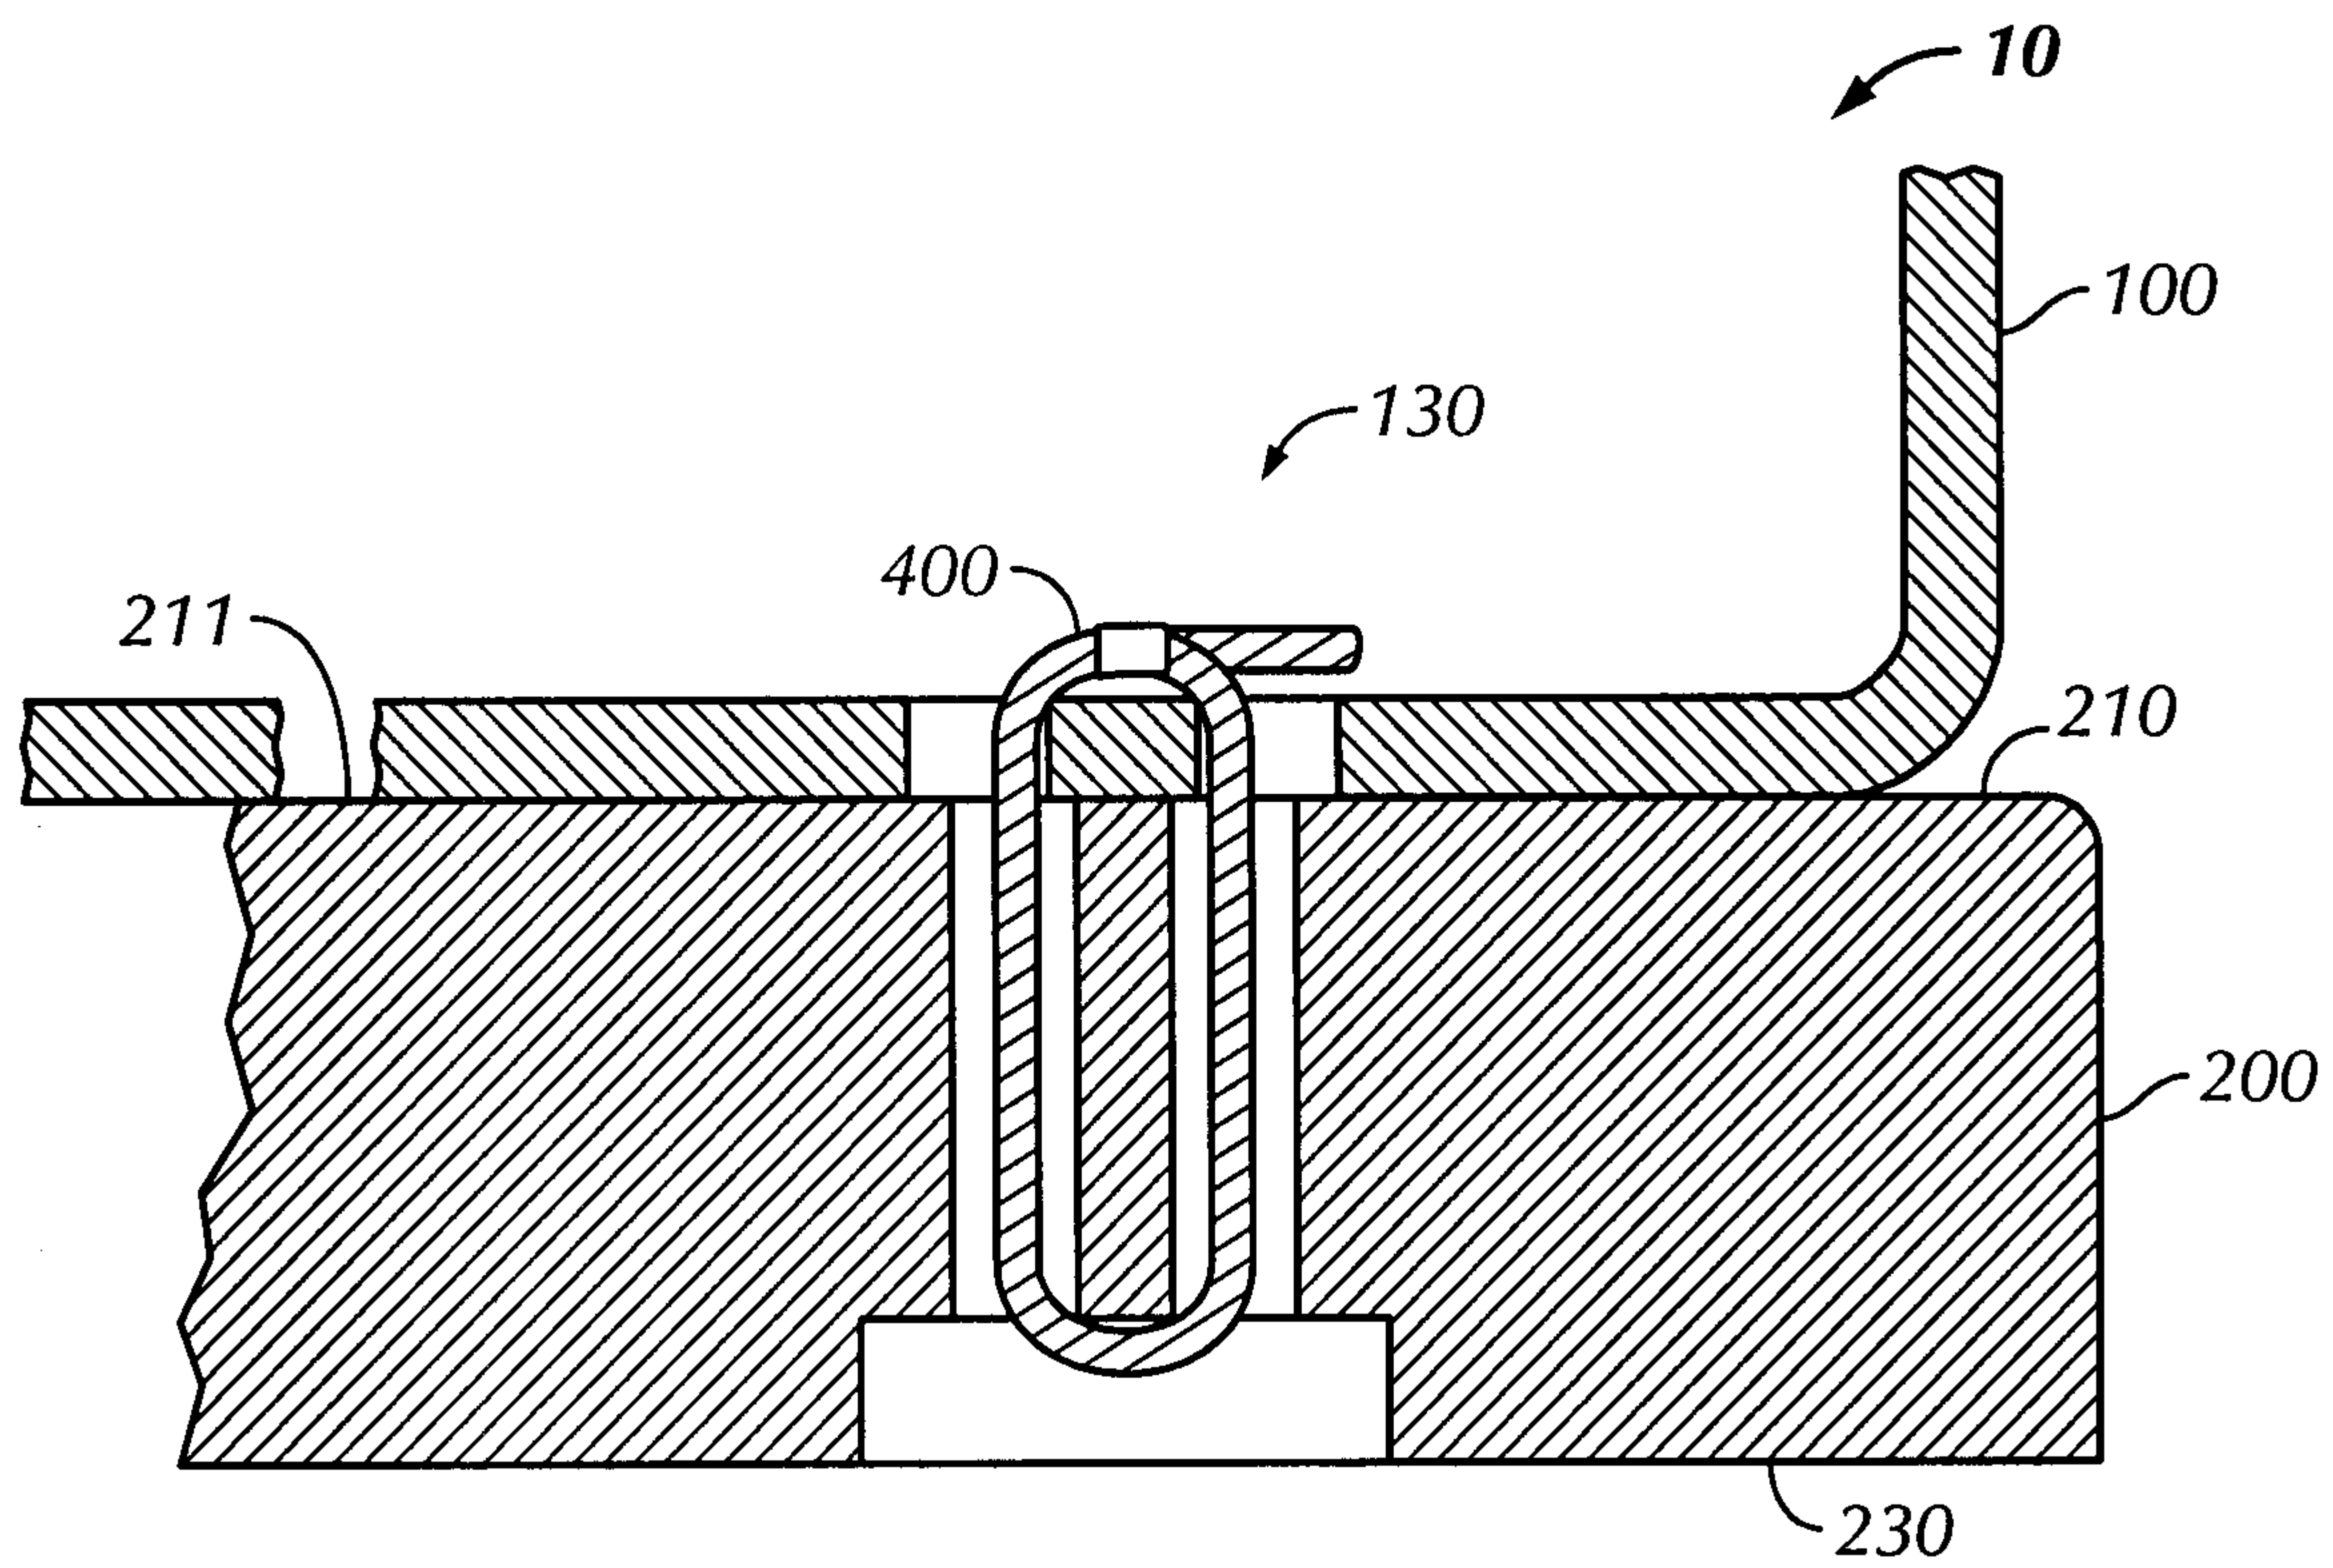
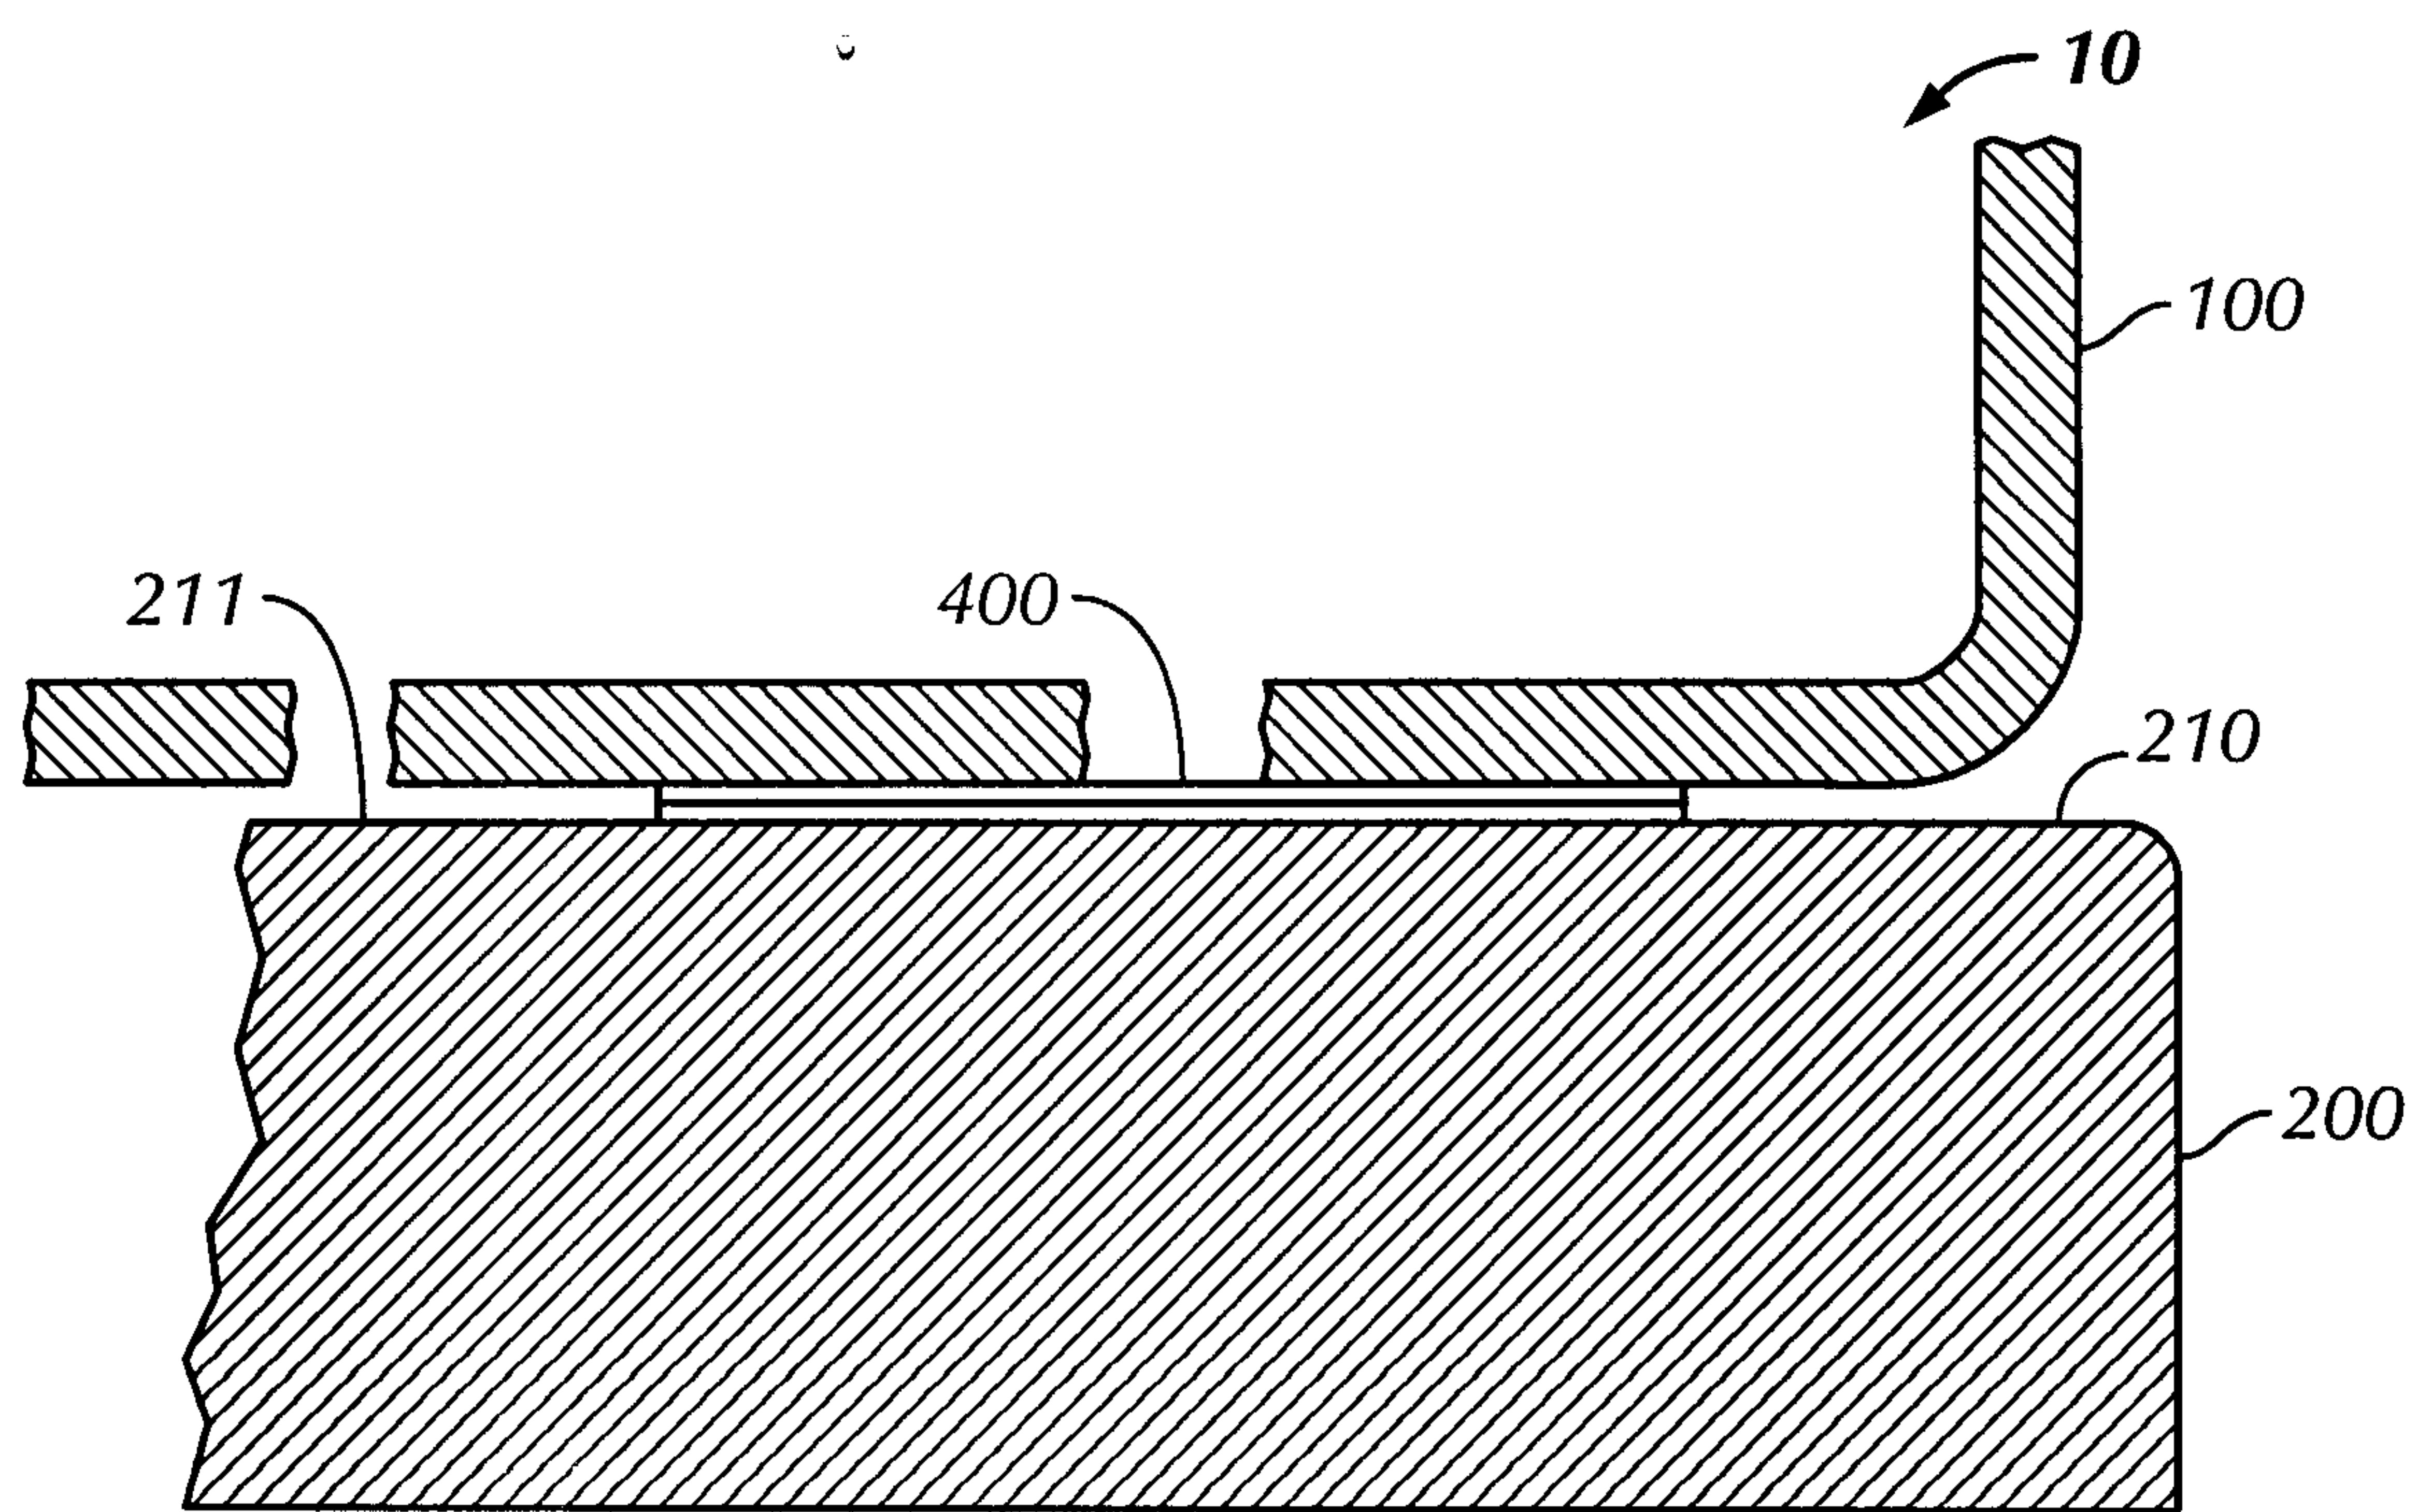
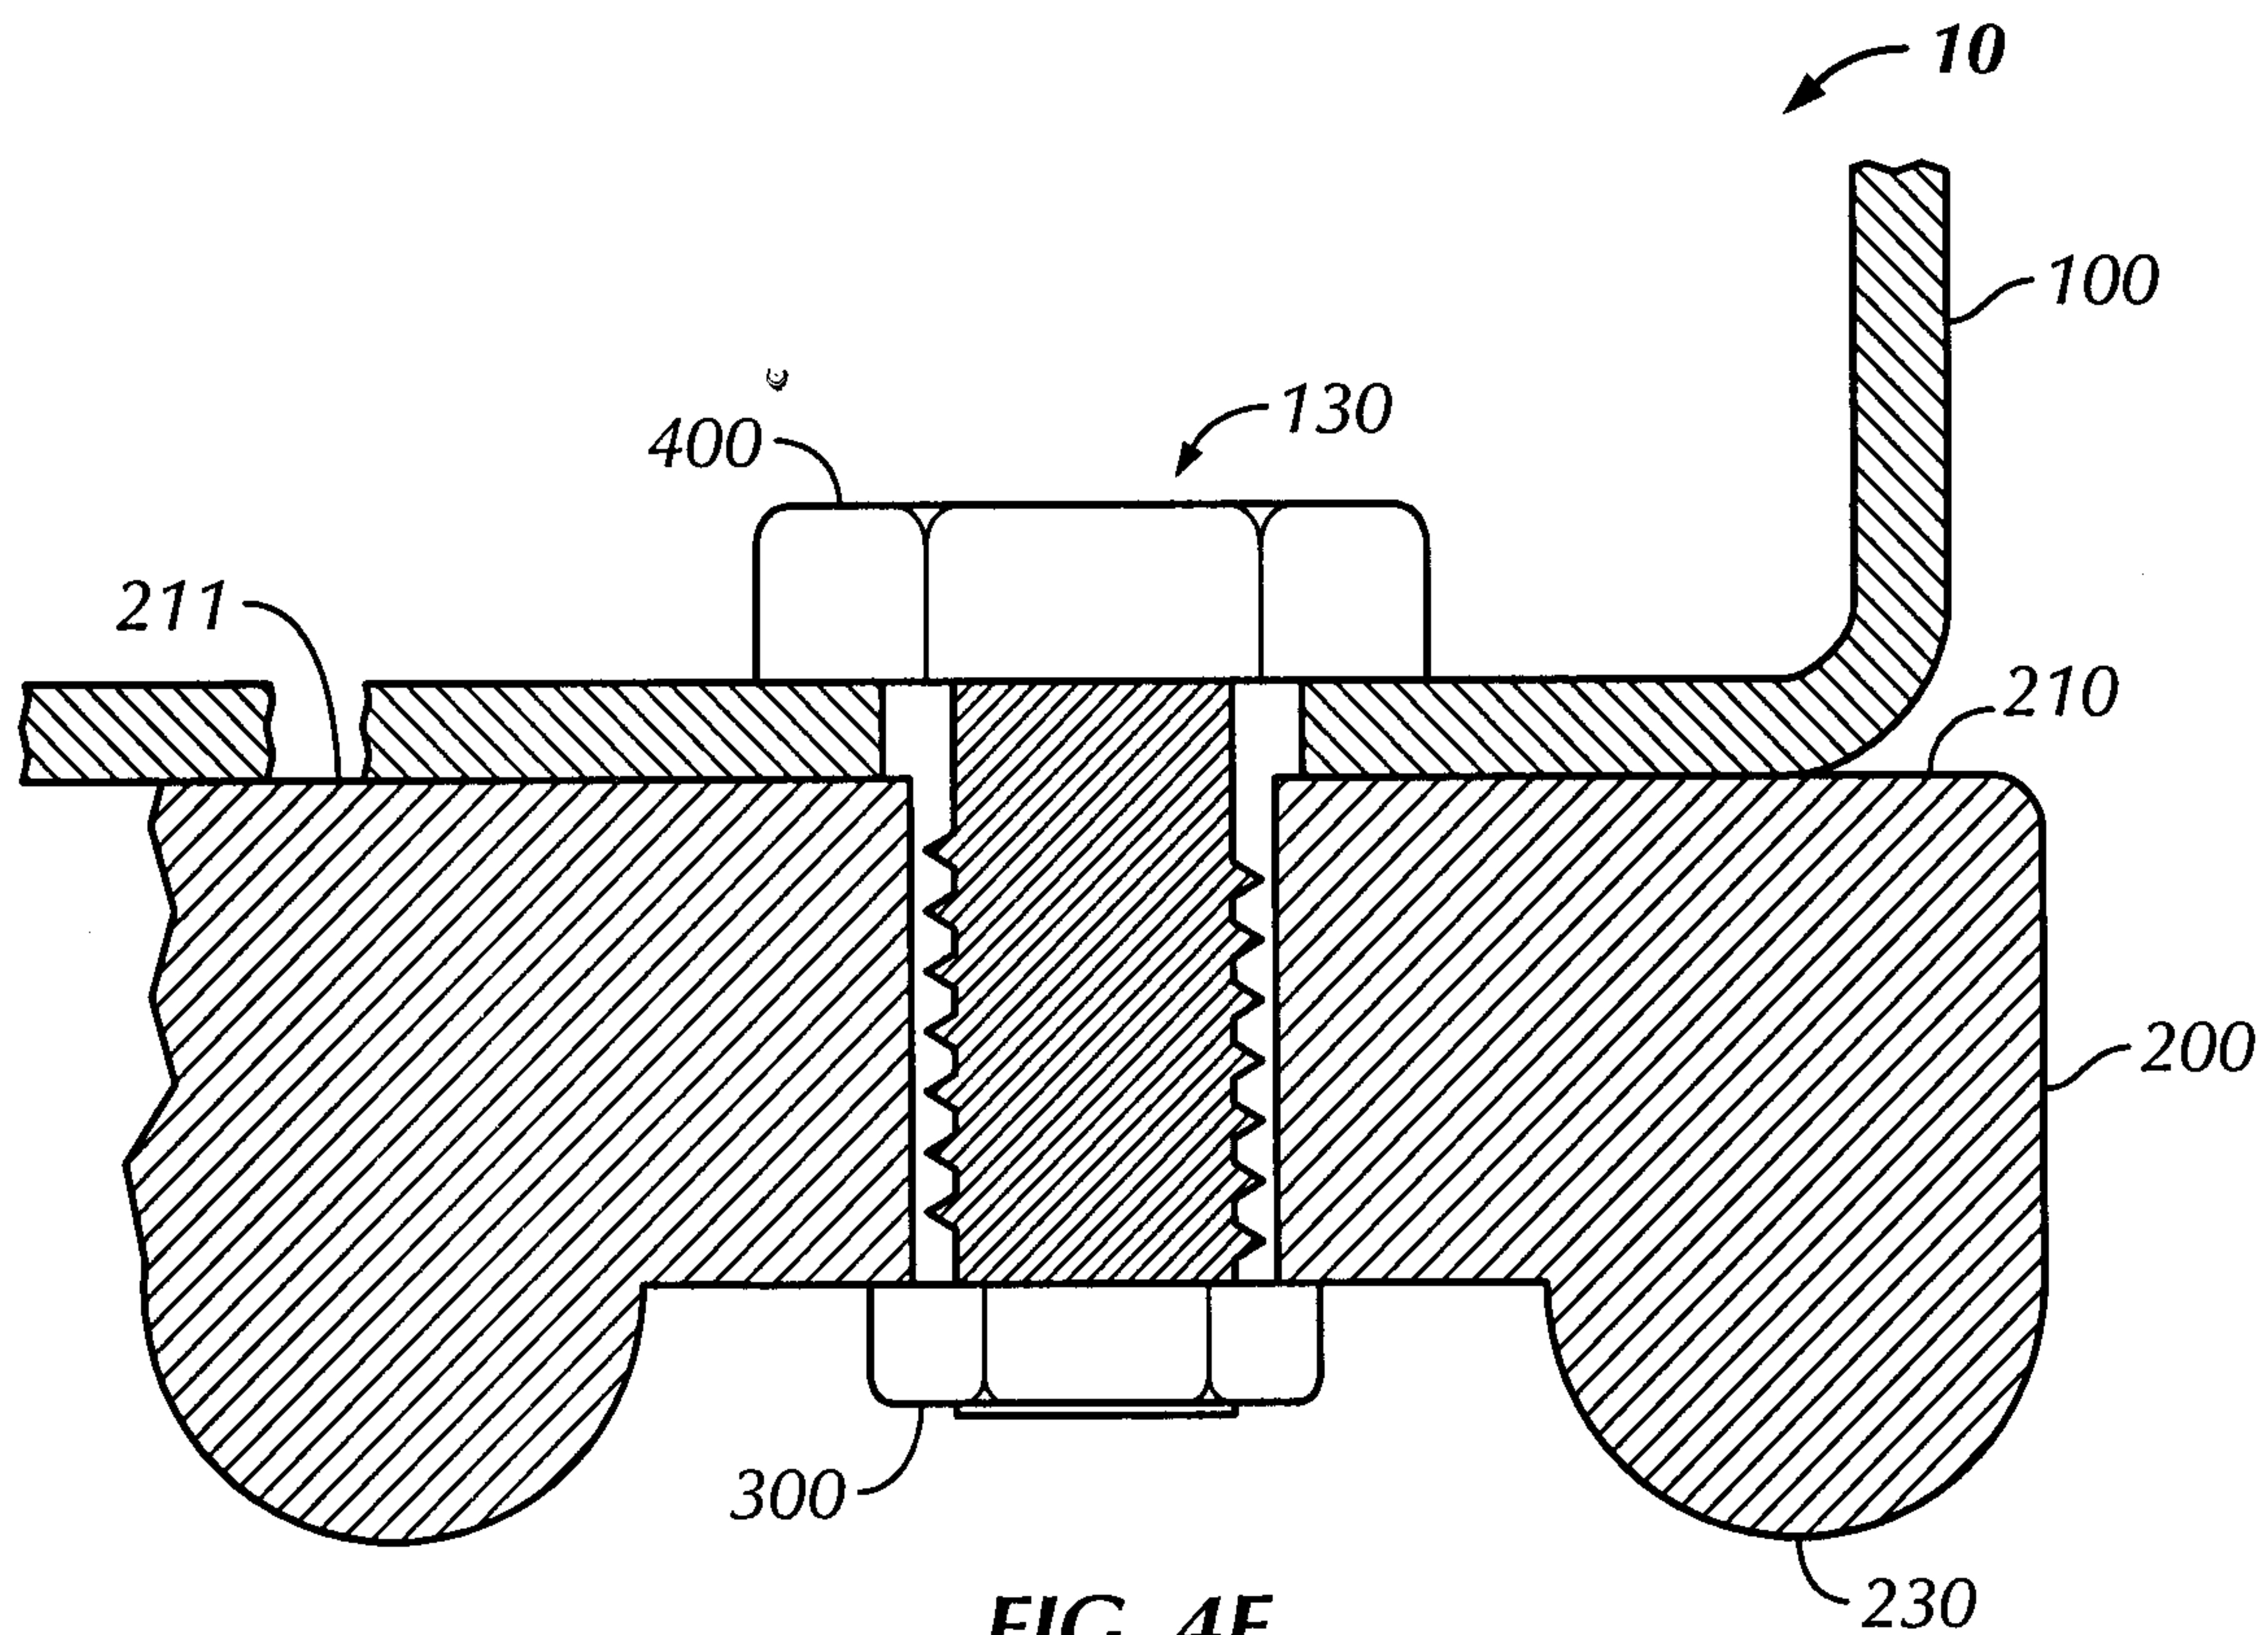
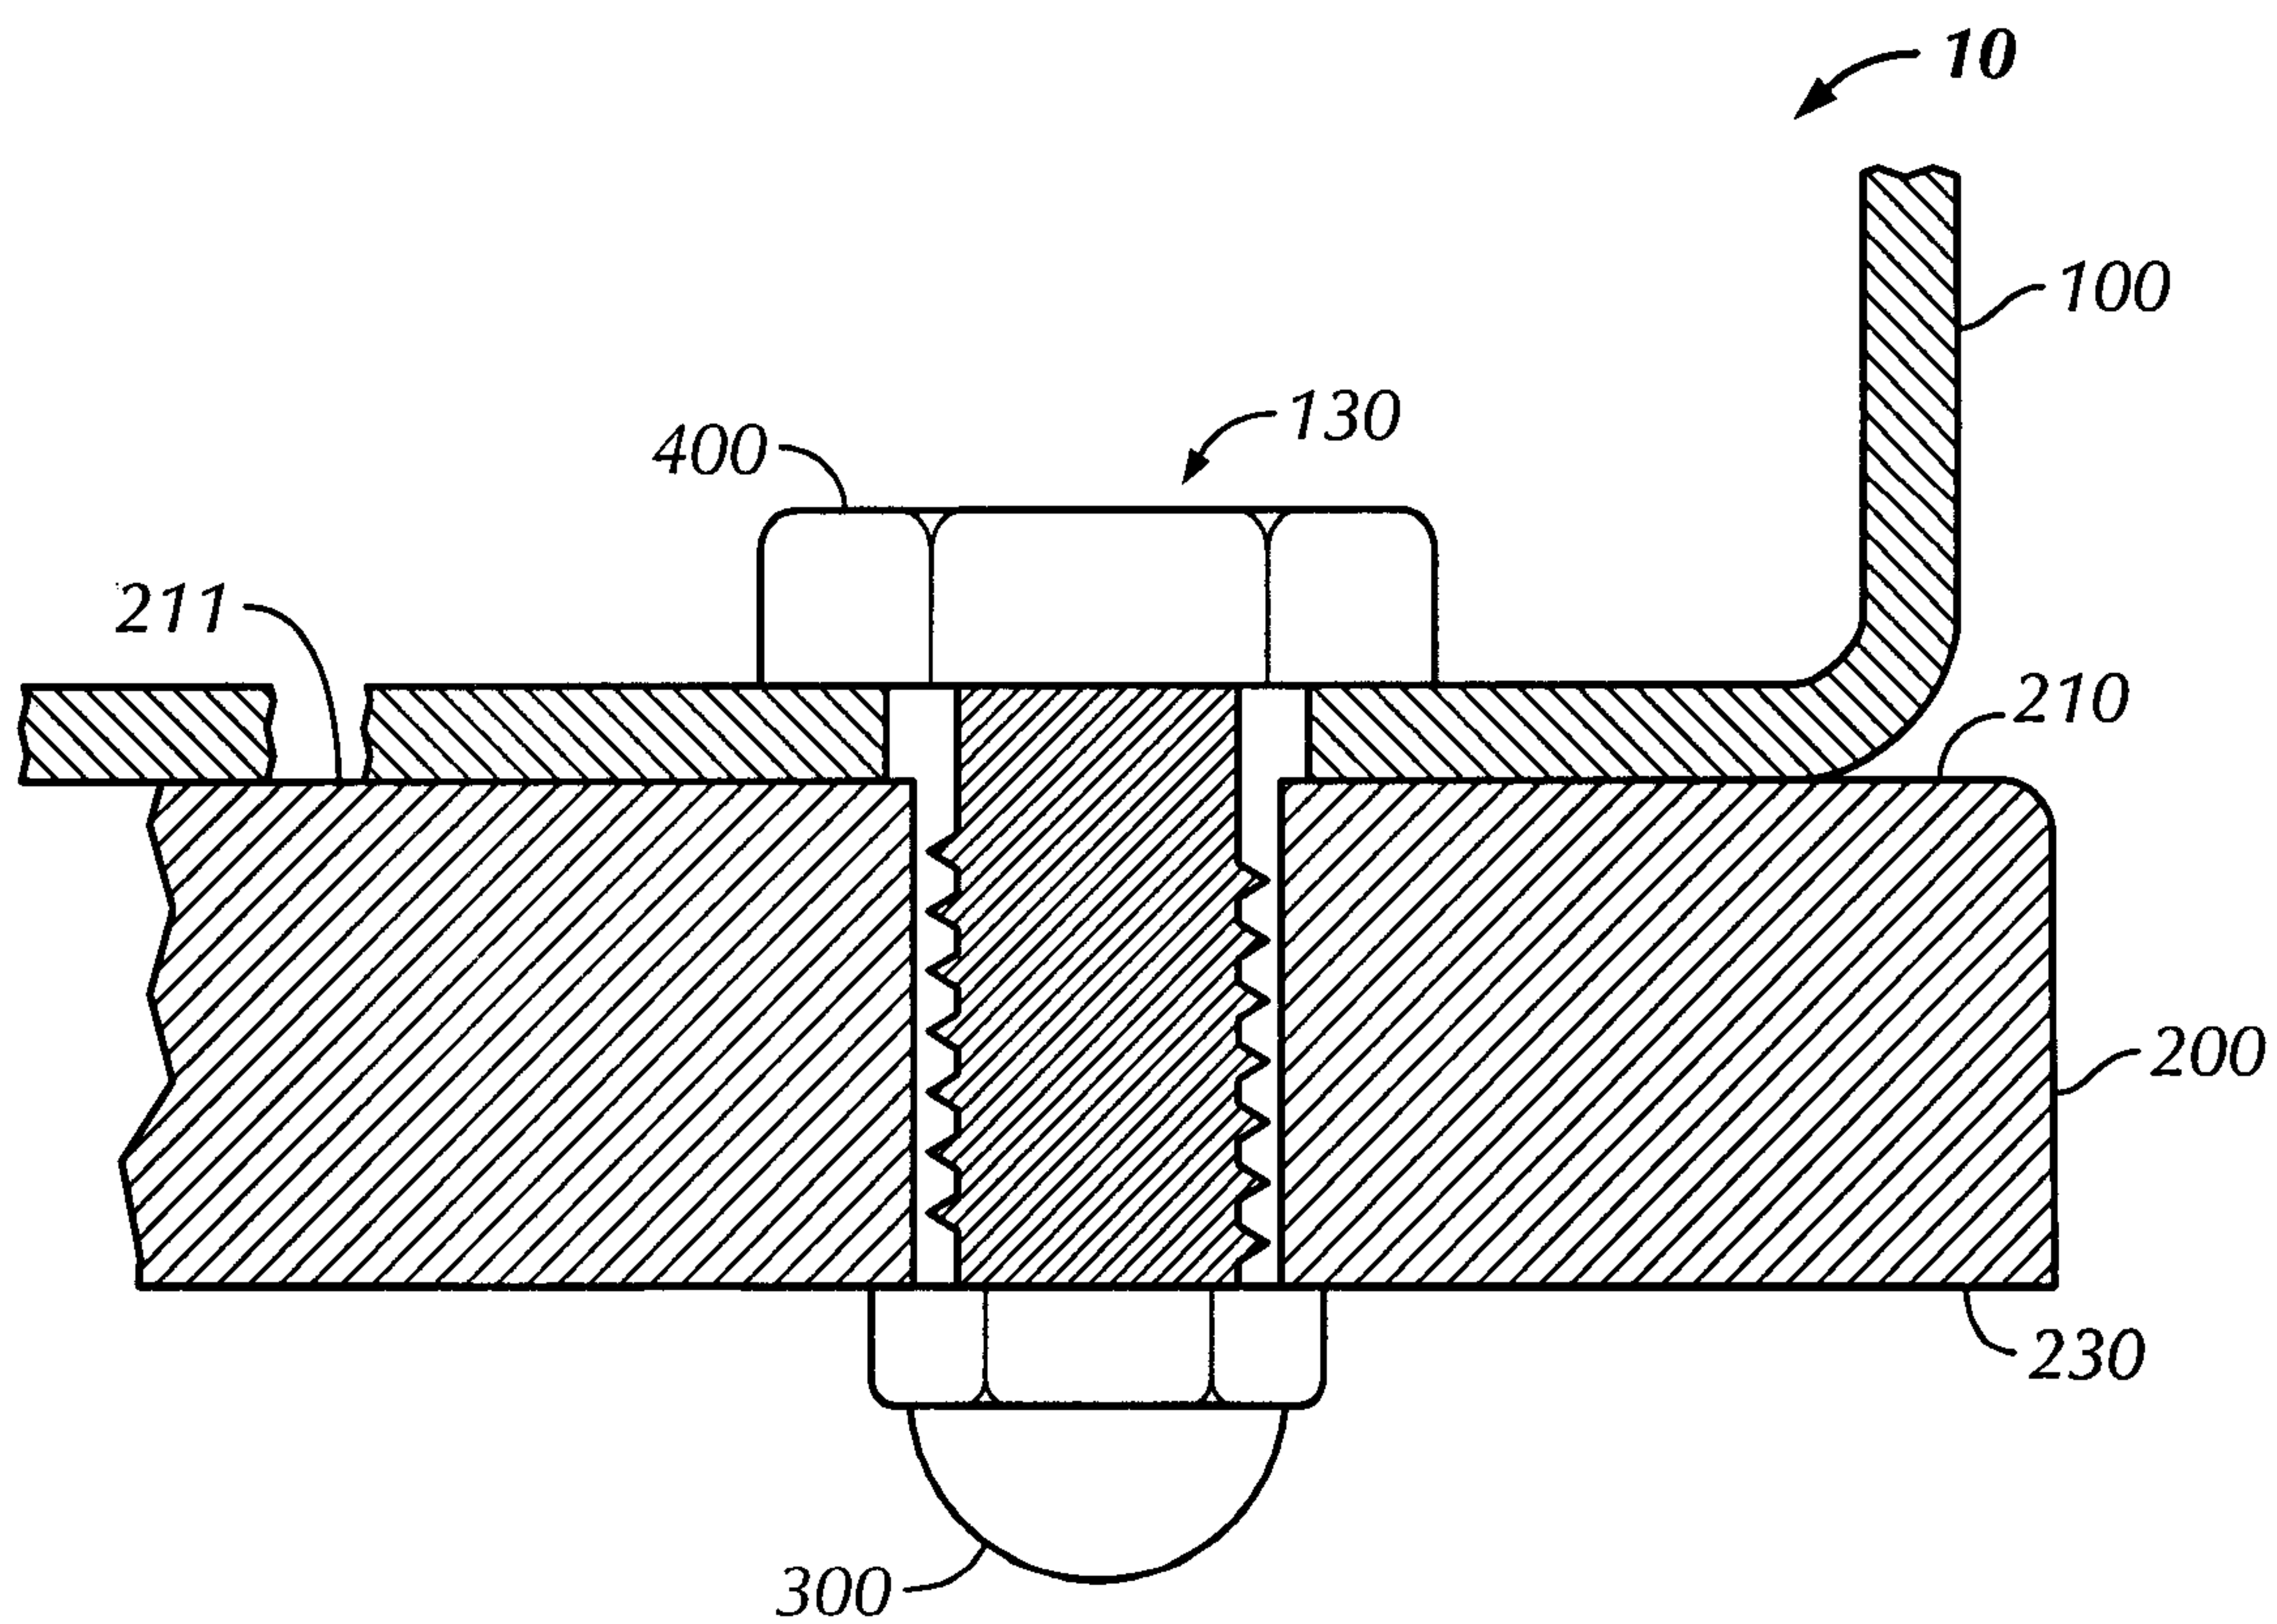


FIG. 4C

**FIG. 4D****FIG. 4E**

7/14

**FIG. 4F****FIG. 4G**

8/14

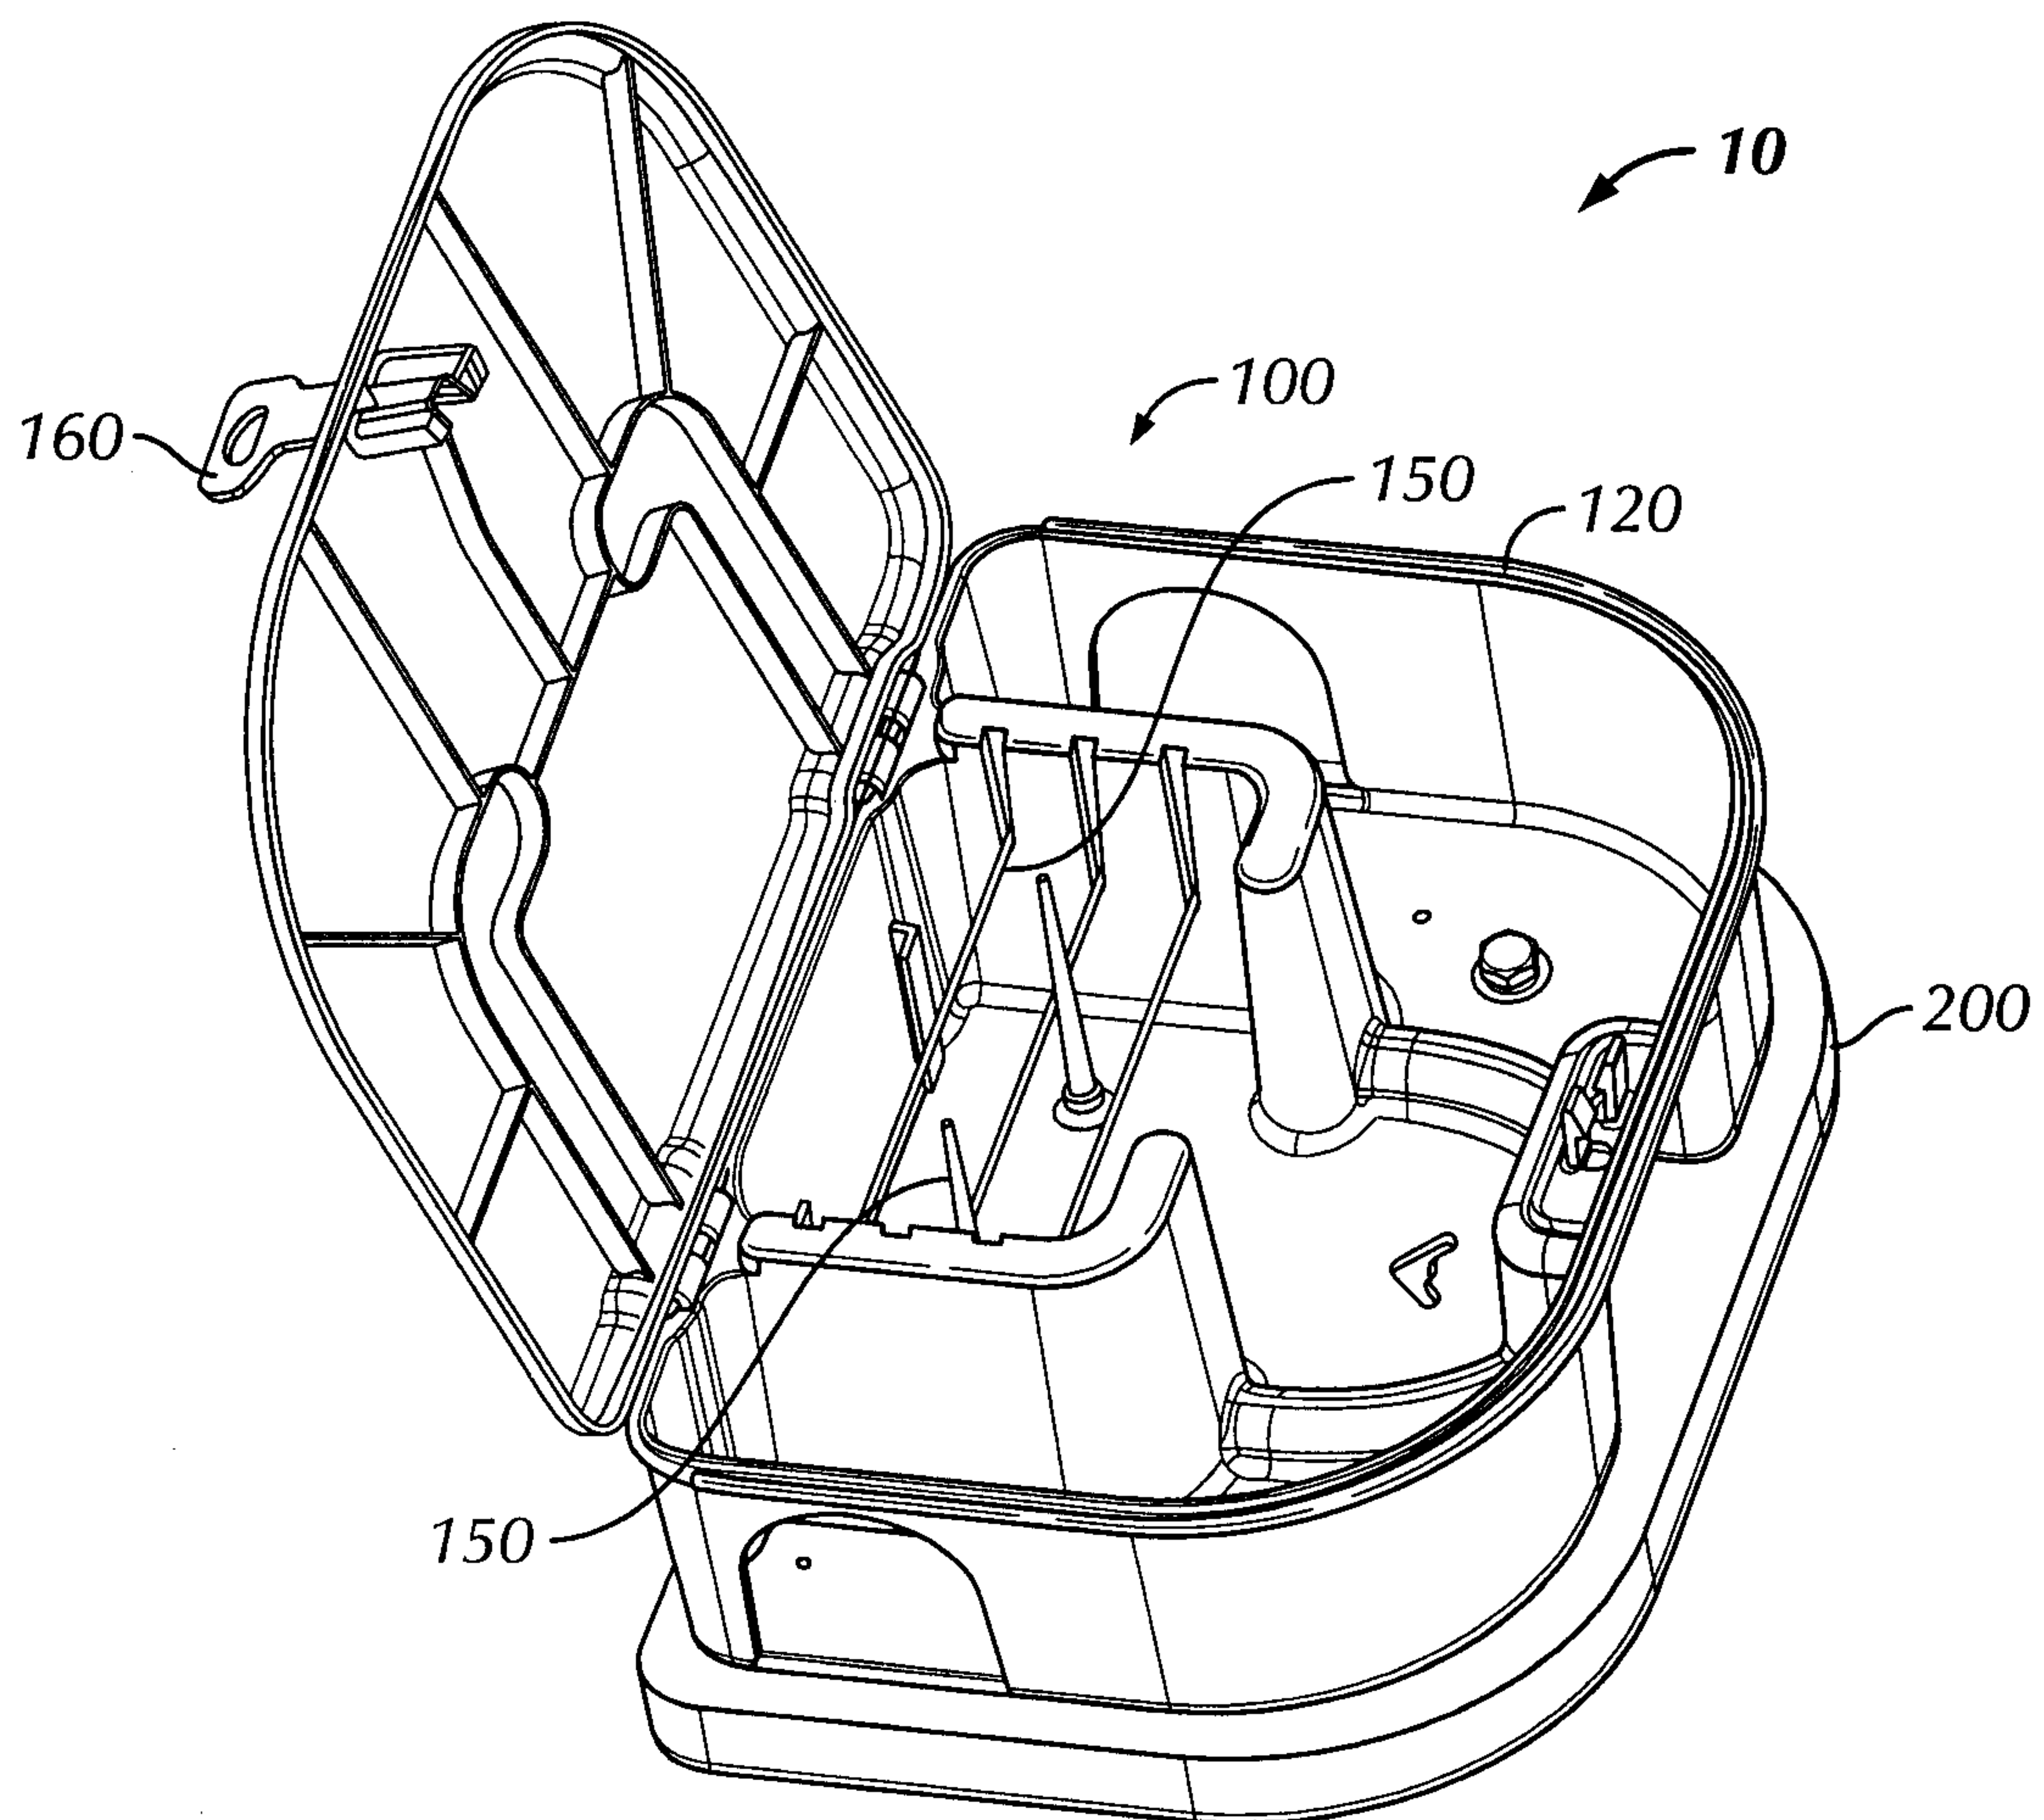


FIG. 5A

9/14

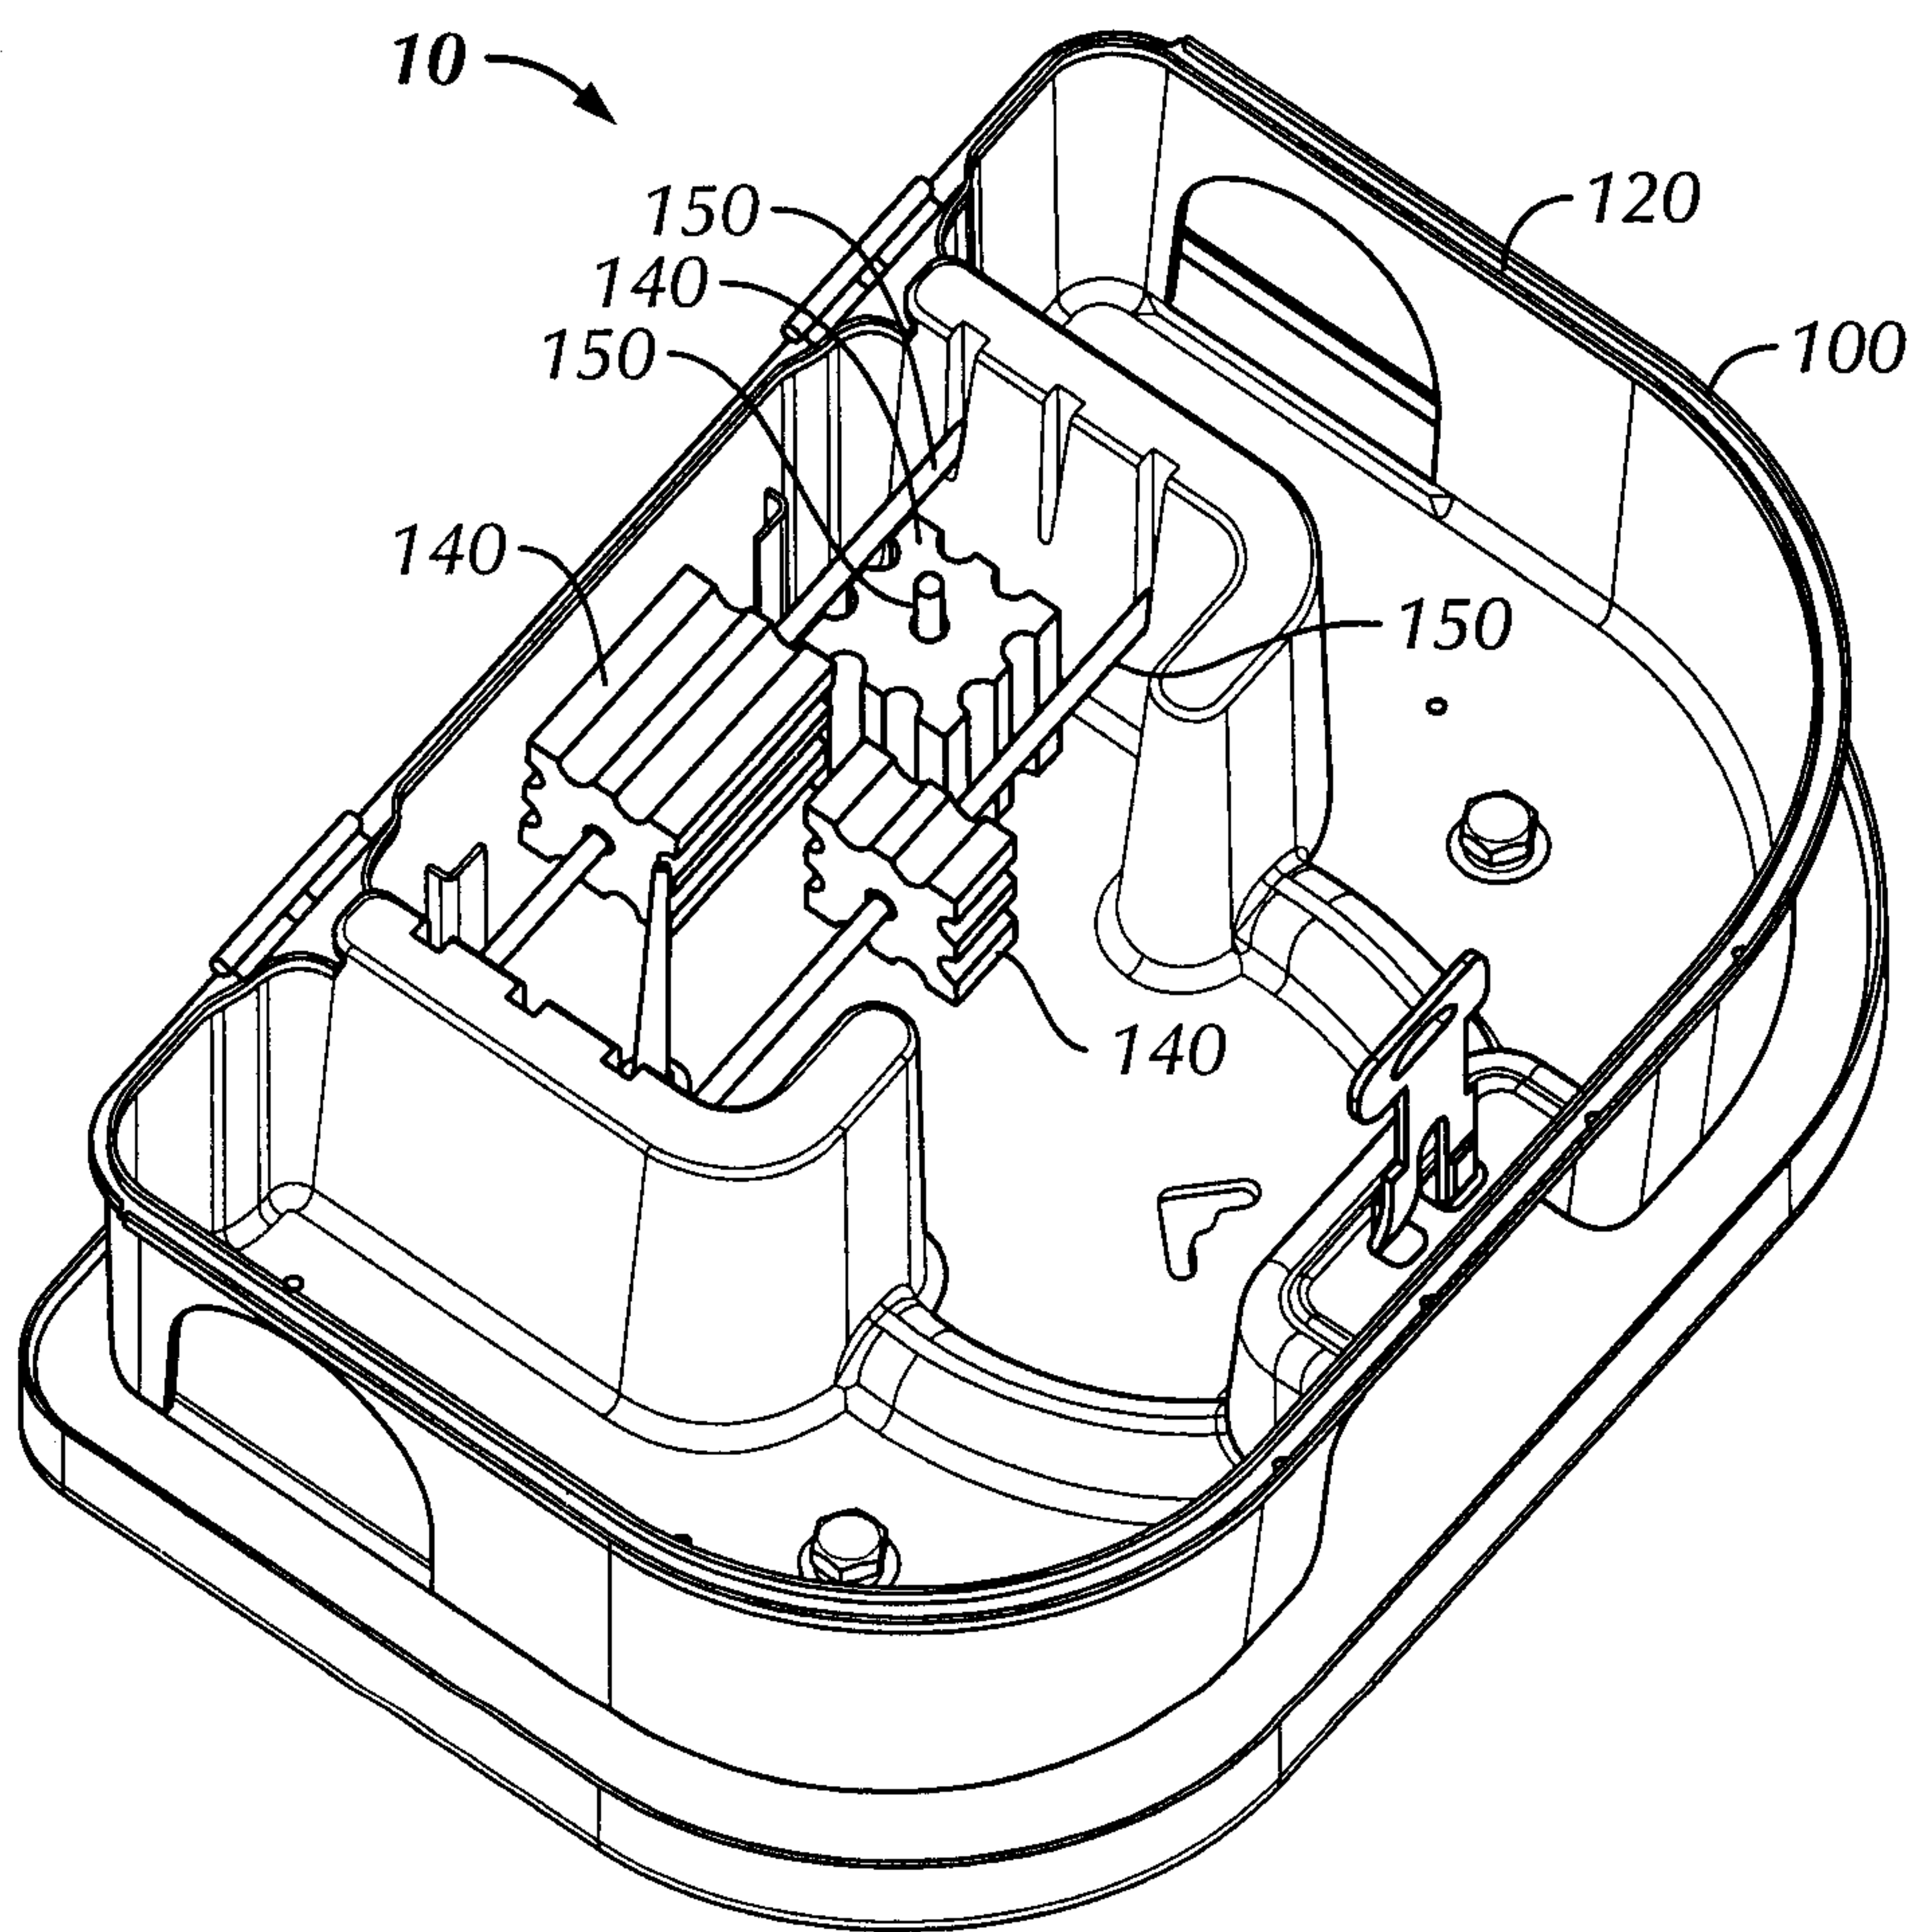


FIG. 5B

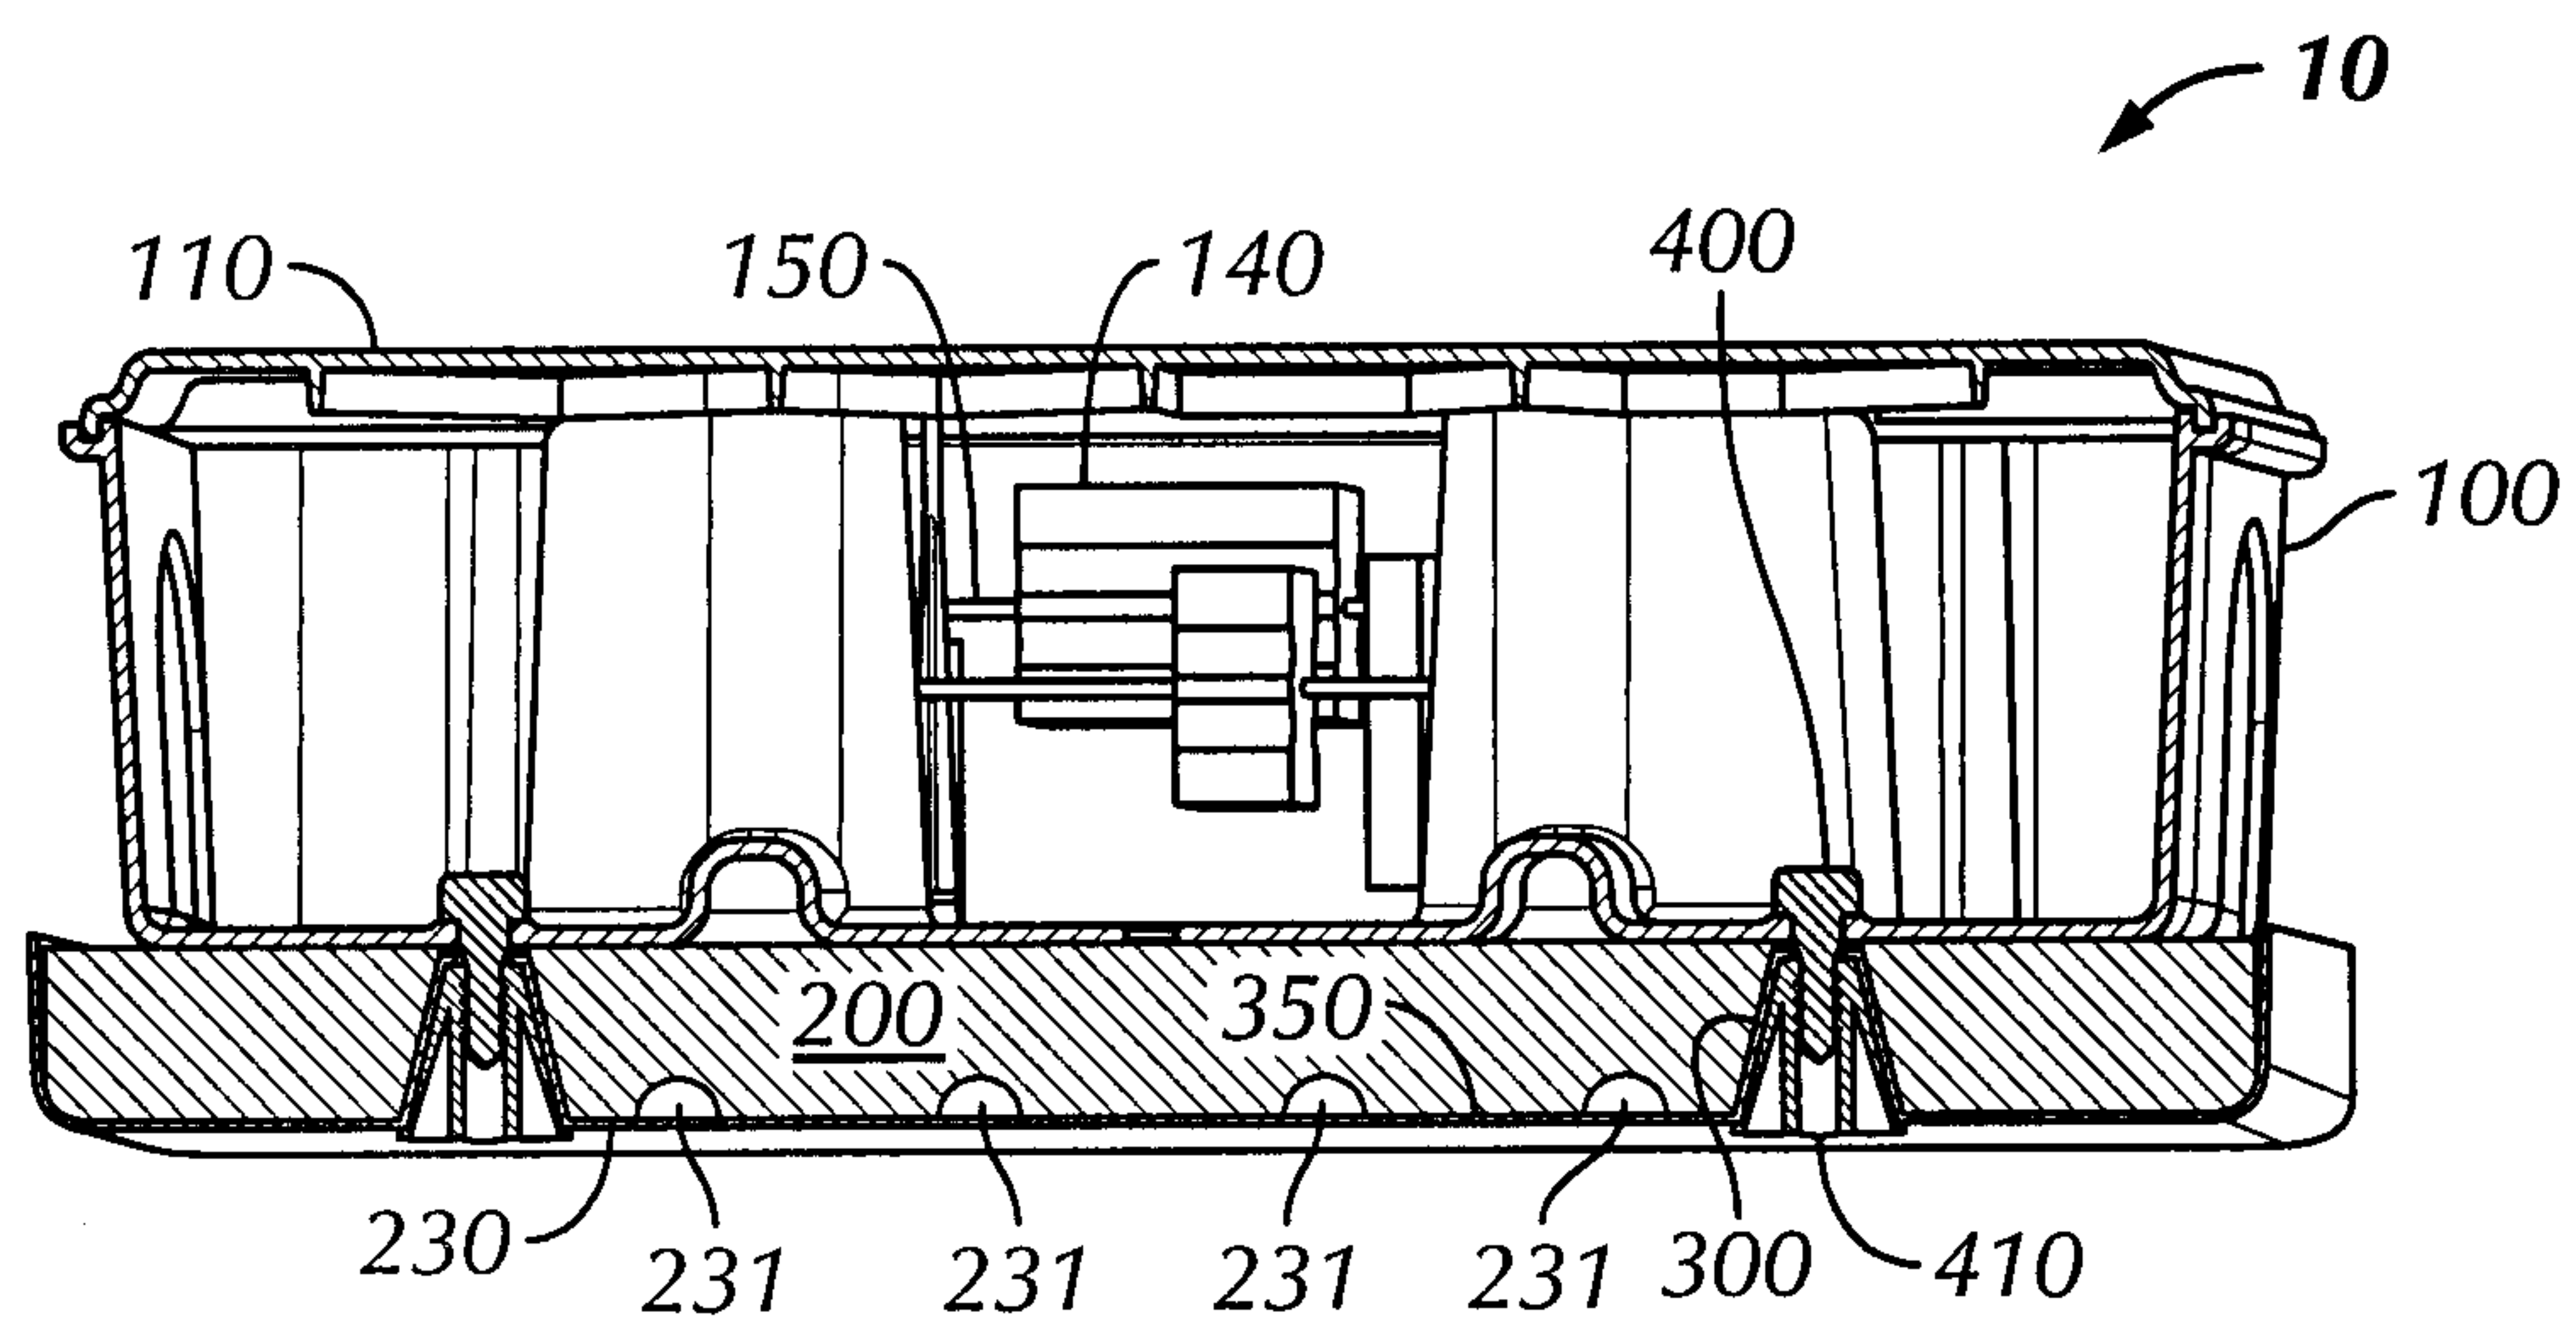


FIG. 6

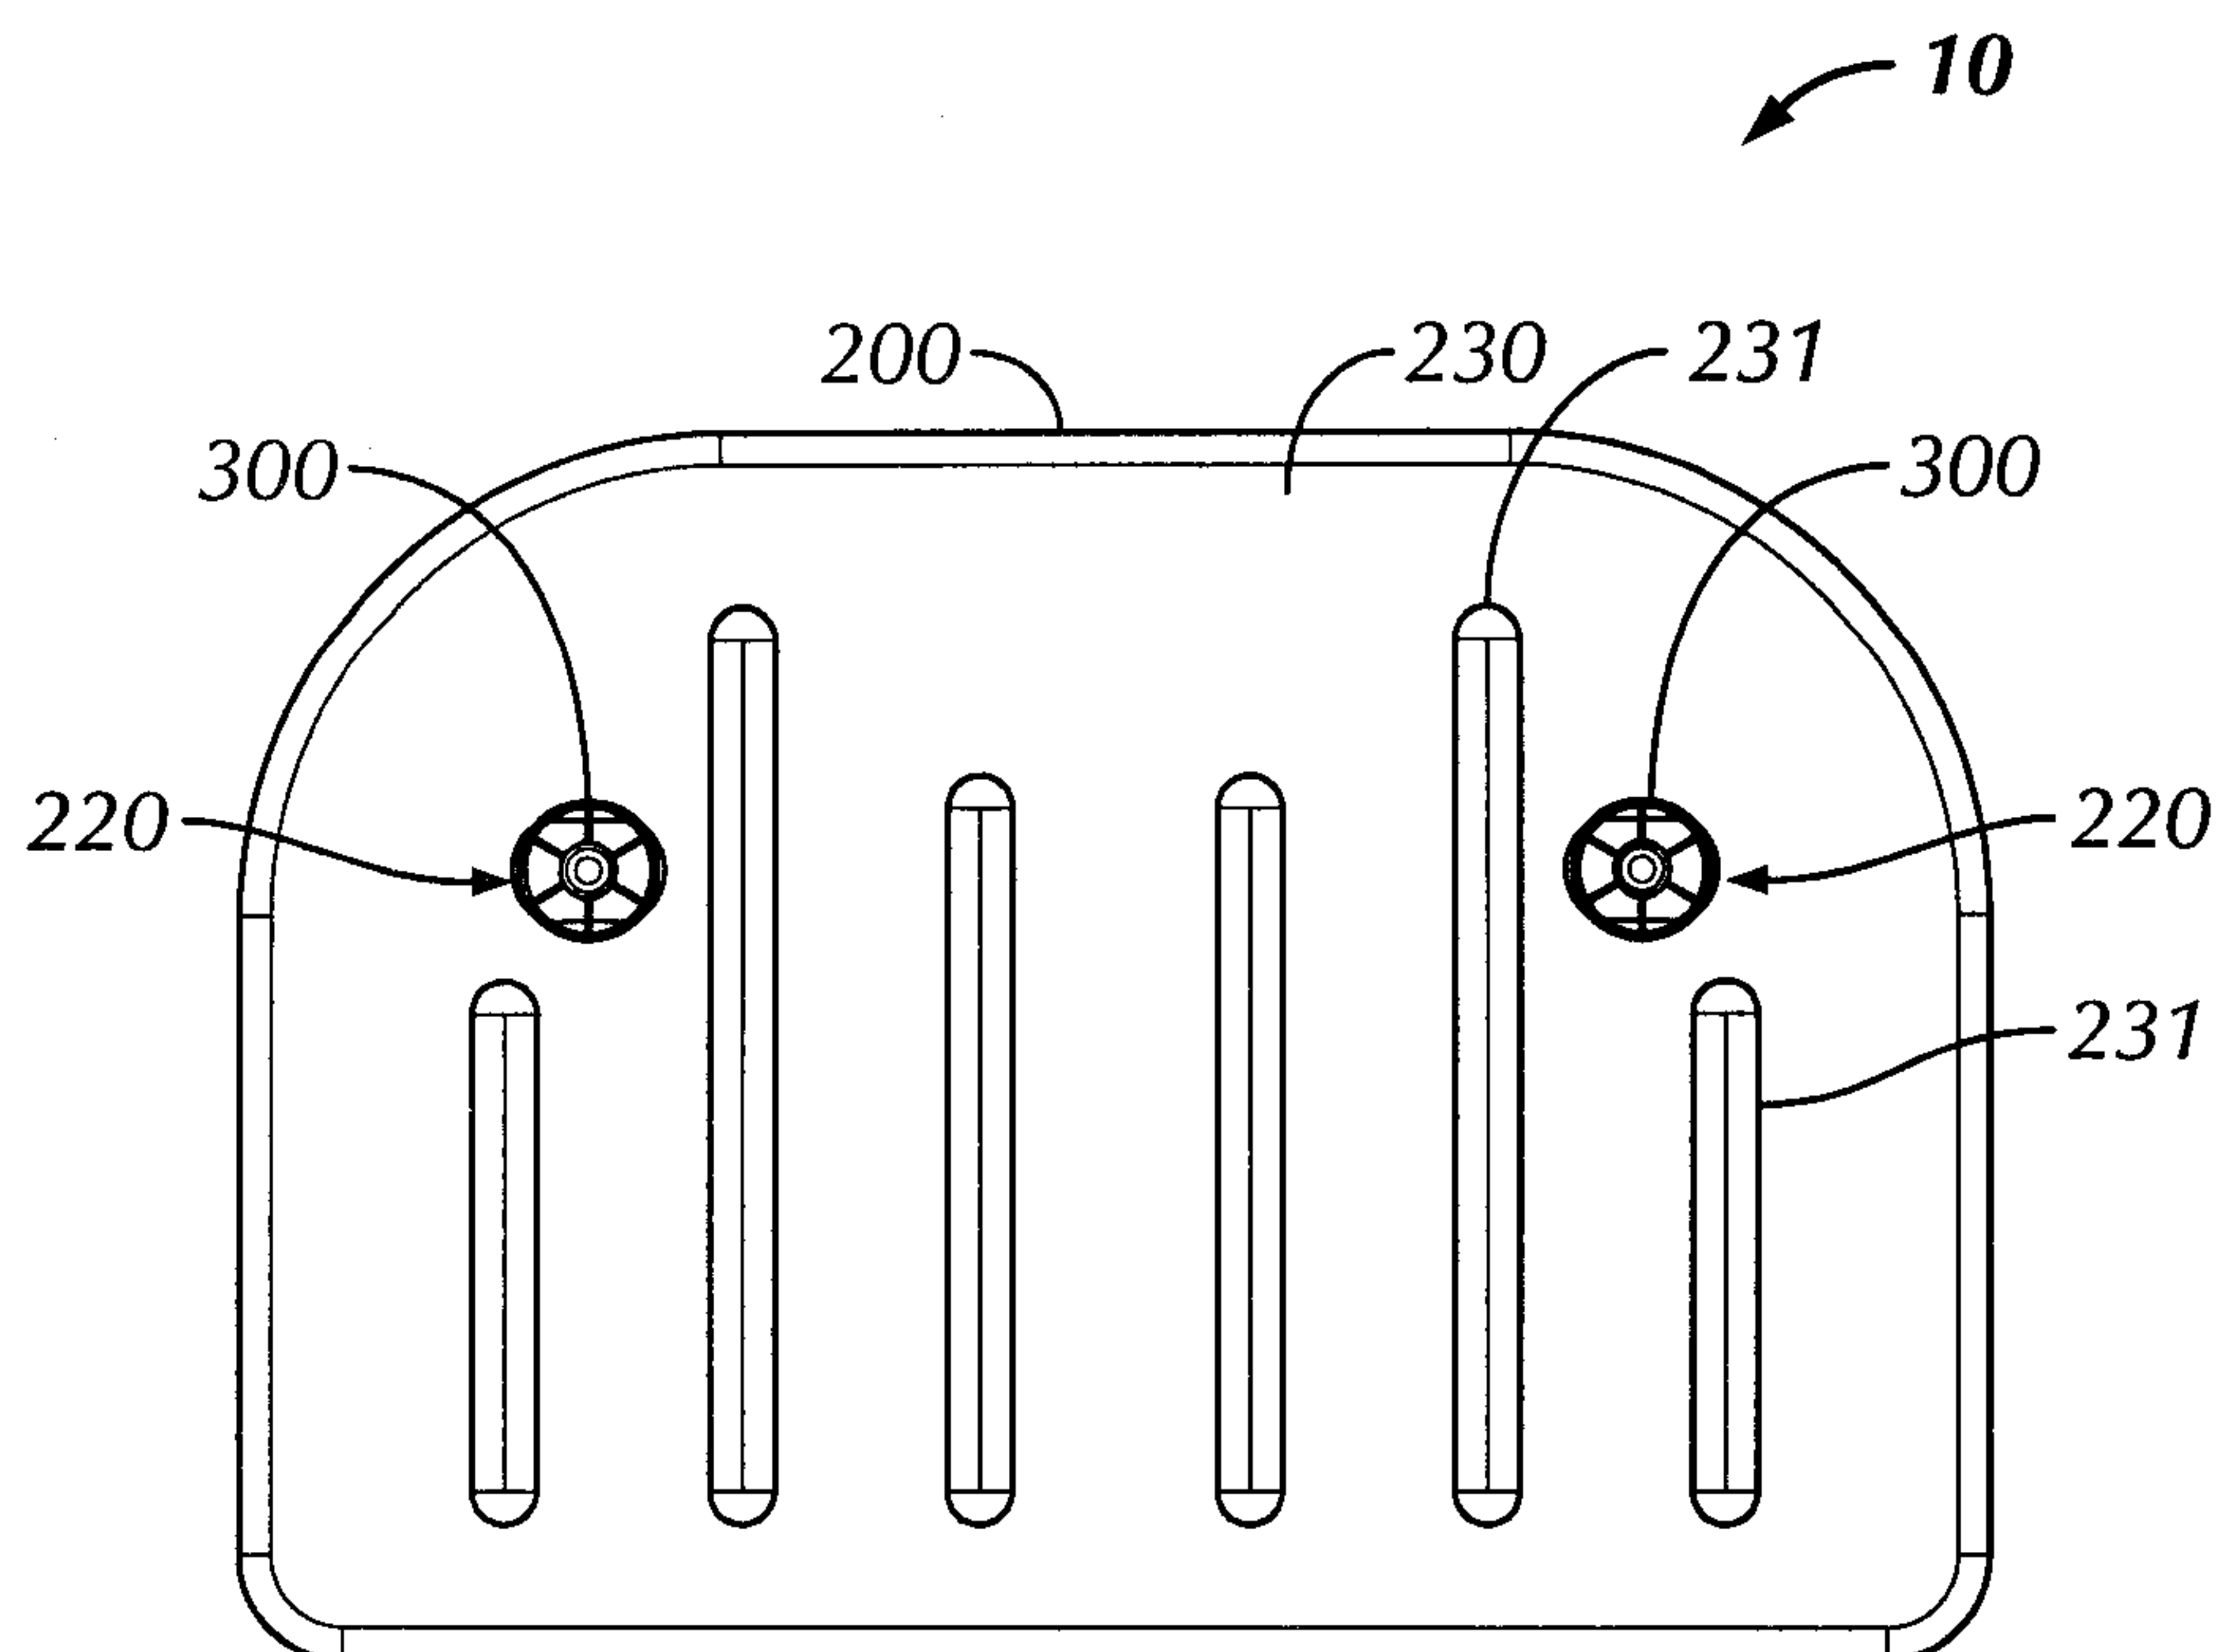


FIG. 7

11/14

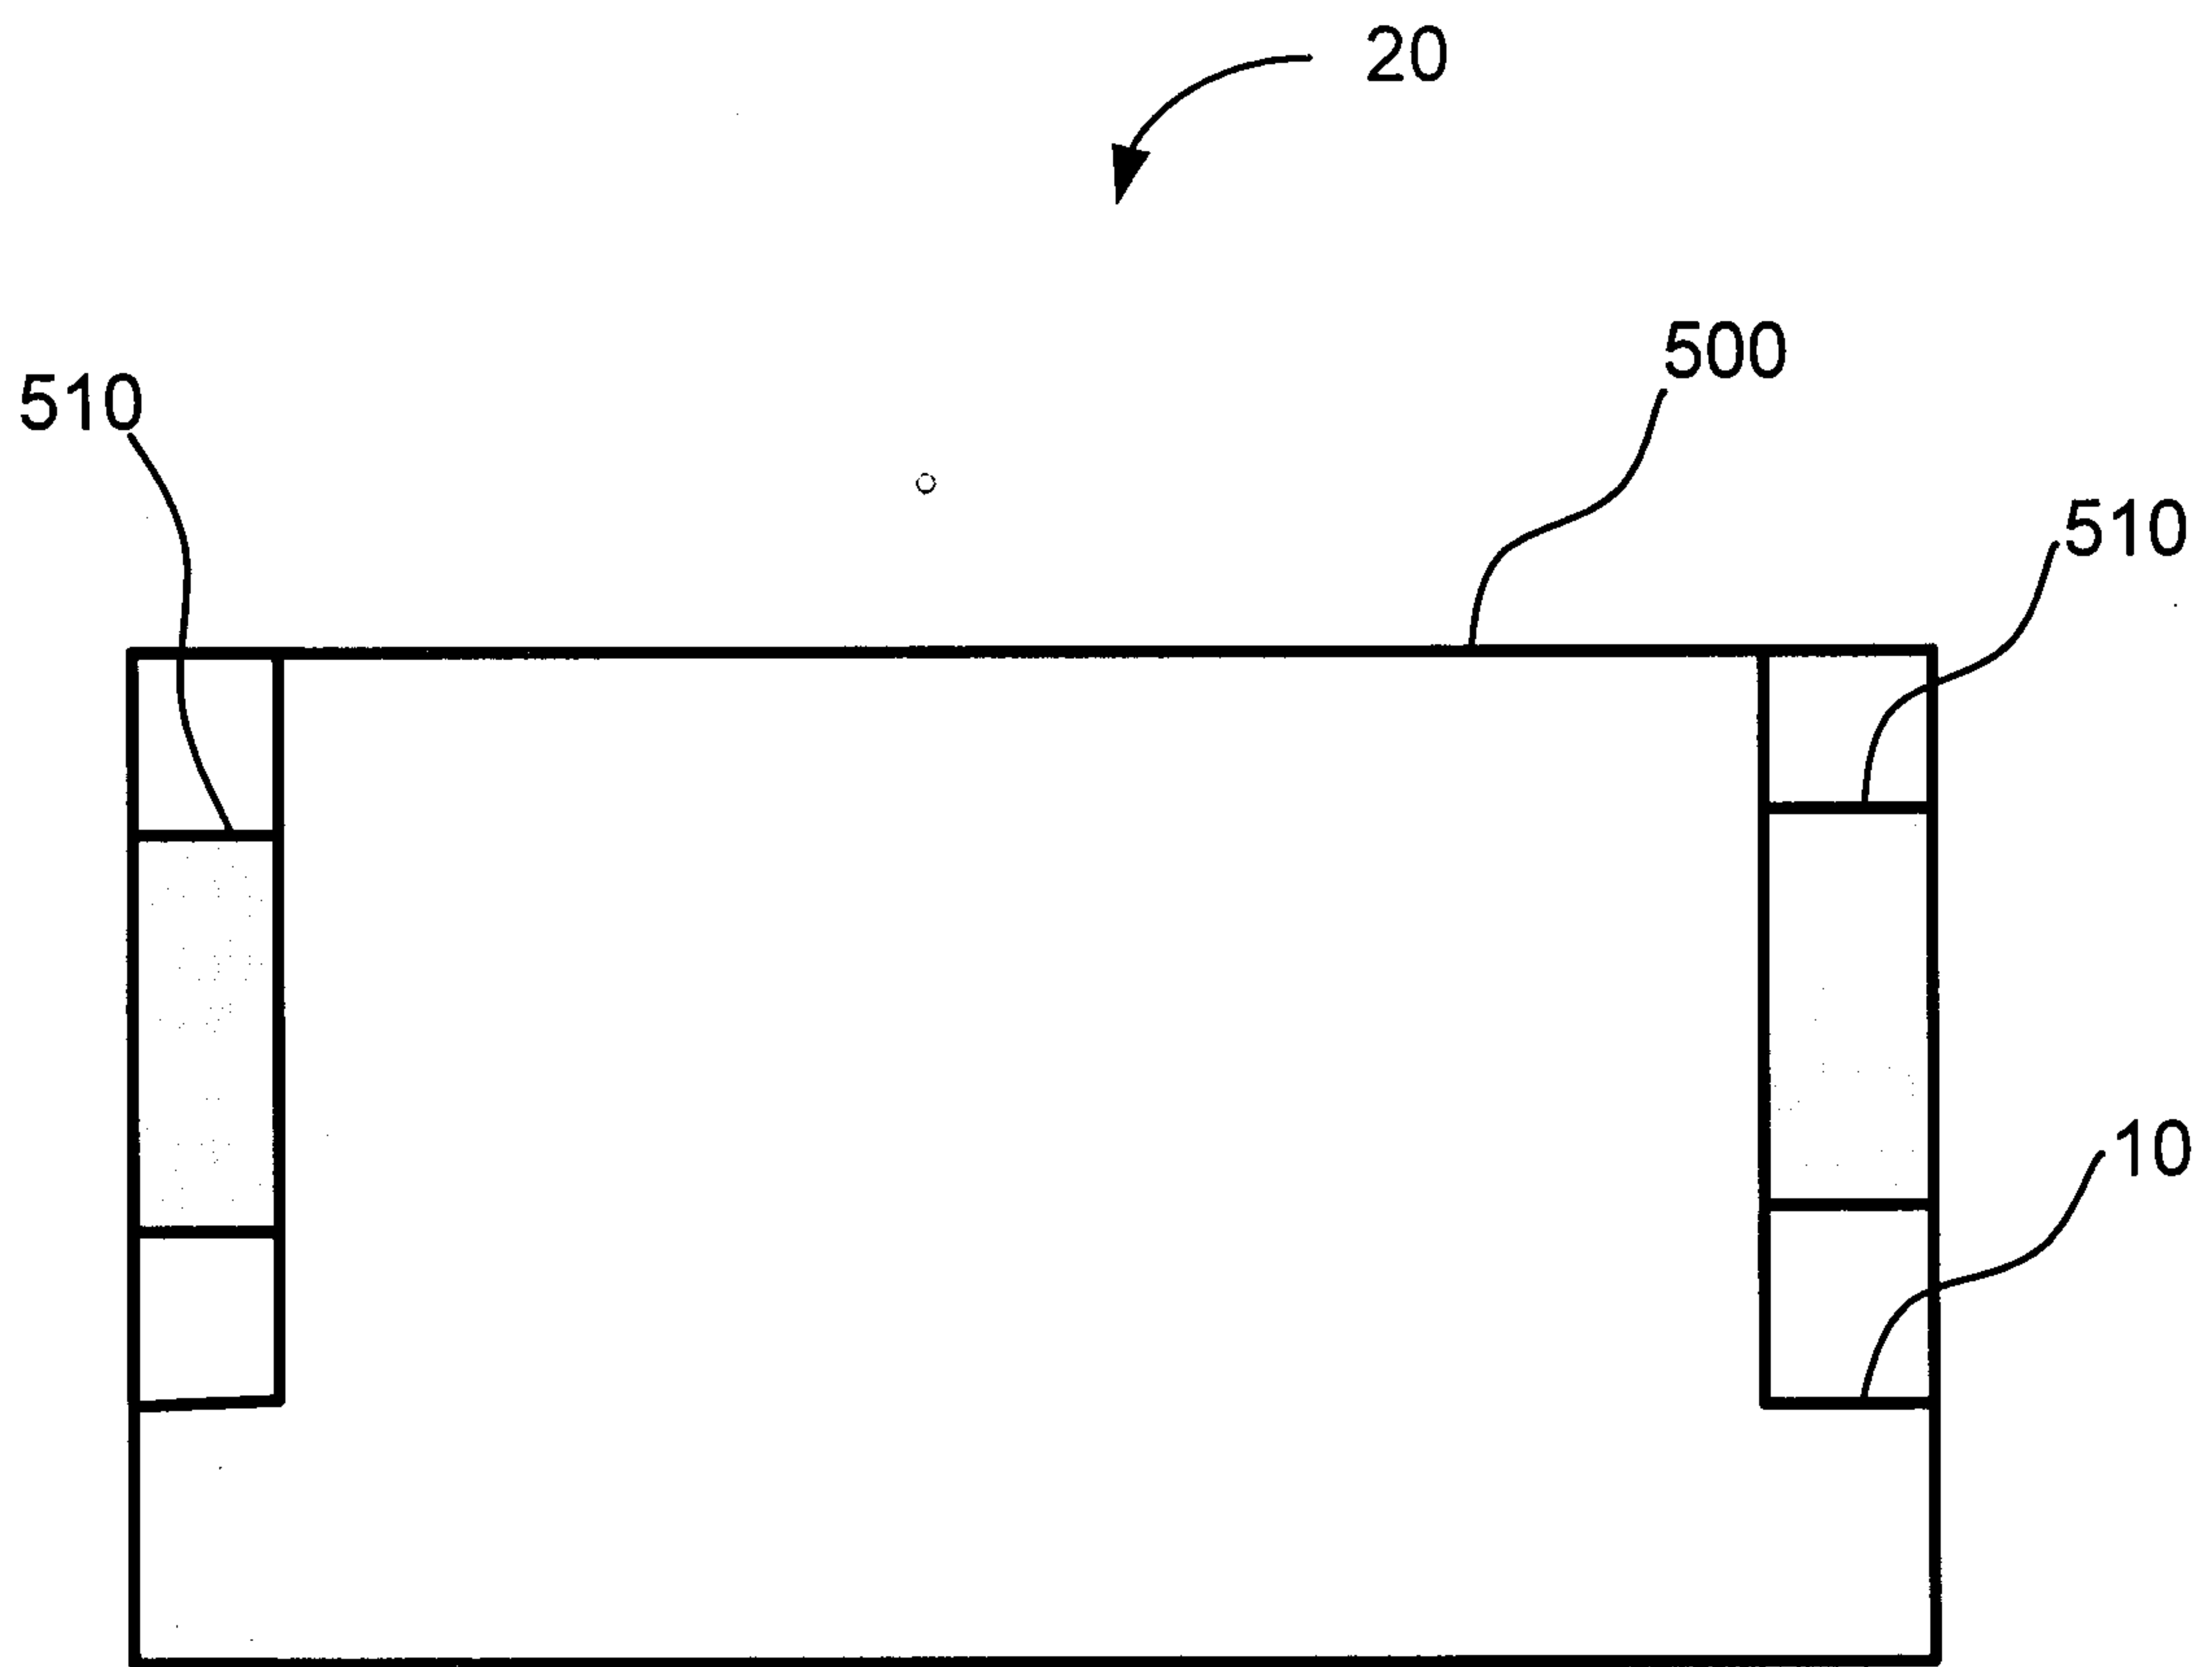


FIG. 8

12/14

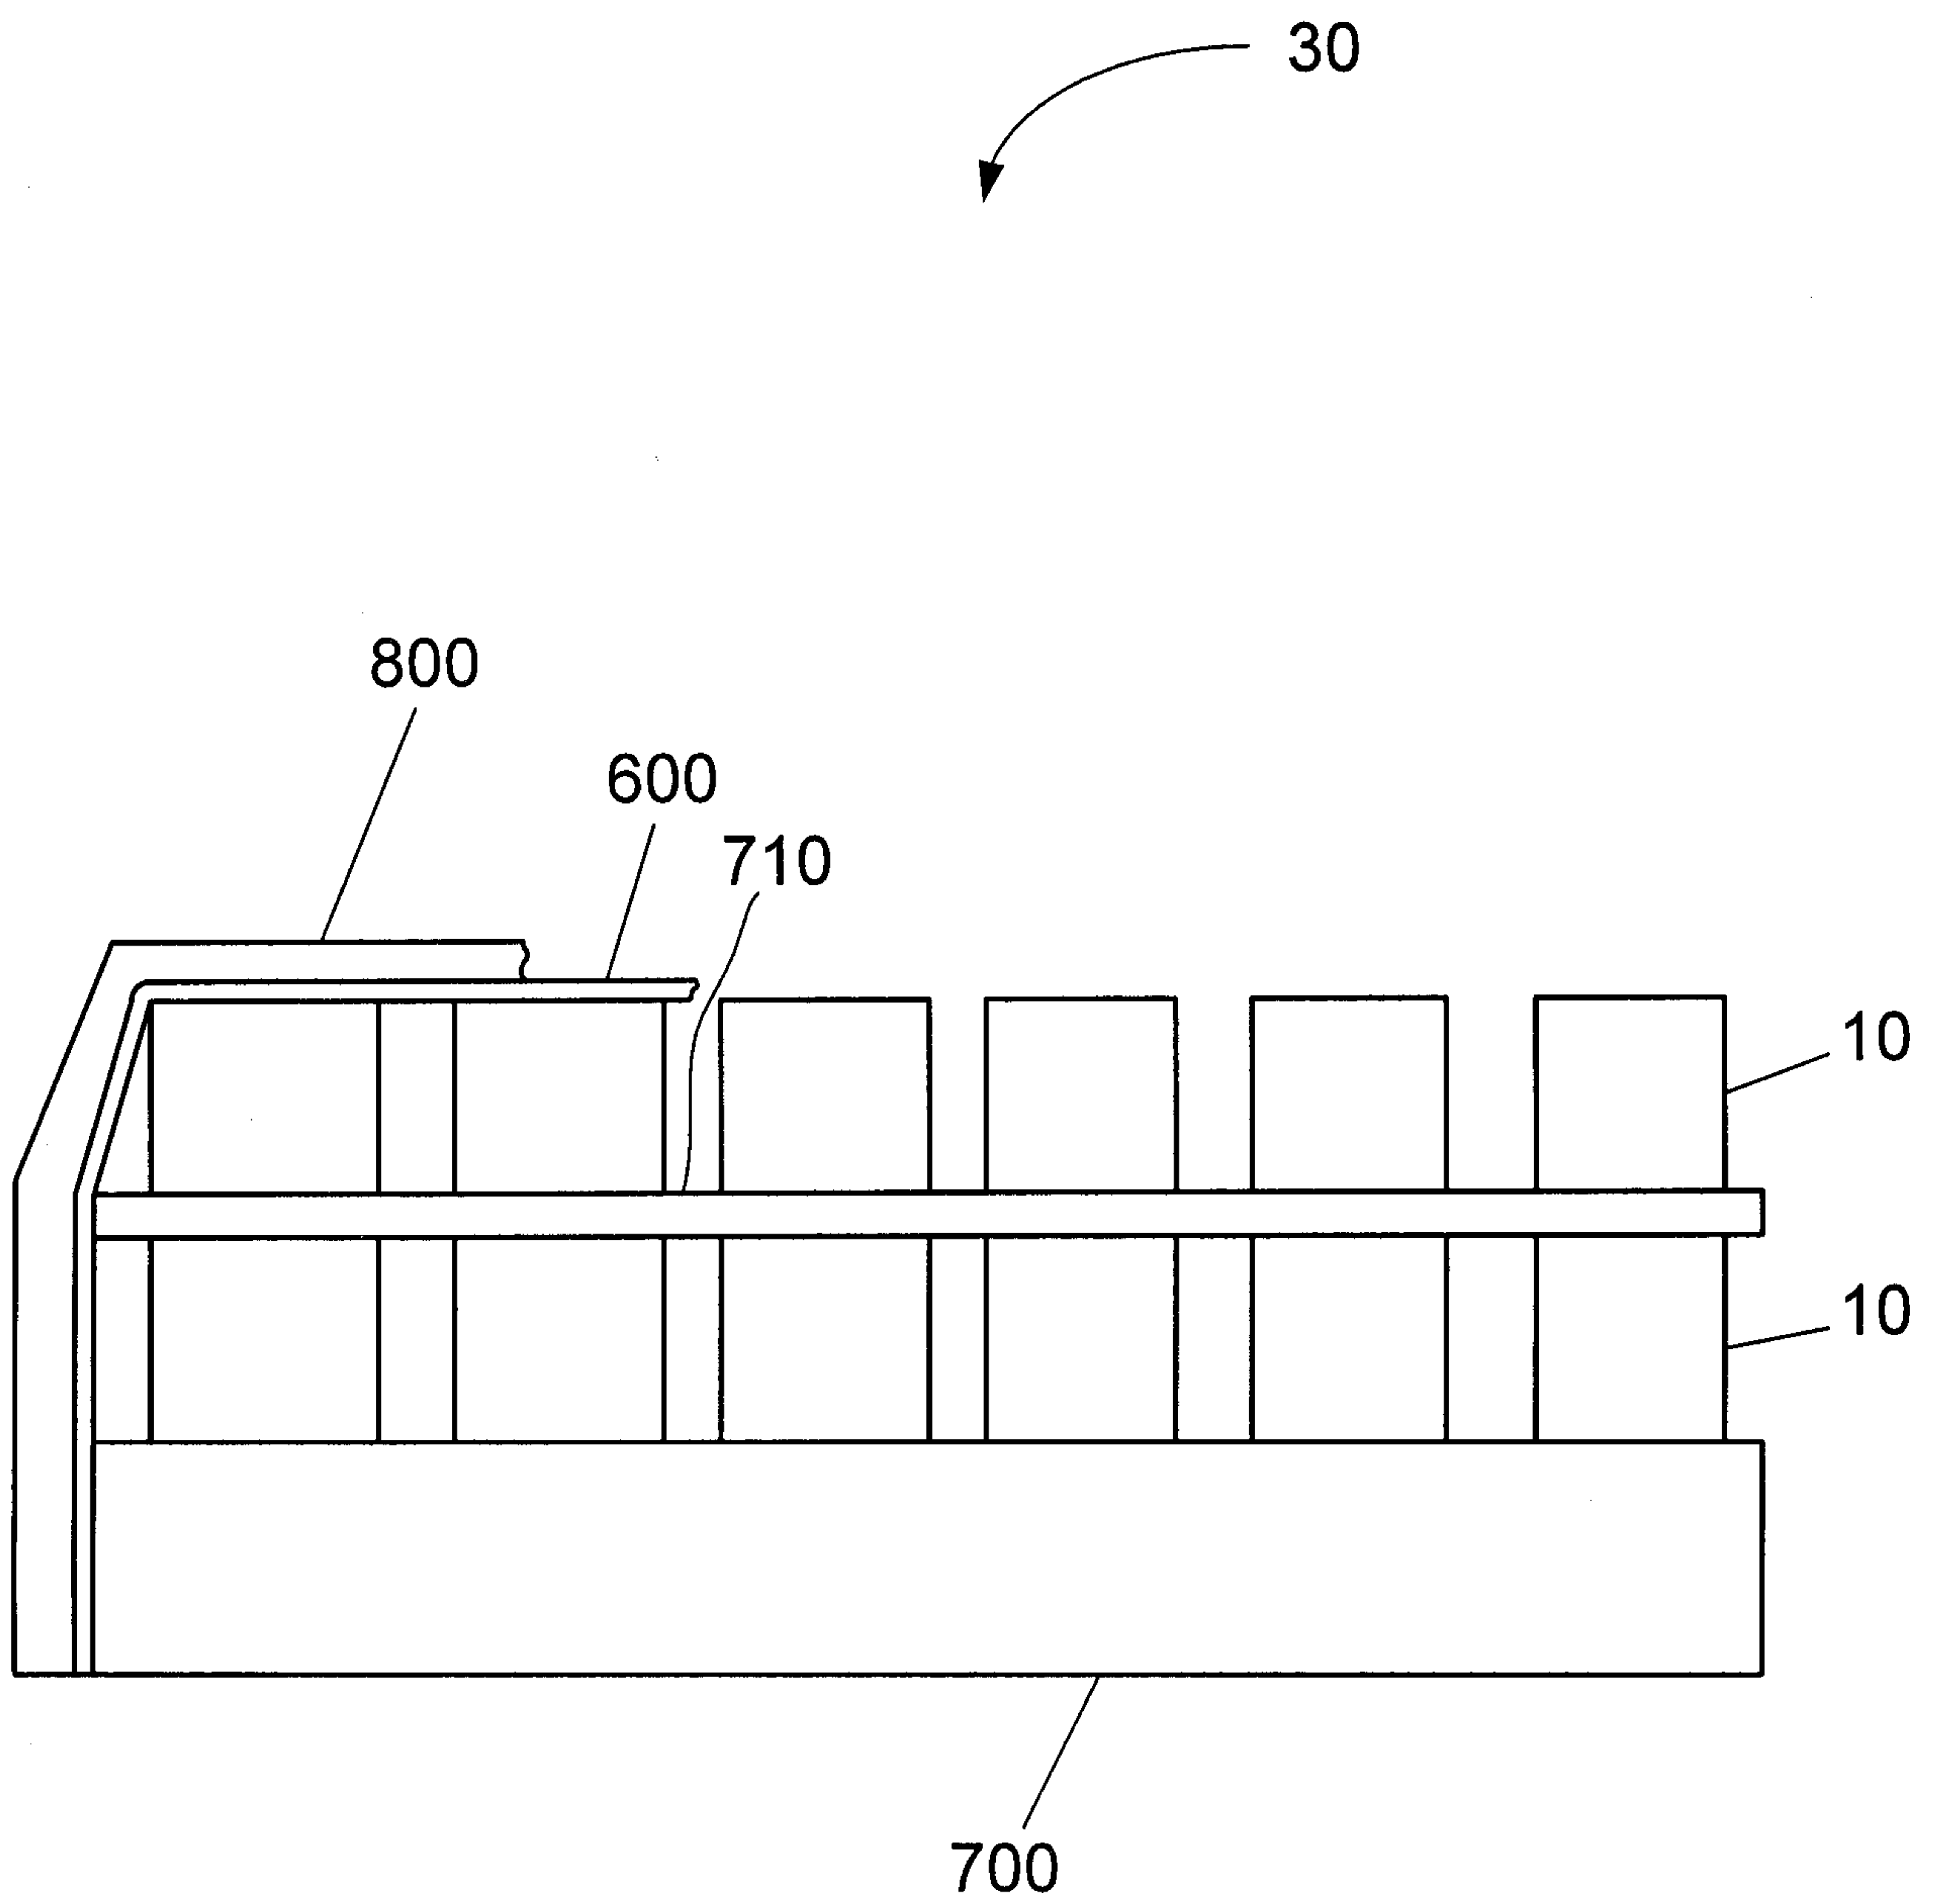


FIG. 9

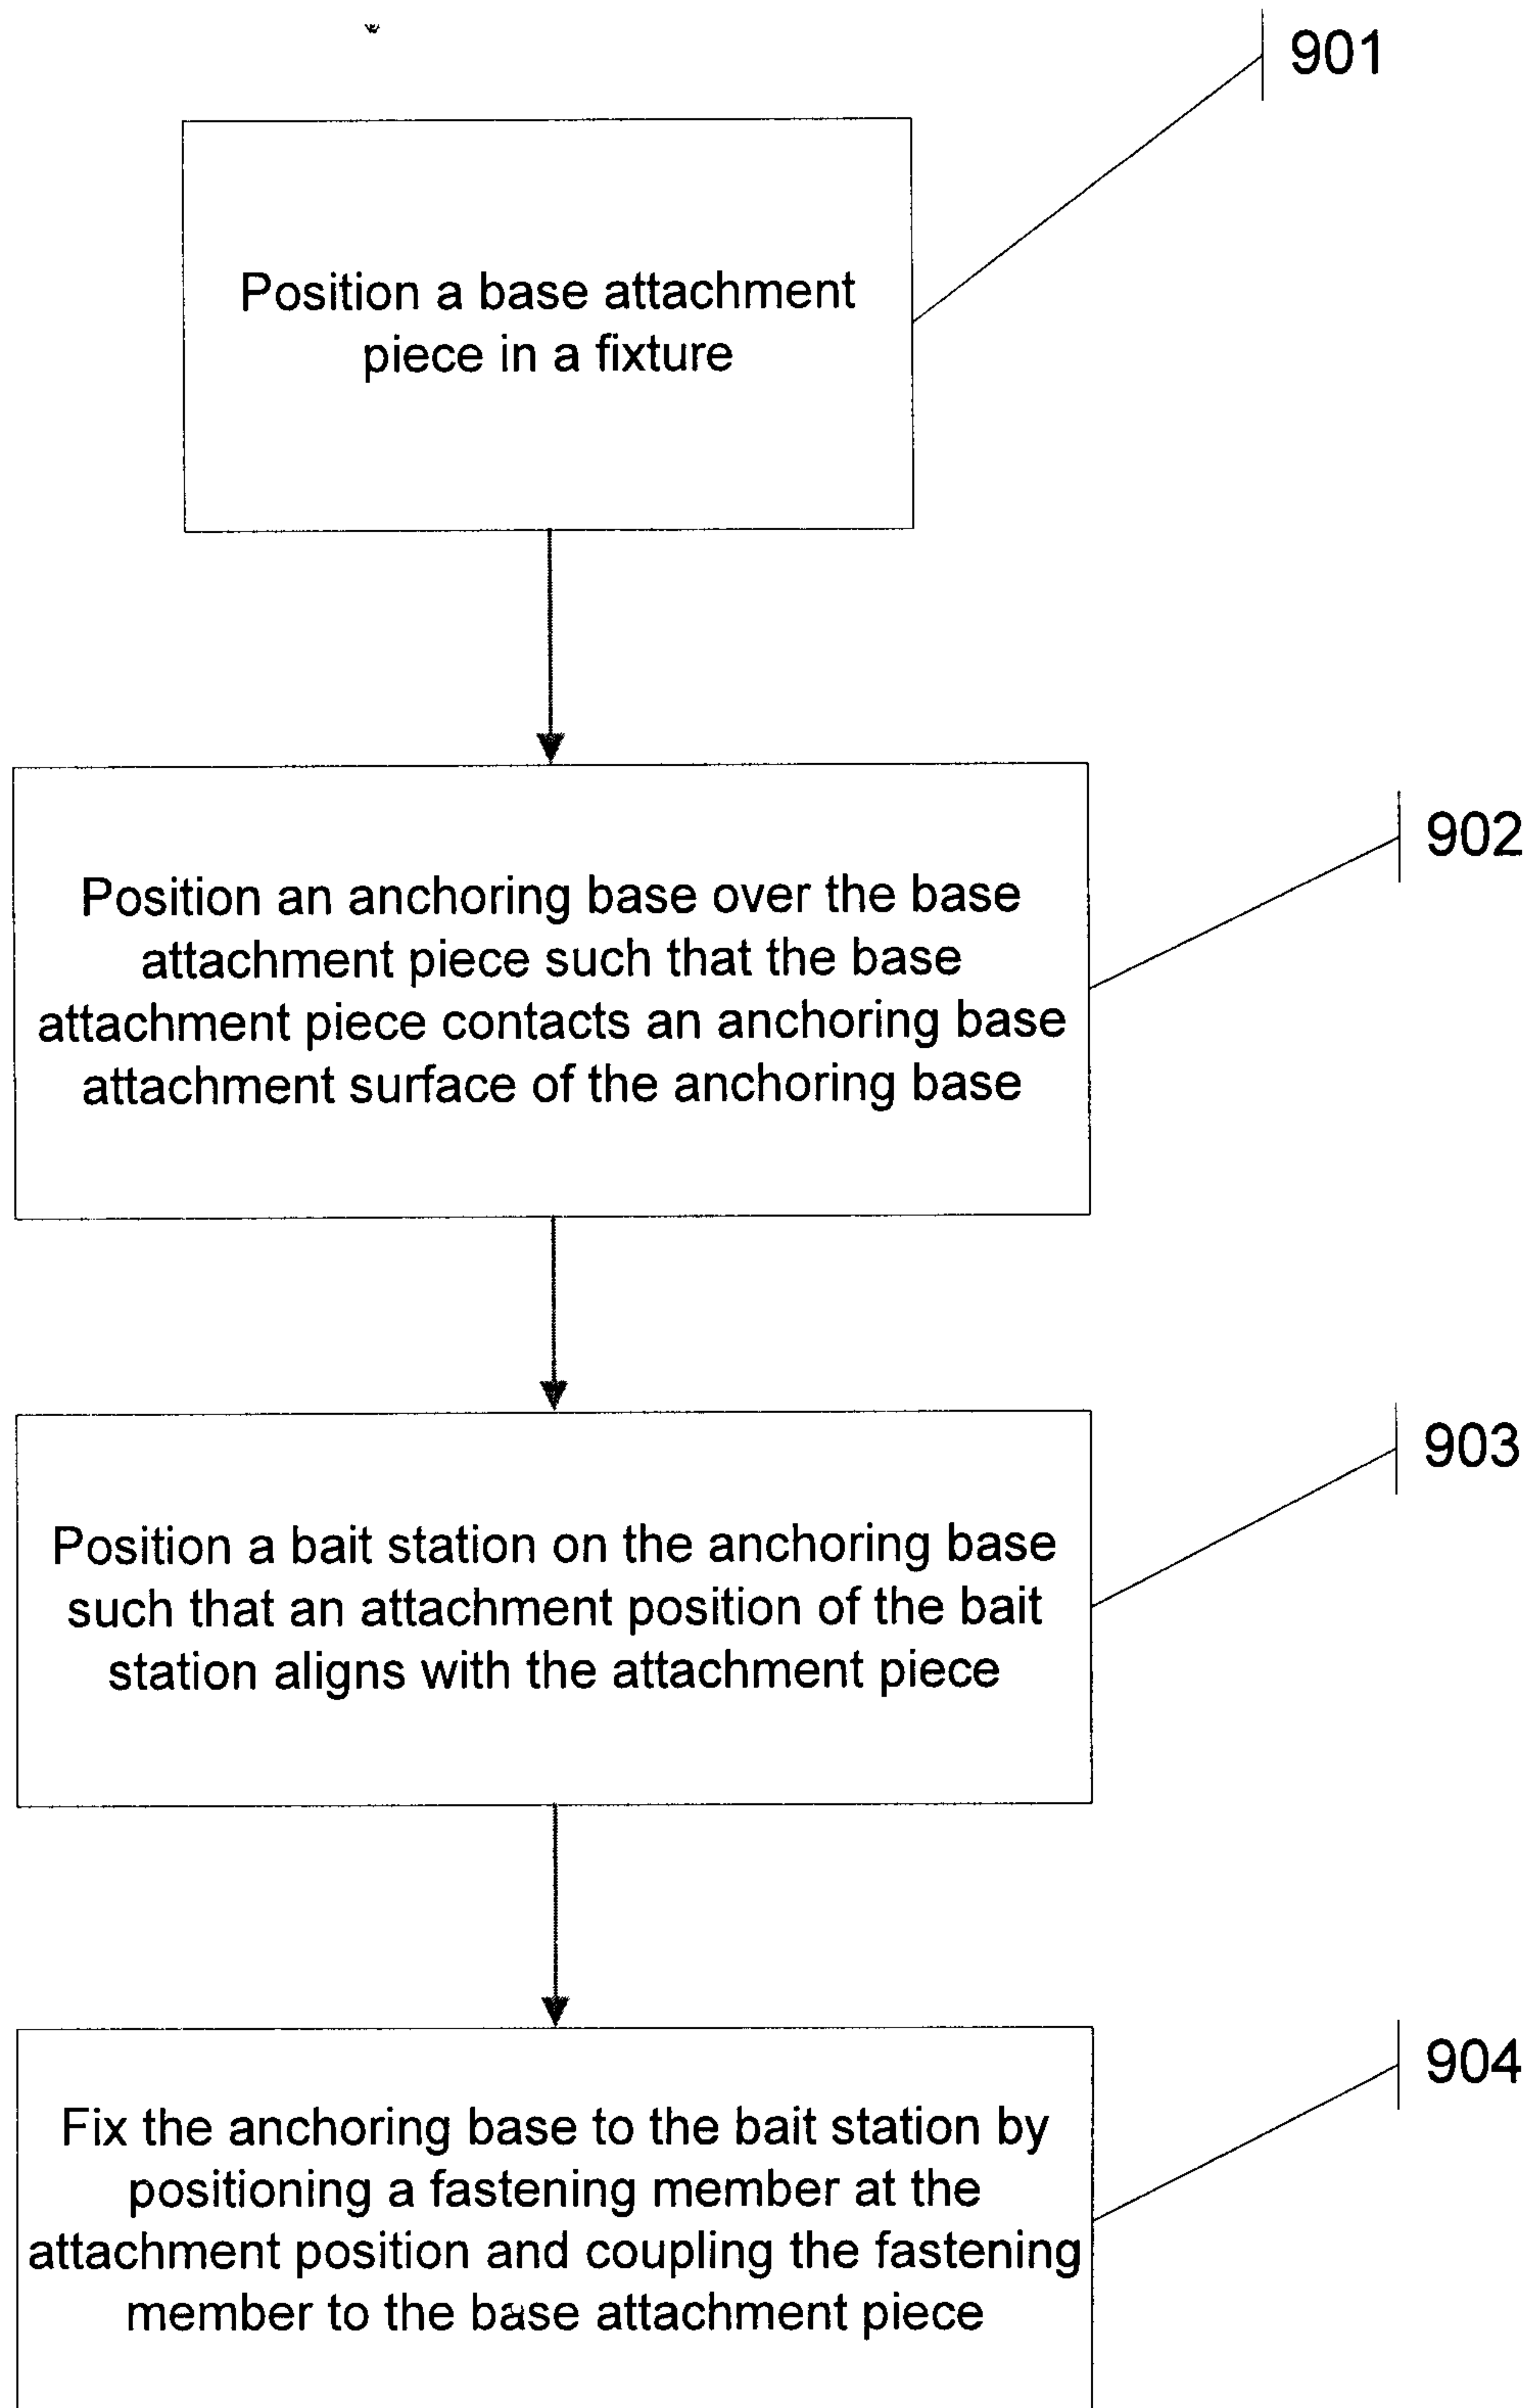


FIG. 10

14/14

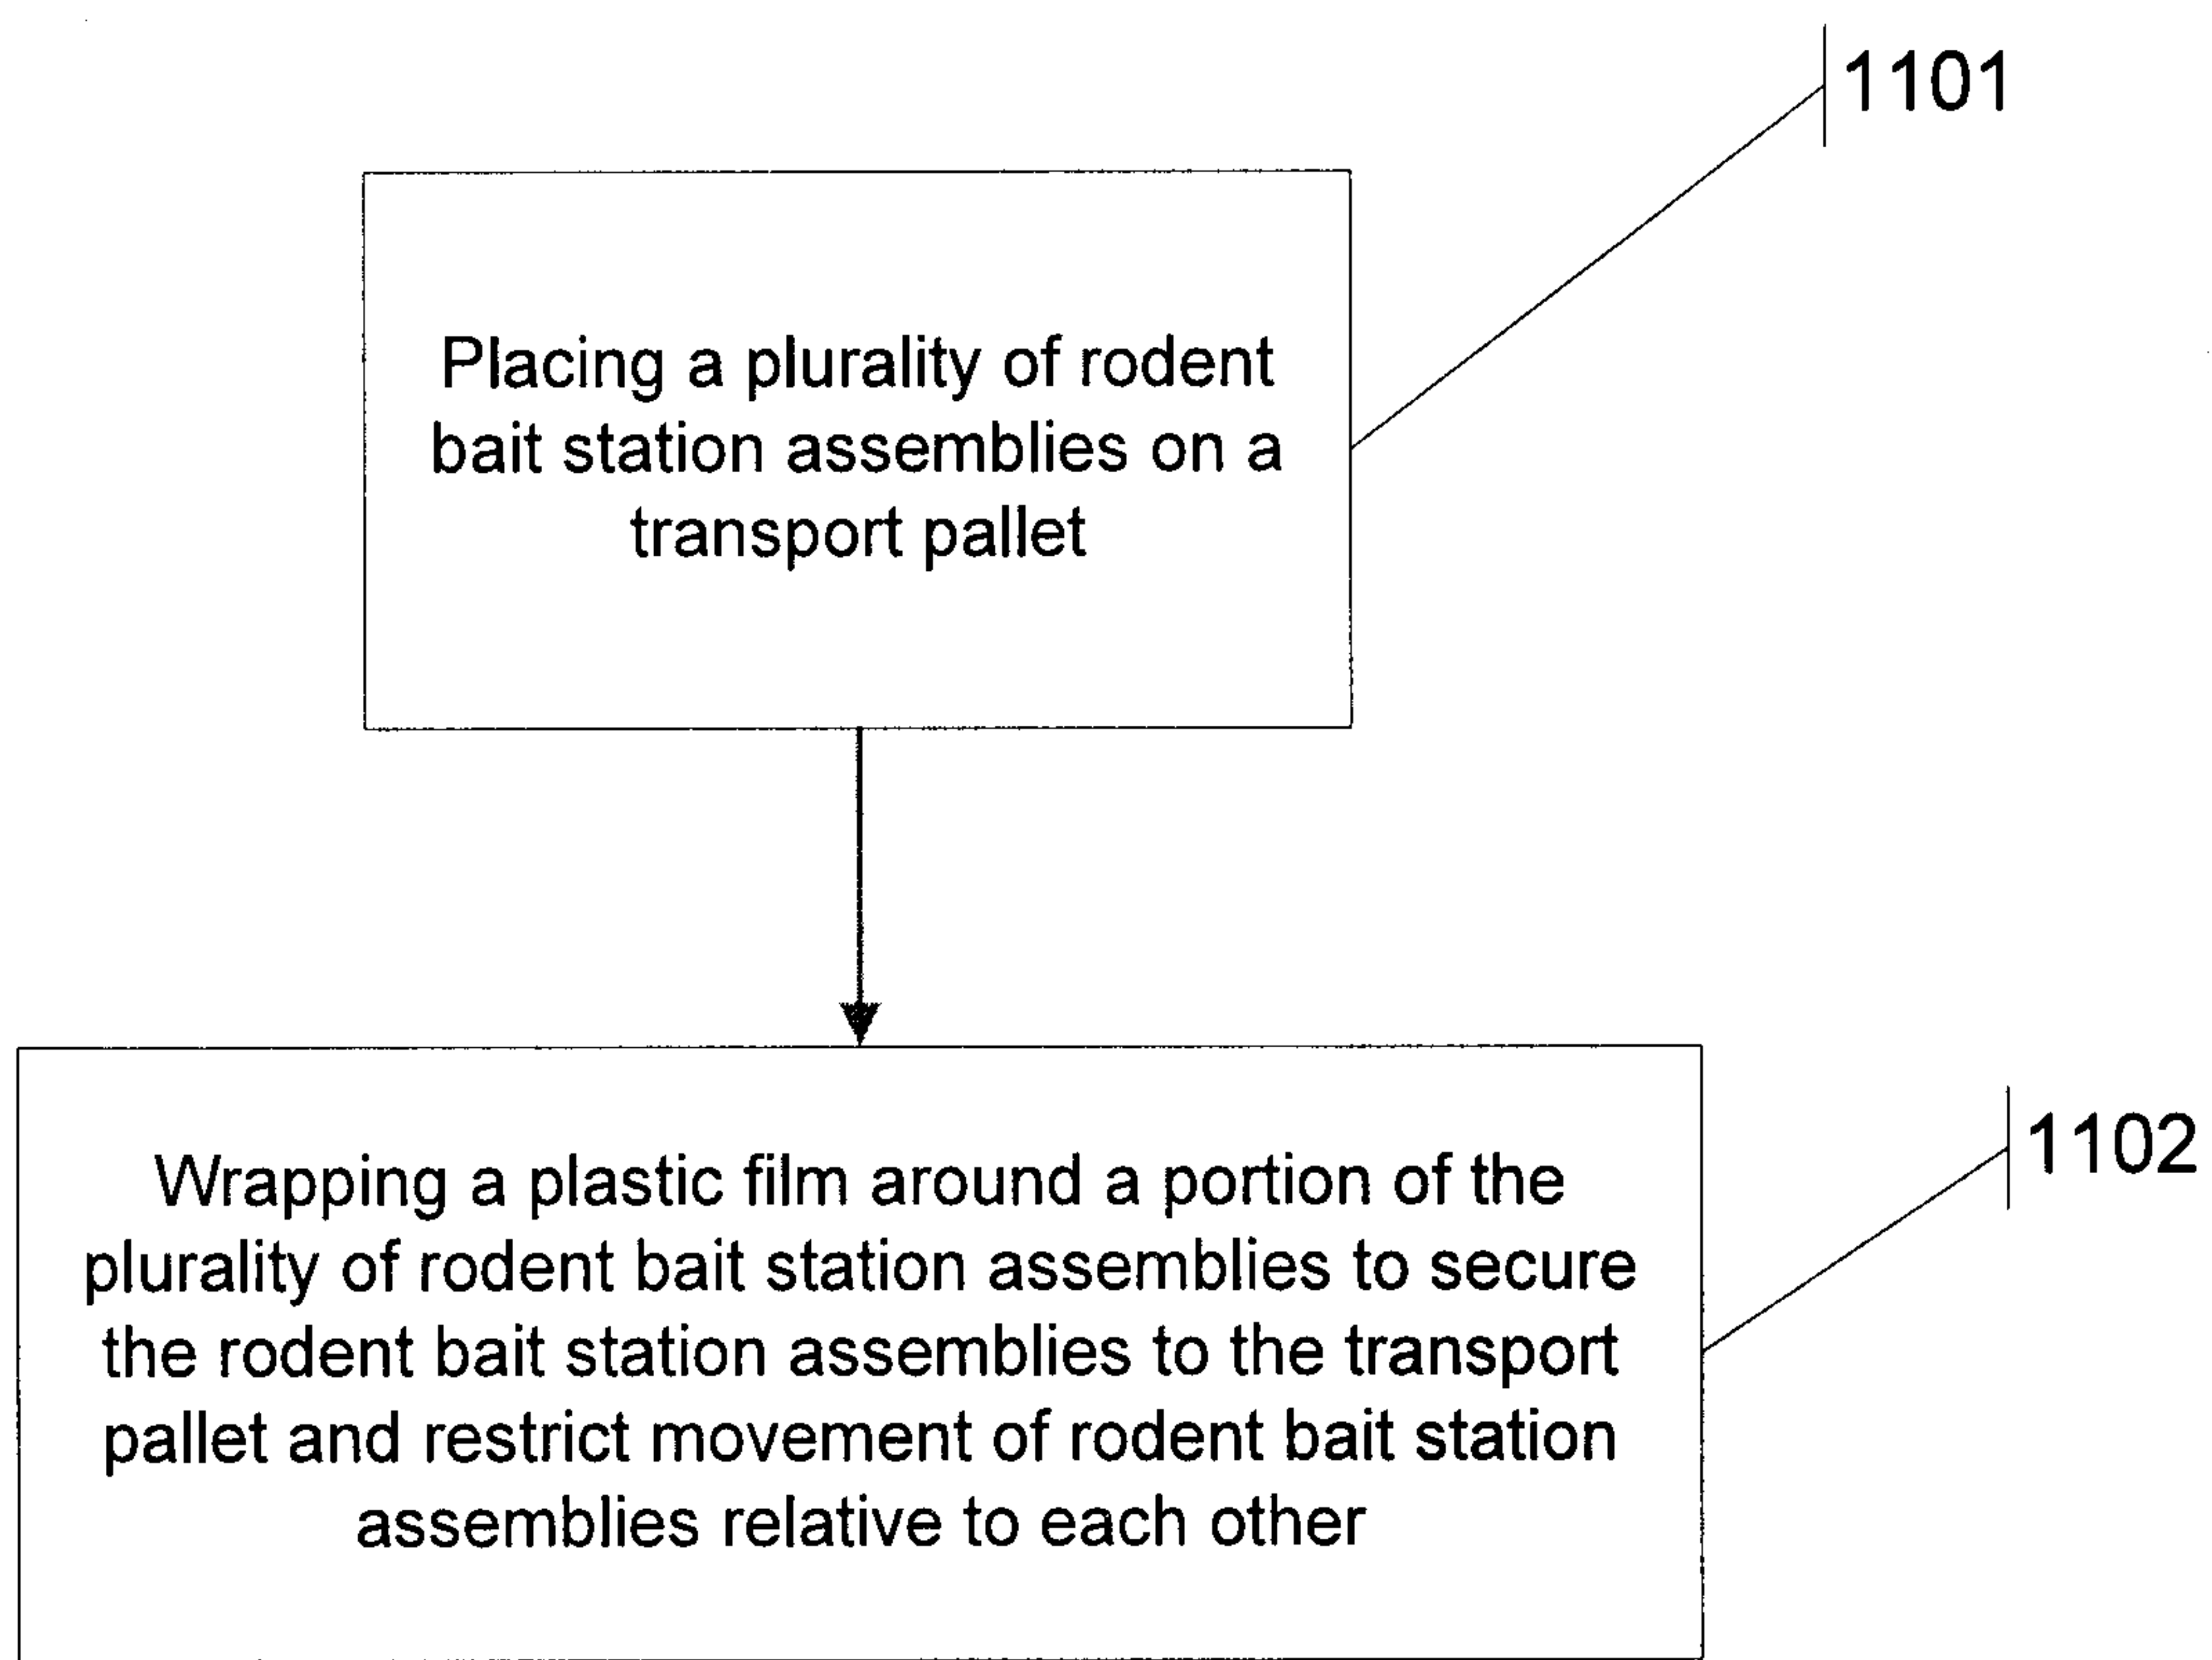


FIG. 11

