



- (51) International Patent Classification:
B05B 1/06 (2006.01) *B05B 1/14* (2006.01)
- (21) International Application Number:
PCT/NO2012/050028
- (22) International Filing Date:
23 February 2012 (23.02.2012)
- (25) Filing Language: Norwegian
- (26) Publication Language: English
- (30) Priority Data:
20110306 24 February 2011 (24.02.2011) NO
- (71) Applicant (for all designated States except US): **SWT AS** [NO/NO]; Fabrikkveien 13, N-4323 Sandnes (NO).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SOLTVEDT, Terje Morten** [NO/NO]; Veidemannsveien 12 A, N-4328 Sandnes (NO). **SOLTVEDT, Daniel** [NO/NO]; Veidemannsveien 12 A, N-4328 Sandnes (NO). **TJØRHOLM, Sven Egil** [NO/NO]; Fabrikkveien 13, N-4323 Sandnes (NO).

- (74) Agent: **OSLO PATENTKONTOR AS**; Postboks 7007M, N-0306 Oslo (NO).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

- (54) Title: NOZZLE FOR CREATING A WATER HEAT SHIELD WHEN FLARING WASTE GASES

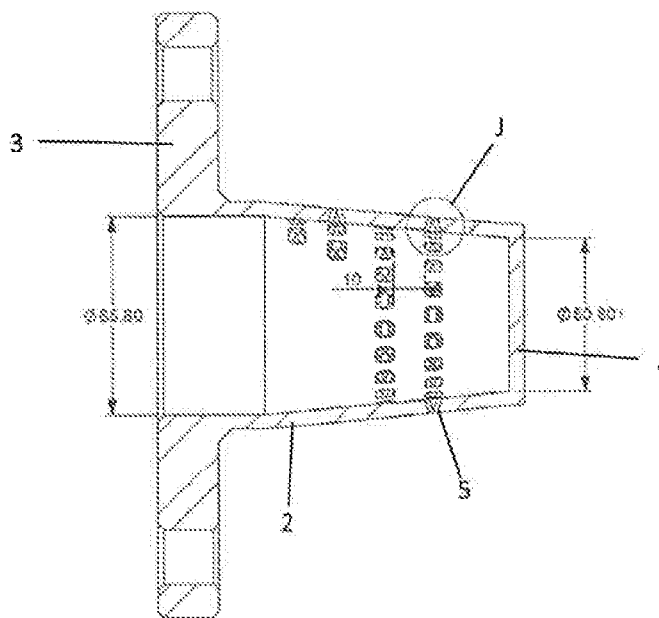


Fig. 4 cross-section B-B

- (57) Abstract: The present invention provides a nozzle 1 for generating a water shield, the nozzle comprises a nozzle body 2 being hollow and having a substantially circular circumference, said nozzle body comprises a first and second end 3,4 and an inner 7 and an outer 6 surface, the first end 3 is open and has a construction suited for coupling to a source of pressurized water, and the second end 4 is closed, the nozzle body further comprises multiple holes 5 extending from the inner to the outer surface, the holes arranged in at least one row extending around at least parts of the substantially circular circumference, the holes having a cross-section at the inner and outer surface of the nozzle body, wherein the cross-section of the holes 5 has a larger area at the inner surface 7 of the nozzle body than at the outer surface 6.

**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

Published:

- with international search report (Art. 21(3))

NOZZLE FOR CREATING A WATER HEAT SHIELD WHEN FLARING WASTE GASES

Technical field of invention

The present invention concerns a nozzle. The nozzle is particularly suited for generating a water shield, and consequently for use in protecting against heat generated during the flaring of gas in oil/gas production.

Background of the invention

In oil/gas production it is necessary to get rid of hydrocarbons during the testing/test-production of wells.

Several nozzles of various designs are known for use with the aim of creating a water shield which protects the platform, equipment and people from the intense heat which arises when excess of hydrocarbons, oil or gas, is burnt by using so called flaring, i.e. the burning of said hydrocarbons from a flaring boom.

Both patent application GB 2433710 A and GB 2465427 A shows nozzles for the generation of a water shield for heat protection during flaring. The nozzles are closely related and use a deflector plate at the end of the nozzle in order to achieve the desired water shield.

The nozzles presently in use consist of a number of moveable parts which requires a high level of maintenance. Further, said nozzles do not have the possibility for an asymmetric design of the water shield or several water shields at the same time, they are not suited for highly pressurized water (only max 20 bar), and may easily be clogged.

The aim of the present invention is to provide a nozzle for generating a water shield, while at the same time avoiding or alleviating at least one, preferably several, of the disadvantages of the presently used nozzles.

Abstract of the invention

The present invention provides a nozzle for generating a water shield.

Accordingly, the invention is further defined by:

A nozzle for generating a water shield, comprising a substantially circular and hollow nozzle body with a first and second end and an inner and an outer surface, the first end of the nozzle body is open and has a construction suited for coupling to a source of pressurized water, the second end is closed, the nozzle body comprises multiple
5 holes extending from the inner surface to the outer surface, the holes arranged in at least one row extending around at least parts of the substantially circular circumference of the nozzle body, the holes having a cross-section at the inner and outer surface of the nozzle body, said cross-section having a larger area at the inner surface than at the outer surface.

10 In one embodiment of the nozzle, the cross-section of the holes, at the inner and outer surface of the nozzle body, comprises two first sides, the first sides being parallel to each other and perpendicular to a centerline of the nozzle body, and two second sides.

In one embodiment of the nozzle, the spacing between the first sides is less at the outer surface of the nozzle body than at the inner surface.

15 In one embodiment of the nozzle, the cross-section of the holes at the outer and inner surface, comprises two first sides, the first sides being parallel to each other and perpendicular to a centerline of the nozzle body, and two second sides, at least some of the holes comprises two planes extending from the outer to the inner surface of the nozzle body, each plane limited by one of the first sides at the outer and inner surface, and the two planes are inclined with respect to each other at an angle of about 20° to
20 45°, preferably 25° to 40°.

In one embodiment of the nozzle, the spacing between the second sides is the same at the outer surface and the inner surface.

In one embodiment of the nozzle, the spacing between the second sides is larger at the outer surface than at the inner surface.

25 In one embodiment of the nozzle it comprises two rows of holes around the whole circumference of the nozzle body. The nozzle may further comprise a row of holes along about one fourth of the circumference of the nozzle body, and a row of holes along about one fifth of the circumference of the nozzle body.

30 In one embodiment of the nozzle, the circumference of the nozzle body is larger at the first end than at the second.

In one embodiment, the nozzle comprises a flange or another suitable pipe coupling, such as 2" or 3" NPT, at the first end. Any suitable method/design for coupling the first end of the nozzle body to a high pressure water source may be used.

In one embodiment of the nozzle, the holes of the same row have an equal spacing to one end of the nozzle body.

The invention also comprises the use of a nozzle, as defined over, for the protection of equipment and personnel from heat sources.

The nozzle according to the present invention has a number of advantageous properties, including the fact that no moveable parts are necessary, it can be designed to provide water shields of several different shapes, and/or several layers of water shields at the same time, it can sustain very high water pressure (above 100 bar if desirable), the whole nozzle is preferably manufactured in stainless steel (provides a low weight and reduces the risk of clogging of the nozzle due to salt).

By customizing the holes according to the need, the nozzle can be adapted for harder working conditions. Such as for instance a harder and stronger water shield that may be optimal in strong winds, wherein the water shield must keep the height as long as possible before being broken up by the wind.

The nozzle provides a water shield having a much larger diameter than the presently used nozzles. This means that the number of nozzles which needs to be installed on the rig is significantly less.

The nozzle can use the high pressure system of the rig for the provision of cooling water. This entails a reduced need for equipment which must be adapted for using the nozzle. Presently used nozzles are not suited or designed for use of the rig's own high pressure system, and the need for third party equipment delivery is significantly larger.

Short description of the drawings

Figure 1 shows a nozzle according to the invention.

Figure 2 shows a side view of the nozzle in figure 1.

Figure 3 shows a top view of the nozzle in figure 2.

Figure 4 shows a cross-section of the nozzle in figure 2.

Figure 5 shows enlarged details J and K from figure 4 and 2, respectively.

Figure 6 shows a side view of an alternative embodiment of a nozzle according to the invention.

Figure 7 shows a cross-section of the nozzle in figure 6.

5 Figure 8 shows a cross-section of the nozzle in figure 6.

Figure 9 shows details of nozzle holes for the nozzle in figure 6.

Detailed description of the invention

10 An embodiment of the nozzle according to the present invention is shown in the figures 1-5.

The nozzle 1, see fig. 1, is mounted via the end 3 to a corresponding coupling on a pipe for the supply of water under high pressure, see fig. 2 and 4. In this embodiment, the end 3 of the nozzle comprises a flange. A gasket is mounted in between the bearing surfaces.

15 Supplied water will enter the nozzle body 2 and pushed out via the holes 5. Due to the design of the holes 5, see figure 5 detail K and J, the water will pass through the holes 5 from the inner surface 7 of the nozzle body to the outer surface 6 and leave the nozzle body 2 having a very high velocity. The water leaves the nozzle body 2 with a direction which makes the water keep together in a straight beam before it loses its kinetic energy and falls down. This effect is achieved by, among other things, inclining two of the
20 opposing planes of the holes (the holes can be either substantially oval or rectangular), the planes that are perpendicular with regards to the direction of the supplied water (or the longitudinal direction of the nozzle body), in towards each other in the direction out of the nozzle. The inclination angle between the planes is preferably about 25-40°. The
25 two other opposing planes of the hole, the planes which are not perpendicular with regards to the direction of the supplied water, are either parallel to each other or inclined away from each other in the direction out of the nozzle. In this specific connection it shall be noted that the holes may have a cross-section which is substantially oval or rectangular, and that the terms perpendicular and parallel is to be broadly interpreted in
30 that they also include the case that the opposing planes of the holes are more or less bow shaped.

The water which is pushed through the two rows of holes 5, which are closest to the first end 3, wherein highly pressurized water is supplied, will leave the nozzle body 2 in a

larger amount, and with correspondingly increased energy, to achieve a higher vertical beam than what is achieved for the two rows of holes 5 furthest from said first end. This beam will preferably have its area of effect in a direction between 10:00 and 14:00 hours. The water which leaves the nozzle body 2 through the row of holes closest to the first end 3, the end comprising a flange, will prevent heat radiation towards the rig during an operation performed when wind is non-existent or weak.

In other embodiments of the nozzle, the first end 3, which is coupled to the high-pressure water supply, is designed such that it may be coupled by using other coupling means than a flange. These techniques include various types of threads, such as 2" and 3" NPT (National Pipe Thread Taper), and other suitable coupling means known to the skilled person. One such alternative embodiment is shown in figures 6-9, wherein the first end which is coupled to the water supply is intended for a coupling according to 2" or 3" NPT.

The number, positioning and design of the holes, and the rows formed by these, may be varied according to the desired dimension and direction of the water shield(s). In this regard, the nozzle shown in the figures 6-9 has only two rows of holes for generating a symmetrical water shield.

Claims

1. A nozzle (1) for generating a water shield, the nozzle comprises a nozzle body (2) being hollow and having a substantially circular circumference, said nozzle body comprises a first and second end (3,4) and an inner (7) and an outer (6) surface, the
5 first end (3) is open and has a construction suited for coupling to a source of pressurized water, and the second end (4) is closed, the nozzle body further comprises multiple holes (5) extending from the inner to the outer surface, the holes arranged in at least one row extending around at least parts of the substantially circular circumference, the holes having a cross-section at the inner and outer surface of the nozzle body,
10 characterized in that the cross-section of the holes (5) has a larger area at the inner surface (7) of the nozzle body than at the outer surface (6).
2. A nozzle according to claim 1, wherein the cross-section of the holes (5) at the outer (6) and inner (7) surface of the nozzle body, comprises two first sides (8) and two
15 second sides (9), the first sides (8) being parallel to each other and perpendicular to a centerline of the nozzle body.
3. A nozzle according to claim 1 or 2, wherein the cross-section of the holes (5) at the outer (6) and inner (7) surface of the nozzle body, comprises two first sides (8) and two
second sides (9), and the spacing between the two first sides (8) is less at the outer
surface (6) of the nozzle body than at the inner surface (7).
- 20 4. A nozzle according to any of claims 1-3, wherein the cross-section of the holes (5) at the outer (6) and inner (7) surface, comprises two first sides (8) being parallel to each other and perpendicular to a centerline of the nozzle body, and at least some of the holes comprises two planes extending from the outer to the inner surface of the nozzle body, each plane limited by the first sides at the outer and inner surface, and the two planes are
25 inclined with respect to each other at an angle of about 20° to 45°, preferably 25° to 40°.
5. A nozzle according to any of claims 2-4, wherein the spacing between the second sides (9) is the same at the outer surface (6) and inner surface (7) of the nozzle.
6. A nozzle according to any of claims 2-4, wherein the spacing between the second sides
30 (9) is larger at the outer surface (6) of the nozzle body than at the inner surface (7).

7. A nozzle according to any of claims 1-6, comprising two rows of holes (5) around the substantially circular circumference of the nozzle body.
8. A nozzle according to claim 7, further comprising a row of holes (5) extending around about one fourth of the circumference of the nozzle body, and a row of holes extending around about one fifth of the circumference of the nozzle body.
9. A nozzle according to any of claims 1-8, wherein the circular circumference of the nozzle body is larger at the first end (3) than at the second end (4).
10. A nozzle according to any of claims 1-9, wherein the first end (3) comprises a flange or another suitable pipe coupling, such as 2" or 3" NPT.
11. Use of a nozzle according to any of claims 1-10, for the protection of equipment and personnel from heat sources.

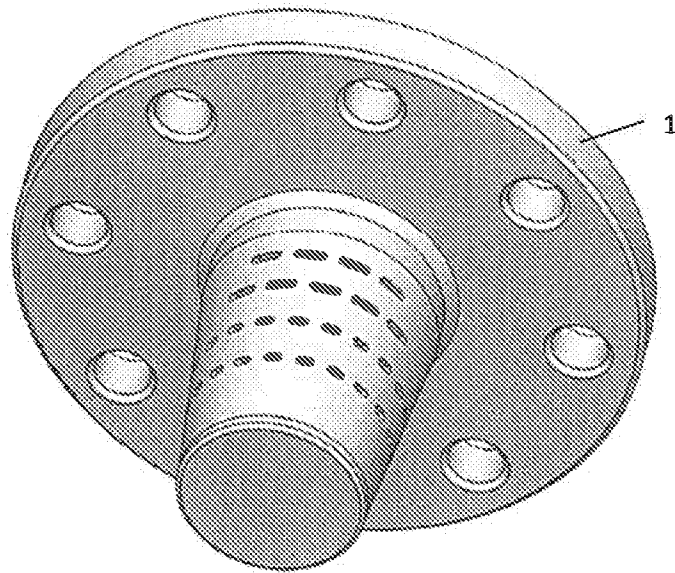


Fig. 1

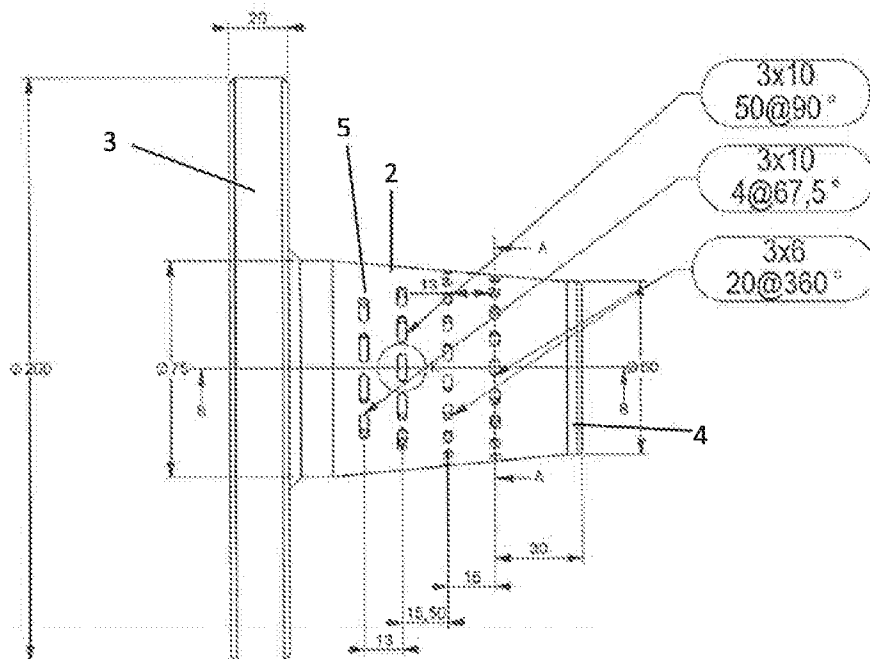


Fig. 2

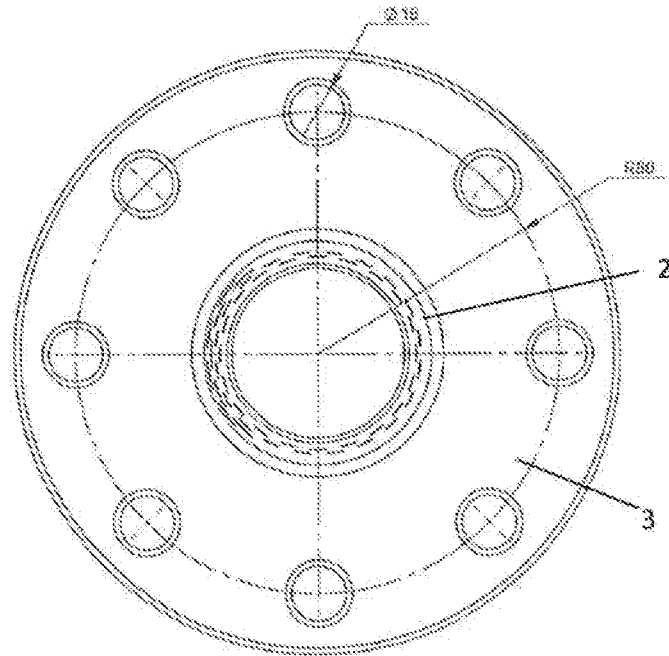


Fig. 3 cross-section A-A

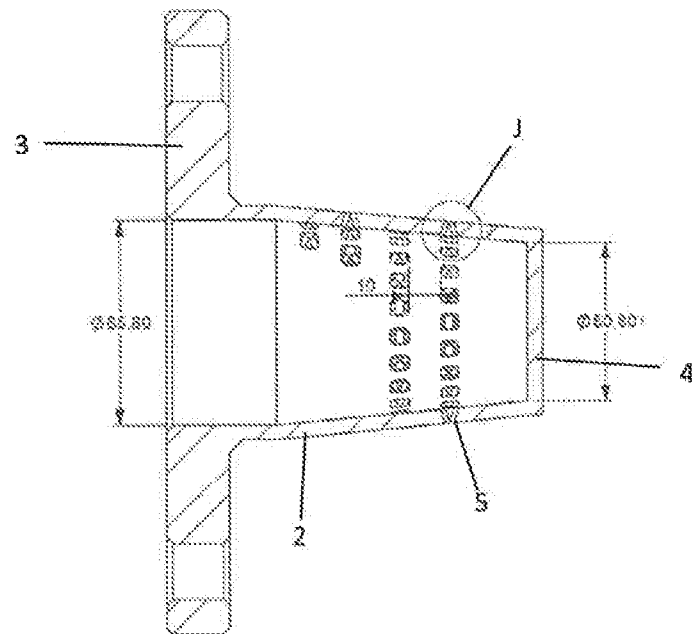


Fig. 4 cross-section B-B

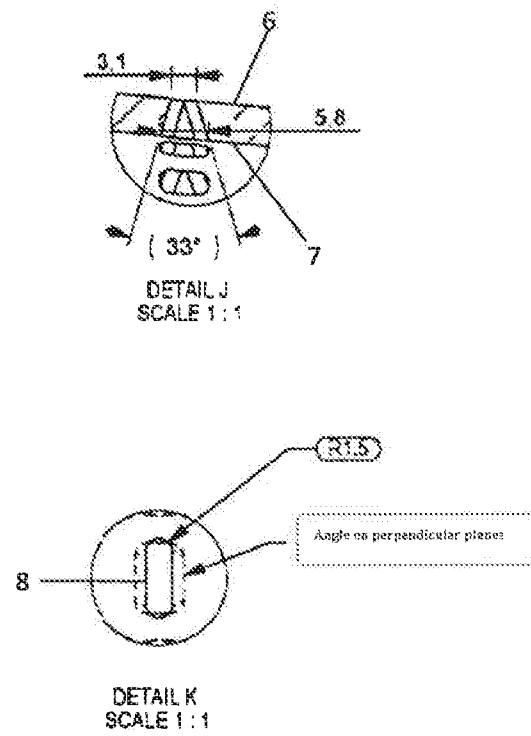


Fig. 5 Details J and K

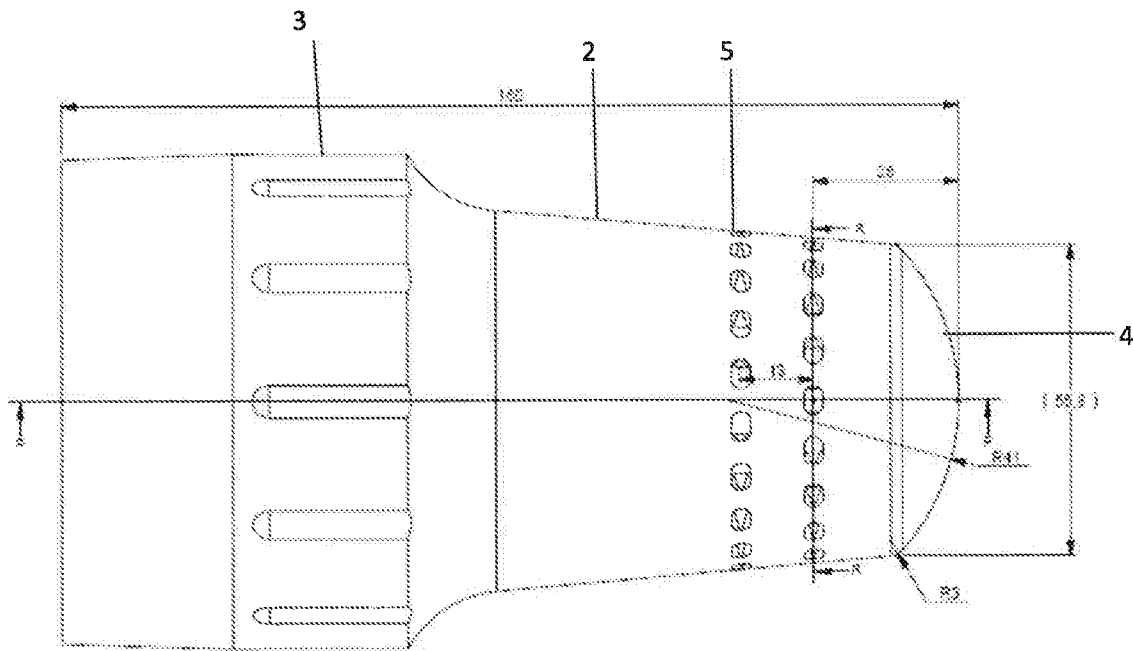


Fig. 6

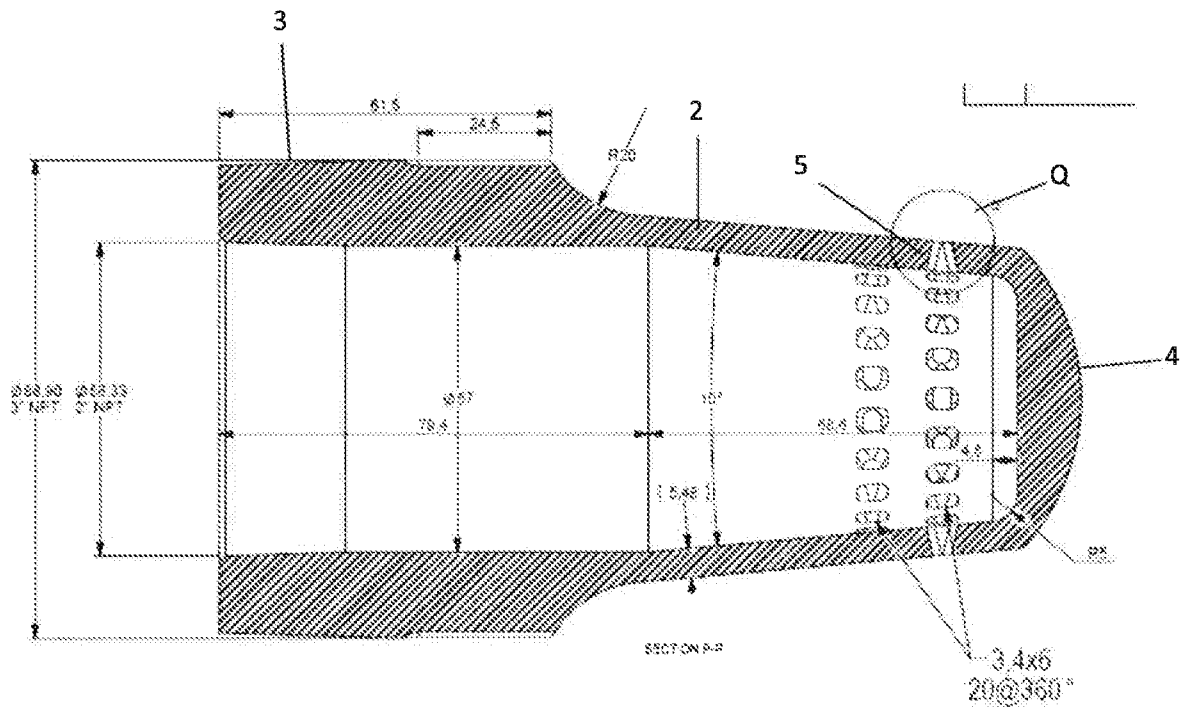


Fig. 7 cross-section P-P

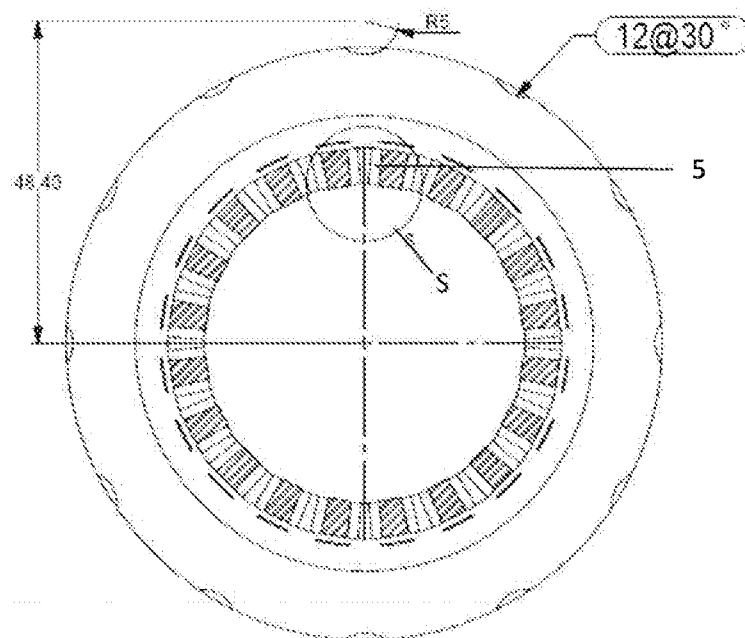


Fig. 8 cross-section R-R

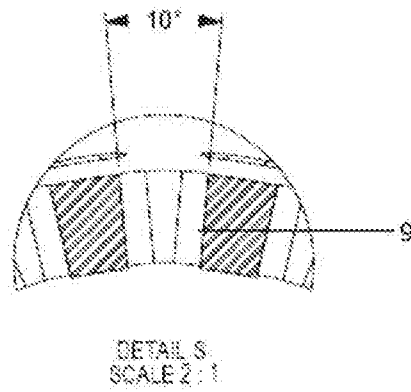
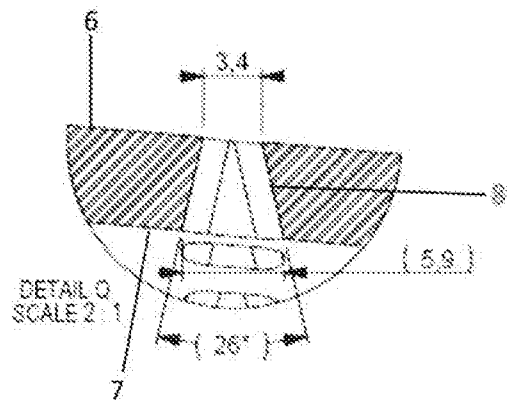


Fig. 9 Details Q and S

INTERNATIONAL SEARCH REPORT

International application No

PCT/N02012/050028

A. CLASSIFICATION OF SUBJECT MATTER

INV. B05B1/06 B05B1/14
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A62C B05B E21B F23G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 1 605 622 A (SLADDEN SIDNEY C) 2 November 1926 (1926-11-02) page 1, left-hand column, line 40 - page 2, left-hand column, line 33; figures 1,2 -----	1,10,11
A	US 1 599 592 A (SLADDEN SIDNEY C) 14 September 1926 (1926-09-14) the whole document -----	1
A	US 3 807 932 A (DEWALD J) 30 April 1974 (1974-04-30) abstract; figures 1,4,5,8-10 -----	1
A	GB 1 521 307 A (MICROMESH ENG LTD) 16 August 1978 (1978-08-16) the whole document -----	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 June 2012

Date of mailing of the international search report

03/07/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Innecken, Axel

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/N02012/050028

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 1605622	A	02-11-1926	NONE
US 1599592	A	14-09-1926	NONE
US 3807932	A	30-04-1974	AU 6797474 A 23-10-1975
		DE 2419199 A1	21-11-1974
		FR 2226621 A1	15-11-1974
		GB 1472871 A	11-05-1977
		GB 1472872 A	11-05-1977
		GB 1472873 A	11-05-1977
		IE 41127 B1	24-10-1979
		JP 50030129 A	26-03-1975
		NL 7405229 A	21-10-1974
		NO 142147 B	24-03-1980
		NO 791919 A	18-10-1974
		US 3807932 A	30-04-1974
GB 1521307	A	16-08-1978	NONE