



(51) International Patent Classification:
H04H 60/72 (2008.01)

(21) International Application Number:

PCT/EP2010/058082

(22) International Filing Date:

9 June 2010 (09.06.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

09305524.2 10 June 2009 (10.06.2009) EP

(71) Applicant (for all designated States except US): **THOMSON LICENSING** [FR/FR]; 1-5 rue Jeanne d'Arc, F-92130 Issy-les-Moulineaux (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SHI, Yun Tao** [CN/FR]; Technicolor, 1-5 rue Jeanne d'Arc, F-92443 ISSY-LES-MOULINEAUX cedex (FR). **LIAO, Ning** [CN/FR]; Technicolor, 1-5 rue Jeanne d'Arc, F-92443 ISSY-LES-

MOULINEAUX cedex (FR). **LI, Jun** [CN/FR]; Technicolor, 1-5 rue Jeanne d'Arc, F-92648 ISSY-LES-MOULINEAUX cedex (FR).

(74) Agent: **RUELLAN-LEMONNIER, Brigitte**; Technicolor, 1-5 rue Jeanne d'Arc, F-92443 ISSY LES MOULINEAUX cedex (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,

[Continued on next page]

(54) Title: METHOD FOR PROVIDING MULTICAST SERVICES

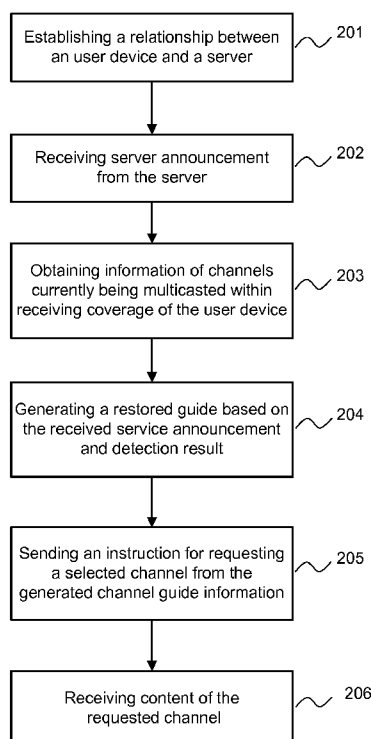


Fig. 2

(57) Abstract: It is provided a method for providing a service guide in a network providing a plurality of multicast services, said network comprising at least one client device connected to an intermediate device, wherein a subset of said plurality of multicast services is being multicast to said at least one client device via said intermediate device, and the service guide provides a list of the plurality of multicast services in a second order; and at the side of a client device, the method comprises the steps of determining a list of the plurality of multicast services in a first order, wherein the order is changed from the second order to the first order based on the multicast services of the subset; and presenting said list of multicast services in said first order.



ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

METHOD FOR PROVIDING MULTICAST SERVICES

TECHNICAL FIELD

The present invention relates to data communication, and more
5 particularly, relates to a method for providing multicast services.

BACKGROUND

An Electronic Programme Guide (EPG) or Interactive Programme Guide
(IPG) or Electronic Service Guide (ESG) is a digital guide to multicast and
10 broadcast programs, typically displayed on-screen with functions allowing a
viewer to navigate, select, and discover content (also called program,
channel, service) by time, title, channel, genre, etc. by use of their remote
control, a keyboard, or other input devices such as a phone keypad. The on-
screen information may be delivered by a dedicated channel or assembled
15 by the receiving equipment from information sent by each program channel.

By navigating through an ESG on a receiving device, users can see
more information about the current program and about future programs.
Typical elements of an ESG comprise a graphical user interface which
enables the display of program titles, descriptive information such as a
20 synopsis, actors, directors, year of production, and so on, the channel name
and the programs on offer from subchannels such as pay-per-view and VOD
(video-on-demand) services, program start times, genres and other
descriptive metadata.

The ESG information is typically displayed on a grid with the option to
25 select more information on each program. The ESG allows viewers to browse
program summaries, to search by genre or channel, immediate access to the
selected program, reminders, and parental control functions.

The ESG is typically sent within a broadcast transport stream, or in a
special data channel alongside it. Of course, it can also be multicast to a
30 selected groups of client devices. For example, The ATSC (American
Television Standards Committee) standard for DTV (digital TV) uses tables
sent in each station's PSIP (program and system information protocol).

Herein, the PSIP is the protocol used for carrying metadata about each channel in the broadcast transport stream of a TV station and for publishing information about television programs so that viewers can select what to watch by title and description. Further, these tables are capable of containing
5 the program start time and title, and additional program descriptive "metadata".

In the broadcast network, all channels are always existent (or called available) on wire or wireless medium, thus the latency of channel changing is usually small. However, in a multicast network, upon a channel change
10 request, the Internet Group Management Protocol (IGMP) is used to leave the current channel and join the selected channel. The IGMP is a communication protocol used to manage the membership of Internet Protocol multicast groups. The IGMP is used by a client device and its adjacent multicast routers to establish multicast group memberships when the client
15 intends to join a multicast channel.

Fig. 1 is a message sequence chart illustrating a channel changing in an IP-based mobile TV network. A TV head end provides a plurality of channels, and a terminal is connected to the TV head end for receiving a channel. At the beginning the terminal views a channel A. Then the user browses the
20 ESG and decides to change to the channel B. Corresponding instructions for changing channel are generated according to the selection of channel B in the ESG. Generally, the instructions for changing channel consist of instruction for leaving the current channel and instruction for joining the new channel by using the IGMP. The channel switching delay or channel
25 changing delay is generally related to a time period starting at the time of terminal's sending an IGMP leave instruction and ending at the time of terminal's beginning to display the content of the new program.

Further, US6563830 discloses multicast registration of all multicast flows in an asynchronous transfer mode based emulated LAN, and in the
30 application, it briefs the IGMP snooping.

WO2005045603 discloses a method for service selection and sorting. Specifically, service is attached with a type of a group comprising subscribed

and unsubscribed. In order to facilitate a user to distinguish subscribed services from services of other types, the list of services is modified, e.g. highlighting subscription items, based on locally stored information concerning the accessibility of services (i.e. being stored in the user terminal) and user's service accessibility setting or input.

It is desirable to reduce the average time for tuning to a program.

SUMMARY

According to an aspect of present invention, it provides a method for providing a service guide in a network providing a plurality of multicast services, said network comprising at least one client device connected to an intermediate device, wherein a subset of said plurality of multicast services is being multicast to said at least one client device via said intermediate device, and the service guide provides a list of the plurality of multicast services in a second order; and at the side of a client device, the method comprises the steps of determining a list of the plurality of multicast services in a first order, wherein the order is changed from the second order to the first order based on the multicast services of the subset; and presenting said list of multicast services in said first order.

According to the aspect of present invention, it reduces average time for tuning to a multicast service.

It is to be understood that more aspects and advantages of the invention will be found in the following detailed description of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment of the invention together with the description which serves to explain the principle of the invention. Therefore, the invention is not limited to the embodiment. In the drawings:

Fig. 1 is a message sequence chart illustrating a channel changing in an IP-based mobile TV network according to the prior art;

Fig. 2 is a flow chart illustrating a method for providing a multicast service according to an embodiment of the present invention;

5 Fig. 3 illustrates channel guide information received from the server according to the present embodiment;

Fig. 4 is a flow chart illustrating a method carried out by a user device to obtain information about channels according to the present embodiment;

10 Fig. 5 illustrates reordered channel guide information according to the present embodiment;

Fig. 6 is a flow chart illustrating a method for surfing channels according to the present embodiment;

15 Fig. 7 is a block diagram illustrating a client device for providing dynamically updated channel guide information according to the present embodiment.

DETAILED DESCRIPTION

The embodiment of the present invention will now be described in detail in conjunction with the drawings. In the following description, some detailed
20 descriptions of known functions and configurations may be omitted for clarity and conciseness.

An embodiment of present invention described below is placed in a wireless network that provides multicast services.

25 Fig. 2 is a flow chart illustrating a method for providing a multicast service according to the embodiment of present invention.

In the step 201, a user device establishes a relationship with a server, for example, by establishing a connection with the server. The connection may be a TCP connection, a UDP connection etc. Other types of connections could also be used. The connection is used to convey service contents
30 and/or signals. There are two kinds of servers in the mobile TV network, i.e. the service management server for managing the ESG and its delivery, and

the streaming server for streaming programs to user devices. Here, the server in relationship with the user device is the service management server. In this embodiment, the service management server and the streaming server are incorporated into a single server device.

5 After the establishment of the relationship, the user device receives a server announcement, i.e. channel guide information comprising a list of channels and information for accessing these channels in the step 202. For example, the channel guide information is in the form of an ESG. The ESG can be used to navigate the channels. The Fig. 3 illustrates channel guide
10 information received from the server according to the present embodiment. In this global table, 'ESG service Render ID' is used to indicate the presentation order in the ESG; 'Global_content_ID' is used to uniquely identify a program channel; 'Ethernet multicast addresses' is used to indicate the address of a multicast group, which is generally used by the IGMP to join or leave a
15 channel.

In the step 203, the user device obtains information about channels currently being multicast within the receiving coverage of the user device, which is normally equal to the channels being multicast by the access device, such as a base station as shown in the Fig. 1. In other words, in a wireless
20 network where a user device is connected to a wireless access point, channels being multicast within the receiving coverage of the user device are generally channels that are being received by all user devices connected to the wireless access point. Fig. 4 is a flow chart illustrating a method for obtaining information about channels currently being multicast within the
25 receiving coverage of the user device according to the present embodiment.

---In the step 401, the user device sets the filter of the user device to snoop multicast packets. It is known to a person skilled in the art that the network card driver can be configured to or programmed to receive all packets, or certain packets satisfying some conditions, such as the
30 destination address is equal to a certain value. In this example, the user device is configured to only receive the multicast data packets whose destination address belongs to multicast group addresses contained in an

ESG received in the step 201, so as to avoid the calculation burden caused by the unicast packets or other irrelevant multicast packets, such as a multicast service not contained in the ESG.

---In the step 402, the user device collects multicast packets according to the multicast group addresses of services in the ESG. To be specific, the user device captures all multicast packets and analyzes destination addresses thereof. The filter is used to make sure packets whose destination address belong to multicast group addresses of services are collected.

---In the step 403, the user device determines available channels based on the collected multicast packets, i.e. the channels are determined based on the destination addresses of the collected packets. The determined channels are the channels currently being multicast within the receiving coverage of the user device, and they are also deemed as the channels being multicast by the access device.

Other methods can also be used for determining the channels being multicast within the receiving coverage of the user device. For examples, the filter is set to collect all packets including unicast packets and multicast packets, and then the multicast addresses contained in the ESG are used to matches the destination addresses of the collected packets. In this way, the channels being multicast within the receiving coverage of the user device can also be determined.

Alternatively, due to contents of these channels are all available through the wireless access point (i.e. the wireless access point is currently receiving content of these channels from one or more servers), the user device may derive a list of channels currently available through the wireless access point. The list of channels is, for example, sent to the user device through a message.

In the step 204, the user device generates reordered channel guide information based on the received service announcement from the step 202 and available channel information from the step 203. Assuming the channels with identifiers of m, j and k are currently being multicast by the wireless access point, the Fig. 5 illustrates reordered channel guide information

according to the present embodiment. In this embodiment, the channels currently being multicast are arranged at the top of the list. According to a variant, these channels are arranged to other predetermined positions of the list which the user is likely to select.

- 5 In the step 205, the user device sends an instruction for requesting a selected channel upon the user's selection of a channel among the reordered channel guide information.

 In the step 206, the user device receives content of requested channel.

- In addition, the steps 203 and 204 are periodically carried out while the
10 user views a channel, so that the channel guide information displayed on the user device is dynamically updated. Alternatively, the channel guide information is dynamically updated by receiving an update message about channel guide information from the wireless access point, the update message is sent when the availability of channels on wireless access point
15 changes. For example, a channel changes from available state to unavailable state, and vice versa.

- According to a variant of the present embodiment, instead of steps of 202, 203 and 204, the wireless access device itself generates the reordered channel guide information based on the information about channels being
20 multicast by itself, and transmits the reordered channel guide information to the user device through a message.

- Since the users within coverage of a wireless access point are very likely to view the same or similar channels related to the location of the user device, e.g. the user in or by a shopping mall is likely to view the advertisement or
25 discount information of this shopping mall, such channels of great interest are presented at the top of the channel list so that the user can easily select them. In addition, users are prone to select the channel at the top of the channel list. So the time period for tuning to or changing to any one of the channels that are available in the wireless access point is shorter than other channel that is
30 unavailable because obtaining the content of an unavailable channel introduces additional time for requesting the new channel from the server as shown in Fig.1.

Furthermore, the user device can generate a list of available channels from the whole list of channels for channel surfing based on the result of the step 203. Fig. 6 is a flow chart illustrating a method for surfing channels according to the present embodiment.

5 Upon receiving an instruction for surfing, the user device displays the channels within available channel list one by one in the step 601.

In the step 602, the user device determines if an instruction for surfing the rest channels is received. Herein, the rest channels are channels that are unavailable in the wireless access point.

10 Upon receiving an instruction for surfing the rest, the user device displays the rest channels one after another in the step 603.

According to a variant of the present embodiment, the user device still uses the original single list with an added field in the list, the field being used to indicate whether the corresponding channel is currently available or not.

15 Because a user is likely to find a channel of interest during the surfing of available channels, it's sometimes unnecessary to surf the unavailable channels so that the overall time used for channel changing including sending leave/join IGMP messages by the wireless access point is reduced.

According to a variant of the present embodiment, the method can be
20 used in a wired network wherein the user device is in wired connection with the network. The user device can obtain a list of channels available in the adjacent router or switcher by snooping the packets when its network card set to promiscuous mode. Besides, the list can also be informed by the adjacent router or switcher.

25 Fig. 7 is a block diagram illustrating a device for providing dynamically updated channel guide information according to the present embodiment. The device 700 comprises an ESG receiver 701, a global table 702, a local table 703, a snooping module 704 and an ESG render 705.

30 ---The ESG receiver 701 is configured to receive channel guide information from a server and store it in the global table 702;

---The Snooping module 704 is configured to snoop multicast packets based on the channel guide information stored in the global table 702 or

detect multicast service information presented in physical-layer frame (e.g. Although in IEEE 802.16e wireless network, the multicast frame is used to carry the multicast packets in the physical layer and the multicast frames of unselected multicast services are discarded at physical layer, yet the multicast service information of unselected multicast services can be detected in a frame, e.g. by modifying the physical driver protocol, before the frame is discarded) so as to generate a list of available channels, and store information about the list of available channels into the local table 703; and

---The ESG render 705 is configured to present the channels based on the received channel guide information and generated available channel list, wherein, the available channels is presented at the top of the presentation list.

According to the present embodiment, the apparatus for providing a multicast service contains the device 700 for rendering the EPG. In addition, the apparatus may further comprise a channel surfing module. The channel surfing module is configured to surf channels by changing channels one after another in such a manner that the available channels are presented prior to the displays of unavailable channels. Moreover, a prompt of "whether or not to surf the unavailable channels" can be added between the displays of available channels and unavailable channels. In this case, only upon the positive response, the channel surfing module surfs the unavailable channels.

A number of implementations have been described. Nevertheless, it will be understood that various modifications may be made. For example, elements of different implementations may be combined, supplemented, modified, or removed to produce other implementations. Additionally, one of ordinary skill will understand that other structures and processes may be substituted for those disclosed and the resulting implementations will perform at least substantially the same function(s), in at least substantially the same way(s), to achieve at least substantially the same result(s) as the implementations disclosed. Accordingly, these and other implementations shall fall in the scope of the invention.

CLAIMS

1. A method for providing a service guide in a network providing a plurality of multicast services, said network comprising at least one client device
5 connected to an intermediate device, wherein a subset of said plurality of multicast services is being multicast to said at least one client device via said intermediate device, and the service guide provides a list of the plurality of multicast services in a second order, characterized by, at the side of a client device, the steps of
10 determining a list of the plurality of multicast services in a first order, wherein the order is changed from the second order to the first order based on the multicast services of the subset; and
presenting said list of multicast services in said first order.
- 15 2. The method of the claim 1, characterized in that, the multicast services of said subset are listed in a predetermined position of said list.
3. The method of the claim 2, characterized in that, said predetermined position is the top of the list.
20
4. The method of the claim 1, characterized in that, the multicast services of said subset are listed in sequence in said list.
5. The method of the claim 1 or 4, characterized in that the step of
25 determination further comprises:
receiving a message including information about said list of the plurality of multicast services in said first order from said intermediate device;
and
deriving said list of the plurality of multicast services in said first order
30 from said message.

6. The method of the claim 1 or 4, characterized in that, before the step of determination it comprising:

receiving the list of multicast services in a second order; and the step of determination further comprises

5 changing the list from the second order to the first order based on information about multicast services of said subset.

7. The method of the claim 6, characterized in that before changing, it further comprises:

10 receiving a message including said information about multicast services of said subset; and

deriving said information from the message.

8. The method of the claim 6, characterized in that before changing, it further comprises:

15 receiving access information used for accessing the multicast services; snooping packets; and

determining said information about multicast services of said subset based on said access information and said packets.

20

9. The method of the claim 8, characterized by further comprising

snooping packets periodically during said client device's reception of a multicast service; and

25 updating the order of said list of multicast services based on the snooped packets and said access information.

10. The method of the claim 8, characterized in that said access information comprises multicast group addresses for receiving a plurality of multicast services.

30

11. The method of the claim 6, characterized by further comprising:

determining the information about multicast services of said subset based on physical layer frames.

12. The method of the claim 1, characterized by further comprising
5 receiving an instruction for surfing; and
presenting the multicast services of said subset in a one by one manner.
13. The method of the claim 11, characterized by further comprising:
10 presenting multicast services not belonging to said subset in a one by one manner.

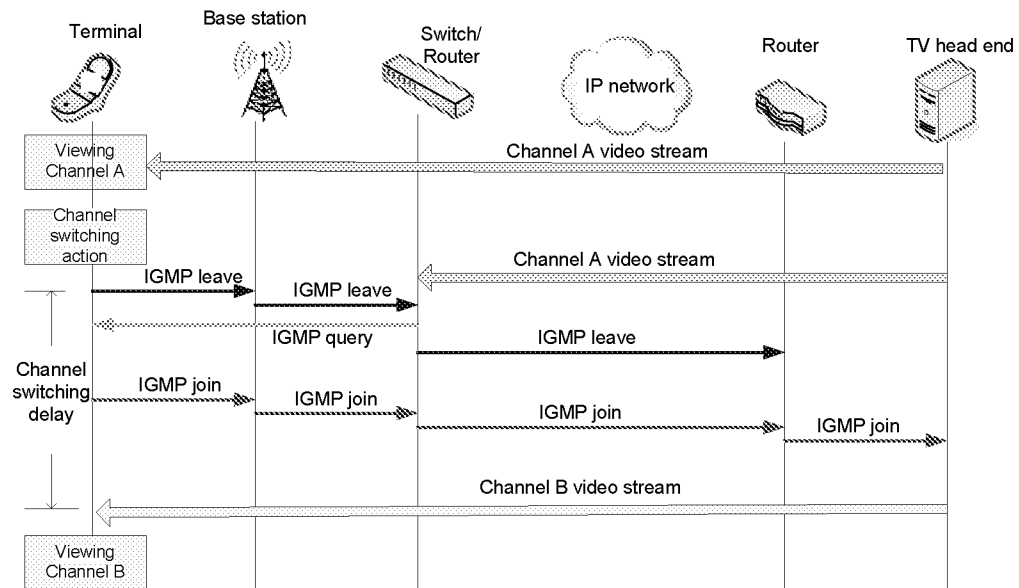


Fig. 1 (Prior Art)

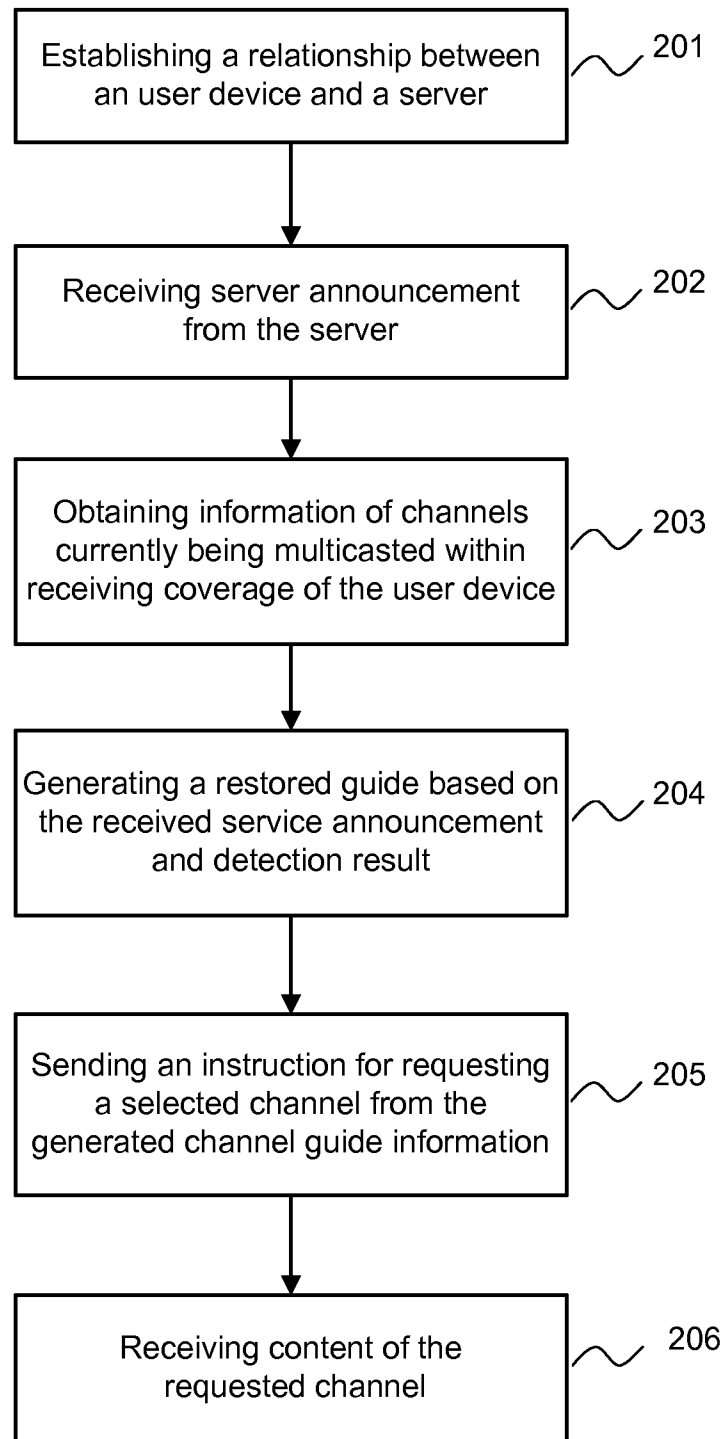


Fig. 2

ESG service Render ID	Global_content_ID	Ethernet multicast address
1	Program_ID_1	Group_address_1
2	Program_ID_2	Group_address_2
3	Program_ID_3	Group_address_3
...	...	...
n-1	Program_ID_n-1	Group_address_n-1
n	Program_ID_n	Group_address_n

Fig. 3

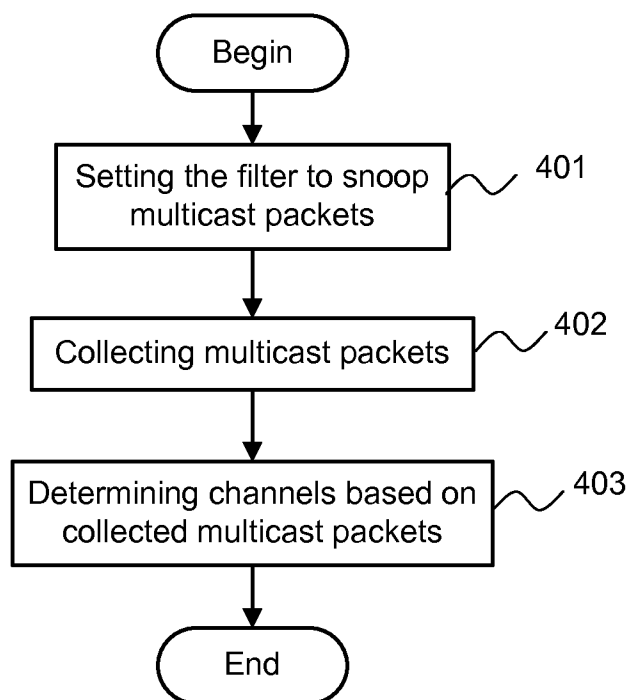


Fig. 4

ESG service Render ID	Current_content_ID	Ethernet multicast address
1	Program_ID_m	Group_address_m
2	Program_ID_j	Group_address_j
3	Program_ID_k	Group_address_k
...	...	...
n-1	Program_ID_n-1	Group_address_n-1
n	Program_ID_n	Group_address_n

Fig. 5

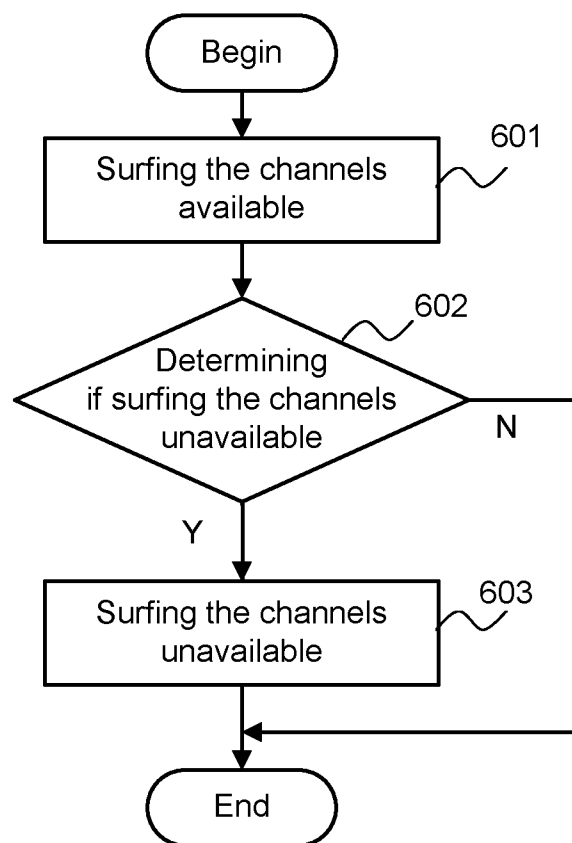


Fig. 6

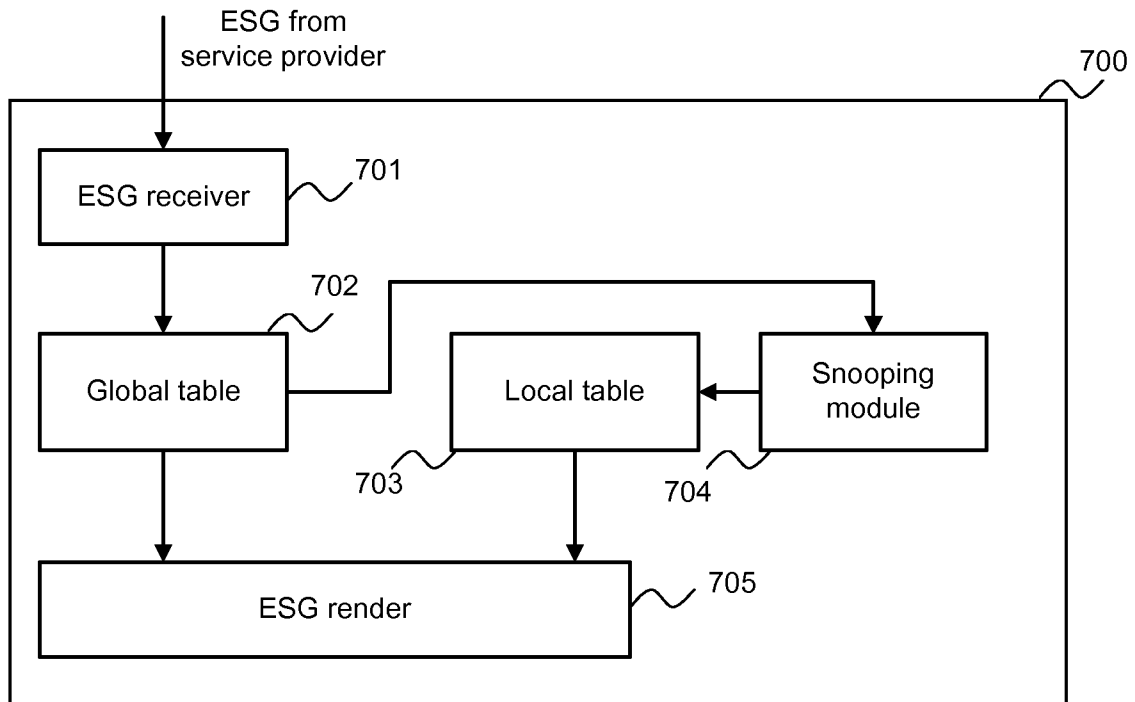


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/058082

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04H60/72
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2005/045603 A2 (NOKIA CORP [FI]; NOKIA INC [US]; VERMOLA LARRI [FI]; NAUMI TERO [FI];) 19 May 2005 (2005-05-19) page 11, line 31 - line 32 page 12, line 3 - line 6 page 2, line 23 - line 27	1
A	US 6 563 830 B1 (GERSHON BENNY [IL] ET AL) 13 May 2003 (2003-05-13) column 7, line 55 - column 8, line 35	5

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

2 August 2010

Date of mailing of the international search report

09/08/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

De Haan, Aldert

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2010/058082

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2005045603 A2	19-05-2005	EP 1678580 A2 KR 20060104995 A	12-07-2006 09-10-2006
US 6563830 B1	13-05-2003	NONE	