



US00D346586S

United States Patent [19]

[11] Patent Number: Des. 346,586

Miyake et al.

[45] Date of Patent: ** May 3, 1994

[54] PROGRAMMING DEVICE FOR A SEQUENCE CONTROLLER

[75] Inventors: Takao Miyake; Masayoshi Kawaishi, both of Nara, Japan

[73] Assignee: Sharp Kabushiki Kaisha, Osaka, Japan

[**] Term: 14 Years

[21] Appl. No.: 872,663

[22] Filed: Apr. 23, 1992

[30] Foreign Application Priority Data

Nov. 5, 1991 [JP] Japan 3-33536

[52] U.S. Cl. D13/163; D14/103; D13/162

[58] Field of Search 312/208.1; 361/390, 361/395; D14/100, 102, 103, 109, 113, 115, 107; D13/162, 163

[56] References Cited

U.S. PATENT DOCUMENTS

| | | | |
|------------|---------|----------------------|-----------|
| D. 236,623 | 9/1975 | Fossella et al. | D14/103 |
| D. 281,690 | 12/1985 | Thomas | D13/163 X |
| D. 296,432 | 6/1988 | Harris et al. | D13/162 |
| D. 321,340 | 11/1991 | Savio | D14/100 |
| D. 329,843 | 9/1992 | Ishida | D13/162 |
| D. 330,544 | 10/1992 | Kane | D14/103 |
| D. 331,746 | 12/1992 | Takahashi | D14/100 |
| D. 336,896 | 6/1993 | Carter | D14/100 |

OTHER PUBLICATIONS

Datamation-Jul. 1, 1989, p. 40 Peripheral in foreground.

Primary Examiner—Wallace R. Burke

Assistant Examiner—Freda S. Nunn

Attorney, Agent, or Firm—Nixon & Vanderhye

[57] CLAIM

The ornamental design for a programming device for a sequence controller, as shown and described.

DESCRIPTION

FIG. 1 is a top, front and left side perspective view of a programming device for a sequence controller according to the present design;

FIG. 2 is a front elevational view thereof;

FIG. 3 is a rear elevational view thereof;

FIG. 4 is a right side elevational view thereof;

FIG. 5 is a left side elevational view thereof;




FIG. 6 is a top plan view thereof;

FIG. 7 is a bottom plan view thereof;

FIG. 8 is a top, front and left side perspective view showing the programming device for a sequence controller with the display and keyboard in a different orientation and the controller oriented in a horizontal position; and,

FIG. 9 is a top, rear and left side perspective view illustrating the display and keyboard in a stored condition, with the handle in a standing condition.

FIGS. 2-5 are drawn on a slightly reduced scale.

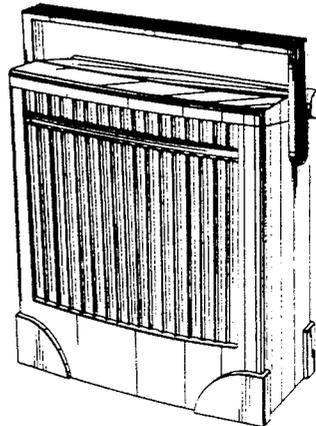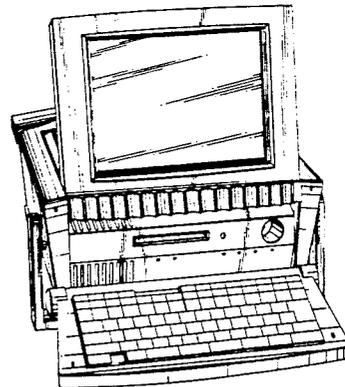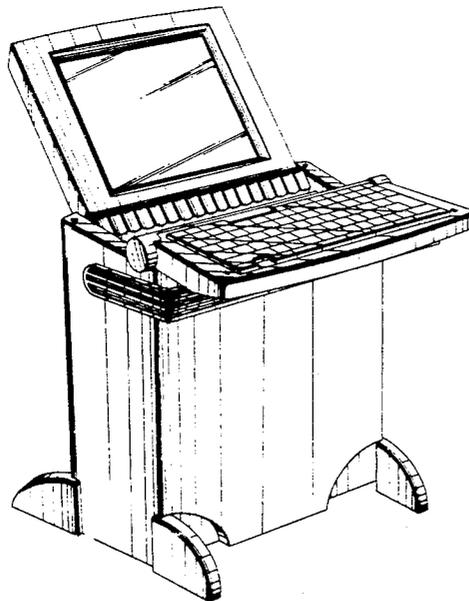

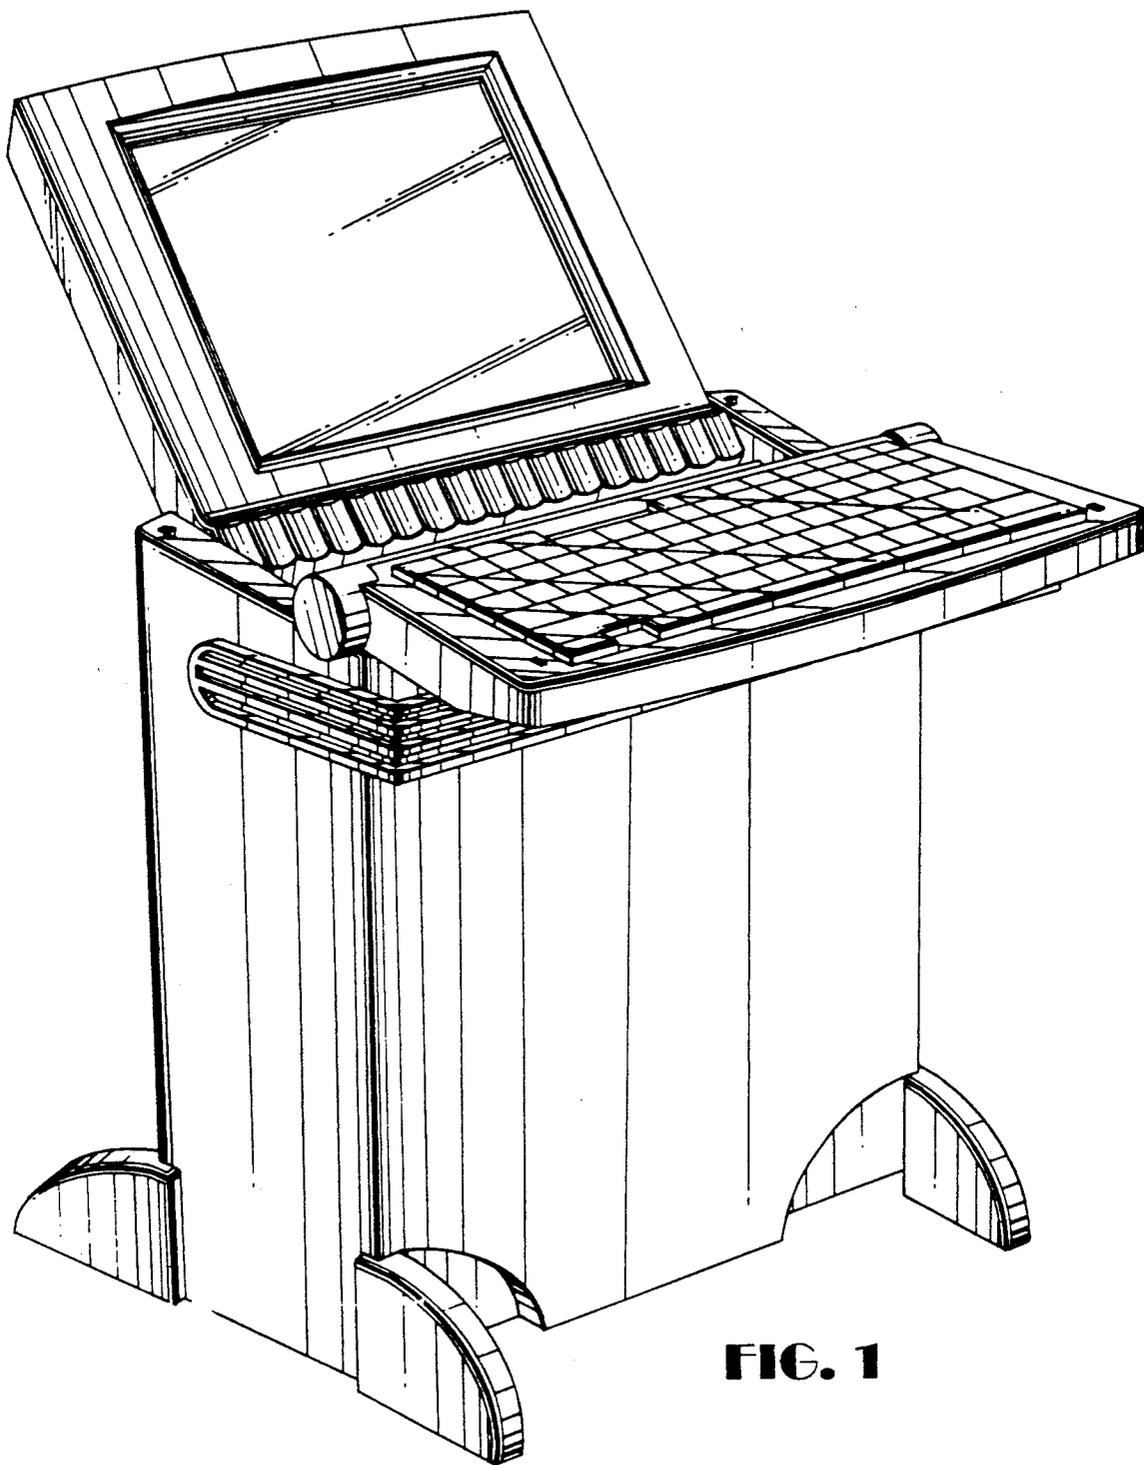


FIG. 1

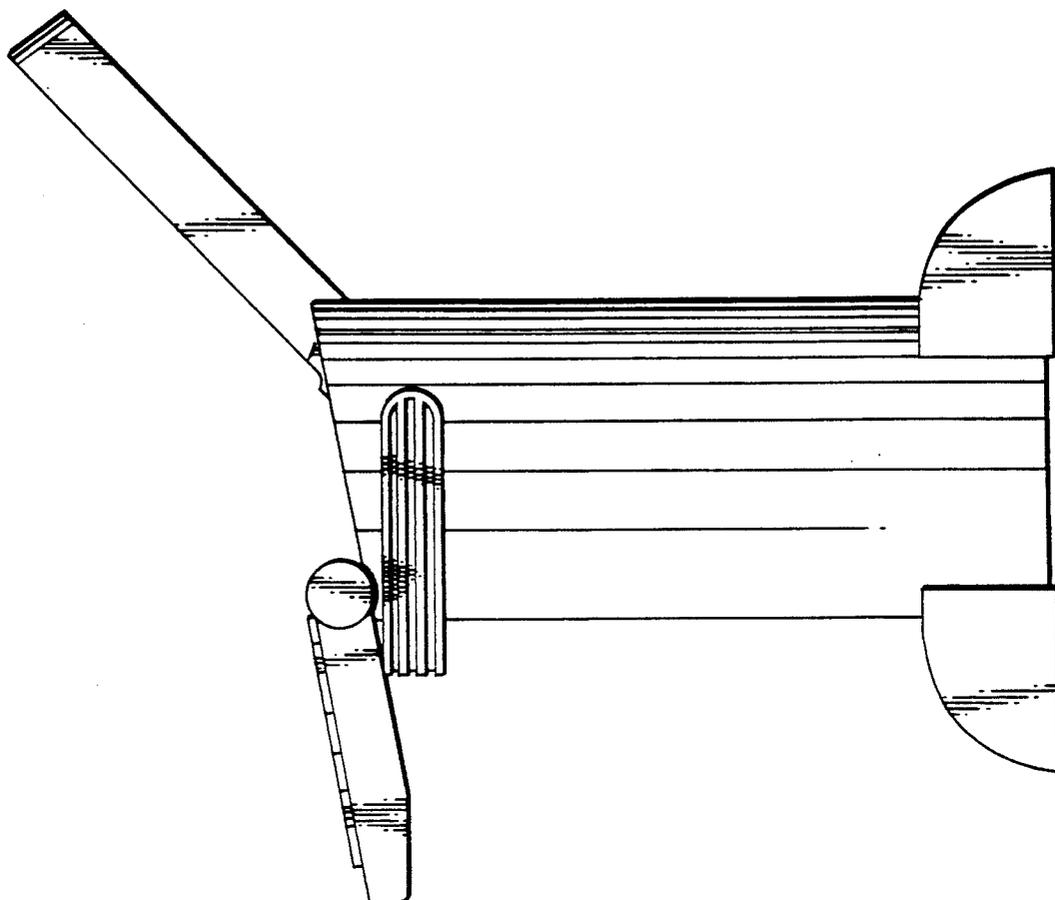


FIG. 4

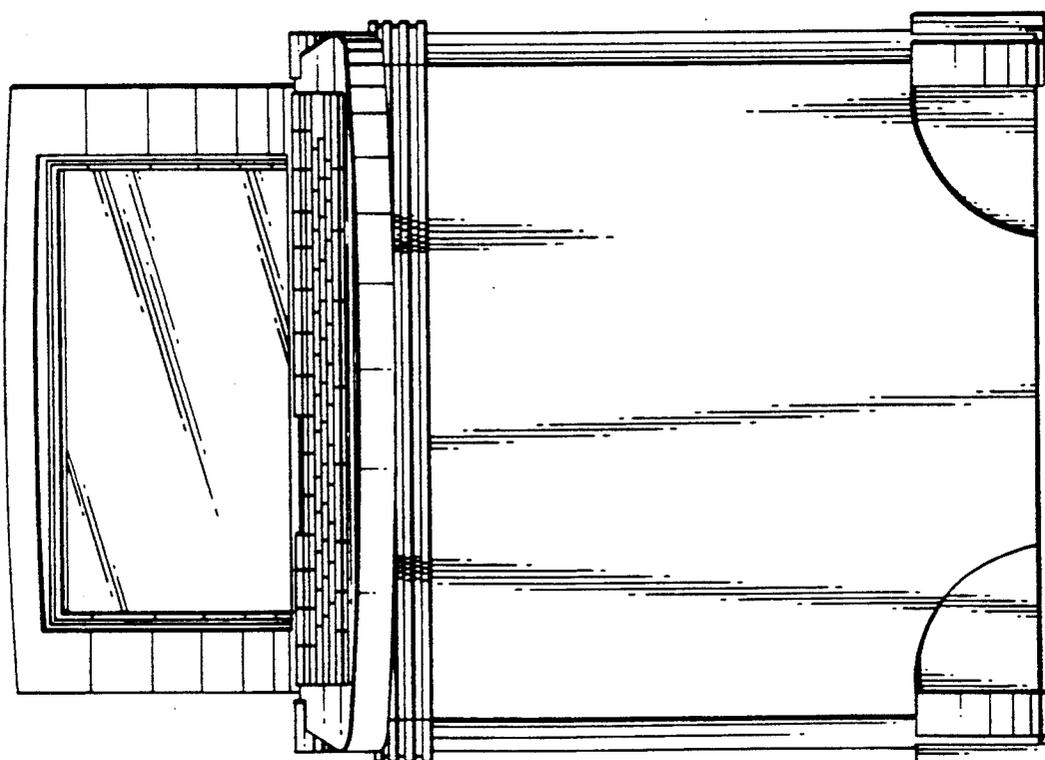


FIG. 2

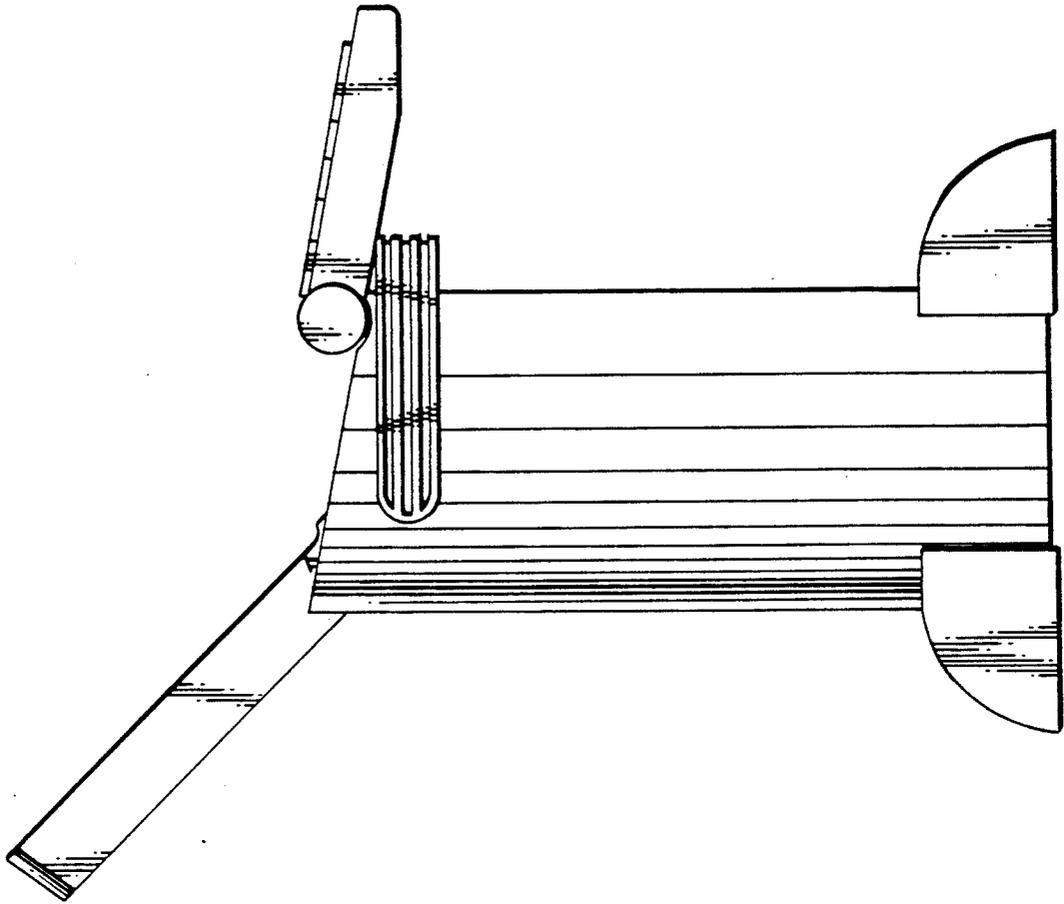


FIG. 5

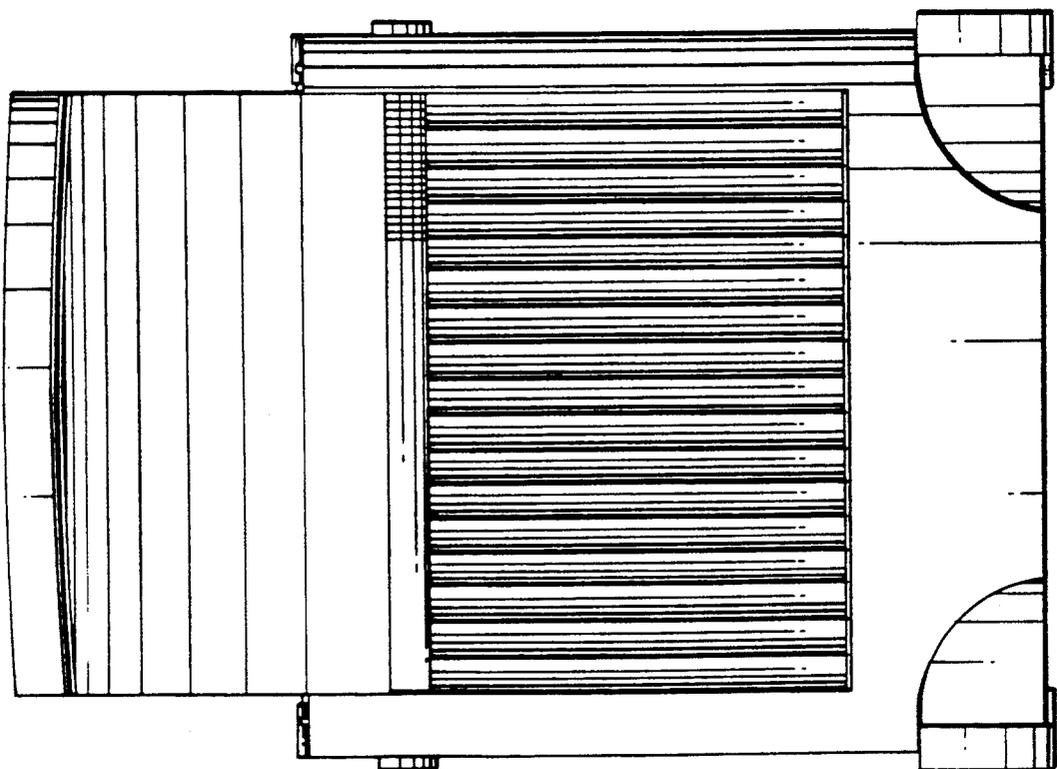


FIG. 3

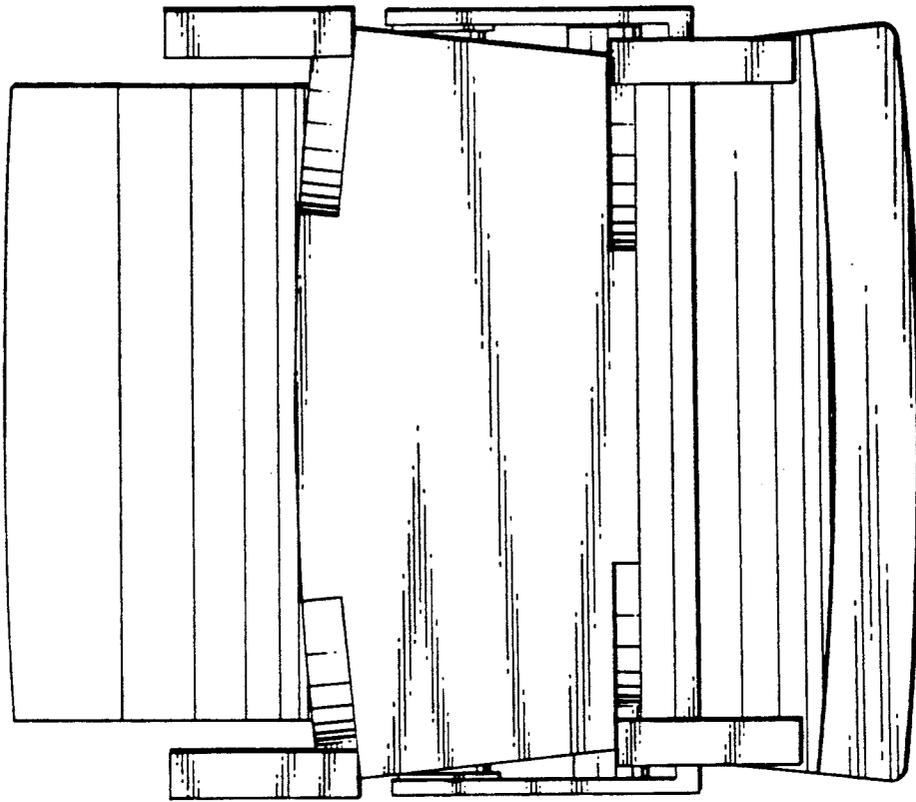


FIG. 7

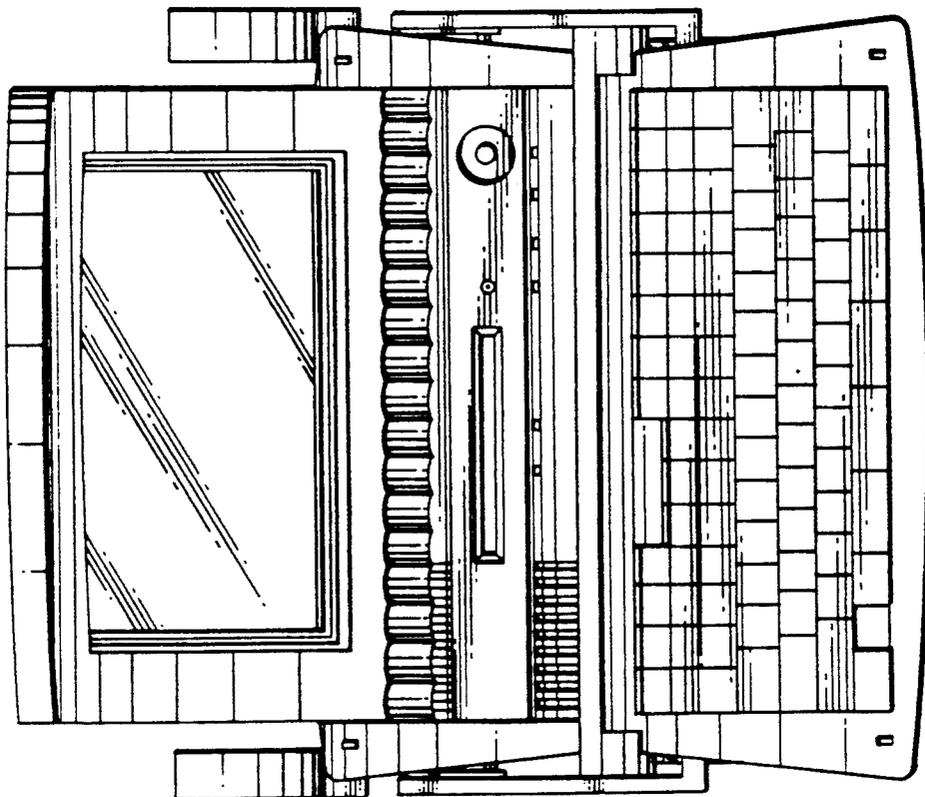


FIG. 6

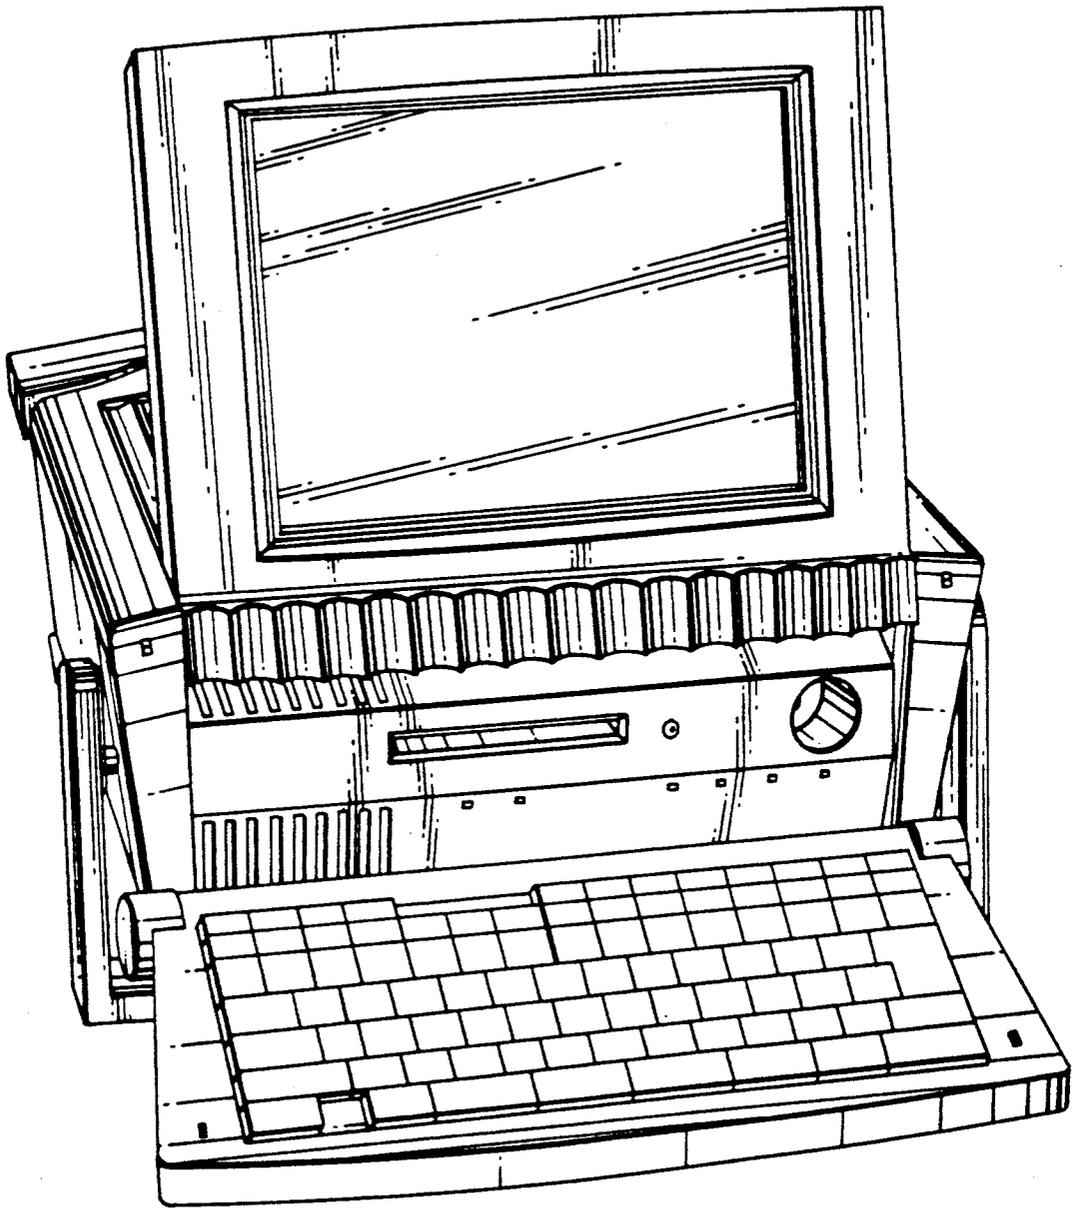


FIG. 8

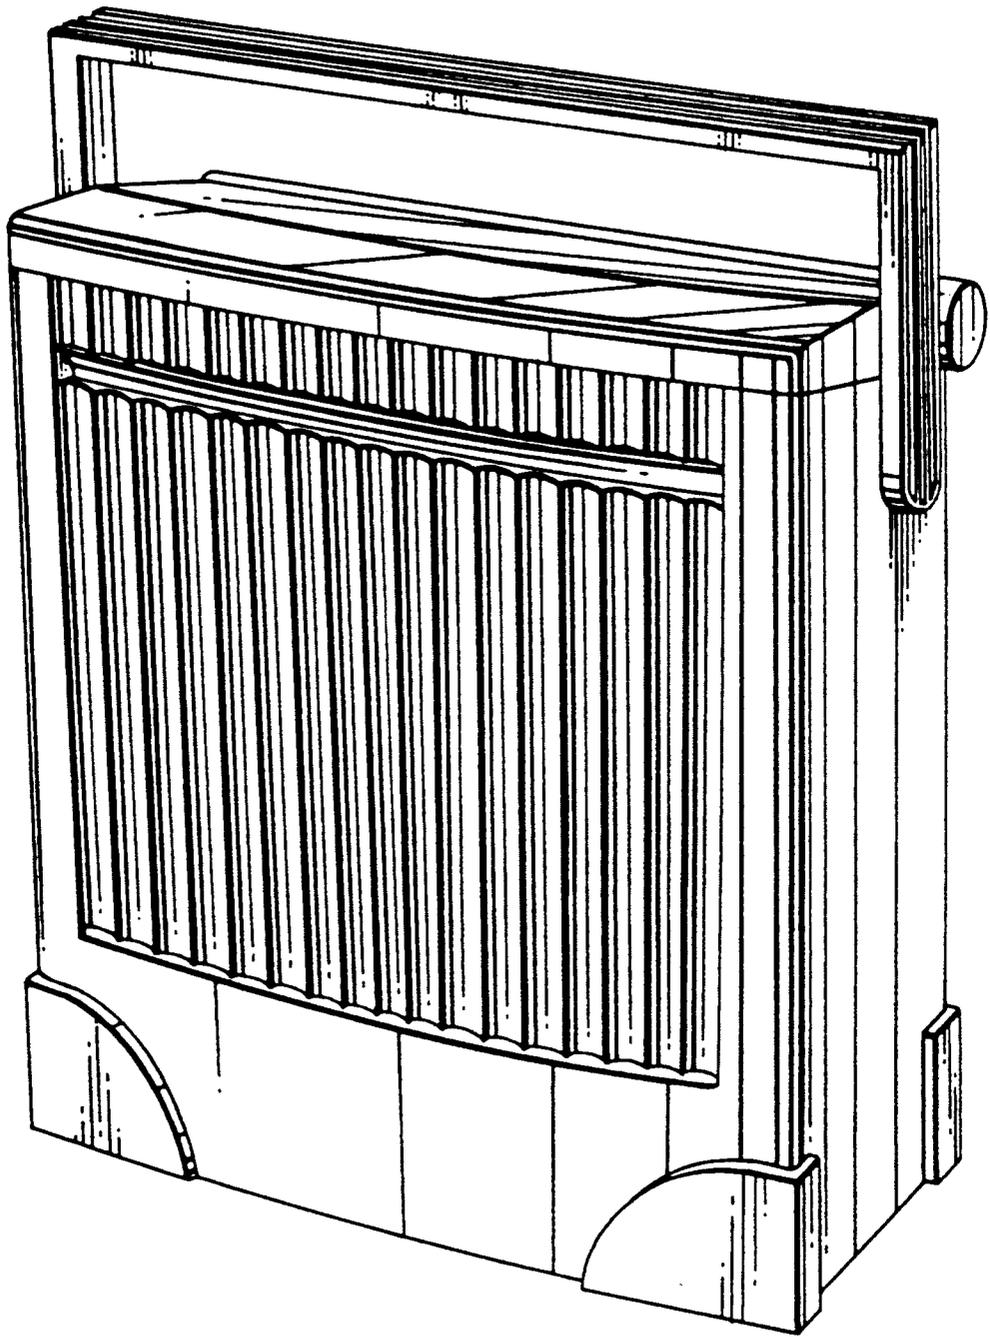


FIG. 9