

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
7 May 2009 (07.05.2009)

PCT

(10) International Publication Number  
WO 2009/058752 A1(51) International Patent Classification:  
H04W 48/16 (2009.01)

WANG, Jin [CN/US]; 34 Fairlawn Drive, Central Islip, New York 11722 (US).

(21) International Application Number:  
PCT/US2008/081417

(74) Agent: COHEN, Matthew, I.; Volpe and Koenig, P.C., United Plaza, Suite 1600, 30 South 17th Street, Philadelphia, Pennsylvania 19103 (US).

(22) International Filing Date: 28 October 2008 (28.10.2008)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/983,511 29 October 2007 (29.10.2007) US

(71) Applicant (for all designated States except US): INTER-DIGITAL PATENT HOLDINGS, INC. [US/US]; 3411 Silverside Road, Concord Plaza, Suite 105, Hagley Building, Wilmington, Delaware 19810 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

[Continued on next page]

(54) Title: SYSTEM INFORMATION UPDATES IN LTE

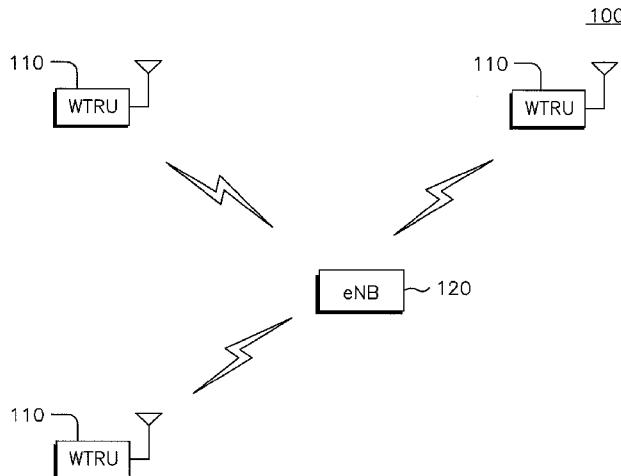


FIG.1

WO 2009/058752 A1

(57) Abstract: An apparatus for receiving system information updates includes a wireless transmit receive unit (WTRU) configured to receive a system frame number. The WTRU is also configured to receive system information messages in a modification period. The modification period has a boundary determined by the system frame number. The WTRU is configured to receive system information change notification after a first modification change boundary and determines that the system information is valid until a second modification change boundary.



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

**Published:**

— *with international search report*

[0001] SYSTEM INFORMATION UPDATES IN LTE

[0002] FIELD OF INVENTION

[0003] The present invention is related to wireless communication systems.

[0004] BACKGROUND

[0005] The Third Generation Partnership Project (3GPP) has initiated the Long Term Evolution (LTE) program to bring new technology, new network architecture, new configurations and new applications and services to wireless networks in order to provide improved spectral efficiency and faster user experiences. In an LTE compliant network, a wireless transmit receive unit (WTRU) may receive system information updates. Included in the system information updates may be the size and location of a Physical HARQ Indicator Channel (PHICH).

[0006] A WTRU may receive updated system information on a Primary Broadcast Channel (P-BCH) or Dynamic-BCH (D-BCH). Resource allocation for system information updates may be fixed or variable, but variable resource allocation is preferred for signaling efficiency.

[0007] Variable resource allocation, however, suffers from a disadvantage. A WTRU may experience excessive latency when waking from Discontinuous Reception (DRX) cycle and excessive overhead may be required to signal system update information. A WTRU may need to wait as long as 80 ms before it receives an entire D-BCH message. Latency becomes an issue if the eNodeB (eNB) is permitted to change system information every D-BCH cycle.

[0008] If a WTRU wakes up from DRX exactly at the D-BCH boundary, it has to wait at least 80 ms for D-BCH to be completely received before it can decode and retrieve the system information update. During this interval, the WTRU does not know if the system information has changed since its last uplink (UL) transmission. If the WTRU wakes up in the middle of the D-BCH cycle, then it cannot decode the D-BCH in its current cycle. The result may be as much as a

150 ms delay, which is not acceptable for time sensitive applications such as voice over Internet protocol (VoIP). Similar latency is experienced when system information updates are transmitted on the P-BCH, with a potential latency of 70 ms.

[0009] Therefore, there exists a need for an improved method and apparatus for signaling system information updates.

[0010]

## SUMMARY

[0011] A method and apparatus for receiving system information updates may include a wireless transmit receive unit (WTRU) receiving a system frame number. The WTRU may also receive system information messages in a modification period. The modification period has a boundary determined by the system frame number. The WTRU may receive a system information change notification after a first modification change boundary and determine that the system information is valid until a second modification change boundary.

[0012]

## BRIEF DESCRIPTION OF THE DRAWINGS

[0013] Figure 1 shows an example wireless communication system including a plurality of WTRUs and an eNB in accordance with one embodiment; and

[0014] Figure 2 is a functional block diagram of a WTRU and the eNB of Figure 2.

[0015]

## DETAILED DESCRIPTION

[0016] When referred to hereafter, the terminology "wireless transmit/receive unit (WTRU)" includes but is not limited to a user equipment (UE), a mobile station, a fixed or mobile subscriber unit, a pager, a cellular telephone, a personal digital assistant (PDA), a computer, or any other type of user device capable of operating in a wireless environment. When referred to

hereafter, the terminology "base station" includes but is not limited to a Node-B, a site controller, an access point (AP), or any other type of interfacing device capable of operating in a wireless environment.

[0017] System information, such as a location and size of a downlink Physical HARQ Indicator Channel (PHICH), may be transmitted between an eNB and a WTRU. If the WTRU is waking from the Discontinuous Reception (DRX) cycle and waiting for the Dynamic Broadcast Channel (D-BCH) or Primary-BCH (P-BCH), unwanted latency may be incurred.

[0018] System information updates may occur at specific radio frames. A system information message may be transmitted more than once during a single modification period. The information in the message may be repeated.

[0019] A WTRU may obtain a system frame number (SFN) during initial access. In order to recognize a modification period boundary, the WTRU may determine the boundary by calculating  $\text{mod}(\text{SFN}, n)$ , where  $n$  is an integer value configured by system information, signaled to the WTRU or calculated by the WTRU using a predefined formula. Alternatively, the WTRU may determine the boundary by calculating  $\text{mode}(\text{SFN}, n \times A)$ , where "A" may correspond to the length of the P-BCH or D-BCH expressed in 10ms radio frames. For example, if the length is 40ms, the value of A is 4.

[0020] When the network changes system information, it first may notify a WTRU about the change. The notification may be done throughout a first modification period. In a second modification period, the network may transmit the updated system information. The second modification period may follow directly after the first modification period. Upon receiving a change notification, the WTRU may determine that the current system information is valid until the next modification period boundary.

[0021] A Paging message may be used to inform a WTRU in Idle mode or connected mode about a system information change. If a WTRU receives a paging message that includes a system information modification message, the WTRU may determine that the system information may change at the next modification boundary. The Paging message is a radio resource control (RRC)

message and may have a paging cycle similar to the paging cycle already in use by the WTRU. Alternatively, the paging cycle may be different than the paging cycle in use by the WTRU.

[0022] More specifically, the system information, for example, the PHICH configuration, may be signaled on the D-BCH. If the D-BCH is transmitted over 80 ms (defined as a D-BCH cycle), a WTRU may listen to the D-BCH at  $n \times 80\text{ms}$  intervals for a prospective update of system information, including, for example, the PHICH configuration. If a WTRU wakes up in the middle of the  $n \times 80\text{ms}$  cycle, it is not required to check the D-BCH for system information since the system information, such as PHICH configuration, for example, is static during this interval. This may result in a reduction in latency as the WTRU can begin uplink (UL) communication without having to wait for a D-BCH cycle to complete.

[0023] Similarly, if the system information change is transmitted on the P-BCH, a configuration update can be signaled every  $n \times 40\text{ms}$ , where 40ms is the P-BCH transmission time. A WTRU may read the P-BCH every  $\text{mod}(\text{SFN}, n \times 4)$ , where 4 corresponds to the length of D-BCH cycle in number of 10ms radio frames. A WTRU can join the network at any time between the system information update cycle, that is, anytime in the  $n \times 40\text{ms}$  interval.

[0024] Figure 1 shows a wireless communication system 100 including a plurality of WTRUs 110 and an e Node B (eNB) 120. As shown in Figure 1, the WTRUs 110 are in communication with the eNB 120. Although three WTRUs 110 and one eNB 120 are shown in Figure 1, it should be noted that any combination of wireless and wired devices may be included in the wireless communication system 100.

[0025] Figure 2 is a functional block diagram 200 of a WTRU 110 and the base station 120 of the wireless communication system 100 of Figure 1. As shown in Figure 1, the WTRU 110 is in communication with the eNB 120. The WTRU 110 is configured to receive system information and system information updates from the eNB 120. The eNB 120 may be configured to transmit, and the WTRU 110 configured to receive, signals on the P-BCH and the D-BCH. The

WTRU 110 may also be configured to operate in a DRX mode and/or a DTX mode. The WTRU 110 may be configured to receive paging messages and other RRC messages. The WTRU 110 may determine the boundaries of the system information modification based on the SFN.

[0026] In addition to the components that may be found in a typical WTRU, the WTRU 110 includes a processor 215, a receiver 216, a transmitter 217, and an antenna 218. The WTRU 110 may also include a user interface 221, which may include, but is not limited to, an LCD or LED screen, a touch screen, a keyboard, a stylus, or any other typical input/output device. The WTRU 110 may also include memory 219, both volatile and non-volatile as well as interfaces 220 to other WTRU's, such as USB ports, serial ports and the like. The receiver 216 and the transmitter 217 are in communication with the processor 215. The antenna 218 is in communication with both the receiver 216 and the transmitter 217 to facilitate the transmission and reception of wireless data.

[0027] In addition to the components that may be found in a typical eNB, the eNB 120 includes a processor 225, a receiver 226, a transmitter 227, and an antenna 228. The receiver 226 and the transmitter 227 are in communication with the processor 225. The antenna 228 is in communication with both the receiver 226 and the transmitter 227 to facilitate the transmission and reception of wireless data.

[0028] The number of possible resource allocation sizes for system information may be reduced to a subset of the maximum number of possibilities. If the size of the system information resource allocation, such as for PHICH, can be only one of  $m$  different values, where  $m$  is a positive integer, then  $\log_2(m)$  bits are required to signal the  $m$  sizes. The value of  $m$  may be fixed by the network, or an eNB may optimize control channel availability by using a different value of  $m$  under different load conditions. For example, if the load is high, the eNB may benefit from a finer granularity of the resource assignments and, therefore, select a larger value of  $m$ . If the load is low and some waste in system information resources can be tolerated, then the eNB can use a smaller value of  $m$ .

[0029] The eNB may further be restricted to changing system information resource allocation by a particular delta. As an example, using 2 bits, an eNB may transmit the messages shown in Table 1.

Number of bits to signal delta in system information size	Increase/Decrease in system information size
00	No change since previous allocation
01	Increase allocation by $k_I$ resources
10	Decrease allocation by $k_D$ resource
11	Unused or use it for increase/decrease by other number of resources.

[0030] TABLE 1: Message mapping to two (2) bit signal

[0031] In Table 1,  $k_I$  is the delta by which the number of resources can be increased and  $k_D$  is the delta by which the number of resources can be reduced.  $k_I$  and  $k_D$  can be equal or different. The value of  $m$ ,  $k_I$  and  $k_D$  can be signaled to the WTRU at initial access or may be fixed and made static over the entire network. As shown in Table 1, if the WTRU receives “00”, the WTRU may determine that the new resource allocation is the same as the previous resource allocation. A “01” received by the WTRU indicates that the resources allocation is increased by  $k_I$ . A “10” received by the WTRU indicates that the allocation is decreased by  $k_D$ . It should be understood that in an alternative embodiment, the eNB may use more than 2 bits or have more levels of granularity to signal to the WTRU.

[0032] A parameter  $\Delta n$  may be defined as a number of D-BCH cycles before the WTRU aligns with the next system information update. After  $\Delta n \times 80\text{ms}$ , the WTRU may align with the system information update cycle. Following the alignment, the WTRU reads the D-BCH for updates every  $n \times 80\text{ms}$  interval.  $\Delta n$  may be WTRU specific and can be signaled on the random access channel (RACH) response.

[0033] If system information resource assignments change only in a semi-static manner, the D-BCH overhead can be reduced by not transmitting the system information parameters until their scheduled reporting cycle. Two D-BCH formats may be used. A first format includes the system information resource

signaling that occurs every  $n \times 80\text{ms}$ . A second format may be shorter than the first format and not include system information. A WTRU that misses reading the D-BCH or P-BCH during a system information update, due to, for example, a late wake up, may use the D-BCH or P-BCH format to recognize a D-BCH carrying system information.

[0034] An eNB may have some flexibility in changing the value of  $n$ . If an eNB decides to change  $n$ , the eNB may issue a page to a WTRU. In response to the page, the WTRU may read the P-BCH channel at the beginning for following the P-BCH cycle. In the following cycle, the P-BCH carries System Information Blocks (SIBs) that carry the value of  $n$ . As  $n$  can be any number of bits, the update cycle is  $2^n \times 80\text{msec}$ .

[0035] EMBODIMENTS

[0036] 1. A wireless transmit receive unit (WTRU) comprising a user interface, a memory, a receiver configured to receive a system frame number and system information messages in a modification period and a processor configured to determine a modification period boundary based on the system frame number.

[0037] 2. The WTRU as in embodiment 1 wherein the receiver is further configured to receive an update notification in a first modification period and a plurality of system information updates in a second modification period.

[0038] 3. The WTRU as in embodiment 1 or 2 wherein the receiver is further configured to receive an update notification and the processor is further configured to determine that system information is valid until a next modification period.

[0039] 4. The WTRU as in any one of embodiments 1-3 wherein the processor is further configured to determine the modification boundary based on the SFN and an integer value.

[0040] Although the features and elements are described in particular combinations, each feature or element can be used alone without the other features and elements or in various combinations with or without other features and elements. The methods or flow charts provided may be implemented in a computer program, software, or firmware tangibly embodied in a computer-

readable storage medium for execution by a general purpose computer or a processor. Examples of computer-readable storage mediums include a read only memory (ROM), a random access memory (RAM), a register, cache memory, semiconductor memory devices, magnetic media such as internal hard disks and removable disks, magneto-optical media, and optical media such as CD-ROM disks, and digital versatile disks (DVDs).

[0041] Suitable processors include, by way of example, a general purpose processor, a special purpose processor, a conventional processor, a digital signal processor (DSP), a plurality of microprocessors, one or more microprocessors in association with a DSP core, a controller, a microcontroller, Application Specific Integrated Circuits (ASICs), Field Programmable Gate Arrays (FPGAs) circuits, any other type of integrated circuit (IC), and/or a state machine.

[0042] A processor in association with software may be used to implement a radio frequency transceiver for use in a wireless transmit receive unit (WTRU), user equipment (UE), terminal, base station, radio network controller (RNC), or any host computer. The WTRU may be used in conjunction with modules, implemented in hardware and/or software, such as a camera, a video camera module, a videophone, a speakerphone, a vibration device, a speaker, a microphone, a television transceiver, a hands free headset, a keyboard, a Bluetooth® module, a frequency modulated (FM) radio unit, a liquid crystal display (LCD) display unit, an organic light-emitting diode (OLED) display unit, a digital music player, a media player, a video game player module, an Internet browser, and/or any wireless local area network (WLAN) module.

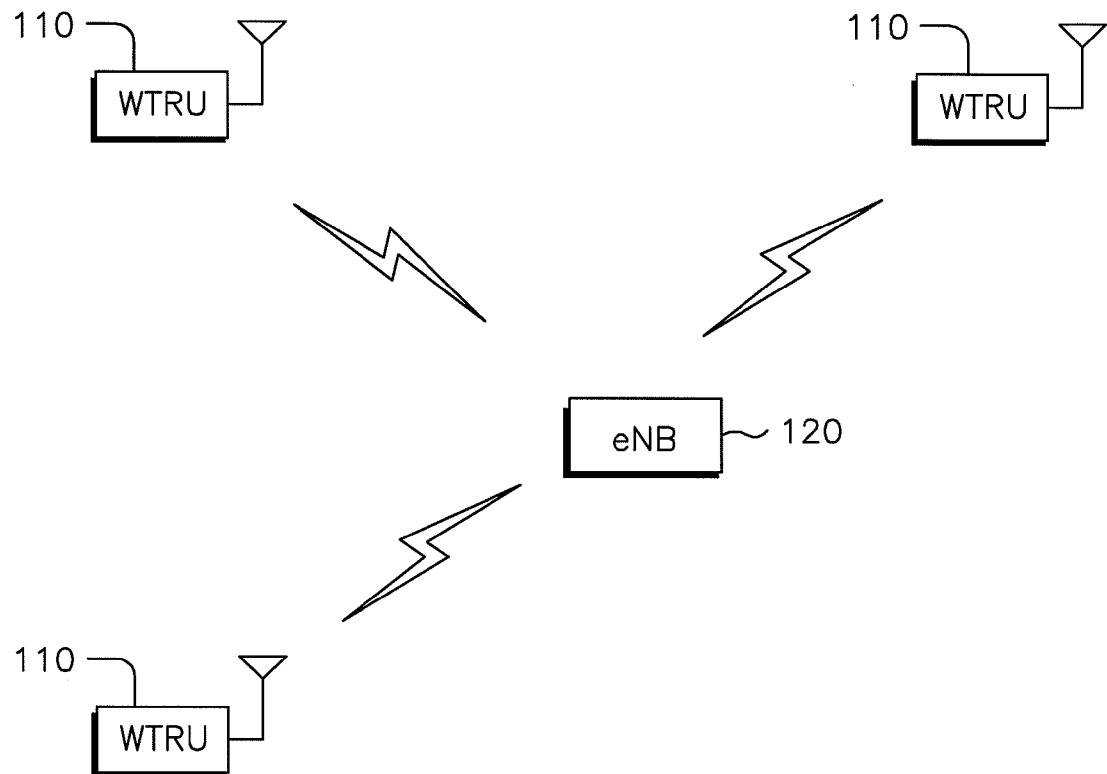
\* \* \*

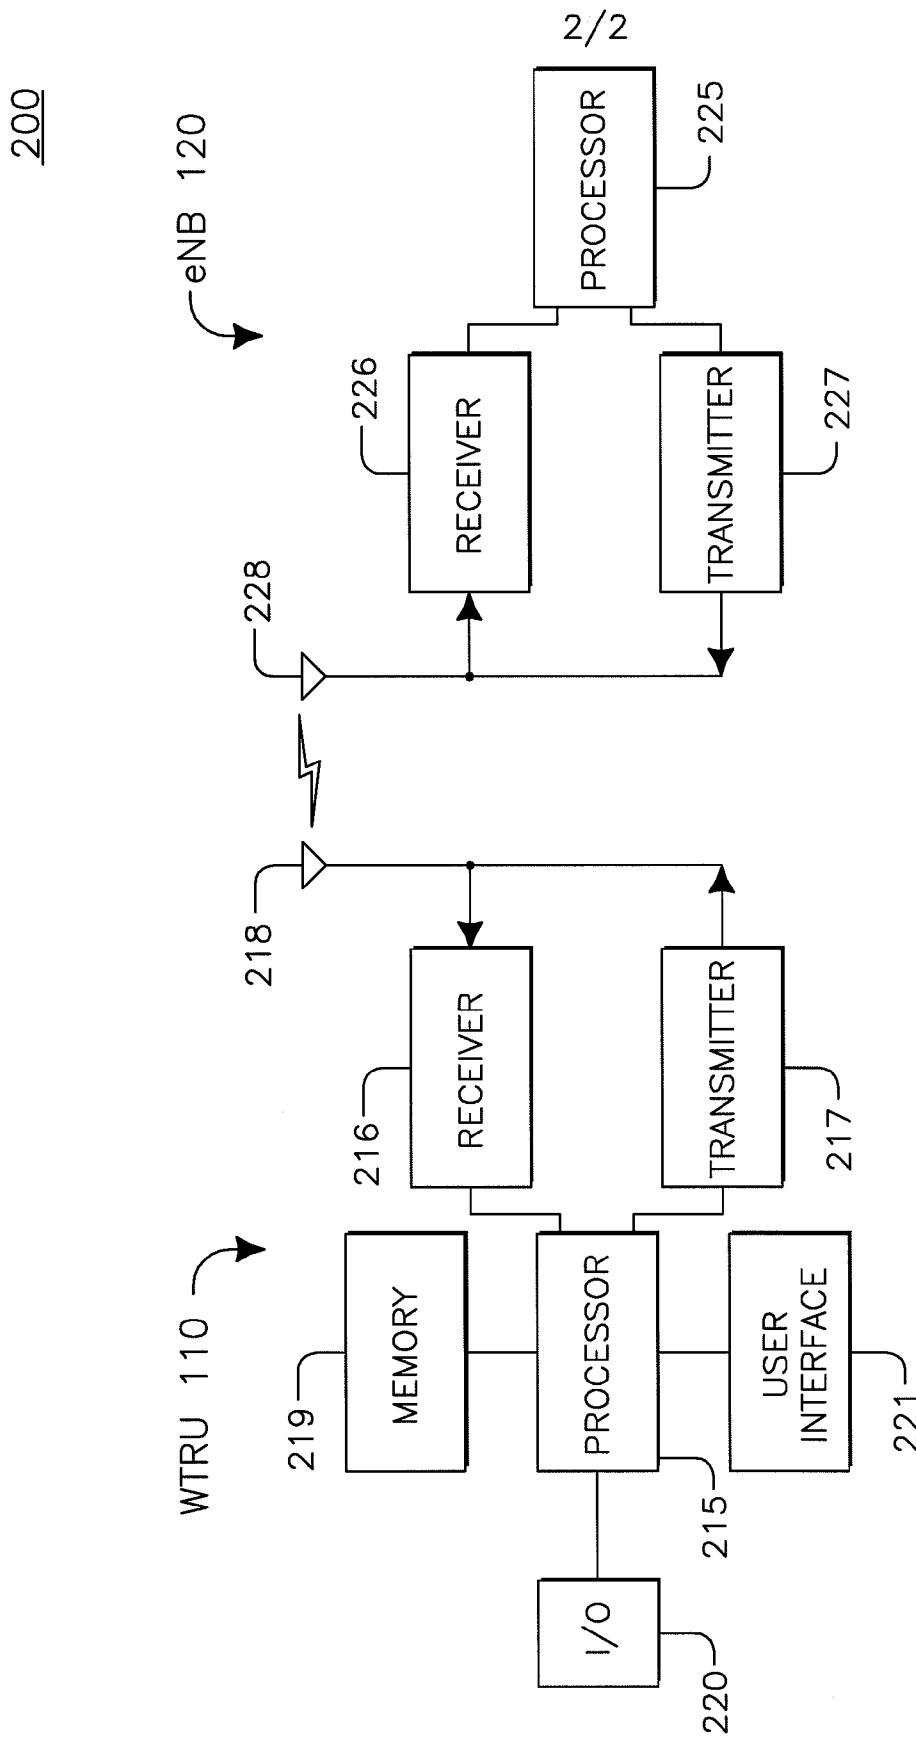
## CLAIMS

What is claimed is:

1. A wireless transmit receive unit (WTRU) comprising:
  - a user interface;
  - a memory;
  - a receiver configured to receive a system frame number (SFN) and system information messages in a modification period; and
  - a processor configured to determine a modification period boundary based on the system frame number.
2. The WTRU as in claim 1 wherein the receiver is further configured to receive an update notification in a first modification period and a plurality of system information updates in a second modification period.
3. The WTRU as in claim 1 wherein:
  - the receiver is further configured to receive an update notification;
  - and
  - the processor is further configured to determine that system information is valid until a next modification period.
4. The WTRU as in claim 1 wherein the processor is further configured to determine the modification boundary based on the SFN and an integer value.

1/2

100**FIG.1**

**FIG.2**

## INTERNATIONAL SEARCH REPORT

International application No PCT/US2008/081417
---

A. CLASSIFICATION OF SUBJECT MATTER INV. H04W48/16
---

According to International Patent Classification (IPC) or to both national classification and IPC
---

B. FIELDS SEARCHED
--------------------

Minimum documentation searched (classification system followed by classification symbols) H04W
---

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
---

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
--

EPO-Internal, WPI Data, INSPEC, COMPENDEX
---

C. DOCUMENTS CONSIDERED TO BE RELEVANT
--

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2005/117297 A (LG ELECTRONICS INC [KR]; YI SEUNG-JUNE [KR]; LEE YOUNG-DAE [KR]; CHUN) 8 December 2005 (2005-12-08) paragraphs [0038] - [0050], [0070], [0085], [0086]; figures 8,9	1-3
P, X	WO 2008/050958 A (LG ELECTRONICS INC [KR]; FISCHER PATRICK [FR]; WERLING THIERRY [FR]) 2 May 2008 (2008-05-02) paragraphs [0050], [0067], [0079] - [0082]; figure 10	1, 4
E	EP 2 007 087 A (LG ELECTRONICS INC [KR]) 24 December 2008 (2008-12-24) paragraphs [0031] - [0040]; claims 1-10	1-4

<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.
--

<input checked="" type="checkbox"/> See patent family annex.
--

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search
---

Date of mailing of the International search report
--

11 March 2009
---------------

20/03/2009
------------

Name and mailing address of the ISA/
--------------------------------------

European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016
--

Authorized officer
--------------------

Nogueroles Petersen
---------------------

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2008/081417

## C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	NOKIA CORPORATION ET AL: "System Information Scheduling - Clarifications" 3GPP DRAFT; R2-080156, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. tsg_ran\WG2_RL2\TSGR2_60bis\Docs, no. Sevilla, Spain; 20080114, 7 January 2008 (2008-01-07), XP050138036 Section 5.1.1.4 -----	1-4

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No

PCT/US2008/081417

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 2005117297	A	08-12-2005	AU	2005320354 A1		07-09-2006
			AU	2005320356 A1		07-09-2006
			BR	PI0507753 A		10-07-2007
			BR	PI0508289 A		07-08-2007
			CN	1934802 A		21-03-2007
			CN	1943145 A		04-04-2007
			CN	1943146 A		04-04-2007
			EP	1738496 A1		03-01-2007
			EP	1749353 A1		07-02-2007
			EP	1738498 A1		03-01-2007
			JP	2007533248 T		15-11-2007
			JP	2007533249 T		15-11-2007
			WO	2005117298 A1		08-12-2005
			WO	2005117299 A1		08-12-2005
			KR	20060133006 A		22-12-2006
			KR	20070006850 A		11-01-2007
			KR	20060133034 A		22-12-2006
WO 2008050958	A	02-05-2008		NONE		
EP 2007087	A	24-12-2008	WO	2008156314 A2		24-12-2008
			US	2008318566 A1		25-12-2008