US 20030164109A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2003/0164109 A1**

Spivak (43) **Pub. Date: Sep. 4, 2003**

(54) **POLAR EJECTION ANGLE CONTROL FOR FRAGMENTING WARHEADS**

(76) Inventor: **Timothy L. Spivak**, King George, VA (US)

Correspondence Address:
Naval Surface Warfare Center
Office of Counsel (Patents) (Code XDC1)
17320 Dahlgren Road
Dahlgren, VA 22448-5100 (US)

(21) Appl. No.: **10/087,895**

(22) Filed: **Mar. 1, 2002**

Publication Classification

(51) **Int. Cl.**[7] **F42B 12/02**; F42B 12/08; F42B 12/20

(52) **U.S. Cl.** **102/475**

(57) **ABSTRACT**

The present invention controls the polar ejection angle of fragments in a fragmenting warhead. The warhead's detonators are initiated non-simultaneously to produce corresponding detonation waves in the warhead's explosive material. The detonation waves interact to control the polar ejection angle of fragments formed when the warhead's casing ruptures. Specified times of detonation for each of the detonators can be selected/adjusted after the warhead is deployed.

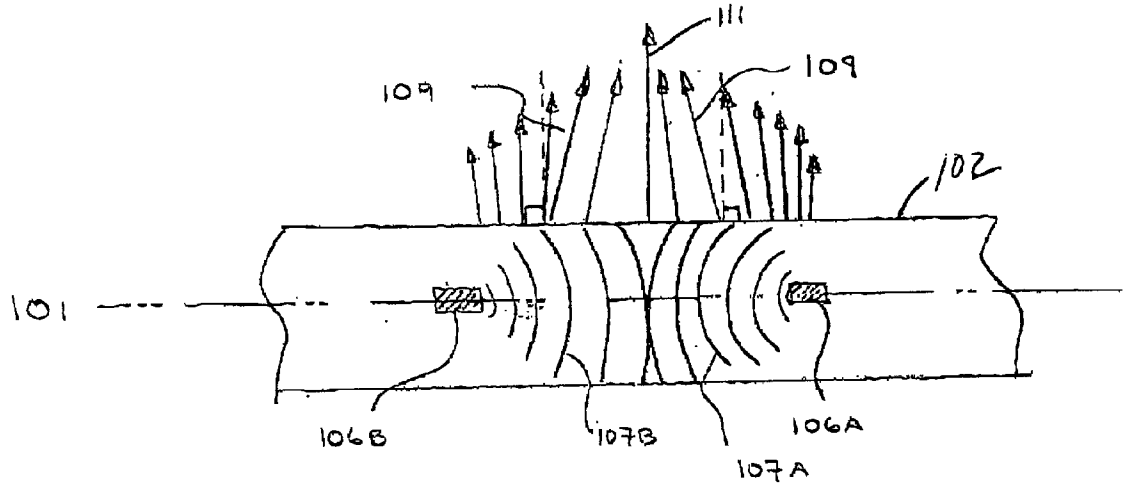

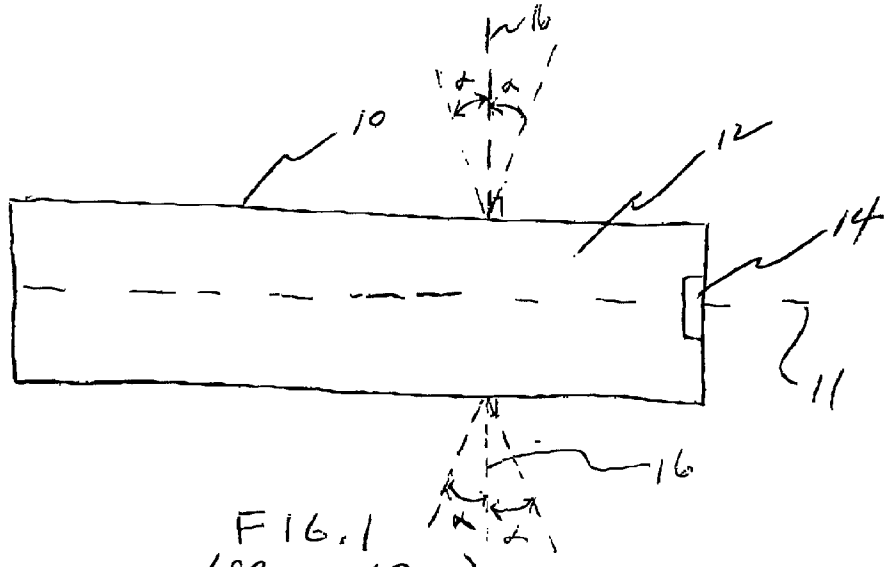

FIG. 1
(PRIOR ART)

FIG. 2
(PRIOR ART)

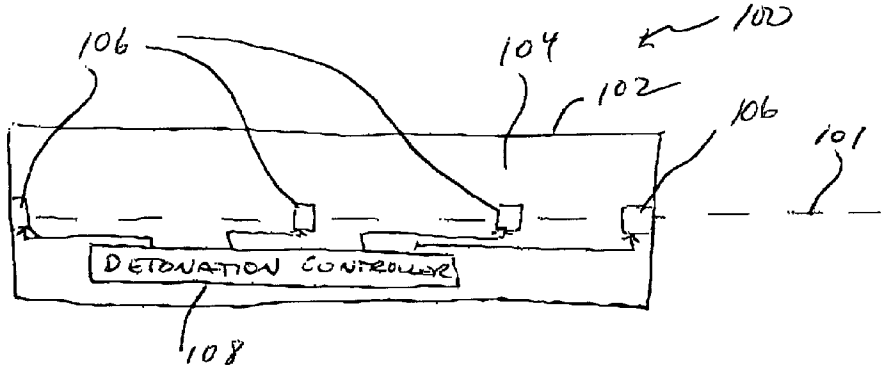

FIG. 3

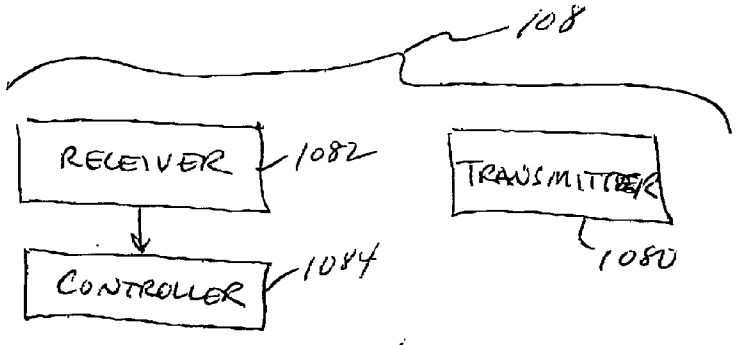

FIG. 4

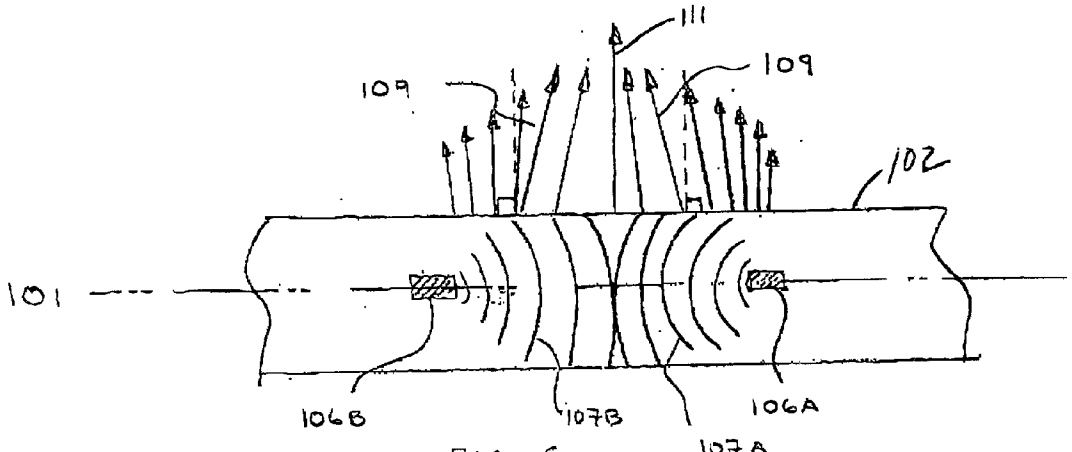

FIG. 5

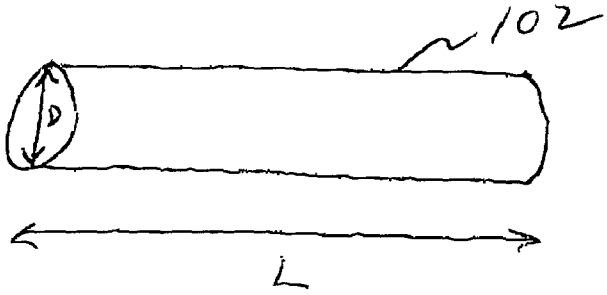

FIG. 6

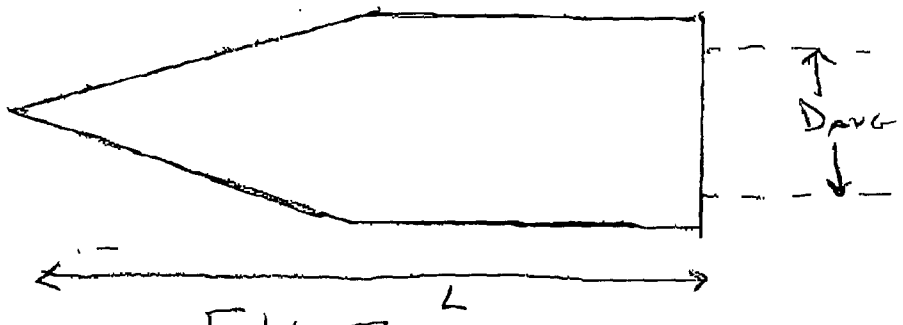

FIG. 7

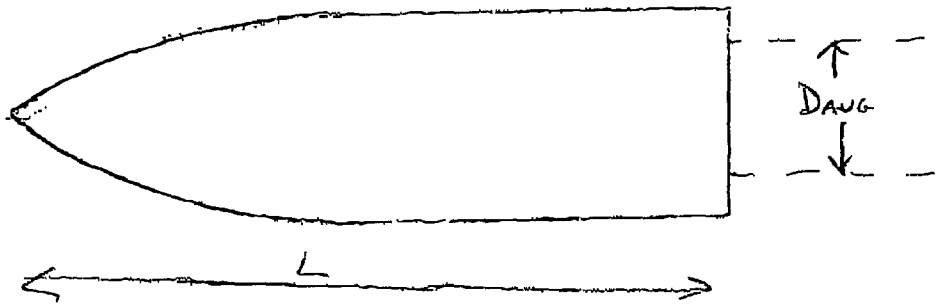

FIG. 8

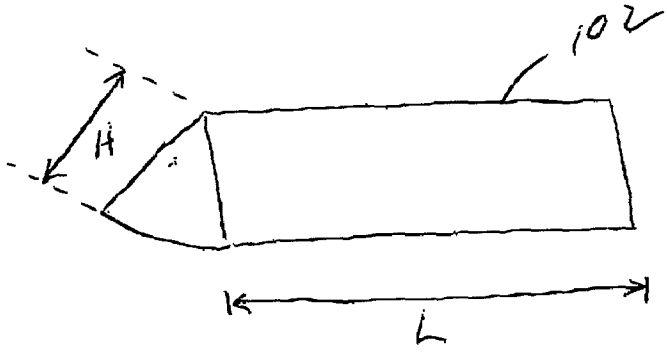

FIG. 9

POLAR EJECTION ANGLE CONTROL FOR FRAGMENTING WARHEADS

ORIGIN OF THE INVENTION

[0001] The invention described herein was made in the performance of official duties by an employee of the Department of the Navy and may be manufactured, used, licensed by or for the Government for any governmental purpose without payment of any royalties thereon.

FIELD OF THE INVENTION

[0002] The invention relates generally to fragmenting warheads, and more particularly to the control of the polar ejection angle of fragments dispersed by a fragmenting warhead.

BACKGROUND OF THE INVENTION

[0003] Fragmenting warheads are used in a variety of military applications to deliver a distribution of high-velocity fragments to a target area. In terms of airborne warheads, **FIG. 1** depicts the essential elements of an end initiated fragmenting warhead. Specifically, a fragmentable casing **10** having a longitudinal centerline axis **11** houses an explosive material **12**. To detonate explosive material **12** and rupture casing **10** into fragments, an initiator or detonator **14** is placed in casing **10** at one end thereof. Upon initiation, a detonation wave commences at detonator **14** and propagates through explosive material **12** along the direction of the longitudinal axis **11** of casing **10**. When the detonation wave reaches casing **10**, a shock wave is transmitted to the casing which, in turn, causes casing **10** to expand. Expansion of casing **10** is further facilitated by the expanding detonation product gases. Casing **10** ruptures into fragments as such expansion continues. These fragments are ejected radially outward along "polar ejection angles" measured perpendicular to the external surface of casing **10** at the specific location of rupturing casing **10**. The polar ejection angle α is governed by the detonation velocity (V_D) of explosive material **12** and the radial velocity (V_F) of the fragments. The polar ejection angle can be approximated by one-half of the Taylor angle whereby

$$\alpha=\arcsin [V_F/(2V_D)].$$

[0004] This is depicted in **FIG. 1** where dashed line **16** represents the perpendicular direction relative to the external surface of casing **102** at the point of a particular polar ejection angle measurement. For a typical warhead, the polar ejection angle for the end initiated fragmenting warhead just described is approximately 7 degrees. As is known in the art, variations in polar ejection angle occur near each end of the warhead due to the build-up of the detonation wave and discontinuities in end confinement of the explosive material.

[0005] The essential features of another type of airborne fragmenting warhead are illustrated in **FIG. 2** where detonators **24** and **26** are located at the respective forward and aft ends of the warhead. Detonators **24** and **26** are initiated simultaneously. Upon initiation, detonation waves starting at detonators **24** and **26** propagate through explosive material **14** from either end of the warhead. In this example, the polar ejection angle for the vast majority of the fragments is approximately 0 degrees due to the meeting of the two detonation waves originating from each end.

[0006] Unfortunately, there are many instances where the fixed polar ejection angles of 0 degrees or 7 degrees (generated by the above-described fragmenting warheads) do not provide the needed flexibility for a particular mission. Further, since the polar ejection angles in these examples are fixed, the warhead's ability to adjust to a changing or moving target scenario is non-existent or at least severely limited.

SUMMARY OF THE INVENTION

[0007] Accordingly, it is an object of the present invention to provide for polar ejection angle control of a fragmenting warhead.

[0008] Another object of the present invention is to provide the means for adjusting the polar ejection angle of a fragmenting warhead to account for changing target scenarios.

[0009] Still another object of the present invention is to provide polar ejection angles for a fragmenting warhead that can range from negative 7 degrees to positive 7 degrees in a controllable fashion.

[0010] Other objects and advantages of the present invention will become more obvious hereinafter in the specification and drawings.

[0011] In accordance with the present invention, control of the polar ejection angle of fragments in a fragmenting warhead is provided. The warhead's casing is filled with explosive material and has at least two detonators spaced apart from one another and coupled to the explosive material. The detonators function in a non-simultaneous fashion to produce corresponding detonation waves in the explosive material. The detonation waves interact to control a polar ejection angle of fragments formed when the warhead's casing ruptures. The present invention includes provisions for selecting specified times of detonation for each of the detonators after the warhead is deployed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] Other objects, features and advantages of the present invention will become apparent upon reference to the following description of the preferred embodiments and to the drawings, wherein corresponding reference characters indicate corresponding parts throughout the several views of the drawings and wherein:

[0013] **FIG. 1** is a side schematic view of a prior art single-point, end initiated fragmenting warhead;

[0014] **FIG. 2** is a side schematic view of a prior art dual end initiated fragmenting warhead having forward and aft end detonators that are initiated simultaneously;

[0015] **FIG. 3** is a side schematic view of one embodiment of a fragmenting warhead having polar ejection angle control in accordance with the present invention;

[0016] **FIG. 4** is a schematic view of an embodiment of a detonation controller that can be used to select/adjust the detonation timing sequence used by the fragmenting warhead after the warhead has been deployed;

[0017] **FIG. 5** is a schematic view of a portion of a fragmenting warhead illustrating the interaction between

adjacent non-simultaneously occurring detonation waves for controlling the polar ejection angle in accordance with the present invention;

[0018] **FIG. 6** is a schematic view of a cylindrical casing that can be used in the present invention;

[0019] **FIG. 7** is a schematic view of a conical casing that can be used in the present invention;

[0020] **FIG. 8** is a schematic view of an ogival shaped casing that can be used in the present invention; and

[0021] **FIG. 9** is a schematic view of an elongated wedge shaped casing that can be used in the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0022] Referring again to the drawings, and more particularly to **FIG. 3**, the essential elements of a fragmenting warhead in accordance with the present invention are illustrated schematically and referenced generally by numeral **100**. While various geometries for warhead **100** will be discussed further below, it is sufficient at this point in the discussion to ignore the geometry thereof except to say that a longitudinal axis **101** is defined thereby. Typically, warhead will travel in a direction along longitudinal axis **101**.

[0023] The essential elements of warhead **100** include a fragmentable casing **102** that is constructed to fragment in a desired fashion as a result of interaction with the detonation wave and detonation products. The fragments (not shown) will fly away from warhead **100** at a polar ejection angle that is defined relative to directions perpendicular to the external surface of casing **102** at the points of fragmentation. The particular construction and fragmentation design of casing **102** is not a limitation of the present invention and will, therefore, not be discussed further herein.

[0024] Casing **102** is filled with an explosive material **104**. Dispersed in explosive material **104** are a plurality of detonators **106**. While the present invention requires the use of at least two detonators **106**, warhead **100** will typically use more than two detonators **106** as illustrated. Detonators **106** can be centrally located in casing **102**, but could also be distributed in other ways such as about the inner periphery of casing **102**, surrounded by explosive material **104** but at positions distributed about longitudinal axis **101**, etc. Furthermore, spacing between adjacent ones of detonators **106** can be even or uneven. Thus, it is to be understood that the particular placement of detonators **106** is not a limitation of the present invention.

[0025] Coupled to each of detonators **106** is a detonation controller **108** that issues detonation signals to bring about the initiation of detonators **106**. Specifically, detonation controller **108** issues detonation signals to bring about the non-simultaneous detonation of detonators **108**. It is the non-simultaneous detonation of detonators **106** that is used in the present invention to control the polar ejection angle of the fragments as will be described in further detail below.

[0026] Detonation controller **108** can be pre-programmed with a specific timing sequence for the non-simultaneous detonation of detonators **106**. However, to take greater advantage of the present invention, detonation controller **108** can be implemented in a way that allows the detonation timing sequence to be selected/adjusted after warhead **100** has been deployed, e.g., while warhead **100** is traveling towards a target area. Such an implementation of detonation controller **108** is illustrated schematically in **FIG. 4** where a transmitter **1080** that is remotely located with respect to warhead **100** transmits the detonation timing sequence over the air waves. Located at warhead **100** are a receiver **1082** and a controller **1084**. Receiver **1082** receives the transmitted detonation timing sequence and controller **1084** processes same for issuance to detonators **106**. Transmitter **1080** could also be integrated into the weapon system and provide its timing data via hard wire or fiber optic communication with controller **1084**.

[0027] The operating principles of the present invention will now be explained with aid of **FIG. 5** where the non-simultaneous initiation of two detonators **106**A and **106**B are used to control the polar ejection angle of fragments created once casing **102** ruptures. An initiation of detonator **106**A causes a detonation wave **107**A to develop and proceed toward detonator **106**B. As the velocity of detonation wave **107**A approaches its full velocity V_D, the polar ejection angle due solely to detonation wave **107**A is approximately 7 degrees as illustrated by vector lines **109**. However, in accordance with the present invention, detonator **106**B is initiated at a specified time delay defined generally as being after initiation of detonator **106**A but prior to the arrival of detonation wave **107**A at detonator **106**B. The corresponding generated detonation wave **107**B proceeds towards detonation wave **107**A. The collision or interaction of detonation waves **107**A and **107**B occurring between detonators **106**A and **106**B causes the polar ejection angle to be affected as illustrated by vector lines **111**. A similar analysis can be applied for each additional detonator. Thus, by adjusting the time delay between detonation of detonators **106**A and **106**B, the average polar ejection angle can be controlled between negative 7 degrees and positive 7 degrees. In general, a longer time delay is used when larger polar ejection angles (e.g., between 4 and 7 degrees) are needed and a shorter time delay is used when smaller polar ejections (e.g., between 0 and 4 degrees) are needed. The time delays between each adjacent pair of detonators can be the same or can be different depending on the application. Note that as the number of points of initiation (i.e., detonators) increases, oscillations in the polar ejection angle are damped out.

[0028] In tests of the present invention, the preferred explosive material is a metal-accelerating explosive material because its performance is optimized for the acceleration of metal fragments. For any given explosive, the detonator spacing should be no less than twice the explosives critical diameter. In the case of typical metal accelerating explosives, the critical diameter is on the order of 0.25-0.5 inches thereby leading to a minimum detonator spacing of approximately 0.5 inches. Conversely, the maximum separation distance between any two adjacent detonators is unlimited.

[0029] As mentioned above, a variety of geometries for the warhead's casing can be used in the present invention. For example, casing **102** can be right circular cylinder as illustrated in **FIG. 6** with a length-to-diameter (L/D) ratio in the approximate range of **1-9**. Casing **102** could also be tapered along its length in a conical (**FIG. 7**) or ogival (**FIG. 8**) fashion. For both the conical and ogival shaped casings, a length-to-average diameter (L/D_{AVG}) ratio in the approximate range of 1-15 should be maintained. Still further,

casing **102** could be embodied by an elongated wedge shape as illustrated in **FIG. 9** where a length-to-height (L/H) ratio in the approximate range of 1-10 should be maintained.

[**0030**] The advantages of the present invention are numerous. The polar ejection angle of a fragmenting warhead can be optimized for a particular application. The adjustment can be made prior to or after deployment of the warhead. Thus the present invention will allow for the design of a single fragmenting warhead construction for multiple and changing tactical scenarios.

[**0031**] Although the invention has been described relative to a specific embodiment thereof, there are numerous variations and modifications that will be readily apparent to those skilled in the art in light of the above teachings. It is therefore to be understood that, within the scope of the appended claims, the invention may be practiced other than as specifically described.

What is claimed as new and desired to be secured by Letters Patent of the United States is:

1. A method of controlling the polar ejection angle of fragments in a fragmenting warhead, comprising the steps of:

providing a casing filled with explosive material with at least two detonators spaced apart from one another and coupled to said explosive material; and

detonating said at least two detonators non-simultaneously to produce corresponding detonation waves in said explosive material that interact to control a polar ejection angle of fragments formed when said casing ruptures.

2. A method according to claim 1 further comprising the step of selecting specified times of detonation for each of said at least two detonators after said fragmenting warhead is deployed.

3. A method of controlling the polar ejection angle of fragments in a fragmenting warhead, comprising the steps of:

providing a casing filled with a metal-accelerating explosive material with a plurality of detonators therein wherein a minimum spacing between any two of said plurality of detonators is approximately 0.5 inches; and

detonating said plurality of detonators non-simultaneously to produce corresponding detonation waves in said metal-accelerating explosive material that interact to control a polar ejection angle of fragments formed when said casing ruptures.

4. A method according to claim 3 further comprising the step of selecting specified times of detonation for each of said plurality of detonators after said fragmenting warhead is deployed.

5. A fragmenting warhead, comprising:

a casing;

explosive material filling said casing;

at least two detonators spaced apart from one another and coupled to said explosive material; and

means for detonating said at least two detonators non-simultaneously at specified times, wherein said at least two detonators initiate corresponding detonation waves in said explosive material that interact to control a polar ejection angle of fragments formed when said casing ruptures.

6. A fragmenting warhead as in claim 5 wherein said casing is a circular cylinder having a length-to-diameter ratio that is between approximately 1 and 9.

7. A fragmenting warhead as in claim 5 wherein said casing tapers along its length and has a length-to-average diameter ratio that is between approximately 1 and 15.

8. A fragmenting warhead as in claim 5 wherein said casing is ogival along its length and has a length-to-average diameter ratio that is between approximately 1 and 15.

9. A fragmenting warhead as in claim 5 wherein said casing is an elongated wedge having a length-to-height ratio that is between approximately 1 and 10.

10. A fragmenting warhead as in claim 5 wherein spacing between said at least two detonators is even.

11. A fragmenting warhead as in claim 5 wherein spacing between said at least two detonators is uneven.

12. A fragmenting warhead as in claim 5 wherein said means for detonating includes means for adjusting said specified times after deployment of said fragmenting warhead.

13. A fragmenting warhead, comprising:

a casing;

a metal-accelerating explosive material filling said casing;

a plurality of detonators spaced apart from one another in said metal-accelerating explosive material wherein a minimum spacing between any two of said plurality of detonators is approximately 0.5 inches; and

means for detonating said plurality of detonators non-simultaneously at specified times, wherein said at least two detonators initiate corresponding detonation waves in said metal-accelerating explosive material that interact to control a polar ejection angle of fragments formed when said casing ruptures.

14. A fragmenting warhead as in claim 13 wherein said casing is a circular cylinder having a length-to-diameter ratio that is between approximately 1 and 9.

15. A fragmenting warhead as in claim 13 wherein said casing tapers along its length and has a length-to-average diameter ratio that is between approximately 1 and 15.

16. A fragmenting warhead as in claim 13 wherein said casing is ogival along its length and has a length-to-average diameter ratio that is between approximately 1 and 15.

17. A fragmenting warhead as in claim 13 wherein said casing is an elongated wedge having a length-to-height ratio that is between approximately 1 and 10.

18. A fragmenting warhead as in claim 13 wherein spacing between said at least two detonators is even.

19. A fragmenting warhead as in claim 13 wherein spacing between said at least two detonators is uneven.

20. A fragmenting warhead as in claim 13 wherein said means for detonating includes means for adjusting said specified times after deployment of said fragmenting warhead.

* * * * *