



(11) **EP 2 234 133 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
03.12.2014 Bulletin 2014/49

(51) Int Cl.:
H01G 9/20 (2006.01)

(21) Application number: **10168993.3**

(22) Date of filing: **12.07.2004**

(54) **photoelectric conversion element comprising semiconductor oxide particles**

Farbstoffsolarzelle mit Halbleiteroxidteilchen

Élément de conversion photoélectrique comportant des particules d'oxydes semi-conducteurs

(84) Designated Contracting States:
AT CH DE FI LI NL SE

(30) Priority: **14.07.2003 JP 2003196561**
23.07.2003 JP 2003200626
23.07.2003 JP 2003200629
06.10.2003 JP 2003347193
22.03.2004 JP 2004082586
22.03.2004 JP 2004082934

(43) Date of publication of application:
29.09.2010 Bulletin 2010/39

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
04747709.6 / 1 653 549

(73) Proprietor: **FUJIKURA LTD.**
Koto-ku
Tokyo 135-8512 (JP)

(72) Inventors:
• **Usui,, Hiroki**
TOKYO (JP)
• **Tanabe, Nobuo**
TOKYO (JP)
• **Matsui Hiroshi**
TOKYO (JP)

• **Ezure, Tetsuya**
TOKYO (JP)
• **Yanagida, Shozo**
Osaka (JP)

(74) Representative: **Cabinet Plasseraud et al**
52, rue de la Victoire
75440 Paris Cedex 09 (FR)

(56) References cited:
WO-A1-03/054894 JP-A- 2003 157 914
US-A1- 2002 018 938

• **WANG P ET AL: "GELATION OF IONIC LIQUID-
BASED ELECTROLYTES WITH SILICA
NANOPARTICLES FOR QUASI-SOLID-STATE
DYE-SENSITIZED SOLAR CELLS", JOURNAL OF
THE AMERICAN CHEMICAL SOCIETY,
AMERICAN CHEMICAL SOCIETY, US, vol. 125,
no. 5, 1 January 2003 (2003-01-01), XP001172435,
ISSN: 0002-7863, DOI: DOI:10.1021/JA029294+**

Remarks:

The file contains technical information submitted after
the application was filed and not included in this
specification

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD

[0001] Priority is claimed on the following applications. Japanese Patent Application No. 2003-200626, filed on July 23, 2003; Japanese Patent Application No. 2003-347193, filed on October 6, 2003; Japanese Patent Application No. 2004-82934, filed on March 22, 2004; Japanese Patent Application No. 2003-196561, filed on July 14, 2003; Japanese Patent Application No. 2003-200629, filed on July 23, 2003; and Japanese Patent Application No. 2004-82586, filed on March 22, 2004.

[0002] The present invention relates to a photoelectric conversion element comprising an electrolyte composition which comprises an ionic liquid, an oxidation-reduction pair and oxide semiconductor particles, wherein the electrolyte composition is in the form of a gel by the action of the oxide semiconductor particles; and the rate of change in the diffusion coefficients is not less than 25% and not more than 125%.

BACKGROUND ART

[0003] Dye-sensitized photovoltaic cells were developed by Graetzel et al. in Switzerland. They have advantages, such as low cost, and are attracting attention as new types of photoelectric conversion cells (see, for example, Japanese Patent No. 2664194; Japanese Unexamined Patent Application, First Publication No. 2001-160427, and Michael Graetzel, Nature, United Kingdom, 1991, vol. 737, p. 353).

[0004] Dye-sensitized photovoltaic cells generally include a transparent conductive electrode substrate, a working electrode that has a porous film made of oxide semiconductor fine particles (nanoparticles), such as titanium dioxide, and is sensitized with a photo-sensitizing dye on the electrode substrate, a counter electrode provided opposing the working electrode, and an electrolyte containing an oxidation-reduction pair filled between the working electrode and the counter electrode. Such a dye-sensitized photovoltaic cell functions as a photoelectric conversion element that converts light energy into electricity when the oxide semiconductor fine particles are sensitized by the photo-sensitizing dye that absorbs incident light, such as sunlight, thereby generating an electromotive force between the working electrode and the counter electrode.

[0005] As the electrolyte, an electrolyte solution is typically used in which an oxidation-reduction pair, such as I^-/I_3^- , is dissolved in an organic solvent, such as acetonitrile. Other well-known electrolytes include one using a nonvolatile ionic liquid, one in which the liquid electrolyte is made into a gel using an appropriate gelling agent to be quasi-solidified, and one using a solid semiconductor, such as a p-type semiconductor.

[0006] An ionic liquid is also called a room temperature molten salt, exists as a stable liquid in a broad temperature region, including in the vicinity of room temperature, and is a salt made from a cation and an anion. Since ionic liquids have very low vapor pressure and do not substantially vaporize at room temperature, they are not liable to volatilization or cause ignition, unlike typical organic solvents. Thus, they are proposed as a solution to a problem of decrease in cell characteristics caused by volatilization (see N. Papageorgiou et al., Journal of the Electrochemical Society (J. Electrochem. Soc.), United Kingdom, 1996, vol. 143 (10), p. 3099), for example.

[0007] In addition, when an electrolyte solution (liquid) is used as an electrolyte, the electrolyte solution may be exposed and leak (fluid leakage) during the manufacturing processes or upon breakage of the cell. In order to prevent fluid leakage, an attempt has been made to add an appropriate gelling agent (see Japanese Unexamined Patent Application, First Publication No. 2002-184478, JP 2003-157914 and WO 03/054894 for example).

[0008] However, ionic liquids suffer from a shortcoming in that the electrical resistance thereof is higher than that of an electrolyte solution obtained through dissolution into an organic solvent, such as acetonitrile.

[0009] In addition, gelling agents conventionally used for gel electrolytes include, for example, polyvinylidene fluoride, polyvinylidene fluoride - hexafluoropropylene copolymer, polyethylene oxide derivatives, polyacrylonitrile derivatives, amino acid derivatives. However, these gelling agents have a shortcoming in that the conversion efficiency of a photoelectric conversion element is significantly reduced compared to a case without adding such gelling agents since they are electrical insulators having very high electrical resistances.

[0010] Wang et al. (J. Am. Soc., vol. 125, 2003) discloses a photoelectric conversion element comprising an ionic liquid electrolyte gelled by the use of silica nanoparticles. Although silica nanoparticles are insulators, the diffusion coefficients and the equilibrium potentials of the conversion element are not reduced but neither improved by the presence of silica nanoparticles in the electrolyte.

DISCLOSURE OF INVENTION

[0011] Accordingly, a problem to be solved by the present invention is to provide a photoelectric conversion element that exhibits the conversion efficiency comparable to that of one using liquid electrolytes (electrolyte solutions), and a

dye-sensitized photovoltaic cell using the same.

[0012] In order to solve the above problem, the present invention provides a photoelectric conversion element comprising an electrolyte composition comprising an ionic liquid (A), oxide semiconductor particles (B) and an oxidation-reduction pair. This electrolyte composition may include conductive particles (C).

[0013] The electrolyte composition according to the present invention is made into a gel by the action of the oxide semiconductor particles; and the rate of change in the diffusion coefficients is not less than 25% and not more than 125%.

[0014] In the electrolyte composition it is preferable that the oxide semiconductor particles (B) be one member or a mixture of two or more members selected from the group consisting of TiO_2 , SnO_2 , WO_3 , ZnO , ITO , BaTiO_3 , Nb_2O_5 , In_2O_3 , ZrO_2 , Ta_2O_5 , La_2O_3 , SrTiO_3 , Y_2O_3 , Ho_2O_3 , Bi_2O_3 , CeO_2 , and Al_2O_3 . It is preferable that the above TiO_2 be either one of or a mixture of titanium oxide nanotubes and titanium oxide nanoparticles.

[0015] Furthermore, it is preferable that the conductive particle be made of a material containing carbon as a main component. In addition, it is preferable that the material containing carbon as a main component be one member or a mixture of two or more members selected from the group consisting of carbon nanotubes, carbon fibers, and carbon black. Furthermore, it is preferable that the carbon nanotubes be either one of or a mixture of single-wall carbon nanotubes and multi-wall carbon nanotubes.

[0016] In the electrolyte composition it is preferable that, when no conductive particles (C) are added, a compounding amount of the oxide semiconductor particle (B) be no less than 0.05% by weight and no more than 70% by weight with respect to the total amount of the electrolyte composition.

[0017] It is preferable that, when conductive particles (C) are added, a total compounding amount of the oxide semiconductor particle (B) and the conductive particles (C) be no less than 0.05% by weight and no more than 70% by weight with respect to the total amount of the electrolyte composition.

[0018] In the electrolyte composition it is preferable that, when no conductive particles (C) are added, a compounding amount of the oxide semiconductor particle (B) be no less than 0.05% by weight and no more than 70% by weight with respect to the total amount of the ionic liquid (A).

[0019] It is preferable that, when conductive particles (C) are added, a total compounding amount of the oxide semiconductor particle (B) and the conductive particles (C) be no less than 0.05% by weight and no more than 70% by weight with respect to the total amount of the ionic liquid (A).

[0020] Furthermore, the present invention provides a photoelectric conversion element, comprising: a working electrode, the working electrode comprising an electrode substrate and an oxide semiconductor porous film formed on the electrode substrate and sensitized with a dye; a counter electrode disposed opposing the working electrode; and an electrolyte layer made of the above-described electrolyte composition provided between the working electrode and the counter electrode.

[0021] Furthermore, the present invention provides a dye-sensitized photovoltaic cell, comprising: a working electrode, the working electrode comprising an electrode substrate and an oxide semiconductor porous film formed on the electrode substrate and sensitized with a dye; a counter electrode disposed opposing the working electrode; and an electrolyte layer made of the above-described electrolyte composition provided between the working electrode and the counter electrode.

[0022] According to the present invention, a gel electrolyte having a high conductivity can be obtained by making an ionic liquid into a gel. By using such an electrolyte composition as an electrolyte of a photoelectric conversion element, it becomes possible to stably achieve high output characteristics and photoelectric conversion characteristics. Furthermore, since the electrolyte composition is in a state of a gel, it has reduced flowability, thereby achieving excellent safety and durability and ease of handling.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] FIG 1 is a schematic diagram illustrating an example of a photoelectric conversion element according to the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

[0024] Hereinafter, preferred embodiments of the present invention will be described with reference to the drawings.

[0025] Examples not according to the present invention.

<Preparation of Electrolyte Composition>

[0026] As an ionic liquid, 1-ethyl-3-methylimidazolium bis(trifluoromethylsulfonyl)imide was used, and an electrolyte solution containing iodine/iodide ions as an oxidation-reduction pair was prepared by dissolving appropriate amounts of iodine and lithium iodide, and an appropriate amount of 4-*tert*-butylpyridine into this ionic liquid.

[0027] Electrolyte compositions of Examples A-1 to A-10 were obtained by blending carbon nanotubes, or carbon fibers, or carbon black as conductive particles in the above electrolyte solution at a ratio of 1% by weight with respect to the total amount of the electrolyte composition and then centrifuging the mixture. In this case, the compounding amount of the conductive particles with respect to the ionic liquid was about 1.25% by weight.

<Fabrication of Photoelectric Conversion Element of Examples A1-1 to A1-5, A2, and A3>

[0028] As a transparent electrode substrate, a 100 mm x 100 mm glass substrate having an FTO film formed thereon was provided, and a slurry dispersion solution of titanium oxide having an average particle diameter of 20 nm was applied on the FTO film (conductive layer) side surface of this transparent electrode substrate 2. After being dried, an oxide semiconductor porous film having a thickness of 7 μm was obtained by performing heating treatment at 450°C for one hour. The transparent electrode substrate was then immersed overnight in an ethanol solution of ruthenium bipyridine complex (an N3 dye) so as to be sensitized with the dye to form a working electrode. Furthermore, as a counter electrode, an FTO glass electrode substrate was prepared having an electrode layer made of platinum formed thereon by sputtering.

[0029] In order to form the electrolyte layer on the working electrode, the electrolyte composition that was made into a gel was dropped to the oxide semiconductor porous film of the working electrode in a small amount, and then the counter electrode and the electrolyte layer were adhered together by overlaying them while pressing the counter electrode hard. In the procedures described above, dye-sensitized photovoltaic cells which were test cells of Examples A1-1 to A1-5, A2, and A3 were fabricated.

<Fabrication of Test Cell of Comparative Example A1>

[0030] As the working electrode and the counter electrode, electrodes similar to those used in the above-described test cells of Examples A1-1 to A1-5, A2, and A3 were used. As an electrolyte solution to form an electrolyte, an ionic liquid [1-ethyl-3-methylimidazolium bis(trifluoromethylsulfonyl)imide] containing iodine/iodide ions as an oxidation-reduction pair was prepared and used. This electrolyte solution was similar to those used to prepare the electrolyte solutions for the electrolyte compositions of the test cells of Examples A1-1 to A1-5, A2, and A3, except that conductive particles were not added.

[0031] A dye-sensitized photovoltaic cell which was the test cell of Comparative Example A1 was fabricated by placing the working electrode and the counter electrode so that they opposed each other and forming an electrolyte layer by injecting the electrolyte solution therebetween.

<Fabrication of Test Cell of Comparative Example A2>

[0032] As the working electrode and the counter electrode, electrodes similar to those used in the above-described test cells of Examples A1-1 to A1-5, A2, and A3 were used. As an electrolyte solution to form an electrolyte, an acetonitrile solution containing quaternary imidazolium-iodide, lithium iodide, iodine, and 4-*tert*-butylpyridine was prepared and used.

[0033] A dye-sensitized photovoltaic cell which was the test cell of Comparative Example A2 was fabricated by placing the working electrode and the counter electrode so that they opposed each other and forming an electrolyte layer by injecting the electrolyte solution therebetween.

<Photoelectric Conversion Characteristic of Test Cells>

[0034] Photoelectric conversion characteristics of each of the above-described test cells were measured. The conversion efficiency of each of the test cells is listed in Table 1. In Table 1, the column under the label "SWCNT/MWCNT" indicates a ratio of single-wall carbon nanotubes (SWCNT) and multi-wall carbon nanotubes (MWCNT).

Table 1

	Conductive Particles	SWCNT/MWCNT	State	Conversion Efficiency [%]
Example A 1-1	Carbon nanotubes	100% / 0%	gel	4.4
Example A1-2	Carbon nanotubes	80% / 20%	gel	4.4
Example A1-3	Carbon nanotubes	50% / 50%	gel	4.5
Example A1-4	Carbon nanotubes	20% / 80%	gel	4.3
Example A1-5	Carbon nanotubes	0% / 100%	gel	4.7

(continued)

	Conductive Particles	SWCNT/MWCNT	State	Conversion Efficiency [%]
Example A2	Carbon fibers	-	gel	4.4
Example A3	Carbon black	-	gel	4.3
Comparative Example A1	none	-	liquid	4.1
Comparative Example A2	none (acetonitrile solution)	-	liquid	5.5

[0035] As shown by the above results, high conversion efficiencies that were comparable to conversion efficiencies achievable when a liquid electrolyte (an electrolyte solution) is used were obtained even when the electrolyte was in a state of a gel in the test cells of Examples A1-1 to A1-5, A2, and A3. Japanese Unexamined Patent Application, First Publication No. 2002-184478 discloses a conversion efficiency of a photoelectric conversion element at an early stage of 2.0% when an electrolyte was made into a gel. As in this case, conventionally, conversion efficiencies when a gel electrolyte is used have been significantly lower than those when an electrolyte solution is used, which did not occur in the present invention. Accordingly, advantageous effects of making an electrolyte solution (an ionic liquid or the like) into a gel using conductive particles are apparent.

[0036] It is possible to obtain an electrolyte having a better conductivity by improving the properties of an ionic liquid. Furthermore, it is possible to obtain a gel electrolyte having a high conductivity by making an electrolyte composition containing an ionic liquid into a gel.

[0037] By using such an electrolyte composition as an electrolyte of a photoelectric conversion element, it becomes possible to stably achieve high output characteristics and photoelectric conversion characteristics. Furthermore, since the electrolyte composition is in a state of a gel, it has reduced flowability, thereby achieving excellent safety and durability and ease of handling.

[0038] A photoelectric conversion element according to the present invention comprises an electrolyte composition which comprises an ionic liquid (A), an oxidation-reduction pair and oxide semiconductor particles (B) or an ionic liquid (A), an oxidation-reduction pair and oxide semiconductor particles (B), and conductive particles (C). Furthermore, the electrolyte composition of the present invention is made into a gel by the action of the oxide semiconductor particles; and the rate of change in the diffusion coefficient is not less than 25% and not more than 125%. As used herein, an electrolyte is regarded as a gel if all of 10 cc of the electrolyte that is placed into a columnar glass tube having an inner diameter of 15 mm and a depth of 10 cm does not fall to the bottom after 15 minutes at room temperature (23°C) when the glass tube is turned upside down.

[0039] The electrolyte composition contains the ionic liquid (A) as a first essential component.

[0040] An example of the ionic liquid (A) is, but not limited to, a room temperature molten salt that is liquid at room temperature and contains a compound containing a quaternized nitrogen atom as a cation. The cation of the room temperature molten salt may be quaternary imidazolium derivatives, quaternary pyridinium derivatives, quaternary pyrrolidinium derivatives, quaternary ammonium derivatives, and the like.

[0041] As quaternary imidazolium-based cations, 1,3-dialkyl imidazoliums, such as, 1-ethyl-3-methylimidazolium, 1-ethyl-3-propyl imidazolium, 1-ethyl-3-hexyl imidazolium, 1-hexyl-3-methylimidazolium, are exemplified, for example. As quaternary pyridinium-based cations, N-alkyl pyridiniums, such as N-butyl pyridinium, are exemplified, for example. As quaternary pyrrolidinium-based cations, N,N-dialkyl pyrrolidiniums, such as N-methyl-N-propyl pyrrolidinium and N-methyl-N-butyl pyrrolidinium, are exemplified.

[0042] The anion of the room temperature molten salt may be BF_4^- , PF_6^- , $\text{F}(\text{HF})_n^-$, bis(trifluoromethylsulfonyl)imide $[\text{N}(\text{CF}_3\text{SO}_2)_2]^-$, iodide ions, bromide ions, dicyanamide, and the like.

[0043] Specific examples of the ionic liquid may include salts made of a quaternary imidazolium cation, and iodide ion or bis(trifluoromethylsulfonyl)imide ion, dicyanamide ion, and the like.

[0044] The electrolyte composition contains the oxide semiconductor particles (B) as a second essential component.

[0045] Types of the material of the oxide semiconductor particles (B) and the particle size thereof are not limited, but those that exhibit a miscibility with the electrolyte solution, which contains an ionic liquid as a main component, and can make the electrolyte solution into a gel are preferred. In addition, the conductive particles should not cause a decrease in the conductivity in the electrolyte composition, and exhibit chemical stability to other co-existing components contained in the electrolyte composition. Especially, it is preferable that the conductive particles be not degraded by an oxidation reaction even when the electrolyte composition contains an oxidation-reduction pair, such as iodine/iodide ion or bromine/bromide ion.

[0046] Such oxide semiconductor particles (B) are preferably one of the member or a mixture of two or more members selected from the group consisting of TiO_2 , SnO_2 , WO_3 , ZnO , ITO, BaTiO_3 , Nb_2O_5 , In_2O_3 , ZrO_2 , Ta_2O_5 , La_2O_3 , SrTiO_3 , Y_2O_3 , Ho_2O_3 , Bi_2O_3 , CeO_2 , and Al_2O_3 . As used herein, "ITO" means tin-doped indium oxide. The oxide semiconductor

used for the oxide semiconductor particles (B) may be an oxide doped with dopants, or may be a composite oxide.

[0047] Titanium dioxide fine particles (nanoparticles or nanotubes) are particularly preferred as the oxide semiconductor particles (B).

[0048] The average particle diameter of the oxide semiconductor particles (B) is preferably between about 2 nm and 1000 nm. The average particle diameter of titanium dioxide nanoparticles is preferably between about 1 nm and 1 μm .

[0049] Titanium dioxide nanotubes are tube-shaped titanium oxides having a diameter of between about 5 nm and 20 nm and a length of between about 10 nm and 10 μm .

[0050] In the electrolyte composition according to the second embodiment of the present invention, the conductive particles (C) may be blended as an optional component.

[0051] As the conductive particles (C), particles having conductivity, such as those made of a conductor or a semiconductor may be used.

[0052] The range of the specific resistance of the conductive particles is preferably $1.0 \times 10^{-2} \Omega \cdot \text{cm}$ or less, and more preferably $1.0 \times 10^{-3} \Omega \cdot \text{cm}$ or less.

[0053] Types of the material of the conductive particles (C) and the particle size thereof are not limited, but those that exhibit a miscibility with the electrolyte solution, which contains an ionic liquid as a main component, and can make the electrolyte solution into a gel are preferred. In addition, the conductive particles should not cause a decrease in the conductivity due to formation of an oxide film (insulating film) or the like in the electrolyte composition, and should exhibit chemical stability to other co-existing components contained in the electrolyte composition. Especially, it is preferable that the conductive particles be not degraded by an oxidation reaction even when the electrolyte composition contains an oxidation-reduction pair, such as iodine/iodide ion or bromine/bromide ion.

[0054] Such conductive particles (C) may be particles including carbon as a main component, and specific examples include particles, such as carbon nanotubes, carbon fibers, carbon black, and the like. Methods for manufacturing such materials are well-known; alternatively, commercially available materials may be used.

[0055] Carbon nanotubes have a structure in which a graphene sheet is formed into a columnar or a truncated cone shape. More specifically, there are single-wall carbon nanotubes (SWCNT) having a single layer of a graphene sheet and multi-wall carbon nanotubes (MWCNT) having multiple layers (two or more layers) of graphene sheets.

[0056] These materials have an excellent stability against an oxidizing agent that may be used in an oxidation-reduction pair, such as iodine or bromine, and can be preferably used as conductive particles (C) in the electrolyte composition of the present invention.

[0057] The above-described conductive particles (C) may be used either alone or in combination of two or more kinds.

[0058] The size of each of the above-described particles is preferably between about 0.5 nm and 10 nm in diameter and between about 10 nm to 1 μm in length for single-wall carbon nanotubes. For multi-wall carbon nanotubes, those having a diameter of between about 1 nm and 100 nm and a length of between about 50 nm to 50 μm are preferable. For carbon fibers, those having a diameter of between about 50 nm and 1 μm and a length of between about 1 μm to 100 μm are preferable. For carbon black, those having a particle diameter of between about 1 nm and 500 nm are preferable.

[0059] It is preferable that, when no conductive particles (C) are added, the compounding amount of the oxide semiconductor particles (B) be no less than 0.05% by weight and no more than 70% by weight with respect to the total amount of the electrolyte composition. More preferably, it is preferable that it be no less than 0.05% by weight and no more than 50% by weight.

[0060] It is preferable that, when conductive particles (C) are added, the total compounding amount of the oxide semiconductor particles (B) and the conductive particles (C) be no less than 0.05% by weight and no more than 70% by weight with respect to the total amount of the electrolyte composition. More preferably, it is preferable that it be no less than 0.05% by weight and no more than 50% by weight.

[0061] Setting the compounding amount of the oxide semiconductor particles (B) and the conductive particle (C) within the above range can enable the electrolyte solution containing the ionic liquid (A) to form a gel, and the electrolyte solution is prevented from being exposed and leaking (fluid leakage) during the manufacturing processes or upon breakage of the cell.

[0062] If the compounding amount of the oxide semiconductor particles (B) or the total compounding amount of the oxide semiconductor particles (B) and the conductive particles is less than 0.05% by weight with respect to the total amount of the electrolyte composition, the electrolyte solution containing the ionic liquid does not form a gel and fluid leakage or the like may occur upon breakage. In contrast, when the compounding amount of the oxide semiconductor particles (B) or the total compounding amount of the oxide semiconductor particles (B) and the conductive particles (C) exceeds 70% by weight with respect to the total amount of the electrolyte composition, the particles (B) or the particles (B) and (C) absorb all of the ionic liquid and the solution may not function as an electrolyte.

[0063] When the oxide semiconductor particles (B) are nanoparticles, a preferred compounding amount of (B) or (B) + (C) described above is no less than 0.05% by weight and no more than 70% by weight. Furthermore, a more preferred compounding amount of (B) or (B) + (C) described above is no less than 0.05% by weight and no more than 50% by

weight with respect to the total amount of the electrolyte composition.

[0064] When the oxide semiconductor particles (B) are nanotubes, a preferred compounding amount of (B) or (B) + (C) described above is no less than 0.05% by weight and no more than 50% by weight. Furthermore, a more preferred compounding amount of (B) or (B) + (C) described above is about 10% by weight with respect to the total amount of the electrolyte composition.

[0065] Oxidation-reduction pairs (redox pairs) are added to the electrolyte composition as an essential component.

[0066] As the oxidation-reduction pair, a halogen-based redox pair made of halide ions, such as iodide ions (I^-), bromide ions (Br^-), or chloride ions (Cl^-), or polyhalide ions, such as I_3^- , I_5^- , I_7^- , Br_3^- , Cl_2I^- , ClI_2^- , Br_2I^- , Brl_2^- , is preferably used, although these are not limiting.

[0067] For example, pairs such as iodine/iodide ions, bromine/bromide ions, and the like may be added and obtained as the oxidation-reduction pair. For the supply source of the iodide ions or bromide ions, a lithium salt, quaternary imidazolium salt, tetrabutylammonium salt, and the like may be used alone or in combination.

[0068] Various additives or solvents, such as *tert*-butylpyridine, may be added to the electrolyte composition according to the second embodiment of the present invention if required, in an amount in which the properties or characteristics of the electrolyte composition are not affected.

[0069] Insulating particles may be contained in the electrolyte composition in an amount in which characteristics of the electrolyte composition are not affected. Here, an example of insulating particles includes particles of diamond or boron nitride (BN).

[0070] The methods for preparing the electrolyte composition of the present invention from the components described above are not particularly limited, and a method may be employed, for example, in which an electrolyte solution is obtained by adding additives (components soluble in the ionic liquid), such as an oxidation-reduction pair, to an ionic liquid (A) and then blending the above-described oxide semiconductor particles (B), or oxide semiconductor particles (B) and conductive particles (C) (i.e., particles insoluble in the ionic liquid) into the electrolyte solution to form a gel. For blending the electrolyte solution and the particles (B), (C), any of appropriate well-known agitators, mixers, or centrifugal separators may be used.

[0071] The electrolyte composition is used as an electrolyte used in photoelectric conversion elements, such as dye-sensitized photovoltaic cells, for example.

[0072] In the case of a gelling agent that is typically used in a conventional gel electrolyte, such as polymers, the electrical resistance is high. Thus, there is a problem in that the conductivity of the electrolyte is reduced when it is made into a gel, and photoelectric conversion characteristics of a photoelectric conversion element are deteriorated. In contrast, in the electrolyte composition of the present invention, as shown by the examples described below, better photoelectric conversion characteristics are obtained compared to those using a liquid electrolyte containing an ionic liquid and components soluble in this ionic liquid. The reasons are not clarified, but the present inventors have the following reasoning.

(I) Since the oxide semiconductor particles (B), or the oxide semiconductor particles (B) and the conductive particles (C) can contribute to charge transfer and the electrolyte solution is made into a gel by the oxide semiconductor particles (B), or the oxide semiconductor particles (B) and the conductive particles (C), a gel electrolyte composition obtained through gelling exhibits good conductivity and photoelectric conversion characteristics comparable to those when using a liquid electrolyte.

(II) Cations (imidazolium ions, for example) are absorbed to surfaces of the nanoparticles in the gel electrolyte and counter anions (I^- or I_3^-) are arranged so that they encircle the cations. As a result, the concentration of redox pairs is increased locally on the surfaces of the nanoparticles. Especially in a dye-sensitized photovoltaic cell using an ionic liquid, cases have been reported where charges transfer by means of a conjugation of physical diffusion and electron exchange reaction in an electrolyte, and the latter, i.e., a more rapid charge transfer process, is accelerated in a composition where the redox concentration is high. In other words, it is believed that electric power generation characteristics are improved without increasing an absolute redox concentration (increasing the absolute amount of I_3^- may reduce the optically transparent property of the electrolyte, thereby inhibiting photoelectric conversion) because the electron exchange reaction process is accelerated by way of regions where the above redox concentration is locally increased.

[0073] In addition, since the electrolyte is made into a gel, the electrolyte solution of the second embodiment of the present invention is prevented from being exposed and leaking (fluid leakage) during the manufacturing processes or upon breakage of the cell, providing good productivity and easy handling.

[0074] FIG. 1 is a cross-sectional view showing an example of a schematic structure of a dye-sensitized photovoltaic cell, as an embodiment of the photoelectric conversion element of the present invention.

[0075] A dye-sensitized photovoltaic cell 1 includes a transparent electrode substrate 2, a working electrode 6 having an oxide semiconductive porous film 5 made of oxide semiconductive fine particles formed on the transparent electrode

substrate 2 and sensitized with a photo-sensitizing dye, and a counter electrode 8 provided opposing the working electrode 6. The above-described electrolyte composition is filled between the working electrode 6 and the counter electrode 8 to form an electrolyte layer 7.

[0076] The transparent electrode substrate 2 is made by forming the conductive layer 3 made of a conductive material on a transparent base material 4, such as a glass plate or a plastic sheet.

[0077] The transparent base material 4 is preferably made of a material having excellent optical transparent properties when taking its function into consideration. Other than a glass, transparent plastic sheets made of polyethylene terephthalate (PET), polyethylene naphthalate (PEN), polycarbonate (PC), polyether sulfone (PES), or the like; a polished plate of a ceramic, such as titanium oxide, alumina, or the like, may be used.

[0078] For the conductive layer 3, it is preferable that transparent oxide semiconductors, such as tin-doped indium oxide (ITO), tin oxide (SnO_2), fluorine-doped tin oxide (FTO), or the like, be used either alone or in a mixture of two or more thereof when taking the light transmittance of the transparent electrode substrate 2 into consideration. However, these materials are not limiting, and any suitable material having these materials are not limited, and any suitable material having light transmittance and conductivity appropriate for an intended purpose may be used. Furthermore, in order to improve the current collecting efficiency from the oxide semiconductor porous film 5 or the electrolyte layer 7, a metal wiring layer made of gold, silver, platinum, aluminum, nickel, titanium, or the like, may be used provided that an area ratio of the metal wiring layer is within the range that does not significantly reduce the light transmittance of the transparent electrode substrate 2. When such a metal wiring layer is used, the metal wiring layer may be provided as a grid-like, stripe-like, or comb-like pattern so that light transmits through the transparent electrode substrate 2 as evenly as possible.

[0079] The method used to form the conductive layer 3 is not particularly limited, and examples thereof include thin film formation methods, such as a sputtering method, or a CVD method, or a spray decomposition method (SPD), or an evaporation method, when the conductive layer 3 is formed from ITO. The conductive layer 3 is formed to a thickness of between about 0.05 μm and 2.0 μm considering the optical transparent properties and the conductivity.

[0080] The oxide semiconductor porous film 5 is a porous thin layer with a thickness between about 0.5 and 50 μm containing as a main component oxide semiconductor fine particles that are made of titanium dioxide (TiO_2), tin oxide (SnO_2), tungsten oxide (WO_3), zinc oxide (ZnO), and niobium oxide (Nb_2O_5), used either alone or in a combination of two or more materials, and have an average particle diameter between 1 nm to 1000 nm.

[0081] The oxide semiconductor porous film 5 can be formed, for example, by employing methods such as a method in which a dispersion solution obtained by dispersing commercially available oxide semiconductor fine particles in a desired dispersion medium is coated, or a colloidal solution that can be prepared using a sol-gel method is coated, after desired additives have been added thereto if these are required, using a known coating method such as a screen printing method, an inkjet printing method, a roll coating method, a doctor blade method, a spin coating method, a spray coating method, or the like. Other methods include: a electrophoretic deposition method in which the electrode substrate 2 is immersed in a colloidal solution and oxide semiconductor fine particles are made to adhere to the electrode substrate 2 by electrophoresis; a method in which a foaming agent is mixed in a colloidal solution or dispersion solution which is then coated and baked so as to form a porous material; and a method in which polymer microbeads are mixed together and coated on, and these polymer microbeads are then removed by thermal treatment or chemical treatment, so as to define spaces and thereby form a porous material.

[0082] The sensitizing dye that is provided in the oxide semiconductor porous film 5 is not particularly limited, and it is possible to use ruthenium complexes or iron complexes containing a ligand having bipyridine structures, terpyridine structures, and the like; metal complexes such as porphyrin and phthalocyanine; as well as organic dyes such as eosin, rhodamine, melocyanine, and coumarin. The dye can be selected according to the application and the material used for the oxide semiconductor porous film.

[0083] The counter electrode 8 may be one obtained by forming a thin film made of a conductive oxide semiconductor, such as ITO, FTO, or the like, on a substrate made of a non-conductive material, such as a glass, or one obtained by forming an electrode by evaporating or applying a conductive material, such as gold, platinum, a carbon-based material, and the like, on a substrate. Furthermore, the counter electrode 8 may be one obtained by forming a layer of platinum, carbon, or the like, on a thin film of a conductive oxide semiconductor, such as ITO, FTO, or the like.

[0084] A method for forming the counter electrode 8 includes, forming a platinum layer by applying chloroplatinate and then performing a heat treatment, for example. Alternatively, a method may be used in which the electrode is formed on a substrate by an evaporation technique or sputtering technique.

[0085] The method for forming the electrolyte layer 7 made of the above-described electrolyte composition on the working electrode 6 is not particularly limited, and a method may be employed in which the electrolyte composition is dropped on the working electrode 6 in a small amount. Alternatively, the electrolyte layer may be formed by coating the electrolyte on the working electrode 6 or the counter electrode 8. By this, it is possible to make the electrolyte composition infiltrate into the spaces in the oxide semiconductor porous film 5 when the electrolyte composition is cast onto the working electrode 6.

[0086] Since the electrolyte composition is in a state of a gel in the photoelectric conversion element of the present

invention that can be obtained with the above-described procedures, it has reduced volatility and flowability. Thus, degradation or loss of the electrolyte due to vaporization of the solvent or the like does not occur, and it becomes possible to stably achieve high output characteristics and photoelectric conversion characteristics. Furthermore, leakage of the electrolyte from the gap of a container or scattering thereof upon breakage of a photoelectric conversion element are prevented, providing better safety, durability, and the like compared to the cases where a liquid electrolyte solution is used.

[0087] Furthermore, a dye-sensitized photovoltaic cell according to the present invention includes the above-described photoelectric conversion element. Thus, degradation or loss of the electrolyte due to vaporization of the solvent or the like does not occur, and it becomes possible to stably achieve high output characteristics and photoelectric conversion characteristics. Furthermore, leakage of the electrolyte from the gap of a container or scattering thereof upon breakage of a photoelectric conversion element are prevented, providing better safety, durability, and the like compared to the cases where a liquid electrolyte solution is used.

[0088] Hereinafter, examples of the present invention will be explained.

<Preparation of Electrolyte Composition (1)>

[0089] As an ionic liquid (A), 1-ethyl-3-methylimidazolium bis(trifluoromethylsulfonyl)imide (this may be abbreviated as "EMIm-TFSI") was used, and an electrolyte solution containing iodine/iodide ions as an oxidation-reduction pair was prepared by dissolving appropriate amounts of 1-ethyl-3-methylimidazolium iodide (EMIm-I), iodine, lithium iodide, and an appropriate amount of 4-*tert*-butylpyridine into this ionic liquid.

[0090] Electrolyte compositions of Examples B-1 to B-10 were obtained as follows. Nanoparticles of titanium dioxide (in Table 2, shown labeled as "TiO₂") having an average particle diameter of between 2 nm and 1000 nm as oxide semiconductor particles (B) were blended into the above electrolyte solution (one including EMIm-TFSI as an ionic liquid) so that the total amount with respect to the electrolyte solution was 10% by weight (Example B-1). Alternatively, nanoparticles of titanium dioxide and carbon nanotubes (in Table 2, shown labeled as "CNT") as conductive particles (C) were blended such that the total compounding amount of the particles was 1% by weight with respect to the total amount of the electrolyte solution in the compounding ratio shown in Table 2 (the values are represented when the total compounding amount of the particles is regarded as 100%) (Examples B-2 to B-10). The mixtures were then centrifuged to obtain electrolyte compositions of Examples B-1 to B-10 in which the ionic liquid formed a gel.

[0091] As the carbon nanotubes, single-wall carbon nanotubes (In Table 2, abbreviated as "SWCNT") and multi-wall carbon nanotubes (In Table 2, abbreviated as "MWCNT") were used in the compounding amounts shown in Table 2. In Table 2, values under each of the labels of "TiO₂," "SWCNT," and "MWCNT" represent compounding ratios in % by weight of each particle in the total compounding amount before centrifuging the particles (1% by weight with respect to the total amount of the electrolyte solution).

[0092] The column labeled "Ratio of Particles after Centrifugation" in Table 2 lists the ratio of particles insoluble in the ionic liquid after centrifugation of the particles (in this example, the sum of TiO₂ nanoparticles and CNTs) when the total electrolyte composition is regarded as 100%.

[0093] Electrolyte compositions of Examples B-11 to B-14 were obtained as follows. Titanium oxide nanotubes as oxide semiconductor particles (B) were blended into the above electrolyte solution (one including EMIm-TFSI as an ionic liquid) so that the total amount with respect to the electrolyte solution was 10% by weight (Example B-11). Alternatively, titanium oxide nanotubes and titanium oxide nanoparticles were blended such that the total compounding amount of the particles was 10% by weight with respect to the total amount of the electrolyte solution in the compounding ratio shown in Table 3 (the values are represented when the total compounding amount of the particles is regarded as 100%) (Examples B-12 to B-14). The mixtures were then centrifuged to obtain electrolyte compositions of Examples B-11 to B-14 in which the ionic liquid formed a gel.

[0094] The column labeled "Ratio of Particles after Centrifugation" in Table 3 lists the ratio of particles insoluble in the ionic liquid after centrifugation of the particles (in this example, the sum of nanotubes and nanoparticles made of TiO₂) when the total electrolyte composition is regarded as 100%.

[0095] Electrolyte compositions of Examples B-15 to B-17 were obtained as follows. Titanium oxide nanotubes (CNTs) as oxide semiconductor particles (B) and carbon nanotubes as conductive particles (C) were blended into the above electrolyte solution (one including EMIm-TFSI as an ionic liquid) such that the total compounding amount of the particles was 1% by weight with respect to the total amount of the electrolyte solution in the compounding ratio shown in Table 4 (the values are represented when the total compounding amount of the particles is regarded as 100%) (Examples B-15 to B-17). The mixtures were then centrifuged to obtain electrolyte compositions of Examples B-15 to B-17 in which the ionic liquid formed a gel. In Examples B-15 to B-17, MWCNTs were used as carbon nanotubes.

[0096] The column labeled "Ratio of Particles after Centrifugation" in Table 4 lists the ratio of particles insoluble in the ionic liquid after centrifugation of the particles (in this example, the sum of the titanium oxide nanoparticles and carbon nanotubes) when the total electrolyte composition is regarded as 100%.

[0097] Electrolyte compositions of Examples B-18 to B-25 were obtained as follows. Various nanoparticles made from

materials listed in the column of "Oxide Semiconductor Particles" of Table 5 as oxide semiconductor particles (B) were blended into the above electrolyte solution (one including EMIm-TFSI as an ionic liquid) such that the amount of the particles was 10% by weight with respect to the total amount of the electrolyte solution (the values are represented when the total compounding amount of the particles is regarded as 100%). The mixtures were then centrifuged to obtain electrolyte compositions of Examples B-18 to B-25 in which the ionic liquid formed a gel.

[0098] The column labeled "Ratio of Particles after Centrifugation" in Table 5 lists the ratio of particles insoluble in the ionic liquid after centrifugation of the particles (in this example, the sum of the oxide semiconductor particles) when the total electrolyte composition is regarded as 100%.

<Preparation of Electrolyte Composition (2)>

[0099] As an ionic liquid (A), 1-hexyl-3-methylimidazolium iodide (this may be abbreviated as "HMIIm-I") or 1-ethyl-3-methylimidazolium dicyanamide (this may be abbreviated as "EMIm-DCA") was used, and an electrolyte solution containing iodine/iodide ions as an oxidation-reduction pair was prepared by dissolving appropriate amounts of EMIm-I, iodine, and lithium iodide, and an appropriate amount of 4-*tert*-butylpyridine into this ionic liquid.

[0100] Electrolyte compositions of Examples B-26 and B-27 were obtained as follows. Nanoparticles of titanium dioxide (in Table 2, shown labeled as "TiO₂") having an average particle diameter of between 2 nm and 1000 nm as oxide semiconductor particles (B) were blended so that the amount with respect to the total amount of the electrolyte solution was 10% by weight. The mixtures were then centrifuged to obtain electrolyte compositions of Examples B-26 and B-27 in which the ionic liquid formed a gel.

[0101] The column labeled "Ratio of Particles after Centrifugation" in Table 6 lists the ratio of particles insoluble in the ionic liquid after centrifugation of the particles (in this example, TiO₂ nanoparticles) when the total electrolyte composition is regarded as 100%.

<Fabrication of Photoelectric Conversion Elements of Examples B-1 to B-27>

[0102] As a transparent electrode substrate, a 100 mm x 100 mm glass substrate having an FTO film formed thereon was provided, and a slurry dispersion solution of titanium oxide having an average particle diameter of 20 nm was applied on the FTO film (conductive layer) side surface of this transparent electrode substrate 2. After being dried, an oxide semiconductor porous film having a thickness of 7 μm was obtained by performing heating treatment at 450°C for one hour. The transparent electrode substrate was then immersed overnight in an ethanol solution of ruthenium bipyridine complex (an N3 dye) so as to be sensitized with the dye to form a working electrode. Furthermore, as a counter electrode, an FTO glass electrode substrate was prepared having an electrode layer made of platinum formed thereon by sputtering.

[0103] In order to form the electrolyte layer on the working electrode, the electrolyte composition that was made into a gel was dropped to the oxide semiconductor porous film of the working electrode in a small amount, and then the counter electrode and the electrolyte layer were adhered together by overlaying them while pressing the counter electrode hard. In the procedures described above, dye-sensitized photovoltaic cells which were test cells of Examples B-1 to B-27 were fabricated.

<Fabrication of Test Cell of Comparative Example B-1>

[0104] As the working electrode and the counter electrode, electrodes similar to those used in the above-described test cells of Examples B-1 to B-27 were used. As an electrolyte solution to form an electrolyte, an ionic liquid [1-ethyl-3-methylimidazolium bis(trifluoromethylsulfonyl)imide (EMIm-TFSI)] containing iodine/iodide ions as an oxidation-reduction pair was prepared and used. This electrolyte solution was similar to those used to prepare the electrolyte solutions for the electrolyte compositions of the test cells of Examples B-1 to B-27, except that oxide semiconductor particles (B), or oxide semiconductor particles (B) and conductive particles (C) were not added.

[0105] A dye-sensitized photovoltaic cell which was the test cell of Comparative Example B-1 was fabricated by placing the working electrode and the counter electrode so that they opposed each other and forming an electrolyte layer by injecting the electrolyte solution therebetween.

<Fabrication of Test Cell of Comparative Example B-2>

[0106] As the working electrode and the counter electrode, electrodes similar to those used in the above-described test cells of Examples B-1 to B-27 were used. As an electrolyte solution to form an electrolyte, an acetonitrile solution containing quaternary imidazolium-iodide, lithium iodide, iodine, and 4-*tert*-butylpyridine was prepared and used.

[0107] A dye-sensitized photovoltaic cell which was the test cell of Comparative Example B-2 was fabricated by placing the working electrode and the counter electrode so that they opposed each other and forming an electrolyte layer by

injecting the electrolyte solution therebetween.

<Fabrication of Test Cell of Comparative Examples B-3 and B-4>

[0108] As the working electrode and the counter electrode, electrodes similar to those used in the above-described test cells of Examples B-1 to B-27 were used. As an electrolyte solution to form an electrolyte, an ionic liquid containing iodine/iodide ions as an oxidation-reduction pair was prepared and used. As shown in Table 6, as the ionic liquid, HMIIm-1 was used in Comparative Example B-3 and EMIIm-DCA was used in Comparative Example B-4. These electrolyte solutions were similar to those used to prepare the electrolyte solutions for the electrolyte compositions of the test cells of Examples B-1 to B-27 shown in Table 6, except that oxide semiconductor particles (B), or oxide semiconductor particles (B) and conductive particles (C) were not added.

[0109] Dye-sensitized photovoltaic cells which were the test cell of Comparative Examples B-3 and B-4 were fabricated by placing the working electrode and the counter electrode so that they opposed each other and forming an electrolyte layer by injecting the electrolyte solution therebetween.

<Photoelectric Conversion Characteristic of Test Cells>

[0110] Photoelectric conversion characteristics of each of the above-described test cells were measured. The conversion efficiency of each of the test cells is listed in Tables 2 to 7. It should be noted that the results of Example B-11 are listed in both Table 3 and Table 4. Furthermore, the results of Comparative Example B-1 are listed in all of Table 2, Table 3, Table 4, and Table 5.

Table 2

	TiO ₂	CNT		Ratio of Particles after Centrifugation	State	Conversion Efficiency (%)
		SWCNT	MWCNT			
Example B-1	100	-	-	15.3%	gel	5.0
Example B-2	80	20	-	11.2%	gel	4.7
Example B-3	50	50	-	5.2%	gel	4.5
Example B-4	20	80	-	4.3%	gel	4.3
Example B-5	80	-	20	5.2%	gel	4.7
Example B-6	50	-	50	3.2%	gel	4.8
Example B-7	20	-	80	2.3%	gel	4.3
Example B-8	80	10	10	7.6%	gel	4.9
Example B-9	60	20	20	4.1%	gel	4.9
Example B-10	20	40	40	1.5%	gel	4.7
Comparative Example B-1	ionic liquid only				liquid	4.1
Comparative Example B-2	acetonitrile solution of redox pair				liquid	5.5

Table 3

	Titanium Oxide Nanotubes	Titanium Oxide Nanoparticles	Ratio of Particles after Centrifugation	State	Conversion Efficiency (%)
Example B-11	100%	0%	10.2%	gel	5.1
Example B-12	80%	20%	11.2%	gel	5.2
Example B-13	50%	50%	15.2%	gel	5.0
Example B-14	20%	80%	15.8%	gel	5.5

EP 2 234 133 B1

(continued)

	Titanium Oxide Nanotubes	Titanium Oxide Nanoparticles	Ratio of Particles after Centrifugation	State	Conversion Efficiency (%)
Comparative Example B-1	ionic liquid only			liquid	4.1

Table 4

	Titanium Oxide Nanotubes	Carbon Nanotubes	Ratio of Particles after Centrifugation	State	Photoelectric Conversion Efficiency (%)
Example B-11	100%	0%	10.2%	gel	5.1
Example B-15	80%	20%	5.2%	gel	5.5
Example B-16	50%	50%	4.2%	gel	5.3
Example B-17	20%	80%	2.3%	gel	5.5
Comparative Example B-1	ionic liquid only			liquid	4.1

Table 5

	Oxide Semiconductor Particles	Ratio of Particles after Centrifugation	State	Photoelectric Conversion Efficiency (%)
Example B-18	TiO ₂ (anatase)	15.2%	gel	5.1
Example B-19	TiO ₂ (rutile)	14.6%	gel	5.2
Example B-20	TiO ₂ (brookite)	29.3%	gel	5.0
Example B-21	ZnO	36.5%	gel	4.9
Example B-22	SnO ₂	30.2%	gel	4.8
Example B-23	ITO	36.1%	gel	4.9
Example B-24	BaTiO ₃	60.2%	gel	4.9
Example B-25	Al ₂ O ₃	21.8%	gel	4.6
Comparative Example B-1	ionic liquid only		liquid	4.1

Table 6

	Ionic Liquid	Oxide Semiconductor Particles	Ratio of Particles after Centrifugation	State	Photoelectric Conversion Efficiency (%)
Example B-26	HMIIm-1	TiO ₂	21.3	gel	6.0
Example B-27	EMIIm-DCA	TiO ₂	19.2	gel	6.1
Comparative Example B-3	HMIIm-I	none		liquid	4.5
Comparative Example B-4	EMIIm-DCA	none		liquid	5.9

[0111] As shown by the above results, high conversion efficiencies that were comparable to conversion efficiencies achievable when a liquid electrolyte (an electrolyte solution) is used were obtained even when the electrolyte was in a state of a gel in the test cells of Examples B-1 to B-27 according to the second embodiment of the present invention. Japanese Unexamined Patent Application, First Publication No. 2002-184478 discloses a conversion efficiency of a photoelectric conversion element at an early stage of 2.0% when an electrolyte was made into a gel. As in this case, conventionally, conversion efficiencies when a gel electrolyte is used have been significantly lower than those when an electrolyte solution is used, which did not occur in the present invention. Accordingly, advantageous effects of making an electrolyte solution (an ionic liquid or the like) into a gel using oxide semiconductor particles (B), or oxide semiconductor particles (B) and conductive particles (C) are apparent.

[0112] Furthermore, to clarify the advantageous effects of the oxide semiconductor particles (B), or the oxide semiconductor particles (B) and the conductive particle (C), the cases where the ionic liquid solutions were a gel (pseudo-solid) by means of addition of these particles and the cases where the ionic liquid solutions were a liquid without addition of the particles were compared. In each of the cases where the ionic liquid was EMIm-TFSI (Example B-1 to B-25 and Comparative Example B-1), where the ionic liquid was HMIIm-I (Example B-26 and Comparative Example B-3), and where the ionic liquid was EMIm-DCA (Example B-27 and Comparative Example B-4), a surprising result that a higher conversion efficiency was obtained when the oxide semiconductor particles (B), or the oxide semiconductor particles (B) and the conductive particle (C) were added. In other words, a better electrolyte composition could be prepared when the oxide semiconductor particles (B), or the oxide semiconductor particles (B) and the conductive particle (C) were added to the ionic liquid solution (electrolyte solution), compared to cases when they were not added.

<Comparison between Liquid Electrolyte and Gel Electrolyte>

[0113] Next, characteristics of a liquid electrolyte and a gel electrolyte containing components insoluble in the gel electrolyte were compared (see Table 7 and Table 8) to examine the characteristics of the insoluble components.

[0114] A liquid electrolyte (electrolyte solution) prepared by adding iodine, lithium iodide, a dialkyl imidazolium iodide, and 4-*tert*-butylpyridine into an ionic liquid as a main component was used.

[0115] In this case, 1-ethyl-3-methylimidazolium bis(trifluoromethylsulfonyl)imide (EMIm-TFSI), or 1-hexyl-3-methylimidazolium iodide (HMIIm-I), or 1-ethyl-3-methylimidazolium dicyanoimide (EMIm-DCA) was used as the ionic liquid (see Table 7 and Table 8).

[0116] As gel electrolytes of Examples B-28 to B-35, using the same procedure described in the above "Preparation of Electrolyte Composition" section, electrolyte compositions of the present invention obtained by blending the above-described liquid electrolyte and oxide semiconductor particles (B) listed in Table 7 were used. In Table 7, TiO₂[1] represents anatase ($\varphi = 28$ nm), TiO₂[2] represents anatase ($\varphi = 80$ nm), and TiO₂[3] represents rutile ($\varphi = 70$ nm).

[0117] Gel electrolytes of Comparative Examples B-5 and B-6 were obtained by making the liquid electrolyte into a gel (quasi-solid) using the gelling agents listed in Table 8. In Table 8, "PVdF-HFP" represents a fluororesin-based gelling agent (polyvinylidene fluoride-hexafluoropropylene copolymer). Furthermore, as a low molecular weight gelling agent, a commercially available low molecular weight gelling agent was used.

[0118] In other words, in this comparative test, the gel electrolyte is one having a composition where oxide semiconductor particles (B) or gelling agents were added to a liquid electrolyte. Furthermore, a "liquid electrolyte corresponding to a gel electrolyte" refers to a liquid electrolyte having a composition in which the oxide semiconductor particles (B) or gelling agents are omitted from that gel electrolyte.

Table 7

	Oxide Semiconductor Particle	Ionic Liquid	Rate of Change of DI (%)	Shift Width of EP (mV)	Photoelectric Conversion Efficiency (%)	
					Liquid system	Gel system
Example B-28	TiO ₂ [1]	EMIm-TFSI	62	36	4.1	5.3
Example B-29	TiO ₂ [1]	HMIIm-I	125	53	4.5	6.0
Example B-30	TiO ₂ [1]	EMIm-DCA	110	55	5.7	6.2
Example B-31	TiO ₂ [2]	EMIm-TFSI	60	20	4.1	5.5

(continued)

	Oxide Semiconductor Particle	Ionic Liquid	Rate of Change of DI (%)	Shift Width of EP (mV)	Photoelectric Conversion Efficiency (%)	
					Liquid system	Gel system
Example B-32	TiO ₂ [3]	EMIm-TFSI	25	18	4.1	5.2
Example B-33	SnO ₂	EMIm-TFSI	48	18	4.1	4.8
Example B-34	ITO	EMIm-TFSI	53	24	4.1	4.9
Example B-35	BaTiO ₃	EMIm-TFSI	44	20	4.1	4.9
TiO ₂ [1] : anatase ($\varphi = 28\text{nm}$) TiO ₂ [2] : anatase ($\varphi = 80\text{nm}$) TiO ₂ [3] : rutile ($\varphi = 70\text{nm}$)						

Table 8

	Gelling Agent	Ionic Liquid	Rate of Change of DI (%)	Shift Width of EP (mV)	Photoelectric Conversion Efficiency (%)	
					Liquid system	Gel system
Comparative Example B-5	PVdF-HFP	EMIm-TFSI	Very small change	Very small change	4.1	3.8
Example B-6	Low molecular weight gelling agent	EMIm-TFSI	-20	Very small change	4.1	3.9

<Measurement of Cyclic Voltammetry of Liquid Electrolyte and Gel Electrolyte>

[0119] Cyclic voltammetries were performed for the gel electrolytes and the liquid electrolytes listed in Table 7 and Table 8 using platinum microelectrodes (having a diameter of 10 μm) under conditions of 25°C and an argon atmosphere (with a sweep rate of 2 mV/s). Diffusion coefficients (apparent diffusion coefficients) of I^-/I_3^- were calculated from the obtained limiting current values using the following Formula (1).

$$I_{\text{lim}} = 4nFC D_{\text{app}} r \quad \dots \quad \text{Formula (1)}$$

where I_{lim} is a limiting current, n is the number of reacted electrons, F is the Faraday constant, C is the carrier concentration, D_{app} is the diffusion coefficient, and r is a radius of the electrodes.

[0120] Furthermore, equilibrium potentials (E_{eq}) were obtained as electrode potentials corresponding to zero current in the cyclic voltammogram.

[0121] Measurements of diffusion coefficients (D_{app}) and equilibrium potentials (E_{eq}) using cyclic voltammetry using microelectrodes are described in a report by Ryuji Kawano and Masayoshi Watanabe [M. Chem. Commun., United Kingdom, 2003, p.p. 330-331], for example.

[0122] A diffusion coefficient measured using a liquid electrolyte is termed as a diffusion coefficient in a liquid system, a diffusion coefficient measured using a gel electrolyte is termed as a diffusion coefficient in a gel system, and a rate of change in the diffusion coefficients is termed as (the diffusion coefficient in the gel system - the diffusion coefficient in the liquid system / the diffusion coefficient in the liquid system). An equilibrium potential measured using a liquid electrolyte is termed as an equilibrium potential in a liquid system, an equilibrium potential measured using a gel electrolyte is termed as a equilibrium potential in a gel system, and a shift width of the equilibrium potentials is termed as (the equilibrium

potential in the gel system - the equilibrium potential in the liquid system).

[0123] The rate of change in the diffusion coefficients and the shift width of the equilibrium potentials were calculated for each of the gel electrolytes of the above Examples B-28 to B-35 and Comparative Examples B-5 and B-6 and the corresponding liquid electrolytes, and the results are summarized in the above Table 7 and Table 8. It should be noted that the label "Very small change" is used in Table 8 for cases where the rate of change in the diffusion coefficients is less than 5% or the shift width of the equilibrium potentials is less than 10 mV.

<Fabrication of Test Cell using Liquid Electrolyte and Gel Electrolyte and Evaluation thereof>

[0124] Following a similar procedure as that in the above "Fabrication of Test Cell," dye-sensitized photovoltaic cells were fabricated using the gel electrolytes and liquid electrolytes listed in Table 7 and Table 8. The measurement conditions for the photoelectric conversion characteristics were photoirradiation conditions with an air mass (AM) of 1.5 and an irradiance of 100 mW/cm².

[0125] Results of raw measurement photoelectric conversion efficiency (conversion efficiency) of gel electrolytes and corresponding liquid electrolytes of the above Examples B-28 to B-35 and Comparative Examples B-5 and B-6 are listed in the above Table 7 and Table 8. In the above Table 7 and Table 8, photoelectric conversion efficiencies measured using liquid electrolytes are shown under the column labeled "Conversion Efficiency / Liquid system," and diffusion coefficients measured using gel electrolytes are shown under the column labeled "Conversion Efficiency / Gel system."

[0126] As shown by the results in Table 7 and Table 8, in the gel electrolytes of Examples B-28 to B-35, the rates of change in the diffusion coefficients of the corresponding liquid electrolytes were relatively large positive values. From this fact, it is considered that charge transfer was faster in the gel electrolytes of Examples B-28 to B-35 compared to the corresponding liquid electrolytes, and consequently, the conversion efficiencies were enhanced. Furthermore, it is considered that a photoelectric conversion cell having a greater electromotive force can be fabricated since the shift widths of the equilibrium potential were also relatively large positive values and are shifted to the positive potential side.

[0127] In contrast, in the gel electrolytes of Comparative Examples B-5 and B-6, the rates of change in the diffusion coefficients and the shift widths of the equilibrium potential exhibited very small changes or even negative values, and changes in characteristics due to gel formation were not observed or even became worse.

[0128] Furthermore, when conversion efficiencies are compared, in the gel electrolytes of Examples B-28 to B-35, the conversion efficiencies of the gel systems were greater in values than the conversion efficiencies of the liquid systems. In contrast, in the gel electrolytes of Comparative Examples B-5 and B-6, the conversion efficiencies of the gel systems were smaller in values than the conversion efficiencies of the liquid systems.

[0129] From the above, it is considered that an electrolyte having better characteristics than an ionic liquid (A) itself can be obtained by adding oxide semiconductor particles (B), or oxide semiconductor particles (B) and conductive particle (C) into an ionic liquid (A).

[0130] Examples not according to the present invention.

<Preparation of Electrolyte Composition>

[0131] As an ionic liquid (A), 1-ethyl-3-methylimidazolium bis(trifluoromethylsuffonyl)imide (this will be abbreviated as "EMIm-TFSI") was used, and an electrolyte solution containing iodine/iodide ions as an oxidation-reduction pair was prepared by dissolving appropriate amounts of 1-ethyl-3-methylimidazolium iodide (EMIm-I), iodine, lithium iodide, and an appropriate amount of 4-tert-butylpyridine into this ionic liquid.

[0132] Electrolyte compositions of Examples C-1 and C-2 were obtained as follows. Insulating particles (C) listed in Table 9 were blended as the insulating particles (C) into the electrolyte solution including EMIm-TFSI as an ionic liquid such that the amount of the particles was 10% by weight with respect to the total amount of the electrolyte solution (Examples D-1 and D-2). The mixtures were then centrifuged to obtain electrolyte compositions of Examples C-1 and C-2 in which the ionic liquid formed a gel.

[0133] In the column labeled "Ratio of Particles after Centrifugation," the ratio of particles (C) after centrifugation is listed when the total electrolyte composition is regarded as 100%.

<Fabrication of Photoelectric Conversion Elements of Examples C-1 and C-2>

[0134] As a transparent electrode substrate, a 100 mm x 100 mm glass substrate having an FTO film formed thereon was provided, and a slurry dispersion solution of titanium oxide having an average particle diameter of 20 nm was applied on the FTO film (conductive layer) side surface of this transparent electrode substrate 2. After being dried, an oxide semiconductor porous film having a thickness of 7 μ m was obtained by performing heating treatment at 450°C for one hour. The transparent electrode substrate was then immersed overnight in an ethanol solution of ruthenium bipyridine complex (an N3 dye) so as to be sensitized with the dye to form a working electrode. Furthermore, as a counter electrode,

an FTO glass electrode substrate was prepared having an electrode layer made of platinum formed thereon by sputtering.

[0135] In order to form the electrolyte layer on the working electrode, the electrolyte composition that was made to gel was applied to the oxide semiconductor porous film of the working electrode, and then the counter electrode and the electrolyte layer were adhered together by overlaying them while pressing the counter electrode hard. In the procedures described above, a dye-sensitized photovoltaic cell which was a test cell of Example C-1 was fabricated.

<Fabrication of Test Cell of Comparative Example C-1>

[0136] As the working electrode and the counter electrode, electrodes similar to those used in the above-described test cell of Example C-1 were used. As an electrolyte solution to form an electrolyte, an ionic liquid [1-ethyl-3-methylimidazolium bis(trifluoromethylsulfonyl)imide] containing iodine/iodide ions as an oxidation-reduction pair was prepared and used. This electrolyte solution was similar to those used to prepare the electrolyte solutions for the electrolyte composition of the test cell of Example C-1, except that insulating particles (C) were not added.

[0137] A dye-sensitized photovoltaic cell which was the test cell of Comparative Example C-1 was fabricated by placing the working electrode and the counter electrode so that they opposed each other and forming an electrolyte layer by injecting the electrolyte solution therebetween.

<Photoelectric Conversion Characteristic of Test Cells>

[0138] Photoelectric conversion characteristics of each of the above-described test cells were measured. The conversion efficiency of each of the test cells is listed in Table 9.

Table 9

	Insulating particles	Ratio of Particles after Centrifugation	State	Photoelectric Conversion Efficiency (%)
Example C-1	BN	30.1%	gel	4.6
Example C-2	diamond	33.3%	gel	4.7
Comparative Example C-1	ionic liquid only		liquid	4.1

[0139] As shown by the above results, high conversion efficiencies that were comparable to conversion efficiencies achievable when a liquid electrolyte (an electrolyte solution) is used were obtained even when the electrolyte was in a state of a gel in the test cells of each example of the present invention. Japanese Unexamined Patent Application, First Publication No. 2002-184478 discloses a conversion efficiency of a photoelectric conversion element at an early stage of 2.0% when an electrolyte was made into a gel. As in this case, conventionally, conversion efficiencies when a gel electrolyte is used have been significantly lower than those when an electrolyte solution is used, which did not occur in the present invention. Accordingly, advantageous effects of making an electrolyte solution (an ionic liquid or the like) into a gel using insulating particles (C) are apparent.

[0140] Furthermore, to clarify the advantageous effects of the insulating particles (C), the cases where the ionic liquid solutions were a gel (pseudo-solid) by means of addition of these particles (Example C-1) and the cases where the ionic liquid solutions were liquid without addition of the particles (Comparative Examples C-1 and C-2) were compared. A surprising result that a higher conversion efficiency was obtained when the insulating particles (C) were added. In other words, a better electrolyte composition could be prepared when the insulating particles (C) were added to the ionic liquid solution (electrolyte solution), compared to cases when they were not added.

<Comparison between Liquid Electrolyte and Gel Electrolyte>

[0141] Next, characteristics of a liquid electrolyte and a gel electrolyte containing components insoluble in the gel electrolyte were compared (see Table 10 and Table 11) to examine the characteristics of the insoluble components.

[0142] A liquid electrolyte (electrolyte solution) prepared by adding iodine, lithium iodide, a dialkyl imidazolium iodide, and 4-tert-butylpyridine into an ionic liquid as a main component was used.

[0143] In this case, 1-ethyl-3-methylimidazolium bis(trifluoromethylsulfonyl)imide (EMIIm-TFSI) was used as the ionic liquid (see Table 10 and Table 11).

[0144] As a gel electrolyte of Example C-3, using the same procedure described in the above "Preparation of Electrolyte Composition" section, electrolyte compositions of the present invention obtained by blending the above-described liquid

electrolyte and insulating particles (C) listed in Table 10 were used.

[0145] Gel electrolytes of Comparative Examples C-2 and C-3 were obtained by making the liquid electrolyte into a gel (quasi-solid) using the gelling agents listed in Table 11. In Table 11, "PVdF-HFP" represents a fluororesin-based gelling agent (polyvinylidene fluoride-hexafluoropropylene copolymer). Furthermore, as a low molecular weight gelling agent, a commercially available low molecular weight gelling agent was used.

[0146] In other words, in this comparative test, the gel electrolyte is one having a composition where in insulating particles (C) or gelling agents were added to a liquid electrolyte. Furthermore, a "liquid electrolyte corresponding to a gel electrolyte" refers to a liquid electrolyte having a composition in which the insulating particles (C) or gelling agents are omitted from that gel electrolyte.

Table 10

	Insulating particle	Ionic Liquid	Rate of Change of DI (%)	Shift Width of EP (mV)	Photoelectric Conversion Efficiency (%)	
					Liquid system	Gel system
Example C-3	BN	EMIm-TFSI	17	15	4.1	4.6

Table 11

	Gelling Agent	Ionic Liquid	Rate of Change of DI (%)	Shift Width of EP (mV)	Photoelectric Conversion Efficiency (%)	
					Liquid system	Gel system
Comparative Example C-2	PVdF-HFP	EMIm-TFSI	Very small change	Very small change	4.1	3.8
Comparative Example C-3	Low molecular weight gelling agent	EMIm-TFSI	Very small change	Very small change	4.1	3.9

<Measurement of Cyclic Voltammetry of Liquid Electrolyte and Gel Electrolyte>

[0147] Cyclic voltammetries were performed for the gel electrolytes and the liquid electrolytes listed in Table 10 and Table 11 using platinum microelectrodes (having a diameter of 10 μm) under conditions of 25°C and an argon atmosphere (with a sweep rate of 2 mV/s). Diffusion coefficients (apparent diffusion coefficients) of I^-/I_3^- were calculated from the obtained limiting current values using the following Formula (1).

$$I_{\text{lim}} = 4nFCD_{\text{app}}r \quad \dots \quad \text{Formula (1)}$$

where I_{lim} is a limiting current, n is the number of reacted electrons, F is the Faraday constant, C is the carrier concentration, D_{app} is the diffusion coefficient, and r is a radius of the electrodes.

[0148] Furthermore, equilibrium potentials (E_{eq}) were obtained as electrode potentials corresponding to zero current in the cyclic voltammogram.

[0149] Measurements of diffusion coefficients (D_{app}) and equilibrium potentials (E_{eq}) using cyclic voltammetry using microelectrodes are described in a report by Ryuji Kawano and Masayoshi Watanabe [M. Chem. Commun., United Kingdom, 2003, p.p. 330-331], for example.

[0150] A diffusion coefficient measured using a liquid electrolyte is termed as a diffusion coefficient in a liquid system, a diffusion coefficient measured using a gel electrolyte is termed as a diffusion coefficient in a gel system, a rate of change in the diffusion coefficients is termed as (the diffusion coefficient in the gel system - the diffusion coefficient in the liquid system) / the diffusion coefficient in the liquid system). An equilibrium potential measured using a liquid electrolyte is termed as an equilibrium potential in a liquid system, an equilibrium potential measured using a gel electrolyte is termed as an equilibrium potential in a gel system, and a shift width of the equilibrium potentials is termed as (the equilibrium potential in the gel system - the equilibrium potential in the liquid system).

[0151] The rate of change in the diffusion coefficients and the shift width of the equilibrium potentials were calculated

for each of the gel electrolytes of the Example C-3 and Comparative Example C-2 and C-3 and the corresponding liquid electrolytes, and the results are summarized in the above Table 10 and Table 11, It should be noted that the label "Very small change" is used in Table 11 for cases where the rate of change in the diffusion coefficients is less than 5% or the shift width of the equilibrium potentials is less than 10 mV.

<Fabrication of Test Cell using Liquid Electrolyte and Gel Electrolyte and Evaluation thereof>

[0152] Following a similar procedure as that in the above "Fabrication of Test Cell," dye-sensitized photovoltaic cells were fabricated using the gel electrolytes and liquid electrolytes listed in Table 10 and Table 11.

[0153] The measurement conditions for the photoelectric conversion characteristics were photoirradiation conditions with an air mass (AM) of 1.5 and an irradiance of 100 mW/cm².

[0154] Results of raw measurement photoelectric conversion efficiency (conversion efficiency) of gel electrolytes and corresponding liquid electrolytes of the above Example C-3 and Comparative Examples C-2 and C-3 are listed in the above Table 10 and Table 11. In the above Table 10 and Table 11, photoelectric conversion efficiencies measured using liquid electrolytes are shown under the column labeled "Conversion Efficiency / Liquid system," and diffusion coefficients measured using gel electrolytes are shown under the column labeled "Conversion Efficiency / Gel system."

[0155] As shown by the results in Table 10 and Table 11, in the gel electrolyte of Example C-3, the rates of change in the diffusion coefficients of the corresponding liquid electrolytes are relatively large positive values. From this fact, it is considered that charge transfer was faster in the gel electrolyte of Example C-3 compared to the corresponding liquid electrolytes, and consequently, the conversion efficiencies were enhanced. Furthermore, it is considered that a photoelectric conversion cell having a greater electromotive force can be fabricated since the shift widths of the equilibrium potential were also relatively large positive values and are shifted to the positive potential side.

[0156] In contrast, in the gel electrolytes of Comparative Examples C-2 and C-3, the rates of change in the diffusion coefficients and the shift widths of the equilibrium potential exhibited very small changes or even negative values, and changes in characteristics due to gel formation were not observed or even became worse.

[0157] Furthermore, when conversion efficiencies are compared, in the gel electrolyte of Example C-3, the conversion efficiency of the gel system was greater in values than the conversion efficiency of the liquid system. In contrast, in the gel electrolytes of the comparative examples, the conversion efficiencies of the gel systems were smaller in values than the conversion efficiencies of the liquid systems.

[0158] It is considered that an electrolyte having better characteristics than an ionic liquid (A) itself can be obtained by adding insulating particle (C) into an ionic liquid (A).

Claims

1. A photoelectric conversion element comprising an electrolyte composition which comprises an ionic liquid, an oxidation-reduction pair and oxide semiconductor particles, wherein the electrolyte composition is in the form of a gel by the action of the oxide semiconductor particles; and the rate of change in the diffusion coefficients is not less than 25% and not more than 125%, said rate of change in the diffusion coefficients being defined as:

$$\frac{[(\text{the diffusion coefficient of the oxidation-reduction pair in the electrolyte composition in the form of a gel}) - (\text{the diffusion coefficient of the oxidation-reduction pair in a liquid electrolyte})] / (\text{the diffusion coefficient of the oxidation-reduction pair in the liquid electrolyte})}{\text{the diffusion coefficient of the oxidation-reduction pair in the liquid electrolyte}}$$

wherein the liquid electrolyte is the same as the electrolyte composition in the form of a gel prior to addition of the oxide semiconductor particles.

2. The photoelectric conversion element according to claim 1, further comprising conductive particles.
3. The photoelectric conversion element according to claim 1, wherein the oxide semiconductor particles are one member or a mixture of two or more members selected from the group

consisting of TiO_2 , SnO_2 , WO_3 , ZnO , ITO , BaTiO_3 , Nb_2O_5 , In_2O_3 , ZrO_2 , Ta_2O_5 , La_2O_3 , SrTiO_3 , Y_2O_3 , Ho_2O_3 , Bi_2O_3 , CeO_2 , and Al_2O_3 .

4. The photoelectric conversion element according to claim 3, wherein the TiO_2 is either one of or a mixture of titanium oxide nanotubes and titanium oxide nanoparticles.
5. The photoelectric conversion element according to claim 2, wherein the conductive particles comprises a material containing carbon as a main component.
6. The photoelectric conversion element according to claim 5, wherein the material containing carbon as a main component is one member or a mixture of two or more members selected from the group consisting of carbon nanotubes, carbon fibers, and carbon black.
7. The photoelectric conversion element according to claim 6, wherein the carbon nanotubes are either one of or a mixture of single-wall carbon nanotubes and multi-wall carbon nanotubes.
8. The photoelectric conversion element according to claim 1, wherein a compounding amount of the oxide semiconductor particles is not less than 0.05% by weight and not more than 70% by weight with respect to a total amount of the electrolyte composition.
9. The photoelectric conversion element according to claim 2, wherein a total compounding amount of the oxide semiconductor particles and the conductive particles is not less than 0.05% by weight and not more than 70% by weight with respect to a total amount of the electrolyte composition.
10. The photoelectric conversion element according to claim 1, wherein a compounding amount of the oxide semiconductor particles is not less than 0.05% by weight and not more than 70% by weight with respect to the ionic liquid.
11. The photoelectric conversion element according to claim 2, wherein a total compounding amount of the oxide semiconductor particles and the conductive particles is not less than 0.05% by weight and not more than 70% by weight with respect to the ionic liquid.
12. The photoelectric conversion element according to claim 1, wherein an equilibrium potential of the oxidation-reduction pair in the electrolyte composition is shifted to a positive potential exceeding an equilibrium potential of the oxidation-reduction pair in the ionic liquid.
13. The photoelectric conversion element according to claim 12, wherein the shift with of the equilibrium potentials is not less than 18 mV and not more than 55mV, said shift width of the equilibrium potentials being defined as:

(the equilibrium potential of the oxidation-reduction pair in the electrolyte composition in the form of a gel) – (the equilibrium potential of the oxidation-reduction pair in the liquid electrolyte).

14. The photoelectric conversion element according to claim 1, comprising:
a working electrode, the working electrode comprising an electrode substrate and an oxide semiconductor porous film formed on the electrode substrate and sensitized with a dye;
a counter electrode disposed opposing the working electrode; and
an electrolyte layer made of the electrolyte composition defined in claim 1 provided between the working electrode and the counter electrode.
15. A dye-sensitized photovoltaic cell, comprising the photoelectric conversion element according to claim 14.

Patentansprüche

1. Photoelektrisches Umwandlungselement, umfassend eine Elektrolytzusammensetzung, die eine ionische Flüssigkeit, ein Redoxpaar und Oxidhalbleiterteilchen umfasst, wobei
 5 die Elektrolytzusammensetzung durch die Wirkung der Oxidhalbleiterteilchen in Form eines Gels vorliegt; und die prozentuale Änderung der Diffusionskoeffizienten mindestens 25 % und höchstens 125 % beträgt, wobei die prozentuale Änderung der Diffusionskoeffizienten definiert ist als:

$$\frac{[(\text{Diffusionskoeffizient des Redoxpaars in der Elektrolytzusammensetzung in Form eines Gels}) - (\text{Diffusionskoeffizient des Redoxpaars in einem flüssigen Elektrolyten})] / (\text{Diffusionskoeffizient des Redoxpaars in dem flüssigen Elektrolyten}),$$

15 wobei der flüssige Elektrolyt der Elektrolytzusammensetzung in Form eines Gels vor der Zugabe der Oxidhalbleiterteilchen entspricht.

2. Photoelektrisches Umwandlungselement nach Anspruch 1, das weiterhin eitfähige Teilchen umfasst.

- 20 3. Photoelektrisches Umwandlungselement nach Anspruch 1, wobei es sich bei den Oxidhalbleiterteilchen um einen Bestandteil oder ein Gemisch aus zwei oder mehr Bestandteilen handelt, der/das ausgewählt ist aus der Gruppe bestehend aus TiO_2 , SnO_2 , WO_3 , ZnO , ITO , BaTiO_3 , Nb_2O_5 , In_2O_3 , ZrO_2 , Ta_2O_5 , La_2O_3 , SrTiO_3 , Y_2O_3 , Ho_2O_3 , Bi_2O_3 , CeO_2 und Al_2O_3 .

- 25 4. Photoelektrisches Umwandlungselement nach Anspruch 3, wobei es sich bei dem TiO_2 entweder um Titanoxid-Nanoröhrchen oder Titanoxid-Nanoteilchen oder um ein Gemisch derselben handelt.

- 30 5. Photoelektrisches Umwandlungselement nach Anspruch 2, wobei die leitfähigen Teilchen ein Material umfassen, das als Hauptbestandteil Kohlenstoff enthält.

- 35 6. Photoelektrisches Umwandlungselement nach Anspruch 5, wobei das als Hauptbestandteil Kohlenstoff enthaltende Material ein Bestandteil oder ein Gemisch aus zwei oder mehr Bestandteilen ist, der/das ausgewählt ist aus der Gruppe bestehend aus Kohlenstoff-Nanoröhrchen, Kohlenstofffasern und Ruß.

- 40 7. Photoelektrisches Umwandlungselement nach Anspruch 6, wobei es sich bei den Kohlenstoff-Nanoröhrchen entweder um einwandige Kohlenstoff-Nanoröhrchen oder mehrwandige Kohlenstoff-Nanoröhrchen oder um ein Gemisch derselben handelt.

8. Photoelektrisches Umwandlungselement nach Anspruch 1, wobei eine Mischungsmenge der Oxidhalbleiterteilchen mindestens 0,05 % Gew.-% und höchstens 70 % Gew.-%, bezogen auf eine Gesamtmenge der Elektrolytzusammensetzung, beträgt.

- 45 9. Photoelektrisches Umwandlungselement nach Anspruch 2, wobei eine Gesamtmenge der Oxidhalbleiterteilchen und der leitfähigen Teilchen mindestens 0,05 % Gew.-% und höchstens 70 % Gew.-%, bezogen auf eine Gesamtmenge der Elektrolytzusammensetzung, beträgt.

- 50 10. Photoelektrisches Umwandlungselement nach Anspruch 1, wobei eine Mischungsmenge der Oxidhalbleiterteilchen mindestens 0,05 % Gew.-% und höchstens 70 % Gew.-%, bezogen auf die ionische Flüssigkeit, beträgt.

- 55 11. Photoelektrisches Umwandlungselement nach Anspruch 2, wobei eine Gesamtmenge der Oxidhalbleiterteilchen und der leitfähigen Teilchen mindestens 0,05 % Gew.-% und höchstens 70 % Gew.-%, bezogen auf die ionische Flüssigkeit, beträgt.

12. Photoelektrisches Umwandlungselement nach Anspruch 1, wobei ein Gleichgewichtspotenzial des Redoxpaars in der Elektrolytzusammensetzung in Richtung eines positiven Po-

tenzials verschoben ist, das ein Gleichgewichtspotenzial des Redoxpaars in der ionischen Flüssigkeit übersteigt.

13. Photoelektrisches Umwandlungselement nach Anspruch 12, wobei die Verschiebungsbreite der Gleichgewichtspotenziale mindestens 18 mV und höchstens 55 mV beträgt, wobei die Verschiebungsbreite der Gleichgewichtspotenziale definiert ist als:

(Gleichgewichtspotenzial des Redoxpaars in der Elektrolytzusammensetzung in Form eines Gels) - (Gleichgewichtspotenzial des Redoxpaars in dem flüssigen Elektrolyten).

14. Photoelektrisches Umwandlungselement nach Anspruch 1, umfassend:

eine Arbeitselektrode, wobei die Arbeitselektrode ein Elektrodensubstrat und eine auf dem Elektrodensubstrat ausgebildete und mit einem Farbstoff lichtempfindlich gemachte poröse Oxidhalbleiterschicht umfasst; eine gegenüber der Arbeitselektrode angeordnete Gegenelektrode; und eine aus der in Anspruch 1 definierten Elektrolytzusammensetzung hergestellte Elektrolytschicht, die zwischen der Arbeitselektrode und der Gegenelektrode vorgesehen ist.

15. Farbstoffsolarzelle, die das photoelektrische Umwandlungselement nach Anspruch 14 umfasst.

Revendications

1. Élément de conversion photoélectrique comprenant une composition d'électrolyte qui comprend un liquide ionique, un couple oxydo-réducteur et des particules semi-conductrices d'oxyde, dans lequel la composition d'électrolyte est sous la forme d'un gel sous l'action des particules semi-conductrices d'oxyde ; et le taux de variation des coefficients de diffusion est supérieur ou égal à 25 % et inférieur ou égal à 125 %, ledit taux de variation des coefficients de diffusion étant défini comme :

$$\left[\left(\text{le coefficient de diffusion du couple oxydo-réducteur dans composition d'électrolyte sous forme de gel} \right) - \left(\text{le coefficient de diffusion du couple oxydo-réducteur dans un électrolyte liquide} \right) \right] / \left(\text{le coefficient de diffusion du couple oxydo-réducteur dans l'électrolyte liquide} \right)$$

dans lequel l'électrolyte liquide est identique à la composition d'électrolyte sous forme de gel avant adjonction des particules semi-conductrices d'oxyde.

2. Élément de conversion photoélectrique selon la revendication 1, comprenant en outre des particules conductrices.
3. Élément de conversion photoélectrique selon la revendication 1, dans lequel les particules semi-conductrices d'oxyde sont un élément ou un mélange de deux éléments ou plus choisis dans le groupe constitué de TiO_2 , SnO_2 , WO_3 , ZnO , ITO , BaTiO_3 , Nb_2O_5 , In_2O_3 , ZrO_2 , Ta_2O_5 , La_2O_3 , SrTiO_3 , Y_2O_3 , Ho_2O_3 , Bi_2O_3 , CeO_2 et Al_2O_3 .
4. Élément de conversion photoélectrique selon la revendication 3, dans lequel le TiO_2 est soit des nanotubes d'oxyde de titane, soit des nanoparticules d'oxyde de titane, soit un mélange des deux.
5. Élément de conversion photoélectrique selon la revendication 2, dans lequel les particules conductrices comprennent un matériau contenant du carbone en tant que principal composant.
6. Élément de conversion photoélectrique selon la revendication 5, dans lequel le matériau contenant du carbone en tant que principal composant est un élément ou un mélange de deux éléments ou plus choisis dans le groupe constitué des nanotubes de carbone, des fibres de carbone et du noir de carbone.
7. Élément de conversion photoélectrique selon la revendication 6, dans lequel les nanotubes de carbone sont soit des nanotubes de carbone à paroi simple, soit des nanotubes de carbone à parois multiples, soit un mélange des

deux.

8. Elément de conversion photoélectrique selon la revendication 1, dans lequel une quantité de mélange des particules semi-conductrices d'oxyde n'est pas inférieure à 0,05 % en poids et pas supérieure à 70 % en poids par rapport à une quantité totale de la composition d'électrolyte.
9. Elément de conversion photoélectrique selon la revendication 2, dans lequel une quantité de mélange totale des particules semi-conductrices d'oxyde et des particules conductrices n'est pas inférieure à 0,05 % en poids et pas supérieure à 70 % en poids par rapport à une quantité totale de la composition d'électrolyte.
10. Elément de conversion photoélectrique selon la revendication 1, dans lequel une quantité de mélange des particules semi-conductrices d'oxyde n'est pas inférieure à 0,05 % en poids et pas supérieure à 70 % en poids par rapport au liquide ionique.
11. Elément de conversion photoélectrique selon la revendication 2, dans lequel une quantité de mélange totale des particules semi-conductrices d'oxyde et des particules conductrices n'est pas inférieure à 0,05 % en poids et pas supérieure à 70 % en poids par rapport au liquide ionique.
12. Elément de conversion photoélectrique selon la revendication 1, dans lequel un potentiel d'équilibre du couple oxydo-réducteur dans la composition d'électrolyte est décalé vers un potentiel positif qui est supérieur à un potentiel d'équilibre du couple oxydo-réducteur dans le liquide ionique.
13. Elément de conversion photoélectrique selon la revendication 12, dans lequel la largeur de décalage des potentiels d'équilibre n'est pas inférieure à 18 mV et pas supérieure à 55 mV, ladite largeur de décalage des potentiels d'équilibre étant définie comme :


(le potentiel d'équilibre du couple oxydo-réducteur dans la composition d'électrolyte sous forme de gel) – (le potentiel d'équilibre du couple oxydo-réducteur dans l'électrolyte liquide).

14. Elément de conversion photoélectrique selon la revendication 1, comprenant :

une électrode de travail, l'électrode de travail comprenant un substrat d'électrode et un film poreux d'oxydes semi-conducteurs formé sur le substrat d'électrode et sensibilisé avec un colorant ;
une contre-électrode disposée face à l'électrode de travail ; et
une couche d'électrolyte constituée de la composition d'électrolyte définie à la revendication 1, disposée entre l'électrode de travail et la contre-électrode.

15. Cellule photovoltaïque sensibilisée par un colorant, comprenant l'élément de conversion photoélectrique selon la revendication 14.

FIG. 1

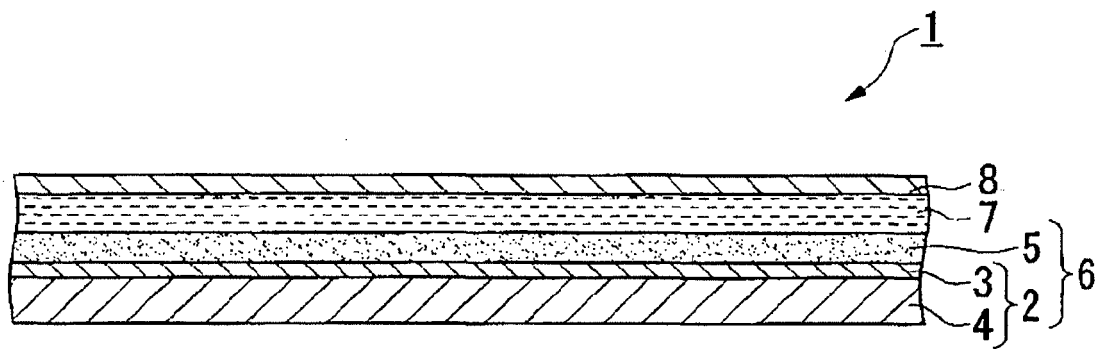

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2003200626 A [0001]
- JP 2003347193 A [0001]
- JP 2004082934 A [0001]
- JP 2003196561 A [0001]
- JP 2003200629 A [0001]
- JP 2004082586 A [0001]
- JP 2664194 B [0003]
- JP 2001160427 A [0003]
- JP 2002184478 A [0007] [0035] [0111] [0139]
- JP 2003157914 A [0007]
- WO 03054894 A [0007]

Non-patent literature cited in the description

- **MICHAEL GRAETZEL.** *Nature, United Kingdom*, 1991, vol. 737, 353 [0003]
- **N. PAPAGEORGIOU et al.** *Journal of the Electrochemical Society*, 1996, vol. 143 (10), 3099 [0006]
- **WANG et al.** *J. Am. Soc.*, 2003, vol. 125 [0010]
- **RYUJI KAWANO ; MASAYOSHI WATANABE [M.** *Chem. Commun., United Kingdom*, 2003, 330-331 [0121]
- **RYUJI KAWANO ; MASAYOSHI WATANABE [M.** *Chem. Commun., United Kingdom*, 2003, 330-331 [0149]