



(11)

**EP 3 305 102 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
**27.11.2019 Bulletin 2019/48**

(51) Int Cl.:  
**A24D 3/12** (2006.01) **A24D 3/04** (2006.01)  
**A24D 3/14** (2006.01) **A24D 3/16** (2006.01)

(21) Application number: **16192750.4**

(22) Date of filing: **07.10.2016**

### (54) **FILTER ELEMENT FOR A SMOKING ARTICLE**

FILTERELEMENT FÜR EINEN RAUCHARTIKEL

ÉLÉMENT DE FILTRE POUR ARTICLE À FUMER

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:  
**11.04.2018 Bulletin 2018/15**

(73) Proprietor: **Reemtsma Cigarettenfabriken GmbH  
22761 Hamburg (DE)**

(72) Inventor: **Fuhrmann, Jan  
22761 Hamburg (DE)**

(74) Representative: **Gulde & Partner  
Patent- und Rechtsanwaltskanzlei mbB  
Wallstraße 58/59  
10179 Berlin (DE)**

(56) References cited:  
**WO-A1-2004/080217 DE-A1- 3 444 991  
TW-A- 201 132 303 US-A- 3 438 381  
US-A1- 2005 133 053 US-A1- 2012 255 569**

**EP 3 305 102 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description**FIELD OF INVENTION

5 **[0001]** The present invention relates generally to a filter element for a smoking article and to a smoking article including such a filter element.

BACKGROUND OF THE INVENTION

10 **[0002]** Filter elements for smoking articles are generally known in the art. Such filter elements are basically used to screen out filterable materials in the smoke generated during smoking.

**[0003]** The invention is mainly directed to filter elements for conventional smoking articles, such as cigarettes. However, with respect to the present invention, the terms "smoking article" and "smoking" are intended to include both conventional smoking articles, such as cigarettes, where tobacco is combusted in order to generate inhalable smoke, as well as electronic smoking or vaping devices, such as e-cigarettes or shishas, where a respective liquid is vaporized or atomized in order to generate inhalable vapor. Such vapor is also referred to as "smoke" below.

15 **[0004]** US 3,438,381 relates to a tobacco smoke filter having formed therein a plurality of longitudinal tunnels each having a roughened wall structure. The tunnels are coated with a viscous substance, such as honey, to trap noxious ingredients in the smoke.

20 **[0005]** TW 2011/32303 A discloses a charcoal filter characterized by comprising add-on charcoal on the surfaces of charcoal-containing papers and folding inside the papers.

**[0006]** DE 34 44 991 A1 relates to filter cartridge for smokers' articles, such as tobacco pipes, cigarette and cigar tips, consisting of a spirally-designed core of porous material and a casing enclosing the latter. The multi-turn spiral body which forms the central core consists of a porous adsorptive organic material composed of albumen-containing matter, to which is added if necessary a proportion of active carbon particles, the spiral body being coated on its surface with active carbon particles.

25 **[0007]** US 2005/133053 A1 and WO 2004/080217 A1 disclose smoking articles which involve the use of a copper-exchanged molecular sieve catalyst that is capable of removing NO and/or NO<sub>2</sub> from mainstream smoke are provided. The copper-exchanged molecular sieve catalyst comprises a microporous molecular sieve substrate having pores with an average diameter of from about 3 Å to about 15 Å, where at least some of the pores of the microporous molecular sieve substrate contain Cu<sup>+2</sup> ions. Methods for making cigarette filters and smoking articles using the copper-exchanged molecular sieve catalyst, as well as methods for smoking a cigarette comprising the copper-exchanged molecular sieve catalyst, are also described in these documents.

30 **[0008]** Smoking sensation can be influenced by filter elements in various ways. It is an object of the present invention to suggest a new filter element which provides both effective filtering action and satisfying smoking sensation.

35 **[0009]** This object is solved by a filter element with the features of the independent claim. Preferred embodiments and further developments are described with respect to the dependent claims.

SUMMARY OF THE INVENTION

40 **[0010]** In accordance with one aspect of the present invention there is provided a filter element for use in a smoking article. The filter element is formed from a conventional filter material, such as cellulose acetate. The filter element includes a cavity that is devoid of filter material, wherein a surface of the cavity is at least partially provided with at least one adsorbent. According to a first variant, the respective surface is partially or completely provided with one adsorbent.

45 **[0011]** According to an alternative second variant, the surface of the cavity may be provided with a first adsorbent in a first area of the surface and with a second adsorbent that is different from the first adsorbent in a second area of the surface, which second area at least partially differs from the first area.

**[0012]** The adsorbent can be at least one of a group of adsorbents including activated carbon, zeolites, alumina, silica, silica gel, ion exchange resins, polyester resins, sepiolite, and carbon species, such as impregnated carbon, activated carbon fibres, or highly activated carbon. Further suitable adsorbents and/or catalysts that are known in the art for filtering smoke or removing components from smoke can be used.

50 **[0013]** The cavity forms a channel that completely extends through the filter element and at least partially along a longitudinal direction of the filter element. Preferably, the cavity or channel extends along a direction along which smoke is drawn during operation of a smoking article including the filter element, i.e. when the user draws or puffs on the smoking article. With respect to an arrangement of the filter element in a smoking article, according to a first variant, the cavity or channel extends into the filter element from a mouth side. According to an alternative second variant, the channel or cavity may extend into the filter element from a rod side.

55 **[0014]** The cavity or channel devoid of filter material, during smoking, allows at least a certain amount of smoke to

proceed through the filter element without being filtered, i.e. with original taste that is not altered by passing filter element material. Thereby, smoking sensation can be enhanced.

**[0015]** On the other hand, due to the provision of the adsorbent on the inner surface of the filter element facing the cavity, still a certain filtering or retention effect can be provided with respect to the portion of the smoke that passes through the cavity or channel, and not through the filter material surrounding the cavity or channel. Still further, providing the adsorbent on the inner surface of the cavity, and not embedded into the filter material results in a lower pressure drop compared to a solution in which the adsorbent is embedded into the filter material.

**[0016]** Form and dimension of the cavity or channel can vary. Needless to say that the above mentioned effect of the cavity or channel increases with proportional to the size or volume of the cavity in relation to the size or volume of the filter element, i.e. the filter material surrounding the cavity or channel. It is also possible to provide more than one cavity or channel. Thereby, in particular the area of active surface, i.e. surface that is provided with the adsorbent, can be increased, which raises the retention effect of the adsorbent.

**[0017]** One or more channels may e.g. extend in parallel along a longitudinal direction of the filter element, which generally has a circular-cylindrical form. Also the channel or channels can have a circular-cylindrical form, and can partially, in the form of a blind hole, or completely, in the form of a through hole, extend into/through the filter element.

**[0018]** According to a first embodiment, which is not part of the invention, the cavity or channel is formed directly in the filter element, i.e. the surface of the filter element facing the cavity is formed by filter material. With respect to this embodiment, the adsorbent is directly applied to the inner surface of the cavity, i.e. to the filter material in this area.

**[0019]** According to a second embodiment, which is part of the invention, the cavity or channel is a tube that is formed from a preferably self-supporting, sheet-like tube material. According to this embodiment, the cavity or channel has a wall separate from the filter material of the filter element. In general, a tube material differs from the filter material. However, the tube can also be formed by the same material, such as cellulose acetate. Providing such a tube in advance may serve to simplify the production of the inventive filter element. The tube is formed as a single central or inner core of the filter element, which central core, in the finished filter element, is surrounded by filter material.

**[0020]** Suitable tube materials are e.g. paper materials or polymeric materials known in the art. The tube material can include one or a plurality of layers, e.g. two to three paper layers. Specifically, according to the invention, at least the inner surface of the tube material facing the cavity of the tube is at least partially provided with the adsorbent. The adsorbent can be applied to the respective surface by any suitable application technology.

**[0021]** According to a variant, the tube material may already include the adsorbent. In particular, charcoal paper may be used as tube material or as a layer of a multilayered tube material. In case the tube material includes multiple layers, at least the innermost layer of the multiple layers, i.e. the layer that faces the cavity of the tube, includes the adsorbent.

**[0022]** According to a third embodiment, a cavity or channel directly formed in the filter element can partially be lined with a lining material corresponding to the tube material. The adsorbent may be applied to or integrated into the lining material as described above with respect to the tube material.

**[0023]** According to a further embodiment, it is possible to color or print the tube material or lining material, at least on the surface facing the cavity, in order to achieve visual differentiation and recognizability.

**[0024]** An inventive smoking article includes an above described filter element.

**[0025]** According to a preferred embodiment, the smoking article, in the form of a conventional cigarette, includes a wrapped tobacco rod and a filter. The filter consists of or includes at least one of the inventive filter elements. The wrapped tobacco rod and the filter are connected by a tipping paper which overwraps the filter and a part of the wrapped tobacco rod.

**[0026]** According to a preferred embodiment, the filter includes at least a first filter element and a second filter element of the above described type, wherein a surface of the first filter element facing the cavity of the first filter element is provided with a first adsorbent, and wherein a surface of the second filter element facing the cavity of the second filter element is provided with a second adsorbent that is different from the first adsorbent.

**[0027]** The characteristics, features and advantages of this invention and the manner in which they are obtained as described above, will become more apparent and be more clearly understood in connection with the following description of exemplary embodiments, which are explained with reference to the accompanying drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0028]** In the drawings, same element numbers indicate same elements in each of the views:

- Figure 1A is a schematic cross-sectional illustration of an exemplary filter element;
- Figure 1B shows the filter element of Fig. 1A in front view;
- Figure 2 is a schematic cross-sectional illustration of an exemplary filter element;
- Figure 3A is a schematic cross-sectional illustration of an exemplary filter element according to a first variant of a third embodiment;

Figure 3B is a schematic cross-sectional illustration of an exemplary filter element according to a second variant of the third embodiment;  
 Figure 4 is a schematic cross-sectional illustration of an exemplary filter element according to the invention;  
 Figure 5A is a schematic cross-sectional illustration of an exemplary filter element;  
 5 Figure 5B shows the filter element of Fig. 5A in front view;  
 Figure 6A is a schematic cross-sectional illustration of an exemplary smoking article including the filter element of Fig. 4;  
 Figure 6B is a schematic cross-sectional illustration of an exemplary smoking article including the filter element of Fig. 4 as a first filter element and a variant of the filter element of Fig. 4 as a second filter element; and  
 10 Figure 6C is a schematic cross-sectional illustration of an exemplary smoking article including the filter element of Fig. 2.

**[0029]** The figures are generally not drawn in scale, but only exemplarily indicate the elements of the respective filter elements and smoking articles.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

**[0030]** Figure 1A is a schematic cross-sectional illustration of an exemplary filter element 10. Figure 1B shows the filter element 10 of Fig. 1A in front view.

20 **[0031]** The filter element 10 is formed from a conventional filter material 20, such as cellulose acetate. Other filter materials known in the art can likewise be used. The filter material 20 may be wrapped in a plug wrap (not shown). The filter element 10 has a circular-cylindrical form. Similar forms can also be used. The length of the filter element 10 (in the longitudinal direction L) can vary between about 5mm and 40mm, preferably between 6mm and 30mm. The diameter D of the filter element 10 may also vary between about 2mm and 15mm, preferably between 4mm and 10mm.

25 **[0032]** The filter element 10 includes a cavity (or channel) 30, which extends into the filter element 10 along the longitudinal direction L. The cavity 30 is devoid of filter material 20. Form and size of the cavity can vary. The cavity 30 can e.g. have the form of a blind hole, as in Fig. 1A, and extend into the filter element up to a certain depth, depending on the length of the filter element. Preferably, the depth of the cavity 30 is at least 1/3 of the length of the filter element 10. The cavity can also be circular-cylindrical. An inner diameter d may vary, depending on the diameter D of the filter element 10. The cross-sectional area of the cavity 30 should be at least 3mm<sup>2</sup>, preferably between 10mm<sup>2</sup> and 30mm<sup>2</sup>.  
 30 In other words, in case the cavity is circular-cylindrical, the diameter of the cavity should be at least 1mm, preferably between 3mm and 7mm.

**[0033]** At least part of the inner surface of the cavity 30 is provided with an adsorbent 40. One or more adsorbents can be provided on the surface of the cavity 30. Adsorbents can e.g. be selected from a group including activated carbon, zeolites, alumina, silica, silica gel, ion exchange resins, polyester resins, sepiolite, and carbon species, such as impregnated carbon, activated carbon fibres, or highly activated carbon. Further suitable adsorbents and/or catalysts that are known in the art for filtering smoke or removing components from the smoke can be used.

**[0034]** The adsorbent 40 can be applied to the inner surface of the filter element facing the cavity, which surface is formed by filter material 20, by any suitable application technology.

40 **[0035]** Figure 2 is a schematic cross-sectional illustration of an exemplary filter element 110.

**[0036]** The filter element 110 of Fig. 2 mainly differs from the filter element 10 in Fig. 1A in that the cavity 130 now forms a channel that completely extends through the filter element 110 along the longitudinal direction. Further, not only part of the inner surface of the cavity 130 is provided with the adsorbent, but essentially the entire surface.

**[0037]** Figures 3A and 3B are a schematic cross-sectional illustrations of a first and second variant of an exemplary filter element 210 according to the invention.

**[0038]** In contrast to the filter elements 10, 110 according to Fig. 1 and 2, in the filter elements 210, 210' according to Fig. 3A, 3B, the cavity 130 is provided by a tube formed from a tube material 50. The tube forms a single central or inner core of the filter element 210, 210', which inner core is surrounded by filter material 20. The tube material 50 can e.g. be a paper material or a suitable polymeric material.

50 **[0039]** According to the first variant shown in Fig. 3A, the inner surface of the tube material that faces the cavity of the tube is provided with one adsorbent 40.

**[0040]** In contrast, according to the second variant shown in Fig. 3B, a first area of the inner surface of the tube material 50 facing the cavity of the tube is provided with a first adsorbent 40, while a second area of the inner surface of the tube material facing the cavity is provided with second adsorbent 40' different from the first adsorbent 40. The first area and the second area may partially overlap.

55 **[0041]** Needless to say that respective variants, including different areas of the surface of the filter element facing the cavity being provided with different adsorbents 40, 40', are applicable also with respect to Fig. 1, 2 described above and to Fig. 4, 5. The number of different areas/different adsorbents may vary and is not limited to two.

**[0042]** Preferably, the tube material 50 is self-supporting, so that the tube can be formed in advance and has a predefined stability with respect to collapsing. The thickness of the tube material 50, defining a thickness of a wall of the tube, can vary, e.g. between about 0.1mm to 1mm.

**[0043]** Figure 4 is a schematic cross-sectional illustration of an exemplary filter 310 element.

**[0044]** This differs from the embodiments Fig. 3A, 3B in that in the filter element 310 the adsorbent 40 is not only applied to the inner surface of the tube material facing the tube, but the tube material 150 itself already includes the adsorbent 40, i.e. the adsorbent 40 is integrated or embedded into the tube material 150. Charcoal paper would e.g. represent a respective tube material 150.

**[0045]** Figure 5A is a schematic cross-sectional illustration of an exemplary filter element 410 according to a fifth embodiment. Figure 5B shows the filter element of Fig. 5A in front view.

**[0046]** The filter element 410 of Fig. 5 differs from the filter element 310 of Fig. 4 (and the other filter elements described above) in that a plurality of cavities or channels 230, 231, 231, 233 is included in the filter element 410. The number of cavities or channels may vary, e.g. between 1 and 5. When using a plurality of channels, the sum of the surface areas of the channels can be increased compared to the provision of only one channel having the same cross-sectional area as the sum of the cross-sectional areas of the plurality of channels.

**[0047]** Needless to say that also in the embodiments according to Fig. 1 to 3B a plurality of channels or cavities can be included into the respective filter elements.

**[0048]** Figure 6A is a schematic cross-sectional illustration of an exemplary smoking article including the filter element of Fig. 4; Figure 6B is a schematic cross-sectional illustration of an exemplary smoking article including the filter element of Fig. 4 as a first filter element and a variant of the filter element of Fig. 4 as a second filter element; and Figure 6C is a schematic cross-sectional illustration of an exemplary smoking article including the filter element of Fig. 2.

**[0049]** Figure 6A illustrates, in a longitudinal view, a smoking article 80 in the form of a cigarette. The cigarette comprises a wrapped tobacco rod 60, which includes an amount of a tobacco blend wrapped in a cigarette paper (not shown), and a filter. The filter is composed of the filter elements 510 and 310, where the filter element 310 is the filter element described above with reference to Fig. 4. The filter element 510 simply consists of a suitably filter material, e.g. the filter material 20 discussed above, e.g. cellulose acetate, which can be wrapped in a plug wrap (not shown).

**[0050]** The filter 510, 310 is connected to the wrapped tobacco rod 60 by a tipping paper 70, which overwraps the filter, i.e. the filter elements 510, 310, and a part of the wrapped tobacco rod 60. As shown in Fig. 6A, the filter can be designed as a filter having more than one segment, namely the filter elements 510, 310. The ordering of these filter elements, along the longitudinal direction of the smoking article can be changed. Further, any one of the filter elements 10, 110, 210, 410, 510 may be used instead of the filter element 310 in the embodiment according to Fig. 6A.

**[0051]** The smoking article 180 shown in Fig. 6B differs from the smoking article according to Fig. 6A in that instead of the filter element 510 (without cavity) a second inventive filter element 310' forms part of the filter. The filter element 310' differs from the filter element 310 by the adsorbent 40' included in the tube material 150', which differs from the adsorbent 40 included in the tube material 150 of the filter element 310. According to this embodiment, different effects that can be achieved by different adsorbents can be combined.

**[0052]** Apparently, also more than two filter elements including different adsorbents can be combined in this way. In this context, also filter elements without tube material, as described e.g. with reference to Fig. 2, and/or filter elements where the adsorbent is only applied to the tube material (as shown in Fig. 3A) can be used.

**[0053]** As shown in Fig. 6C with respect to the smoking article 280, the filter can also only comprise one filter element, e.g. the filter element 110 according to Fig. 2 (or any other filter element described above). In order to achieve an effect similar to that achieved by the embodiment according to Fig. 6B, instead of the filter element 110 according to Fig. 1, a filter element as described with reference to Fig. 3B may be used, i.e. a filter element in which different areas of the surface of the filter element facing the cavity or channel are provided with different adsorbents.

**[0054]** While this invention has been described in connection with what is presently considered to be practical exemplary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the scope of the appended claims.

#### LIST OF REFERENCE SIGNS

**[0055]**

|                                   |                 |
|-----------------------------------|-----------------|
| 10, 110, 210, 210', 310, 410, 510 | filter element  |
| 20                                | filter material |
| 30, 130, 230, 231, 232, 233       | cavity          |
| 40, 40'                           | adsorbent       |
| 50, 150, 150'                     | tube material   |
| 60                                | tobacco rod     |

|              |                        |
|--------------|------------------------|
| 70           | tipping paper          |
| 80, 180, 280 | smoking article        |
| L            | longitudinal direction |
| D, d         | diameter               |

5

## Claims

1. A filter element (10; 110; 210; 210'; 310; 410; 510) for use in a smoking article (80), the filter element (10) being formed from a filter material (20), such as cellulose acetate, wherein the filter element (10) includes a cavity (30; 130) that is devoid of filter material (20), , wherein the cavity (30; 130) forms a channel that completely extends through the filter element (10; 110) along a longitudinal direction (L) of the filter element (10; 110), wherein the channel (130) is a tube that is formed from a tube material (50; 150), which tube material is different from the filter material, wherein at least an inner surface of the tube material facing the cavity of the tube is at least partially provided with an adsorbent (40), wherein the tube is formed as a single central core of the filter element (210; 310).
2. The filter (10) element according to claim 1, wherein the adsorbent (40) is at least one of a group of adsorbents including activated carbon, zeolites, alumina, silica, silica gel, ion exchange resins, polyester resins, sepiolite, and carbon species, such as impregnated carbon, activated carbon fibres, or highly activated carbon.
3. The filter element (210; 310) according to claim 1 or 2, wherein the tube material (50; 150) is a paper material or a polymeric material.
4. The filter element (310) according to any one of claims 1 to 3, wherein the tube material (150) includes the adsorbent (40).
5. The filter element according to claim 4, wherein the tube material includes multiple layers, and wherein the innermost layer of the multiple layers that faces the cavity of the tube includes the adsorbent.
6. The filter element (310) according to any one of claims 1 to 5, wherein the tube material (150) comprises or consists of charcoal paper.
7. The filter element according to any one of claims 1 to 6, wherein the filter element (410) includes a plurality of cavities (230; 231; 232; 233) that are devoid of filter material (20), wherein a surface of the filter element facing at least one of the cavities (230; 231; 232; 233) is provided with the adsorbent (40).
8. A smoking article (80; 180; 280), including a filter element (10; 110; 210; 210'; 310; 410; 510) according to any one of claims 1 to 7.
9. The smoking article (80) according to claim 8, comprising a wrapped tobacco rod (60) and a filter (510, 310) including the filter element (310), the wrapped tobacco rod (60) and the filter (510, 310) being connected by a tipping paper (70) which overwraps the filter (510, 310) and a part of the wrapped tobacco rod (60).
10. The smoking article (180) according to claim 9, wherein the filter (310, 310') includes at least a first filter element (310) and a second filter element (310') according to any one of claims 1 to 7, wherein a surface of the first filter element (310) facing the cavity of the first filter element (310) is provided with a first adsorbent (40), and wherein a surface of the second filter element (310') facing the cavity of the second filter element (310') is provided with a second adsorbent (40') that is different from the first adsorbent (40).

## Patentansprüche

1. Filterelement (10; 110; 210; 210'; 310; 410; 510) zur Verwendung in einem Rauchartikel (80), wobei das Filterelement (10) aus einem Filtermaterial (20) wie Celluloseacetat ausgebildet ist, wobei das Filterelement (10) einen Hohlraum (30; 130) beinhaltet, der frei von Filtermaterial (20) ist,

wobei der Hohlraum (30; 130) einen Kanal ausbildet, der sich vollständig durch das Filterelement (10; 110) entlang einer Längsrichtung (L) des Filterelements (10; 110) erstreckt, wobei der Kanal (130) ein Rohr ist, das aus einem Rohrmaterial (50; 150) ausgebildet ist, wobei sich das Rohrmaterial vom Filtermaterial unterscheidet, wobei mindestens eine dem Hohlraum des Rohres zugewandte innere Oberfläche des Rohrmaterials zumindest teilweise mit einem Adsorptionsmittel (40) versehen ist, wobei das Rohr als ein einzelner zentraler Kern des Filterelements (210; 310) ausgebildet ist.

2. Filterelement (10) nach Anspruch 1, wobei das Adsorptionsmittel (40) mindestens eines aus einer Gruppe von Adsorptionsmitteln ist, die Aktivkohle, Zeolithe, Aluminiumoxid, Siliziumdioxid, Kieselgel, Ionenaustauscherharze, Polyesterharze, Sepiolith und Kohlenstoffspezies wie imprägnierte Kohle, Aktivkohlefasern oder hochaktive Kohle beinhaltet.

3. Filterelement (210; 310) nach Anspruch 1 oder 2, wobei das Rohrmaterial (50; 150) ein Papiermaterial oder ein Polymermaterial ist.

4. Filterelement (310) nach einem der Ansprüche 1 bis 3, wobei das Rohrmaterial (150) das Adsorptionsmittel (40) beinhaltet.

5. Filterelement nach Anspruch 4, wobei das Rohrmaterial mehrere Schichten beinhaltet, und wobei die innerste Schicht der mehreren Schichten, die dem Hohlraum des Rohres zugewandt ist, das Adsorptionsmittel beinhaltet.

6. Filterelement (310) nach einem der Ansprüche 1 bis 5, wobei das Rohrmaterial (150) Kohlepapier umfasst oder daraus besteht.

7. Filterelement nach einem der Ansprüche 1 bis 6, wobei das Filterelement (410) eine Mehrzahl von Hohlräumen (230; 231; 232; 233) beinhaltet, die frei von Filtermaterial (20) sind, wobei eine Oberfläche des Filterelements, die mindestens einem der Hohlräume (230; 231; 232; 233) zugewandt ist, mit dem Adsorptionsmittel (40) versehen ist.

8. Rauchartikel (80; 180; 280), das ein Filterelement (10; 110; 210; 210'; 310; 410; 510) nach einem der Ansprüche 1 bis 7 beinhaltet.

9. Rauchartikel (80) nach Anspruch 8, umfassend einen umwickelten Tabakstab (60) und einen Filter (510, 310), der das Filterelement (310) beinhaltet, wobei der umwickelte Tabakstab (60) und der Filter (510, 310) durch ein Belagpapier (70) verbunden sind, das den Filter (510, 310) und einen Teil des umwickelten Tabakstrangs (60) umhüllt.

10. Rauchartikel (180) nach Anspruch 9, wobei der Filter (310, 310') mindestens ein erstes Filterelement (310) und ein zweites Filterelement (310') nach einem der Ansprüche 1 bis 7 beinhaltet, wobei eine dem Hohlraum des ersten Filterelements (310) zugewandte Oberfläche des ersten Filterelements (310) mit einem ersten Adsorptionsmittel (40) versehen ist, und wobei eine dem Hohlraum des zweiten Filterelements (310') zugewandte Oberfläche des zweiten Filterelements (310') mit einem zweiten Adsorptionsmittel (40') versehen ist, das sich von dem ersten Adsorptionsmittel (40) unterscheidet.

## Revendications

1. Élément de filtre (10 ; 110 ; 210 ; 210' ; 310 ; 410 ; 510) pour utilisation dans un article à fumer (80), l'élément de filtre (10) étant formé à partir d'un matériau de filtre (20), tel que de l'acétate de cellulose, l'élément de filtre (10) comprenant une cavité (30 ; 130) qui est dépourvue de matériau de filtre (20), la cavité (30 ; 130) formant un canal qui traverse complètement l'élément de filtre (10 ; 110) le long d'une direction longitudinale (L) de l'élément de filtre (10 ; 110), le canal (130) étant un tube qui est formé à partir d'un matériau de tube (50 ; 150), lequel matériau de tube est différent du matériau de filtre, au moins une surface intérieure du matériau de tube opposée à la cavité du tube étant au moins partiellement munie d'un adsorbant (40), le tube étant formé comme un noyau central unique de l'élément de filtre (210 ; 310).

2. Élément de filtre (10) selon la revendication 1, l'adsorbant (40) étant au moins un adsorbant sélectionné parmi le groupe se composant de : charbon actif, zéolithes, alumine, silice, gel de silice, résines échangeuses d'ions, résines

## EP 3 305 102 B1

polyester, sépiolite et composés carbonés, tels que carbone imprégné, fibres de carbone activées ou charbon hautement actif.

- 5
3. Élément de filtre (210 ; 310) selon la revendication 1 ou 2, le matériau de tube (50 ; 150) étant un matériau de papier ou un matériau polymère.
4. Élément de filtre (310) selon l'une quelconque des revendications 1 à 3, le matériau de tube (150) comprenant un adsorbant (40).
- 10
5. Élément de filtre selon la revendication 4, le matériau de tube comprenant des couches multiples, et la couche la plus intérieure des couches multiples qui sont opposées à la cavité du tube comprenant l'adsorbant.
6. Élément de filtre (310) selon l'une quelconque des revendications 1 à 5, le matériau de tube (150) comprenant du, ou se composant de, papier au charbon.
- 15
7. Élément de filtre selon l'une quelconque des revendications 1 à 6, l'élément de filtre (410) comprenant une pluralité de cavités (230 ; 231 ; 232 ; 233) qui sont dépourvues de matériau de filtre (20), une surface de l'élément de filtre opposée à l'au moins une des cavités (230 ; 231 ; 232 ; 233) étant munie de l'adsorbant (40).
- 20
8. Article à fumer (80 ; 180 ; 280), comprenant un élément de filtre (10 ; 110 ; 210 ; 210' ; 310 ; 410 ; 510) selon l'une quelconque des revendications 1 à 7.
- 25
9. Article à fumer (80) selon la revendication 8, comprenant une tige de tabac enveloppée (60) et un filtre (510, 310) incluant l'élément de filtre (310), la tige de tabac enveloppée (60) et le filtre (510, 310) étant connectés par un papier manchette (70) qui suremballe le filtre (510, 310) et une partie de la tige de tabac enveloppée (60).
- 30
10. Article à fumer (180) selon la revendication 9, le filtre (310, 310') comprenant au moins un premier élément de filtre (310) et un deuxième élément de filtre (310') selon l'une quelconque des revendications 1 à 7, une surface du premier élément de filtre (310) opposée à la cavité du premier élément de filtre (310) étant munie d'un premier adsorbant (40), et une surface du deuxième élément de filtre (310') opposée à la cavité du deuxième élément de filtre (310') étant munie d'un deuxième adsorbant (40') qui est différent du premier adsorbant (40).
- 35
- 40
- 45
- 50
- 55

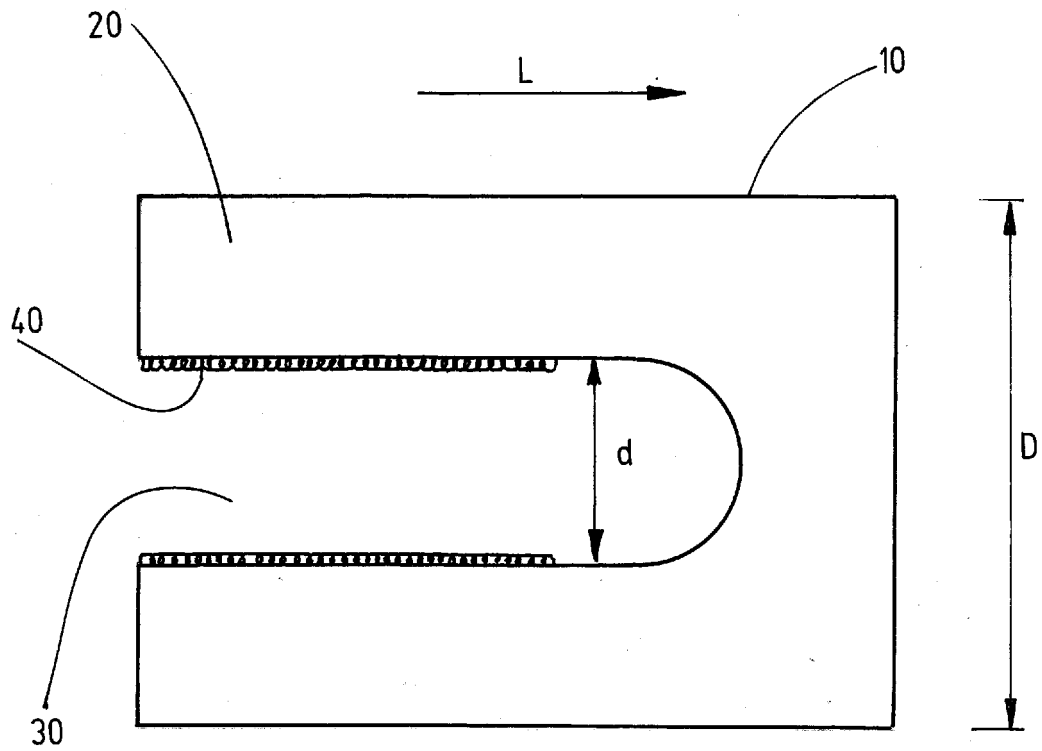


Fig.1A

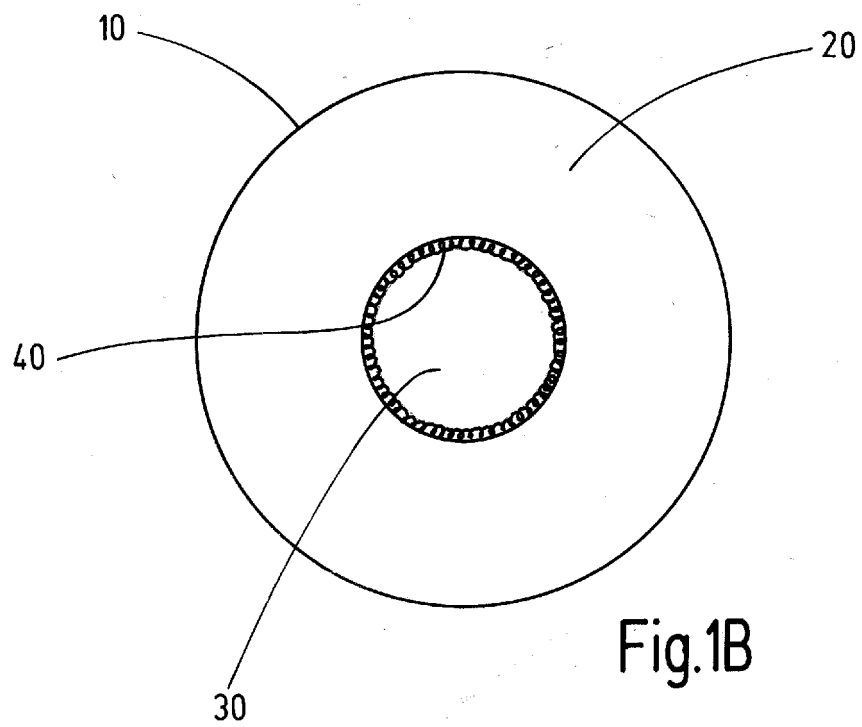
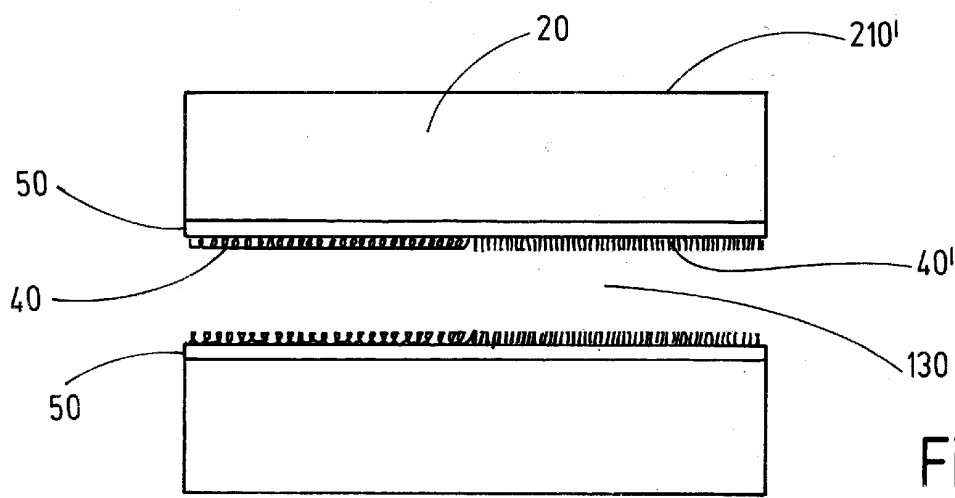
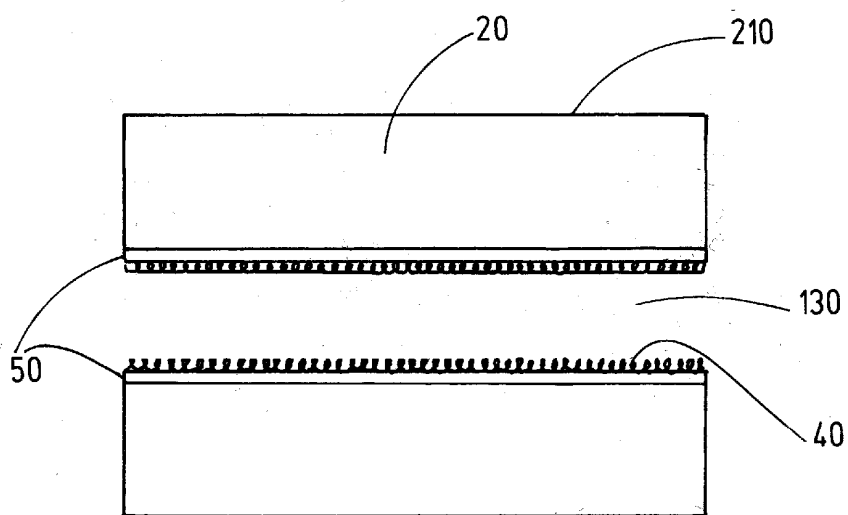
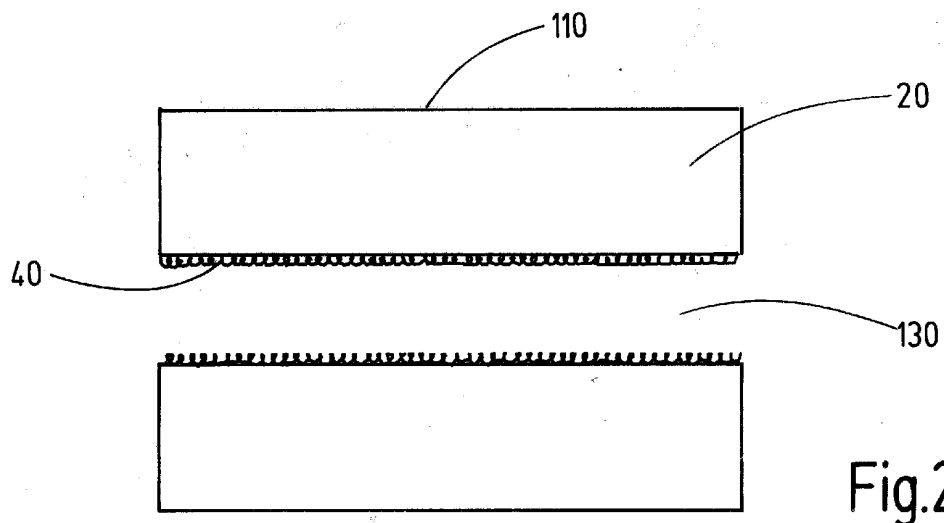


Fig.1B



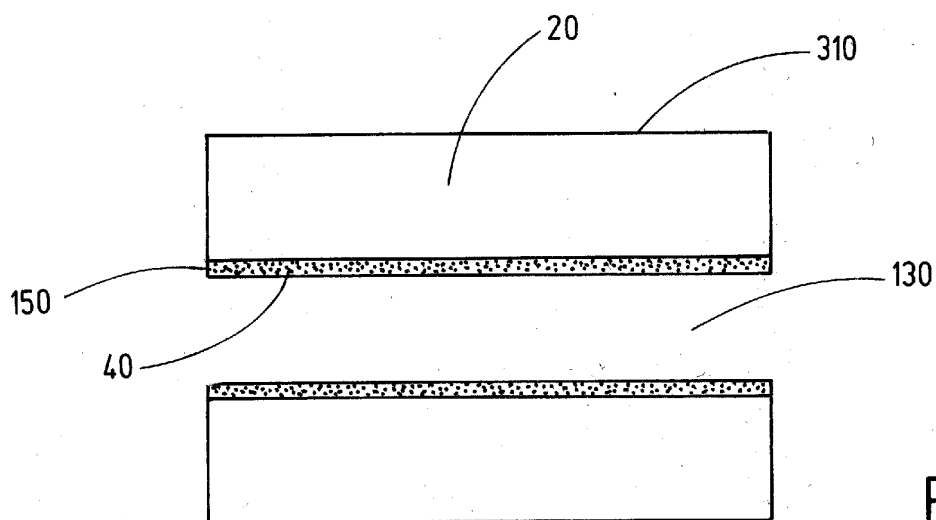


Fig. 4

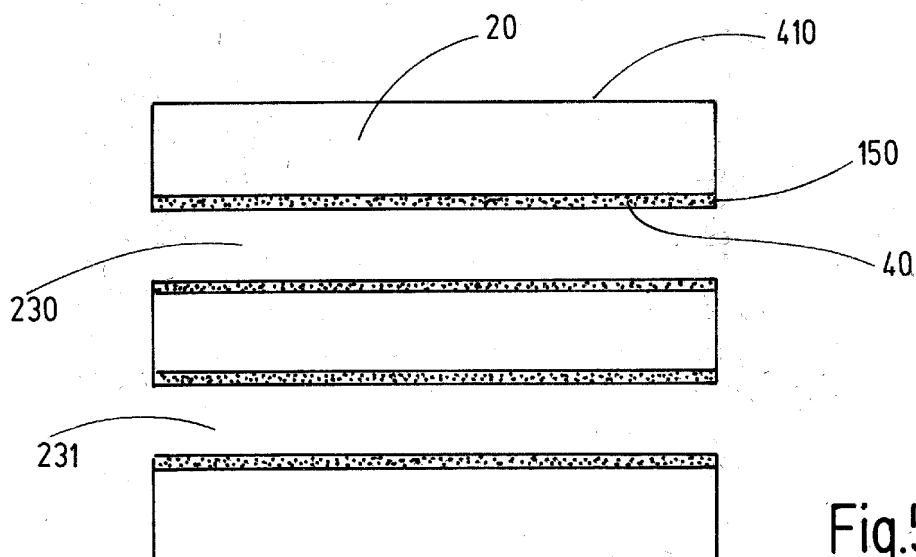


Fig. 5A




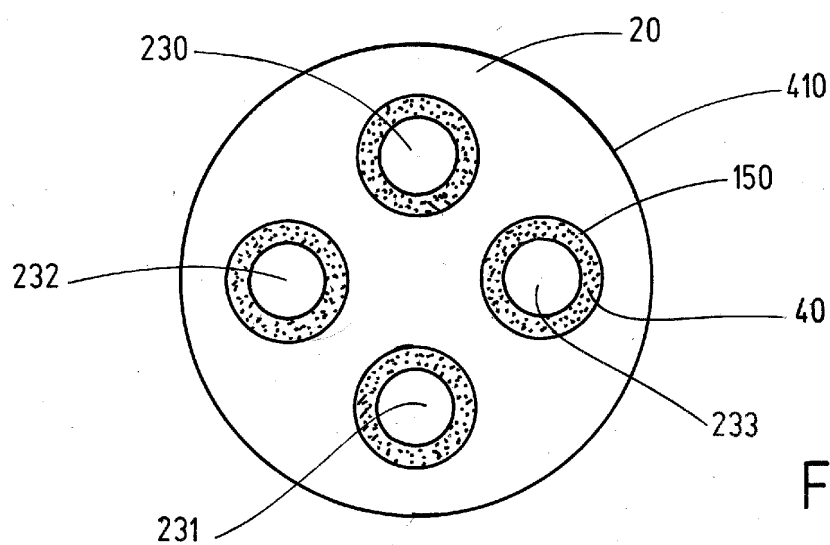


Fig. 5B

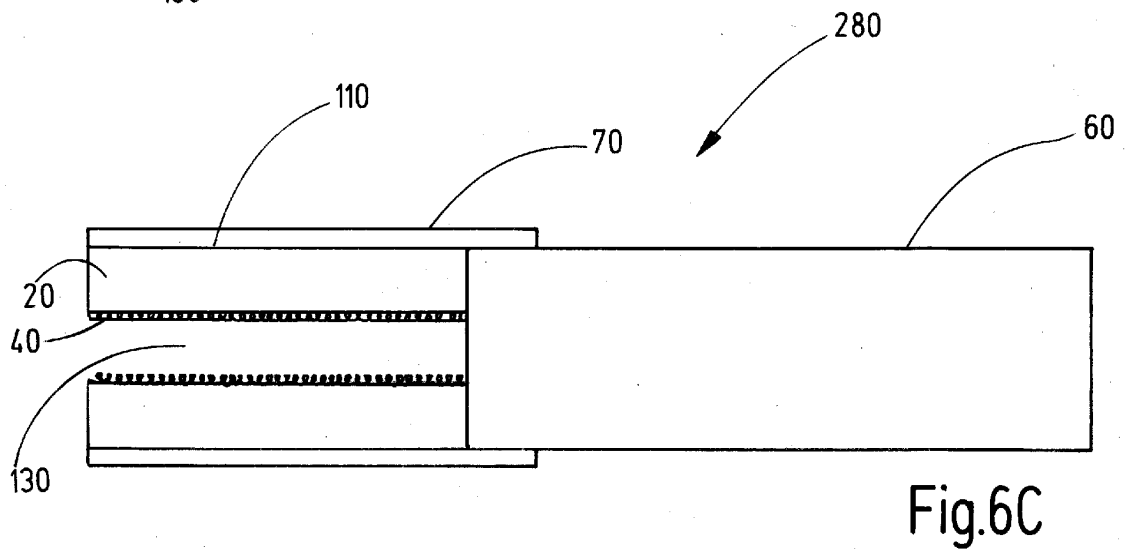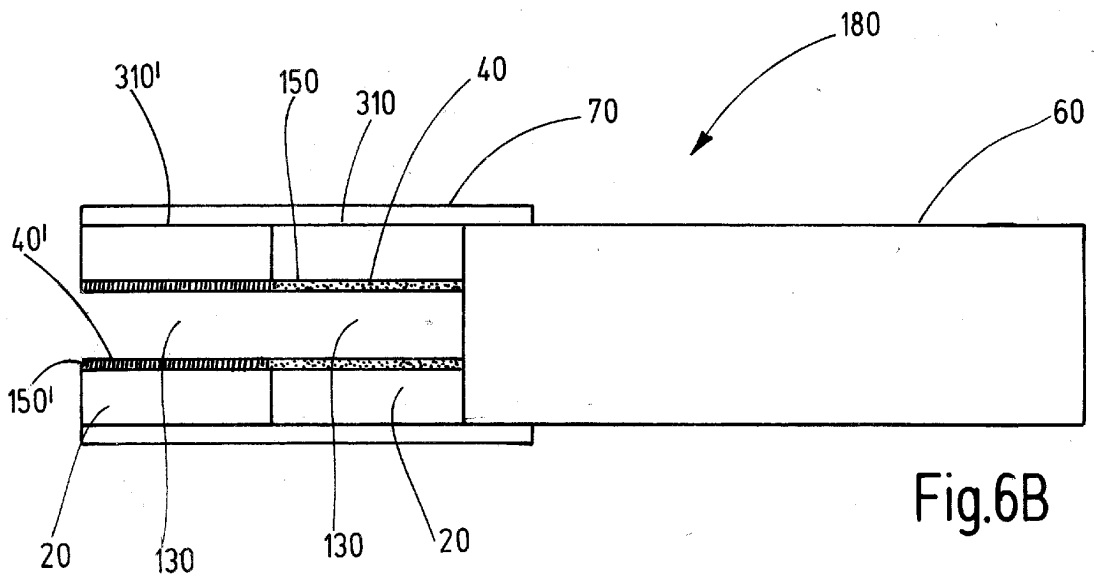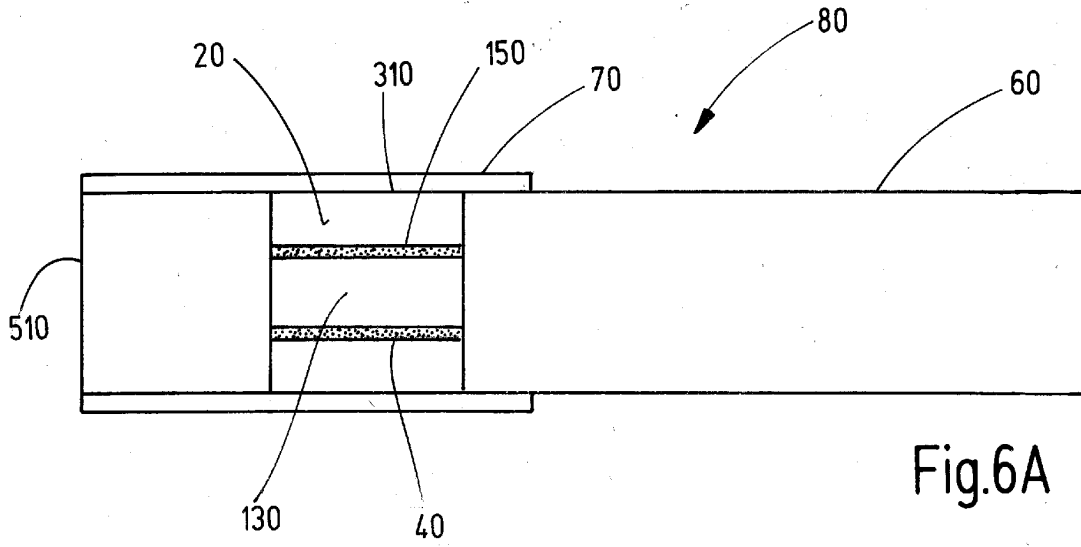

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 3438381 A [0004]
- TW 201132303 A [0005]
- DE 3444991 A1 [0006]
- US 2005133053 A1 [0007]
- WO 2004080217 A1 [0007]