US 20030110379A1

(19) United States

(12) Patent Application Publication (10) Pub. No.: US 2003/0110379 A1

Ylonen et al. (43) Pub. Date: Jun. 12, 2003

(54) APPLICATION GATEWAY SYSTEM, AND METHOD FOR MAINTAINING SECURITY IN A PACKET-SWITCHED INFORMATION NETWORK

(76) Inventors: **Tatu Ylonen**, Espoo (FI); **Tero Kivinen**, Espoo (FI); **Markus Levlin**, Helsinki (FI)

Correspondence Address:
RONALD CRAIG FISH
RONALD CRAIG FISH, A LAW CORPORATION
POST OFFICE BOX 2258
MORGAN HILL, CA 95038 (US)

(21) Appl. No.: **10/020,299**

(22) Filed: **Dec. 7, 2001**


Publication Classification

(51) **Int. Cl.**[7] **H04L 9/00**

(52) **U.S. Cl.** **713/164**; 713/200

(57) **ABSTRACT**

A method and apparatuses are disclosed for handling digital data packets at a logical borderline that separates an untrusted packet-switched information network from a protected domain. A packet processor part intercepts a packet that is in transit between the untrusted packet-switched information network and the protected domain. The packet is examined at the packet processor part in order to determine, whether the packet contains digital data that pertains to a certain protocol. If the packet is not found to contain such digital data, it is processed at the packet processor part. If the packet is found to contain digital data that pertains to said certain protocol, it gets redirected to an application gateway part that processes the packet according to a set of processing rules based on obedience to said certain protocol. The packet processor part is a kernel mode process running in a computer device and the application gateway part is a user mode process running in a computer device.

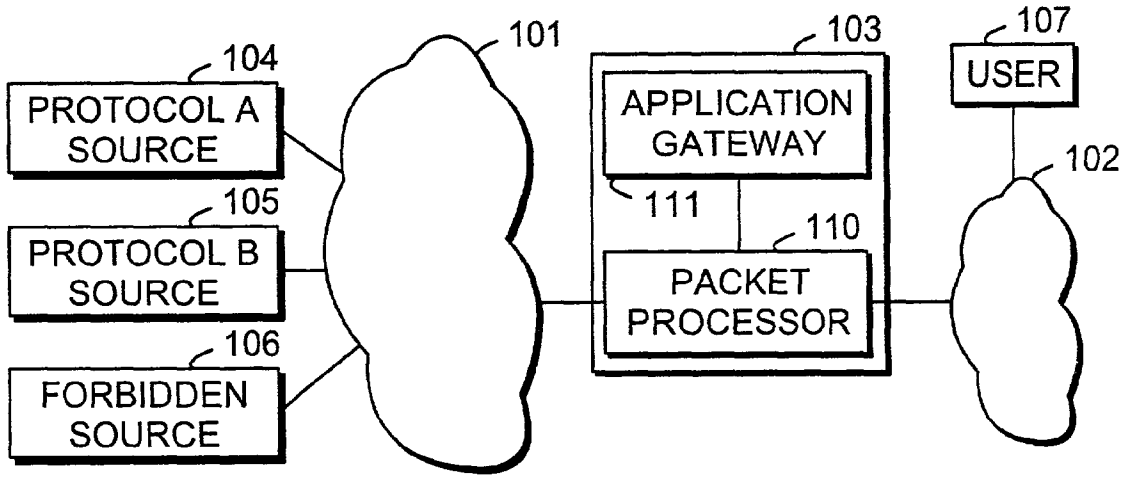

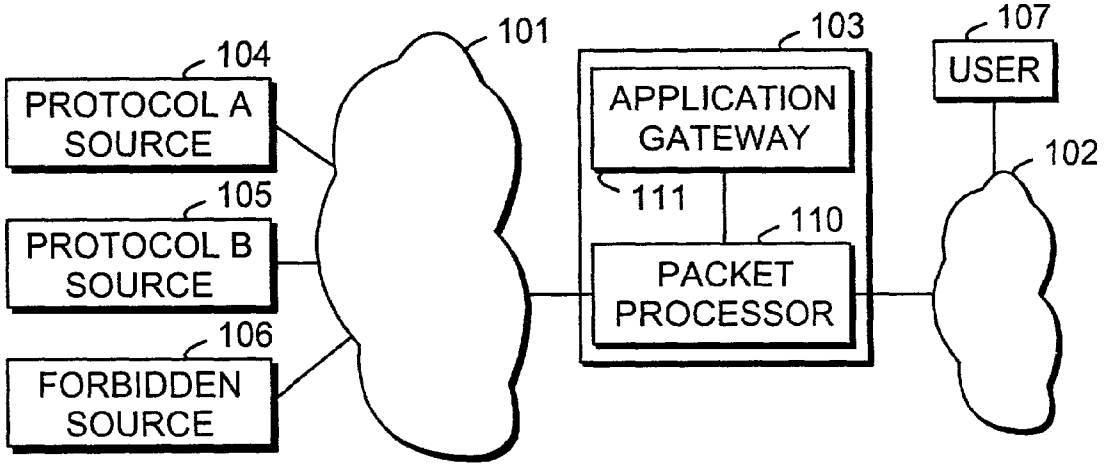

104
PROTOCOL A SOURCE
105
PROTOCOL B SOURCE
106
FORBIDDEN SOURCE
101
103
APPLICATION GATEWAY
111
110
PACKET PROCESSOR
107
USER
102

Fig. 1

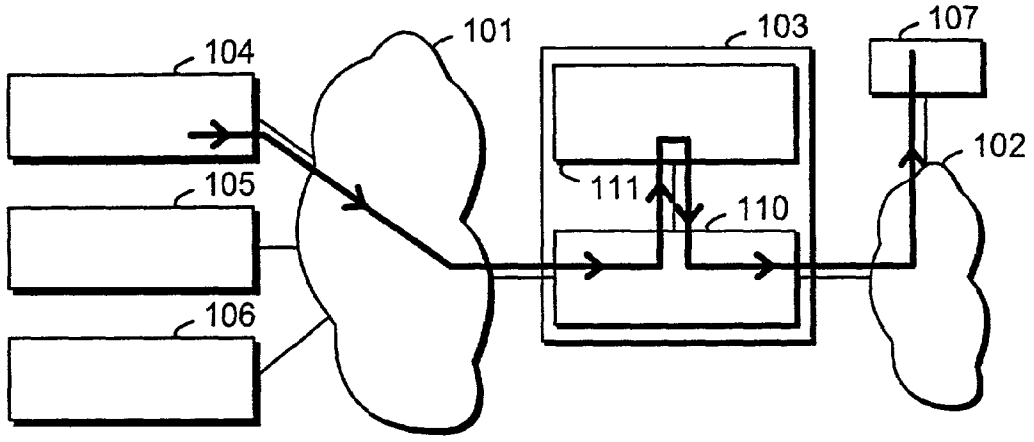


Fig. 2a

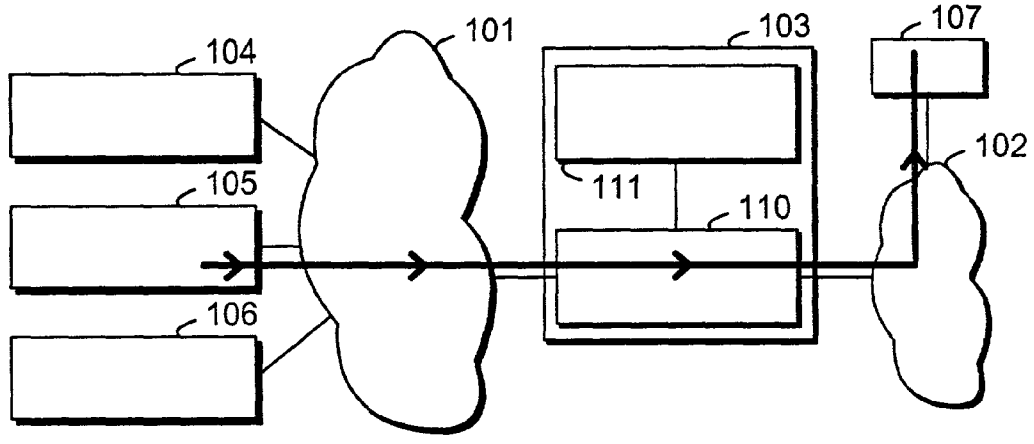


Fig. 2b

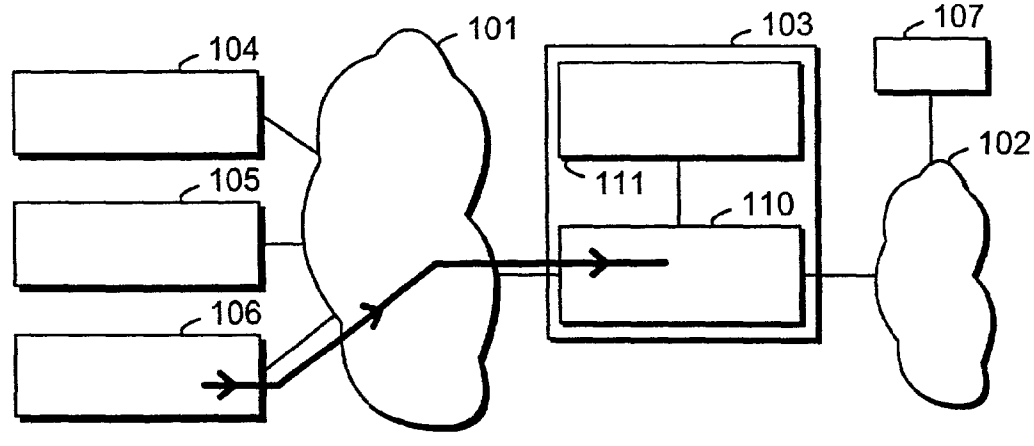


Fig. 2c

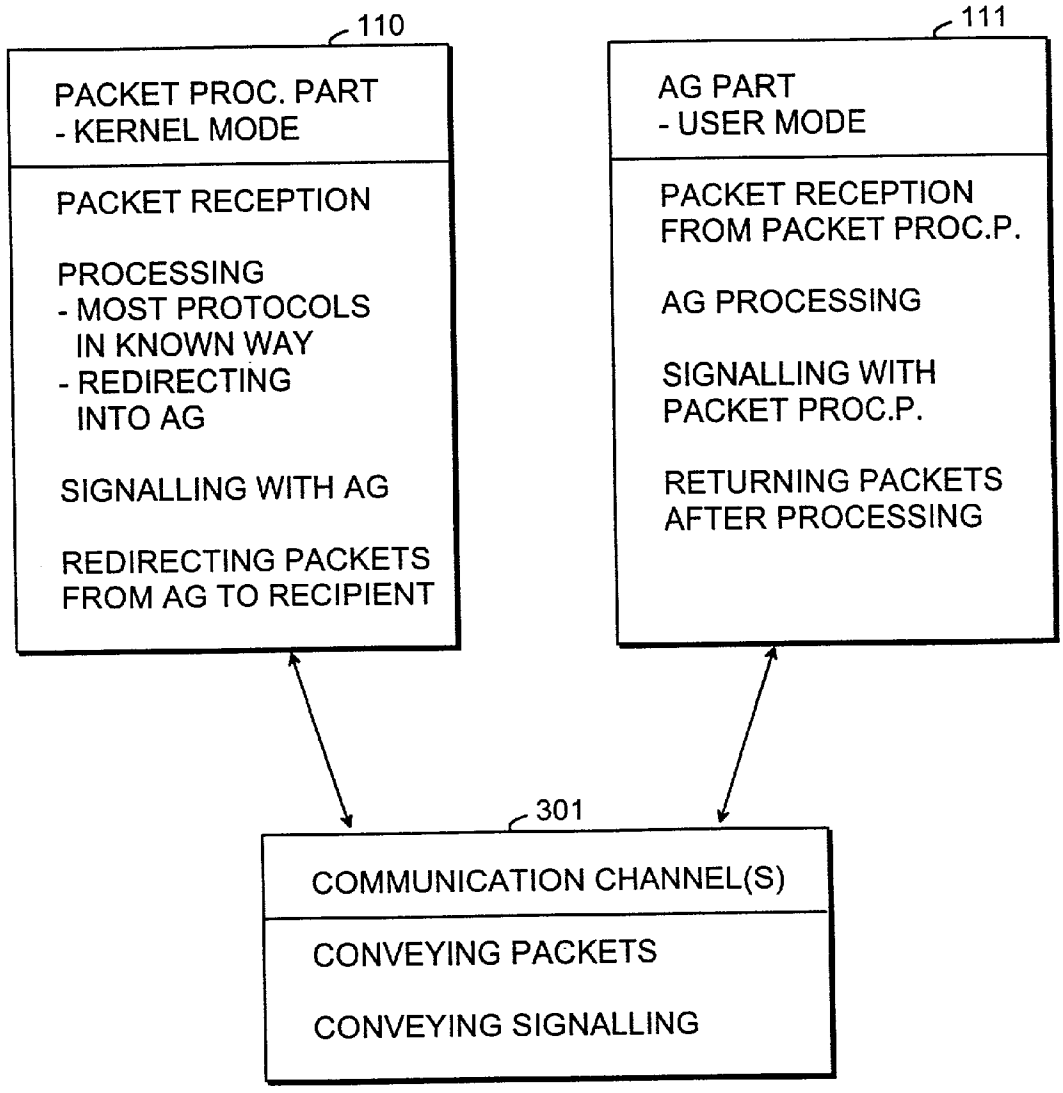

110
PACKET PROC. PART
- KERNEL MODE
PACKET RECEPTION
PROCESSING
- MOST PROTOCOLS IN KNOWN WAY
- REDIRECTING INTO AG
SIGNALLING WITH AG
REDIRECTING PACKETS FROM AG TO RECIPIENT
111
AG PART
- USER MODE
PACKET RECEPTION FROM PACKET PROC.P.
AG PROCESSING
SIGNALLING WITH PACKET PROC.P.
RETURNING PACKETS AFTER PROCESSING
301
COMMUNICATION CHANNEL(S)
CONVEYING PACKETS
CONVEYING SIGNALLING

Fig. 3

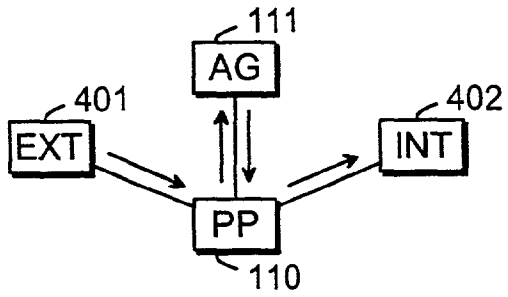


Fig. 4a

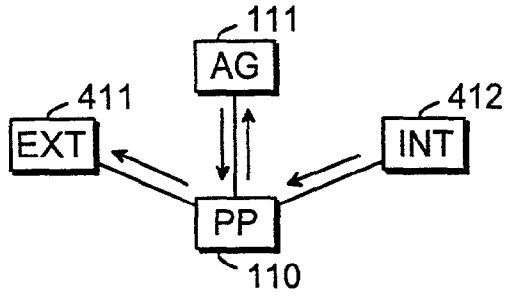


Fig. 4b

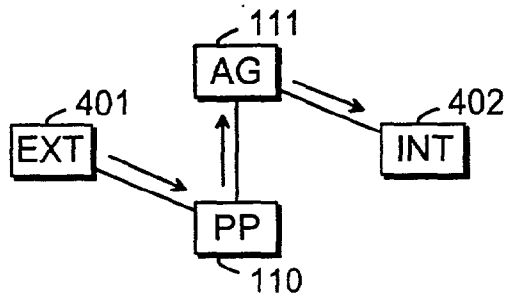


Fig. 4c

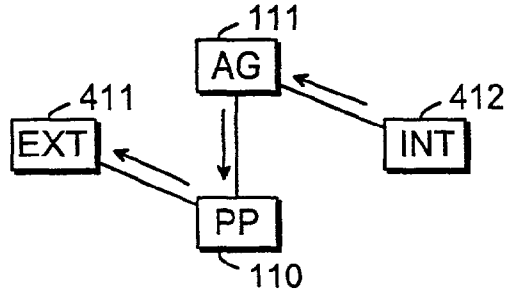


Fig. 4d

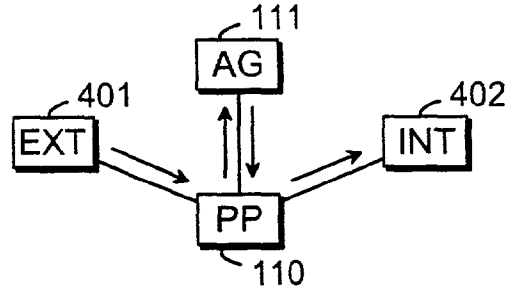


Fig. 4e

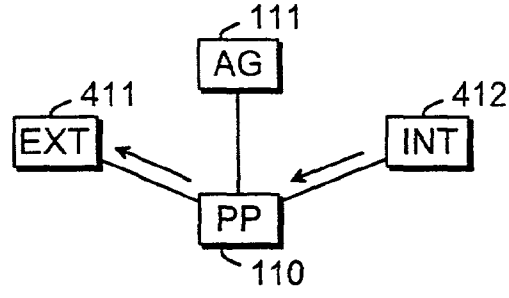


Fig. 4f

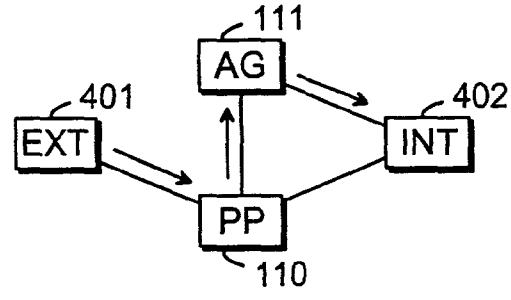


Fig. 4g

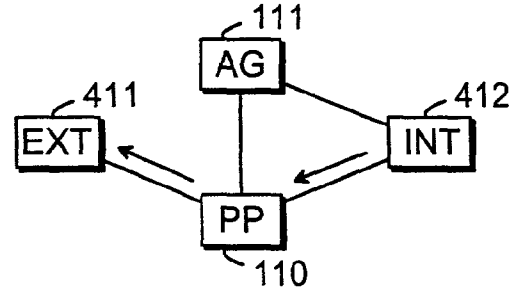


Fig. 4h

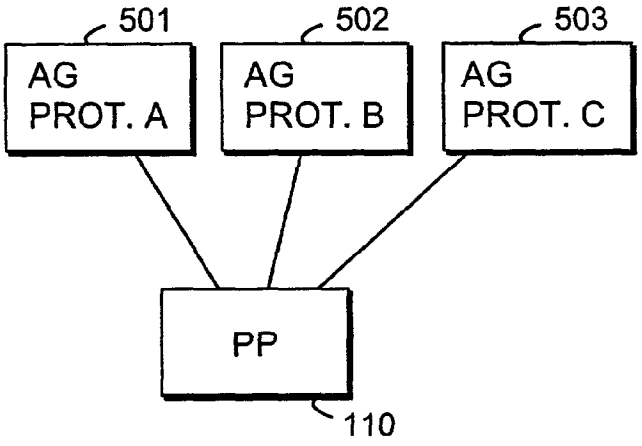


Fig. 5a

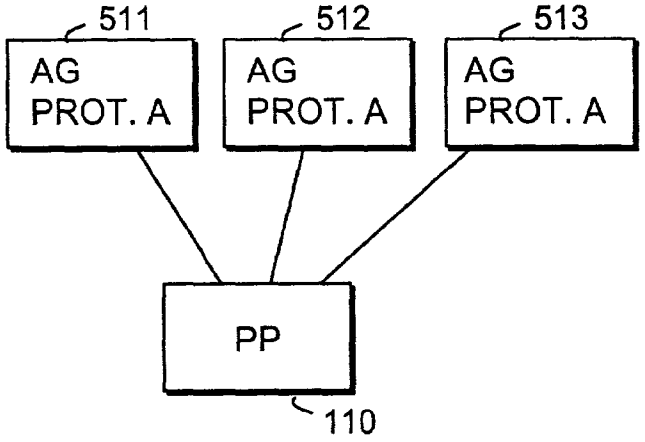


Fig. 5b

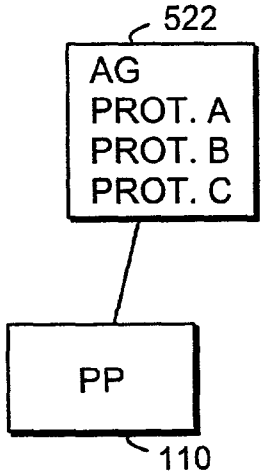


Fig. 5c

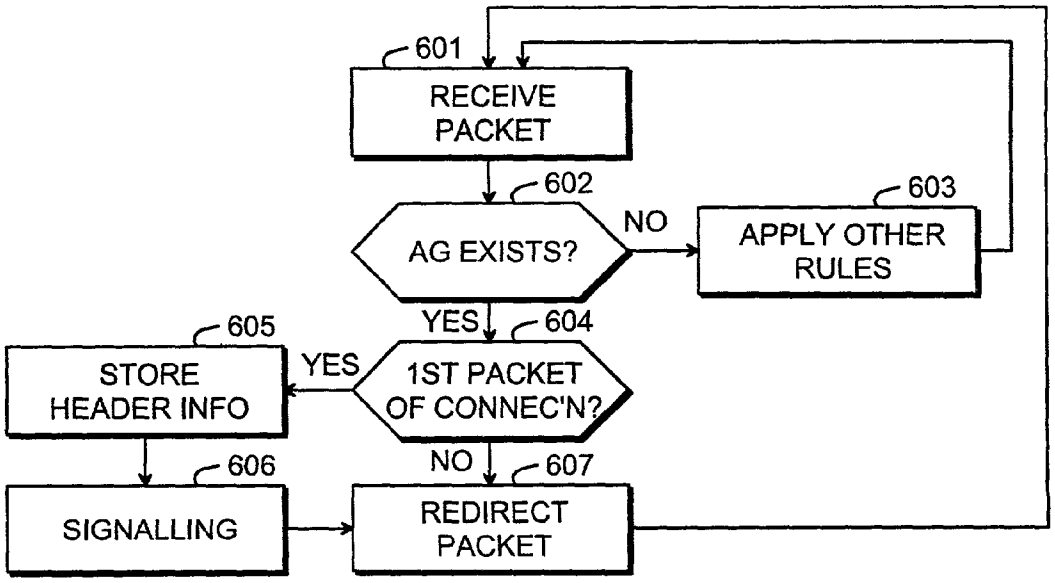

601
RECEIVE PACKET
602
AG EXISTS?
NO
603
APPLY OTHER RULES
YES
604
1ST PACKET OF CONNEC'N?
YES
605
STORE HEADER INFO
NO
607
REDIRECT PACKET
606
SIGNALLING

Fig. 6a

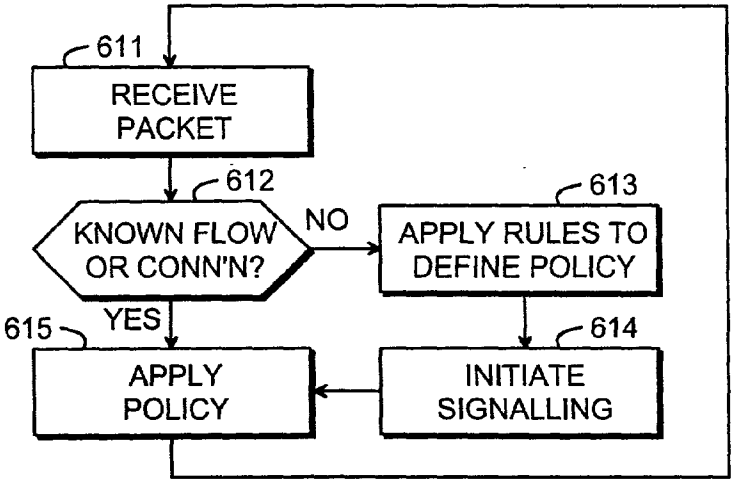

611
RECEIVE PACKET
612
KNOWN FLOW OR CONN'N?
NO
613
APPLY RULES TO DEFINE POLICY
YES
615
APPLY POLICY
614
INITIATE SIGNALLING

Fig. 6b

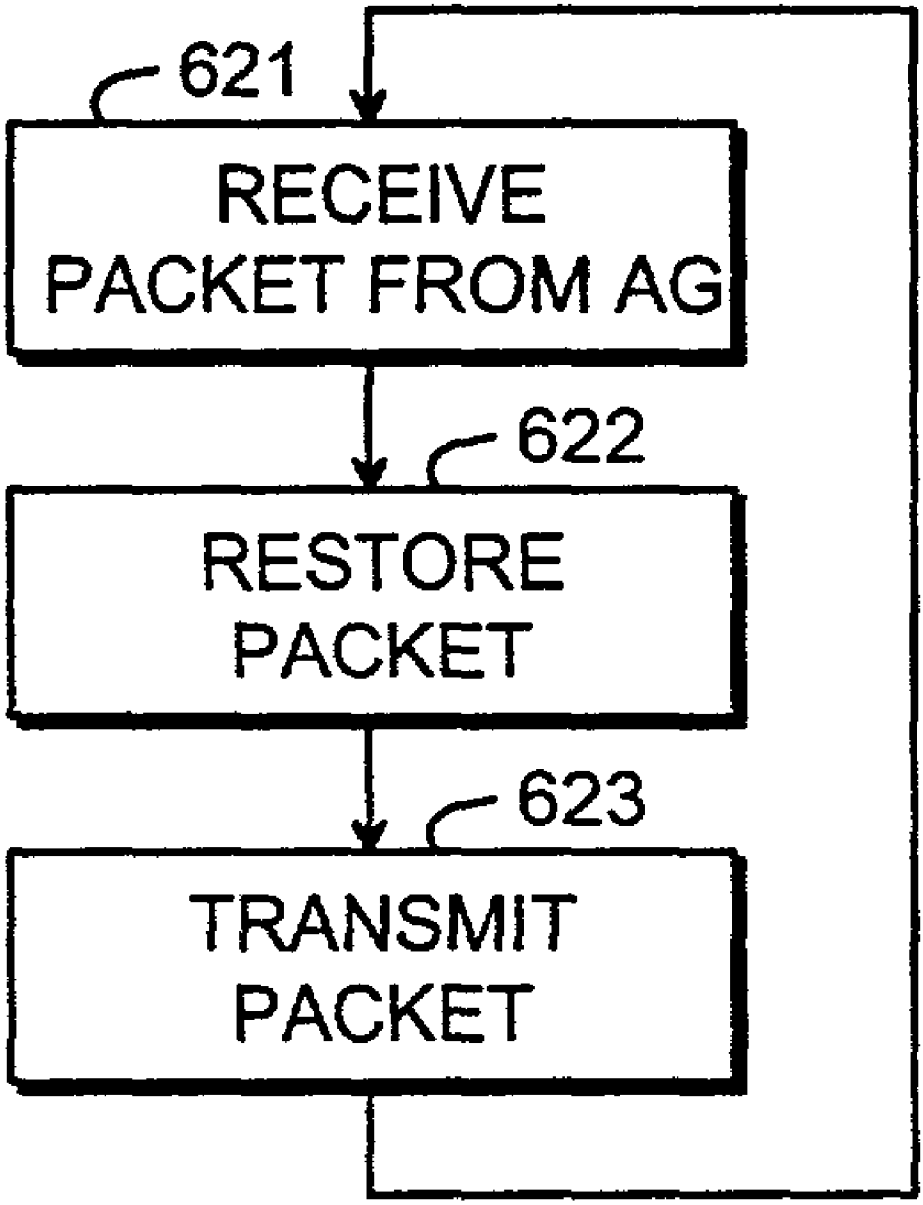

621
RECEIVE PACKET FROM AG
622
RESTORE PACKET
623
TRANSMIT PACKET

Fig. 6c

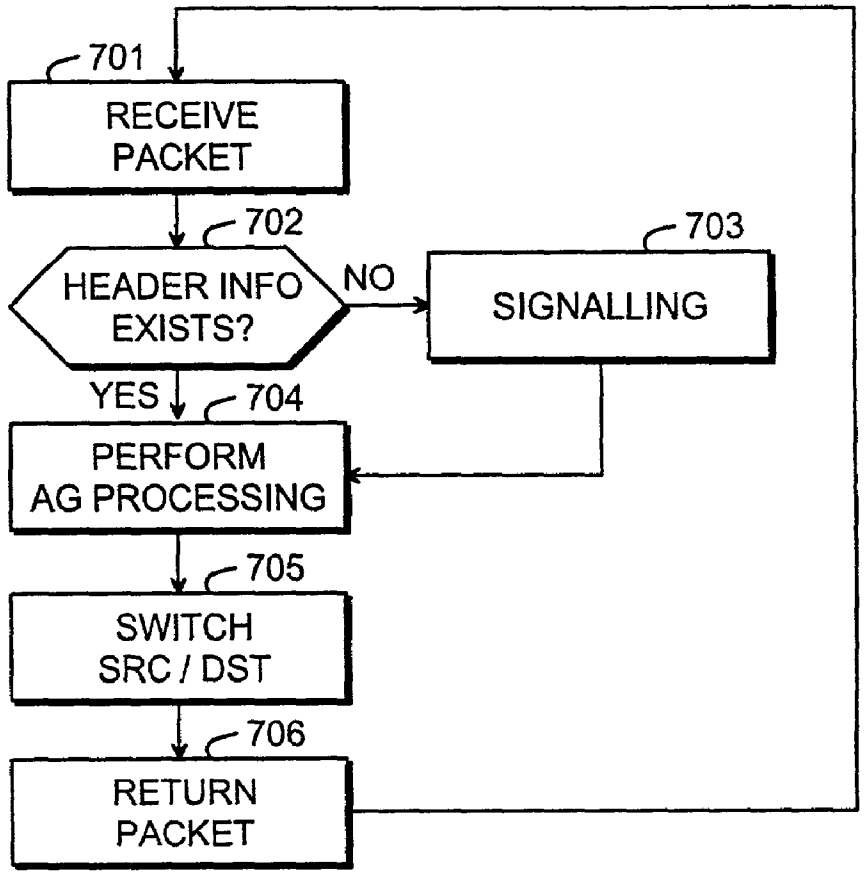

701
RECEIVE PACKET
702
HEADER INFO EXISTS?
NO
703
SIGNALLING
YES
704
PERFORM AG PROCESSING
705
SWITCH SRC / DST
706
RETURN PACKET

Fig. 7a

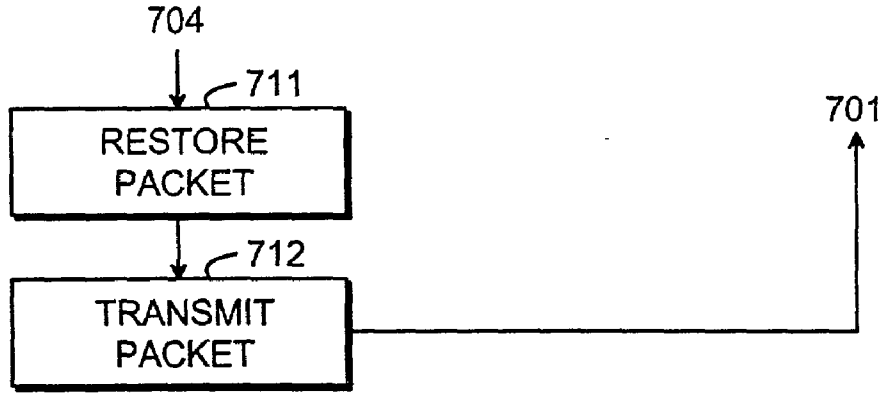

704
711
RESTORE PACKET
712
TRANSMIT PACKET
701

Fig. 7b

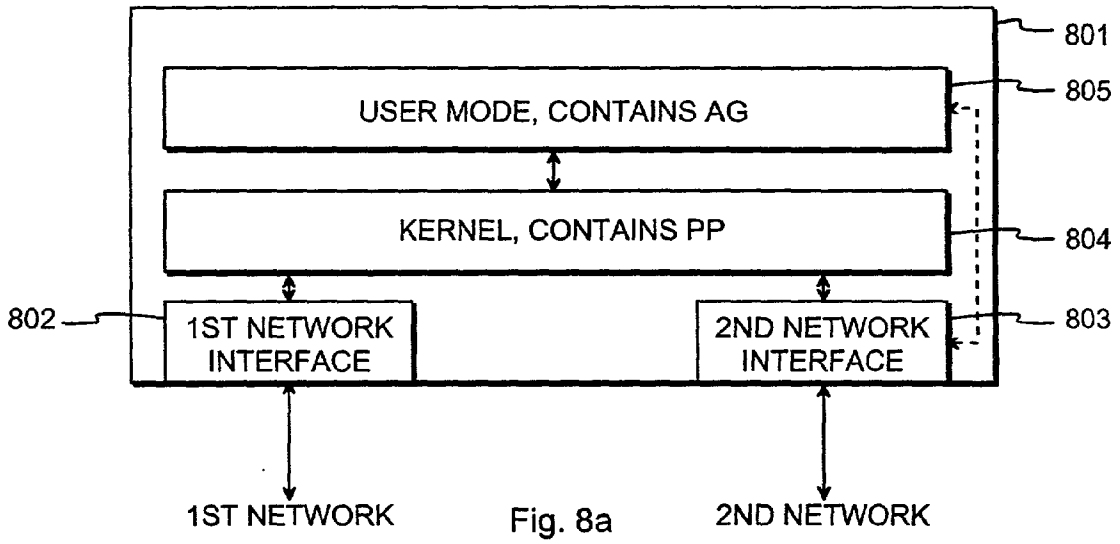

801
USER MODE, CONTAINS AG
805
KERNEL, CONTAINS PP
804
802
1ST NETWORK INTERFACE
2ND NETWORK INTERFACE
803
1ST NETWORK
2ND NETWORK

Fig. 8a

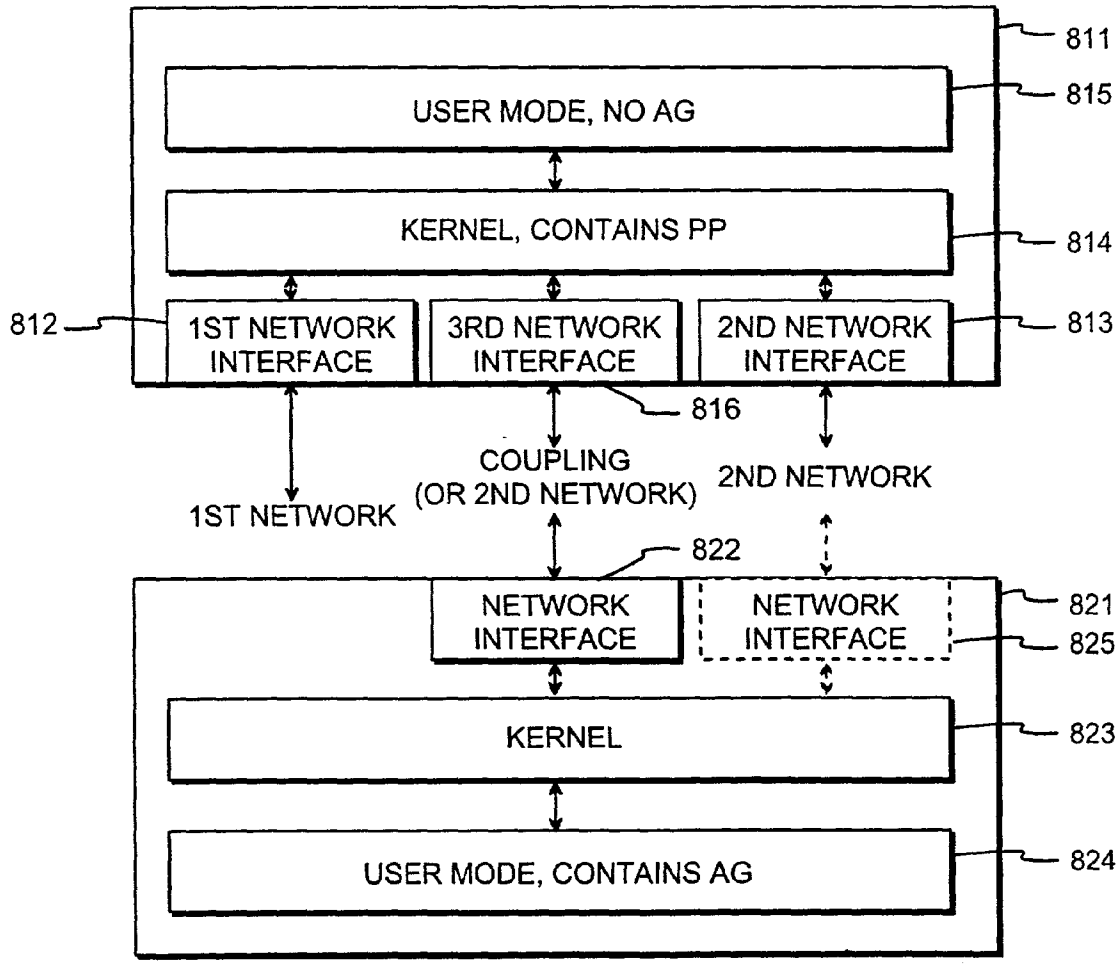

811
USER MODE, NO AG
815
KERNEL, CONTAINS PP
814
812
1ST NETWORK INTERFACE
3RD NETWORK INTERFACE
2ND NETWORK INTERFACE
813
816
COUPLING (OR 2ND NETWORK)
2ND NETWORK
1ST NETWORK
822
NETWORK INTERFACE
NETWORK INTERFACE
821
825
KERNEL
823
USER MODE, CONTAINS AG
824

Fig. 8b

APPLICATION GATEWAY SYSTEM, AND METHOD FOR MAINTAINING SECURITY IN A PACKET-SWITCHED INFORMATION NETWORK

TECHNICAL FIELD

[0001] The invention concerns generally the technology of controlling the transmission of digital information packets between an insecure information network and a protected domain. Especially the invention concerns the technology of combining the so-called application gateway functionality to a firewall that controls the transmission of TCP/IP-packets (Transmission Control Protocol/Internet Protocol).

BACKGROUND OF THE INVENTION

[0002] The conventional way of protecting a protected domain against hostile attacks from an insecure external information network is to route all data packets transmitted therebetween through a so-called firewall. At the priority date of this patent application the term "data packets" refers in this regard practically invariably to TCP/IP-packets. The protected domain is almost invariably a private corporate network, but firewall applications exist also for protecting individual computers as well as small home networks.

[0003] A conventional firewall performs packet-level filtering based on packet headers. This means that the firewall examines the TCP/IP header of each packet routed to it, and either rejects or passes the packet depending on a set of filtering rules defined by a supervisory user who is responsible for network security. As a very conventional example the supervisory user may impose a strict screening policy according to which only those incoming packets that according to their header originate from a previously known and trusted external host are passed through to the protected domain. A firewall can apply different filtering rules to incoming and outgoing packets, and even different filtering rules depending on which user (i.e. which IP address) of the protected domain is involved in the communication.

[0004] More versatility can be added to the basic firewall functionality by instructing the firewall to look at not only the TCP/IP header but also certain other header information within each packet. In packet-switched information networks TCP/IP packets are only used as the vehicle for transferring any kind of data. As an illustrative example one may consider IP as the way of defining a communications network between a multitude of independently addressable endpoints, and TCP as the way of setting up, maintaining and tearing down temporary communication connections within said communications network. Completely different protocols may then define the form and content of the data that is encapsulated as payload into TCP/IP packets for transmission. A versatile firewall may comprise e.g. a filtering rule according to which TCP/IP packets from a certain external source are only passed if they are related to an http (hypertext transfer protocol) connection but rejected otherwise. In order to implement such a rule the firewall looks closely enough at each packet to see, whether an http header follows the TCP/IP header in the packet.

[0005] Also the concept of stateful inspection has been introduced in connection with firewalls. At the priority date of this patent application the exact meaning of stateful inspection is not well established, but most often it is taken to mean some kind of time and connection dependent firewall functionality. This means that a filtering rule at the firewall is valid e.g. only for the duration of a certain TCP/IP connection; in other words the firewall functionality is tied to the state of each connection. The purpose of such stateful inspection is to "close the doors" after a trusted and accepted connection has come to an end, so that nobody can later deceptively utilize the same source address by pretending to be the trusted user residing at that address.

[0006] The common and most serious drawback of all packet filtering firewall solutions known at the priority date of this patent application is that no attention is actually paid to whether the payload data in the TCP/IP packets is what it pretends to be. At most a firewall recognizes that the stream of packets that belongs to a certain active TCP/IP connection appears to carry something defined by protocol X, which we can here denote as the third protocol (taken that the TCP and IP are the first and second protocols respectively). The firewall may check for indications about a certain third protocol being in use, and use such basic indications in making a filtering decision, but it is not capable of monitoring, whether there is anything suspicious in the way in which the third protocol is being used. For example various video protocols exist that involve procedures complicated enough for the firewall to be essentially incapable of monitoring, whether the exchanging of packets is proceeding as is should.

[0007] The known solution to the above-mentioned drawback is to replace a simple firewall with a more versatile monitoring and controlling arrangement known as an application gateway or just AG for short. An application gateway differs from a firewall in that the latter is just a packet-level filter that only performs filtering packet by packet on the basis of (TCP/IP) header information, while the former comprises complete knowledge about how a certain third protocol should work so that it can monitor, whether a certain connection proceeds according to said certain third protocol. One of the simplest imaginable application gateway approaches is to check, whether all packets that carry the header of a certain third protocol actually conform to the regulations concerning packet composition under said third protocol. More elaborate application gateway arrangements may e.g. monitor, whether a sequence of handshake messages exchanged under said third protocol conforms to the appropriate regulations concerning handshakes.

[0008] For example application gateways specific to the SMTP (Simple Mail Transfer Protocol) are known. These are security-enhancing devices that are coupled between the Internet and an e-mail server that runs the e-mail functionality of a corporate network. The task of an SMTP-specific application gateway is to monitor all TCP/IP connections that carry SMTP-related traffic, i.e. e-mails to and from the corporate network. The application gateway ensures that these connections only proceed according to the SMTP specifications.

[0009] The difference between a firewall and an application gateway has been illustrated so that while a firewall is merely a properly instructed mail sorter who reads the addresses of sender and recipient on each envelope and either forwards or shreds the sealed envelopes accordingly, an application gateway is the corporate lawyer who opens the envelope, reads the letter contained therein and evaluates

its true meaning before either passing the letter on to its original intended recipient or taking some other appropriate action.

[0010] An application gateway is definitely an advancement beyond firewalls that only perform packet-level filtering. However, it represents a step backwards in throughput, complexity and susceptibility to software crash. Implementing application gateway functionality requires considerable computational effort, which inevitably increases the expected delay in letting through also packets that are completely legal and valid. Application gateways may require considerably more memory than firewalls, because monitoring the proceeding and state of connections requires the accumulation of connection history data concerning each monitored communication. It is sad but true that whenever one increases the amount of program code that is used to perform a certain task, an increase is also to be observed in the probability that the code simply contains an error or otherwise does something unexpected under some specific operational conditions.

[0011] The publication U.S. Pat. No. 5,623,601 (Vu) describes the basic concept of an application gateway. The "gateway station" of Vu contains application level proxies that perform data screening in order to reject potentially dangerous packets. All IP packets, ICMP (Internet Control Message Protocol) messages and source routing packets are intercepted. The publication mentions as a specific advantage that none of them are forwarded between the external, potentially hostile network and the private network; direct communication therebetween is effectively disabled. While providing a very good basic level of security, this approach has all the above-mentioned drawbacks that relate to limited throughput, high complexity and susceptibility to software crash due to the sheer amount of program code involved.

[0012] The publication U.S. Pat. No. **5,950,195** (Stockwell et al.) describes actually an application gateway arrangement, although it uses the term firewall. The publication specifically states that not only message traffic but also message content is reviewed. Also this solution involves problems regarding slow processing, complexity, and susceptibility to software crash.

[0013] The publication U.S. Pat. No. 6,182,226 B1 (Reid et al.) is comparable to those mentioned above in that it suggests implementing significant parts of application gateway functionality within the operating system kernel of the "firewall" computer. The kernel is the part of computer software that should operate as fast and as reliably as possible, which is in direct conflict with the teachings of Reid et al.

[0014] The publication U.S. Pat. No. 6,212,558 B1 (Antur et al.) provides a listing of firewall types that is in good accordance with the definitions used in this patent application. The publication suggests that the security functions could be distributed to several computer devices in the network. Remarkable interest is placed upon administrating a multitude of firewalls so that uniformity of security policies is maintained.

SUMMARY OF THE INVENTION

[0015] It is an object of the present invention to provide the level of security associated with application gateways while simultaneously enabling low complexity, short delays and high reliability in routine processing of packets. It is another object of the invention to provide an application gateway arrangement that is easy to administrate and update according to need. It is a further object of the invention to provide an application gateway arrangement that minimizes the amount of reconfiguration work needed on the workstations of a protected domain. It is yet another object of the invention to provide an application gateway arrangement that combines universal applicability with possibilities of customizing the application gateway functionality to the needs of specific organizations.

[0016] The objects of the invention are achieved by implementing packet-level processing in the operating system kernel of a firewall computer, by setting up at least one protocol-specific application gateway somewhere else than in the operating system kernel of the firewall computer, and by instructing the packet-level processing process to recognize packets associated with the protocol that the protocol-specific application gateway handles and to direct the recognized packets to the application gateway.

[0017] The characterizing features of the various methods according to the invention are recited in the characterizing portions of the independent patent claims directed to methods.

[0018] The characterizing features of the various systems according to the invention are recited in the characterizing portions of the independent patent claims directed to systems.

[0019] The characterizing features of the various devices according to the invention are recited in the characterizing portions of the independent patent claims directed to devices.

[0020] The characterizing features of the various software program products according to the invention are recited in the characterizing portions of the independent patent claims directed to software program products.

[0021] Various further advantageous embodiments of the invention are presented in the depending patent claims.

[0022] The fact that only basically filter-type packet-level processing is performed in the operating system kernel of a firewall computer helps to keep the kernel's complexity low and reliability correspondingly high. Application gateways can be handled as modules external to the basic firewall process, which makes it easy to add, remove, replace or update application gateways according to need. The application gateway(s) can be made completely transparent in terms of network addressing by adhering to a suitable address handling policy, which means that the workstations of the protected domain can remain completely unaware of any application gateway being used. Application gateways may be made to only pay attention to protocol-specific matters, thus making it easy for the manufacturer to reproduce and distribute large numbers of application gateways in a cost-effective way. Simultaneously it is possible to customize the application gateways in any desired way, because the basic approach does not limit the rules that the application gateways are programmed to enforce.

[0023] We use the generic terms "packet processing", "packet processor component" and "packet processor part"

to denote the process or the part of a process that regarding the invention produces the decisive result about redirecting: packets are examined just enough to find out, whether they should be redirected to an application gateway or not. In known architectures where the decision about redirecting follows from the application of certain packet-level filtering rules, packet processing in this sense is equal to packet-level filtering. However, the invention does not require any specific mechanism to be used for making the decisions about redirecting.

[0024] Once a packet processor component has recognized that a certain packet should be redirected to an application gateway, it is simple to achieve the actual redirecting e.g. by changing the values of certain destination address and destination port fields in the packet so that the new values indicate the application gateway as the destination. Conventional packet handling will then take care of routing the packet to the application gateway. Also other mechanisms are available for the redirecting.

[0025] The application gateway should in any case receive information about the original destination address and destination port of each packet. Various signalling schemes can be utilized to transfer such information between the packet processor component and the application gateway, if the information is not available any more in the redirected packet itself.

[0026] After successful application gateway processing the processed packet should be again directed towards their original destination. This task can be either on the responsibility of the application gateway, or on the responsibility of the packet processor component if the application gateway returns all packets to it after they have been subjected to application gateway processing.

BRIEF DESCRIPTION OF DRAWINGS

[0027] The novel features which are considered as characteristic of the invention are set forth in particular in the appended claims. The invention itself, however, both as to its construction and its method of operation, together with additional objects and advantages thereof, will be best understood from the following description of specific embodiments when read in connection with the accompanying drawings.

[0028] **FIG. 1** illustrates a principle of the invention,

[0029] **FIGS. 2***a* to **2***c* illustrate certain alternative packet routes in a system according to the invention,

[0030] **FIG. 3** illustrates the division of functionalities into kernel mode and user mode in the invention,

[0031] **FIGS. 4***a* to **4***h* illustrate certain routing alternatives in a system according to the invention,

[0032] **FIGS. 5***a* to **5***c* illustrate certain alternatives for device configuration in a system according to the invention,

[0033] **FIGS. 6***a* to **6***c* illustrate methods according to certain embodiments of the invention,

[0034] **FIGS. 7***a* and **7***b* illustrate methods according to certain other embodiments of the invention and

[0035] **FIGS. 8***a* and **8***b* are block diagrams of arrangements according to certain embodiments of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0036] The exemplary embodiments of the invention presented in this description are not to be interpreted to pose limitations to the applicability of the appended claims. The verb "to comprise" is used as an open limitation that does not exclude the existence of also unrecited features. The features recited in depending claims are mutually freely combinable unless otherwise explicitly stated.

[0037] **FIG. 1** illustrates schematically a situation where an untrusted packet-switched information network **101**, typically the Internet, is separated from a private packet-switched information network **102** by a firewall device **103**. Coupled to the untrusted packet-switched information network **101** there are various data sources, of which **FIG. 1** shows a first source **104** meant for transmitting data that inside the TCP/IP encapsulation conforms to a certain protocol A, a second source **105** that inside the TCP/IP encapsulation conforms to a certain protocol B, and a third source **106** that is forbidden in the sense that no packets from that source should be accepted into the private packet-switched information network **102**. An exemplary user **107** of the private packet-switched information network **102** also appears in **FIG. 1**.

[0038] According to the invention the firewall device **103** comprises a packet processor part **110** and an application gateway part **111**. **FIG. 1** illustrates especially an embodiment of the invention where all connections between the firewall device **103** and the networks **101** and **102** go through the packet processor part **110**, and the application gateway part **111** is only at the end of a "blind track" from the packet processor part **110** with no external connections of its own. Later in this description we will discuss other possibilities for arranging the connections of the application gateway part **111**. All connections shown in **FIG. 1** are bidirectional.

[0039] For the purpose of an example we will assume that the application gateway part **111** is strictly specific to protocol A. Additionally we will assume that packets originating from the second source **105** and containing data according to protocol B are considered safe by the firewall device **103**. These assumptions together with the forbiddenness of the third source **106** mean that the packet processor part **110** operates as follows: It examines incoming packets from the untrusted packet-switched information network **101** and directs to the application gateway part **111** all packets that come from the first source **104**, because they contain data that conforms to protocol A. After application-specific processing in the application gateway part **111** these packets continue to the original intended recipient **107**. All packets that come from the second source **105** and contain data that conforms to protocol B are let directly through to the private packet-switched information network **102**, while all packets that come from the third source **106** are simply rejected. **FIGS. 2***a*, **2***b* and **2***c* illustrate these alternatives respectively.

[0040] Division of Functions into Kernel Mode and User Mode

[0041] An important factor that affects the usability and reliability of the application gateway arrangement according to the invention is the division of duties between the packet

processor part **110** and the application gateway part **111**, and the practical implementation of these divided duties as kernel mode and/or user mode processes. **FIG. 3** illustrates these aspects of the invention. A fundamental principle in the division is that the functions that are on the responsibility of the packet processor part **110** are typically implemented as kernel mode processes, while the application gateway part **111** typically operates in user mode. Packet-level filtering is relatively simple to implement, which means that the program code that contains all the filtering instructions is simple and short enough to fit into a typical kernel and to run reliably under a variety of operating conditions, even exceptional ones. On the other hand the packet processor part **110** must also handle all packet traffic that goes through the firewall device, which advocates as fast and efficient continuous operation as possible; this is a further reason for implementing the packet processor part **110** in kernel mode.

[**0042**] Although fast and efficient operation would be advantageous also for the application gateway part **111**, it typically involves passages of program code that are too extensive and complicated to qualify as suitable for kernel mode. Regarding the overall operational reliability it is better to implement the application gateway functionalities in user mode.

[**0043**] The packet processor part **110** is responsible for receiving all packets that come through the firewall device. It is also naturally responsible for performing the known tasks of a packet-filtering firewall for all those packets that will not be subjected application gateway processing. We continue assuming that the application gateway is strictly protocol-specific, so all packets that contain data pertinent to other protocols are just subjected to firewall processing at the packet processor part. The variety of possibly encountered other protocols is extremely large, so we may well say that packets that contain data according to most of the possible protocols are never directed from the packet processor part **110** to the application gateway part **111**.

[**0044**] For those packets that indeed contain data pertinent to the protocol(s) handled by the application gateway part **111** the packet processor part **110** performs the necessary redirecting operations. In order to keep such redirecting transparent, or at least to keep it from interfering with the continued journey of the packets after application gateway processing, the packet processor part **110** must also signal certain additional information to the application gateway part **111**. We will describe both redirecting and signalling in detail later in this description. A yet another task of the packet processor part **110** is the redirecting of processed packets towards their original intended recipients after the application gateway part **111** has returned the packets. The last-mentioned naturally only applies if the application gateway part **111** does not take care of any redirecting independently.

[**0045**] The tasks of the application gateway part **111** are receiving packets from the packet processor part **110**, performing the actual application gateway processing, taking part in the signalling of additional information with the packet processor part **110** and returning processed packets so that they can be forwarded towards their original intended recipients.

[**0046**] At least one communications channel **301** must exist between the packet processor part **110** and the application gateway part **111** in order to convey both packets and additional signalling information. The actual implementation of the communications channel **301** can vary depending on whether the packet processor part **110** and the application gateway part **111** are implemented in a single physical device or in at least two different physical devices, and whether the signalling takes place "in-band" (i.e. as an integral part of the stream of conveyed packets) or "out-of-band" (i.e. otherwise).

[**0047**] Different Routings of Packets

[**0048**] **FIGS. 4***a* to **4***h* illustrate certain alternative routing principles. Here we are only interested in packets that contain data pertinent to a protocol that is in principle handled by an application gateway part **111**, so in the following the routing of other kinds of packets is not considered; they would just go through the packet processor part **110** anyway. The communicating parties are a transmitting external host **401** and a receiving internal host **402**, or a transmitting internal host **412** and a receiving external host **411** respectively. The fourth party taking part in the packet routing is a packet processor part **110**. The illustrations appear in four pairs so that **FIGS. 4***a* and **4***b*; **4***c* and **4***d*; **4***e* and **4***f*; as well as **4***g* and **4***h* belong together.

[**0049**] The routing principle illustrated in **FIGS. 4***a* and **4***b* is the full bidirectional blind track approach, where both the external and internal hosts remain completely unaware of there being an application gateway involved although the packets go through the application gateway part **111**. Routing to and from the application gateway part **111** is always performed by the packet processor part **110**.

[**0050**] The routing principle illustrated in **FIGS. 4***c* and **4***d* is the full bidirectional zigzag route approach, where the packets transmitted by an external host **401** to an internal host **402** go through the packet processor part **110** and the application gateway part **111** in this order and continue from the latter directly to the internal host **402**, and the packets transmitted by an internal host **412** to an external host **411** follow the same route in reverse direction.

[**0051**] The routing principle illustrated in **FIGS. 4***e* and **4***f* is one where incoming packets take the blind track route back and forth between the packet processor part **110** and the application gateway part **111**, while outgoing packets go straight through the packet processor part **110** without visiting the application gateway part **111** at all. Allowing outgoing packets to bypass the application gateway part **111** reflects an assumption according to which no harm can be caused to the protected network by these outgoing packets, as long as the corresponding incoming packets are subjected to application gateway processing.

[**0052**] The routing principle illustrated in **FIGS. 4***g* and **4***h* is one where incoming packets take the zigzag route through the packet processor part **110** and the application gateway part **111**, while outgoing packets go straight through the packet processor part **110** without visiting the application gateway part **111** at all.

[**0053**] All those routing principles where packet traffic between the firewall device and both external and internal hosts goes through the packet processor part **110**, and the application gateway part **111** only constitutes the end of a blind track, share the advantageous feature that the existence of an application gateway does not require specific configu-

ration of the internal hosts. For example in a situation where a new application gateway is added to handle a protocol that was formerly only dealt with by the packet processor part **110**, the only place that requires changes is the packet processor part **110**. This is a major advantage if the number of internal hosts is large, like in the private corporate network of a large company.

[**0054**] On the other hand it is perfectly possible, although potentially laborious, to configure the internal hosts so that all outgoing packets that contain data pertinent to the protocol handled by an application gateway are sent within the internal network to the application gateway part **111**, while all other outgoing packets are transmitted to the packet processor part **110**. It is even possible to make the internal hosts transmit all outgoing packets within the internal network to the application gateway part **111**, but such an approach saddles the application gateway part **111** with the additional task of rerouting all such packets to the packet processor part **110** that do not need application gateway processing. The rerouting would actually require a certain packet filtering functionality to be added as a preliminary stage of application gateway processing, which definitively means adding excessive processing and delay.

[**0055**] The laborious task of reconfiguring all internal hosts can be at least partly avoided by instructing the application gateway part to tamper with the incoming packets so that they become to contain appropriate return path instructions for a return path that goes through the application gateway part. This means that all packets that an internal host will transmit as a response to first having received packets through an application gateway part will also go out through the application gateway part without any explicit configuration changes having been made at the internal host.

[**0056**] The embodiments where the application gateway part **111** sends incoming packets directly to their final recipients without circulating them once more through the packet processor part **110** have naturally the advantage that the traffic load at the latter remains smaller. It is indeed one of the duties of the application gateway part **111** to keep track on the intended recipient of each packet it processes, so it is natural that it knows the recipients and is therefore capable of bypassing the packet processor part **110** in sending the processed packets further. Not circulating the processed packets back to the packet processor part **110** appears to be advantageous at least in those hardware arrangements where the application gateway part **111** is physically located in a different computer device than the packet processor part **110**.

[**0057**] Physical and/or Logical Machine Compositions

[**0058**] The machine composition for implementing the packet filter and application gateway parts that is simplest in terms of the number of involved devices is the one where both the packet processor part and the application gateway part are implemented in one and only computer device. In some cases it is more advantageous to use two or more devices to put the packet filter and application gateway functionalities into practice. Also in the case of a single physical device there are various alternative possibilities of setting up the architecture that defines the logically different functional entities and their mutual connections. **FIGS. 5***a*, **5***b* and **5***c* illustrate certain basic architectural alternatives. In **FIG. 5***a* there are three different application gateways **501**, **502** and **503**, each of which is arranged to handle a different protocol. Such a modular approach is most advantageous in a situation where frequent changes are possible in the number and/or nature of the protocols that are to be subjected to application gateway processing, because a certain change only affects a small part of the general arrangement and leaves most of it untouched.

[**0059**] In **FIG. 5***b* there are likewise three different application gateways **511**, **512** and **513**, but this time each of them is arranged to handle the same protocol. This approach is most advantageous in a situation where large variations are possible in the volume of packet traffic that needs to be subjected to application gateway processing. The packet filter **110** may follow the loading situation of each application gateway and use its routing capability to distribute the processing tasks as equally as possible, or according to some other distribution rule. In **FIG. 5***c* there is only one physical device **522** for implementing the application gateway processing according to any of a number of protocols.

[**0060**] All kinds of combinations of the basic principles illustrated in **FIGS. 5***a*, **5***b* and **5***c* are possible. Any of these principles and their combinations can also be used together with any of the routing principles described previously. Yet another possibility is to set up at least two parallelly operating packet processor parts that together use the same application gateway part(s).

[**0061**] Signalling in General

[**0062**] In order for the application gateway part to be able to perform efficient application gateway processing it must obtain information about the original source address, source port, destination address and destination port values of a packet it receives. In those cases where the application gateway part receives outgoing packets directly from an internal host this task is trivial. However, much more complicated situations arrive in those much more typical cases where the application gateway part receives packets from the packet processor part. This is especially true if the packet processor part also performs NATs (Network Address Translations).

[**0063**] Performing a NAT means generally that a network node, typically a firewall device, translates an IP address used within one network to a different IP address known within another network. For example a company may use a firewall device to map its local inside network addresses to one or more global outside IP addresses and correspondingly unmap the global IP addresses on incoming packets back into local IP addresses. Performing a NAT, or NATting, is a known way to enhance security, because each outgoing or incoming request must go through a translation process that also offers the opportunity to qualify or authenticate the request or match it to a previous request. NATting also conserves on the number of global IP addresses that a company needs. It lets the company use a single IP address in its communication with the world. NATting has been treated in an IETF (Internet Engineering Task Force) document RFC 1631, where the acronym RFC comes from Request For Comments. Said document is incorporated herein by reference.

[**0064**] NATting as such is a very advantageous way of achieving the desired redirecting of packets from the packet processor part to the application gateway part. A first reason

for its advantageousness is that it is straightforward to perform with well-tested, robust and yet simple kernel mode routines that exist as such and are known as such. A second reason is that it does not increase the size of any packet so processed, which means that it is guaranteed not to cause packet size overflow even if the size of a certain packet to be processed was already at or very close to a certain maximum limit. A third reason is that NATting requires little or no specific attention to be paid to the devices and/or processes that take care of actually taking the packet from the packet processor part and carrying it to the application gateway part, regardless of the location of the packet processor part and the application gateway part within devices and/or networks: a NATted packet comprises, at the appropriate field, a destination address that identifies the application gateway part as its destination. It lies within the very essence of practically operable packet-switched networks that efficient and reliable devices and processes exist for taking each packet to the destination that is indicated in the packet's destination address. The packet processor part can simply leave it to the responsibility of the normal routing processes to take care of actually carrying NATted packets to the application gateway part.

[0065] It should be noted that NATting is available as means for redirecting packets from the packet processor part to the application gateway part regardless of whether the former uses NATting for anything else. Additionally it should be noted that just in order to redirect a packet to an application gateway part it is not required to touch the original source address of the packet at all. The packet processor part might leave the source address as it is, and only replace the destination address with that of the application gateway part. This would eliminate the need for separately signalling the original source address from the packet processor part to the application gateway part. Throughout this description wherever signalling of original source and destination addresses is mentioned one should keep in mind that signalling only the original destination address is sufficient if the redirecting operation left the source address untouched.

[0066] NATting also the source address is useful if the application gateway part is to return processed packets to the packet processor part, because then returning could be simply accomplished by swapping the source and destination addresses of each packet at the application gateway part and leaving it to the normal network routines to actually carry the packet back to the packet processor part. Embodiments of the invention can be produced where it is not necessary to use packet-associated signalling to make the application gateway part aware of the packet processor part's address. For example, if the application gateway part is located at the end of a "blind track", one may simply define that all packets that leave the application gateway part should always go to the packet processor part because they have nowhere else to go. Alternatively the application gateway part may be separately configured to return packets to the packet processor part, without requiring the packet processor part to transmit its address every time when original values of address fields are signalled.

[0067] A NATted packet that comes from the packet processor part to the application gateway part does not explicitly reveal to the latter all required information. Therefore the packet processor part must take specific action to provide the application gateway part with the necessary information. We will refer to all such specific action measures as signalling. One should note that signalling is not necessarily unidirectional from the packet processor part to the application gateway part. The term signalling is meant to cover also the transmission of other information than just the packets themselves from the application gateway part to the packet processor part. Signalling may take place in-band, which means that the signalled information is carried in one way or another as a part of the stream of TCP/IP packet that is being transferred between the packet processor part and the application gateway part. The other possibility is out-of-band signalling, which means that some other means are utilized.

[0068] In order to simplify the structure of the application gateway part proper one may use a simple deNATting/reNATting layer in immediate association therewith. Such a layer would be located next to the application gateway part between it and the packet processor part. The deNATting/reNATting layer is in such embodiments the peer entity of the packet processor part regarding signalling. The packet processor part directs a packet towards the application gateway part and informs the deNATting/reNATting layer about the original source and destination information of the packet. The deNATting/reNATting layer receives the packet, performs deNATting by replacing the NATted source and destination information values with the original ones it received through signalling, and passes the deNATted packet to the application gateway part. The latter processes the packet as if it had received it directly from its original source, and remains unaware of the packet having already experienced NATting in a packet processor part and deNATting at a deNATting/reNATting layer. After the application gateway part has processed the packet it either forwards it directly towards its original destination, or gives it to the deNATting/reNATting layer for returning to the packet processor part. In the latter case the packet is subjected to reNATting and source/destination switching at the deNATting/reNATting layer, which causes it to return to the packet processor part.

[0069] The description of all embodiments of the invention where the packet processor part is said to practice signalling with the application gateway part can be generalized by taking into account that such signalling can also take place between the packet processor part and an deNATting/reNATting layer next to the application gateway part.

[0070] Inband Signalling

[0071] A first possible way of transmitting the signalled information in-band is to utilize TCP's known URGENT POINTER field and URG bit so that in a packet that contains signalled information the transmitting party sets the URG control bit and inserts into the URGENT POINTER field the current value of the urgent pointer as a positive offset from the sequence number in the corresponding TCP segment. The urgent pointer points to the sequence number of the octet following the urgent data, which in this example is the signalled information. In practice the signalled information would be placed at the very beginning of the TCP payload so that the value at the URGENT POINTER field tells, where in the TCP payload is the point where the signalled information ends and the actual, original TCP payload begins.

[0072] A second possible way of transmitting the signalled information in-band is related to the first in that a conventional feature of the TCP/IP protocol is used: one may utilize one or both of the Options fields that are present in both the IP and the TCP header portion of each TCP/IP packet. The rules that govern the use of the Options fields are known e.g. from the IETF Request For Comments documents number RFC 791 (IP) and RFC 793 (TCP) that are incorporated herein by reference.

[0073] A third possible way of transmitting the signalled information in-band is to utilize another conventional protocol as an encapsulation for a TCP/IP packet and the associated signalled information. For example one may encapsulate them into a Socks packet. Socks is a known protocol that a proxy server can use to accept requests from client users in a company's network so that it can forward them across the Internet. Socks uses sockets to represent and keep track of individual connections. More information about Socks can be found in an IETF document RFC 1928, which is incorporated herein by reference.

[0074] A fourth possible way of transmitting the signalled information in-band is to utilize certain customized protocol features that are defined just for this purpose. For example one may prescribe that the transmitting party always inserts the signalled information right after the header of a packet and before the payload part. Or the transmitting party may compose a completely new header that serves just to direct a packet to the receiving party, and prepend this new header to a conventional packet before the original header. The receiving party then just strips the appended header and reads the "signalled" information from the original header as if it had just received the packet from its original sender. Customized protocols work well if one can be sure that both the transmitting and receiving ends are familiar with the customization, and that the transmission channel therebetween does not cause distortions to the non-standard protocol features.

[0075] All in-band signalling mechanisms have one at least theoretically serious drawback. A packet that arrives at a packet processor part may already have a size equal to the absolute maximum tolerable packet size. In that case it is impossible to add any new fields or new headers or use any enveloping for inserting signalled information.

[0076] It is possible to use fragmenting defined in the known TCP/IP standards so that in case the addition of signalling information causes a maximum packet size overflow, the transmitting party simply fragments the resulting overgrown packet into two or splits it into two TCP packets (according to established language of this field fragmenting refers to manipulating packets on the IP level, while splitting refers to the TCP level). However, preparing for fragmenting or splitting would require the implementation of an almost complete TCP/IP stack, which is not desirable for an efficient kernel mode process such as a packet processor part.

[0077] Especially in embodiments where the packet processor part and the application gateway part are physically located in a single computer device one may define an internal MTU (Maximum Transmission Unit) that is large enough to accommodate any imaginable combinations of large TCP/IP packets and associated signalling information. This approach would dissolve the above-mentioned drawback because no matter how large the TCP/IP packet, internally one would always be allowed to add signalled information to it. However, such a solution would tend to limit the applicability of the invention, because it necessitates permission to modify the TCP/IP protocol stack as well as certain operating system features. Generally it is impossible to assume that even the internal MTU of a computer could be made arbitrarily large, because limitations in certain operating systems may set an absolute upper limit. It should also be noted that if the packet processor part and the application gateway part are not physically located within a single computer device, the transmission path therebetween may set limitations to packet size.

[0078] The drawback of potential maximum packet size overflow is actually not that serious, if we assume that not every packet needs to contain signalled information. It is very reasonable to assume that the need for signalled information will concentrate to the initiation phase of each TCP connection. The first packet that initiates a TCP connection is the so-called SYN packet, which comes almost always without any specific payload. The TCP standard itself allows data to be transmitted already in the SYN packet, but practice has shown that a vast majority of transmitted SYN packets are indeed empty so they are well suited for fattening up with some signalled information.

[0079] Out-of-Band Signaling

[0080] A first possible way of transmitting the signalled information out-of-band is to utilize the well-known UDP (User Datagram Protocol) that offers a limited amount of service when short messages are exchanged between computers in an IP network. It is known that network applications that want to save processing time because they have very small data units to exchange (and therefore very little message reassembling to do) may prefer UDP to TCP. The piece of signalled information is typically small enough to fit into a single UDP packet, so the transmitting party may simply compose an UDP packet with the signalled information as payload and transmit it to the receiving party. Composing and handling UDP packets of limited amount of readily available information is well within the scope of a kernel mode packet processing engine.

[0081] A second possible way of transmitting the signalled information out-of-band is to utilize some other known protocol than UDP, or indeed even a custom-built signalling packet exchanging protocol, for the same purpose.

[0082] A third possible way of transmitting the signalled information out-of-band, being only possible though in embodiments where the packet processor part and the application gateway part are physically located in a single computer device, is to utilize any of the known communications channels between kernel mode processes and user mode processes. Such communications channels are usually strictly specific to certain operating systems. For example in unix-type systems there exist several ways of utilizing sockets and socket reading functions that carry names such as recv, recvfrom, or recvmsg. Another unix-related possibility is to communicate through socket options; applicable functions carry names such as getsockopt and setsockopt. Yet other unix-related system functions that can be used are the known IOCNTL and FCNTL functions, the corresponding longer names being input-output control and file control respectively.

[0083] All out-of-band signalling schemes involve the problems of ensuring that the signalled information indeed

reaches its destination and that it is correctly associated with the transmitted packets that it describes. Questions of the latter kind are addressed below under the header "connection identification". Regarding the task of ensuring delivery, certain alternative options are again available. The most straightforward approach is to just send each out-of-band signalling message once and accept the fact that if the message is somehow lost, corrupted or fatally delayed, the signalled information will not reach its destination and the process that would have needed it will fail. This approach is not as bad as one might assume at first sight, because both the physical distance (in terms of cable length) and the logical distance (in terms of number of processes and devices that take part in handling the signalling message) involved are relatively short compared to general transmission over worldwide networks and the transmission reliability is therefore relatively high. Transmission reliability can be further enhanced through simple redundancy: instead of transmitting just once, each signalling message is transmitted in several copies.

[0084] A more elaborate out-of-band signalling scheme is based on bidirectionality and information-on-demand. Signalling messages are therein not transmitted spontaneously but only as responses to a query. For example when the application gateway part has received packets for which it does not yet know the required information about original source and destination, it sends an UDP packet to the packet processor part and lists therein the source/destination information it observed in a TCP/IP packet received from the packet processor part. The latter then responds to the querying UDP packet by returning another UDP packet that contains the required signalled information.

[0085] A hybrid out-of-band signalling scheme may also be presented combining the features of (redundant) spontaneous and responsive out-of-band signalling. According to the hybrid scheme the transmitting party sends one or more signalling messages spontaneously, and the receiving party only sends an inquiry if it still did not receive any signalling message within a certain time after it received a TCP/IP packet for which it needed information about original source and destination. The hybrid scheme (as well as the "more elaborate" scheme described above) can be based on the use of UDP or any other suitable messaging protocol.

[0086] Connection Identification

[0087] TCP/IP packets come in discrete packet streams, which is equal to saying that each TCP connection has a beginning, a limited duration and an end. During a TCP/IP connection the source and destination addresses and port numbers do not change, which means that is would be most economical to only make the packet processor part indicate to the application gateway through signalling the required information once per each connection, not packet per packet. This means that the event that triggers the signalling process is either the arrival of the first packet of a new TCP connection at the packet processor part, or—in embodiments based on interrogative signalling—the arrival of the first packet of a new TCP connection at the application gateway part, said packet having been redirected to the application gateway part by the packet processor part.

[0088] Only signalling the required information once per connection works fine, if the packet processor part does not change the original contents of the destination address field during redirecting or if one can be sure that no such simultaneous connections will occur that would be at risk of being confused. Changes in the original contents of the destination address field do not occur in those embodiments where the packet processor part prepends some new headers to the redirected packets, or more generally in all such embodiments that retain essentially all of the original header information readable in the redirected packets. The question of potentially confused simultaneous connections is highlighted in the following example.

[0089] Let us assume that a user at machine A initiates an ftp (file transfer protocol) connection to machine ftp1.company.com and a bit later to a different machine ftp2.company.com, and company.com has implemented a packet filter/application gateway system according to an embodiment of the present invention. The packet processor part with a stateful filtering engine is in machine fw.company.com. Let us further assume that the application gateway part handling all ftp traffic sits at port 1111 of a machine ag.company.com. Now, the packet processor part redirects the packets of the first connection to port 1111 of ag.company.com, and the ftp-handling application gateway part is informed that these packets should end up at the conventional port for ftp connections at ftp1.company.com. Later, when the user initiates the second connection to the second machine, the packet processor part redirects the packets that belong to this second connection to port 1111 of ag.company.com, and informs the ftp-handling application gateway part that these should go to ftp2.company.com.

[0090] Now the redirected packets of the second connection come from the same machine and same port as the first connection and end up at the same machine (machine ag.company.com) and the same port (port 1111) as the first connection. How can ag.company.com differentiate between these two connections? Actually, it cannot, if it only considers address and port information.

[0091] A naive solution would be to make the packet processor part include some kind of a connection identifier to all redirected packets. This adds communication overhead, might cause MTU problems, and is generally a bad idea.

[0092] A much better solution is to use a range of ports at ag.company.com, and make sure that the combination of source address/source port/destination address/destination port is unique for each connection that has been redirected to proceed via ag.company.com. This means that the packet processor part must choose the destination port for each separate TCP connection so that a unique combination is always obtained.

[0093] What if the machine A is a massive firewall machine (performing NAT) of some large corporation, so that the number of possible connections from A to company.com might be extremely large? UDP and TCP protocols have 65536 ports, so reserving, say, 1000 ports or even more for the range mentioned above would be possible. That would be enough for 1000 simultaneous connections from the machine A to systems in company.com. This limit can further be increased by arranging the packet processor part to change also the source address and port information in the packets, and indicating these along with the original destination information as discussed above. The packet processor part can, for example, change the source address and port

information to refer to those of the firewall computer, fw.company.com, or any other suitable address. If both source port and destination port are used for identifying the connection and a range of 1000 ports are reserved for this use at fw.company.com and ag.company.com, 1000*1000 connections i.e. one million connections could be uniquely identified.

[0094] Packet Restoration

[0095] In those embodiments of the invention where the packet processor part receives processed packets from the application gateway part and transmits them further towards their original intended recipient there must exist a mechanism for restoring the packets so as to complete the transparency of the application gateway processing. In other words the packets that have been subjected to application gateway processing must leave the packet processor part as if they had never been diverted from their original route.

[0096] An advantageous solution for packet restoration goes as follows. At the beginning of a TCP connection, when the packet processor part for the first time sets up a certain relationship between original source/destination information and the modified source/destination information that is used to redirect the packet to the application gateway part, it stores this relationship in a look-up table. The modified source/destination information serves to bring the packet to the application gateway part, which performs its task and processes the packet. Similar replacing of the source/destination information is performed for all packets of the corresponding TCP connection. After having processed a packet the application gateway part switches the source and destination parts of the modified packet header, which causes the packet to be routed back to the packet processor part. There the occurred reversal of the source and destination parts of the modified packet header is taken into account when the packet processor part uses the previously mentioned look-up table to identify the original source/destination information. The packet processor part replaces the modified, switched source/destination / information with the original source/destination information, after which the packet is ready to be transmitted further.

[0097] Changes in the source/destination information fields in the way explained above may be called "double NATting". The packet processor part NATs a packet for the first time in order to redirect it to an application gateway part. When the packet returns from the application gateway part after having been subjected to application gateway processing, the packet processor part NATs it for the second time in order to release it towards its original destination.

[0098] It is also possible to make the application gateway part restore the packets, because as was noted in the general description of signalling, the application gateway part needs to know the original source and destination information for the application gateway processing to be meaningful. Restoring the packets at the application gateway part is even mandatory in those embodiments of the invention where the packets do not go through the packet processor part any more after application gateway processing. Restoring packets at the application gateway part means simply that after having processed a packet the application gateway part reads the original source and destination information pertinent to that packet from its memory and writes it into the appropriate fields in the packet's header before releasing the packet for transmission towards its original intended recipient.

[0099] Care must be taken if the packet processor part and the application gateway part are physically implemented in a single computer device and if it is on the responsibility of the application gateway part to restore the packets. By default, namely, the packet processor part will have no means for telling an already processed packet from one that still awaits to be redirected to the application gateway part. Some means must be provided for keeping packets from ending up in an endless loop between the packet processor part and the application gateway part.

[0100] Dynamic Changes in Packet Processing

[0101] In the foregoing we have implicitly assumed that the packet processor part operates according to some relatively fixed set of instructions regarding redirection of packets to the application gateway part. Indeed, in simple embodiments of the invention such fixed instructions are given to the packet processor part at the time when an application gateway is installed or the operation of an installed application gateway is modified. However, the invention encompasses also embodiments where dynamic changes in packet processing are possible. Dynamic changes in this sense mean that at least one of the packet processor part and the application gateway part discovers something in the stream of packets that requires a different packet handling strategy to be implemented than before, and takes action in order to implement such a different packet handling strategy.

[0102] As an example we may consider a situation where an application gateway part is in general arranged to handle packets that pertain to ftp. Initially, however, a packet processor part is instructed to redirect only packets that contain ftp control channel signalling to the application gateway part. Packets that are related to an ftp data channel would have a different port number than those related to the ftp control channel signalling, and therefore it is possible that initially the packet processor part is not instructed to redirect them to the application gateway part. According to the principle of dynamic changing the application gateway part may respond to the arrival of certain ftp control channel signalling by asking the packet processor part to change its redirecting strategy so that also the ftp data channel packets will be redirected, for example in order to check for viruses that might come embedded in a file transferred over the ftp data channel.

[0103] Some protocols require two or more port numbers for themselves. An example is the Real Time Protocol or RTP, which is discussed in the known IETF document RFC 1889. It requires two consecutive port numbers of which one is for data and the other is for control. Dynamic changes can be utilized so that when an RTP application gateway part detects the arrival of RTP-related packets that have a certain port number, it instructs the packet processor part to add a new redirection rule according to which packets that have the immediately adjacent port number must also be redirected.

[0104] It is not necessarily the application gateway part that reacts to achieve dynamic changes in redirecting. At least in cases where a certain protocol requires two or more

port numbers for itself and these port numbers are easy to deduce from each other (like in the case of two consecutive port numbers), the packet processor part can achieve dynamic changing for itself. When the packet processor part has detected a packet that has a certain port number, analysed the packet enough to find out that it contains data that pertains to a certain protocol, and consequently decided to redirect it to a certain application gateway part, the packet processor part may by itself deduce the other port number(s) that must necessarily mean pertinence to the same protocol. Thus the packet processor part may define new instructions for itself to redirect also packets that have such other port number to the application gateway part.

[0105] Dynamic changes may naturally involve more than one application gateway parts. Even if a certain first application gateway part was in one way or another involved in detecting the need for a dynamic change, the dynamic change may result in new redirecting instructions for the packet processor part that concern some second application gateway part.

[0106] Method Diagrams

[0107] **FIGS. 6***a*, **6***b* and **6***c* illustrate schematically the main features of the methods executed by the packet processor part according to the invention. **FIG. 6***a* pertains to the phase where a packet processor part that applies packet-level filtering rules receives a packet that it has not yet processed. At step **601** the packet processor part receives a packet and examines it enough to tell, whether the packet contains data that pertains to a certain known protocol. At step **602** the packet processor part checks, whether it knows about an application gateway part that is specialized in handling a protocol that was identified in the packet. We assumed that this packet processor part applies certain packet filtering rules, so the check that is performed at step **602** can be understood as applying at least one of these rules and arriving at a positive finding: the rule states (or: the rules state) that the packet in question is to be redirected to the appropriate application gateway part. A negative finding at step **602** causes the packet to be just processed at step **603** according to certain other (preferably stateful) packet filtering rules, followed by a jump back to step **601**. In a case where outgoing packets related to certain protocol X are not subjected to application gateway processing even if incoming packets related to protocol X are, receiving an outgoing packet results in a negative finding at step **602** because the data in the packet does not pertain to the combination of protocol X and the correct transmission direction.

[0108] A positive finding at step **602** means that the packet processor part should redirect the packet to the appropriate application gateway part. In order not to omit its signalling duties, the packet processor part checks at step **604**, whether the packet in question is the first packet of a TCP/IP connection. If it is, there follows a transition to step **605** in which the packet processor part stores the appropriate header information from the packet. Step **606** represents signalling in general; in case of push-type signalling the packet processor part takes spontaneous action to signal the appropriate header information to the application gateway part, and in case of pull-type signalling it prepares for responding to a query from the application gateway part (the actual querying and respnding round may take place later). Step **606** may even represent no action being taken at all, if the implemented embodiment of the invention is such where redirecting leaves the original source and destination information readable in the redirected packet. Either a negative finding at step **604** or the completion of step **606** lead to step **607**, where the packet is redirected to the application gateway part.

[0109] **FIG. 6***b* illustrates an alternative, more general situation where the assumption of using packet-level filtering rules for packet processing is not required. **FIG. 6***b* is applicable to e.g. connection-oriented of flow-oriented processing where a packet is regarded as belonging to a certain connection or flow if certain features in the packet match with the corresponding features of other, previously handled packets and possibly if some other constraints are met regarding e.g. time intervals between packets or maximum length of a connection or flow in time or number of packets. It is typical to connection or flow oriented processing that detailed considerations about how should a certain connection or flow be handled are only made when the first packet of a certain connection or flow arrives, and thereafter the rest of the packets that belong to the same connection or flow as the first one are handled the same way without every time going through the same detailed considerations again. Regarding the invention it is noted that if the packet processing part finds that the first packet of a certain connection or flow should be redirected to an application gateway part, it is evident that the subsequent packets of the same connection or flow should be handled in similar way, as long as the concept of connection or flow is defined accurately enough to exclude changes of protocol in the middle of a connection or flow.

[0110] At step **611** the packet processor part receives a packet. At step **612** it checks, whether the received packet belongs to a connection or flow that is already known and for which a packet-handling policy has been established. If not, i.e. if the received packet is the first packet of a new connection or flow, certain rules are applied at step **613** in order to determine, what is the appropriate way of handling packets that belong to such a new connection or flow. Without loss of generality we may say that at step **613** the packet processor part defines a policy for handling the newly received packet as well as all subsequent packets that will be found to belong to the same connection or flow. At step **615** it applies this policy; the part of step **615** that is important to the present invention is that if the connection or flow was found to contain packets that require processing at an application gateway part, step **615** means redirecting the packet thereto. In order to accommodate signalling to the method of **FIG. 6***b* a signalling initiation step **614** has been shown. When a new connection or flow has been discovered and the policy for handling its packets has been defined, some kind of signalling must also be initiated similarly as in the case of **FIG. 6***a*.

[0111] **FIG. 6***c* pertains to the phase where the packet processor part receives a packet that has already been subjected to application gateway processing. At step **621** the packet processor part notices that the source from which the packet was received is actually (one of) the known application gateway part(s), which means that there only remain the tasks of restoring the packet at step **622** and transmitting it further towards its original intended recipient at step **623**.

[0112] **FIGS. 7***a* and **7***b* illustrate schematically the main features of the methods executed by the packet processor

part according to the invention. **FIG. 7***a* pertains to the "blind track" embodiments of the invention where the application gateway part receives packets only from a packet processor part and returns processed packets through the same route. At step **701** the application gateway part receives a packet and examines, which TCP/IP connection the packet belongs to. At step **702** the application gateway part checks, whether it already knows the original source and destination information that describe the identified TCP/IP connection. A negative finding at step **702** causes a transition to step **703**, which again represents only generally all the signalling tasks that aim at determining the appropriate original source and destination information. In push-type signalling step **703** means checking, whether the packet processor part has already provided this information spontaneously. If not, step **703** means waiting for such information. In pull-type signalling step **703** means transmitting a query to the packet processor part. If the implemented embodiment of the invention is such where redirecting leaves the original source and destination information readable in the redirected packet, step **703** will not become actual because the application gateway part notes already at step **702** that it has already all necessary information.

[**0113**] After the application gateway part has all necessary source and destination information it can start the actual application gateway processing at step **704**. For those packets that pass the application gateway processing there comes step **705**, in which the source and destination values of the packet are exchanged. This facilitates easy returning of the packet to the packet processor part at step **706**. **FIG. 7***b* illustrates an alternative sequence of steps after steps **704**; here the packet is restored at step **711** to ensure transparency of the application gateway processing, and transmitted further at step **712**. The sequence of **FIG. 7***b* is most pertinent to those embodiments of the invention where the application gateway part forwards incoming packets towards their intended recipients in an internal network without bothering the packet processor part any more with these packets.

[**0114**] Block Diagrams

[**0115**] **FIG. 8***a* illustrates schematically a firewall device **801** that has a first network interface **802** for communicating with a first network and a second network interface **803** for communicating with a second network. The first and second networks correspond to the previously mentioned external and internal networks respectively. The operating system kernel **804** is illustrated as communicating bidirectionally, i.e. transmitting and receiving packets, with both the first **802** and second **803** network interfaces. According to an important aspect of the invention the kernel **804** contains (preferably stateful) packet processor functionality that is arranged to execute the methods illustrated in **FIGS. 6***a* or **6***b* and **6***c*. There is also illustrated a user mode entity **805** that has a bidirectional communication connection for both exchanging packets and signalling with the kernel **804**. According to another important aspect of the invention the user mode entity **805** contains application gateway functionality that is arranged to execute the method illustrated in **FIG. 7***a*, or the modified method illustrated by replacing the appropriate steps of **FIG. 7***a* with those of **FIG. 7***b*. The optional bidirectional communication connection illustrated as a dashed line between blocks **803** and **805** represents the possibility of the application gateway functionality transmitting and receiving packets directly to and from the second network without routing them through the packet processor functionality.

[**0116**] **FIG. 8***b* illustrates schematically a firewall device **811** that has a first network interface **812** for communicating with a first network and a second network interface **813** for communicating with a second network. The first and second networks correspond to the previously mentioned external and internal networks respectively. The operating system kernel **814** is illustrated as communicating bidirectionally, i.e. transmitting and receiving packets, with both the first **812** and second **813** network interfaces. Also in **FIG. 8***b* the kernel **814** contains (preferably stateful) packet processor functionality that is arranged to execute the methods illustrated in **FIGS. 6***a* or **6***b* and **6***c*. Also in **FIG. 8***b* there is illustrated an exemplary user mode entity **815** that has a bidirectional communication connection with the kernel **814**, but this user mode entity is there just for running various control applications of the packet processor functionality and has no significance to the scope of the present invention.

[**0117**] On the other hand there is another computer device **821** that has a communications connection with the firewall device **811** so that a third network interface **816** at the firewall device **811** is arranged to communicate with a network interface **822** at the other computer device **821**. The other computer device **821** comprises typically also an operating system kernel **823**, but it has minor importance to the present invention. Much more importantly in a bidirectional communications connection with the kernel **823** there is a user mode entity **824** that contains application gateway functionality that is arranged to execute the method illustrated in **FIG. 7***a*, or the modified method illustrated by replacing the appropriate steps of **FIG. 7***a* with those of **FIG. 7***b*. In order to potentially bypass the firewall device **811** in exchanging packets with the second network the other computer device may contain another network interface **825** that offers it a bidirectional communications connection to the second network; the optionality of such an arrangement is illustrated in **FIG. 8***b* through using dashed lines. The communications connection between the firewall device **811** and the other computer device **821** can also go through the second network, in which case blocks **813** and **825** are unnecessary and the coupling between blocks **816** and **822** is through the second network.

[**0118**] The kernel **823** or a suitable user mode process at its command can be used to implement the deNATting/reNATting layer that was discussed previously.

1. A method for handling digital data packets at a logical borderline that separates an untrusted packet-switched information network from a protected domain, comprising the steps of:

intercepting, at a packet processor part, a packet that is in transit between the untrusted packet-switched information network and the protected domain,

examining the packet at the packet processor part in order to determine, whether the packet contains digital data that pertains to a certain protocol,

if the packet is not found to contain digital data that would pertain to said certain protocol, processing the packet at the packet processor part, and

if the packet is found to contain digital data that pertains to said certain protocol, redirecting the packet to an application gateway part and processing the packet at the application gateway part according to a set of processing rules based on obedience to said certain protocol;

wherein the packet processor part is a kernel mode process running in a computer device and the application gateway part is a user mode process running in a computer device.

2. A method according to claim 1, comprising the steps of:

regarding a packet that is redirected from the packet processor part to the application gateway part:

replacing an original value of a certain destination information field within the packet with a replacement value that identifies the application gateway part as the destination of the packet,

indicating from the packet processor part to the application gateway part the original value of the destination information field found in the packet at the moment of intercepting the packet at the packet processor part and

using the indicated original value of the destination information field at the application gateway part in processing the packet.

3. A method according to claim 2, comprising additionally the steps of:

replacing an original value of a certain source information field within the packet with a replacement value that identifies the packet processor part as the source of the packet,

indicating from the packet processor part to the application gateway part the original value of the source information field found in the packet at the moment of intercepting the packet at the packet processor part and

using the indicated original value of the source information field at the application gateway part in processing the packet.

4. A method according to claim 2 or **3**, wherein steps of indicating the original values of certain fields comprise transmitting the original values of such fields from the packet processor part to the application gateway part together with the redirected packet, said certain fields including at least one of a source field and a destination field.

5. A method according to claim 4, comprising the steps of:

at the packet processor part:

setting the value of a certain bit in the packet to indicate the presence of urgent information within the packet,

inserting into a pointer field in the packet a pointer value that points at the end of urgent information within the packet, and

inserting the original values of said certain fields as urgent information into the packet immediately before the location pointed at by the pointer value; and

at the application gateway part:

reading the original values of said certain fields from the location in the packet pointed at by the pointer value.

6. A method according to claim 4, comprising the steps of:

at the packet processor part:

setting the value of an options field in the packet to indicate the presence of optional information within the packet, and

inserting the original values of said certain fields into the packet as optional information; and

at the application gateway part:

reading the original values of said certain fields from the packet as optional information.

7. A method according to claim 2 or **3**, wherein steps of indicating the original values certain fields comprise transmitting the original values of such fields from the packet processor part to the application gateway part separately from the redirected packet, said certain fields including at least one of a source field and a destination field.

8. A method according to claim 7, comprising the steps of:

at the packet processor part:

composing a messaging packet that conforms to a messaging protocol, and inserting the original values of said certain fields into the messaging packet together with the replacement values, and

transmitting the messaging packet to the application gateway part; and

at the application gateway part:

receiving the messaging packet, and

associating the original values of said certain fields read from the messaging packet with the replacement values found in the redirected packet.

9. A method according to claim 8, wherein the messaging packet is a User Datagram Protocol packet.

10. A method according to claim 8, wherein the step of transmitting the messaging packet to the application gateway part is performed more than once in order to transmit several redundant copies of the messaging packet to the application gateway part.

11. A method according to claim 7, wherein the packet processor part transmits the original values of said certain fields from the packet processor part to the application gateway part spontaneously.

12. A method according to claim 7, comprising the step of transmitting from the application gateway part to the packet processor part a query for the original values of certain fields, so that the packet processor part only transmits the original values of said certain fields to the application gateway part as a response to said query.

13. A method according to claim 7, wherein the packet processor part transmits the original values of said certain fields from the packet processor part to the application gateway part spontaneously, and if the application gateway part has not received such spontaneously transmitted original values within a certain time limit after the reception of a packet for which such original values would be needed, the application gateway part transmits to the packet processor part a query for the original values of said certain fields, so

that the packet processor part also transmits the original values of said certain fields to the application gateway part as a response to said query.

14. A method according to claim 7, comprising the step of transmitting the original values of said certain fields from the packet processor part to an application gateway part running in the same computer device with the packet processor part through a communications routine that is internal to that computer device and relies on functions defined in an operating system of that computer device.

15. A method according to claim 1, comprising the steps of:

regarding a packet that is redirected from the packet processor part to the application gateway part:

prepending a header to the packet at the packet processor part, the prepended header containing a value that identifies the application gateway part as the destination of the packet,

stripping the prepended header from the packet at the application gateway part and

using the original value of a destination information field in the packet at the application gateway part in processing the packet.

16. A method according to claim 15, wherein the prepended header also contains a value that identifies the packet processor part as the source of the packet.

17. A method according to claim 1, comprising the steps of:

at the packet processor part:

enveloping an original packet to be redirected from the packet processor part to the application gateway part into an enveloping packet; and

at the application gateway part:

extracting the original packet from the enveloping packet.

18. A method according to claim 17, wherein the enveloping packet is a packet according to the Socks protocol.

19. A method according to claim 1, wherein the step of redirecting the packet to an application gateway part involves only transferring the packet to a logically separate entity within the same physical device where the packet processor part resides.

20. A method according to claim 1, wherein the step of redirecting the packet to an application gateway part involves transferring the packet to a device that is physically separate from the device where the packet processor part resides.

21. A method according to claim 1, comprising—after the step of processing the packet at the application gateway part—the further steps of:

returning the processed packet from the application gateway part to the packet processor part and

forwarding such a returned packet from the packet processor part towards an original destination that the packet had at the moment of it becoming intercepted.

22. A method according to claim 21, comprising the steps of:

composing at the packet processor part a mapping function that associates a packet redirected to the application gateway part with an original value of a certain destination information field that said packet had at the moment of it becoming intercepted and

as a response to receiving a processed packet from the application gateway part to the packet processor part, using said mapping function to restore the original value of the destination information field in that processed packet.

23. A method according to claim 22, wherein the mapping function also associates a packet redirected to the application gateway part with an original value of a certain source information field that said packet had at the moment of it becoming intercepted, and as a response to receiving a processed packet from the application gateway part to the packet processor part, said mapping function is also used to restore the original value of the source information field in that processed packet.

24. A method according to claim 21, comprising the steps of:

transmitting from the application gateway part to the packet processor part information that associates a processed packet returned from the application gateway part to the packet processor part with an original value of a certain destination information field that said processed packet had at the moment of it becoming intercepted and

as a response to receiving a processed packet from the application gateway part to the packet processor part, using said transmitted information to restore the original value of the destination information field in that processed packet.

25. A method according to claim 24, comprising the steps of:

transmitting from the application gateway part to the packet processor part information that associates a processed packet returned from the application gateway part to the packet processor part with an original value of a certain source information field that said processed packet had at the moment of it becoming intercepted and

as a response to receiving a processed packet from the application gateway part to the packet processor part, using said transmitted information to restore the original value of the source information field in that processed packet.

26. A method according to claim 1, comprising—after the step of processing the packet at the application gateway part—the further step of:

forwarding such a processed packet from the application gateway part towards an original destination that the packet had at the moment of it becoming intercepted, without circulating the forwarded packet through the packet processor part.

27. A method according to claim 26, comprising the steps of:

transmitting from the packet processor part to the application gateway part information that associates each packet redirected from the packet processor part to the application gateway part with an original value of a

certain destination information field that the redirected packet had at the moment of it becoming intercepted and

after a packet has been processed at the application gateway part, using said transmitted information to restore the original value of the destination information field in that packet.

28. A method according to claim 27, comprising the steps of:

transmitting from the packet processor part to the application gateway part information that associates each packet redirected from the packet processor part to the application gateway part with an original value of a certain source information field that the redirected packet had at the moment of it becoming intercepted and

after a packet has been processed at the application gateway part, using said transmitted information to restore the original value of the source information field in that packet.

29. A method according to claim 1, wherein packets are handled in packet streams, all packets of an individual packet stream having the same values in certain source and destination information fields of each packet, and wherein if the first intercepted packet of a certain packet stream is found to contain digital data that pertains to said certain protocol, that packet and all subsequent packets belonging to the same packet stream are redirected to the application gateway part and processed at the application gateway part according to the set of processing rules based on obedience to said certain protocol.

30. A method according to claim 29, comprising the steps of:

within the first packet and all subsequent packets of a certain packet stream that is found to contain digital data that pertains to said certain protocol, replacing an original value of a certain destination information field with a replacement value that identifies the application gateway part as the destination of the packets, thus enabling redirecting to the application gateway part,

indicating from the packet processor part to the application gateway part the original value of the destination information field found in the first redirected packet of a packet stream at the moment of intercepting the packet at the packet processor part and

using the indicated original value of the destination information field at the application gateway part in processing the packets of the redirected packet stream.

31. A method according to claim 30, comprising the steps of:

within the first packet and all subsequent packets of a certain packet stream that is found to contain digital data that pertains to said certain protocol, replacing also an original value of a certain source information field with a replacement value that identifies the packet processor part as the source of the packets,

indicating from the packet processor part to the application gateway part the original value of the source information field found in the first redirected packet of a packet stream at the moment of intercepting the packet at the packet processor part and

using the indicated original value of the source information field at the application gateway part in processing the packets of the redirected packet stream.

32. A method according to claim 30 or **31**, wherein the step of indicating from the packet processor part to the application gateway part the original values of certain information fields comprises at least one repetition in order to transmit redundant indications from the packet processor part to the application gateway part.

33. A method according to claim 29, wherein the packets of an individual packet stream belong to an individual TCP connection.

34. A method according to claim 1, comprising—between the steps of redirecting the packet to the application gateway part and processing the packet at the application gateway part—a step of removing from the redirected packet any traces of it having been redirected, so that the application gateway part processes the packet as if it had received the packet for processing immediately after the packet was intercepted.

35. A method according to claim 34, comprising—after the step of processing the packet at the application gateway part—the steps of:

re-inserting into the processed packet the redirection information that was removed from the packet before processing the packet at the application gateway part, so that after the re-inserting the packet contains values that identify the application gateway part as the source and the packet processor part as the destination of the packet,

returning the processed packet from the application gateway part to the packet processor part and

forwarding such a returned packet from the packet processor part towards an original destination that the packet had at the moment of it becoming intercepted.

36. A method according to claim 1, comprising the step of:

after a certain packet has been redirected from the packet processor part to the application gateway part, dynamically establishing a new instruction for the packet processor part regarding the redirecting of subsequently arriving packets that have a certain relationship to the packet that was redirected from the packet processor part to the application gateway part.

37. A method according to claim 36, comprising the steps of:

detecting at the application gateway part that a packet that was redirected from the packet processor part to the application gateway part contains data that pertains to a certain control channel defined in a protocol that also defines a data channel associated with said control channel,

establishing a new instruction for the packet processor part to redirect to the application gateway part subsequently arriving packets that contain data that pertains to said data channel, and

communicating the established new instruction from the application gateway part to the packet processor part.

38. A method according to claim 36, comprising the steps of:

detecting that a packet that was redirected from the packet processor part to the application gateway part is associated with a certain first port number and contains data that pertains to a certain protocol that defines that also a certain second port number should be reserved to said certain protocol, and

establishing a new instruction for the packet processor part to redirect to the application gateway part subsequently arriving packets that are associated with said second port number.

39. A method for handling digital data packets at a logical borderline that separates an untrusted packet-switched information network from a protected domain, comprising the steps of:

intercepting, at a packet processor part, a packet that is in transit between the untrusted packet-switched information network and the protected domain,

examining the packet at the packet processor part in order to determine, whether the packet contains digital data that pertains to a certain protocol,

if the packet is not found to contain digital data that would pertain to said certain protocol, processing the packet at the packet processor part, and

if the packet is found to contain digital data that pertains to said certain protocol,

replacing an original value of a certain destination information field within the packet with a replacement value that identifies an application gateway part as the destination of the packet, and redirecting the packet to the application gateway part,

indicating from the packet processor part to the application gateway part the original value of the destination information field found in the packet at the moment of intercepting the packet at the packet processor part and

using the indicated original value the destination information field at the application gateway part in processing the packet according to a set of processing rules based on obedience to said certain protocol.

40. A method according to claim 39, additionally comprising the steps of:

if the packet is found to contain digital data that pertains to said certain protocol, replacing also an original value of a certain source information field within the packet with a replacement value that identifies the packet processing part as the destination of the packet before redirecting the packet to the application gateway part,

indicating from the packet processor part to the application gateway part the original value of the source information field found in the packet at the moment of intercepting the packet at the packet processor part and

using the indicated original value the source information field at the application gateway part in processing the packet according to a set of processing rules based on obedience to said certain protocol.

41. A method for handling digital data packets at a logical borderline that separates an untrusted packet-switched information network from a protected domain, comprising the steps of:

intercepting, at a packet processor part, a packet that is in transit between the untrusted packet-switched information network and the protected domain,

examining the packet at the packet processor part in order to determine, whether the packet contains digital data that pertains to a certain protocol,

if the packet is not found to contain digital data that would pertain to said certain protocol, processing the packet at the packet processor part, and

if the packet is found to contain digital data that pertains to said certain protocol,

prepending a header to the packet at the packet processor part, the prepended header containing a value that identifies an application gateway part as the destination of the packet, and redirecting the packet to the application gateway part,

stripping the prepended header from the packet at the application gateway part and

using the original value of the destination information field in the packet at the application gateway part in processing the packet according to a set of processing rules based on obedience to said certain protocol.

42. A method according to claim 41, additionally comprising the steps of:

if the packet is found to contain digital data that pertains to said certain protocol, inserting into the prepended header also a value that identifies the packet processor part as the source of the packet before redirecting the packet to the application gateway part, and

using the original value of the source information field in the packet at the application gateway part in processing the packet according to a set of processing rules based on obedience to said certain protocol.

43. A method for handling digital data packets at a packet processing entity located at a logical borderline that separates an untrusted packet-switched information network from a protected domain, comprising the steps of:

intercepting a packet when the packet is in transit between the untrusted packet-switched information network and the protected domain,

examining the packet in order to determine, whether the packet contains digital data that pertains to a certain protocol,

if the packet is not found to contain digital data that would pertain to said certain protocol, processing the packet at the packet processing entity, and

if the packet is found to contain digital data that pertains to said certain protocol,

replacing an original value of a certain destination information field within the packet with a replacement value that identifies an application gateway part as the destination of the packet,

redirecting the packet to the application gateway part for processing according to a set of processing rules based on obedience to said certain protocol, and

indicating to the application gateway part the original value of the destination information field found in the packet at the moment of intercepting the packet at the packet filtering entity.

44. A method according to claim 43, additionally comprising the steps of:

if the packet is found to contain digital data that pertains to said certain protocol, replacing an original value of a certain source information field within the packet with a replacement value that identifies the packet processing entity as the source of the packet before redirecting the packet to the application gateway part, and

indicating to the application gateway part also the original value of the source information field found in the packet at the moment of intercepting the packet at the packet processing entity.

45. A method according to claim 43, additionally comprising the steps of:

receiving a packet from the application gateway part after processing according to a set of processing rules based on obedience to said certain protocol,

restoring the destination information field within the packet to contain the original value that was previously replaced with a replacement value that identified the application gateway part as the destination of the packet, and

releasing the packet towards a destination that is identified by the original value.

46. A method according to claim 45, additionally comprising the step of restoring a source information field within the packet that was received from the application gateway part to contain an original value that was previously replaced with a replacement value that identified the packet processor part as the source of the packet.

47. A method for handling digital data packets at a packet processing entity located at a logical borderline that separates an untrusted packet-switched information network from a protected domain, comprising the steps of:

intercepting a packet when the packet is in transit between the untrusted packet-switched information network and the protected domain,

examining the packet in order to determine, whether the packet contains digital data that pertains to a certain protocol,

if the packet is not found to contain digital data that would pertain to said certain protocol, processing the packet at the packet processing entity, and

if the packet is found to contain digital data that pertains to said certain protocol,

prepending a header to the packet, the prepended header containing a value that identifies an application gateway part as the destination of the packet, and

redirecting the packet to the application gateway part for processing according to a set of processing rules based on obedience to said certain protocol.

48. A method according to claim 47, additionally comprising the step of:

if the packet is found to contain digital data that pertains to said certain protocol, inserting into the prepended header also a value that identifies the packet processing entity as the source of the packet before redirecting the packet to the application gateway part.

49. A method according to any of claims **1**, **39**, **41**, **43** or **47**, wherein the step of examining the packet in order to determine, whether the packet contains digital data that pertains to a certain protocol, involves handling the packet according to a set of packet filtering rules.

50. A method according to any of claims **1**, **39**, **41**, **43** or **47**, wherein the step of examining the packet in order to determine, whether the packet contains digital data that pertains to a certain protocol, involves checking, whether the packet belongs to a connection or flow all packets of which should be redirected to the application gateway part.

51. A method for handling digital data packets at an application gateway entity located at a logical borderline that separates an untrusted packet-switched information network from a protected domain, comprising the steps of:

receiving an intercepted and redirected packet from a packet processor part that intercepts packets when they are in transit between the untrusted packet-switched information network and the protected domain,

receiving from the packet processor part an original value of a certain destination information field found in the packet at the moment of intercepting the packet at the packet processor part, and

processing the packet according to a set of processing rules that are based on obedience to said certain protocol and take also the original value of the destination information field into account.

52. A method according to claim 51, additionally comprising the steps of:

receiving from the packet processor part an original value of a certain source information field found in the packet at the moment of intercepting the packet at the packet processor part, and

processing the packet according to a set of processing rules that are based on obedience to said certain protocol and take also the original value of the source information field into account.

53. A system for handling digital data packets at a logical borderline that separates an untrusted packet-switched information network from a protected domain, comprising:

a packet processor part that is arranged to intercept packets when they are in transit between the untrusted packet-switched information network and the protected domain and to examine the packets in order to determine, whether the packets contain digital data that pertains to a certain protocol,

an application gateway part and a communications connection between the packet processor part and the application gateway part,

at the packet processor part, packet processing means that are arranged to process such packets that are not found to contain digital data that would pertain to said certain protocol,

at the packet processor part, redirecting means that are arranged to redirect to the application gateway part such packets that are found to contain digital data that pertains to said certain protocol, and

at the application gateway part, application gateway processing means that are arranged to process such packets according to a set of processing rules based on obedience to said certain protocol that are redirected from the packet processor part to the application gateway part; of which the packet processor part is arranged to run as a kernel mode process in a computer device and the application gateway part is arranged to run as a user mode process in a computer device.

54. A system according to claim 53, comprising:

at the packet processor part, means for replacing an original value of a certain destination information field within a packet with a replacement value that identifies the application gateway part as the destination of the packet,

means for indicating from the packet processor part to the application gateway part the original value of the destination information field found in the packet at the moment of intercepting the packet at the packet processor part and

at the application gateway part, means for using the indicated original value of the destination information field at the application gateway part in processing the packet.

55. A system according to claim 54, additionally comprising:

at the packet processor part, means for replacing an original value of a certain source information field within a packet with a replacement value that identifies the packet processor part as the source of the packet,

means for indicating from the packet processor part to the application gateway part the original value of the source information field found in the packet at the moment of intercepting the packet at the packet processor part and

at the application gateway part, means for using the indicated original value of the source information field at the application gateway part in processing the packet.

56. A system according to claim 53, comprising:

at the packet processor part, means for prepending a header to a packet, the prepended header containing a value that identifies the application gateway part as the destination of the packet,

at the application gateway part, means for stripping a prepended header from a packet and

at the application gateway part, means for using the original value of the destination information field in the packet in processing the packet.

57. A system according to claim 56, additionally comprising:

at the packet processor part, means for inserting into the prepended header also a value that identifies the packet processor part as the source of the packet, and

at the application gateway part, means for using the original value of the source information field in the packet in processing the packet.

58. A system according to claim 53, comprising a single computer device arranged to run the packet processor part as a kernel mode process and the application gateway part as a user mode process.

59. A system according to claim 53, comprising a first computer device arranged to run the packet processor part as a kernel mode process and a second computer device, separately from said first computer device, arranged to run the application gateway part as a user mode process.

60. A system according to claim 59, wherein the second computer is arranged to run several application gateway parts as simulteneously or alternately active user mode processes.

61. A system according to claim 59, comprising several second computer devices, each of which has a communications connection with the first computer device and each of which is arranged to run at least one application gateway part as a user mode process.

62. A packet processing device for handling digital data packets at a logical borderline that separates an untrusted packet-switched information network from a protected domain, comprising:

packet intercepting means for intercepting packets when they are in transit between the untrusted packet-switched information network and the protected domain,

packet examining means for examining packets in order to determine, whether they contain digital data that pertains to a certain protocol,

packet processing means for processing such packets that are not found to contain digital data that would pertain to said certain protocol,

replacing means for replacing, in packets that are found to contain digital data that pertains to said certain protocol, an original value of a certain destination information field with a replacement value that identifies an application gateway device as the destination of such packets,

redirecting means for redirecting packets to the application gateway device for processing according to a set of processing rules based on obedience to said certain protocol, and

signalling means for indicating to the application gateway part the original value of the destination information field found in packets at the moment of intercepting the packets at the packet filtering device.

63. A packet processing device according to claim 62, wherein:

the replacing means are also adapted to replace, in packets that are found to contain digital data that pertains to said certain protocol, an original value of a certain source information field with a replacement value that identifies the packet processing device as the source of such packets, and

the signalling means are also adapted to indicate to the application gateway part the original value of the source information field found in packets at the moment of intercepting the packets at the packet filtering device.

64. A packet processing device for handling digital data packets at a logical borderline that separates an untrusted packet-switched information network from a protected domain, comprising:

packet intercepting means for intercepting packets when they are in transit between the untrusted packet-switched information network and the protected domain,

packet examining means for examining packets in order to determine, whether they contain digital data that pertains to a certain protocol,

packet processing means for processing such packets that are not found to contain digital data that would pertain to said certain protocol,

header adding means for prepending, to packets that are found to contain digital data that pertains to said certain protocol, a header containing a value that identifies an application gateway device as the destination of such packets, and

redirecting means for redirecting packets to the application gateway device for processing according to a set of processing rules based on obedience to said certain protocol.

65. A packet processing device according to claim 64, wherein:

the header adding means are adapted to insert into the header also a value that identifies the packet processing device as the source of packets that are found to contain digital data that pertains to said certain protocol.

66. An application gateway device for handling digital data packets at a logical borderline that separates an untrusted packet-switched information network from a protected domain, comprising:

means for receiving intercepted and redirected packets from a packet processor device that intercepts packets when they are in transit between the untrusted packet-switched information network and the protected domain,

means for receiving from the packet processor device an original value of a certain destination information field found in packets at the moment of intercepting the packets at the packet processor part, and

means for processing packets according to a set of processing rules that are based on obedience to said certain protocol and take also the original value of the destination information fields into account.

67. An application gateway device according to claim 66, additionally comprising means for receiving from the packet processor device an original value of a certain source information field found in packets at the moment of intercepting the packets at the packet processor part, so that the means for processing packets are adapted to process packets according to a set of processing rules that are based on obedience to said certain protocol and take also the original values of the source and destination information fields into account.

68. A software program product for handling digital data packets at a logical borderline that separates an untrusted packet-switched information network from a protected domain, comprising:

a packet processor program that is arranged to intercept packets when they are in transit between the untrusted packet-switched information network and the protected domain and to examine the packets in order to determine, whether the packets contain digital data that pertains to a certain protocol,

an application gateway program arranged to communicate with the packet processor program,

at the disposal of the packet processor program, packet processing means that are arranged to process such packets that are not found to contain digital data that would pertain to said certain protocol,

at the disposal of the packet processor program, redirecting means that are arranged to redirect to the application gateway program such packets that are found to contain digital data that pertains to said certain protocol, and

at the disposal of the application gateway program, application gateway processing means that are arranged to process such packets according to a set of processing rules based on obedience to said certain protocol that are redirected from the packet processor program to the application gateway program; of which the packet processor program is arranged to run as a kernel mode process in a computer device and the application gateway program is arranged to run as a user mode process in a computer device.

69. A packet processor software program product for handling digital data packets at a logical borderline that separates an untrusted packet-switched information network from a protected domain, comprising:

packet intercepting means for intercepting packets when they are in transit between the untrusted packet-switched information network and the protected domain,

packet examining means for examining packets in order to determine, whether they contain digital data that pertains to a certain protocol,

packet processing means for processing such packets that are not found to contain digital data that would pertain to said certain protocol,

replacing means for replacing, in packets that are found to contain digital data that pertains to said certain protocol, an original value of a certain destination information field with a replacement value that identifies an application gateway program as the destination of such packets,

redirecting means for redirecting packets to the application gateway program for processing according to a set of processing rules based on obedience to said certain protocol, and

signalling means for indicating to the application gateway program the original value of the destination information field found in packets at the moment of intercepting the packets at the packet filter program.

70. A packet processor software program product according to claim 69, wherein:

the replacing means are also adapted to replace, in packets that are found to contain digital data that pertains to said certain protocol, an original value of a certain source information field with a replacement value that identifies the packet processor program as the source of such packets, and

the signalling means are also adapted to indicating to the application gateway program the original value of the source information field found in packets at the moment of intercepting the packets at the packet filter program.

71. A packet processor software program product for handling digital data packets at a logical borderline that separates an untrusted packet-switched information network from a protected domain, comprising:

packet intercepting means for intercepting packets when they are in transit between the untrusted packet-switched information network and the protected domain,

packet examining means for examining packets in order to determine, whether they contain digital data that pertains to a certain protocol,

packet processing means for processing such packets that are not found to contain digital data that would pertain to said certain protocol,

header adding means for prepending, to packets that are found to contain digital data that pertains to said certain protocol, a header containing a value that identifies an application gateway program as the destination of such packets, and

redirecting means for redirecting packets to the application gateway program for processing according to a set of processing rules based on obedience to said certain protocol.

72. A packet processor software program product according to claim **71**, wherein the header adding means are adapted to insert, to the header that is prepended to packets that are found to contain digital data that pertains to said certain protocol, a value that identifies the packet processor program as the source of such packets.

73. An application gateway software program product for handling digital data packets at a logical borderline that separates an untrusted packet-switched information network from a protected domain, comprising:

means for receiving intercepted and redirected packets from a packet processor program that intercepts packets when they are in transit between the untrusted packet-switched information network and the protected domain,

means for receiving from the packet processor program an original value of a certain destination information field found in packets at the moment of intercepting the packets at the packet processor program, and

means for processing packets according to a set of processing rules that are based on obedience to said certain protocol and take also the original value of the destination information field into account.

74. An application gateway software program product according to claim **73**, additionally comprising means for receiving from the packet processor program an original value of a certain source information field found in packets at the moment of intercepting the packets at the packet processor program, so that the means for processing packets are adapted to process packets according to a set of processing rules that are based on obedience to said certain protocol and take also the original values of the source and destination information fields into account.

* * * * *