
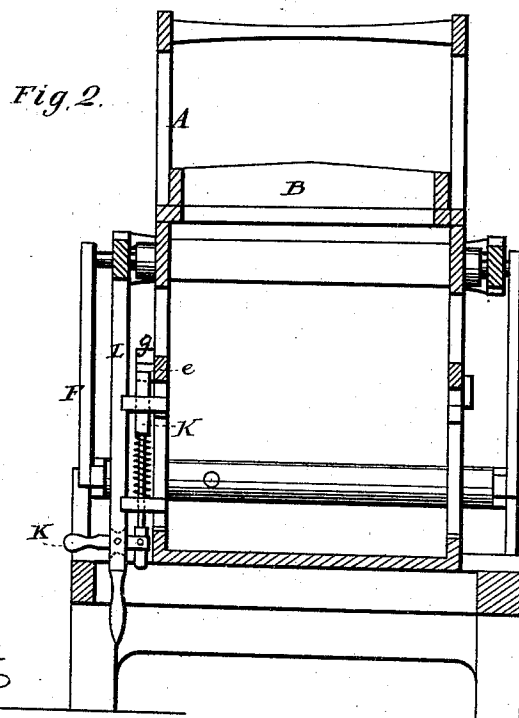


G. F. EISENHARDT.

JACQUARD MECHANISM FOR LOOMS.

No. 173,924.

Patented Feb. 22, 1876.

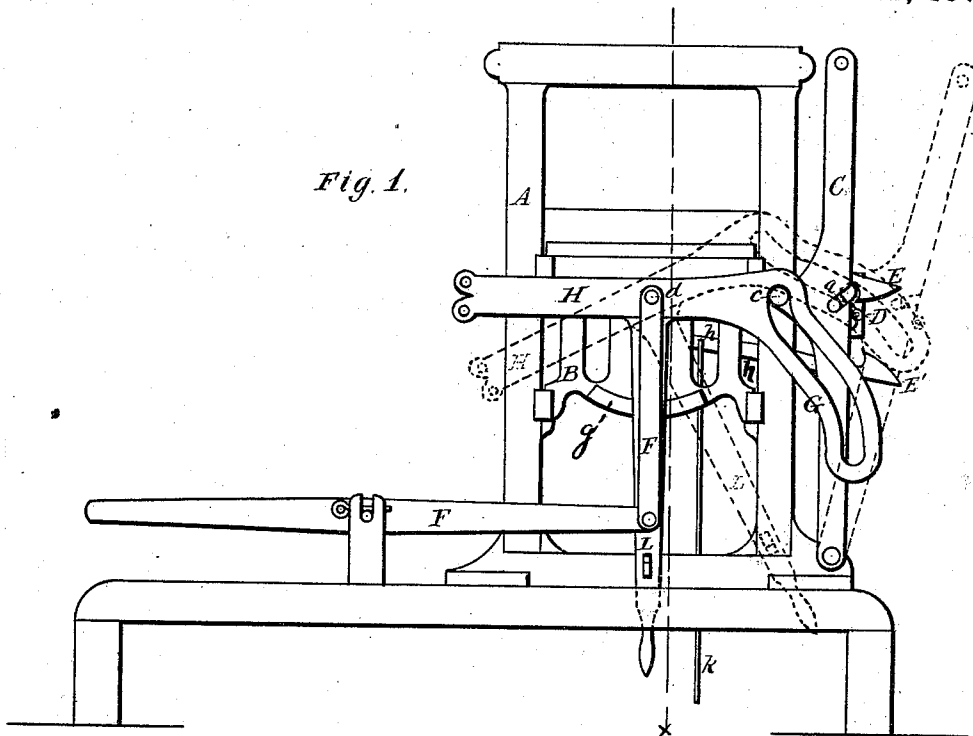

WITNESSES

Robert Everett
E. H. Bates

INVENTOR

INVENTOR
Geo. F. Eisenhardt,
Clipman & Sons Co.

ATTORNEYS


G. F. EISENHARDT.

JACQUARD MECHANISM FOR LOOMS.

No. 173,924.

Patented Feb. 22, 1876.

Fig. 3.

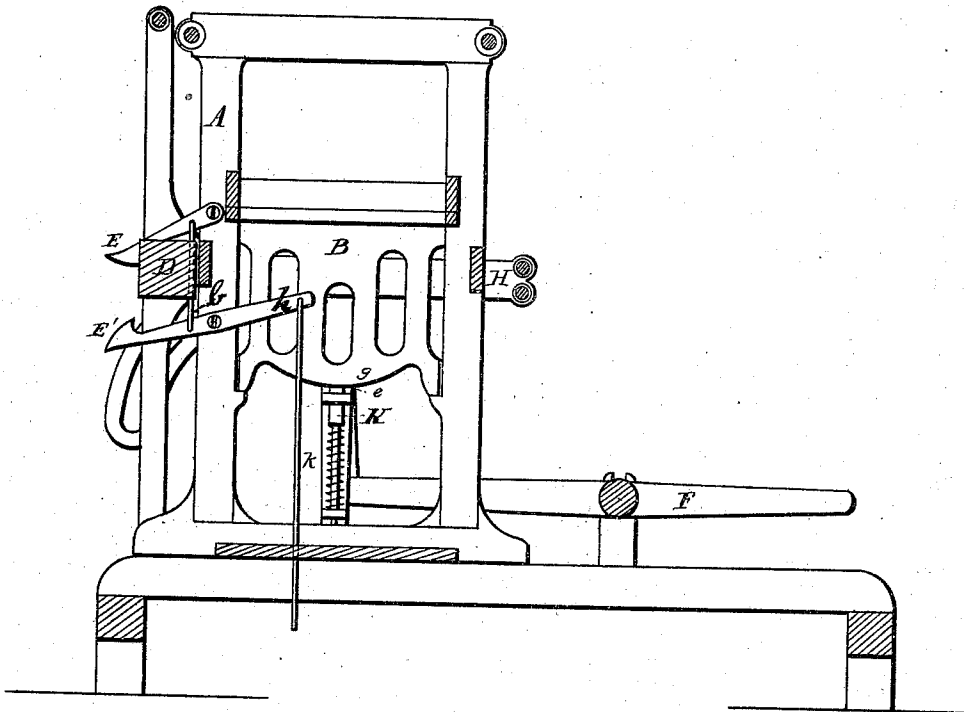

WITNESSES

Robert Everett
George E. Upham

INVENTOR

Geo. F. Eisenhardt
Chipman & Co.

ATTORNEYS

UNITED STATES PATENT OFFICE.

GEORGE F. EISENHARDT, OF PHILADELPHIA, PENNSYLVANIA, ASSIGNOR
TO HIMSELF AND HERRMAN DIENELT, OF SAME PLACE.

IMPROVEMENT IN JACQUARD MECHANISMS FOR LOOMS.

Specification forming part of Letters Patent No. **173,924**, dated February 22, 1876; application filed
December 18, 1875.

To all whom it may concern:

Be it known that I, GEO. F. EISENHARDT, of Philadelphia, in the county of Philadelphia and State of Pennsylvania, have invented a new and valuable Improvement in Jacquard Mechanisms for Looms; and I do hereby declare that the following is a full, clear, and exact description of the construction and operation of the same, reference being had to the annexed drawings, making a part of this specification, and to the letters and figures of reference marked thereon.

Figure 1 of the drawings is a representation of a side elevation of my machine, and Fig. 2 is a transverse vertical sectional view thereof. Fig. 3 is a longitudinal vertical sectional view of the same.

This invention has relation to means for operating the pattern-prism of the jacquard; and it consists in the construction and novel arrangement of the rocking S cams and the mechanism connected therewith, whereby the cylinder or prism can be reversed in case of mistake, mispick, or broken filling, as herein-after shown and described.

In the accompanying drawings, the letter A designates the loom-frame; B, the rising and falling frame or griff of the harness-operating mechanism; C, the vibrating-frame of the pattern-prism, provided with slots *a*, in which rotate the journals of the prism D. E E' designate the upper and lower hooks or pawls, whereby the prism is rotated forward or backward, as the case may be. These hooks are designed to be connected by means of a link, *b*. F represents the lever mechanism, whereby the griff-frame is raised and lowered. To this frame are attached the S-cams G, which engage with the studs *c* of the press or prism-frame.

These S-cams may be stationary. It is, however, preferred in some cases to connect these cams with a frame, H, which is arranged to rock, when required, on suitable bearings *d*, as indicated in the drawings. This frame is provided with an operating-lever, L, to

which is pivoted the handle of a spring-catch, K, which engages with a bearing, *e*, in an arc, *g*, of the griff-frame.

One of the prism-hooks is provided with an elongated arm, *h*, to which is attached an operating-cord, *k*, whereby the lower or reversing hook which, in the ordinary movement, gravitates out of engagement with the prism is brought in gear, the upper hook being thrown out.

When the spring-catch is engaged with its bearing, the S-cams will be held rigidly in position to move the press outward and inward as the griff-frame rises and falls.

Should it be necessary to reverse the movement, or to operate the jacquard by hand for one or two motions, the spring-catch is disengaged and the lever L moved backward or forward, as may be required, the cord *k* being pulled to engage the lower hook if the reversing movement is necessary.

The construction of the catch or stop K may be varied, according to the plan of the loom. I do not desire to confine myself to the spring-catch or to a catch of the precise construction herein described.

What I claim as new, and desire to secure by Letters Patent, is—

1. The combination, in a jacquard with the rising and falling frame B and the prism-frame or press C, of the rocking cam-frame, having a stop or catch and connected with said frames B and C, substantially as specified.

2. The combination with a rising and falling frame, B, having a bearing arc, *g*, of the frame H, provided with an operating-lever, L, and spring-catch K, substantially as and for the purpose set forth.

In testimony that I claim the above I have hereunto subscribed by name in the presence of two witnesses.

GEORGE F. EISENHARDT.

Witnesses:

JULIUS J. DOERING,
PH. JULIUS FISCHLE.