


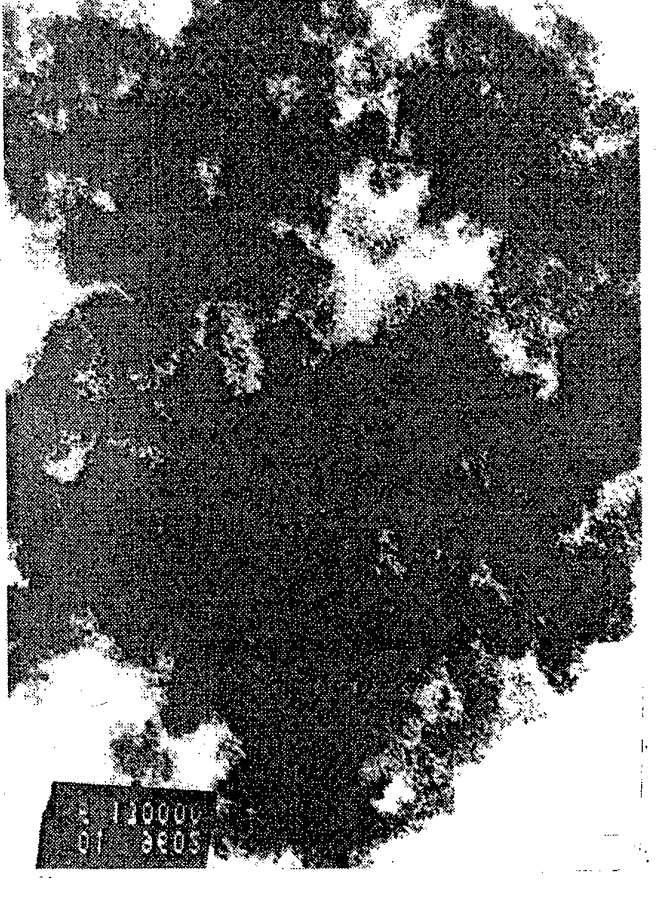

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification⁵ : H01B 1/08, 1/20, H01C 17/06 C09D 5/24</p>	A1	<p>(11) International Publication Number: WO 94/00852</p> <p>(43) International Publication Date: 6 January 1994 (06.01.94)</p>
<p>(21) International Application Number: PCT/US93/05720</p> <p>(22) International Filing Date: 22 June 1993 (22.06.93)</p> <p>(30) Priority data: 07/905,980 29 June 1992 (29.06.92) US</p> <p>(71) Applicant: E.I. DU PONT DE NEMOURS AND COMPANY [US/US]; 1007 Market Street, Wilmington, DE 19898 (US).</p> <p>(72) Inventor: JACOBSON, Howard, Wayne ; 2009 Longcome Drive, Wilmington, DE 19810 (US).</p> <p>(74) Agents: BOYER, Michael, K. et al.; E.I. du Pont de Nemours and Company, Legal/Patent Records Center, 1007 Market Street, Wilmington, DE 19898 (US).</p>		<p>(81) Designated States: AU, BB, BG, BR, BY, CA, CZ, FI, HU, JP, KP, KR, KZ, LK, MG, MN, MW, NO, NZ, PL, RO, RU, SD, SK, UA, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>
<p>(54) Title: ELECTROCONDUCTIVE MATERIAL AND PROCESS</p>		
<p>(57) Abstract</p> <p>A process for producing crystallites comprising silica and antimony containing tin oxide. The quantity of antimony within the tin oxide can be reduced, thereby permitting producing a powder of which is absent a blue coloration.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NE	Niger
BE	Belgium	GN	Guinea	NL	Netherlands
BF	Burkina Faso	GR	Greece	NO	Norway
BG	Bulgaria	HU	Hungary	NZ	New Zealand
BJ	Benin	IE	Ireland	PL	Poland
BR	Brazil	IT	Italy	PT	Portugal
BY	Belarus	JP	Japan	RO	Romania
CA	Canada	KP	Democratic People's Republic of Korea	RU	Russian Federation
CF	Central African Republic	KR	Republic of Korea	SD	Sudan
CG	Congo	KZ	Kazakhstan	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovak Republic
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	MC	Monaco	TG	Togo
CZ	Czech Republic	MG	Madagascar	UA	Ukraine
DE	Germany	ML	Mali	US	United States of America
DK	Denmark	MN	Mongolia	UZ	Uzbekistan
ES	Spain			VN	Viet Nam
FI	Finland				

1

TITLE

ELECTROCONDUCTIVE MATERIAL AND PROCESS

5

FIELD OF THE INVENTION

The present invention relates to an electroconductive material comprising an intimate mixture of amorphous silica and a fine crystalline antimony-containing tin oxide, and to a process for preparing the same.

10

BACKGROUND OF THE INVENTION

Compositions which can be used to impart electroconductive properties to thin films, such as, polymer films, magnetic recording tapes, paints, among others, are not always economically attractive or reliable. For example, electroconductive compositions, e.g., powders known as ECPs, which are currently available for use as conductive pigments in paint are not completely effective. Carbon black can be used to impart electroconductivity, but this can limit the color of a paint to black, dark gray and closely related shades. Conventional antimony-doped tin oxide powders may be used as an ECP, but the quantities required may result in unfavorable cost and color limitations.

20

An electroconductive composition which comprises antimony-containing tin oxide wherein the tin oxide is predominantly crystalline, and the composition is associated with silica or a silica-containing material, e.g., a silicate, is described in European Patent Application Publication No. 0359569, which published on March 21, 1990, and is entitled "IMPROVED ELECTRO-CONDUCTIVE COMPOSITION AND PROCESS OF PREPARATION" (hereinafter referred to as "EPO '569"). The entire content of EPO '569 is hereby incorporated by reference. The antimony-containing tin oxide forms a two-dimensional network of densely packed crystallites upon the surface of the silica or a silica-containing material. The silica or silica containing material is a powder comprising shaped particles of amorphous silica, inert core particles coated with amorphous silica or hollow shells composed of amorphous silica. In the process used to prepare this electroconductive composition, the silica is first deposited as a coating upon core particles, which are in an aqueous suspension; optionally the core particles may then be dissolved, and the antimony-containing tin oxide layer is deposited on the silica surface as an additional step in the process.

25

30

35

SUMMARY OF THE INVENTION

The present invention relates to an electroconductive material or powder (ECP), which comprises fine crystallites that are composed of an intimate mixture of silica, e.g., SiO₂, and antimony-containing tin oxide, e.g., SnO₂(Sb). The invention also relates to a coprecipitation process for obtaining the ECP crystallites.

In contrast to conventional ECPs, the electroconductive antimony-containing tin oxide crystallites of the invention are intimately mixed with silica, whereas conventional compositions are deposited upon a silica surface. The presence of silica as a component of the composition of the invention reduces grain growth of the crystallites during precipitation and/or calcination, thereby forming very fine crystallites.

It is known from conventional processes that the crystallite size can be decreased by increasing the antimony content. However, to obtain crystallites having an average diameter of 100 Angstroms conventional practice requires an antimony content of at least 10 wt%. At such a concentration of antimony, a strong blue grey color develops, which is detrimental in many applications, e.g., imaging papers, among others. In contrast, the present invention employs an effective amount of silica which reduces crystallite grain growth, and forms fine crystallites, thereby avoiding using a quantity of antimony which develops a blue color.

In comparison to conventional processes, the process of the invention requires fewer steps, and the invention can be conducted more rapidly, particularly when in the presence of a promoter cation.

The electroconductive powders of the invention when formulated with appropriate binders and additives may be applied to a variety of surfaces to impart electrical conductivity and antistatic properties. For example, electro-conductive powders of the invention can be used to impart electroconductive properties to coatings or thin films which are useful in a variety of applications requiring surface conductivity or static electric charge dissipation. When formulated with appropriate binders and additives these ECPs are useful for coating glass, paper, corrugated box-board, plastic film or in sheet such as polycarbonate, polyester and polyacrylate, electroconductive paint coatings, among many others.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 - Fig. 1 is a photomicrograph at 3x130Kx magnification of the ECP formed in accordance with Example 4.

DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to an electroconductive powder (ECP) comprising fine crystallites, composed of intimately mixed silica, e.g., SiO_2 , and an antimony-containing tin oxide, e.g., $\text{SnO}_2(\text{Sb})$. The average size of the crystallites is less than about 100 Angstroms. The ECP typically is in the form of a powder, the particles of which are composed of agglomerated crystallites, wherein the agglomerates range in size from sub-micron to tens of microns. The crystallites normally comprise about 1 to 20 wt% SiO_2 and 80 to 99 wt% $\text{SnO}_2(\text{Sb})$. The Sb component within the SnO_2 typically ranges from about 0.5 to 12.5%. The crystallites may also contain traces, e.g., less than 0.1%, of metal cations.

An aspect of the invention relates to a process for preparing the above composition. The process comprises coprecipitating in an aqueous media an intimate mixture of SiO_2 , SnO_2 and Sb_2O_3 . The process is optionally conducted in the presence of one or more metal cations while maintaining the pH in the range of about 1.0 to 3.0 with a 20% sodium hydroxide solution. The precipitated solids are recovered, washed with water until substantially free from soluble residues, and calcined to form an electroconductive powder.

Whenever used in the specification and appended claims the terms below are intended to have the following definitions.

"Amorphous silica" as used herein refers to a phase which is intimately mixed, interdispersed around and/or within the antimony-containing tin oxide, e.g., hydrous antimony-containing tin oxide. Amorphous silica also includes materials which contain silica that do not adversely affect the desired properties of the antimony-containing tin oxide. The morphology of the silica is predominantly amorphous or lacking any long-range crystalline structure.

"Antimony-containing tin oxide" as used herein refers to an electrically conductive portion of a crystallite. The morphology of the crystallites corresponds generally to the structure of tin oxide. At least a portion of the tin within the crystalline lattice or matrix of the tin oxide has been substituted with antimony, thereby causing the crystallites to become electrically conductive. While antimony oxide may be present on an atomic level, significant quantities of antimony oxide are normally not detectable in the ECP.

As the quantity of antimony within the tin oxide crystallite increase, the resistivity of the finished dry ECP decreases, i.e., the conductivity increases. Generally, the antimony content of the crystallite can range from about 1 to 30% by weight, but desirable properties can be obtained when the antimony content is from 3-10% antimony by weight, e.g., when the ECP is employed for static dissipation.

"Intimate mixture of amorphous silica" as used herein refers to the manner in which silica becomes associated with the antimony-containing tin oxide. The silica becomes associated with the antimony containing tin oxide by co-precipitation.

5 The composition of the invention is an electroconductive powder (ECP), which comprises agglomerates of fine crystallites that are composed of silica, e.g., SiO_2 , and antimony-containing tin oxide, e.g., $\text{SnO}_2(\text{Sb})$. The crystallites typically comprise about 1 to 20% SiO_2 , and about 80 to 99% $\text{SnO}_2(\text{Sb})$. The Sb component of the SnO_2 normally ranges from about 1 to 12.5% by weight. The
10 crystallites may also contain traces, usually less than 0.1% by weight, of metal cations. The metal cations can include one or more metals selected from the group of alkali metals, alkaline earth metals, transition metals, rare earth metals, among others.

 The crystallites are essentially iso-dimensional, and have an average
15 diameter between about 30 and 100 Angstroms; normally between about 50 and 70 Angstroms, i.e., as measured by X-ray diffraction line broadening. The agglomerates of silica and the conducting tin oxide typically range in the size from submicrons to tens of microns.

 The relatively small size of the crystallites and agglomerates thereof is
20 a desirable property. Particularly, the efficacy of the powder for producing electroconductive coatings, e.g., transparent films, is enhanced as a result of the crystallite size. The crystallite size can be decreased by increasing the antimony content. In a conventional process for producing powders which have an average diameter of about 100 Angstroms, the antimony content is at least about 10 wt%.
25 However, as the antimony content is increased color develops, and at about 10 wt% Sb, conventional powders exhibit a strong blue grey color. Exhibition of color is detrimental in many applications such as imaging papers. In contrast, the ECP composition of the invention, which is composed of an intimate mixture of silica with an antimony containing tin oxide, unexpectedly produces crystallites which are
30 highly electroconductive at Sb concentrations that are below the level at which color is apparent. It was surprising that the crystallites of the invention are smaller than would have been expected given the relatively low concentration of antimony. The relatively small size of the crystallites is confirmed by the relatively high surface area of the powder, i.e., as measured by nitrogen absorption the powder has a surface
35 area between about 20 and 200 M^2/g , and normally between about 100 and 150 M^2/g . As a result, the powder of the invention is a particularly desirable component of a transparent electroconductive coating, film, layer, among others.

A composition of the invention is prepared by a process which generally comprises:

- (a) mixing an alkali silicate solution, and a solution of Sn^{4+} and Sb^{3+} salts under conditions which result in the precipitation of a composition comprising intimately mixed silica, and hydrous oxides of tin and antimony;
- (b) recovering the precipitated solids, washing the solids substantially free of water soluble residues and drying; and
- (c) calcining to form a powder comprising agglomerates of fine crystallites composed of an intimate mixture of amorphous silica, e.g., SiO_2 , and an antimony-containing tin oxide, e.g., $[\text{SnO}_2(\text{Sb})]$.

While any suitable silicate solution can be employed, the alkali silicate solution typically comprises sodium silicate and/or potassium silicate. A convenient form of silicate is a clear aqueous solution which has a $\text{SiO}_2/\text{Na}_2\text{O}$ or $\text{SiO}_2/\text{K}_2\text{O}$ molar ratio of about 3.25/1, and an SiO_2 content of about 26.5 wt%, that has been filtered to substantially remove any insoluble material.

Tetravalent tin salts are normally used for performing the process of the invention. A tin salt solution may conveniently be prepared by dissolving $\text{SnCl}_4 \cdot 5\text{H}_2\text{O}$ in water. While tin chloride is typically used, other water soluble salts, such as sulfates, nitrates, oxalates, acetates, among others, can be employed as a source of tin.

Trivalent antimony salts are normally used for performing the process of the invention. A chloride antimony salt is most commonly used, and a solution can be prepared by dissolving SbCl_3 in nominal 37% HCl. As in the case of the tin salts chloride is typically used, but other salts such as, sulfates, nitrates, oxalates, acetates, among others, can be employed as a source of antimony. While the solutions of tin and antimony salts may be added concurrently, it is usually more convenient to first mix the salt solutions together and add them as a combined solution. Although the concentration of the salts in solution is not a critical aspect of the invention, it is expedient for the concentrations to range between about 50 to 500g of SnO_2/l , and about 0.5 to 300g Sb/l .

It is advantageous to mix the alkali silicate, and tin and antimony solutions in the presence of one or more cations selected from the group comprising alkali metals, alkaline earth metals, transition metals, rare earth metals, among others. Such cations are typically introduced as soluble salts, such as, chlorides, nitrates, sulfates, among others. Group IIA metals are advantageous for this purpose with calcium and barium being particularly effective. Without wishing to be bound by any theory or explanation, it is believed that the cations function as

promoters for the codeposition of an antimony containing tin oxide when in the presence of silica. For example, when in the presence of certain cations the deposition or precipitation reaction is relatively fast; or in other words, the process can be conducted virtually as rapidly as the reactants can be mixed. It is believed
5 that in a pH range of about 1.0 to 3.0 a metal cation such as Ca^{++} displaces protons from hydroxylated silica OH groups, and that the metal cation is then rapidly substituted by Sn^{4+} and/or Sb^{3+} . At a higher pH, e.g., above 5, the OH groups are not readily converted, and the substitution by Sn^{4+} and/or Sb^{3+} occurs more slowly.

10 The cations are conveniently introduced by first preparing a continuously agitated aqueous solution, which has a concentration of promoter cations between about 0.1 and 3.0M; most commonly between 1.0 and 2.0M. The solutions of alkali silicate, tin and antimony salts are metered into this agitated solution while maintaining the pH in the range of about 1.0 to 3.0. This pH is
15 maintained in such a range by adding a 20% sodium hydroxide solution, as needed. The solutions are mixed at a temperature between about 25 and 100° C. The resulting suspension is continuously agitated for about one hour; normally about half an hour, at a pH between 1.0 and 3.0, and at a temperature between 25 and 100° C to assure that the system is fully stabilized. While any suitable means can be
20 used to agitate the suspension, it is desirable to use a stirring paddle.

The solids, which precipitate out from the suspension, are isolated by any convenient solid liquid separation procedure, such as vacuum filtration. The isolated solids are normally then washed with deionized water until substantially free from soluble residues, e.g., in the manner described in EPO '569; the teachings
25 of which have been incorporated by reference. The isolated and washed solids can be dried at about 120 to 150° C, usually in an air oven. By drying the solids, hydrous oxides of tin and antimony are converted to an antimony containing tin oxide. However, a separate drying step is unnecessary when the washed solids are to be calcined immediately following isolating and washing.

30 The solids are next calcined in an oxygen-containing atmosphere, e.g., air, at a temperature in the range of about 500 to 900° C for a period of time sufficient to develop the appropriate crystallinity of the intimately mixed SiO_2 - $[\text{SnO}_2(\text{Sb})]$ phases, and establish the desired conductivity. The necessary calcination time will depend on the temperature and geometry of the furnace. In a
35 small batch furnace, for example, the time required for calcination is typically from about 1 to 2 hours. Calcination is a key aspect of the process of the invention because calcination results in the development of the electroconductive crystalline phase of an antimony-containing tin oxide. The presence of intimately mixed silica

within an antimony containing tin oxide inhibits crystal growth during calcination, thereby resulting in fine crystallites, e.g., about 70 angstroms. Calcination may be employed as one or more steps in order to tailor or modify the conductivity of the crystallites, e.g., a previously calcined powder can be further calcined for increasing the conductivity of the crystallites.

In one aspect of the invention, the configuration or dimensions of the calcined powder may be modified or tailored by micronizing. Any suitable process for micronizing such as a conventional jet mill, among others, may be employed to practice this aspect of the invention. When calcined powders are micronized, the average particle size typically ranges from about 1 to 10 microns. For example, a calcined powder may be micronized to reduce the average size of the powder, thereby increasing the transparency and dispersibility of the powder. By increasing the transparency of the powder, the powder can be incorporated into a carrier matrix such as an acrylic in order to form a transparent conductive film. Moreover, micronized powders can be used to coat relatively large particles or shells, e.g., colored toners.

The dry powder electrical resistance is an important property of the ECPs. The electroconductivity of the powder is inversely related to the resistivity, and it is desirable that the dry powder electrical resistance be as low as possible so that the powder is effective when incorporated into electroconductive coatings, films, among others. Generally, the lower the relative resistance of the dry powder, the greater the powder's conductance in a particular end-use application. However many other factors, for example, the ability to form an interconnecting network in the end-use carrier matrix or binder system, may also affect end-use. An ECP powder of the invention is typically characterized by a resistivity less than about 2000 ohm-cm, and normally between 1 and 100 ohm-cm.

A powder resistance test was performed with a cylindrical cell and a Carver laboratory press. The cell was constructed with brass electrodes at the top and bottom, that fit snugly inside a cylindrical piece of plastic having an I.D. of about 3 centimeters. Copper leads were attached to the brass electrodes, and connected to an ohm meter. With the bottom electrode in position a sample of powder was introduced into the plastic cylinder and the top electrode was placed into position above the powder. The height of the powder should be about 2.0 cm before exerting any pressure. Using the Carver laboratory press, the powder sample was compressed between the upper face of the bottom electrode and the lower face of the top electrode. The height and electrical resistivity of the powder is then measured; the latter with an ohm meter. The measurement of height and resistance are repeated at compressions of 250, 1000, 2000, 4000, 6000, 8000 and 10,000 psi.

The value of the powder resistance, for a given compression was obtained, by the following calculation:

Resistivity, $P = (\text{Resistance} \times \text{Area}) / \text{Height}$

5

Resistance is measured in ohms, and cross-sectional area of the cylinder in square centimeters. Height is the length of the powder column between the top and bottom electrodes in centimeters. In the case of the cell used in the following examples the area was about 7.07 square centimeters.

10

The effectiveness of the present composition in imparting electroconductive properties to a coating was ascertained by dispersing the powder into an aqueous vehicle, casting a coating onto a glass plate, drying and measuring the Surface Resistivity (S.R.). The powder dispersion was coated onto a glass plate by hand, using a coating knife, which was adjusted to give the desired glass coating thickness. The surface loading of powder was determined by weighing the glass plates before and after coating, then multiplying the weight difference by the percentage of powder in the dispersion, and dividing by the area coated. The surface loading was expressed in pounds per 1000 square feet of surface, (lbs/Kft²). The surface resistivity of the coating is measured using a Dr. Thiedig Milli-to-2

15

20

current/resistance meter, manufactured by Monroe Electronics, Lyndonville, New York. This instrument gives a direct reading in ohms per square. The lower the value for S.R. the greater the electroconductivity.

25

The electroconductive material of this invention and its method of preparation are illustrated in more detail in the following examples which should not be construed as limiting the scope of the appended claims. Unless stated to the contrary, % composition is on a weight percentage basis.

EXAMPLE 1

30

This example describes the preparation of an ECP composition comprising antimony-containing tin oxide and silica, the weight ratio of SnO₂ to Sb being about 10.6 to 1. The silica content of the ECP is about 7.5%.

35

About 2.5 liters of de-ionized water were heated to about 80°C and a stirred within a four liter beaker. A solution comprising about 20% HCl was added to the heated water in order to adjust the pH to about 2.0. Approximately 220 grams of CaCl₂ pellets were then dissolved in the acidic solution.

Next, an aqueous solution of SnCl₄, SbCl₃ and HCl was prepared by combining about 222 ml. of SnCl₄ solution, which contained the equivalent of about 0.445g SnO₂/ml, with about 42 ml of concentrated HCl solution which contained an

amount of SbCl_3 , that was equivalent to about 0.267g Sb/ml. The resultant solution possessed about 9 parts of SnO_2 to 1 part of Sb.

5 An aqueous solution of potassium silicate was prepared by dissolving about 40 grams of a stock solution, which comprised K_2SiO_3 and had an $\text{SiO}_2/\text{K}_2\text{O}$ molar ratio of about 3.29 that contained about 26.5 wt% SiO_2 , into about 600 ml of 20% NaOH.

10 Over a period of about two hours the $\text{SnCl}_3/\text{SbCl}_4/\text{HCl}$ solution was stirred into a CaCl_2 solution, concurrently with the controlled addition of the K_2SiO_3 solution. During the solution additions, the pH was maintained at about 2.0, and the temperature at about 80° C. A product precipitated which was retained in suspension by continuous agitation using a paddle stirrer. The precipitated product was cured, e.g., to assure that the system is fully stabilized, by stirring for about one half an hour while maintaining a pH of about 2.0 and a temperature of about 80° C.

15 The product or solid was recovered by filtration, washed with de-ionized water until substantially free from chloride ions, and dried by heating at about 120° C for several hours. The dried powder was calcined in air at about 750° C for about 2 hours. Approximately 128 grams of an off-white powder was obtained. The powder was examined by using x-ray diffraction analysis which determined that 20 the major crystalline phase had a broad peak pattern which corresponded to SnO_2 . The pattern was used to calculate the average crystallite size which was about 53 Angstroms. The powder was further examined by using X-ray fluorescence analysis which determined that the powder contained about 81.36% SnO_2 ; 9.40% Sb_2O_3 and 7.56% SiO_2 . The Sb component of the SnO_2 was about 8.65%. The surface 25 area as measured by nitrogen absorption was about 98 m^2/g , and the dry powder electrical resistance was about 3.5 ohm-cm.

EXAMPLE 2

30 This Example illustrates the effects of increasing the quantity of silica which is used to precipitate the powder.

The process used in this Example was substantially identical to that described in Example 1 with the difference being that the amount of aqueous potassium silicate used was increased from about 40 grams to 200 grams.

35 The process obtained about 176 grams of an off-white powder. The powder was examined by using X-ray diffraction analysis which determined that the major crystalline phase corresponded to a broad peak pattern for SnO_2 . The pattern was also used to determine the average crystallite size which was about 35 Angstroms. The powder was further examined by X-ray fluorescence analysis

which determined that the powder contained about 58.65% SnO₂; 6.92% Sb₂O₃ and 30.86% SiO₂. The Sb component corresponded to about 9 % of the SnO₂. The surface area of the powder which was measured by nitrogen absorption, was about 171.5 m²/g, and the dry powder electrical resistance was about 2.93 x 10⁴ ohm-cm.

5 The results of this Example indicate that addition of a relatively large amount of SiO₂ achieves a smaller average crystallite size, and a higher surface area. However, the presence of such a level of silica adversely affected the dry powder electrical conductivity.

10 EXAMPLE 3

This Example illustrates the effects of omitting the silica and calcium salts.

About 2.5 liters of de-ionized water were heated to about 80° C, and stirred in 4 liter beaker. Approximately 264 ml of a SnCl₄/SbCl₃ solution was prepared substantially in accordance with Example 1, and was added over a period of about two hours to the heated water. Concurrent with the addition of the tin and antimony salts, a 20% NaOH solution was added as necessary in order to maintain the pH at about 2.0. The temperature was maintained about 80° C throughout this Example.

20 A precipitated product was retained in suspension by continuously agitating the beaker. The suspension was cured by stirring for about half an hour while maintaining the pH at about 2.0, and the temperature at about 80° C.

A dry calcined product was produced and recovered substantially in the manner described in example 1. Approximately 115 grams of an off-white powder was obtained. The powder was examined by X-ray diffraction analysis which determined that the major crystalline phase corresponded to a broad peak pattern for SnO₂. The X-ray pattern was also used to determine the average crystallite size of the powder which was about 88 Angstroms. The powder was examined further by X-ray fluorescence analysis which indicated that the powder contained about 89.54% SnO₂; 10.41% Sb₂O₃ and less than about 0.08% SiO₂. The Sb component of the SnO₂ was about 8.61%. The surface area which was measured by nitrogen absorption, was about 35 m²/g, and the dry powder electrical resistance was about 0.5 ohm-cm.

35 The results of this Example indicate that in the absence of SiO₂, and at an equivalent Sb level, the average crystallite size increases and the surface area decreases.

11EXAMPLE 4

This Example illustrates the affects of the presence of a promoter cation.

The process used in this Example was substantially identical to that described in Example 1 except that calcium chloride was not present during the precipitation.

After calcining, about 126 grams of an off-white powder was obtained. The product was examined by X-ray diffraction analysis which determined that the major crystalline phase corresponded to a broad peak pattern for SnO₂. The pattern was also used to determine the average crystallite size which was about 48 Angstroms. The powder was further examined by X-ray fluorescence analysis which determined that the powder contained about 81.92% SnO₂; 9.80% Sb₂O₃ and 7.54% SiO₂. The Sb component of the SnO₂ was about 8.92%. The surface area as measured by nitrogen absorption was about 121 m²/g, and the dry powder electrical resistance was about 13.3 ohm-cm.

Referring now to the Figure, Fig 1 is a photomicrograph at 3x130Kx magnification of the powder which was formed in accordance with this Example.

EXAMPLE 5

This Example was performed substantially in accordance Example 1 with the exception being that about 100 grams of CaCl₂ pellets are dissolved into the acidic solution of SbCl₄ and SbCl₃; instead of dissolving the CaCl₂ pellets into the initial aqueous HCl solution.

The process produced about 125 grams of an off-white powder. The powder was examined by X-ray diffraction analysis which determined that the major crystalline phase corresponded to a broad peak pattern for SnO₂. The pattern was also used to determine the average crystallite size which was about 49 Angstroms. The powder was further examined by x-ray fluorescence analysis which determined that the powder contained about 80.14% SnO₂; 9.48% Sb₂O₃ and 6.99% SiO₂. The Sb component of the SnO₂ was about 8.83% by weight. The surface area as measured by nitrogen absorption was about 109.6 m²/g, and the dry powder electrical resistance was about 7.0 ohm-cm.

The results of this Example indicate that the invention can produce a desirable ECP by introducing a promoter cation into the solution of tin and antimony salts.

12

EXAMPLE 6

This Example was performed substantially in accordance with Example 1 with the exception being that the precipitation step of the process was conducted at about 40 to 45° C.

5 This process obtained about 130 grams of an off-white powder. The powder was examined by X-ray diffraction analysis which indicated that the major crystalline phase corresponded to a broad peak pattern for SnO₂. The pattern was also used to determine the average crystallite size which was about 39 Angstroms. The powder was further examined by X-ray fluorescence analysis which indicated
10 that the powder contained about 80.44% SnO₂; 9.82% Sb₂O₃ and 8.35% SiO₂. The Sb component of the SnO₂ was about 9.08%. The surface area of the powder, as measured by nitrogen absorption, was about 103.1 m²/g, and the dry powder electrical resistance was about 14.1 ohm-cm.

The results of this Example indicate that the lower reaction
15 temperature caused formation of a small average crystallite size while avoiding adversely affecting the dry powder electrical resistance.

COMPARATIVE EXAMPLE 7

This Example comprises an electroconductive coating utilizing an
20 ECP of the present invention, and a composition made by the process described in European Patent Application Publication No. 0359569 (hereinafter "EPO '569"), the entire content of which is hereby incorporated by reference. The procedure of present Example 1 was used to prepare an ECP powder. The powder was first hammer-milled using a Mikro Pulverizer from Hosokawa Micron International, Inc.,
25 Summit, New Jersey. The powder was then fed through a funnel, and into a chamber that contains a set of revolving hammers. The hammers pulverize and push the powder through a metal screen. The screen contains rectangular slits, arranged in a herringbone pattern. Each slit is approximately one-half inch in length, and one-thirty second of an inch in width. About 200 grams of the
30 pulverized and screened powder was dispersed using a Hockmeyer high speed disperser into about 444 grams of High Temperature Varnish SS-10541, (a product of Werneke-Long, Inc., Tinley Park, Illinois), and 356 grams of a high viscosity aqueous solution containing about 10 grams of hydroxyethyl cellulose, (Natrosol-250HR from Aqualon Company, Hopewell, Virginia) in two liters of water. The
35 high speed disperser was operated for a period of about 15 minutes, at 3000 r.p.m. using a 1 1/2" blade so as to thoroughly disperse the powder into the aqueous matrix or vehicle. The dispersed powder was then diluted by the addition of more aqueous hydroxyethyl cellulose so that the concentration of powder became about 7.5%.

13

Four samples of the 7.5% dispersion were further diluted to give a series of dispersions ranging in powder concentration from about 1 to 4.0%. The diluted samples were used for forming coatings on glass plates, and the surface resistance of the coatings was then measured. The measured surface resistance at the different powder dilutions or loadings is listed in Table 1.

TABLE 1

	% EXAMPLE 1	Powder lbs/Kft ²	S.R. ohms/square
10	1	0.21	> 10 ¹²
	1.5	0.28	1 x 10 ⁸
	2	0.40	1 x 10 ⁷
	3	0.59	1 x 10 ⁶
	4	0.93	2 x 10 ⁵

15

An electroconductive powder, which is marketed by the Du Pont Company under the trademark ECP-S, was prepared substantially as described in Example 1 of EPO '569. ECP-S comprises a silica shell which includes a two-dimensional network of antimony-containing tin oxide upon the surface of the shell.

The powder of EPO '569 was first hammer-milled in the manner described above, and an approximately 250 gram sample was dispersed into about 500 grams of HTV, and about 250 grams of high viscosity aqueous hydroxyethyl cellulose, (0.5%), in the manner described above. A series of diluted samples ranging in powder concentration from about 1 to 5% was prepared as before, and used to form coatings on glass plates. The measured surface resistance at the different powder loading is listed in Table 2.

TABLE 2

	% ECP-S	Powder lbs/Kft ²	S.R. ohms/square
30	1	0.22	> 10 ¹²
	2	0.39	10 ⁹ to 10 ¹⁰
	2.5	0.54	2 x 10 ⁷
	3	0.60	3 x 10 ⁶
	4	0.92	1 x 10 ⁵
35	5	1.09	8 x 10 ⁴

The results listed in Tables 1 and 2 indicate a very similar efficiency-in-use for the two powders. However, the powders of the present invention overcome the need for a silica shell, and the attendant process steps to obtain the shell. Moreover, the off-white or generally transparent powders of the present invention also possess a desirable small crystallite size, while avoiding the presence of large quantities of antimony.

While certain aspects and embodiments of the invention have been described in detail, one of ordinary skill would recognize that other embodiments and variations are encompassed by the appended claims.

THE FOLLOWING IS CLAIMED:

- 5 1. An electroconductive powder comprising agglomerates of crystallites which comprise an intimate mixture of silica and an antimony-containing tin oxide, wherein the crystallites have an average diameter no greater than about 100 Angstroms, said mixture comprising about 1 to 20wt% silica, about 80 to 99wt% of an antimony-containing tin oxide, and wherein the antimony component of the tin oxide being between about 0.5 and 12.5wt%.
- 10 2. A process for preparing an electroconductive powder, which comprises the steps of:
- 15 (a) mixing an alkali silicate solution with at least one solution which comprises at least one of tin and antimony salts, optionally in the presence of a promoter cation, and while maintaining the pH in the range of about 1.0 to 3.0, and the temperature in the range of about 25 to 100° C,
- 20 (b) recovering a precipitate which comprises uniformly distributed silica and hydrous oxides of tin and antimony, washing the precipitate substantially free from water soluble species and drying; and
- (c) calcining the dried precipitate at a temperature of about 500 to 900° C, thereby obtaining an electroconductive powder comprising uniformly distributed silica and an antimony-containing tin oxide.
- 25 3. A process for obtaining an electroconductive powder comprising the steps of:
- (a) concurrently mixing at least one solution which comprises an alkali silicate with at least one other solution which comprises tin and antimony salts, optionally performing said mixing in the presence of at least one promoter metal cation,
- 30 (b) controlling the pH and temperature such that a precipitate is formed which comprises an intimate mixture of silica and hydrous oxides of tin and antimony,
- (c) heating the precipitate for a time and at a temperature sufficient to obtain an electroconductive powder comprising an intimate mixture of silica and an
- 35 antimony-containing tin oxide.
4. The process of Claim 1 or 2, wherein the quantity of silicate is sufficient to inhibit grain growth.

5. The process of Claim 1 or 2, wherein said cation comprises at least one member of the group consisting of alkali metals, alkaline earth metals, transition metals, and rare earth metals.

5

6. The process of Claim 1 or 2, wherein said tin and antimony salts comprise at least one of chlorides, sulfates, nitrates, oxalates, and acetates.

10

7. The process of Claim 1 or 2 wherein said silicate comprises at least one of sodium silicate and potassium silicate.

15


8. The process of Claim 4, wherein the quantity of silicate is sufficient to produce an electroconductive powder having crystallites which have an average diameter no greater than about 100 Angstroms.

9. The process of Claim 1 or 2, further comprising reducing the dimensions of said electroconductive powder.

20

10. A conductive surface comprising:
a binder and an electroconductive powder, wherein said powder comprises an intimate mixture of silica and an antimony-containing tin oxide, a surface area between about 20 and 200 M²/g, and a resistivity less than about 2000 ohm-cm.

1/1
FIG. 1

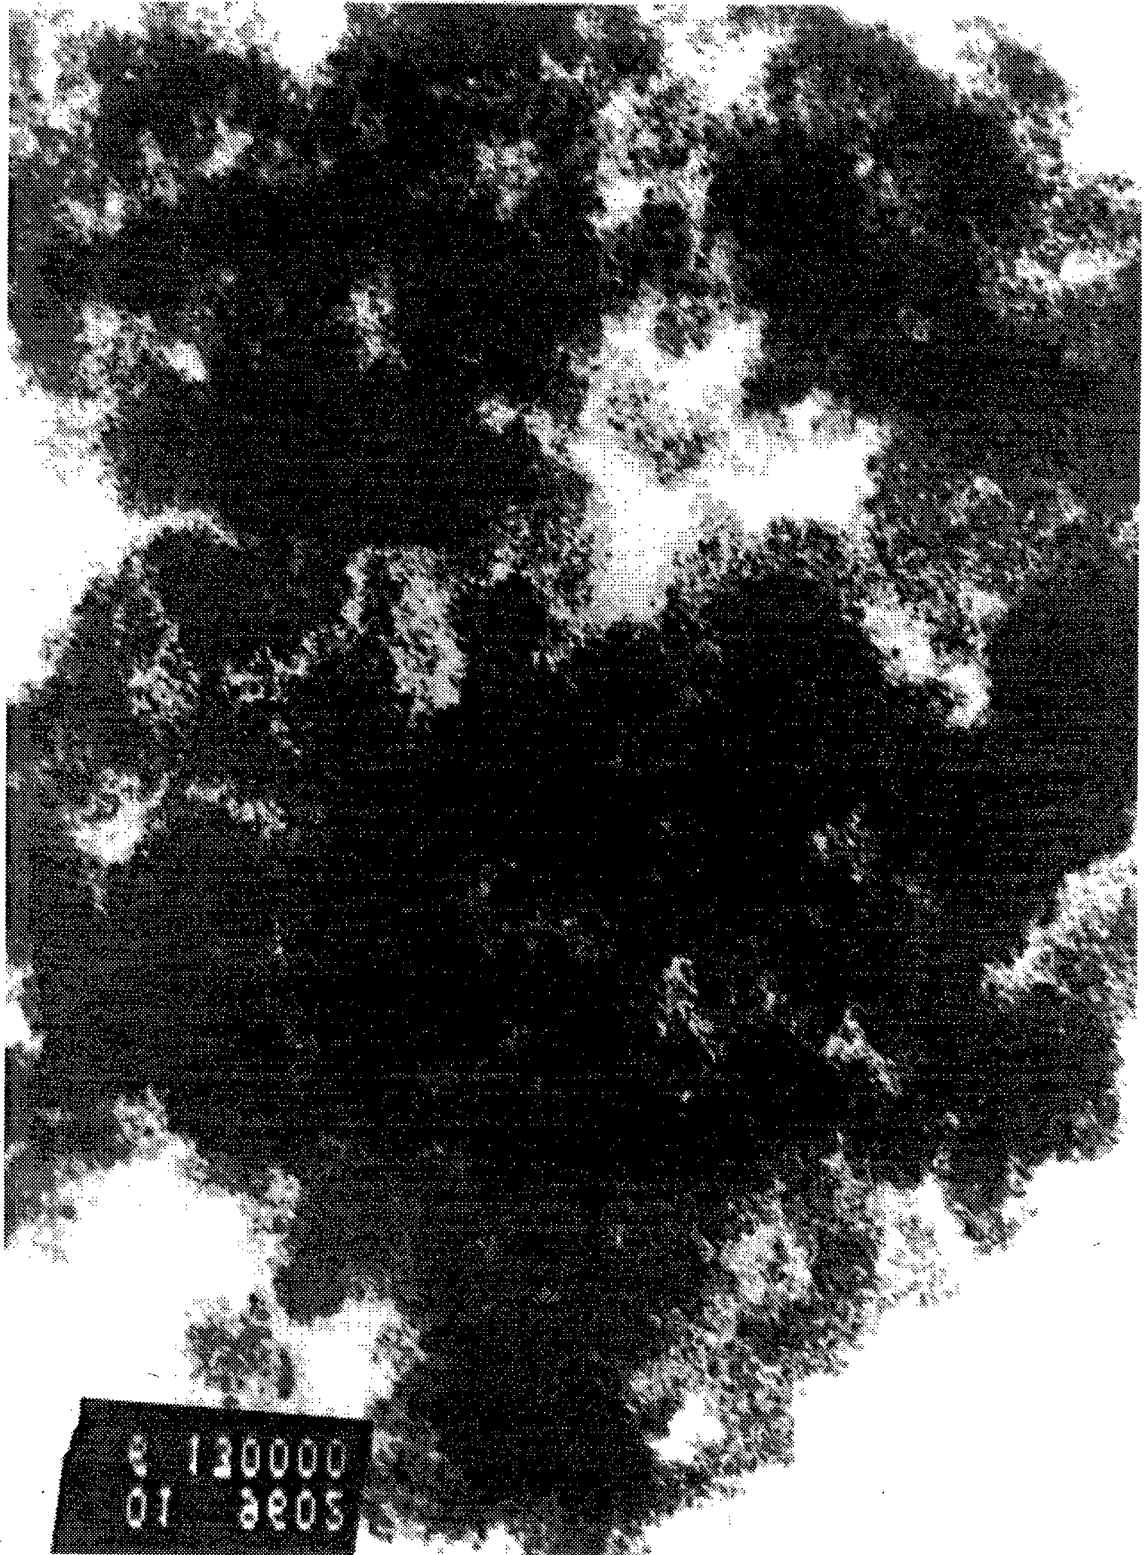

INTERNATIONAL SEARCH REPORT

PCT/US 93/05720

International Application No

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int.Cl. 5 H01B1/08;	H01B1/20;	H01C17/06; C09D5/24
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.Cl. 5	H01B ; H01C ; C09D	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X	DATABASE WPIL Section Ch, Week 16, Derwent Publications Ltd., London, GB; Class A14, AN 92-126294 & JP,A,4 062 713 (ISHIHARA) 27 February 1992 see abstract	1-3,6,10
A	EP,A,0 459 552 (METALLGESELLSCHAFT) 4 December 1991 see the whole document	1,2,6,10
A	EP,A,0 359 569 (DU PONT) 21 March 1990 cited in the application see the whole document	1-10
	-/--	
<p>¹⁰ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search		Date of Mailing of this International Search Report
14 SEPTEMBER 1993		27. 09. 93
International Searching Authority		Signature of Authorized Officer
EUROPEAN PATENT OFFICE		DROUOT M.C.

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category °	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	EP,A,0 025 583 (MITSUBISHI KINZOKU) 25 March 1981 see the whole document ---	1,2,10
A	US,A,5 104 583 (E.RICHARDSON) 14 April 1992 see the whole document ---	1-3,6,10
A,P	GB,A,2 253 839 (TIOXIDE) 23 September 1992 see the whole document ---	1-3,5-8, 10
A,P	GB,A,2 252 551 (TIOXIDE) 12 August 1992 see the whole document -----	1-3,5-8, 10

INTERNATIONAL SEARCH REPORT

PCT/US 93/05719

International Application No

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int.Cl. 5 H01B1/08;	C09C1/00;	C09C3/06
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.Cl. 5	H01B ; C09C	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹		
Category ^o	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X	DATABASE WPIL Section Ch, Week 16, Derwent Publications Ltd., London, GB; Class A14, AN 92-126294 & JP,A,4 062 713 (ISHIHARA) 27 February 1992 see abstract	1,2,5,6, 9,11
A	EP,A,0 459 552 (METALLGESELLSCHAFT) 4 December 1991 see the whole document	1,2,5-11
A	EP,A,0 359 569 (DU PONT) 21 March 1990 cited in the application see the whole document	1,2,4-11
		-/--
^o Special categories of cited documents : ¹⁰ "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search		Date of Mailing of this International Search Report
14 SEPTEMBER 1993		27. 09. 93
International Searching Authority		Signature of Authorized Officer
EUROPEAN PATENT OFFICE		DROUOT M.C.

ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.

US 9305720
SA 76161

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 14/09/93

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0459552	04-12-91	DE-A- 4017044	28-11-91
		AU-A- 7726991	28-11-91
EP-A-0359569	21-03-90	AU-B- 636116	22-04-93
		AU-A- 4136289	22-03-90
		JP-A- 2218768	31-08-90
		US-A- 5236737	17-08-93
EP-A-0025583	25-03-81	JP-C- 1296795	20-01-86
		JP-A- 56114218	08-09-81
		JP-B- 60021554	28-05-85
		JP-C- 1376521	08-05-87
		JP-A- 57011825	21-01-82
		JP-B- 60052090	18-11-85
		JP-C- 1449673	11-07-88
		JP-A- 56041603	18-04-81
		JP-B- 60021553	28-05-85
		US-A- 4373013	08-02-83
US-A- 4452830	05-06-84		
US-A-5104583	14-04-92	JP-A- 4227771	17-08-92
		US-A- 5178736	12-01-93
GB-A-2253839	23-09-92	None	
GB-A-2252551	12-08-92	None	