



- (51) **International Patent Classification:**
H01L 21/3065 (2006.01) *H01L 21/66* (2006.01)
- (21) **International Application Number:**
PCT/US2013/053649
- (22) **International Filing Date:**
5 August 2013 (05.08.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/713,185 12 October 2012 (12.10.2012) US
61/749,156 4 January 2013 (04.01.2013) US
13/774,006 22 February 2013 (22.02.2013) US
- (71) **Applicant:** APPLIED MATERIALS, INC. [US/US];
3050 Bowers Avenue, Santa Clara, California 95054 (US).
- (72) **Inventor:** GRIMBERGEN, Michael, N.; 767 Martinique
Drive, Redwood City, California 94587 (US).
- (74) **Agents:** PATTERSON, Todd, B. et al.; Patterson &
Sheridan, LLP, 3040 Post Oak boulevard, Suite 1500,
Houston, TX 77056-6582 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** DUAL ENDPOINT DETECTION FOR ADVANCED PHASE SHIFT AND BINARY PHOTOMASKS

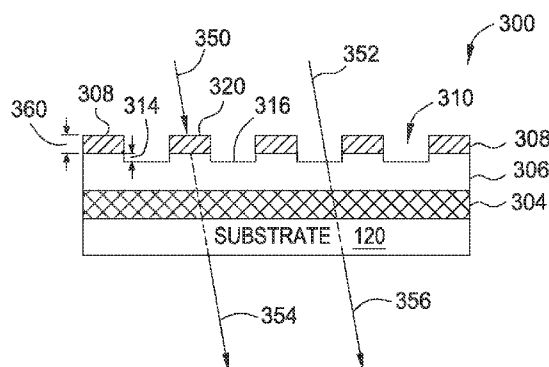


FIG. 3B

(57) **Abstract:** The present invention provides a method and apparatus for etching a photomask substrate with enhanced process monitoring, for example, by providing for optical monitoring at certain regions of the photomask to obtain dual endpoints, e.g., etch rate or thickness loss of both a photoresist layer and an absorber layer. By monitoring transmissivity of an optical beam transmitted through areas having photoresist layer and etched absorber layer at two different predetermined wavelength, dual process endpoints may be obtained by a signal optical detection.



DUAL ENDPOINT DETECTION FOR ADVANCED PHASE SHIFT AND BINARY PHOTOMASKS

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] Embodiments of the present invention generally relate to methods to detect endpoints for both a photoresist layer and an absorber layer in an etching process for the fabrication of photomasks useful in the manufacture of integrated circuits.

Description of the Related Art

[0002] In the manufacture of integrated circuits (IC), or chips, patterns representing different layers of the chip are created by a chip designer. A series of reusable masks, or photomasks, are created from these patterns in order to transfer the design of each chip layer onto a semiconductor substrate during the manufacturing process. Mask pattern generation systems use precision lasers or electron beams to image the design of each layer of the chip onto a respective mask. The masks are then used much like photographic negatives to transfer the circuit patterns for each layer onto a semiconductor substrate. These layers are built up using a sequence of processes and translate into the tiny transistors and electrical circuits that comprise each completed chip. Thus, any defects in the mask may be transferred to the chip, potentially adversely affecting performance. Defects that are severe enough may render the mask completely useless. Typically, a set of 15 to 30 masks is used to construct a chip and can be used repeatedly.

[0003] The next generation photomask as further discussed below is formed on a low thermal expansion glass or a quartz substrate having a multilayer film stack disposed thereon. The multilayer film stack may include at least an absorber layer and a photomask shift mask layer. When manufacturing the photomask, a photoresist layer is disposed on the film stack to facilitate transferring features into the film stack during the subsequent patterning processes. During the patterning process, the circuit design is written onto the

photomask by exposing portions of the photoresist to extreme ultraviolet light or ultraviolet light, making the exposed portions soluble in a developing solution. The soluble portion of the resist is then removed, allowing the underlying film stack exposed through the remaining photoresist to be etched. The etch process removes the film stack from the photomask at locations where the resist was removed, *i.e.*, the exposed film stack is removed.

[0004] During processing, endpoint data from the etching of the film stack for manufacturing photomasks may be used to determine whether the process is operating according to required specifications, and whether the desired results such as etch uniformity and feature critical dimensions are achieved. Since each photomask generally has its own set of features or patterns, different film stacks on the photomask being etched may yield different endpoint data upon different materials being used in the film stack, thereby making it difficult to determine if the desired etch results are obtained for a specific photomask manufacture process. Furthermore, during an etching process, the etching rate for etching the photoresist layer and the film stack for the photomask may be different. Accordingly, when directing a radiation to the photoresist layer and the film stack on the photomask, different thickness variation between the photoresist layer and the film stack may generate different reflective or transmissive signal to the endpoint data, therefore, making it even more difficult to determine an accurate endpoint for both the photoresist layer and the photomask etching process without interfered by the photoresist thickness variation. Thus, an accurate etching process endpoint control to the film stack disposed on the photomask and the photoresist layer thickness remaining on the photomask after the etching process for advanced PSM (phase-shift mask) or EUV technology is highly desirable.

[0005] Therefore, there is an ongoing need for improved etching endpoint process control in photomask fabrication, including improved apparatus and methods for collecting etch rate data and determining process endpoints.

SUMMARY OF THE INVENTION

[0006] The present invention provides a method and apparatus for etching a photomask substrate with enhanced process monitoring, for example, by

providing for optical monitoring at certain regions of the photomask to obtain dual endpoints, e.g., etch rate or thickness loss of both a photoresist layer and an absorber layer. In one embodiment, a method of determining dual etching endpoints on an etching process includes performing an etching process on an absorber layer disposed on a first surface of a substrate through a patterned photoresist layer in a plasma etch chamber, directing radiation having a wavelength between about 200 nm and about 800 nm to an area of the absorber layer uncovered by the patterned photoresist layer during the etching process, collecting a first optical signal transmitted through the area of the absorber layer uncovered by the patterned photoresist layer, collecting a second optical signal transmitted through an area of the absorber layer covered by the patterned photoresist layer, analyzing a waveform obtained from the optical signals at two different wavelengths, and determining a first endpoint for etching the absorber layer and a second endpoint for etching the photoresist layer based on the transmitted optical signal at the two different wavelengths.

[0007] In another embodiment, a method of determining dual etching endpoints on an etching process includes performing an etching process on a chromium containing layer disposed on a first surface of a substrate through a patterned photoresist layer in a plasma etch chamber, directing a radiation source having a wavelength from about 200 nm and about 800 nm from the first surface of the substrate to areas both covered and uncovered by the patterned photoresist layer, collecting a first optical signal transmitted through the area of the chromium layer uncovered by the patterned photoresist layer to obtain a first waveform from the transmitted first optical signal, analyzing the first waveform obtained the transmitted first optical signal transmitted through the first surface of the substrate, determining a first endpoint of the etching process when the first optical signal in the first waveform becomes saturated, collecting a second optical signal transmitted through an area of the absorber layer covered by the patterned photoresist layer to obtain a second waveform from the transmitted second optical signal, analyzing the second waveform obtained from the second optical signals transmitted through the photoresist layer, and determining a second endpoint of the etching process when the second waveform becomes saturated.

[0008] In yet another embodiment, a method of determining dual etching endpoints on an etching process includes performing an etching process on a chromium containing layer disposed on a first surface of a substrate through a patterned photoresist layer in a plasma etch chamber, directing a radiation source to areas of the chromium layer uncovered by the patterned photoresist layer and a surface of the photoresist layer, collecting a first optical signal at a wavelength between about 200 nm and about 400 nm transmitted through the area uncovered by the patterned photoresist layer to obtain a first waveform from the transmitted first optical signal, analyzing a first waveform obtained the transmitted first optical signal reflected from the first surface of the substrate, determining a first endpoint of the etching process when the transmitted first optical signal becomes saturated, directing a second radiation source having a second wavelength about greater than 400 nm from the area of the surface of the photoresist layer, collecting a second optical signal transmitted through the surface of the photoresist layer to obtain a second waveform from the transmitted second optical signal, analyzing a second waveform obtained the transmitted second optical signal transmitted through the photoresist layer, and determining a second endpoint of the photoresist layer when the transmitted second optical signal becomes saturated.

[0009] In yet another embodiment, a method of determining a thickness loss of a photoresist layer during an etching process includes performing an etching process on an absorber layer disposed on a first surface of a substrate through a patterned photoresist layer in a plasma etch chamber, directing radiation having a wavelength greater than 400 nm to an area of the absorber layer covered by the patterned photoresist layer during the etching process, collecting an optical signal transmitted through the area of the absorber layer covered by the patterned photoresist layer, analyzing a waveform obtained from the optical signals at the wavelength greater than 400 nm, and determining a thickness loss of the photoresist layer for etching the photoresist layer based on the transmitted optical signal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] So that the manner in which the above recited features, advantages and objects of the invention are attained and can be understood in detail, a more particular description of the invention, briefly summarized above, may be had by reference to the embodiments thereof which are illustrated in the appended drawings.

[0011] It is to be noted, however, that the appended drawings illustrate only typical embodiments of this invention and are therefore not to be considered limiting of its scope, for the invention may admit to other equally effective embodiments.

[0012] Figure 1 illustrates a etch chamber incorporating one embodiment of the present invention;

[0013] Figure 2 illustrates a flow diagram regarding an endpoint determination process during fabrication process in accordance with one embodiment of the present invention;

[0014] Figures 3A-3C illustrate schematically structures of one embodiment of the photomasks during fabrication;

[0015] Figure 4 illustrates one embodiment of optical signals detected for etch rate determination for etching an absorber layer; and

[0016] Figures 5A-5B illustrate one embodiment of optical signals detected for etch rate determination for etching a photoresist layer.

[0017] To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures. It is contemplated that elements and features of one embodiment may be beneficially incorporated in other embodiments without further recitation.

[0018] It is to be noted, however, that the appended drawings illustrate only exemplary embodiments of this invention and are therefore not to be considered limiting of its scope, for the invention may admit to other equally effective embodiments.

DETAILED DESCRIPTION

[0019] The present invention provides a method and apparatus for etching a photomask substrate with enhanced process monitoring, for example, by providing for optical monitoring at certain regions of the photomask to obtain desired etch rate or endpoint determination for both a photoresist layer and an absorber layer disposed on the photomask substrate. Although the discussions and illustrative examples focus on the etching rate detection, thickness loss and process endpoint determination during an etching process of a photoresist layer and an absorber layer disposed on a photomask substrate, various embodiments of the invention can also be adapted for process monitoring of other suitable substrates, including transparent substrates, or dielectric substrates and optical disks. Although the discussions and illustrative examples focus on the etching of a photomask structure, various embodiments of the invention can also be adapted for process monitoring of other suitable substrates, including transparent or dielectric substrates or other semiconductor wafers.

[0020] Figure 1 is a schematic cross sectional view of a plasma etch chamber 10 in accordance with one embodiment of the invention. Suitable plasma etch chambers include the Tetra™ II photomask etch chamber or the Decoupled Plasma Source (DPS™) chamber available from Applied Materials, Inc., of Santa Clara, California. Other process chambers may also be used in connection with embodiments of the invention, including, for example, capacitive coupled parallel plate chambers and magnetically enhanced ion etch chambers, as well as inductively coupled plasma etch chambers of different designs. The particular embodiment of the etch chamber 10 shown herein is provided for illustrative purposes and should not be used to limit the scope of the invention. It is contemplated that the invention may be utilized in other processing systems, including those from other manufacturers.

[0021] The process chamber 10 generally includes a cylindrical sidewall or chamber body 12, an energy transparent ceiling 13 mounted on the body 12, and a chamber bottom 17. The ceiling 13 may be flat, rectangular, arcuate, conical, dome or multi-radius shaped. At least one inductive coil 26 is disposed above at least a portion of the ceiling 13. In the embodiment depicted in Figure 1A, two concentric coils 26 are shown. The chamber body 12 and the chamber bottom 17 of the process chamber 10 can be made of a metal, such as anodized aluminum, and the ceiling 13 can be made of an energy transparent material such as a ceramic or other dielectric material.

[0022] A substrate support member 16 is disposed in the process chamber 10 to support a substrate 120 during processing. The support member 16 may be a conventional mechanical or electrostatic chuck with at least a portion of the support member 16 being electrically conductive and capable of serving as a process bias cathode. While not shown, a photomask adapter may be used to secure the photomask on the support member 16. The photomask adapter generally includes a lower portion milled to cover an upper portion of the support member and a top portion having an opening that is sized and shaped to hold a photomask. In one embodiment, the top portion of the photomask adapter has a square opening. A suitable photomask adapter is disclosed in U.S. Patent No. 6,251,217, issued on Jun. 26, 2001, which is incorporated herein by reference to the extent not inconsistent with aspects and claims of the invention.

[0023] Process gases are introduced into the process chamber 10 from a process gas source 48 through a gas distributor 22 peripherally disposed about the support member 16. Mass flow controllers (not shown) for each process gas, or alternatively, for mixtures of the process gas, are disposed between the process chamber 10 and the process gas source 48 to regulate the respective flow rates of the process gases.

[0024] A plasma zone 14 is defined by the process chamber 10, the substrate support member 16 and the ceiling 13. A plasma is generated in the plasma zone 14 from the process gases by supplying power from a power supply 27 to the inductive coils 26 through an RF match network 35. The support member 16 may include an electrode disposed therein, which is

powered by an electrode power supply 28 and generates a capacitive electric field in the process chamber 10 through an RF match network 25. Typically, RF power is applied to the electrode in the support member 16 while the body 12 is electrically grounded. The capacitive electric field, which is transverse to the plane of the support member 16, influences the directionality of charged species to provide more anisotropic etching of the substrate 120.

[0025] Process gases and etchant byproducts are exhausted from the process chamber 10 through an exhaust port 34 to an exhaust system 30. The exhaust system 30 may be disposed in the bottom 17 of the process chamber 10 or may be disposed in the body 12 of the process chamber 10 for removal of process gases. A throttle valve 32 is provided in the exhaust port 34 for controlling the pressure in the process chamber 10.

[0026] Figure 1 further illustrates an endpoint detection system 164 operatively coupled to the process chamber 10 in accordance with one embodiment of the invention. According to embodiments of the invention, at least one view port (or called optical access port) is provided in of the substrate support member 16. The optical access port may generally comprise a flat window made of quartz or other materials that transmit light over a broad wavelength spectrum. In the example shown in Figure 1, the two optical access ports comprise respectively a window at a peripheral region 16P, and a window 112 at a central region 16C. The endpoint detection system 164 is configured to detect optical signals through these windows, which allows optical monitoring of various locations on the photomask substrate 120 from its backside during etching when the detection is in transmission mode. It is noted that different numbers of windows may be provided at other locations of the substrate support member 16.

[0027] The endpoint detection system 164 comprises optical setup for operating in reflection or transmission modes, and is configured for different types of measurements such as reflectance or transmittance, interferometry, or optical emission spectroscopy. Depending on the application of interest, e.g., the material layers or substrate structure being processed, endpoints may be detected based on a change in the reflectance or transmittance intensities, the

number of interference fringes, or changes in optical emission intensities at specific wavelengths, or a combination thereof.

[0028] The optical setup of the endpoint detection system 164 in a reflection mode of operation allows reflectance (or reflectometry) and interferometric measurement to be performed. The endpoint system 164 generally comprises an optical source 166, a focusing assembly 168 for focusing an incident optical beam 176 having at least two wavelengths from the optical source 166 onto an spot or area 180 on the backside of substrate 120, when a reflection mode is used, and a photodetector 170 for measuring the intensity of a return optical beam 153 transmitted through the area 180 of the substrate 120.

[0029] Alternatively, an external light source 190 is used for transmittance measurements. For transmission mode, the external light source 190 will be coupled into the chamber 10 through a window 192 provided on the ceiling 13. The use of the external light source 190 for transmittance measurements has an advantage because it can provide a more stable signal, as compared to a plasma source, which may be subjected to fluctuations arising from the etch process. The external light source 190 may be configured to allow monitoring at selected wavelengths that are free from potential interferences from the plasma species. The external light source 190 can be operated in a continuous or pulsed mode to allow for various signal processing options for enhancing endpoint detection capabilities and so on. Details for pulsed source operation with light source 190 are similar to those previously described for source 166. Other embodiments may involve the use of a pulsed or continuous source for both reflection and transmission measurements. In another embodiment, the external light source 190 may be provided through the optical access window 112 in the substrate support member 16, and the transmission signal monitored through the window 192.

[0030] As an example of transmission monitoring, output from the light source 190 is coupled via a fiber 194 to pass through the window 192 onto the substrate 120 such as a photomask. Transmitted light (e.g., off a feature on the photomask) is collected by a collimating lens 196 further passing through the substrate 120 to the photodetector 170 disposed in the endpoint detector 164.

[0031] The optical setup of the endpoint detection system 164 in a transmission mode of operation may include the light source 190 positioned to direct an optical signal through substrate 120 to the photodetector 170. Optionally, the light source 190 may be the plasma utilized to perform the etch process. Alternatively, the optical source 166 may be positioned below the substrate 120 in reflection mode of operation to direct an optical signal to a backside of the 120 to the photodetector 170 as needed.

[0032] The photodetector 170 may be multi-wavelength detector, or a spectrometer. Based on the measured signals of the transmitted optical beam 153, a computer system 172 calculates portions of the real-time waveform and compares it with a stored characteristic waveform pattern to extract information relating to the etch process. In this case, the calculation may be based on slope changes or other characteristic changes in the detected signals, either in reflection or transmission mode, for example, when a film is etched through. Alternatively, the calculation may be based on interferometric signals as the depth of a trench or the thickness of a film changes during etching. In other embodiments, more detailed calculations may be performed based on reflection and transmission data obtained over a wide spectrum in order to determine the depth or thickness at any point in the etch process, or to determine the lateral dimensions of the features being etched.

[0033] The light source 190 provides a signal having certain range including at least first wavelength and a second wavelength. The first and second wavelengths are selected such that a signal characteristic of the first wavelength interfacing with a photoresist layer is the inverse of a signal characteristic of the second wavelength interfacing with the absorber layer. The signal characteristic may be intensity or polarization as needed. The inverse characteristic is utilized to cancel out the effect or interference with the signal interfacing with the absorber layer to leave a resultant signal primarily composed of the portion of the optical signal interfaced with a target being etch, such as the absorber layer disposed on the substrate 120. As the resultant signal has less noise, a more precise and accurate determination of an etch endpoint or thickness of the target material may be realized. In one configuration, the second wavelength is selected to have a wavelength about or

equal to twice the wavelength of the first wavelength. In one embodiment, the first wavelength is configured to be around 200 nm and about 400 nm, such as between about 230 nm and about 350 nm. The second wavelength is configured to be around 400 nm and about 800 nm.

[0034] The light source 190 (which may include multiple individual light sources), may be polychromatic, white light, or other light source suitable for providing light in the at least first and second wavelengths. In general, the optical signal from the transmitted beam 153 may be analyzed to extract information regarding the presence or absence of layers (e.g., the photoresist layer or the absorber layer, such as a metal-containing layer), or the thickness of certain material layers within the area 180. The intensity of the incident light beam 160 is selected to be sufficiently high to provide the transmitted beam 153 with a measurable intensity. The lamp can also be switched on and off to subtract background light such as from the plasma. In one embodiment, the light source 190 (or the light source 166) provides polychromatic light, e.g., from an Hg-Cd lamp or a light emitting diode (LED), which generates light in a wavelength range from about 200 nm to about 800 nm. The transmitted beam 153 can be analyzed by a spectrometer (array detector with a wavelength-dispersive element) to provide data over a wide wavelength range, such as ultraviolet to visible, from about 200 nm to 800 nm. The light source 190 (or the light source 166) can also comprise a flash lamp, e.g., a Xe or other halogen lamp, or a monochromatic light source that provides optical emission at selected wavelengths, for example, a He-Ne or ND-YAG laser.

[0035] Optionally, a light beam positioner 184 may be used to move the incident light beam 176 across the substrate 120 to locate a suitable portion of the substrate surface on which to position the beam spot 180 to monitor an etching process. The light beam positioner 184 may include one or more primary mirrors 186 that rotate at small angles to deflect the light beam from the light source 166 onto different positions of the substrate surface. The photodetector 170 comprises a light-sensitive electronic component, such as a photovoltaic cell, photodiode, or phototransistor, which provides a signal in response to a measured intensity of the transmitted light beam 153. The signal can be in the form of a change in the level of a current passing through an

electrical component or a change in a voltage applied across an electrical component. The photodetector 170 can also comprise a spectrometer (array detector with a wavelength-dispersive element) to provide data over a wide wavelength range, such as ultraviolet to visible, from about 200 nm to 800 nm. The transmitted light beam 153 undergoes constructive and/or destructive interference which increases or decreases the intensity of the light beam, and the photodetector 170 provides an electrical output signal in relation to the measured intensity of the transmitted light beam 153. The electrical output signal is plotted as a function of time to provide a spectrum having numerous waveform patterns corresponding to the varying intensity of the transmitted light beam 153.

[0036] A computer program executed on a computer system 172 compares the shape of the measured waveform pattern of the transmitted light beam 153 to a stored characteristic (or reference) waveform pattern and determines the endpoint of the etching process when the measured waveform pattern is the same as the characteristic waveform pattern. As such, the period of the interference signal may be used to calculate the depth and etch rate. The program may also operate on the measured waveform to detect a characteristic waveform, such as, an inflection point. The operations can be simple mathematic operations, such as evaluating a moving derivative to detect an inflection point.

[0037] The computer program utilizes the inverse characteristic of the signal interfacing with the photoresist to remove or cancel out the contribution of the signal interfacing with the photoresist, thus allowing the signal interfacing with the target layer being etched to be more accurately analyzed to determine the endpoint of the etched target layer.

[0038] The endpoint detection system 164 comprises optical setup for operating in at least one of reflection, interferometry or transmission modes, and is configured for different types of measurements such as reflectance or transmittance, interferometry, or optical emission spectroscopy. Depending on the application of interest, e.g., the material layers or substrate structure being processed, endpoints may be detected based on a change in the reflectance or transmittance intensities, the number of interference fringes, or changes in

optical emission intensities at specific wavelengths, or a combination thereof. In one particular embodiment depicted therein, the endpoint detection system 164 is configured to detect a process endpoint based on a change in the transmittance transmitted through an etched substrate surface.

[0039] Figure 2 is a flow diagram of one embodiment of a method 200 for etching an absorber layer formed in a film stack having a patterned photoresist layer disposed thereon on a photomask substrate, such as an absorber layer 306 formed in a film stack 300 having a patterned photoresist layer 308 disposed on a photomask substrate 120 depicted in Figure 3A. Dual endpoints may be determined for an etching process for etching both the photoresist layer 308 and the absorber layer 306. The etching process performed to etch the film stack 300 may be monitored by different etch rate detection techniques of the present invention. The film stack 300 disposed on the photomask substrate 120 that may be utilized to form desired features (i.e., openings 310) in the film stack 300. Although the method 200 is described below with reference to a substrate utilized to fabricate a photomask, the method 200 may also be used to advantage in other photomask etching or any etching application.

[0040] The method 200 begins at block 202 when the photomask substrate 120 is transferred to and placed on a substrate support member disposed in an etch reactor, such as the etching chamber depicted in Figure 1. As described above, the photomask substrate 120 includes an optically transparent silicon based material, such as quartz or low thermal expansion glass layer having the absorber layer 306 disposed thereon defined by the patterned photoresist layer 308 having portions 312 of the absorber layer 306 exposed by the patterned photoresist layer 308 readily for etching. In one embodiment, a phase shift mask layer 304 may be disposed between the substrate 120 and the absorber layer 306.

[0041] In one embodiment, the photomask substrate 120 has a rectangular shape having sides between about 5 inches to about 9 inches in length. The photomask substrate 120 may be between about 0.15 inches and about 0.25 inches thick. In one embodiment, the photomask substrate 120 is about 0.25 inches thick. The absorber layer 306 may be a metal containing layer, e.g., a chromium containing layer, such as a Cr metal, chromium oxide (CrO_x),

chromium nitride (CrN) layer, chromium oxynitride (CrON), or multilayer with these materials, as needed. The phase shift mask layer 304 may be a molybdenum containing layer, such as Mo layer, MoSi layer, MoSiN, MoSiON, and the like. The patterned photoresist layer 308 is then formed over the absorber layer 306 having openings 310 formed therein that expose portions 312 of the absorber layer 306 for etching. The photoresist layer 308 may have an initial thickness 362 and comprise any suitable photosensitive resist materials, such as an e-beam resist (for example, a chemically amplified resist (CAR)), and deposited and patterned in any suitable manner. The photoresist layer may be deposited to a thickness between about 100 nm and about 1000 nm.

[0042] At block 204, an etching process is performed to etch the absorber layer 306 disposed on the substrate 120. The patterned photoresist layer 308 may serve as a mask layer to protect some portion of the absorber layer 306 from being etched during the absorber layer etching process. The etching process endpoint detection for etching the absorber layer 306 can be monitored either in reflection or transmission mode, and reflectance, transmittance and/or interferometric signals can be performed. In one particular embodiment depicted therein, the process endpoint detection for etching the absorber layer 306 is monitored in transmission mode.

[0043] In one embodiment, halogen-containing gases are used for etching different materials found on the film stack 200 of the photomask structure. For example, a process gas containing chlorine may be used for etching an absorber layer (e.g., a chromium containing layer). Alternatively, a fluorine-containing gas such as trifluoromethane (CHF_3) or tetrafluoromethane (CF_4) may also be used during etching of the absorber layer 306. A plasma is generated from the process gas to perform the etching process until the underlying surface of the phase shift mask layer 304 is exposed. Figure 3B depicts an embodiment wherein a portion 314 of the absorber layer 306 has been etched away from the substrate 120 in the middle of the etching process after performing the etching process for a period of time.

[0044] At block 206, while etching the absorber layer 306, an incident optical beam 350, 352 from the endpoint detection system 164 or the light source 190

is directed to the etched substrate surface. The incident optical beam 350, 352 may have a wavelength between about 170 nm to about 800 nm. The incident optical beam 350, 352, as shown in Figure 3B, from the light source 190 is directed, through one of the windows in the chamber lid, onto one or more areas of the photomask substrate 120. The incident optical beam 350, 352 is directed to different locations of the substrate with different materials, such as on a surface 320 of the photoresist layer 308 and the exposed portion 316 of the absorber layer 306. The incident optical beam 350, 352 is directed to the opening 310, such as open areas where the absorber layer 306 is exposed by the patterned photoresist layer 308 to be etched to form trenches, vias, and apertures for the film stack 300, and also to the surface 320 of the photoresist layer 308. Different transmission signal may be obtained. By analyzing different signals as obtained, dual etching endpoints may be obtained. Alternatively, the plasma itself may be used as the light source.

[0045] A return beam 354, 356, e.g., transmitted through the surface 320 of the photoresist layer 308 and the etched absorber layer 306 within the openings 310 being etched and exposed, is detected to the photodetector 170 of the etch rate detection system 164. During etching of the absorber layer 306, as well as consumption of the photoresist layer 308 during etching, the intensity of the transmitted optical beam 354, 356 changes overtime. The time-varying intensity of the transmitted optical beam 354, 356 at particular wavelengths is then analyzed to determine at least one of the depth etched, the etch rate and the end point of the absorber layer etching process.

[0046] At block 208, a first etching process endpoint is determined by analyzing the waveform obtained from the detected transmitted optical beam 356 transmitted from a surface 316 of the etched substrate when the absorber layer 306 exposed by the patterned photoresist layer 308 is removed from the substrate 102, as shown in Figure 3C. The optical signals as detected from the transmitted beam 354, 356 is utilized for both of the etch rate determination for etching the absorber layer 306 and the thickness loss of the photoresist layer 308. In one embodiment, the wavelength of the optical beam 354, 356 is controlled at a light wavelength at between about 200 nm and about 800 nm from the light source 190. An optical signal 402, as shown in Figure 4, is plotted

as a function of time to provide a waveform pattern corresponding to the varying intensity of the transmitted optical beam 356 over time transmitted through the absorber layer 306 without interference with the photoresist layer 308. The waveform pattern will be different at other wavelengths. Collecting a spectrum of wavelengths will provide numerous waveform patterns. The optical signal 402 is detected real-time when the absorber layer 306 is etched in the etch reactor. In the embodiment depicted in Figure 4, the intensity of the transmitted beam 356 is gradually increasing at a slope 404 as the underlying phase shift mask layer 304 is gradually exposing. When the absorber layer 306 is gradually etched away, the intensity of the transmitted optical beam 356 gradually increases until becoming saturated at a situated intensity 410. When the intensity of the optical signal 402 is saturated and at a steady state for a time period 406, it indicates the absorber layer 306 has been etched away, exposing the underlying phase shift mask layer 304, thereby determining a time point 412 as the proper endpoint for etching away the absorber layer 306.

[0047] In one embodiment, an endpoint for etching the absorber layer 306 may be determined when the intensity of the transmitted optical beam 356 as detected is between about 60 percent and about 95 percent, such as between about 70 percent to 90 percent, more than an initial detected transmitted optical beam intensity 408 collected in a beginning time point 403 of the detection process (*e.g.*, from intensity 408 to intensity 410). In another embodiment, the endpoint for etching the absorber layer 306 may be determined when the slope of the optical signal 402 increases at least two times of its initial amount. In other word, the endpoint for etching the absorber layer 306 is determined when a change in slope is about greater than about 50 percent of the original detected slope. In yet another embodiment, the endpoint for etching the absorber layer 306 may be determined when the optical signal 402 has become saturated and remains in a steady state for at least about a time period 406, such as greater than 3 seconds. In an exemplary embodiment wherein a light source is between about 200 nm and about 400 nm, such as between about 230 nm and about 350 nm, for example about 230 nm, wavelength is utilized to detect the endpoint for etching the absorber layer 306, the process endpoint occurred at time point 412 is between about 5 seconds and about 600 seconds.

[0048] At block 210, after the first end point for etching the absorber layer 306 is determined, a second end point for the etching photoresist layer 308 may be subsequently determined by analyzing a spectrum 508 obtained from the transmitted light beam 354 transmitted through the photoresist layer 308, as shown in Figure 5B.

[0049] Referring first to Figure 5A, different waveforms may be obtained at different photoresist layer thickness during different stages of the absorber layer etching process. A first waveform 502 is obtained at initial stage of the etching process of the absorber layer 306 so that most of the bulk photoresist layer thickness, such as the thickness 362 depicted in Figure 3A, of the photoresist layer 308 is still present on the substrate 120. A second waveform 504 is obtained during etching of the photoresist layer 308 after a portion of the photoresist layer 308 is consumed, leaving the remaining thickness 360 depicted in Figure 3B, during the etching process of the absorber layer 306. A third waveform 506 is obtained during etching of the photoresist layer 308 after most of the photoresist layer 308 has been consumed, leaving the remaining thickness 364 depicted in Figure 3C, after the etching process of the absorber layer 306. As shown in Figure 5A, the first, second and the third waveforms 502, 504 and 506 are mostly overlapped at a short wavelength range less than 400 nm, as indicated in a short wavelength region 505 defined by the dotted line 503. At a wavelength greater than 400 nm, the first, second and third waveforms 502, 504, 506, have their own unique signal intensity behaviors, as indicated in a long wavelength region 507 defined by the dotted line 503. For example, at a wavelength greater than 400 nm in the long wavelength region 507, the signal intensities of the first, second and third waveforms 502, 504, 506 are distinguishably different from each other and have their own specific intensities that represent different detected photoresist layer thickness. Accordingly, by using a light source with specific wavelength range, such as greater than 400 nm, different thickness of the photoresist layer 308 remaining on the substrate 120 may be determined. In one embodiment, a light source with wavelength in long wavelength range, such as greater than 400 nm, is utilized to detect an endpoint (or thickness loss) of the photoresist layer 308.

[0050] Figure 5B depicted an optical signal 508 indicating the signal intensity change of the transmitted light source 354 transmitting through the photoresist layer 308 during the etching process. The downturn 510 of the optical signal 508 at a wavelength less than 400 nm, indicated by the dotted line 512, indicates that the photoresist layer 308 at this wavelength range is not substantially transparent. Thus, an absorber layer etching endpoint may not be easily determined using the signal change for less than 400 nm wavelength signals. As the optical signal 508 transitions to a longer wavelength range, e.g., greater than 400 nm wavelength, a distinct peak 514 may be observed. This peak 514 shifts in wavelength as the thickness of the photoresist layer 308 is gradually consumed and etched away. At individual wavelengths, the signal 508 increases or decreases as the photoresist layer becomes thinner. After the optical signal 508 has reached to a certain value 516, an endpoint of the photoresist layer etching/thickness loss/thickness consumption process may be determined. Alternatively, the remaining thickness of the photoresist layer 308 on the substrate 120 may be determined based on the signal intensity of the optical signal 508 versus wavelength as detected. Alternatively, the endpoint may be obtained by time mode based on the etch rate detected. After a predetermined processing time is reached, the desired depth of the feature etched in the quartz substrate is reached.

[0051] Accordingly, dual endpoints of etching the photoresist layer 308 and the absorber layer 306 may both be obtained during one etching process by using one light beam radiation with broad range of wavelength. Subsequently, the dual endpoint detection process may be determined by splitting the analyzing process into two analyzing step process so as to analyze waveforms in two different wavelength ranges to determine the endpoints for each of the photoresist layer 308 and the absorber layer 306.

[0052] In one embodiment, an endpoint for etching the photoresist layer 308 may be determined when the intensity of the transmitted optical beam 356 as detected is between about 50 percent and about 90 percent, such as between about 60 percent and 80 percent, below the peak 514 of the intensity of the optical signal 508 collected during etching, as shown in Figure 5B. In yet another embodiment, the endpoint for etching the photoresist layer 308 may be

determined when the optical signal 508 has become saturated and remains in a steady state condition exceeding a predetermined period of time 518, such as greater than 3 seconds. In an exemplary embodiment wherein a light source is between about 400 nm and about 800 nm, such as about 450 nm wavelength, is utilized to detect the endpoint for etching the photoresist layer 308, the process endpoint may be selected as a time period is between about 5 seconds and about 600 seconds.

[0053] By monitoring transmissivity of an optical beam transmitted through areas having photoresist layer and etched absorber layer at two different predetermined wavelengths, dual process endpoints may be obtained by a signal optical detection. By analyzing waveforms obtained from the transmitted optical beam transmitted through an etched substrate surface at different wavelengths at different etching stage, dual process endpoints for both the photoresist layer etching and the absorber layer etching may be obtained. These improvements also allow reliable etch rate/loss of thickness and endpoint determination for photoresist layer and absorber layer etching applications.

[0054] While the foregoing is directed to embodiments of the present invention, other and further embodiments of the invention may be devised without departing from the basic scope thereof, and the scope thereof is determined by the claims that follow.

Claims:

1. A method of determining dual etching endpoints on an etching process, comprising:
 - performing an etching process on an absorber layer disposed on a first surface of a substrate through a patterned photoresist layer in a plasma etch chamber;
 - directing radiation having a wavelength between about 200 nm and about 800 nm to an area of the absorber layer uncovered by the patterned photoresist layer during the etching process;
 - collecting a first optical signal transmitted through the area of the absorber layer uncovered by the patterned photoresist layer;
 - collecting a second optical signal transmitted through an area of the absorber layer covered by the patterned photoresist layer;
 - analyzing a waveform obtained from the optical signals at two different wavelengths; and
 - determining a first endpoint for etching the absorber layer and a second endpoint for etching the photoresist layer based on the transmitted optical signal at the two different wavelengths.
2. The method of claim 1, wherein the substrate is a photomask reticle.
3. The method of claim 1, wherein the two different wavelengths comprises:
 - a first wavelength having a wavelength between about 200 nm and about 400 nm, and
 - a second wavelength having a wavelength greater than 400 nm.
4. The method of claim 1, wherein analyzing the waveform further comprises:
 - analyzing a first waveform in a transmission form plotted as a function of intensity verses time at a wavelength between about 200 nm and about 400 nm.

5. The method of claim 4, wherein analyzing the waveform further comprises:
analyzing a second waveform as a function of time verses intensity at a wavelength greater than 400 nm.
6. The method of claim 1, further comprising:
determining the first endpoint for etching the absorber layer in response to the optical signal becoming saturated.
7. The method of claim 1, wherein the absorber layer is a Cr containing layer.
8. The method of claim 1, further comprising:
determining the second endpoint for etching the photoresist layer in response to the optical signal becoming saturated.
9. The method of claim 3, wherein the first wavelength is between about 230 nm and about 350 nm.
10. The method of claim 9, wherein the second wavelength is between about 400 nm and about 800 nm.
11. The method of claim 1, wherein the photoresist layer has a thickness between about 100 nm and about 1000 nm.
12. A method of determining dual etching endpoints on an etching process, comprising:
performing an etching process on a chromium containing layer disposed on a first surface of a substrate through a patterned photoresist layer in a plasma etch chamber;
directing a radiation source having a wavelength from about 200 nm and about 800 nm from the first surface of the substrate to areas both covered and uncovered by the patterned photoresist layer;

collecting a first optical signal transmitted through the area of the chromium layer uncovered by the patterned photoresist layer to obtain a first waveform from the transmitted first optical signal;

analyzing the first waveform obtained the transmitted first optical signal transmitted through the first surface of the substrate;

determining a first endpoint of the etching process when the first optical signal in the first waveform becomes saturated;

collecting a second optical signal transmitted through an area of the absorber layer covered by the patterned photoresist layer to obtain a second waveform from the transmitted second optical signal;

analyzing the second waveform obtained from the second optical signals transmitted through the photoresist layer; and

determining a second endpoint of the etching process when the second waveform becomes saturated.

13. The method of claim 12, wherein the substrate is a photomask reticle.

14. The method of claim 12, wherein the first wavelength is between about 200 nm and about 400 nm and the second wavelength greater than 400 nm.

15. A method of determining a thickness loss of a photoresist layer during an etching process, comprising:

performing an etching process on an absorber layer disposed on a first surface of a substrate through a patterned photoresist layer in a plasma etch chamber;

directing radiation having a wavelength greater than 400 nm to an area of the absorber layer covered by the patterned photoresist layer during the etching process;

collecting an optical signal transmitted through the area of the absorber layer covered by the patterned photoresist layer;

analyzing a waveform obtained from the optical signals at the wavelength greater than 400 nm; and

determining a thickness loss of the photoresist layer for etching the photoresist layer based on the transmitted optical signal.

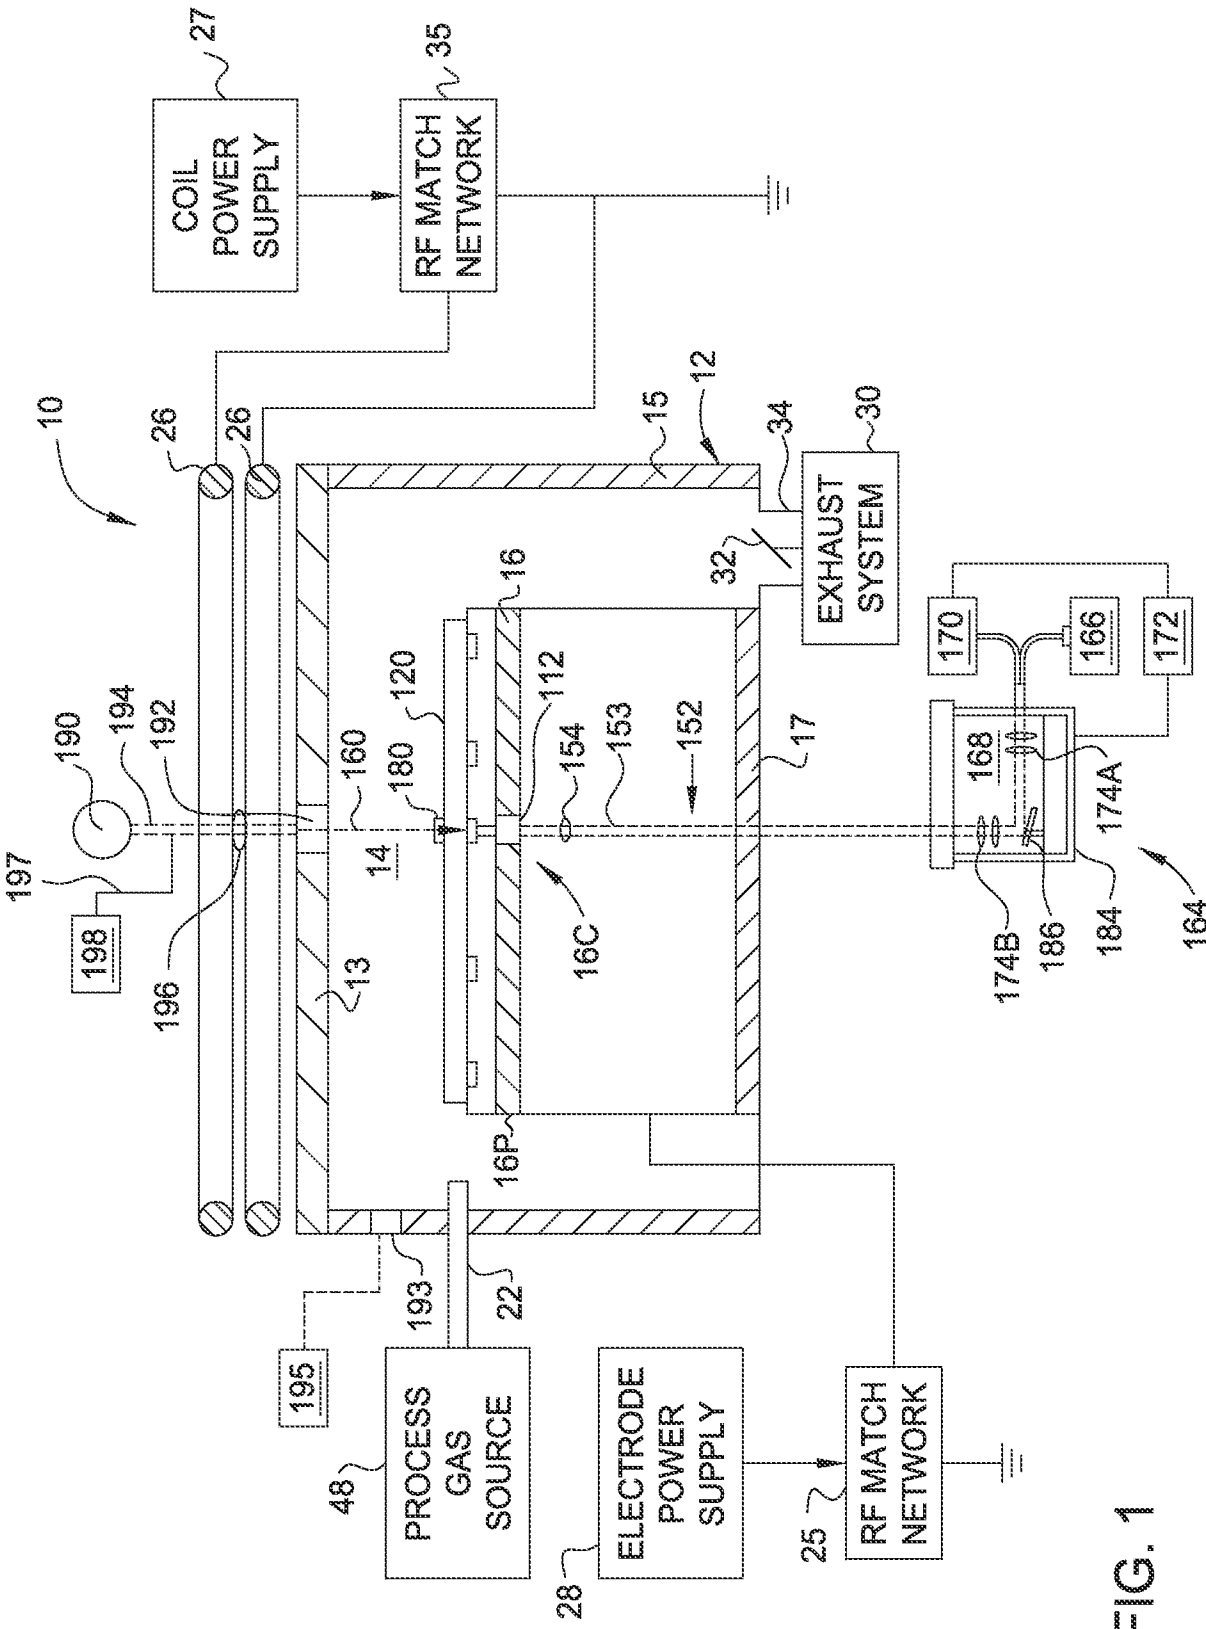


FIG. 1

2/5

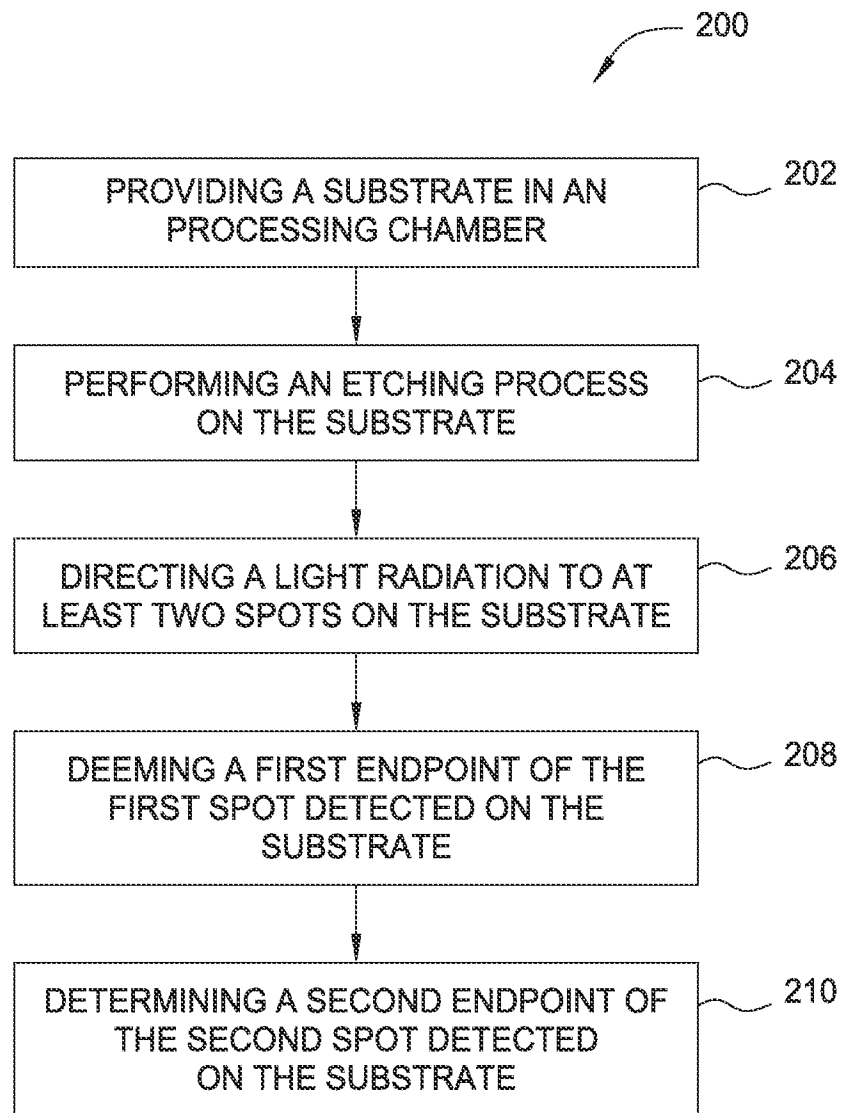


FIG. 2

3/5

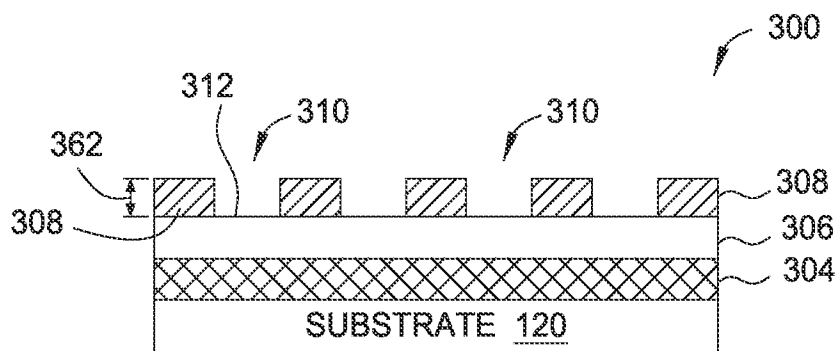


FIG. 3A

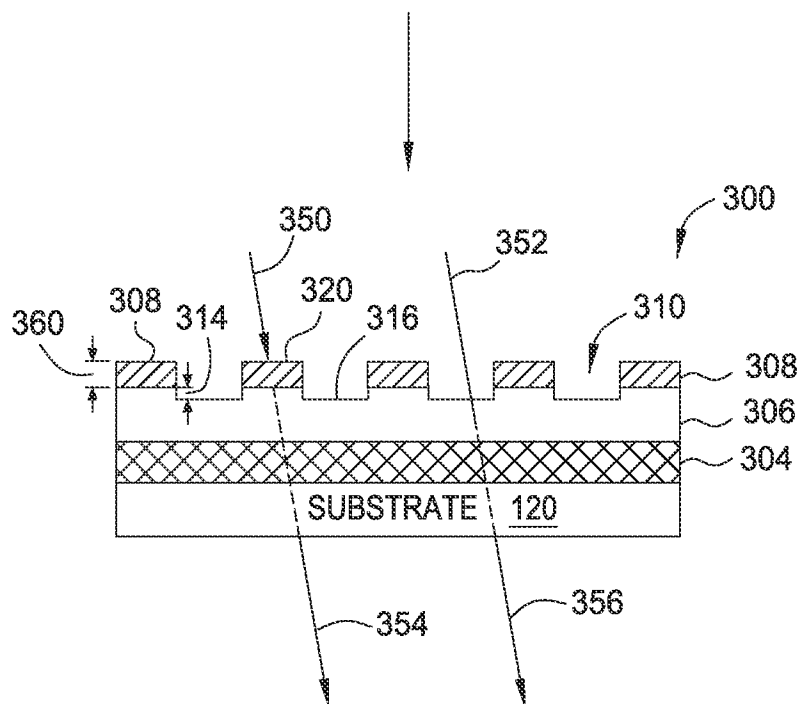


FIG. 3B

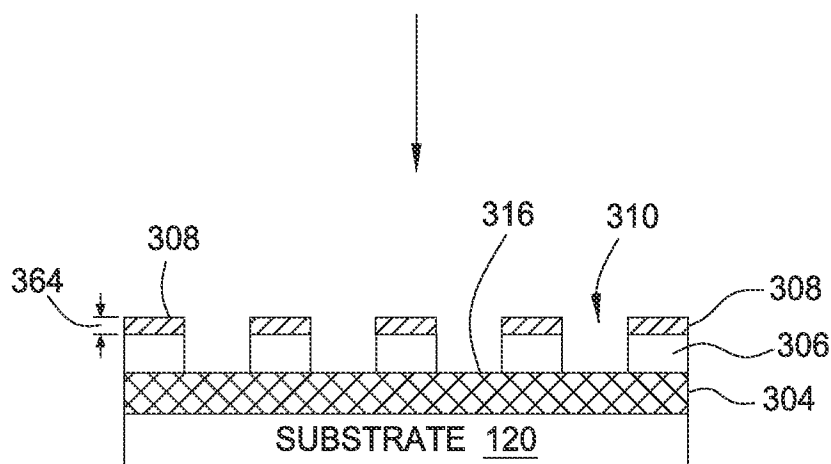


FIG. 3C

4/5

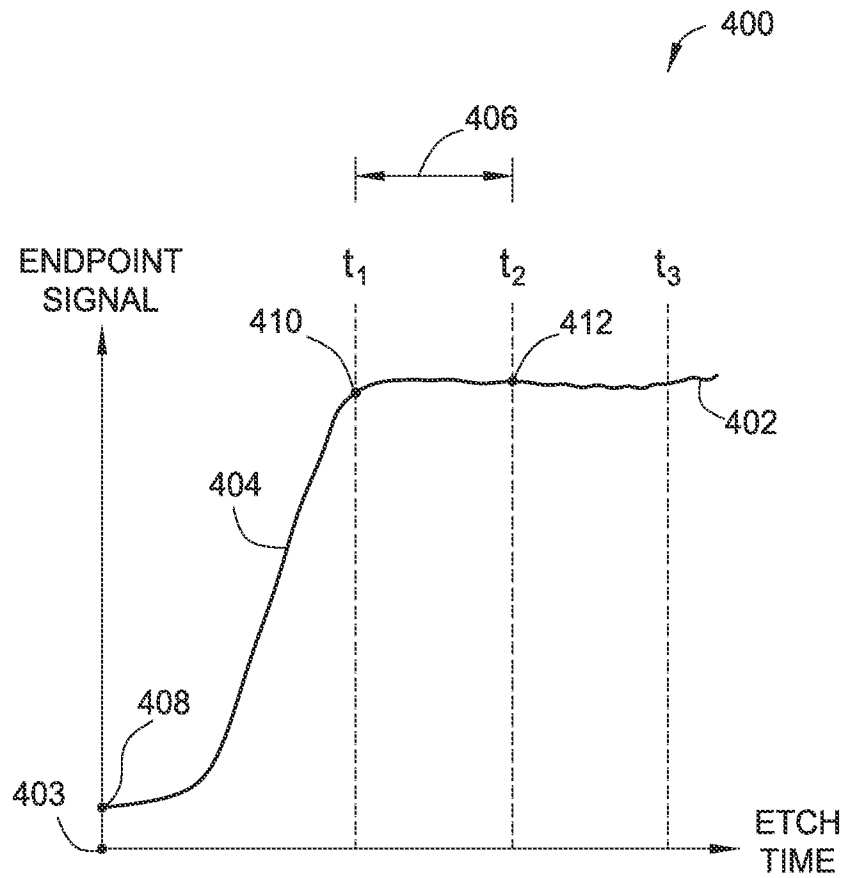


FIG. 4

5/5

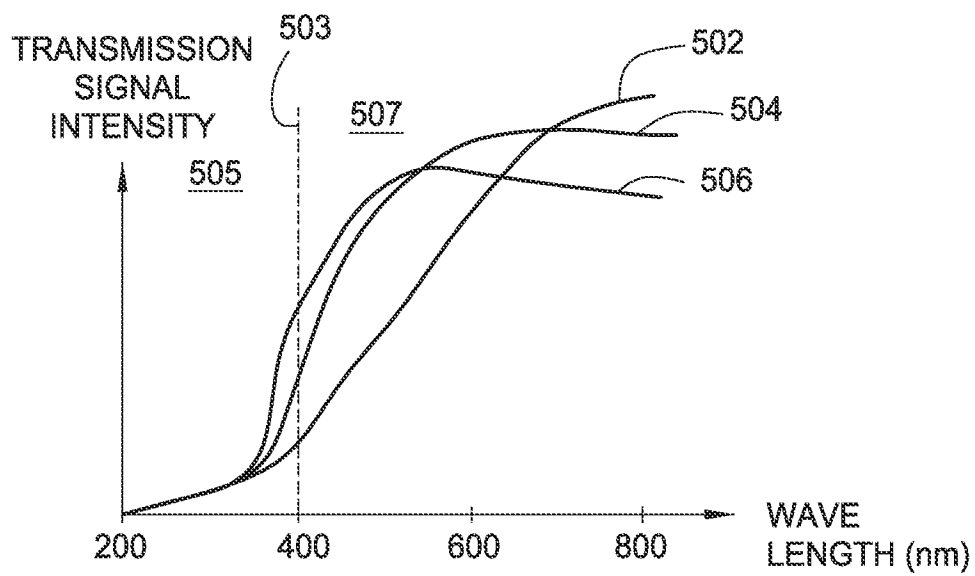


FIG. 5A

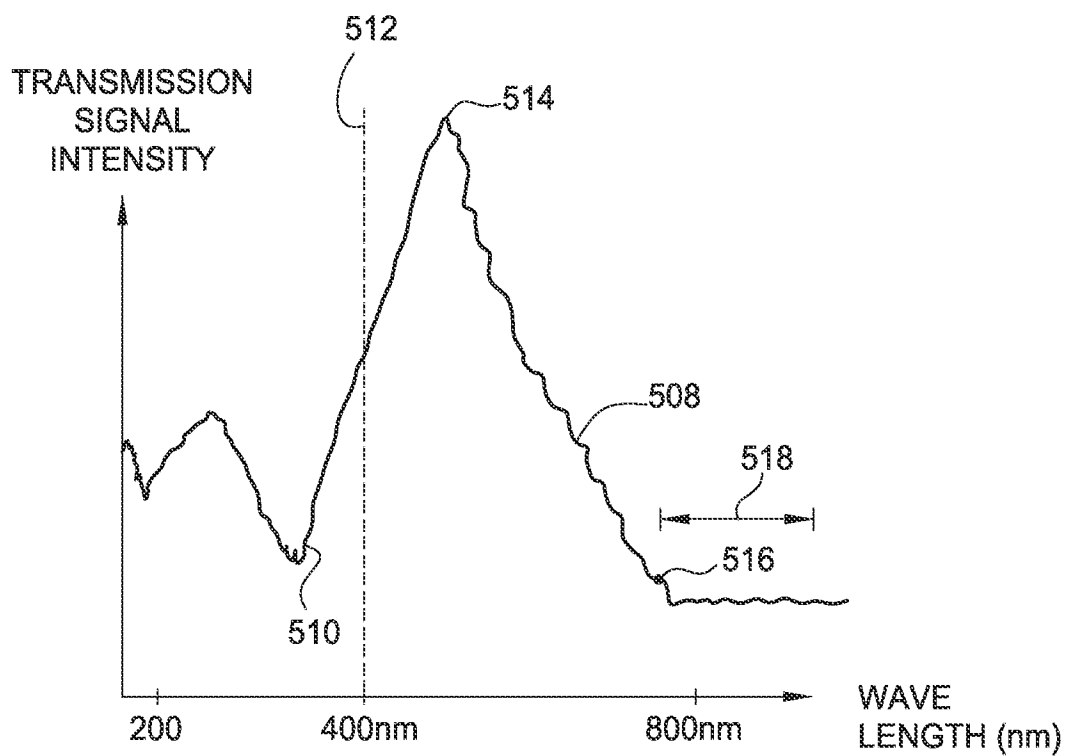


FIG. 5B

A. CLASSIFICATION OF SUBJECT MATTER**H01L 21/3065(2006.01)i, H01L 21/66(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L 21/3065; G01R 31/26; C23F 1/00; H01L 21/66

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: etch, endpoint, radiation, wavelength, absorber, photoresist, optical signal, thickness

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008-0261335 A1 (MICHAEL GRIMBERGEN) 23 October 2008 See abstract; paragraphs [0007], [0089]-[0137] and figures 1A, 4A-5, 13-21.	1-15
A	US 6228277 B1 (AVINOAM KORNBLIT et al.) 08 May 2001 See abstract; column 2, line 31 - column 3, line 55 and figure 1.	1-15
A	JP 2001-085388 A (TOKYO ELECTRON LTD.) 30 March 2001 See abstract; paragraphs [0012]-[0025] and figures 1-4.	1-15
A	US 2003-0176000 A1 (TORU OTSUBO et al.) 18 September 2003 See abstract; paragraphs [0031]-[0044] and figure 1.	1-15
A	US 2008-0099432 A1 (RICHARD LEWINGTON et al.) 01 May 2008 See abstract; paragraphs [0048]-[0051] and figures 21-23E.	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 December 2013 (23.12.2013)

Date of mailing of the international search report

24 December 2013 (24.12.2013)

Name and mailing address of the ISA/KR


Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City,
302-701, Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

CHOI, Sang Won

Telephone No. +82-42-481-8291



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/053649

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008-0261335 A1	23/10/2008	US 2008-176149 A1 US 2009-014409 A1 US 8092695 B2 US 8158526 B2	24/07/2008 15/01/2009 10/01/2012 17/04/2012
US 6228277 B1	08/05/2001	None	
JP 2001-085388 A	30/03/2001	JP 4567828 B2 KR 10-0567481 B1 KR 10-2001-0030373 A TW 464967 A TW 464967 B US 6541388 B1	20/10/2010 03/04/2006 16/04/2001 21/11/2001 21/11/2001 01/04/2003
US 2003-0176000 A1	18/09/2003	JP 2001-160576 A JP 3774094 B2 US 2002-0164829 A1 US 6537832 B2 US 6797529 B2	12/06/2001 10/05/2006 07/11/2002 25/03/2003 28/09/2004
US 2008-0099432 A1	01/05/2008	US 8012366 B2	06/09/2011