

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 October 2006 (05.10.2006)

PCT

(10) International Publication Number
WO 2006/104875 A2

(51) International Patent Classification:
B60Q 1/52 (2006.01)

(21) International Application Number:
PCT/US2006/010741

(22) International Filing Date: 24 March 2006 (24.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/091,139 28 March 2005 (28.03.2005) US

(71) Applicant: **TERZIAN, Berj** [US/US]; 90 Northern Blvd.,
Newbury, NA 01951 (US).

(74) Agent: **LUCAS, Donald**; LUCAS & MERCANTI, LLP,
475 Park Avenue South, 15th Floor, New York, New York
10016 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,
LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI,
NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG,
SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: VEHICLE HAZARD WARNING LIGHTS

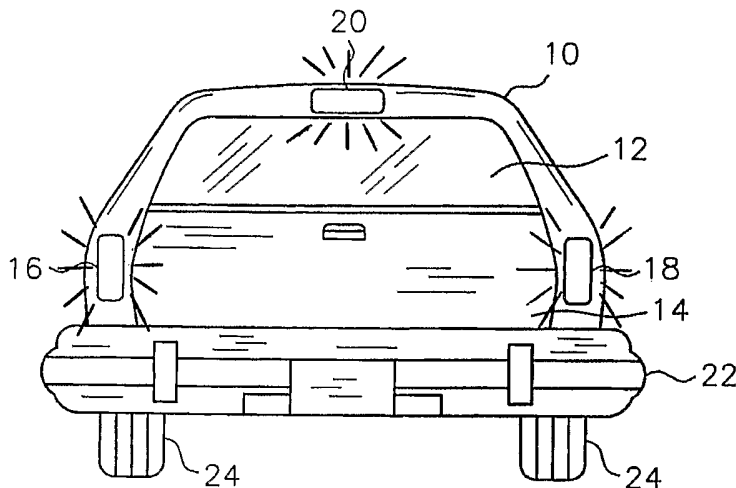

(57) Abstract: A vehicle hazard warning system and method are provided wherein a center high mounted rear stop light ("CHMSL") is connected to the vehicle's flasher circuit so that it flashes simultaneously with at least the vehicle's rear turn signal lights, and preferably with the front turn signal lights as well, to create a more effective warning signal that the vehicle is a potential hazard to other vehicles approaching from the rear. The CHMSL can also be connected to automatically commence flashing with the other recited lights, and with simultaneously activated clear steady back up lights of the vehicle, whenever the vehicle is moving rearward.



VEHICLE HAZARD WARNING LIGHTS

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] This invention relates to vehicle hazard warning lights and, more particularly, to the enhancement of such lights to give more effective warnings that a disabled or stalled vehicle is a hazard to other vehicles approaching from the rear.

2. Description of the Prior Art

[0002] Passenger vehicles and light trucks are the largest majority of motor vehicles in the United States. Since 1986 all new passenger vehicles, and since 1994 all new light trucks, have been required to include, as standard equipment, a center high mounted rear stop light ("CHMSL") by Federal Motor Vehicle Safety Standard 108, and corresponding regulations and laws of the National Highway Traffic Safety Administration ("NHTSA") and the several states.

[0003] This requirement originated from tests performed in 1983 by NHTSA which showed that CHMSLs in taxi cabs and corporate fleets appeared to reduce rear impact crashes by about 35%. However, as time went on, these successful results declined until in 1989, NHTSA found that CHMSLs, in the long term, would only prevent rear impacts in passenger cars by about 4.3%, and by an estimated 5.0% in light trucks. Apparently, as drivers became more accustomed to the CHMSLs, the efficacy of such devices wore off (NHTSA Technical Report Number DOT HS 808 696, "The Long-Term Effectiveness of Center High Mounted Stop Lamps in Passenger Cars and Light Trucks", March 1998). The purpose of CHMSLs is to avoid a car or light truck being struck in the rear by another vehicle, by signaling that the lead vehicle is braking or has stopped.

[0004] A serious hazard arises when a vehicle malfunctions so badly as to become no longer drivable and thus vulnerable on or beside a busy road or highway. To warn of this hazard, all U.S. vehicles are required to have a 4-way flasher system that can be driver initiated to simultaneously flash the two front and two rear turn signal lamps. State vehicle codes require such flashing lamps to be used by the operator of a vehicle that is stopped or disabled (*e.g.*, Pennsylvania Vehicle Code Title 75, § 4305). Some regulations also permit such flashing lamps to be used by drivers while approaching, overtaking or passing an accident or hazard to warn other oncoming drivers of such emergencies (*e.g.*, California Vehicle Code, § 25251(a)(5)).

~~[0005]~~ Despite the advent and long term use of 4-way flashing signal lamps and CHMSLs, rear impact vehicle accidents, especially collisions with stopped or disabled vehicles, continue to be a serious problem in the United States.

SUMMARY OF THE INVENTION

[0006] The present invention provides a substantial enhancement of vehicle hazard warning lights in passenger vehicles and light trucks by application of a simple modification that does not incur any significant increase in manufacturing cost or labor. More particularly, the invention is based on the realization that if a CHMSL is flashed simultaneously with at least the two rear turn signal lights, and preferably with the two front turn signal lamps as well, then a much more visible and attention-getting result can be achieved for avoiding the hazards of stopped, disabled or decelerating vehicles being struck in the rear by other oncoming vehicles. Since the CHMSL is already required in passenger cars and light trucks, the simple remedy of including it in the flasher circuit of the front and rear turn signal lights will not cause any significantly increased manufacturing cost or labor.

[0007] Moreover, such a remedy can also be installed to become automatically initiated whenever the vehicle is placed in reverse gear, with the clear back up lamps also automatically turned on, to achieve greater safety and warnings against impacts between the vehicle and objects or individuals located in the vehicle's rearward path.

[0008] Further features and details of the invention will be understood by reference to the drawings and the following specific description.

[0009] FIG. 1 is a rear view of a vehicle operating in accordance with one embodiment of the invention.

[0010] FIG. 2 is a block diagram of a circuit for performing the embodiment illustrated in FIG. 1.

[0011] FIG. 3 illustrates a modification of the FIG. 2 diagram for performing another embodiment of the invention.

[0012] Referring to FIG. 1, it illustrates the configuration of a light truck viewed toward its rear, including cab 10 with its rear window 12, tailgate 14, rear side turn signal lights 16 and 18, CHMSL 20, bumper 22 and tires 24. The vehicle has stopped and its 4-way flasher has been turned on to flash its front turn signal (not shown) and rear turn signal lamps 16, 18. In addition, the CHMSL is also flashing simultaneously and synchronously with the other lamps.

[0013] One can visualize the resulting effect upon the operator of another approaching vehicle. Instead of seeing only the horizontally aligned rear turn signal lights

flashing, the driver (and occupants) will also see the higher mounted CHMSL simultaneously flashing. The warning effect is thus extended along a multi-linear path of flashing lights from one side to a higher central location and down to the other side of vehicle's rear. This circumscribes a general area of alert and warning which is far greater than that of only the horizontal line of sight between conventional dual flashing rear turn signal lights.

[0014] For example, in a 2003 PT Cruiser GT Turbo vehicle, the horizontal distance between the two rear turn signal lights is approximately 58 inches. Inwardly inclined lines extending from these lights to the vehicle's CHMSL are each about 43 inches long. The area circumscribed by the resulting equilateral triangle is about 920 square inches. The panorama of this warning geometry, when all three lamps are flashing, is nearly 16 times greater than the horizontal distance between the two turn signal lamps on the vehicle's sides. Thus, one can intuitively and readily appreciate that the invention provides a substantial enhancement of the vehicle's hazard warning system.

[0015] In addition, most passenger vehicles and some light trucks are equipped with amber or yellow rear turn signal lights, whereas all CHMSLs in such vehicles, to this inventor's knowledge, emit red light. Therefore, the unique combinations of such flashing multi-colors will further enhance the attention-getting and alerting effect to approaching drivers of a potential or existing vehicle hazard condition.

[0016] Referring to FIG. 2, it depicts a block diagram circuit which includes a power source 26, either the vehicle's storage battery or rectified alternator output, push button 28 to turn the hazard warning lights on, flasher circuit 30, wire bus 32 and branch leads from it to the rear turn signal lights 16, 18, CHMSL 20, and front turn signal lights 34 and 36. Thus, the simple modification of including CHMSL 20 in the hazard flashing circuit is apparent from this figure.

[0017] Four-way flasher circuitry in motor vehicles is presently a well-developed technology, having been included in U.S. vehicles for many decades. One specific example of such technology is described in U.S. Patent No. 5,815,073, the disclosure of which is incorporated by reference herein. This patent describes an inertial switch system for automatically turning on 4-way vehicle emergency lights in cases of sudden braking, accident or collision. A CHMSL can be readily added to this circuit so that it will flash synchronously in such emergencies with the other hazard lights, and most importantly with the rear turn signal lights.

[0018] Referring to FIG. 3, it illustrates a modification of FIG. 2 comprising addition of a branch circuit containing a reverse gear switch 38 which is activated whenever

~~the vehicle is placed in reverse gear to move rearward.~~ As a result, power from source 26 is fed through lead 40 to the clear steady reverse lights 42 and 44 of the vehicle, as well as simultaneously through lead 46 to 4-way flasher circuit 30. In this way, whenever the vehicle moves rearward, the back up lights 42 and 44 turn on steady, and the four signal lights and CHMSL flash synchronously to give an enhanced hazard warning signal that the vehicle is moving rearward. The back up lights 42 and 44 illuminate the rearward path in the dark, and the flashing lights alert other vehicles or observers to stay clear of the path in both daylight and night time.

[0019] Rear end collisions among passenger vehicles and light trucks due to braking, slowing, stopped or disabled vehicles continue to be a serious problem in the United States. These accidents are exacerbated in unfavorable conditions created by rain, snow, sleet, hail, fog, smoke, smog and diminished light at twilight, sunrise, sunset and evenings. Therefore, there is a need for a more effective vehicle hazard warning lights system. This need is significantly alleviated by the present invention.

[0020] The invention has been described in terms of its functional principles and illustrative specific embodiments. Many variants of such embodiments will be obvious to those skilled in the art. Therefore, it should be understood that the ensuing claims are intended to cover all changes and modifications of the illustrative embodiments which fall within the literal scope of the claims, and all equivalents thereof.

~~THE FOLLOWING IS CLAIMED:~~

1. A vehicle hazard warning system which comprises a flasher switch and circuit operable by a vehicle driver or occupant to flash at least two rear turn signal lights of a vehicle, a CHMSL included in the vehicle's rear, said CHMSL being connected to the flasher circuit so that it is flashed simultaneously with the two rear turn signal lights, whereby a more effective hazard warning signal is created by the area bounded by the three distances extending between the rear lights and the CHMSL.
2. A system as in claim 1 wherein the vehicle's two front turn signal lights are connected to the flasher circuit so that they are simultaneously flashed with the rear turn signal lights and the CHMSL.
3. A system as in claim 2 wherein all five lights are flashed simultaneously and synchronously during operation of the system.
4. A system as in claim 3 wherein the rear turn signal lights emit amber or yellow lights and the CHMSL emits red light.
5. A system as in claim 4 included in a passenger vehicle or light truck.
6. A system as in claim 1 which further comprises a reverse gear switch operable when the vehicle is placed in reverse gear to move the vehicle rearward and simultaneously activate at least one clear steady back up light to illuminate the rearward path of the vehicle, said reverse gear switch being connected to the flasher circuit to automatically also initiate flashing of the CHMSL and the other recited lights as the vehicle moves rearward, whereby a more effective hazard warning signal is created during such rearward movement.
7. A system as in claim 2 which further comprises a reverse gear switch operable when the vehicle is placed in reverse gear to move the vehicle rearward and simultaneously activate at least one clear steady back up light to illuminate the rearward path of the vehicle, said reverse gear switch being connected to the flasher circuit to automatically also initiate flashing of the CHMSL and the other recited lights as the vehicle moves rearward, whereby a more effective hazard warning signal is created during such rearward movement.
8. A method of creating a vehicle hazard warning signal which comprises providing a flasher switch and circuit which are operable by a vehicle operator or occupant to flash at least two rear turn signal lights and a CHMSL of a vehicle, and activating the flasher switch and circuit to initiate simultaneous flashing of the rear

lights and CHMSL, thereby more effectively signaling that the vehicle is a potential hazard to other vehicles approaching from the rear.

9. A method as in claim 8 which further comprises connecting the vehicle's front turn signal lights to the flasher circuit and thereby flashing such lights simultaneously with the rear turn signal lights and CHMSL.
10. A method as in claim 9 which further comprises flashing the lights and the CHMSL simultaneously and synchronously.
11. A method as in claim 10 which includes flashing the rear turn signal lights with amber or yellow lights and the CHMSL with red light.
12. A method as in claim 11 performed in a passenger vehicle or light truck.
13. A method as in claim 8 which further comprises providing a reverse gear switch operable when the vehicle is placed in reverse gear to move the vehicle rearward and simultaneously activate at least one clear steady back up light to illuminate the rearward path of the vehicle, providing a connection of said reverse gear switch to the flasher circuit and thereby automatically also initiating flashing of the CHMSL and the other recited lights as the vehicle moves rearward.
14. A method as in claim 9 which further comprises providing a reverse gear switch operable when the vehicle is placed in reverse gear to move the vehicle rearward and simultaneously activate at least one clear steady back up light to illuminate the rearward path of the vehicle, providing a connection of said reverse gear switch to the flasher circuit and thereby automatically also initiating flashing of the CHMSL and the other recited lights as the vehicle moves rearward.

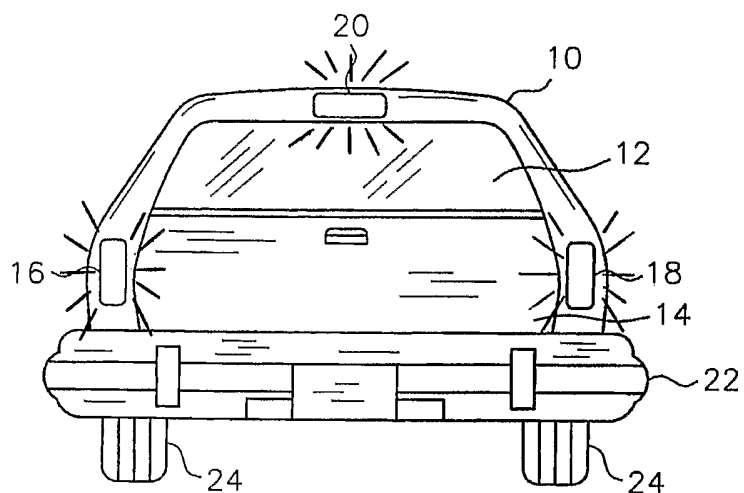


FIG. 1

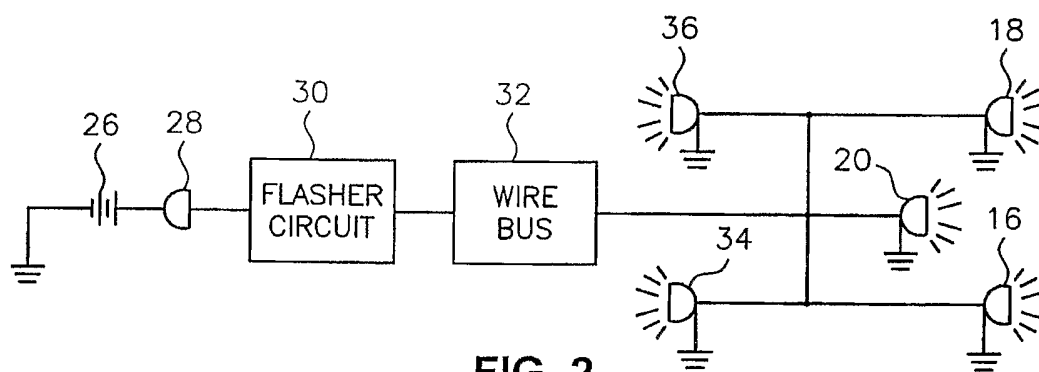


FIG. 2

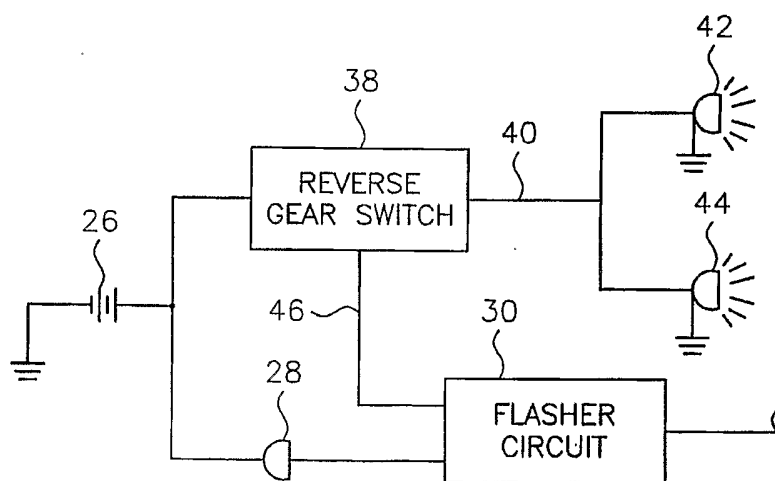


FIG. 3