



(51) International Patent Classification:

C07C 2/86 (2006.01) B01J 29/70 (2006.01)
C07C 15/08 (2006.01) B01J 8/02 (2006.01)

(21) International Application Number:

PCT/US2017/051198

(22) International Filing Date:

12 September 2017 (12.09.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/405,036 06 October 2016 (06.10.2016) US
62/437,493 21 December 2016 (21.12.2016) US

(71) Applicant: **EXXONMOBIL CHEMICAL PATENTS INC.** [US/US]; 5200 Bayway Drive, Baytown, TX 77520 (US).

(72) Inventor: **CHEN, Tan-jen**; 5615 Lofty Magnolia Court, Kingwood, TX 77345 (US).

(74) Agent: **SULLIVAN, Kristian, R.** et al.; ExxonMobil Chemical Company, Law Department, P. O. Box 2149, Baytown, TX 77522-2149 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: PROCESS FOR SELECTIVATING CATALYST FOR PRODUCING PARAXYLENE BY METHYLATION OF BENZENE AND/OR TOLUENE

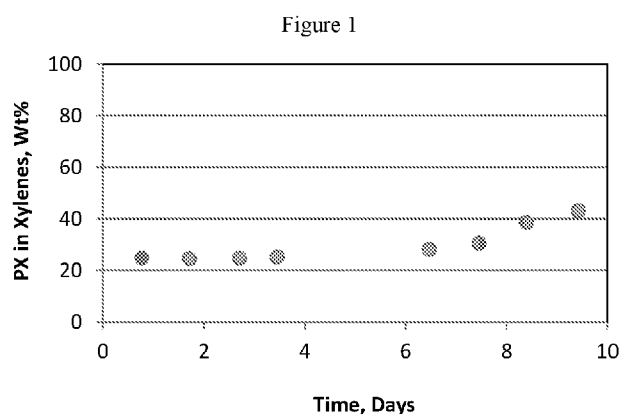

(57) Abstract: A process is described for producing paraxylene, in which an aromatic hydrocarbon feedstock comprising benzene and/or toluene is contacted with an alkylating reagent comprising methanol and/or dimethyl ether in an alkylation reaction zone under alkylation conditions in the presence of an alkylation catalyst to produce an alkylated aromatic product comprising xylenes. The alkylation catalyst comprises a molecular sieve having a Constraint Index ≤ 5 , and the alkylation conditions comprise a temperature less than 500°C. The alkylation catalyst may be selectivated to produce a higher than equilibrium amount of paraxylene by using a molar ratio of alkylating agent to aromatic of at least 1 :4.

**PROCESS FOR SELECTIVATING CATALYST FOR PRODUCING PARAXYLENE
BY METHYLATION OF BENZENE AND/OR TOLUENE**

CROSS REFERENCE TO RELATED APPLICATION

- 5 **[0001]** This application claims the benefit of US Provisional Patent Application Serial No. 62/405,036, filed October 6, 2016 and U.S. Provisional Patent Application Serial No. 62/437,493, filed December 21, 2016, both of which are hereby incorporated herein by reference in their entireties.

FIELD

- 10 **[0002]** This disclosure relates to a process for selectivating a catalyst for the methylation of benzene and/or toluene to produce xylenes, particularly paraxylene.

BACKGROUND

- 15 **[0003]** Xylenes are valuable precursors in the chemical industry. Of the three xylene isomers, paraxylene is the most important since it is a starting material for manufacturing terephthalic acid, which is itself a valuable intermediate in the production of synthetic polyester fibers, films, and resins. Currently, the demand for paraxylene is growing at an annual rate of 5-7%.

- 20 **[0004]** One known route for the manufacture of paraxylene is by the methylation of benzene and/or toluene. For example, U.S. Patent No. 6,504,072 discloses a process for the selective production of paraxylene which comprises reacting toluene with methanol under alkylation conditions in the presence of a catalyst comprising a porous crystalline material having a Diffusion Parameter for 2,2 dimethylbutane of about $0.1\text{-}15\text{ sec}^{-1}$ when measured at a temperature of 120°C and a 2,2 dimethylbutane pressure of 60 torr (8 kPa). The porous crystalline material is preferably a medium-pore zeolite, particularly ZSM-5, which has been
- 25 severely steamed at a temperature of at least 950°C . The alkylation conditions include a temperature between about 500 and 700°C , a pressure of between about 1 atmosphere and 1000 psig (100 and 7000 kPa), a weight hourly space velocity between about 0.5 and about 1000 and a molar ratio of toluene to methanol of at least about 0.2.

- 30 **[0005]** In addition, U.S. Patent No. 6,642,426 discloses a process for alkylating an aromatic hydrocarbon reactant, especially toluene, with an alkylating reagent comprising methanol to produce an alkylated aromatic product, comprising: introducing the aromatic hydrocarbon reactant into a reactor system at a first location, wherein the reactor system includes a fluidized bed reaction zone comprising a temperature of 500 to 700°C and an operating bed density of about 300 to 600 kg/m^3 , for producing the alkylated aromatic product;

introducing a plurality of streams of said alkylating reactant directly into said fluidized bed reaction zone at positions spaced apart in the direction of flow of the aromatic hydrocarbon reactant, at least one of said streams being introduced at a second location downstream from the first location; and recovering the alkylate aromatic product, produced by reaction of the aromatic reactant and the alkylating reagent, from the reactor system. The preferred catalyst is ZSM-5 which has been selectivated by high temperature steaming.

[0006] As exemplified by the U.S. Patents discussed above, current processes for the alkylation of benzene and/or toluene with methanol are conducted at high temperatures, i.e., between 500 to 700°C in the presence of a medium pore size zeolite, particularly ZSM-5. This results in a number of problems, particularly in that catalyst life per cycle is relatively short and so frequent regeneration of the catalyst is required. In addition, the existing processes typically result in significant quantities of methanol being converted to ethylene and other light olefins which reduces the yield of desirable products, such as xylenes, and increases recovery costs.

[0007] There is therefore a need for an improved process for the alkylation of benzene and/or toluene with methanol (or dimethyl ether), which increases the paraxylene selectivity of the catalyst and produces a higher than equilibrium amount of paraxylene.

SUMMARY

[0008] Toluene and/or benzene may be converted to xylenes via an alkylation reaction with methanol and/or dimethyl ether conducted under relatively mild conditions, namely a temperature less than 500°C, in the presence of an alkylation catalyst comprising a molecular sieve having a Constraint Index less than or equal to 5. The lower temperature alkylation reaction produces less light gas by-products and achieves longer catalyst cycle life than conventional high temperature processes. Methanol utilization (i.e., percentage of methanol converted to aromatics) is also improved as compared to conventional high temperature processes.

[0009] To increase the concentration of paraxylene in the product mixture and obtain a higher than equilibrium concentration of paraxylene, the alkylation catalyst may be selectivated. In one embodiment, the alkylation catalyst is selectivated by using an alkylating agent to aromatic molar ratio of at least 1:4 until the target paraxylene selectivity is reached. Once the target paraxylene selectivity is achieved, the molar ratio of alkylating agent to aromatic may be maintained or decreased.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] Figure 1 is a graph of paraxylene selectivity against time on stream in the process of alkylating toluene with methanol described in the Example.

5 [0011] Figure 2 is a graph of toluene and methanol conversion against time on stream in the process of alkylating toluene with methanol described in the Example.

[0012] Figure 3 is a graph of xylenes selectivity against time on stream in the process of alkylating toluene with methanol described in the Example.

DETAILED DESCRIPTION OF THE EMBODIMENTS

10 [0013] Embodiments disclosed herein provide alkylation processes for producing xylenes, particularly paraxylene, that can be conducted under relatively mild conditions to produce xylenes with less light gas by-products and longer catalyst cycle life than conventional high temperature processes. Methanol utilization (i.e., percentage of methanol converted to aromatics) is also improved. In at least some embodiments, an aromatic hydrocarbon feed comprising benzene and/or toluene is contacted with an alkylating reagent comprising

15 methanol and/or dimethyl ether in at least one alkylation reaction zone in the presence of alkylation catalyst under alkylation conditions. The alkylation catalyst comprises a molecular sieve having a Constraint Index less than 5, such as less than 4, for example less than 3, or in some embodiments less than 2, and the alkylation conditions comprise a temperature less than 500°C.

20 [0014] The process is effective to convert the benzene and/or toluene to xylenes with essentially 100% methanol conversion and substantially no light gas make. The high methanol utilization is surprising in light of the methanol utilization in the prior art toluene and/or benzene methylation processes, and results in the substantial advantages of less coke formation, which increases the catalyst life. Furthermore, in prior art processes, it is preferred to co-feed

25 steam into the reactor with the methanol to minimize the methanol side reactions, and the steam negatively impacts catalyst life. With the nearly 100% of the methanol reacting with aromatic rings to produce aromatics in the inventive process, there is no need to co-feed steam, decreasing the energy demands of the process and increasing catalyst life.

[0015] The methanol selectivity to xylenes in embodiments disclosed herein is typically

30 on the order of 80%, with the main by-products being benzene and C₉₊ aromatics. The benzene can be separated from the alkylation effluent and recycled back to the alkylation reaction zone(s), while the C₉₊ aromatics can be separated for blending into the gasoline pool or transalkylated with additional benzene and/or toluene to make additional xylenes. The life of

the alkylation catalyst is enhanced as compared with existing processes since methanol decomposition is much less at the lower reaction temperature. Moreover, the use of a larger pore molecular sieve minimizes diffusion limitations and allows the alkylation to be carried out at commercially viable WHSVs. Additionally, when a toluene feed (one having at least 90 wt% of toluene) is used, more alkylating agent reacts with the toluene, versus other molecules such as alkylating agent or by-products of the reaction, to produce xylenes as compared to existing processes.

[0016] The amount of paraxylene in the xylenes product can be increased up to at least 35 wt% by selectivating the alkylation catalyst. In one embodiment, the alkylation catalyst is selectivated in-situ by using at least a 1:4 alkylating agent to aromatic molar ratio in the feed. After the desired paraxylene selectivity is achieved, the alkylating agent to aromatic ratio in the feed may be maintained or decreased for the remainder of the reaction. If the alkylating agent to aromatic ratio is decreased after the catalyst has been selectivated, the alkylating agent to aromatic ratio may subsequently be raised to re-selectivate the catalyst if the paraxylene selectivity of the catalyst decreases below a predetermined threshold.

[0017] As used herein, the term " C_n " hydrocarbon wherein n is a positive integer, e.g., 1, 2, 3, 4, 5, etc., means a hydrocarbon having n number of carbon atom(s) per molecule. The term " C_{n+} " hydrocarbon wherein n is a positive integer, e.g., 1, 2, 3, 4, 5, etc., means a hydrocarbon having at least n number of carbon atom(s) per molecule. The term " C_n " hydrocarbon wherein n is a positive integer, e.g., 1, 2, 3, 4, 5, etc., as used herein, means a hydrocarbon having no more than n number of carbon atom(s) per molecule.

[0018] As used herein, the terms "alkylating" and "methylating", or "alkylation" and "methylation" may be used interchangeably.

[0019] Constraint Index is a convenient measure of the extent to which a molecular sieve provides control of molecules of varying sizes to its internal structure. The method by which Constraint Index is determined is described fully in U.S. Patent No. 4,016,218, which is incorporated herein by reference for details of the method.

[0020] Examples of suitable molecular sieves having a Constraint Index less than 5 suitable for use in the present process comprise zeolite beta, zeolite Y, Ultrastable Y (USY), Ultrahydrophobic Y (UHP-Y), Dealuminized Y (Deal Y), mordenite, ZSM-3, ZSM-4, ZSM-12, ZSM-14, ZSM-18, ZSM-20 and mixtures thereof. Zeolite ZSM-3 is described in U.S. Patent No. 3,415,736. Zeolite ZSM-4 is described in U.S. Patent No. 4,021,947. Zeolite ZSM-12 is described in U.S. Patent No. 3,832,449. Zeolite ZSM-14 is described in U.S. Patent No.

3,923,636. Zeolite ZSM-18 is described in U.S. Patent No. 3,950,496. Zeolite ZSM-20 is described in U.S. Patent No. 3,972,983. Zeolite Beta is described in U.S. Patent Nos. 3,308,069, and Re. No. 28,341. Low sodium Ultrastable Y molecular sieve (USY) is described in U.S. Patent Nos. 3,293,192 and 3,449,070. Ultrahydrophobic Y (UHP-Y) is described in
5 U.S. Patent No. 4,401,556. Dealuminized Y zeolite (Deal Y) may be prepared by the method found in U.S. Patent No. 3,442,795. Zeolite Y and mordenite are naturally occurring materials but are also available in synthetic forms, such as TEA-mordenite (i.e., synthetic mordenite prepared from a reaction mixture comprising a tetraethylammonium directing agent). TEA-mordenite is disclosed in U.S. Patent Nos. 3,766,093 and 3,894,104.

10 **[0021]** One preferred class of molecular sieve suitable for use in the present process, and having a Constraint Index less than 5, are crystalline microporous materials of the MWW framework type. As used herein, the term “crystalline microporous material of the MWW framework type” includes one or more of:

- 15 • molecular sieves made from a common first degree crystalline building block unit cell, which unit cell has the MWW framework topology. (A unit cell is a spatial arrangement of atoms which if tiled in three-dimensional space describes the crystal structure. Such crystal structures are discussed in the “Atlas of Zeolite Framework Types”, Fifth edition, 2001, the entire content of which is incorporated as reference);
- 20 • molecular sieves made from a common second degree building block, being a 2-dimensional tiling of such MWW framework topology unit cells, forming a monolayer of one unit cell thickness, preferably one c-unit cell thickness;
- 25 • molecular sieves made from common second degree building blocks, being layers of one or more than one unit cell thickness, wherein the layer of more than one unit cell thickness is made from stacking, packing, or binding at least two monolayers of MWW framework topology unit cells. The stacking of such second degree building blocks can be in a regular fashion, an irregular fashion, a random fashion, or any combination thereof; and
- molecular sieves made by any regular or random 2-dimensional or 3-dimensional combination of unit cells having the MWW framework topology.

30 **[0022]** Crystalline microporous materials of the MWW framework type include those molecular sieves having an X-ray diffraction pattern including d-spacing maxima at 12.4 ± 0.25 , 6.9 ± 0.15 , 3.57 ± 0.07 and 3.42 ± 0.07 Angstrom. The X-ray diffraction data used to characterize the material are obtained by standard techniques using the K-alpha doublet of copper as

incident radiation and a diffractometer equipped with a scintillation counter and associated computer as the collection system.

[0023] Examples of crystalline microporous materials of the MWW framework type include MCM-22 (described in U.S. Patent No. 4,954,325), PSH-3 (described in U.S. Patent
5 No. 4,439,409), SSZ-25 (described in U.S. Patent No. 4,826,667), ERB-1 (described in European Patent No. 0293032), ITQ-1 (described in U.S. Patent No. 6,077,498), ITQ-2 (described in International Publication No. WO97/17290), MCM-36 (described in U.S. Patent No. 5,250,277), MCM-49 (described in U.S. Patent No. 5,236,575), MCM-56 (described in U.S. Patent No. 5,362,697), UZM-8 (described in U.S. Patent No. 6,756,030), UZM-8HS
10 (described in U.S. Patent No. 7,713,513), UZM-37 (described in U.S. Patent No. 7,982,084), EMM-10 (described in U.S. Patent No. 7,842,277), EMM-12 (described in U.S. Patent No. 8,704,025), EMM-13 (described in U.S. Patent No. 8,704,023), MIT-1 (described by Luo et. al, in Chemical Science, 2015, Vol. 6, pp. 6320-6324) and mixtures thereof, with MCM-49 generally being preferred.

15 **[0024]** In some embodiments, the crystalline microporous material of the MWW framework type employed herein may be contaminated with other crystalline materials, such as ferrierite or quartz. These contaminants may be present in quantities $\leq 10\%$ by weight, normally $\leq 5\%$ by weight.

[0025] Additionally or alternatively, the molecular sieves useful herein may be
20 characterized by a ratio of silicon to aluminum. In particular embodiments, the molecular sieves suitable herein include those having a Si/Al ratio of less than 100, preferably about 15 to 50.

[0026] The molecular sieve catalyst may be selectivated to produce a higher than equilibrium amount of paraxylene, that is more than about 23 wt% of paraxylene, based on the
25 total amount of xylenes, in the product mixture. In one embodiment, the concentration of paraxylene in the xylene fraction is at least 35 wt%, preferably at least 40 wt%, and more preferably at least 45 wt%. The selectivation of the catalyst may be conducted in-situ by using a feed with an alkylating agent to aromatic ratio of at least 1:4, or 1:3, or 1:2 until the target paraxylene selectivity is reached. As used herein, the target paraxylene selectivity means at
30 least 35 wt%, preferably at least 40 wt%, and more preferably at least 45 wt% of paraxylene in the xylenes fraction. Once the target paraxylene selectivity is achieved, the alkylating agent to aromatic ratio of the feed may be decreased, though in some embodiments, the alkylating agent to aromatic ratio is maintained even after the target paraxylene selectivity is achieved. If the

alkylating agent to aromatic ratio is decreased once the catalyst is sufficiently selectivated, and the paraxylene selectivity decreases below the target paraxylene selectivity, the alkylating agent to aromatic ratio of the feed may again be increased to re-selectivate the catalyst.

[0027] The catalyst may additionally or alternatively be selectivated, either before
5 introduction into the aromatization reactor or in-situ in the reactor, by contacting the catalyst with a selectivating agent, such as silicon, steam, coke, or a combination thereof. In one embodiment, the catalyst is silica-selectivated by contacting the catalyst with at least one organosilicon in a liquid carrier and subsequently calcining the silicon-containing catalyst in an oxygen-containing atmosphere, e.g., air, at a temperature of 350 to 550°C. A suitable silica-
10 selectivation procedure is described in U.S. Patent No. 5,476,823, the entire contents of which are incorporated herein by reference. In another embodiment, the catalyst is selectivated by contacting the catalyst with steam. Steaming of the zeolite is effected at a temperature of at least about 950°C, preferably about 950 to about 1075°C, and most preferably about 1000 to about 1050°C, for about 10 minutes to about 10 hours, preferably from 30 minutes to 5 hours.
15 The selectivation procedure, which may be repeated multiple times, alters the diffusion characteristics of the molecular sieve and may increase the xylene yield.

[0028] In addition to, or in place of, silica or steam selectivation, the catalyst may be subjected to coke selectivation. This optional coke selectivation typically involves contacting the catalyst with a thermally decomposable organic compound at an elevated temperature in
20 excess of the decomposition temperature of said compound but below the temperature at which the crystallinity of the molecular sieve is adversely affected. Further details regarding coke selectivation techniques are provided in the U.S. Patent No. 4,117,026, incorporated by reference herein. In some embodiments, a combination of silica selectivation and coke selectivation may be employed.

[0029] It may be desirable to combine the molecular sieve, prior to selectivating, with at least one oxide modifier, such as at least one oxide selected from elements of Groups 2 to 4 and 13 to 16 of the Periodic Table. Most preferably, said at least one oxide modifier is selected from oxides of boron, magnesium, calcium, lanthanum, and most preferably phosphorus. In some cases, the molecular sieve may be combined with more than one oxide modifier, for
25 example a combination of phosphorus with calcium and/or magnesium, since in this way it may be possible to reduce the steaming severity needed to achieve a target diffusivity value. In some embodiments, the total amount of oxide modifier present in the catalyst, as measured on an elemental basis, may be between about 0.05 and about 20 wt%, and preferably is between
30

about 0.1 and about 10 wt%, based on the weight of the final catalyst. Where the modifier includes phosphorus, incorporation of modifier into the catalyst is conveniently achieved by the methods described in U.S. Patent Nos. 4,356,338, 5,110,776, 5,231,064, and 5,348,643, the entire disclosures of which are incorporated herein by reference.

5 **[0030]** The above molecular sieves may be used as the alkylation catalyst employed herein without any binder or matrix. Alternatively, the molecular sieves may be composited with another material which is resistant to the temperatures and other conditions employed in the alkylation reaction. Such materials include active and inactive materials and synthetic or naturally occurring zeolites as well as inorganic materials such as clays and/or oxides such as
10 alumina, silica, silica-alumina, zirconia, titania, magnesia or mixtures of these and other oxides. The latter may be either naturally occurring or in the form of gelatinous precipitates or gels including mixtures of silica and metal oxides. Clays may also be included with the oxide type binders to modify the mechanical properties of the catalyst or to assist in its manufacture. Use of a material in conjunction with the molecular sieve, i.e., combined therewith or present during
15 its synthesis, which itself is catalytically active may change the conversion and/or selectivity of the catalyst. Inactive materials suitably serve as diluents to control the amount of conversion so that products may be obtained economically and orderly without employing other means for controlling the rate of reaction. These materials may be incorporated into naturally occurring clays, e.g., bentonite and kaolin, to improve the crush strength of the catalyst under commercial
20 operating conditions and function as binders or matrices for the catalyst. The relative proportions of molecular sieve and inorganic oxide matrix vary widely, with the sieve content ranging from about 1 to about 90 wt% and more usually, particularly, when the composite is prepared in the form of beads, in the range of about 2 to about 80 wt% of the composite.

25 **[0031]** The feeds to the present process comprise an aromatic hydrocarbon feed, comprising benzene and/or toluene, and an alkylating reagent comprising methanol and/or dimethyl ether. Any refinery aromatic feed can be used as the source of the benzene and/or toluene, although in some embodiments it may be desirable to use an aromatic hydrocarbon feed which comprises at least 90 wt% toluene. In addition, in some embodiments, it may be desirable to pre-treat the aromatic hydrocarbon feed to remove catalyst poisons, such as
30 nitrogen and sulfur-compounds. In other embodiments, the feed may further include non-aromatics, such as a refinery aromatic feed from which the non-aromatics have not been extracted.

[0032] The present alkylation process is conducted at relatively low temperatures, namely less than 500°C, such as less than 475°C, or less than 450°C, or less than 425°C, or less than 400°C. In order to provide commercially viable reaction rates, the process may be conducted at temperatures of at least 250°C, such as least 275°C, for example least 300°C. In terms of
5 ranges, the process may be conducted at temperatures ranging from 250 to less than 500°C, such as from 275 to 475°C, for example from 300 to 450°C. Operating pressures will vary with temperature but generally are at least 700 kPa-a, such as at least 1000 kPa-a, for example at least 1500 kPa-a, or at least 2000 kPa-a, up to about 7000 kPa-a, for example up to about 6000 kPa-a, up to about 5000 kPa-a. In terms of ranges, operating pressures may range from
10 700 kPa-a to 7000 kPa-a, for example from 1000 kPa-a to 6000 kPa-a, such as from 2000 kPa-a to 5000 kPa-a. Suitable WHSV values based on total aromatic and alkylating reagent feeds are in the range from 50 to 0.5 hr⁻¹, such as in the range from 10 to 1 hr⁻¹. In some embodiments, at least part of the aromatic feed, the methanol alkylating reagent and/or the alkylation effluent may be present in the alkylation reaction zone in the liquid phase.

15 [0033] The alkylation reaction can be conducted in any known reactor system including, but not limited to, a fixed bed reactor, a moving bed reactor, a fluidized bed reactor and a reactive distillation unit. In addition, the reactor may comprise a single reaction zone or multiple reaction zones located in the same or different reaction vessels. In addition, injection of the methanol/dimethyl ether alkylating agent can be effected at a single point in the reactor
20 or at multiple points spaced along the reactor.

[0034] The product of the alkylation reaction comprises xylenes, benzene and/or toluene (both residual and coproduced in the process), C₉₊ aromatic hydrocarbons, co-produced water, oxygenate by-products, and in some cases, unreacted methanol. It is, however, generally preferred to operate the process so that all the methanol is reacted with the aromatic
25 hydrocarbon feed and the alkylation product is generally free of residual methanol. The alkylation product is also generally free of light gases generated by methanol decomposition to ethylene and other olefins. In some embodiments, the organic component of the alkylation product may contain at least 80 wt% xylenes and paraxylene may make up at least 35 wt% of the xylene fraction.

30 [0035] After separation of the water, the alkylation product may be fed to a separation section, such as one or more distillation columns, to recover the xylenes and separate the benzene and toluene from the C₉₊ aromatic hydrocarbon by-products. The resulting benzene and toluene may be recycled to the alkylation reaction zone, while C₉₊ aromatics can be

recovered for blending into the gasoline pool or transalkylated with additional benzene and/or toluene to make additional xylenes. Oxygenate by-products may be removed from the alkylation product by any means known in the art, such as adsorption as described in U.S. Patent Nos. 9,012,711, 9,434,661, and 9,205,401; caustic wash as described in U.S. Patent No. 9,294,962; crystallization as disclosed in 8,252,967, 8,507,744, and 8,981,171; and conversion to ketones as described in U.S. Patent Publication Nos. 2016/0115094 and 2016/0115103.

[0036] The xylenes recovered from the alkylation product and any downstream C₉₊ transalkylation process may be sent to a paraxylene production loop. The latter comprises paraxylene separation section, where paraxylene is conventionally separated by adsorption or crystallization, or a combination of both, and recovered. When paraxylene is separated by adsorption, the adsorbent used preferably contains a zeolite. Typical adsorbents used include crystalline alumino-silicate zeolites either natural or synthetic, such as for example zeolite X, or Y, or mixtures thereof. These zeolites are preferably exchanged by cations such as alkali or alkaline earth or rare earth cations. The adsorption column is preferably a simulated moving bed column (SMB) and a desorbent, such as for example paradiethylbenzene, paradifluorobenzene, diethylbenzene, or toluene, or mixtures thereof, is used to recover the selectively adsorbed paraxylene. Commercial SMB units that are suitable for use in the inventive process are PAREXTM or ELUXYLTM.

[0037] The invention will now be more particularly described with reference to the following non-limiting Example and the accompany drawings.

Example

[0038] An experiment was conducted to investigate the paraxylene selectivity in the alkylation of toluene with methanol at a temperature of 350°C, a pressure of 600 psig (4238 kPa-a) and a WHSV of 3.5 hr⁻¹ based on total feed. The feed used during the selectivation procedure consisted of a mixture of methanol and toluene in the molar ratio of 1:2. The catalyst used in the study is a formulated MCM-49 extrudate (80% zeolite / 20% alumina binder). The reaction was carried out in a down flow fixed bed reactor. The liquid product was collected and analyzed by a 6890 Agilent GC. The gas yield was calculated by difference. The results are summarized in Figures 1-3.

[0039] Figure 1 shows the selectivation for paraxylene over the nine day test. For the first four days, paraxylene selectivity was about 25 wt%, but after 9 days on stream with the higher methanol to toluene ratio of the feed, the paraxylene selectivity increased to about 43 wt%. It

is expected that the paraxylene selectivity will continue to increase with the increased methanol to toluene ratio until it reaches at least 40 wt%.

[0040] As can be seen from Figure 2, methanol conversion is essentially 100%. No methanol was detected in the product throughout the run. Toluene conversion is stable over
5 the nine day test. Average toluene conversion is 45%.

[0041] Overall xylenes selectivity observed in the experiment is summarized in Figure 3, from which it will be seen that the average xylene selectivity over the nine day test is at or near 77 wt%. The balance of the products is primarily C₉+ aromatics, with some C₁₀+ aromatics and benzene.

10 [0042] All patents, test procedures, and other documents cited herein, including priority documents, are fully incorporated by reference to the extent such disclosure is not inconsistent and for all jurisdictions in which such incorporation is permitted.

[0043] While the illustrative forms disclosed herein have been described with particularity, it will be understood that various other modifications will be apparent to and can
15 be readily made by those skilled in the art without departing from the spirit and scope of the disclosure. Accordingly, it is not intended that the scope of the claims appended hereto be limited to the example and descriptions set forth herein, but rather that the claims be construed as encompassing all the features of patentable novelty which reside herein, including all features which would be treated as equivalents thereof by those skilled in the art to which this
20 disclosure pertains.

[0044] When numerical lower limits and numerical upper limits are listed herein, ranges from any lower limit to any upper limit are contemplated.

CLAIMS

1. A process for producing paraxylene, the process comprising:
 - (a) contacting an aromatic hydrocarbon feed comprising benzene and/or toluene with
5 an alkylating reagent comprising methanol and/or dimethyl ether in at least one alkylation reaction zone in the presence of an alkylation catalyst comprising a molecular sieve having a Constraint Index less than 5 and under alkylation conditions comprising a temperature less than 500°C to produce an alkylated aromatic product comprising xylenes,
10 wherein the molar ratio of the alkylating reagent to benzene and/or toluene of at least 1:4 is used at least until a target paraxylene selectivity is achieved; and (b) recovering paraxylene from the alkylated aromatic product.
2. The process of claim 1, wherein the target paraxylene selectivity comprises at least 35
15 wt% of paraxylene, based on the total amount of xylenes.
3. The process of claim 1 or 2, wherein the molar ratio of the alkylating reagent to benzene and/or toluene is 1:2.
- 20 4. The process of claim 3, wherein the aromatic hydrocarbon feed comprises toluene.
5. The process of claim 4, wherein the aromatic hydrocarbon feed comprises at least 90 wt% toluene.
- 25 6. The process of claim 5, wherein the alkylating reagent comprises methanol.
7. The process of claim 6, wherein the alkylation conditions comprise a temperature of at least 250°C.
- 30 8. The process of claim 7, wherein the alkylation conditions comprise a temperature from 300°C to 450°C.
9. The process of claim 8, wherein the alkylation conditions comprise a pressure from 700

kPa-a to 7000 kPa-a.

10. The process of claim 9, wherein the alkylation conditions comprise a weight hourly space velocity based on the aromatic hydrocarbon feed of 50 to 0.5 hr⁻¹.

5

11. The process of claim 10, wherein the alkylated aromatic product comprises at least 70 wt% xylenes.

12. The process of claim 11, wherein the alkylation catalyst comprises at least one molecular sieve of the MWW framework structure.

13. The process of claim 12, wherein the alkylation catalyst comprises at least one molecular sieve selected from the group consisting of MCM-22, PSH-3, SSZ-25, ERB-1, ITQ-1, ITQ-2, MCM-36, MCM-49, MCM-56, EMM-10, EMM-12, EMM-13, UZM-8, UZM-8HS, UZM-37, MIT-1, and mixtures thereof.

15

14. The process of claim 13, wherein the alkylation catalyst comprises MCM-49.

15. A process for selectivating an alkylation catalyst for the alkylation of benzene and/or toluene with an alkylating agent comprising methanol and/or dimethyl ether, the process comprising:

20

(a) providing an alkylation catalyst comprising a molecular sieve having a Constraint Index less than 5 in at least one alkylation reaction zone;

25

(b) contacting the alkylation catalyst with an aromatic hydrocarbon feed comprising benzene and/or toluene with an alkylating reagent comprising methanol under alkylation conditions comprising a temperature from about 250°C to less than about 500°C to produce an alkylated aromatic product comprising xylenes,

wherein at least a 1:4 molar ratio of alkylating reagent to benzene and/or toluene in the aromatic hydrocarbon feed is used until a target paraxylene selectivity is achieved; and

30

(c) recovering paraxylene from the alkylated aromatic product.

16. The process of claim 15, wherein the target paraxylene selectivity comprises at least 35

wt% of paraxylene, based on the total amount of xylenes.

17. The process of claim 15 or 16, wherein the molar ratio of the alkylating reagent to benzene and/or toluene is 1:2.

5

18. The process of claim 17, wherein the aromatic hydrocarbon feed comprises at least 90 wt% toluene.

19. The process of claim 18, wherein the alkylation conditions comprise a temperature from 300°C to 450°C.

10

20. The process of claim 19, wherein the alkylation conditions comprise a pressure from 700 kPa-a to 7000 kPa-a.

21. The process of claim 20, wherein the alkylation conditions comprise a weight hourly space velocity based on the aromatic hydrocarbon feed of 50 to 0.5 hr⁻¹.

15

22. The process of claim 21, wherein the alkylated aromatic product comprises at least 70 wt% xylenes.

20

23. The process of claim 22, wherein the alkylation catalyst comprises at least one molecular sieve selected from the group consisting of MCM-22, PSH-3, SSZ-25, ERB-1, ITQ-1, ITQ-2, MCM-36, MCM-49, MCM-56, EMM-10, EMM-12, EMM-13, UZM-8, UZM-8HS, UZM-37, MIT-1, and mixtures thereof.

25

24. The process of claim 23, wherein the alkylation catalyst comprises MCM-49.

1/2

Figure 1



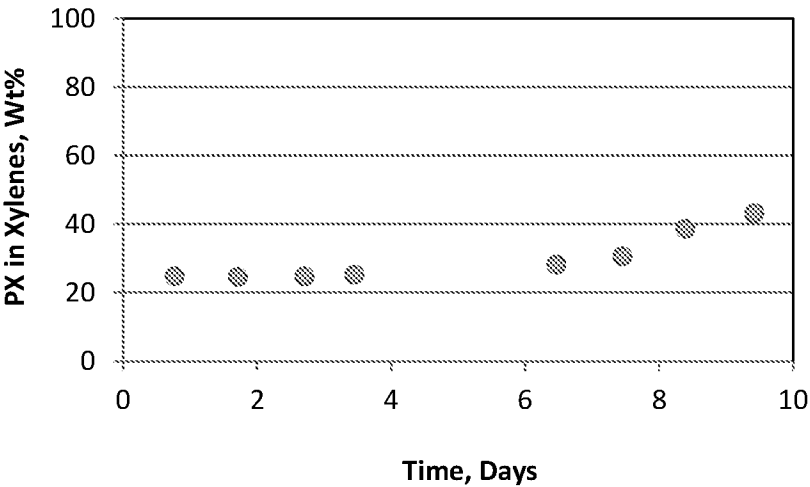


Figure 2

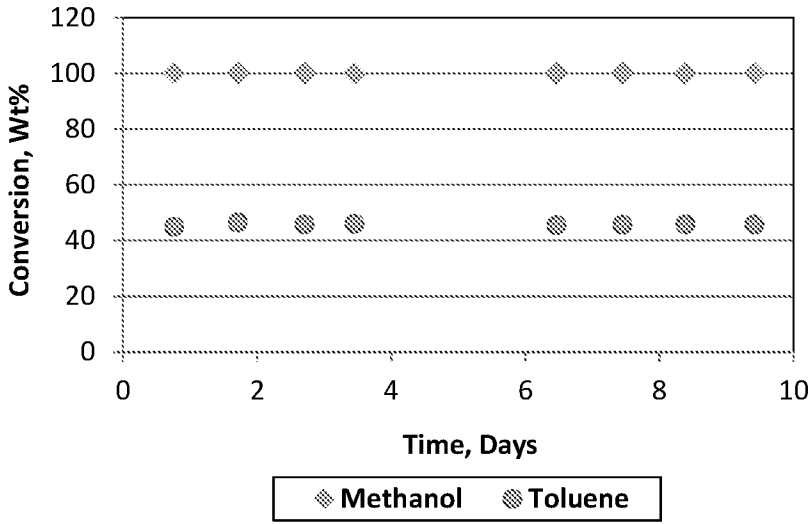

2/2

Figure 3

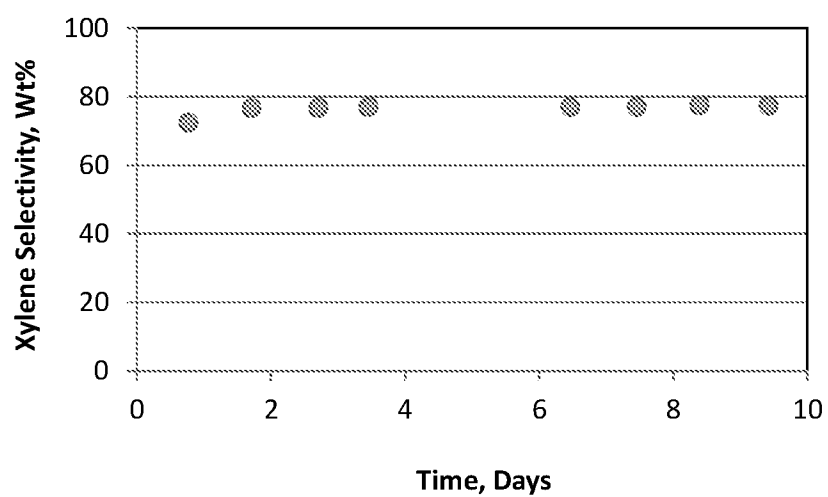

A. CLASSIFICATION OF SUBJECT MATTER**C07C 2/86(2006.01)i, C07C 15/08(2006.01)i, B01J 29/70(2006.01)i, B01J 8/02(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C07C 2/86; C07C 2/66; B01J 19/24; C07C 15/08; B01J 29/70; B01J 8/02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: paraxylene, toluene, methanol, MWW, alkylation

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	ZHU, ZHIRONG et al., 'Catalytic performance of MCM-22 zeolite for alkylation of toluene with methanol', Catalysis Today, 02 July 2004(online), Vol. 93-95, pp. 321-325 See page 321, left column, lines 3-4; page 322, right column, lines 11-13; page 323, right column, lines 7-9; 'experimental' section; table 2; figure 6.	1-24
A	US 3755483 A (BURRESS, GEORGE THOMAS) 28 August 1973 See example 6.	1-24
A	US 2014-0128651 A1 (FINA TECHNOLOGY, INC.) 08 May 2014 See claims 19-24.	1-24
A	US 5545788 A (CHENG, JANE C. et al.) 13 August 1996 See column 4, lines 15-32; claim 1.	1-24
A	US 2015-0376086 A1 (EXXONMOBIL CHEMICAL PATENTS INC.) 31 December 2015 See paragraphs [0003], [0011], [0012] and [0024]-[0029]; claims 1-13.	1-24



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 December 2017 (19.12.2017)

Date of mailing of the international search report

20 December 2017 (20.12.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

NAM, EUI HO

Telephone No. +82-42-481-5580



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/051198

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3755483 A1	28/08/1973	BE 798878 A	29/10/1973
		CA 1000745 A	30/11/1976
		DE 2321399 A1	15/11/1973
		DE 2321399 C2	16/09/1982
		FR 2181940 A1	07/12/1973
		FR 2181940 B1	04/02/1977
		GB 1403329 A	28/08/1975
		US 3751506 A	07/08/1973
US 2014-0128651 A1	08/05/2014	CA 2661021 A1	13/03/2008
		CA 2661021 C	24/11/2015
		CN 101511753 A	19/08/2009
		CN 102153435 A	17/08/2011
		EP 2064168 A2	03/06/2009
		EP 2064168 A4	15/12/2010
		JP 2010-502636 A	28/01/2010
		JP 5486306 B2	07/05/2014
		KR 10-1542785 B1	07/08/2015
		KR 10-1586629 B1	19/01/2016
		KR 10-1587786 B1	25/01/2016
		KR 10-2009-0059139 A	10/06/2009
		KR 10-2014-0051389 A	30/04/2014
		KR 10-2014-0051390 A	30/04/2014
		MX 2009002350 A	23/03/2009
		US 2008-0058566 A1	06/03/2008
		US 2011-0184218 A1	28/07/2011
		US 2011-0301396 A1	08/12/2011
		US 2013-0225888 A1	29/08/2013
		US 2014-0005454 A1	02/01/2014
		US 2016-0052839 A1	25/02/2016
		US 8552238 B2	08/10/2013
		US 8680354 B2	25/03/2014
		US 9375706 B2	28/06/2016
		US 9556083 B2	31/01/2017
		US 9556084 B2	31/01/2017
		WO 2008-030722 A2	13/03/2008
		WO 2008-030722 A3	24/04/2008
US 5545788 A	13/08/1996	CA 2111358 A1	23/12/1992
		CA 2111358 C	25/03/2003
		CA 2206312 A1	13/06/1996
		CA 2206312 C	10/10/2006
		EP 0590078 A1	06/04/1994
		EP 0590078 B1	20/09/1995
		EP 0796234 A1	08/03/2000
		EP 0796234 B1	10/01/2001
		JP 06-508342 A	22/09/1994
		JP 10-509730 A	22/09/1998
		JP 3472298 B2	02/12/2003

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/051198

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2015-0376086 A1	31/12/2015	JP 3938934 B2	27/06/2007
		KR 10-0231656 B1	15/11/1999
		KR 10-0378141 B1	09/06/2003
		KR 10-1994-0701363 A	28/05/1994
		KR 10-1998-0700247 A	30/03/1998
		US 5236575 A	17/08/1993
		US 5371310 A	06/12/1994
		US 5401896 A	28/03/1995
		WO 92-22498 A1	23/12/1992
		WO 96-17810 A1	13/06/1996
		CN 106458788 A	22/02/2017
		CN 106458794 A	22/02/2017
		CN 106488897 A	08/03/2017
		JP 2017-526634 A	14/09/2017
		KR 10-2017-0013947 A	07/02/2017
		KR 10-2017-0013949 A	07/02/2017
		KR 10-2017-0018358 A	17/02/2017
		TW 201612139 A	01/04/2016
		TW 201612140 A	01/04/2016
		TW 201613845 A	16/04/2016
		TW I582064 B	11/05/2017
		TW I586635 B	11/06/2017
		TW I586646 B	11/06/2017
		US 2015-0376087 A1	31/12/2015
		US 2015-0376088 A1	31/12/2015
		US 2016-0101405 A1	14/04/2016
		US 2016-0185686 A1	30/06/2016
		US 2016-0264495 A1	15/09/2016
		US 9249068 B2	02/02/2016
		US 9295970 B1	29/03/2016
		US 9302953 B2	05/04/2016
		US 9469579 B2	18/10/2016
		US 9738573 B2	22/08/2017
		WO 2016-003611 A1	07/01/2016
		WO 2016-003612 A1	07/01/2016
		WO 2016-003613 A2	07/01/2016
		WO 2016-003613 A3	25/02/2016