

(18)



Europäisches Patentamt

European Patent Office

Office européen des brevets

(11) Publication number:

**0 059 276
B1**

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **28.05.86**

(51) Int. Cl.⁴: **B 44 C 1/16, B 41 M 3/12**

(21) Application number: **81300821.6**

(22) Date of filing: **27.02.81**

(54) **Production of decalcomanias and apparatus for the production thereof.**

(43) Date of publication of application:
08.09.82 Bulletin 82/36

(45) Publication of the grant of the patent:
28.05.86 Bulletin 86/22

(84) Designated Contracting States:
AT DE FR GB

(56) References cited:
**GB-A-1 447 068
GB-A-2 005 596
US-A-2 322 445
US-A-2 970 076
US-A-3 007 829
US-A-3 255 695
US-A-3 445 309
US-A-3 533 822
US-A-3 554 836
US-A-4 068 033**

(73) Proprietor: **Corning Glass Works
Houghton Park
Corning New York 14831 (US)**

(72) Inventor: **Heimbach, Kim Paul
215 Strathmore Place
Corning New York 14830 (US)
Inventor: Johnson, Ronald Edgar
South Main Street P.O. Box 436
Tioga Pennsylvania 16946 (US)**

(74) Representative: **Smith, Sydney et al
Elkington and Fife High Holborn House 52/54
High Holborn
London WC1V 6SH (GB)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Courier Press, Leamington Spa, England.

EP 0 059 276 B1

Description

This invention relates to an improved method of making decalomania (decals) particularly of the heat release type.

Heretofore, heat release decals have been primarily manufactured by screening or lithography although manufacture feasibility by rotogravure and letterpress was known. The use of offset rotary lithographic presses for printing the varnishes used in making heat release lithographic decals was also known as shown in U.S. Patent No. 2,640,458. In all of the above mentioned processes the inks and coatings printed contain various organic solvents or oils necessarily included in the printing media to achieve printable viscosities. These inks and coatings are successively printed to achieve heat release decals of the basic layered structure described in U.S. Patent No. 2,970,076.

The first three layers of a heat release decal are normally not transferable and include a backing or support material, usually paper, a barrier coat, and a wax release layer. A transferable portion, consisting of design, sealant, overflux, and adhesive layers is deposited thereover. The function of the barrier coat is to prevent absorption of the wax release layer into the paper both at the time of wax application to the paper and transfer of the finish decal to a substrate surface. The release coat is the layer which separates the transferable portion of the decal from the non-transferable portion. The release coat itself is the only portion of a heat release decal which has hitherto been applied by hot melt techniques, such as roll coaters etc.

Polyethylene glycols having molecular weights in excess of 1000 are commonly employed as the waxes for the release layer as noted in U.S. Patent Nos. 2,970,076, 3,007,829, and 4,068,033, although both vegetable and mineral waxes can be employed as disclosed in U.S. Patent No. 2,970,076. The use of polyethylene glycol esters is also known, particularly, if solution coating techniques are to be employed for applying the wax (see for example U.S. Patent No. 3,533,882).

In GB-A-2,005,596, there is described a method of making a sign which comprises taking a transfer material and a temporary support sheet, in which the transfer material comprises a transparent or translucent sheet being on one side a plurality of transferable indicia. The indicia may be transferable under the action of heat and pressure which property may be imparted to them by constructing them on the basis of thermoplastic polymeric material which softens to a tacky adhesive condition on the application of heat.

In a conventional heat releasable decal, it is normal to include an outermost thermoplastic or heat activatable adhesive surface at the opposite or rear side of the design. The term "thermoplastic" as employed in relation to this adhesive layer is not synonymous to the term "thermoplastic" as applied to the thermoplastic inks discussed here-

inafter. In both cases the materials reversibly soften with heat, hence the term "thermoplastic". In the present invention when the term is applied to the inks it also implies melt processability (application), by the methods and apparatus disclosed herein, whereas, the material used for the decal adhesive layer is applied from solution over the design. To avoid the ambiguity of the term thermoplastic, melt processable inks are sometimes referred to as "hot melt" inks or simply "hot colour". When, for example, the outermost thermoplastic or heat activated surface of the decal is pressed against the surface of a preheated vitreous or ceramic article, the heat of the article softens the adhesive surfaces of the decal to a sufficient extent such that the design is adhered to the article being decorated. Concurrently, the heat from the article softens or melts the heat release layer of the backing, thereby causing the backing to release from the design layer. Both actions are accomplished in essentially a single operation in which the decal is pressed against the preheated article. The ware with the temporarily adhered vitreous design is thereafter fired in the normal manner to cause the design to become an integral part of the surface of the ware. In the present invention the inks exhibit sufficient pressure sensitivity below their melt points so that the need for a separate adhesion layer is obviated.

The structure and composition of the transferable portion of the heat release decal depends somewhat on the process used to manufacture the decal. For example screening processes have previously proved to be the most economical process for manufacturing heat release decals. Screening, however, is not without its limitations and drawbacks. The use of solvents in the screening media necessitate drying between the decal layers so that each successive layer can be applied over or adjacent to the previous layers without distortion, smearing, or pick-back of the print. The solvents thus add considerable cost to the decal manufacturing process by necessitating both driers and environmental protection controls. Viscosity controls are also required to achieve viscosity stability. Low volatility solvents are often used which require extensive drying either in terms of time or temperature. Time is the variable usually affected because of the desire not to melt the wax release layer during the drying operation. An increase in drying time, however, means longer driers or slower process speeds. Melting of the wax during drying often results in less acceptable release when transferring the decal to the substrate.

If the backing is paper, it is important to control the dimensions of the paper sheets to ensure proper registration of the subsequent design layers. The dimensions of the paper are directly coupled to its moisture content. Excessive drying time shrinks the sheet by driving out moisture, conversely, increased moisture content resulting from shorter drying time expands the sheet due to absorption. The environmental window in

which the paper can be handled is very narrow, thus affecting drying times and temperatures in conjunction with previously mentioned wax problems.

Thermoplastic screening, requiring negligible drying, is not a viable alternative for solving these problems because the heated screens would melt the wax release layer, and thereby, prevent the backing material from accepting the screened prints. This could be prevented by screening overlayers having a melt point lower than the release layer, but this would also be impracticable because the design layer would remelt and smear upon subsequent transfer of the heat release decal to the substrate.

In addition to process limitations, silk-screened decals also have a limitation, in that, they cannot achieve the fine resolution and sharp definition obtainable by lithographic decals; moreover, the thicker layer which results from screening is not always desirable.

In a lithographic decal process, dry colour is dusted over the sheet of paper, and adheres only to the printed varnish image. The excess colour is then removed from the sheet, leaving the desired image. Due to the aforementioned shortcomings of screened decals, lithographic decals are often used in spite of process disadvantages resulting from the inability of adding colours directly to the lithographic varnish.

The lithographic process is also not without other disadvantages, besides this obvious disadvantage of having to handle, dust, and remove the dry powders after each successive application of varnish. For example, while lithographic decals may have much greater resolution than screened decals, the prints are also much thinner, and as a consequence much higher levels of pigments must be used in the colours. For overglaze decals this necessitates an overflux, i.e., a printed overglaze, which is applied over the colours to improve durability and reduce to safe levels toxic metal release. Although an overflux is sometimes used for screened decals, its use for lithographic decals in food-contact applications is mandatory. Due to the tendency of the dry colours to stick to the overflux layer, a sealant layer is required in the construction of a lithographic decal between the design layer and the overflux layer as shown in U.S. Patent No. 4,068,033. In general, lithographic heat release decals have been found more difficult to manufacture than screened decals, such that, their use has been limited.

The present invention overcomes most of the disadvantages of screened and lithographic decals by utilizing thermoplastic colours (sometimes hereinafter referred to as, hot melt colours) for the design layers of the decal, and optionally all layers of the decal except the backing material, in conjunction with an offset rotogravure process, wherein, the melted thermoplastic materials are first transferred from a heated gravure or intaglio roll to an elastomeric offset roll, whereupon the materials cool such that they can be transferred from the offset roll at temperatures considerably

below their melt points. By utilizing the offset roll, it is possible to print waxes or thermoplastic hot melts of higher melt points over a wax release layer of lower melt point as long as the hot melts, thereby printed, exhibit sufficient pressure sensitivity below their melt points to adhere to a wax surface when transferring from the offset roll. The offset roll prevents melting of the release layer which would occur for direct gravure with heated rolls. Both the offset and backup rolls may be internally cooled, with a heat transfer fluid if necessary, to maintain a low temperature when printing onto the release layer.

In a similar manner a flexographic process may be used wherein an ink applicator roll is substituted for the gravure roll and an embossed silicone roll carrying a portion of the design is substituted for the plain offset roll. In this case the embossed design of the flexographic roll picks-up a uniform layer of ink by contacting the ink applicator roll. The ink subsequently cools upon and is transferred from the flexographic roll in a similar manner to the offset roll described above.

In principle, therefore, the invention provides a method of making a decal wherein a backing layer is provided, a release layer is deposited on said backing layer, and at least one layer of a melt processable thermoplastic ink which exhibits a pressure sensitivity at a temperature below that at which the ink becomes heat processable is deposited thereon characterized in that the melt processable thermoplastic ink is heat processed from a molten condition to at least a partially solidified condition prior to deposition on the release layer so that the ink may be printed over ink of a different colour without drying.

The invention will now be further described with reference to the accompanying drawings, in which Figure 1 is a decal in cross section which may be manufactured according to the present invention illustrating the general layout which in any one particular embodiment may include less than the number of layers illustrated in the drawing.

Figure 2 is a schematic of a multiple station printing machine for use in producing the decal illustrated in Figure 1.

Referring to Figure 1 this shows a decal 10 having multiple layers of material hereinafter described. The decal 10 is illustrated in the general sense that certain materials may be substituted for other types. However, the arrangement of layers of materials thereon follows a functional sequence.

Decal 10 includes a backing material 12 for supporting the remaining portions of the decal 10, a barrier layer 14 for sealing the backing material, a release layer 16 for allowing separation of the subsequent layers from the backing 12, a sealant coat 18, and a design layer on layers (multicolours) 20.

The purpose of the various layers have been previously described in the background and are basically conventional. However, the components of each of the layers, as combined in the present

invention provide a novel decal 10 with properties and advantages exceeding those presently attainable.

Traditionally for a heat release decal, the backing material 12 is paper, and the barrier layer 14 can be such materials as starch, casein, and alkali metal silicates with or without clay type fillers as mentioned in U.S. 2,970,076, or polyvinylacetate as mentioned in U.S. 3,445,309. Alternatively, herein, the barrier layer can be a high melt point wax. The barrier layer seals the backing and prevents cross-contamination of the release layer 16 when a paper backing layer 12 is used. The release layer 16 is usually a wax having a melting point lower than the barrier layer 14. Thus, when the decal 10 comes in contact with a hot substrate or is heated from the opposite side of the backing material 12, the release layer 16 melts and allows the remaining coats to stick to the substrate and release from the backing material 12.

The sealant layer 18 may contain fluxes therein so that when ceramic inks or colours are used in the design layer 20 a vitreous film (overflux) is produced which reduces the release of toxic metals which may be present in the coloured materials forming the design layer 20. The vitreous film (overflux) also improves the overall fired decoration durability. The sealant layer 18 also facilitates total release of the design layer 20 from the backing 12. A number of layers may form the design layer 20 by sequential printing of various colour patterns one over the other to form a decorative design of high resolution.

If a nonporous backing material 12 is utilized then the barrier layer 14 may be unnecessary. For example, an organic film or metal foil may be utilized which would not be absorbent to melted wax of the release layer 16, thus the barrier layer would be unnecessary because the backing material 12 would serve as its own barrier to the release layer 16. Other variations of the present invention will be described herein but first there will be a brief description of an apparatus suitable for producing the decals 10 of the present invention.

In Figure 2 a multiple station offset rotogravure hot melt printing machine 30 is described. The apparatus shown includes n stations labeled 1, 2 . . . n and a pair of respective unwind and rewind reels 32 and 34. Each station includes one or more idler wheels 36a—c, a backup roll 38, an offset roll 40, an etched or gravure roll 42, and a hot melt bath 44 into which a quantity of thermoplastic ink 46 is deposited. Each station 1—. . . n essentially include the same arrangement of rolls and pulleys. Intermediate each station there may be included a so-called chill roll 48 which may be temperature controlled by heat exchange means 49. The function of the chill roll 48 is to especially reduce heat buildup in the backing material 12 and release layers 16, which may occur during high speed printing. Also the chill roll 48 helps to freeze the previously printed hot melt thermoplastic materials.

Respective unwind and rewind idler wheels 50a

and b establish the path for the backing material 12 as hereinafter described.

A roll of backing material 12 is placed at the unwind reel 32 and passes around the unwind idler 50a, over the first idler 36a of station 1 and the subsequent downstream idler 36b between the respective backup and offset rolls 38 and 40, around the next downstream idler 36c over the chill roll 48 and thence to the second station 2 for repeat threading and so on until the backing material 12 is located about the rewind idler 50b and the rewind reel 34.

The hot melt bath 44 carries the ink 46 which is in intimate contact with the gravure roll 42 which may be heated by an electrical or other heating device 52. A doctor blade 54 scrapes excess ink 46 from the gravure roll 42; and, as it rotates thereafter coming in intimate contact with the offset roll 40, the ink remaining on the gravure roll 42 causes a mirror image by splitting between the two surfaces upon separation. As the offset roll 40 rotates it comes in contact with the backing material 12 and prints its image onto the backing material 12 as supported by the backup roll 38. Each station in turn prints a different layer on the backing material 12 so that after multiple steps the decal is produced having the desired design printed thereon.

It should be noted that each of the respective backup and offset rolls 38 and 40 may have heat exchange means 56 and 58 located for controlling the temperature thereof. Primarily these heat exchange means 56 and 58 would be used for cooling so that the ink which is heated on the gravure roll 42 cools to a temperature where it will have sufficient pressure sensitivity to transfer from the offset roll to the backing material 12 and yet not smear or remelt previously applied layers including respective barrier 14, release 16, and sealant 18 layers when used.

Decals printed by the hot melt rotogravure process described herein exhibit significant advantages over those printed by conventional techniques. The resolution and definition obtainable by the process of the invention approaches that of lithographic decals and substantially exceeds that of screened decals; on the other hand, the higher pigment loadings of the colours required for lithographic decals are not needed for this process, consequently, decals printed in accordance with the present invention compare to screened decals for durability. Print thicknesses obtainable by this process can be adjusted from the thin prints obtained by lithographic decals up to the thicker prints obtained by screening. Unfired print thicknesses can range from .25 mil to 2.5 mil, and are a function of the depth of the design etched on the gravure roll 42.

Process advantages over both screening and lithography are substantial. Each colour and/or coating is printed in a single contact with the offset roll and is immediately ready to receive the next colour or coating. The drying procedures required for screened decals, or the dusting and removal of excess colour steps for lithographic

decals are totally obviated. The backing material 12 successively contacts a series of thermally controlled offset rolls 40. The number of offset printing stations can vary from one, for a single colour decal applied to a prewaxed and pre-sealed backing material 12, to perhaps eighteen or more for a fifteen colour decal 10 for which the barrier 14, sealant 18, and release 16 layers may be printed if required in addition to the colours. The adhesive layer noted in the construction of heat release decals in U.S. Patent Nos. 2,970,076 and 4,068,033 is not required for hot melt offset decals because of the adhesive nature of the hot melt materials themselves.

Application techniques for transferring the offset decal 10 to a substrate can be identical to those used for applying heat release decals manufactured by the other processes. The decal 10 may be pressed or rolled against the heated substrate surface, or is alternatively preheated and pressed against a cold substrate surface. It may even be pressed between a heated transfer pad or roll and a cold substrate. The aforementioned substrate and press are not shown detailed herein as description is not necessary to the understanding of the present invention. The heat melts the release layer 16 (wax) thereby releasing or transferring the design 20 and sealant layers 18 to the glass or ceramic substrate (not shown). For the release to satisfactorily occur, therefore, the release layer 16 of wax must be either the lowest melt point or the lowest melt viscosity layer in the decal 10 at the transfer temperature. The barrier layer 14 on the other hand should preferably not melt at the transfer temperature in order to prevent the molten wax from the release layer 16 from penetrating into the paper backing 12.

The sealant 18 and design 20 layers must either not melt or, if molten, be of much higher viscosity than the release layer. Cohesive strength imparting resins are essential to the design and sealant layers to preserve their integrity during transfer and thereby prevent distortion or smearing of the decoration. It is preferable that the design and sealant layers do not melt during transfer, but both layers consequently must exhibit pressure sensitivity below the melt point of the inks 46 therein, such that, the design 20 will adhere to the substrate upon contact at the release temperature. Such materials and others useful in the present invention are disclosed in a copending U.K. application S.N. 8032236 Publ. No. 2085459 of 28th April 1982 of this same date assigned to Corning Glass Works the assignee herein.

One embodiment of the invention herein is the use of a hot melt offset gravure process to construct a decal comprised of alternate layers of hot melt thermoplastic materials. Preferably the inks contain ceramic materials or pigments for the manufacture of ceramic decals for use in decorating glass or glass-ceramic tableware. It is not intended that this be strictly limited to ceramic decals but may apply to decals comprised of any other hot melt material, i.e., chocolate or similar

confectionery substances for food decorations, coloured waxes for labels, etc.

The hot melt offset rotogravure process used herein consists of a heated gravure roll, also known as intaglio (etched or engraved) roll 42, preferably steel, to which the molten inks 41 are applied by inking rolls, bath immersion (shown in Fig. 2), or other suitable means. The temperature of the gravure roll 42 should be between 180°F (82°C) and 300°F (149°C). The excess ink is removed from the roll by means of the doctor blade 54. The gravure roll 42 then contacts offset roll 44 formed of a material having a suitable releasing surface 41. Condensation-cure silicones such as Stauffer-Wacker 04478 have been found suitable. Other releasing elastomers are also suitable. The silicones used herein may be the same as those used for direct transfer printing as described in U.S. Patent Nos. 3,756,165 and 3,255,695. The offset roll 40 picks up the printed image upon contact from the gravure roll 42, as long as the ink melt viscosity is sufficiently low (e.g. 10 to 1,000 poise) to wet the offset surface 41. The ink 46 subsequently cools upon the offset surface 41 to either slightly above its melt point or below its melt point for those materials having sufficient pressure sensitivity to adhere to the surface to be printed on the backing material 12. The print is then transferred from the offset surface 41 to the backing material 12 by intimate mechanical contact. The ink 46 transfers from the offset surface 41 for which it has low affinity to a surface for which it has greater affinity. This same basic step is repeated for each layer of the decal to be printed.

For heat release ceramic decals, for which the organic constituents in the transferable portion of the decal 10 must burn off during firing without adversely affecting the glass fluxes, the following is a list of preferred materials for each layer of the decal:

1. Barrier Layer — a relatively high melt point wax modified with an organic thickener, such as a cellulosic ether, or inorganic thickener, such as cab-o-sil, bentonite, etc. An example is one part polyethylene glycol wax (molecular weight 6000) thickened with two parts by weight Min-U-Sil (pulverized silica from Pennsylvania Glass Sand Corp.).

2. Release Layer — a low melt point wax of low melt viscosity. Polyethylene glycol wax (molecular weight 1500) is suitable.

3. Sealant Layer — it is usually preferable that the sealant layer contains a glass flux to serve as an overflux for the decoration after firing.

A satisfactory sealant coat is one part by weight ethylene vinyl acetate copolymer (19% vinyl acetate, ASTM D1238 melt index of 150 g/10 min.), one part glycerol ester of hydrogenated resin (R&B softening point of 52°C.), one part paraffin wax (melt point 130°F), and six parts glass flux.

If it is desirable that the sealant layer not contain a glass flux, then it is preferable that the sealant layer be a thin layer of thermoplastic resin

applied from solution over the release layer. A suitable resin is a n-butyl methacrylate polymer such as Elvacite 2044 (Dupont).

4. Design Layer — the design layer may consist of up to 15 adjacent colours which may overlap to form 3 overlayers in limited areas. The inks used therein contain from 50—80% vitrifiable inorganic or ceramic colour (glass flux plus 0.5—30% pigments and opacifiers), and 20—50% organic medium. A suitable organic medium consists of about 20—50% cohesive strength imparting polymers, 0—50% amorphous tackifying resins, and 20—50% waxes and preferably 33 1/3% ethylene vinyl acetate copolymer, 19% acetate; 33 1/3% glycerol ester of hydrogenated rosin; and 33 1/3% paraffin. The organic formulation for the design layer 20 is, in this case, the same as that used for the hot melt sealant layer 18. The design layer inks exhibit a R&B softening point of about between 50—95°C and a 100 RPM Brookfield Thermocel viscosity about between 50 and 1000 poise at 100°C.

The cohesive strength imparting polymers may also be selected from the group consisting of cellulosic ethers, cellulosic esters, ethylene ester copolymers, polyethylene, polyvinylpyrrolidone, acrylic and methacrylic polymers and copolymers, and block copolymers of styrene with butadiene or isoprene.

The amorphous tackifying resins may be selected from a group consisting of rosin and rosin derivatives, atactic polypropylene, polyterpene resins, and aliphatic hydrocarbon resins.

The waxes may be selected from a group consisting of paraffin and microcrystalline mineral waxes, animal and vegetable waxes, fatty alcohols and acids, fatty acid esters and glycerides, low molecular weight polyethylene, polyoxyalkylene esters, polyoxyalkylene ethers, oxazoline waxes and hydrogenated oils. It is intended that the scope of this invention include pressure release decals 10 for which a silicone, fluorosilicone or fluorocarbon material replaces wax for release layer 16. In the case of silicone, a hot melt polyethylene barrier layer may also be optionally present between the silicone release layer and the paper backing; such paper is readily commercially available and is known as polycoated release paper. The hot melt offset rotogravure process would then be used for printing the sealant and design layers onto the pressure release layer.

This latter type of decal 10 is known for its cold release properties and can be transferred to a substrate solely upon the application of pressure. For a cold release decal 10, the wax in the ceramic colour medium formulations described in the above mentioned copending application may be replaced by liquid low volatility plasticizer. It is important that the plasticizer be incompatible (immiscible) with the sealant layer 18, or that the design and sealant layers be of identical organic composition, in order to prevent migration of plasticizer between layers. Other types of hot melt inks, such as described in copending U.K. applica-

tion S.N.80 32237 Publn. 2085460 of 28th April 1982 of this same date assigned to Corning Glass Works the assignee herein, are also applicable in the construction of pressure-release decal-comania printed by the processes described herein.

It is also intended that the scope of this invention include those decals as water-slide-off decals 10 wherein the wax in release layer 16 is replaced by a water soluble layer, and a high cohesive strength film is located over the design layer 20. The water soluble release layer 16 may also be printed by hot melt offset gravure wherein a water soluble resin such as polyvinylpyrrolidone, blended with a water soluble wax such as polyethylene glycol wax is utilized. The latter may be molecular weight of about between 1000 and 6000.

Another embodiment of the present invention is similar to the method proposed above, in that both methods may utilize pressure-sensitive and heat sensitive thermoplastic inks; however, above, an offset rotogravure process is used for the decal manufacture, whereas in this embodiment discussed below it is proposed that a flexographic (typographic) process be used. Each process has inherent advantages and disadvantages when compared to each other such that the preferred process will vary depending either on the design to be printed or on the layer of the decal to be printed.

Referring to Figure 2, all items will be referred to as above except for substitutions below. The flexographic process differs from offset rotogravure process described above in that the gravure roll 42 upon which the design has been etched or engraved is replaced by plane inking roll upon which there is an ink film of uniform thickness, and the offset roll 40 is replaced by a typographic roll upon which the design is present as raised areas. In both cases, because of the nature of the inks herein proposed, the first roll is preferably made of metal heated to between 180° and 300°F, (82 to 149°C) whereas the second roll is preferably silicone rubber. The advantages of both of these processes over screening and lithography is virtually the same since most of the advantages are inherent in the use of pressure-sensitive thermoplastic inks. The flexographic processes, however, has a limitation in print quality especially when compared to lithography and offset rotogravure since it is not capable of printing variable tones, and yields less resolution and detail. The flexographic process, on the other hand, has been found to be superior to offset rotogravure for printing glass-flux filled thermoplastic inks in two respects. First, in offset rotogravure it is necessary to doctor the gravure roll 42 with a blade which removes the excess ink from the roll surface leaving the ink only in the recessed design areas. Any ink left on the gravure surface in non-design areas is picked up by the offset roll and printed onto the decal backing, which results, when pigments are present in the ink, in a defect known as "haze". This problem necessitates fre-

quent blade changes during operation, and is the major drawback of the rotogravure process. In the flexographic process it is only necessary for the raised design areas to contact the metal roll surface, thereby minimizing any chance of picking up and printing unwanted ink. Although it is still necessary to doctor the inking roll (now 42) in order to control ink thickness, the doctoring is distinctly different from the doctoring required for offset rotogravure. In the latter case the blade must have sufficient flexibility or a sufficiently high wear rate to conform to the total gravure roll 42 surface in order to doctor effectively over rolls of the width necessary for efficient decal manufacture. For the flexographic process the doctor blades can be constructed of very rigid wear resistant materials, such as tungsten carbide, and either not touch the roll surface at all or only touch in very limited raised wear resistant areas spaced circumferentially around the roll. The required flexibility of the rotogravure blades results in the second drawback of that process or the inability to doctor over large continuous recessed areas without the blade penetrating into the areas. Penetration of the blade into these areas results either in insufficient or in non-uniform ink retention by the design. To avoid this problem the gravure cylinders are etched or engraved in a dot pattern such that there are always areas available for blade support. This is satisfactory for most designs, and is preferred for many applications, but it is not satisfactory when it is necessary to print bold design areas or void free films. For this reason the flexographic process is preferred for printing the non-design layers of a ceramic decal, or for printing design where a continuous uniform film of colour is required.

Both processes can be used for printing heat release decalcomina, cold release decalcomania, or even the design and adhesive layers of water-slide-off decalcomania. The pressure-sensitive thermoplastic inks utilized are interchangeable between the two processes. In fact, some of the stations 1-n in Figure 2 could be of the first type described herein and others could be of the latter type.

In yet another possible embodiment, a gravure roll could transfer after doctoring the design or ink to an embossed flexographic surface.

Claims

1. A method of making a decal wherein a backing layer is provided, a release layer is deposited on said backing layer, and at least one layer of a melt processable thermoplastic ink which exhibits a pressure sensitivity at a temperature below that at which the ink becomes heat processable is deposited thereon characterized in that the melt processable thermoplastic ink is heat processed from a molten condition to at least a partially solidified condition prior to deposition on the release layer so that the ink may be printed

over ink of a different colour without prior drying.

2. A method as claimed in claim 1 characterized in that the backing layer is constituted by a film having a surface in contact with the release layer which is impervious thereto such that the release layer is readily releasable therefrom.

3. A method as claimed in claim 2 characterized in that the backing layer is a metal foil or an organic polymer film.

4. A method as claimed in any of claims 1 to 3 characterized in that the release layer is a water-soluble adhesive or a silicone coating optionally with a polyethylene resin between the silicone coating and the backing layer.

5. A method as claimed in claim 1 characterized in that the backing layer is a paper sheet.

6. A method as claimed in claim 5 characterized in that there is further provided an intermediate barrier layer between the backing material and the release layer, said barrier layer rendering the backing layer impervious to the release layer so that the release layer is readily releasable therefrom.

7. A method as claimed in claim 6 characterized in that the barrier and release layers are formed from waxlike materials the melting point of the former being higher than that of the latter.

8. A method as claimed in any of claims 1 to 7 characterized in that the release layer is a waxlike material having a melting point lower than that of the thermoplastic ink.

9. A method as claimed in claim 8 characterized in that the release layer is a polyethylene glycol wax with a molecular weight between 1000 and 6000.

10. A method as claimed in any of claims 1 to 9 characterized in that the thermoplastic ink contains between 50 and 80% of a vitrifiable inorganic material or flux, blended with a thermoplastic organic medium containing between 20—50% cohesive strength imparting polymers, 0—50% amorphous tackifying resins and 20—50% waxes, the ink exhibiting a Ring & Ball softening point between 50 and 95°C., and a 100 rpm Brookfield Thermocel viscosity between 50 and 1000 poise at 100°C.

11. A method as claimed in claim 10 characterized in that the cohesive strength imparting polymers are selected from cellulosic ethers, cellulosic esters, ethylene-ester copolymers, polyethylene, polyvinylpyrrolidone, acrylic and methacrylic polymers and copolymers, and block copolymers of styrene with butadiene or isoprene.

12. A method as claimed in claim 10 or claim 11 characterized in that the amorphous tackifying resins are selected from rosin and rosin derivatives, atactic polypropylene, polyterpene resins, and aliphatic hydrocarbon resins.

13. A method as claimed in any of claims 10 to 12 characterized in that the waxes are selected from paraffin and microcrystalline mineral waxes, animal and vegetable waxes, fatty alcohols and acids, fatty acid esters and glycerides, low molecular weight polyethylene, polyoxyalkylene

esters, polyoxyalkylene ethers, oxazoline waxes, and hydrogenated oils.

14. A method as claimed in any of claims 1 to 13 characterized in that a thin layer of thermoplastic resin is deposited from solution onto the release layer before the deposition of the heat processable ink.

15. A method of manufacturing a decal as claimed in claim 1 characterized in that one selects a supply of the melt processable thermoplastic ink, one maintains the supply of ink at an elevated temperature above its melting point, one deposits the supply of melted thermoplastic ink on a gravure surface to establish a portion of the design, one maintains said gravure surface at an elevated temperature above the melting point of the ink, one contacts the gravure surface with a relatively easily releasable offset surface, one transfers the portion of the design from the former to the latter, one contacts the offset surface with the backing material for transferring the portion of the design from the former to the latter, the temperature of the offset roll being maintained to a level near or below the melting point of the ink such that it exhibits at least sufficient adherence for preferentially sticking the ink to the backing material during the step of contacting the offset roll with the backing material.

16. Apparatus for producing a decalomania or decal formed of successive layers of a releasable backing material and design comprising; a supply of melted thermoplastic ink for each design layer, at least one heated applicator surface adapted to contact the ink and receive a selected amount thereon and maintain same at a selected temperature, at least one relatively cool flexographic surface having impressions thereon corresponding to a portion of the design, and flexographic surface adapted to receive on the impressions an appropriate amount of said melted ink from the applicator surface, whereupon said ink cools to a temperature at which the ink's cohesive strength exceeds affinity for the flexographic surface, said surface being further adapted to contact the flexographic backing material for transferring the partially solidified ink thereto.

Patentansprüche

1. Verfahren zur Herstellung eines Anziehbildes, wobei eine Trägerschicht vorgesehen wird, eine Abziehschicht auf der Trägerschicht deponiert wird und wenigstens eine Schicht aus einer geschmolzenen verarbeitbaren thermoplastischen Druckfarbe darauf deponiert wird, die eine Druckempfindlichkeit bei einer Temperatur aufweist, die unter der liegt, bei der die Druckfarbe warm verarbeitbar wird, dadurch gekennzeichnet, daß die geschmolzen verarbeitbare thermoplastische Druckfarbe aus einem geschmolzenen Zustand vor dem Deponieren auf der Abziehschicht wenigstens in einen teilweise verfestigten Zustand derart wärmeverarbeitet wird, daß die Druckfarbe über Druckfarbe unterschiedlicher Farbe ohne vorheriges Trocknen druckbar ist.

2. Verfahren nach Anspruch 1, dadurch gekennzeichnet, daß die Trägerschicht durch einen Film gebildet wird, der eine in Berührung mit der Abziehschicht befindlichen Oberfläche aufweist, die zu dieser derart undurchlässig ist, daß die Abziehschicht leicht von dieser abziehbar ist.

3. Verfahren nach Anspruch 2, dadurch gekennzeichnet, daß die Trägerschicht eine Metallfolie oder ein organischer Polymerfilm ist.

4. Verfahren nach einem der Ansprüche 1 bis 3, dadurch gekennzeichnet, daß die Abziehschicht ein wasserlöslicher Kleber oder eine Silikonbeschichtung ist, wahlweise mit einem Polyethylenkunstharz zwischen der Silikonbeschichtung und der Trägerschicht.

5. Verfahren nach Anspruch 1, dadurch gekennzeichnet, daß die Trägerschicht ein Papierblatt ist.

6. Verfahren nach Anspruch 5, dadurch gekennzeichnet, daß weiterhin eine Zwischensperrschicht zwischen dem Trägerwerkstoff und der Abziehschicht vorgesehen ist, wobei die Sperrschicht der Trägerschicht Undurchlässigkeit gegenüber der Abziehschicht in der Weise vermittelt, daß die Abziehschicht leicht von dieser abziehbar ist.

7. Verfahren nach Anspruch 6, dadurch gekennzeichnet, daß die Sperrschicht und die Abziehschicht aus wachsähnlichen Werkstoffen gebildet sind, wobei der Schmelzpunkt der erstgenannten höher als der der letztgenannten ist.

8. Verfahren nach einem der Ansprüche 1 bis 7, dadurch gekennzeichnet, daß die Abziehschicht ein wachsähnlicher Werkstoff ist, der einen niedrigeren Schmelzpunkt als der der thermoplastischen Druckfarbe besitzt.

9. Verfahren nach Anspruch 8, dadurch gekennzeichnet, daß die Abziehschicht aus einem Polyethylenglykolwachs mit einem Molekulargewicht zwischen 1000 und 6000 besteht.

10. Verfahren nach einem der Ansprüche 1 bis 9, dadurch gekennzeichnet, daß die thermoplastische Druckfarbe zwischen 50 und 80% eines verglasbaren anorganischen Werkstoffs oder Fließmittels enthält, der bzw. das mit einem thermoplastischen organischen Medium vermischt ist, welches zwischen 20 bis 50% Kohäsionsfestigkeit vermittelnde Polymere enthält, 0 bis 50% amorphe klebrig machende Kunstharze und 20 bis 50% Wachse, wobei die Druckfarbe einen Ring & Ball-Erweichungspunkt zwischen 50 und 95°C aufweist und eine 100 rpm Brookfield Thermocel Viskosität zwischen 50 und 1000 Poise bei 100°C besitzt.

11. Verfahren nach Anspruch 10, dadurch gekennzeichnet, daß die Kohäsionsfestigkeit vermittelnden Polymere aus Zelluloseäther, Zelluloseester, Ethylen-Ester-Copolymeren, Polyethylenen, Polyvinyl-Pyrrolidonen, Acryl- und Methacryl-Polymeren und -Copolymeren und Block-Copolymeren von Styrol mit Butadien oder Isopren ausgewählt sind.

12. Verfahren nach Anspruch 10 oder 11, dadurch gekennzeichnet, daß die amorphen klebrig machenden Kunstharze aus Terpentinharz und Terpentinharzderivaten, atactischen Polypropylen-

nen, Polyterpen-Kunsthharzen und aliphatischen Kohlenwasserstoffkunsthharzen ausgewählt sind.

13. Verfahren nach einem der Ansprüche 10 bis 12, dadurch gekennzeichnet, daß die Wachse aus Parafin und mikrokristallinen Mineralwachsen, Tier- und Pflanzenwachsen, Fettalkoholen und -Säuren, Fettsäureestern und Glycerinen, niedermolekulargewichtigen Polyethylenen, Polyoxalkylen-Estern, Polyoxalkylen-äthern, Oxazolinwachsen und hydrierten Ölen ausgewählt sind.

14. Verfahren nach einem der Ansprüche 1 bis 13, dadurch gekennzeichnet, daß eine dünne Schicht aus thermoplastischem Kunsthharz aus einer Lösung auf der Abziehschicht vor dem Aufbringen der warmverarbeitbaren Druckfarbe deponiert wird.

15. Verfahren zur Herstellung eines Abziehbildes gemäß Anspruch 1, dadurch gekennzeichnet, daß ein Vorrat der geschmolzen verarbeitbaren dauerplastischen Druckfarbe ausgewählt wird, daß der Vorrat der Druckfarbe auf einer erhöhten Temperatur oberhalb ihres Schmelzpunktes gehalten wird, daß der Vorrat der geschmolzenen thermoplastischen Druckfarbe auf eine Gravuroberfläche aufgebracht wird, um einen Abschnitt des Bildes aufzubauen, daß die Gravuroberfläche auf einer erhöhten Temperatur oberhalb des Schmelzpunktes der Druckfarbe gehalten wird, daß die Gravuroberfläche mit einer relativ leicht abgebenden Offset-Oberfläche in Berührung gebracht wird, daß der Abschnitt des Bildes von der ersteren auf die letztere übertragen wird, daß die Offset-Oberfläche mit dem Trägerwerkstoff zur Übertragung des Bildabschnitts von der ersteren auf das letztere in Berührung gebracht wird, daß die Temperatur der Offset Walze auf einem Pegel nahe oder unterhalb des Schmelzpunktes der Druckfarbe derart gehalten wird, daß sie wenigstens ein ausreichendes Haftvermögen für das bevorzugte Haftenbleiben der Druckfarbe an dem Trägerwerkstoff während des Inberührungbringens der Offset-Walze mit dem Trägerwerkstoff zeigt.

16. Vorrichtung zur Herstellung eines Abziehbildes, das aus aufeinanderfolgenden Schichten aus einem abziehbaren Trägerwerkstoff und einem Bild gebildet ist, gekennzeichnet durch einen Vorrat geschmolzener thermoplastischer Druckfarbe für jede Bildschicht, wenigstens eine erwärmte Applikationsoberfläche, die in Berührung mit der Druckfarbe bringbar ist und auf der eine ausgewählte Menge aufnehmbar und diese bei einer ausgewählten Temperatur haltbar ist, wenigstens eine relativ kühle flexographische Oberfläche, auf der einem Abschnitt des Bildes entsprechende Prägungen vorgesehen sind, wobei die flexographische Oberfläche auf Prägungen eine geeignete Menge der geschmolzenen Druckfarbe von der Applikatoroberfläche aufzunehmen vermag, woraufhin die Druckfarbe auf eine Temperatur abkühlt, bei der die Kohäsionsfestigkeit der Druckfarbe die Affinität für die flexographische Oberfläche übersteigt, wobei die flexographische Oberfläche weiterhin in Berührung mit dem Träger-

werkstoff zur Übertragung der teilweise verfestigten Druckfarbe auf diesen bringbar ist.

Revendications

1. Procédé de réalisation d'une décalcomanie dans lequel on prend une couche de soutien, on dépose une couche de détachement sur ladite couche de soutien, et on dépose par-dessus au moins une couche d'une encre thermoplastique apte à être traitée à l'état fondu qui présente de la sensibilité à la pression à une température inférieure à celle à laquelle cette encre devient apte à être traitée thermiquement, caractérisé en ce que l'encre thermoplastique apte à être traitée à l'état fondu subit, avant d'être déposée sur la couche de détachement, un traitement thermique qui la fait passer d'un état fondu à un état au moins partiellement solidifié, permettant ainsi à cette encre d'être imprimée par-dessus une encre d'une couleur différente sans séchage préalable.

2. Procédé selon la revendication 1, caractérisé en ce que la couche de soutien est constituée par une pellicule présentant une surface en contact avec la couche de détachement qui est impénétrable à celle-ci, en permettant ainsi à la couche de détachement d'en être facilement détachable.

3. Procédé selon la revendication 2, caractérisé en ce que la couche de soutien est une feuille métallique ou une pellicule de polymère organique.

4. Procédé selon l'une quelconque des revendications 1 à 3, caractérisé en ce que la couche de détachement est un revêtement d'adhésif soluble dans l'eau ou de silicone, facultativement avec une résine de polyéthylène entre le revêtement de silicone et la couche de renfort.

5. Procédé selon la revendication 1, caractérisé en ce que la couche de soutien est une feuille de papier.

6. Procédé selon la revendication 5, caractérisé en ce qu'il est prévu en outre une couche de barrage intermédiaire entre la matériau de soutien et la couche de détachement, ladite couche de barrage rendant la couche de soutien impénétrable à la couche de détachement en permettant ainsi à la couche de détachement d'en être facilement détachable.

7. Procédé selon la revendication 6, caractérisé en ce que les couches de barrage et de détachement sont formées de matériaux semblables à la cire, le point de fusion de la première étant supérieur à celui de la seconde.

8. Procédé selon l'une quelconque des revendications 1 à 7, caractérisé en ce que la couche de détachement est en un matériau semblable à cire présentant un point de fusion inférieur à celui de l'encre thermoplastique.

9. Procédé selon la revendication 8, caractérisé en ce que la couche de détachement est en une cire de polyéthylène-glycol à poids moléculaire compris entre 1000 et 6000.

10. Procédé selon l'une quelconque des reven-

dications 1 à 9, caractérisé en ce que l'encre thermoplastique contient entre 50 et 80% d'un matériau inorganique vitrifiable, ou glaçure, mélangé avec un milieu organique thermoplastique contenant entre 20 et 50% de polymères renforceurs de cohésion, 0 à 50% de résines adhésifiantes amorphes et 20 à 50% de cires, l'encre présentant un point de ramollissement bille-et-anneau compris entre 50 et 95% et une viscosité Brookfield Thermocel à 100 t/m compris entre 50 et 1000 poises à 100°C.

11. Procédé selon la revendication 10, caractérisé en ce que les polymères renforceurs de cohésion sont choisis parmi les éthers cellulosiques, les esters cellulosiques, les copolymères éthylène-ester, le polyéthylène, la polyvinylpyrrolidone, les polymères et copolymères acryliques et méthacryliques, et les copolymères séquencés du styrène avec le butadiène ou l'isoprène.

12. Procédé selon la revendication 10 ou la revendication 11, caractérisé en ce que les résines adhésifiantes amorphes sont choisies parmi la rosine et les dérivés de la rosine, le polypropylène atactique, les résines polyterpéniques et les résines d'hydrocarbures aliphatiques.

13. Procédé selon l'une quelconque des revendications 10 à 12, caractérisé en ce que les cires sont choisies parmi la paraffine et les cires minérales microcristallines, les cires animales et végétales, les alcools et acides gras, les esters et glycérides d'acides gras, le polyéthylène à bas poids moléculaire, les esters de polyoxyalkylènes, les éthers de polyoxyalkylènes, les cires d'oxazoline et les huiles hydrogénées.

14. Procédés selon l'une quelconque des revendications 1 à 13, caractérisé en ce qu'une couche mince de résine thermoplastique est déposée depuis une solution sur la couche de détachement avant le dépôt de l'encre apte à être traitée thermiquement.

15. Procédé de fabrication d'une décalcomanie selon la revendication 1, caractérisé en ce que l'on

choisit une charge de l'encre thermoplastique apte à être traitée à l'état fondu, on maintient cette charge d'encre à une température élevée au-dessus de son point de fusion, on dépose la charge d'encre thermoplastique fondue sur une surface à gravure afin d'établir une portion du dessin, on maintient ladite surface à gravure à une température élevée au-dessus du point de fusion de l'encre, on met en contact la surface à gravure avec une surface de report à transfert relativement facile, on transfère la portion du dessin de la première à la seconde, on met en contact la surface de report avec le matériau de soutien afin de transférer la portion du dessin de la première au second, la température du rouleau de report étant maintenue à une valeur voisine ou inférieure au point de fusion de l'encre pour qu'elle présente une adhérence au moins suffisante pour faire coller préférentiellement l'encre au matériau de soutien pendant que le rouleau de report est en contact avec le matériau de soutien.

16. Dispositif pour la réalisation d'une décalcomanie formée de couches successives d'un matériau de soutien détachable et de dessin, caractérisé en ce qu'il comprend: une charge d'encre thermoplastique fondu pour chaque de dessin, au moins une surface applicatrice chauffée adaptée à venir au contact de l'encre et à en recevoir une quantité sélectionnée et à maintenir celle-ci à une température sélectionnée, au moins une surface flexographique relativement froide portant des impressions correspondant à une portion du dessin, ladite surface flexographique étant adaptée à recevoir sur les impressions une quantité appropriée de ladite encre fondue fournie par la surface applicatrice, ladite encre y refroidissant jusqu'à une température à laquelle la force de cohésion de l'encre dépasse son affinité pour la surface flexographique, ladite surface étant en outre adaptée à venir en contact avec le matériau de soutien flexographique pour transférer à celui-ci l'encre partiellement solidifiée.

5

10

15

20

25

30

35

40

45

50

55

60

65

10

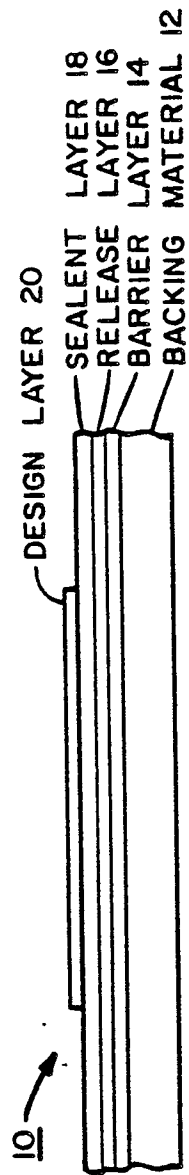


Fig. 1

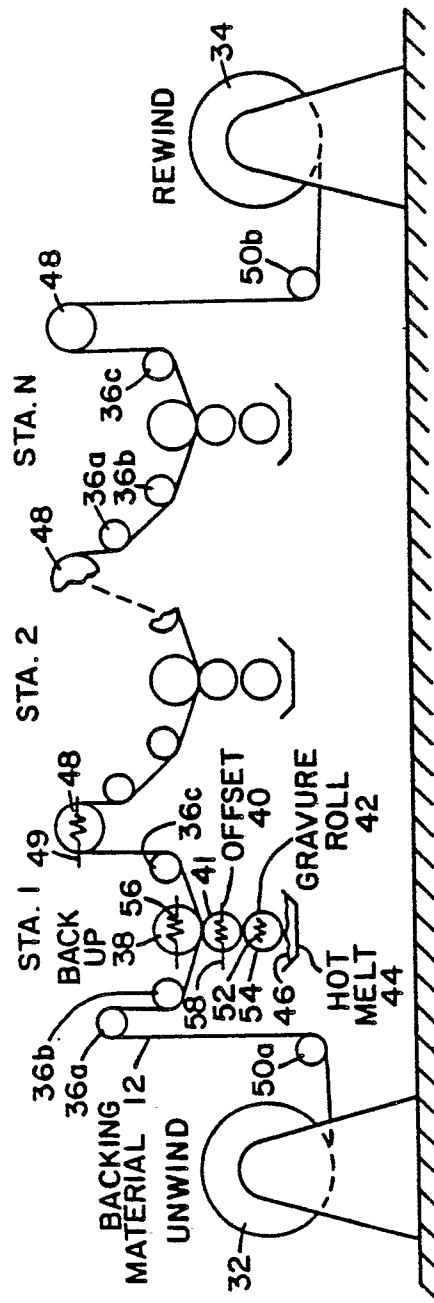


Fig. 2