



(51) International Patent Classification:

E05B 17/00 (2006.01) *B01F 7/04* (2006.01)
B01F 7/00 (2006.01) *B01F 15/00* (2006.01)
E05C 3/04 (2006.01)

(21) International Application Number:

PCT/EP2018/080221

(22) International Filing Date:

06 November 2018 (06.11.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

17201145.4 10 November 2017 (10.11.2017) EP

(71) Applicant: **TETRA LAVAL HOLDINGS & FINANCE S.A.** [CH/CH]; 70, Avenue Général-Guisan, CH-1009 PULLY (CH).

(72) Inventors: **LORRY, Florent**; 7 rue de la Biroterie, 49450 St André de la Marche (FR). **MALECOT, Blandine**; 14, rue des Marronniers, 49600 Beaupréau (FR).

(74) Agent: **TETRA PAK - PATENT ATTORNEYS SE**; AB Tetra Pak, Patent Department Ruben Rausing's gate, 22186 LUND (SE).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: FOOD HANDLING APPARATUS WITH LOCKING DEVICE

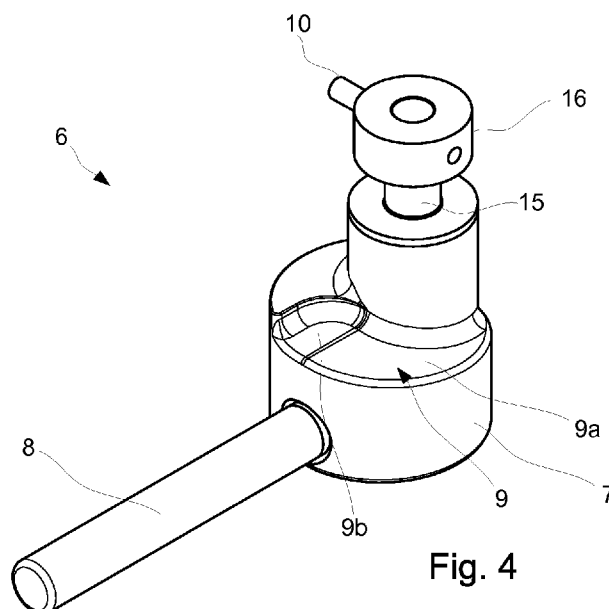


Fig. 4

(57) Abstract: A food handling apparatus (1) comprising a container (2), a door (3) for allowing access to the container (2), and at least one locking device (4) for sealing the door (3) against the container (2). The locking device (4) comprises a stationary sliding pin (5) and a rotational unit (6) arranged to receive the sliding pin (5), where the rotational unit (6) has a base portion (7) and a handle (8) for rotating the base portion (7) in relation to the sliding pin (5). The base portion (7) comprises an engagement surface (9) for slidable engagement with the sliding pin (5), and the engagement surface (9) is inclined such that a force applied on the sliding pin (5) by the engagement surface (9) gradually increases when the base portion (7) is rotated in relation to the sliding pin (5), to thereby press and seal the door (3) against the container (2).



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

FOOD HANDLING APPARATUS WITH LOCKING DEVICE

Technical Field

The invention relates to a food handling apparatus having locking devices for
5 sealing a door of the food handling apparatus.

Background

Food processing is a technology that sets high demands on process hygiene
and quality, and typically involves several complex activities such as emulsification,
10 pasteurization and mixing, all performed in large-scale food processing equipment.

Paddle mixers are used in food industry due to the combination of high sanitary
standards and the need for mixing or dispersing high quantities of e.g. powder and
liquid ingredients into a liquid medium to efficiently achieve a smooth, homogenous
product with consistent quality. Paddle mixers are large instruments and may be
15 equipped with twin shaft paddles.

However, food handling equipment, such as paddle mixers, used in large scale
food processing requires quick and safe dismounting of openings, often performed
manually, combined with a hygienic design.

Several techniques for providing good operability of food handling equipment in
20 terms of opening and closing large doors to containers exist on the market today.
However, there are issues with prior art solutions in that they are not fully ergonomic,
i.e. it may take a long time to open the door, the design may not fulfill all hygienic
standards and the seals used may be damaged due to uneven compression applied
when closing the door.

25

Summary

It is an object of the invention to at least partly overcome one or more limitations
of the prior art. In particular, it is an object to provide a food handling apparatus having
an ergonomic design for opening and closing the door that fulfills high hygienic
30 demands. In one aspect of the invention, this is achieved by a food handling apparatus
that comprises: a container; a door for allowing access to the container; and at least
one locking device for sealing the door against the container. The locking device
comprises a stationary sliding pin and a rotational unit arranged to receive the sliding
pin, wherein either the sliding pin or the rotational unit is arranged on the door whereas
35 the other is arranged on the container. The rotational unit comprises a base portion and

a handle for rotating the base portion in relation to the sliding pin, the base portion comprises an engagement for slidable engagement with the sliding pin, and the engagement surface is inclined such that a force applied on the sliding pin by the engagement surface gradually increases when the base portion is rotated in relation to the sliding pin, to thereby press and seal the door against the container.

The food handling apparatus is advantageous in that it provides an ergonomic solution for opening large, heavy doors without using any tool. The food handling apparatus may comprise several, such as at least five, locking devices of the same type for sealingly closing the door to the container. As an example, the design of the locking devices may provide for a single operator to quickly open a two meter wide door without the use of any tools. Furthermore, the locking device of the food handling apparatus may be designed with few or no threads within the container. This is advantageous since threads may wear down over time and be a source of contamination.

The engagement surface may have a curved shape as seen in the rotational plane of the base portion.

Furthermore, the engagement surface may comprise a first part having a first inclination and arranged where the sliding pin enters and slides into the engagement surface

The engagement surface may thus be inclined with respect to the rotational plane of the base portion. This facilitates an gradually increased force being applied on the sliding pin by the engagement surface when the base portion is rotated in relation to the sliding pin. With such a shape of the engagement surface, there may be an even pressure applied on a seal that may be used between door and container when the locking device is transferred from an open to a closed position.

The engagement surface may comprise a second part having a second inclination and arranged at an end of the engagement surface, after the first part as seen in a rotational direction of the base portion.

The second inclination may be opposite the first inclination, such that the force applied on the sliding pin by the engagement surface decreases when the sliding pin enters the second part, thereby providing a self-locking mechanism when the sliding pin has entered the second part.

The self-locking mechanism thus provides for the door being firmly in place once the locking device has been transferred to its closed position. Further, with the

self-locking mechanism, a certain threshold force is required on the handle when the locking device is in its closed position in order for the sliding pin to slide out of engagement with the engagement surface, i.e. for the locking device to be transferred back to its open position.

5 The sliding pin may comprise a plastic portion, e.g. comprising PEEK (polyether ether ketone) on which the force from the engagement surface is applied. Further, the engagement surface may comprise a metal, such as stainless steel.

 Using a plastic portion that slides on a stainless steel surface may give rise to a friction that is within a preferred interval, i.e. it may at the same time provide sliding of
10 the pin on the engagement surface and prevent the pin from accidentally sliding out of engagement with the engagement surface.

 The sliding pin may be of metal whereas the engagement surface, or at least part of the engagement surface, may comprise a plastic, such as PEEK, to provide a desired plastic-to-metal friction coefficient.

15 Still other objectives, features, aspects and advantages of the invention will appear from the following detailed description as well as from the drawings.

Drawings

 Embodiments of the invention will now be described, by way of example, with
20 reference to the accompanying schematic drawings.

 Fig. 1 is a perspective view of a food handling apparatus with locking devices.

 Fig. 2 is a perspective view of a locking device.

 Fig. 3 is a cross-sectional view of the locking device of Fig. 2.

 Fig. 4 is a perspective view of a rotational unit of the locking device of Fig. 2.

25 Fig. 5 is a side view of the rotational unit of Fig 4.

 Fig. 6 is another side view of the rotational unit of Fig 4.

 Fig. 7 is a top view of the rotational unit of Fig 4.

 Fig. 8 is a side view of a sliding pin of the locking device of Fig. 2.

 Fig. 9 is a top view of the sliding pin of Fig. 8.

30

Detailed Description

 Embodiments of the invention will now be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all, embodiments of

the invention are shown. The invention may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein.

With reference to Fig. 1 an exemplary food handling apparatus is illustrated. The food handling apparatus is in this embodiment a paddle mixer 1 having a container 2 and a large door 3 for accessing the container 2 via opening 19. The door 3 and the container 2 are thus arranged to be closable against each other. The paddle mixer further comprises twin paddles 21a, 21b for mixing large amounts of powdery material. The paddle mixer 1 comprises a plurality of locking devices 4 for sealing the door 3 against the container 2. In this case, the paddle mixer 1 comprises nine locking devices 4, more or less evenly distributed around the opening 19 to the container 2.

With further reference to Figs 2 and 3, each locking device 4 comprises a stationary sliding pin 5 and a rotational unit 6 for receiving the sliding pin 5 as the locking device 4 seals the door 3 to the container 2.

The sliding pins 5 are in this embodiment arranged on the door 3 and the rotational units 6 are arranged on the container 2. To be more specific, the rotational units are arranged on a flange 14 of the container 2 that surrounds the opening 19 of the container 2, whereas the sliding pins 5 are arranged on the outside surface of the door 3. The rotational units 6 locking devices 4 are arranged on the surface 14b of the flange that faces the door 3.

However, it is to be understood that the positioning of the rotational elements 6 and the sliding pins 5 could be the other way around, i.e. so that the rotational elements 6 are arranged on the door 3 and the sliding pins 5 are arranged on the container 3, for example on the flange 14.

Further, the paddle mixer 1 comprises a seal 12 that surrounds the opening 19 to the container 2 and provides a sealing function as the door 3 is pressed to the container 2 by the locking devices 4.

The rotational unit 6 of locking device 4 comprises a base portion 7 that is arranged on the container 2 via a bearing 22 arranged in the flange 14.

A handle 8 is welded to the base portion 7 and is used for rotating the base portion 7 in relation to the container 2 via the bearing 22.

The base portion 7 and bearing 22 are thus arranged so that the base portion 7 can rotate in a rotational plane parallel to the surface to which the base portion 7 is attached via the plain bearing, i.e. the outer surface 14b of flange 14.

In this way, the handle 8 allows for rotation of the base portion 7 relative to the sliding pin 5 around rotational axis A perpendicular to the outer surface 14b of the flange 14.

The locking device 4 may be transferred from an open position in which the door 3 is not sealed against the container 2 and the sliding pin 5 is not in engagement with an engagement surface 9 of the base portion 7, to a closed position in which the door 3 is sealed against the container 2 and the sliding pin 5 is subjected to a force from the engagement surface 9. Transfer between open and closed position is achieved by rotation of the handle 8 to make the sliding pin 5 enter and engage the engagement surface 9.

The sliding pin 5 is arranged on the door 3 close to the outer circumference of the door 3 so that it may be easily received by the rotational unit 6 upon rotation of the handle 8. The sliding pin 5 is held in place on the door 3 by pin housing 5a that surrounds a base of the sliding pin 5. The interaction between sliding pin 5 and the engagement surface 9 is further described in relation to Figs. 4-7. As may be seen, Fig. 3 illustrates the locking device 4 when it is in its closed position and the door 3 is firmly pressed against the container 2.

The locking device 4 comprises a stop pin 10 (see Fig. 2) that co-rotates with the base portion 7 upon rotation of the base portion 7. The locking device 4 also comprises a stationary plug 18 that is arranged to engage the stop pin 10 when the locking device 4 is in the open position, thereby preventing further rotation of the base portion 7.

Thus, the stop pin 10 and the stationary plug 18 provides an "open stop" function so that an operator opening the door 3 becomes aware of when the sliding pin 5 is not longer engaged by the engagement surface 9, i.e. when the locking device 4 has been transferred to its open position.

The open stop pin 10 is in this example arranged to extend in a direction other than the direction of the handle 8, such as a direction perpendicular to the handle 8. This may facilitate the function of the stop pin 10, e.g. by allowing the stop pin 10 to engage the stationary plug 18 arranged on the flange 19.

As best seen in Fig. 3, the stop pin 10 and the stationary plug 18 are arranged on a first side 14a of the flange 14 and the base portion 7 is arranged on a second side 14b of the flange 14 that is opposite the first side 14a. The door 3 may also be arranged on the second side 14b of the flange via suitable hinges. Thus, the first side

14a may be a side not facing the door 3, whereas second side 14b may be a side of the flange 14 that faces the door 14. Consequently, the handle 8 is arranged on the outside side 14b of the flange 14, i.e. on the same side of the flange 14 as the door 3.

5 The base portion 7 comprises a shaft 15 extending through the flange 14 for providing co-rotation of the stop pin 10 upon rotation of the base portion 7. The shaft 15 is connected to the base portion 7 and the bearing 22 is formed as a hole in the flange 14, at a position where the shaft 15 extends through the flange 14. This allows for rotation of the base portion 7 relative the flange 14 upon rotation of the handle 8 around rotational axis A extending through the shaft 15.

10 The shaft 15 is surrounded by plastic portions 16, 17 on both sides of the flange 14. These plastic portions 16,17 are arranged to engage the surfaces of the flange 14 upon rotation of the base portion 7.

The flange 14 may be made of metal, such as stainless steel, and the plastic portions 16, 17 may reduce the friction against the flange 14 upon rotation of the handle 8. The plastic portion 17 arranged to be on the same side of the flange 19 as the handle 8 is a plastic washer that may have friction reducing agents incorporated in its plastic composition. Further, the plastic portion 16 arranged to be on the same side of the flange 14 as the stop pin 10 may have the principal shape of a washer, also having friction reducing agents incorporated in its plastic composition.

20 The paddle mixer 1 further comprises a seal 12 that is arranged between the container 2 and the door 3 when the locking device 4 is in its closed position. The seal 12 is in this embodiment a lip seal that is pressed between door 3 and container 2 upon closing of the door 2. When the door 2 is closed a static seal that functions much like a gasket between two flanges is provided. The seal 12 may be made of silicone.

25 The seal 12 is arranged around the whole circumference of the opening 19 to the container 2 so that a proper seal is formed between the door 3 and the container 2. In this embodiment, the seal 12 rests against an outer surface 23 of the container 3 that is located between the second side 14b of the flange 14 and the opening 19 to the container. The seal 12 is held in place by a plurality of seal pins 13 having shoulders 20 that are pressed into the seal 12 to secure the position of the seal 12 when the door 3 is open.

The seal pins 13 may be arranged on the outer second surface 14b of the flange 14 so that the shoulders 14 are pressed into the seal 12, to thereby press the

seal 12 against the outer surface 23 of the container 2. The outer surface 23 is in this case perpendicular to the second side 14b of the flange 14.

The seal 12 may be a lip seal that comprises a base portion 12a and a lip portion 12b. The lip seal 12 may then be arranged such that the lip portion 12b seals
5 between the door 3 and the container 2, and the seal pins 13 are pressed into the base portion 12a of the lip seal.

As seen in the cross-section of the lip seal 12 in Fig. 3, the lip portion 12b may have a tip shaped cross-section, i.e. it may have a cross-section that becomes more and more narrow the further away from the base portion 12a it gets. This may facilitate
10 compression of the seal 12 when closing the door 3.

As discussed above, the locking device 4 comprises a stationary sliding pin 5 and a rotational unit 6 arranged to receive the sliding pin 5, and the rotational unit 6 comprises a base portion 7 and a handle 8 for rotating the base portion 7 in relation to the sliding pin 5. The base portion 7 further comprises an engagement surface 9 for
15 slidable engagement with the sliding pin 5, and this engagement with the sliding pin 5 transforms the locking device 4 from an open to a closed position.

With reference to Figs 4-7, the engagement surface 9 is located in the base portion 7, which may be rotated in a rotational plane by handle 8. This rotational plane is thus parallel to e.g. the second side of the flange 14b when the rotational unit is
20 arranged on the flange 14, or parallel to the door 3 if the rotational unit is arranged on the door. The rotational unit 6 may thus be rotated around rotational axis A that extends perpendicular to the handle 8 and through the shaft 15 of the base portion 7.

The engagement surface 9 is inclined such that a force applied on the sliding pin 5 by the engagement surface 9 gradually increases when the base portion 7 is
25 rotated in relation to the sliding pin 5, to thereby press and seal the door 3 against the container 2. Consequently, the engagement surface 9 is inclined with respect to the rotational plane of the base rotational unit 6. This inclination may at an average be in the order of 3,5 to 6,2 degrees to provide a suitable increase in the pressing force applied to the sliding pin 5 upon transferring the locking device 4 from its open to its
30 closed position.

The engagement surface 9 and the sliding pin 5 may further be arranged and/or dimensioned so that a predetermined frictional force is obtained between the sliding pin 5 and the engagement surface 9. The engagement surface 9 may comprise a concave shape as seen along the extension of the engagement surface 9. This may allow for a

suitable friction against e.g. a rounded sliding pin 5, i.e. a sliding pin 5 having a convex outer surface that slides and is pressed against a concave engagement surface 9.

The engagement surface 9 typically has a curved shape as seen in the rotational plane of the base portion 7. Thus, the engagement surface 9 is curved as
5 seen in the projection of the rotational plane of the handle 8. This is for allowing a smooth movement of the sliding pin 5 within the engagement surface 9 when the handle 8 is rotated.

As an example, the engagement surface 9 may comprise a part that has a partially helical shape that extends a certain number of degrees around the helical axis,
10 such as between 90 and 270 degrees. The engagement surface 9 may thus as a whole be partially helically shaped to extend a certain number of degrees around the helical axis, which in the illustrated embodiment is the rotational axis A.

The engagement surface 9 has in the illustrated embodiment a first part 9a having a first inclination α and arranged where the sliding pin 5 enters and slides into
15 the engagement surface 9. This first part has a partly helical shape with a helical axis that is aligned with the rotational axis A of the rotational unit 6. Thus, the first part 9a spirals around rotational axis A.

As seen relative a rotational plane of the base portion 7, the first inclination α has an angle of 3,5 to 6,2 degrees. The first inclination angle α allows for a suitable
20 increase in the pressing force applied to the sliding pin 5 as it enters and slides along the first part 9a of the engagement surface 9.

The engagement surface 9 has a second part 9b having a second inclination β and arranged at an end of the engagement surface 9, after the first part 9a as seen in the rotational direction R of the base portion 7.

25 The second part 9b is arranged about 135 degrees from the beginning of the first part 9a of the engagement surface 9, i.e. a sliding pin 5 will be pressed against the first part 9a of the engagement surface during a 135 degree turn of the handle 8 before entering the second part 9b having the second inclination β .

Furthermore, the second inclination β is opposite the first inclination α , such that
30 the force applied on the sliding pin 5 by the engagement surface 9 decreases when the sliding pin 5 enters the second part 9b, thereby providing a self-locking mechanism when the sliding pin 5 has entered the second part 9b. The second inclination β being "opposite" the first inclination may be understood as second inclination β having a

negative angular value while the first inclination α has a positive angular value (or the other way around).

This accomplish a self-locking mechanism when the locking device 4 is in its closed position. This is achieved due to the inclination of the engagement surface 9 changing direction at the end of the engagement surface 9, i.e. at the second part 9b of the engagement surface at which the sliding pin 5 resides when the locking device 4 is in its closed position. Since the second inclination β is in a direction that is opposite the direction of the first inclination α , a ridge 9c is formed between the first part 9a and the second part 9b. Thus, the sliding pin 5 first slides within the first part 9a upon engagement with the engagement surface 9, then slides over ridge 9c before entering the second part 9b when the locking device 4 is in its closed position and the door 3 is sealed to the container 2. Due to the opposite direction of the second inclination β , the force applied on the sliding pin 5 is decreased when it enters the second part 9b (the closed position). Rotational force is then required to transfer the locking device back to its open position again, i.e. to open the door, since the sliding pin 5 then first will be subjected to higher force in order to slide over the ridge 9c before sliding out of the engagement surface 9 via the first part 9a.

The absolute value of the second inclination β may be less than the absolute value of the first inclination α . As an example the first inclination α may have an angle of 3,5 to 6,2 degrees, and the second inclination β may have an angle of -2,2 to -4,8 degrees.

As further seen in Fig. 3, the sliding pin 5 is, as seen along the axis of rotation A of the base portion 7 and when the engagement surface 9 slidably engages the sliding pin 5, located between the base portion 7 and a support member 14 that supports the base portion 7. The support is accomplished by the base portion 7 being, either directly or indirectly via the shaft 15, connected to the support member 14. The support member 14 is in this embodiment the flange 14 that extends around the opening 19 to the container 2.

As understood from above, a distance D between the engagement surface 9 and the support member 14 gradually decreases when the sliding pin 5 slides along the first part 9a of the engagement surface 9 upon rotation of the base portion 7, to thereafter increase when the sliding pin 5 enters the second part 9b of the engagement surface 9. This provides the locking mechanism of the device 4.

Furthermore, as seen in the top view of Fig. 7, the rotational unit 6 comprises the shaft 15 that defines the axis of rotation A of the base portion 7, and the engagement surface 9 comprises a partially helical shape with an end portion 9b that is, as seen in a longitudinal direction of the handle 8, located between the shaft 15 and the handle 8. The axis of rotation A is thus perpendicular to the extension of the handle 8. Thus, the engagement surface 9 has its end portion 9b located at in the base portion 7 close to where the shaft 8 is welded to the base portion, and the engagement surface 9 has its start at least 90 degrees, as seen in the rotational direction R of the base portion 7, from its end portion 9b. Further, the base portion 7 is partly cylindrical and has a circular shape as seen in the rotational plane of the rotational unit 6, with a center line, illustrated by C in Fig. 7, parallel to the axis of rotation A but shifted relative the axis of rotation A. In this embodiment, the center C of the base portion 7 is shifted so that it is not aligned with rotational axis A but instead located between the shaft 15 and the position of the base portion 7 from where the handle 8 extends. This shift makes the rotational unit 6 more compact.

Figs 8 and 9 illustrates the sliding pin 5. The sliding pin 5 comprises a plastic portion 11 on which the force from the engagement surface 9 is applied. This plastic portion 11 is thus pressed by the engagement surface 9.

The base portion 7, as well as the engagement surface 9, the handle 8 and the shaft 15 of the rotational unit 6, may comprise a metal, such as stainless steel. The plastic portion 11 may thus be pressed against an engagement surface of metal, such as stainless steel, upon opening and closing of the locking device 4. The interface between the plastic portion and the stainless steel may provide a suitable friction coefficient upon rotation of the handle 8 and sliding of the sliding pin 5 against engagement surface 9.

As an example, the plastic portion 11 may comprises PEEK (polyether ether ketone). This polymer has for the described locking device 4 been found to provide suitable friction against the engagement surface 9.

Moreover, the plastic portion 11 may have a rounded outer surface, as seen in Figs 8 and 9. This may further facilitate the sliding motion against the engagement surface 9. The rounded surface may have a radius that is from 8 mm to 12 mm.

As mentioned, the locking device 4 is free of any threads but may still efficiently be transferred from an open position to a closed position. Being free of threads is

advantageous especially when it comes to handling powdery material, since the powder may be stuck on or between small surfaces of threads.

From the description above follows that, although various embodiments of the invention have been described and shown, the invention is not restricted thereto, but
5 may also be embodied in other ways within the scope of the subject-matter defined in the following claims.

CLAIMS

1. A food handling apparatus (1) comprising
a container (2),
5 a door (3) for allowing access to the container (2), and
at least one locking device (4) for sealing the door (3) against the container (2),
the locking device (4) comprising a stationary sliding pin (5) and a rotational unit (6)
arranged to receive the sliding pin (5), wherein either the sliding pin (5) or the rotational
unit (6) is arranged on the door (3) whereas the other is arranged on the container (2),
10 wherein
the rotational unit (6) comprises a base portion (7) and a handle (8) for rotating
the base portion (7) in relation to the sliding pin (5),
the base portion (7) comprises an engagement surface (9) for slidable
engagement with the sliding pin (5), and
15 the engagement surface (9) is inclined such that a force applied on the sliding
pin (5) by the engagement surface (9) gradually increases when the base portion (7) is
rotated in relation to the sliding pin (5), to thereby press and seal the door (3) against
the container (2).
- 20 2. A food handling apparatus (1) according to claim 1, wherein the engagement surface
(9) has a curved shape as seen in the rotational plane of the base portion (7).
3. A food handling apparatus (1) according to any previous claim, wherein the
engagement surface (9) comprises
25 a first part (9a) having a first inclination (α) and arranged where the sliding pin
(5) enters and slides into the engagement surface (9), and
a second part (9b) having a second inclination (β) and arranged at an end of the
engagement surface (9), after the first part (9a) as seen in a rotational direction (R) of
the base portion (7), wherein
30 the second inclination (β) is opposite the first inclination (α), such that the force
applied on the sliding pin (5) by the engagement surface (9) decreases when the
sliding pin (5) enters said second part (9b), thereby providing a self-locking mechanism
when the sliding pin (5) has entered the second part (9b).

4. A food handling apparatus (1) according to claim 3, wherein, as seen relative a rotational plane of the base portion (7),

the first inclination (α) has an angle of 3,5 to 6,2 degrees, and

the second inclination (β) has an angle of -2,2 to -4,8 degrees.

5

5. A food handling apparatus (1) according to any one of claims 2-4, wherein the sliding pin (5) is, as seen along an axis of rotation (A) of the base portion (7) and when the engagement surface (9) slidably engages the sliding pin (5), located between the base portion (7) and a support member (14) that supports the base portion (7), and

10

a distance (D) between the engagement surface (9) and the support member (14) gradually decreases when the sliding pin (5) slides along the first part (9a) of the engagement surface (9) upon rotation of the base portion (7), to thereafter increase when the sliding pin (5) enters the second part (9b) of the engagement surface (9).

15

6. A food handling apparatus (1) according to any one of claims 2-5, wherein the rotational unit (6) comprises a shaft (15) that defines an axis of rotation (A) of the base portion (7), and

20

the engagement surface (9) comprises a partially helical shape with an end portion (9b) that is, as seen in a longitudinal direction of the handle (8), located between the shaft (15) and the handle (8).

7. A food handling apparatus (1) according to any previous claim, wherein the locking device (4) comprises

25

a stop pin (10) that co-rotates with the base portion (7) upon rotation of the base portion (7), and

a stationary plug (18) that is arranged to engage the stop pin (10) when the locking device (4) is in the open position, thereby preventing further rotation of the base portion (7).

30

8. A food handling apparatus (1) according to any previous claim, wherein the sliding pin (5) comprises a plastic portion (11) on which the force from the engagement surface (9) is applied, and

the engagement surface (9) comprises a metal.

9. A food handling apparatus (1) according to claim 8, wherein the plastic portion (11) comprises PEEK (polyether ether ketone).

5 10. A food handling apparatus according to any previous claim, comprising
a seal (12) that is arranged between the container (2) and the door (3) when the
locking device (4) is in its closed position, and
a plurality of seal pins (13) having shoulders (20) that are pressed into the seal
(12) to secure the position of the seal (12) when the door (3) is open.

10

11. A food handling apparatus (1) according to claim 10, wherein
the seal (12) is a lip seal comprising a base portion (12a) and a lip portion (12b),
the lip seal is arranged such that the lip portion (12b) seals between the door (3)
and the container (2), and
15 the seal pins (13) are pressed into the base portion (12a) of the lip seal.

12. A food handling apparatus (1) according to any previous claim, wherein the sliding pin
(5) is arranged on the door (3) and the rotational unit (6) is arranged on the container
(2).

20

13. A food handling apparatus (1) according to claim 12, wherein
the container (2) comprises a flange (14) arranged around the opening (19),
and
the rotational unit (6) is arranged on the flange (14).

25

14. A food handling apparatus (1) according to claim 7 and 13, wherein
the stop pin (10) and the stationary plug (18) are arranged on a first side (14a)
of the flange (14),
the base portion (7) is arranged on a second side (14b) of the flange (14) that is
30 opposite said first side (14a), and
the base portion (7) comprises a shaft (15) extending through the flange (14) for
providing co-rotation of the stop pin (10) upon rotation of the base portion (7).

15. A food handling apparatus (1) according to claim 14, wherein the shaft (15) is surrounded by plastic portions (16, 17) on both sides of the flange (14), wherein the plastic portions (16,17) are arranged to engage the surfaces of the flange (14) upon rotation of the base portion (7).

1/4

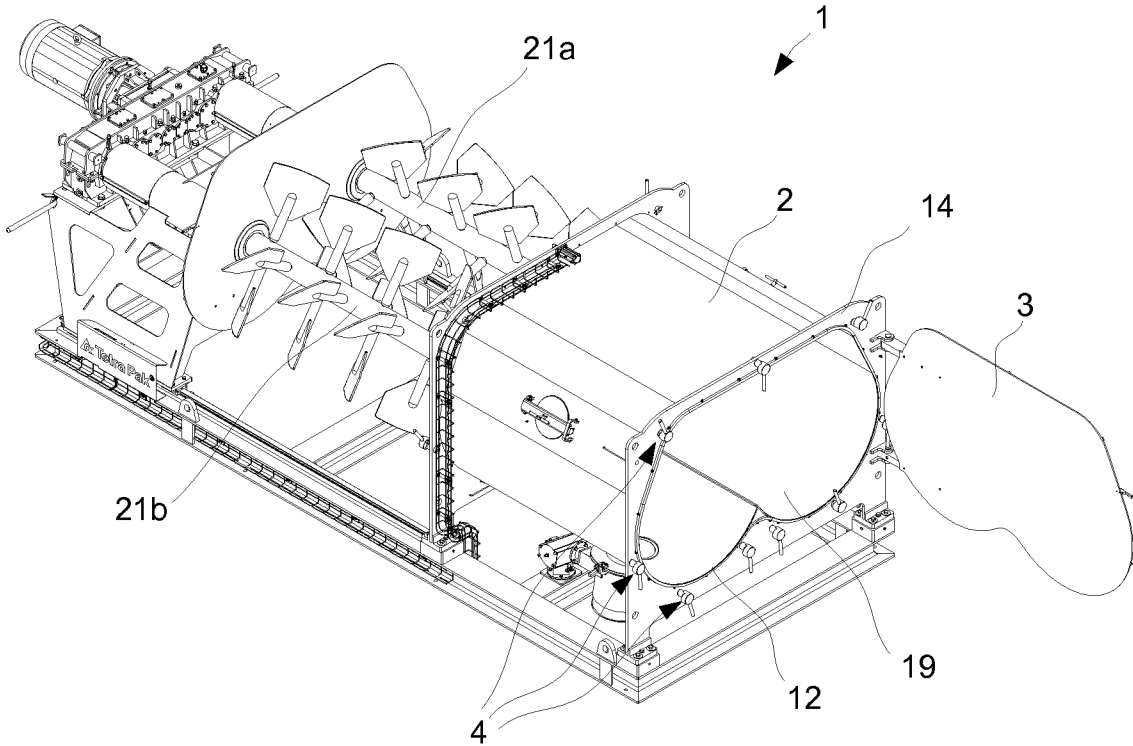


Fig. 1

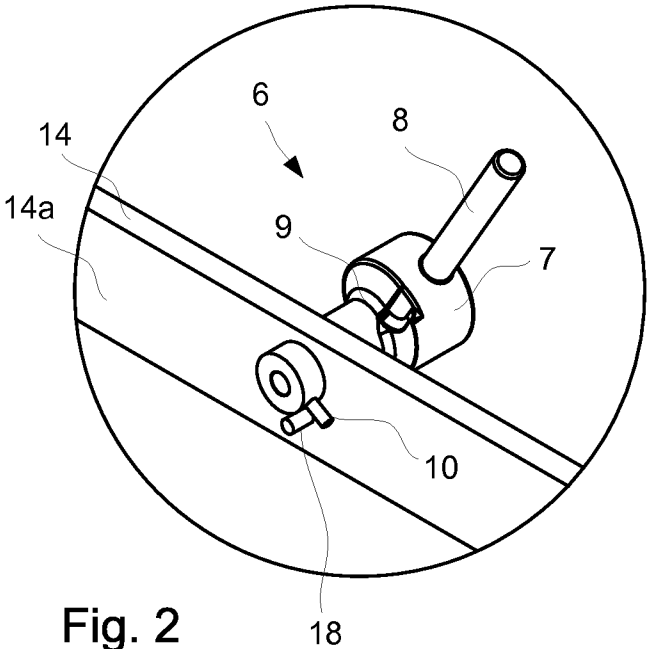


Fig. 2

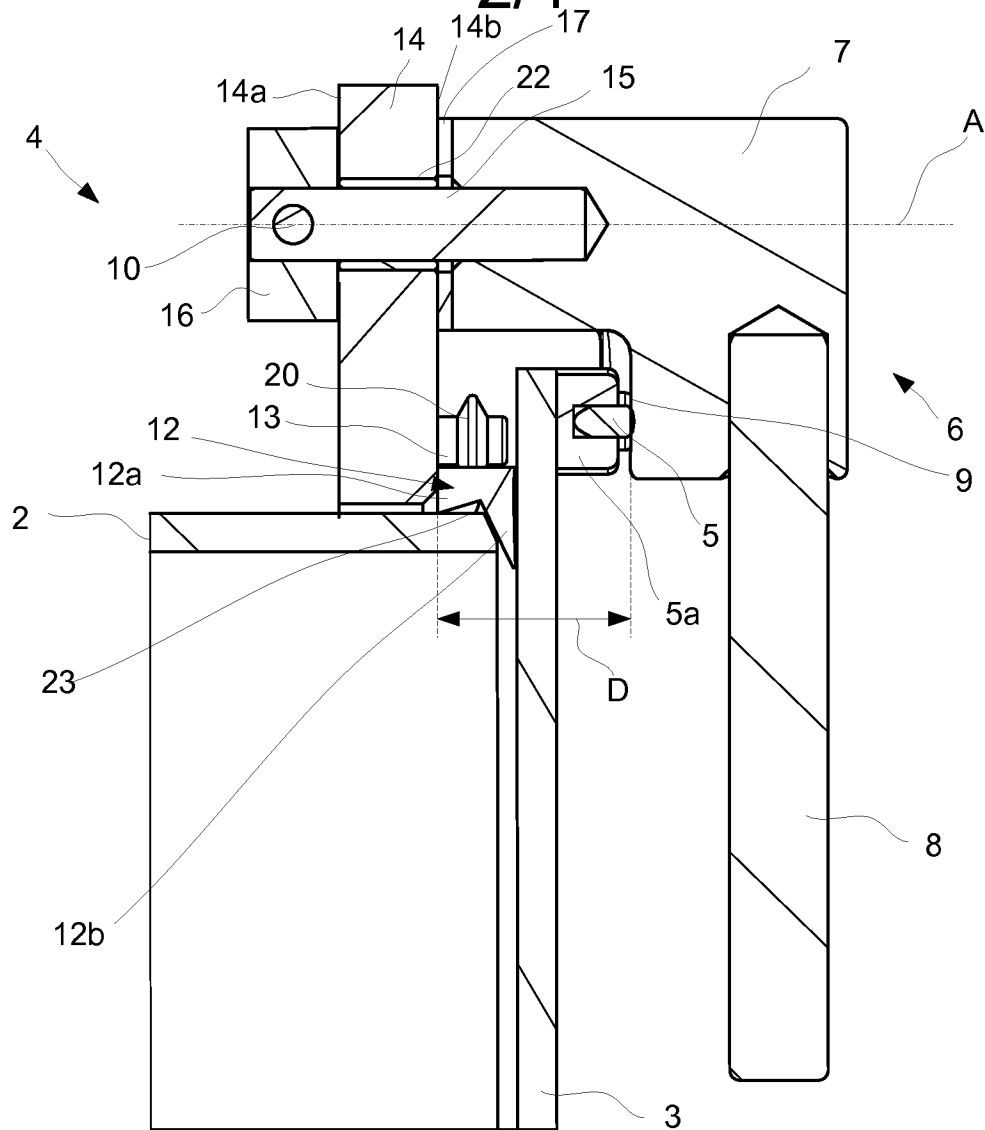


Fig. 3




Fig. 8








Fig. 9

3/4

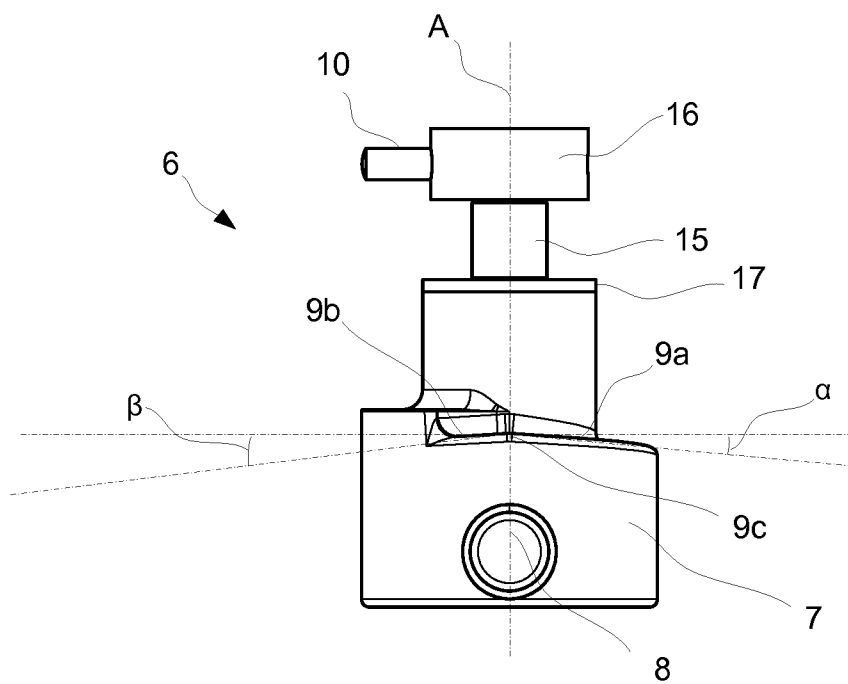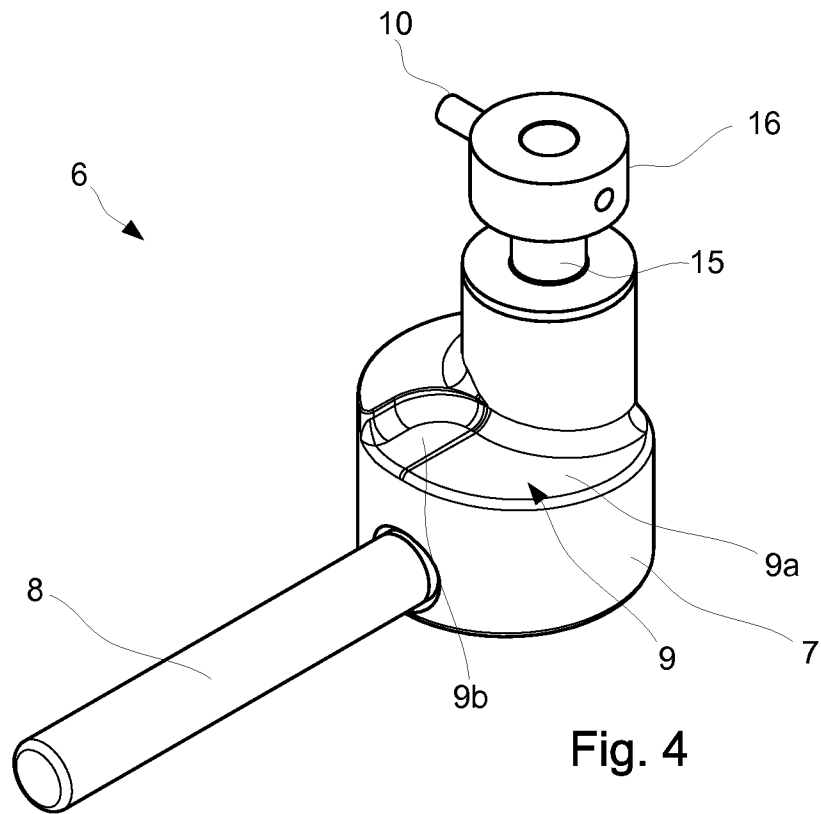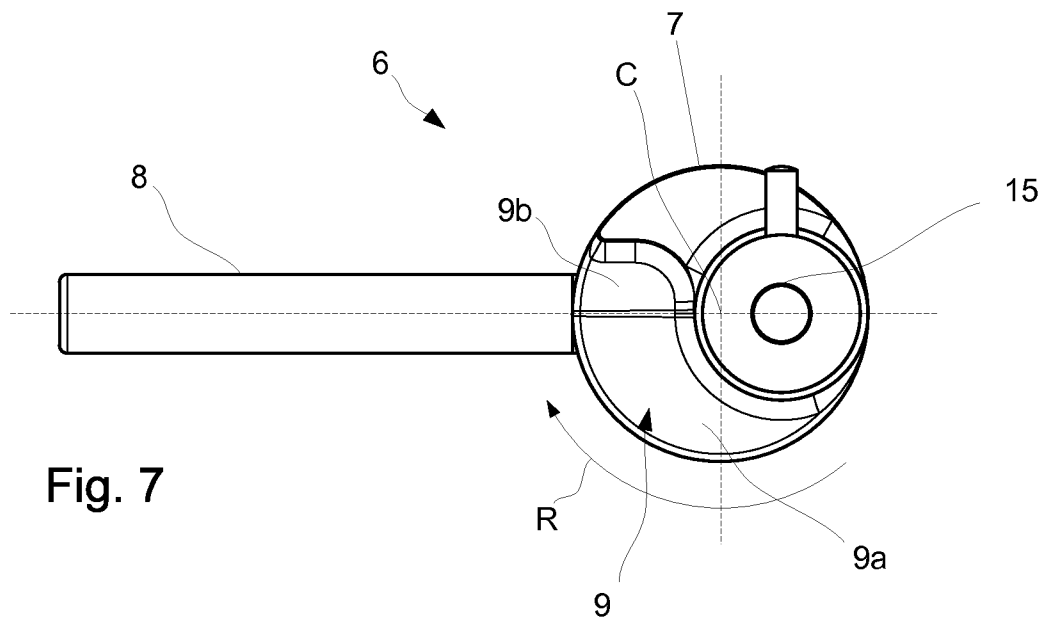

4/4

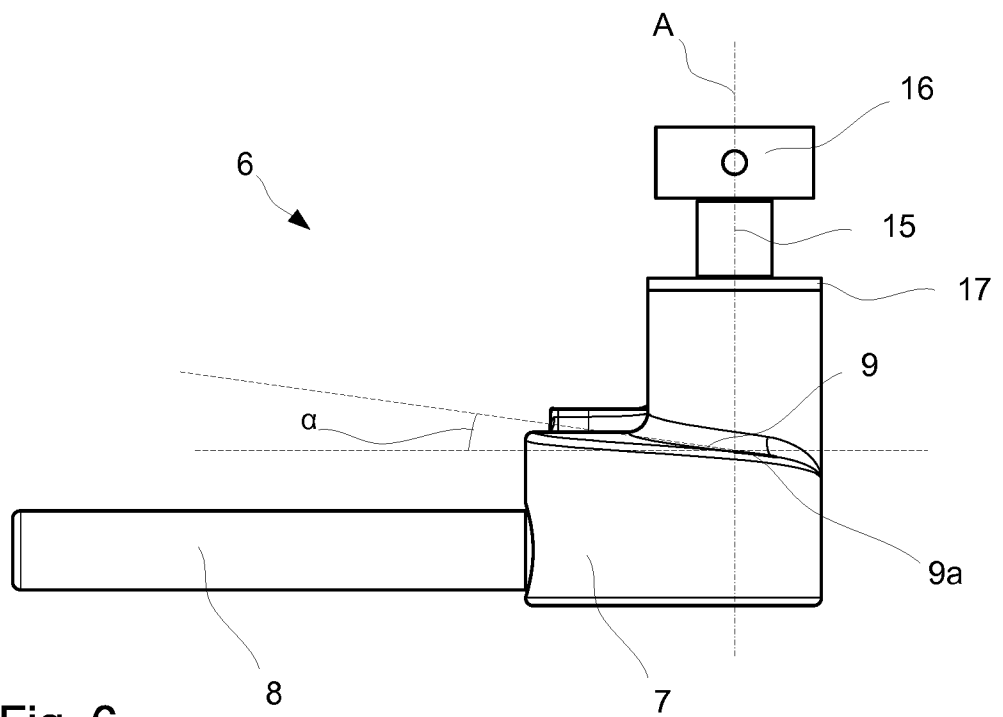

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2018/080221

A. CLASSIFICATION OF SUBJECT MATTER INV. E05B17/00 B01F7/00 E05C3/04 B01F7/04 B01F15/00 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) E05B B01F E05C		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 94 21 449 U1 (STEINBACH & VOLLMANN [DE]) 23 November 1995 (1995-11-23) the whole document -----	1-15
X	US 2006/220392 A1 (WATANABE YASUhide [JP] ET AL) 5 October 2006 (2006-10-05) the whole document -----	1-15
X	US 2017/284143 A1 (BERCHOWITZ DAVID M [US]) 5 October 2017 (2017-10-05) the whole document -----	1-3
X	US 2007/158956 A1 (WANG SHIH-MING [TW] ET AL) 12 July 2007 (2007-07-12) the whole document -----	1
X	WO 2016/033505 A1 (DEKA PRODUCTS LP [US]) 3 March 2016 (2016-03-03) the whole document -----	1
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 22 January 2019		Date of mailing of the international search report 28/01/2019
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Geerts, Arnold

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2018/080221

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 9421449	U1	23-11-1995	NONE	

US 2006220392	A1	05-10-2006	CN 1840996 A	04-10-2006
			JP 4104606 B2	18-06-2008
			JP 2006275447 A	12-10-2006
			US 2006220392 A1	05-10-2006

US 2017284143	A1	05-10-2017	CN 108779649 A	09-11-2018
			DE 112017001844 T5	27-12-2018
			GB 2564021 A	02-01-2019
			US 2017284143 A1	05-10-2017
			WO 2017176360 A1	12-10-2017

US 2007158956	A1	12-07-2007	TW I262977 B	01-10-2006
			US 2007158956 A1	12-07-2007

WO 2016033505	A1	03-03-2016	SG 11201701471X A	30-03-2017
			US 2016060915 A1	03-03-2016
			WO 2016033505 A1	03-03-2016
