

US010837217B2

(12) **United States Patent**
Cate et al.

(10) **Patent No.:** **US 10,837,217 B2**
(45) **Date of Patent:** ***Nov. 17, 2020**

(54) **MOVABLE BARRIER IMMINENT MOTION NOTIFICATION SYSTEM AND METHOD**

(56) **References Cited**

(71) Applicant: **The Chamberlain Group, Inc.**, Oak Brook, IL (US)
(72) Inventors: **Casparus Cate**, Chicago, IL (US); **James J. Fitzgibbon**, Batavia, IL (US)
(73) Assignee: **The Chamberlain Group, Inc.**, Oak Brook, IL (US)

U.S. PATENT DOCUMENTS

4,360,807 A 11/1982 Zettergren
4,464,651 A 8/1984 Duhamé
5,565,843 A 10/1996 Meyvis
6,025,785 A 2/2000 Farris
6,167,137 A 12/2000 Marino
(Continued)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

FOREIGN PATENT DOCUMENTS

CN 106951253 7/2017
WO 2019157149 8/2019

This patent is subject to a terminal disclaimer.

OTHER PUBLICATIONS

US 5,484,784 A1, 11/2002, Weik, III (withdrawn)
(Continued)

(21) Appl. No.: **16/257,045**

Primary Examiner — K. Wong

(22) Filed: **Jan. 24, 2019**

(74) *Attorney, Agent, or Firm* — Fitch Even Tabin & Flannery LLP

(65) **Prior Publication Data**

US 2020/0240198 A1 Jul. 30, 2020

(51) **Int. Cl.**

G07C 9/00 (2020.01)
E05F 15/77 (2015.01)
H04W 4/021 (2018.01)
H04W 4/80 (2018.01)

(52) **U.S. Cl.**

CPC **E05F 15/77** (2015.01); **G07C 9/00182** (2013.01); **H04W 4/022** (2013.01); **H04W 4/80** (2018.02); **E05Y 2400/664** (2013.01); **E05Y 2900/106** (2013.01); **G07C 2009/00928** (2013.01)


(57) **ABSTRACT**

A movable barrier operator system is provided that includes a moving-barrier imminent motion notification apparatus, a motor, a controller, and communication circuitry configured to communicate with a remote control. In response to the communication circuitry receiving a communication from the remote control, the controller causes the motor to change the state of the movable barrier and additionally operate the moving-barrier imminent motion notification apparatus upon a determination of the remote control being beyond a physical proximity of a location associated with the movable barrier operator system. Upon a determination that the remote control is within the physical proximity, the controller refrains from operation of the moving-barrier imminent motion notification apparatus.

(58) **Field of Classification Search**

None
See application file for complete search history.

28 Claims, 6 Drawing Sheets

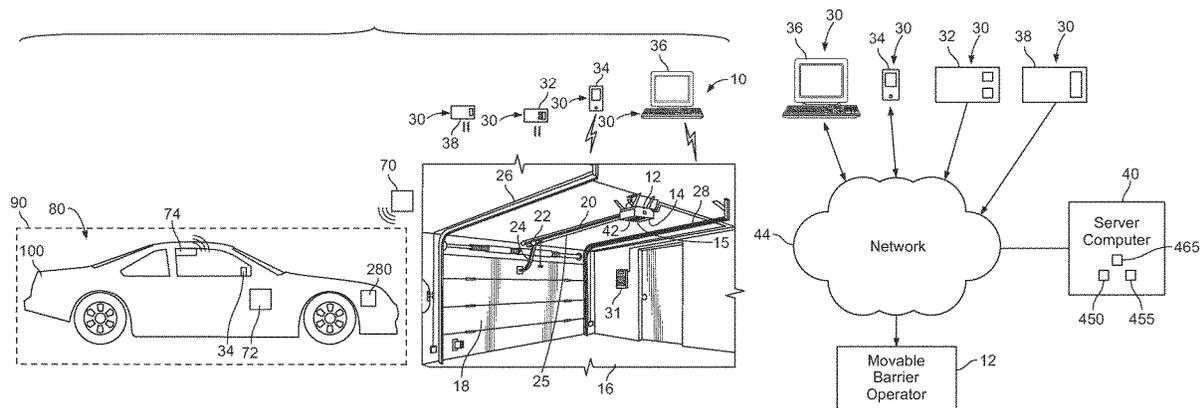

(56)

References Cited

U.S. PATENT DOCUMENTS

6,239,569	B1	5/2001	Fitzgibbon
6,271,765	B1	8/2001	King
6,278,249	B1	8/2001	Fitzgibbon
6,308,083	B2	10/2001	King
6,326,754	B1	12/2001	Mullet
6,615,132	B1	9/2003	Nagasaka
6,624,605	B1	9/2003	Powder
7,038,409	B1	5/2006	Mullet
7,088,265	B2	8/2006	Tsui
7,113,090	B1	9/2006	Saylor
7,205,892	B2	4/2007	Luebke
7,205,908	B2	4/2007	Tsui
7,315,143	B2	1/2008	Mullet
7,468,676	B2	12/2008	Styers
7,493,726	B2	2/2009	Fitzgibbon
7,602,283	B2	10/2009	John
7,710,284	B2	5/2010	Dzurko
7,869,582	B2	1/2011	Styers
8,040,217	B2	10/2011	Fitzgibbon
8,218,739	B2	7/2012	Styers
8,410,930	B2	4/2013	Karasek
8,587,404	B2	11/2013	Laird
9,141,099	B2*	9/2015	Cate E05F 15/70
9,756,233	B2*	9/2017	Lee H04N 5/23203
10,060,175	B1*	8/2018	Lickfelt E04H 6/02
10,358,859	B2*	7/2019	Lickfelt G01S 17/026
2003/0071590	A1	4/2003	Roman
2003/0140107	A1	7/2003	Rezvani
2004/0212498	A1	10/2004	Peterson
2005/0012631	A1	1/2005	Gregori
2005/0024230	A1	2/2005	Chuey

2005/0176400	A1	8/2005	Mullet
2005/0195066	A1	9/2005	Vandrunen
2006/0158339	A1	7/2006	Brundula
2007/0146118	A1	6/2007	Rodriguez
2013/0147600	A1	6/2013	Murray
2016/0010382	A1*	1/2016	Cate G05B 19/042 700/275
2016/0194912	A1*	7/2016	Fitzgibbon H04L 67/1097 340/5.61
2017/0241189	A1*	8/2017	Fitzgibbon G05B 15/00
2018/0245395	A1	8/2018	Huggins
2019/0085615	A1*	3/2019	Cate G05B 15/00
2019/0249481	A1	8/2019	Cate
2019/0392691	A1	12/2019	Cheng

OTHER PUBLICATIONS

U.S. Appl. No. 16/596,330, filed Oct. 8, 2019; 65 Pages.
 Canadian Patent Application No. 2,693,580; Office Action dated Mar. 24, 2015; 4 pages.
 The Genie Company, Instructions for Closed Confirm Remote Installation and Operation, publicly available before Jan. 24, 2019, 1 page.
 ULStandard for Safety for Door, Drapery, Gate, Louver, and Window Operators and Systems, UL 325 Fifth Edition, Dated Jun. 7, 2002; pp. 1-186.
 Wayback Machine archive of <https://geniecompany.com/garage-door-openers/accessories/closed-confirm-remote.aspx>, website publicly available as of Oct. 28, 2016, 3 pages.
 USPTO; U.S. Appl. No. 16/272,728; Office Action dated May 29, 2020, (pp. 1-30).

* cited by examiner

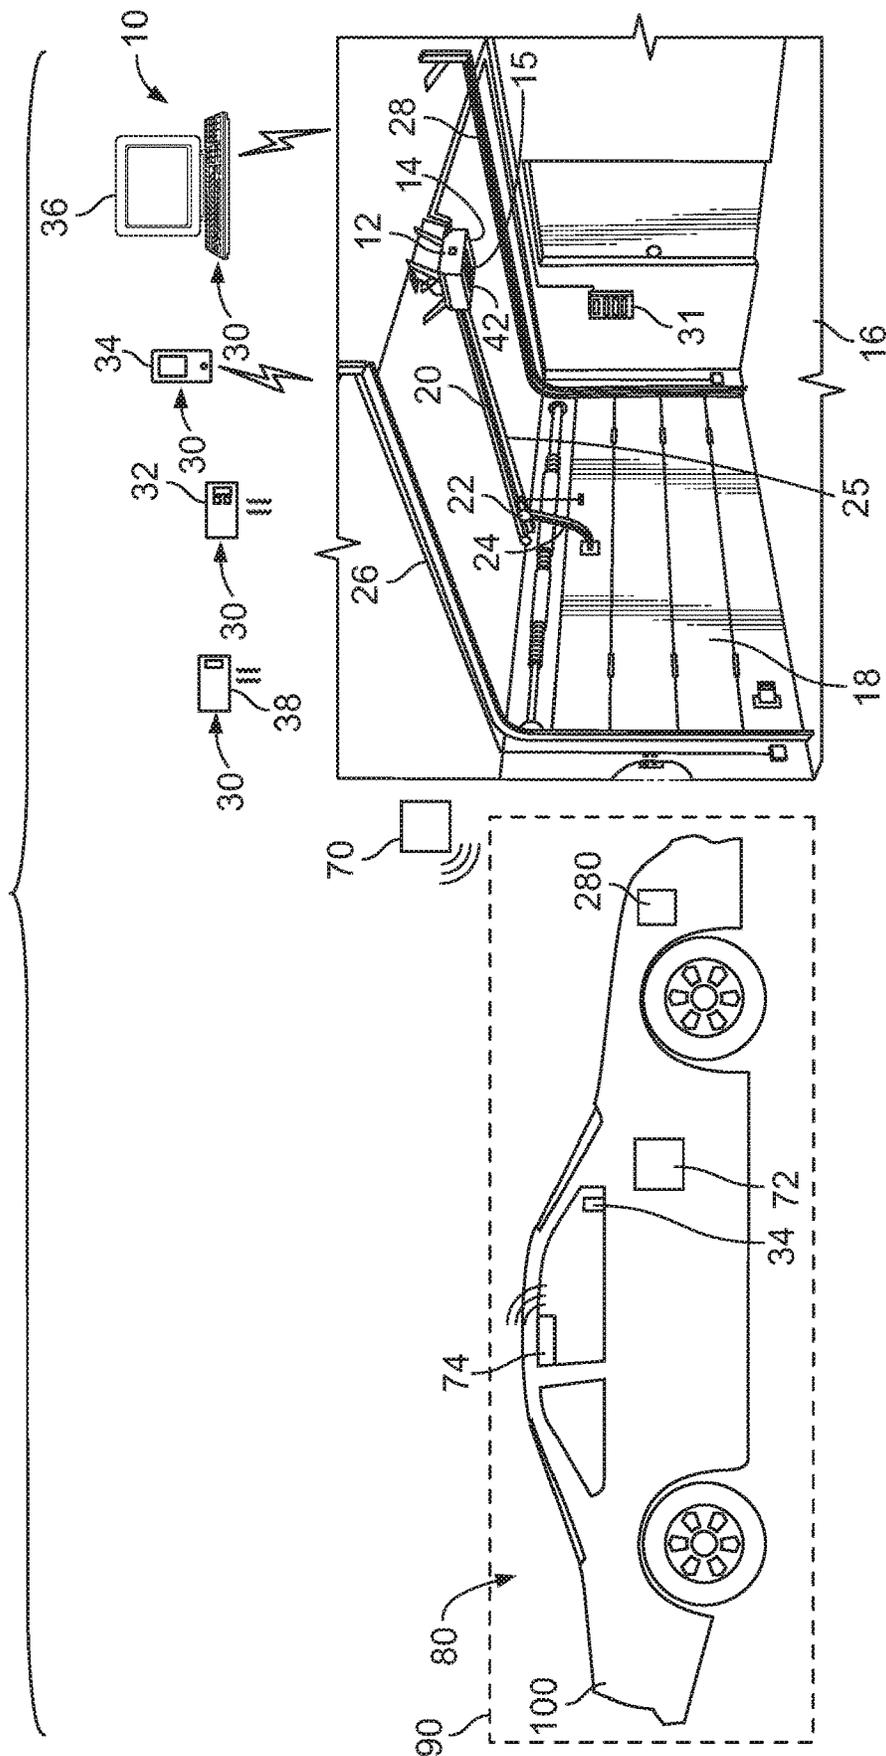


FIG. 1

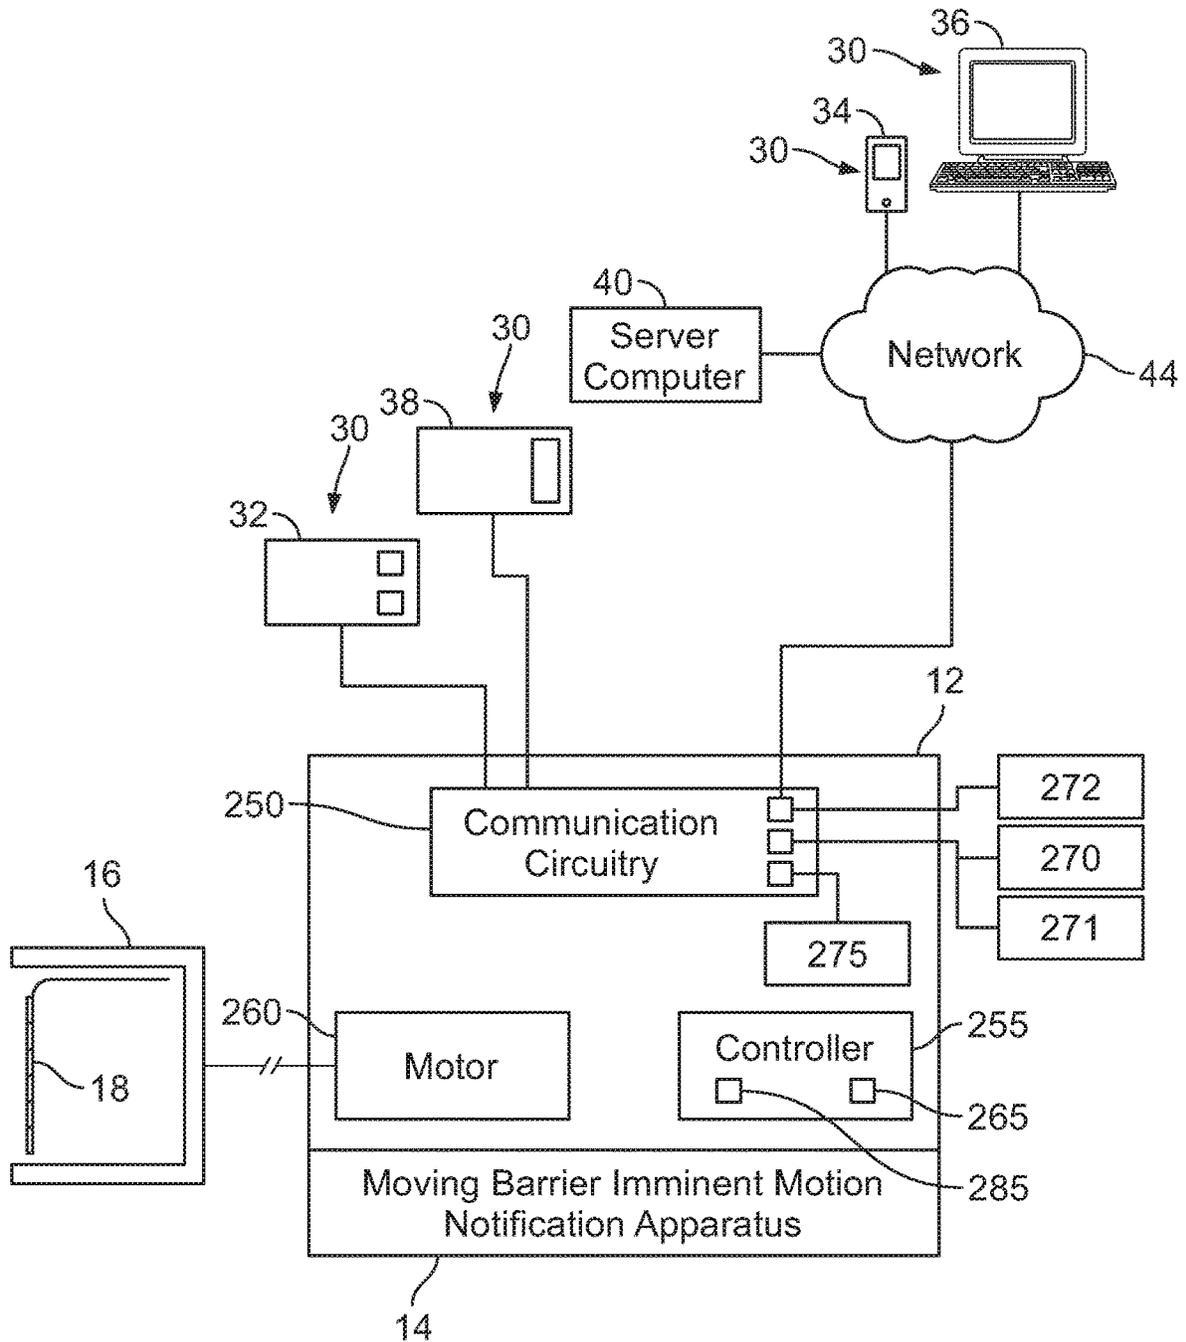


FIG. 2

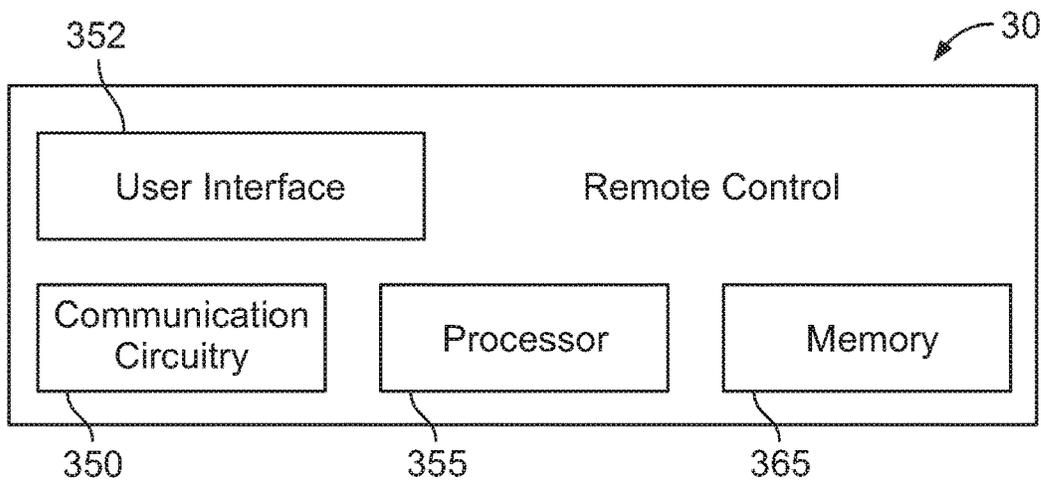


FIG. 3

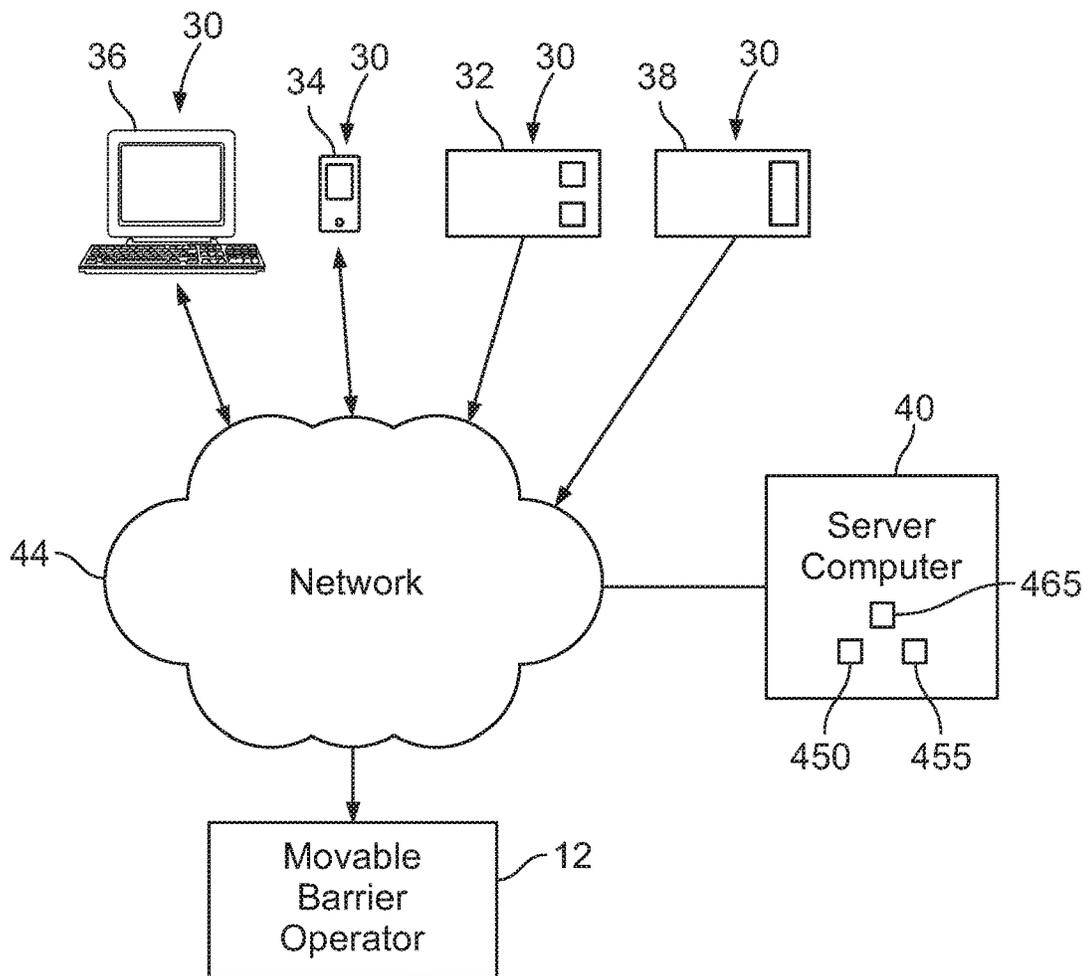


FIG. 4

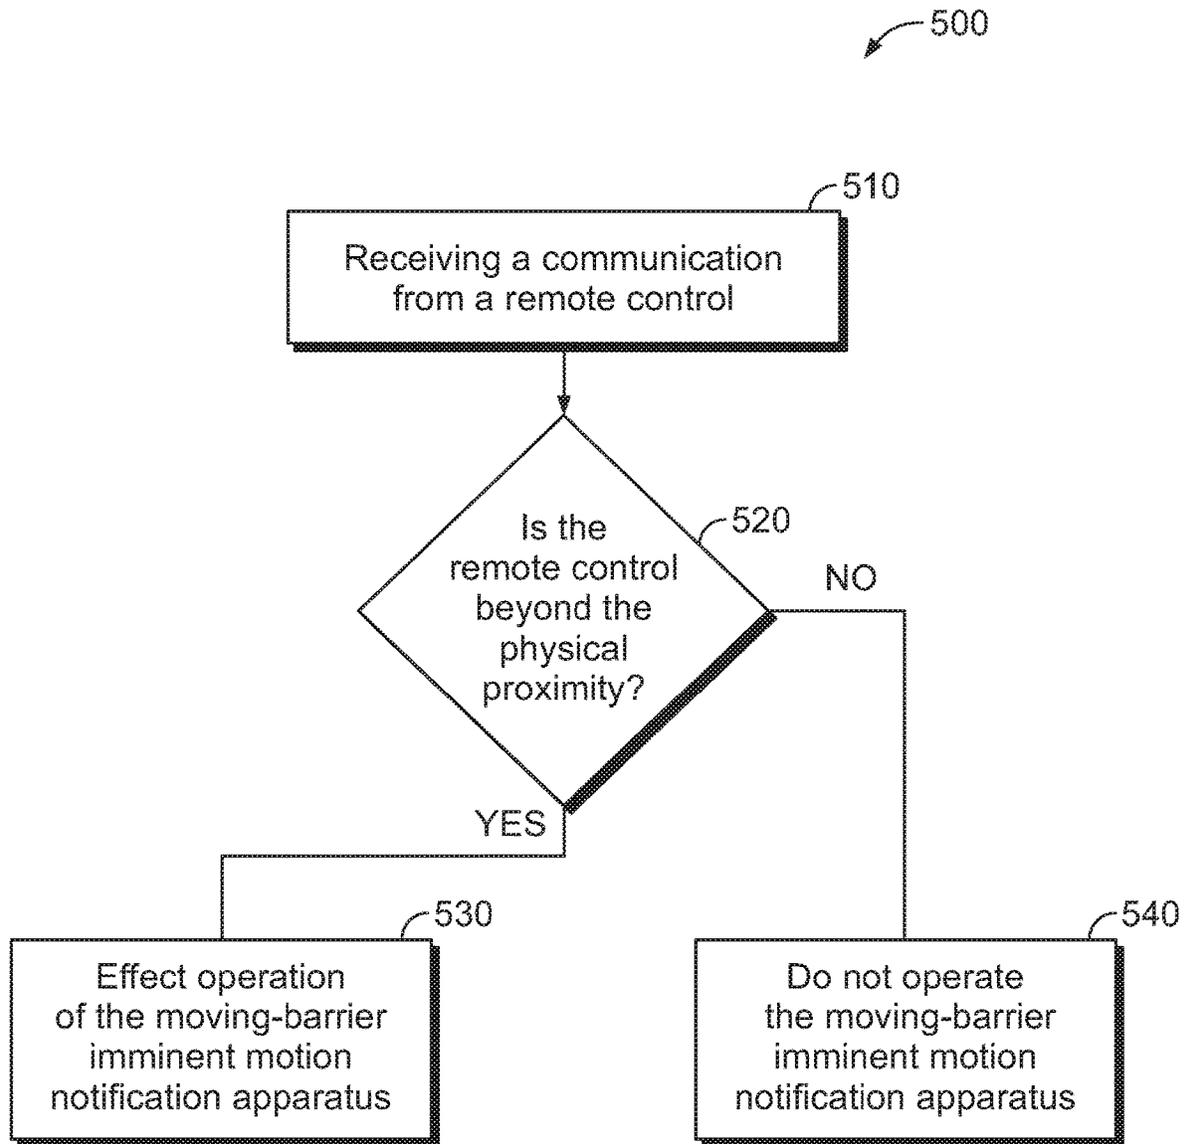


FIG. 5

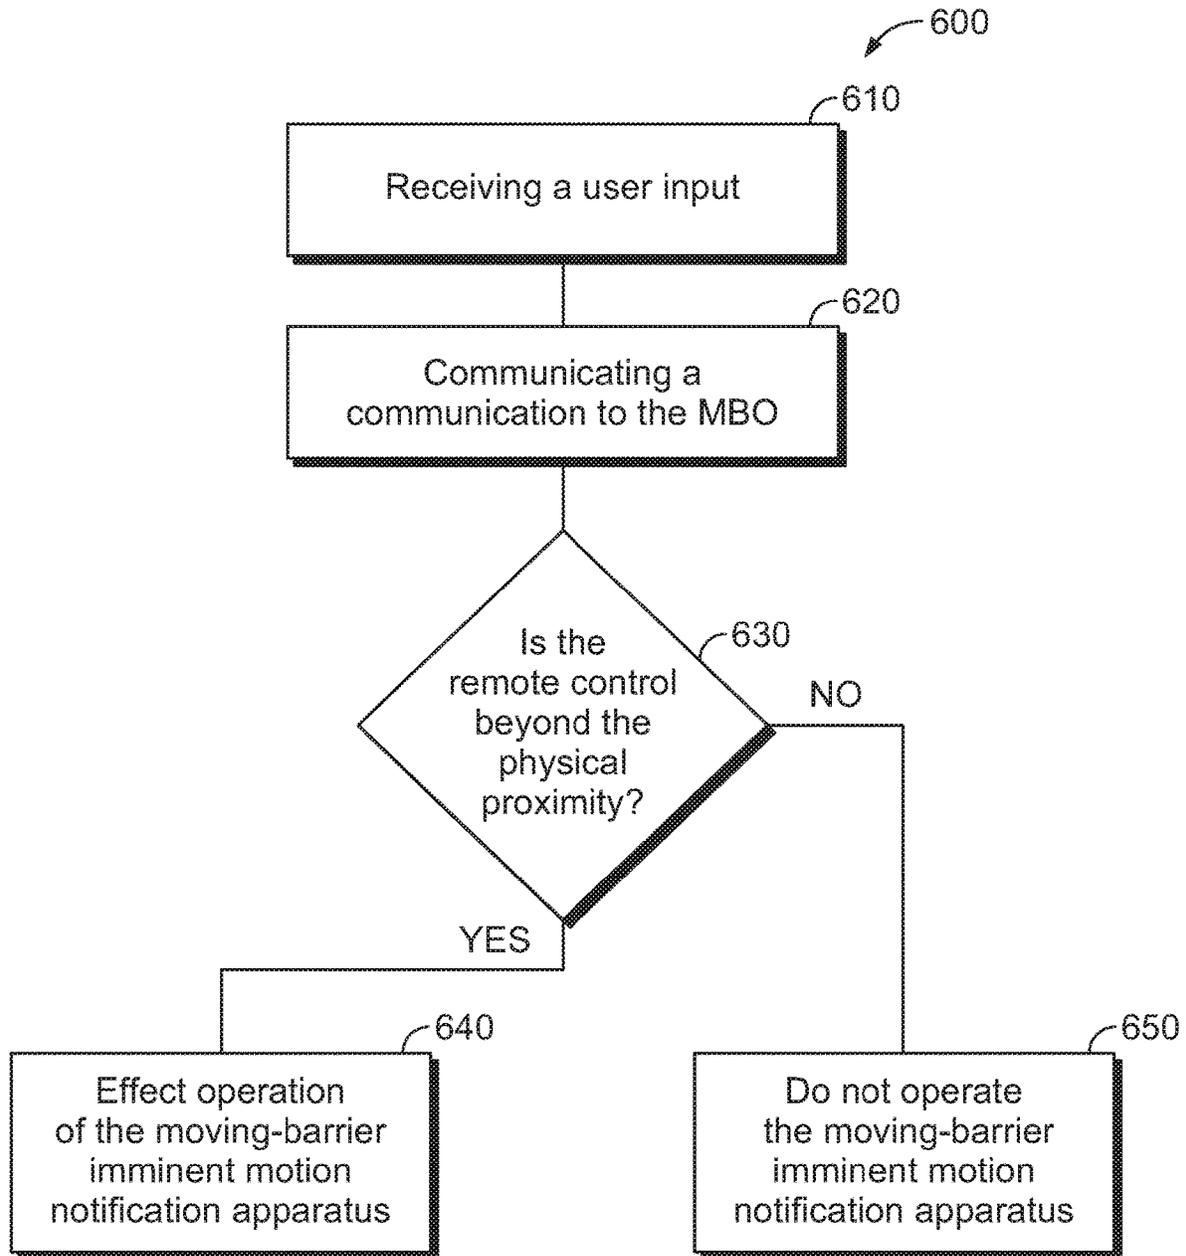


FIG. 6

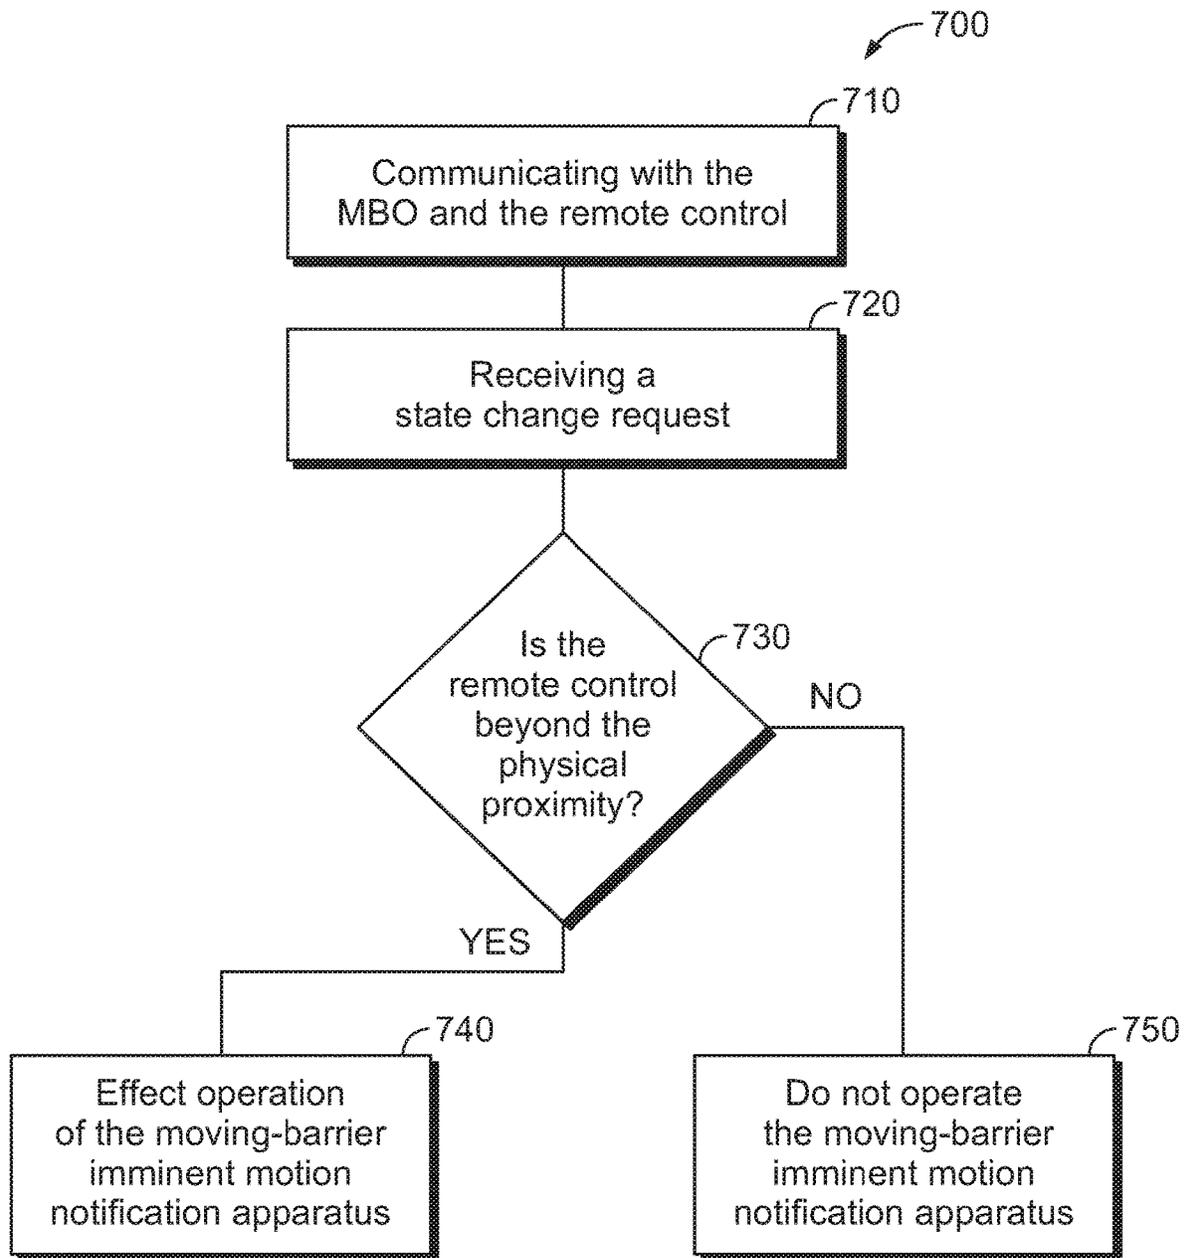


FIG. 7

1

**MOVABLE BARRIER IMMINENT MOTION
NOTIFICATION SYSTEM AND METHOD**

FIELD

This disclosure relates generally to a movable barrier operator and, more specifically, to a movable barrier operator system with a moving-barrier imminent motion notification apparatus.

BACKGROUND

Movable barrier operators for controlling various types of barriers such as garage doors, gates, and the like are well known in the art. Some users operate these movable barrier operators using a local remote control, such as a handheld transmitter, to send a command message to open or close a movable barrier. Movable barrier operators may also receive command messages from a remote server via the internet in response to a state change request from a remote device to allow for remote operation by a user. For example, a user may control a movable barrier operator through a website accessed by a computing device or via an application on a smartphone.

When a user operates a movable barrier operator using a remote device via a network, such as the internet, the operation is typically classified as an unattended operation. Given the potential distance between the user operating a movable barrier operator through a remote device and the movable barrier itself, the user may be unaware of any individuals or pets located near the movable barrier prior to an open or close operation. In such systems, an unattended operation initiated by a remote device is performed by outputting an imminent motion notification during a delay in operation, and movement of the movable barrier after expiration of the delay. The imminent motion notification may be at least one of a flashing light and a sound alert to warn nearby individuals that the movable barrier will open or close.

Additionally, if a user operates a movable barrier using a local transmitter, the operation is classified as an attended operation which does not require an imminent motion notification. Given the short radio range of a transmitter, an imminent motion notification is generally thought to be unnecessary because the user is likely in view of the movable barrier after actuating the transmitter.

However, such methods do not account for the possibility that a user may operate the movable barrier operator using a remote device via a network when the user is near the movable barrier. For example, a user may attempt to open or close a garage door using a smartphone while in a driveway, or inside the associated garage. In these situations, the movable barrier operator system would automatically classify the operation as an unattended close (because the command message was received via a network) such that one or more of delayed operation of the movable barrier operator, flashing a light, and generating a sound alert occur, which may result in frustration by or inconvenience to a user because the notification is not required.

Further, the radio range of local transmitters continues to increase due to advances in technology. As such, a user may potentially be able to operate a local transmitter from a distance that would ordinarily entail an imminent motion notification because the user may no longer be in view of the movable barrier. In this situation, the imminent motion notification apparatus would not operate simply because a local transmitter was used, which may surprise individuals

2

or pets near the movable barrier who are unaware that the movable barrier may soon close.

SUMMARY

In one aspect of the present disclosure, a movable barrier operator system is provided that includes a motor, communication circuitry configured to communicate with a remote control, and a controller operably coupled to the motor and the communication circuitry. Upon the communication circuitry receiving a communication from the remote control, the controller is configured to cause the motor to change a state of the movable barrier. The movable barrier operator system further includes a moving-barrier imminent motion notification apparatus operably coupled to the controller. The moving-barrier imminent motion notification apparatus is configured to output an alert in combination with the change of state of the movable barrier upon a determination of the remote control being beyond a physical proximity of a location associated with the movable barrier operator system. Upon a determination that the remote control is within the physical proximity, however, the controller refrains from operation of the moving-barrier imminent motion notification apparatus in combination with the change of state of the movable barrier.

In some embodiments, the proximity determination may be performed by the controller of the movable barrier operator system. As other examples, the proximity determination may be performed by a processor of the remote control or by a processor of a server computer associated with the movable barrier operator system and communicated to the communication circuitry of the movable barrier operator.

By performing a proximity determination prior to operation of the moving-barrier imminent motion notification apparatus, devices such as car visor-mounted transmitters may utilize an increased range of operation while still providing an imminent motion notification upon a determination that the remote control is beyond the physical proximity from the location associated with the movable barrier operator system. Additionally, if the remote control is determined to be within the physical proximity, then the moving-barrier imminent motion notification apparatus does not operate, and unnecessary imminent motion notifications can be minimized or prevented.

The proximity determination may be based on at least one or more of the following methods for obtaining proximity-related information of the remote control including, but not limited to, dead reckoning determinations, angle of arrival measurements, time of flight determinations, received signal strength indication (RSSI) thresholding, comparison of global navigation satellite system (GNSS) data such as global positioning satellite (GPS) data, analysis of data obtained via remote sensors, LiDAR scanning, or a combination thereof. In some embodiments, proximity-related data of the remote control may be obtained from multiple sources and combined using sensor fusion algorithms to increase the accuracy of the proximity determination.

In accordance with another aspect of the present disclosure, a remote control for a movable barrier operator system is provided. The remote control includes communication circuitry configured to send a communication to the movable barrier operator system to change a state of the movable barrier. The communication circuitry is also capable of receiving or transmitting a locating indicium for determination of whether the remote control is within or beyond a physical proximity of a location associated with the movable

barrier operator system. The remote control further includes a user interface configured to receive a user input that indicates a request to change the state of the movable barrier and a processor operatively coupled to the communication circuitry and the user interface. In response to a determination that the remote control is located beyond the physical proximity, the processor causes the communication circuitry to send the communication to the movable barrier operator system to change the state of the movable barrier. The processor is configured to inhibit operation of the moving-barrier imminent notification apparatus in combination with the change of state of the movable barrier upon a determination of the remote control being within the physical proximity. The processor is further configured to effectuate operation of the moving-barrier imminent motion notification apparatus in combination with the change of state of the movable barrier upon a determination of the remote control being beyond the physical proximity.

In yet another aspect of the present disclosure, a server computer for facilitating operation by a remote control of a movable barrier operator system is provided. The server computer communicates via a communication interface with both the movable barrier operator system and the remote control over a network, such as the internet, and can receive a state change request from the remote control to change the state of the movable barrier. A processor of the server computer is operatively coupled to the communication interface and is configured to cause the communication interface to communicate with the movable barrier operator system and cause a change of state of the movable barrier upon the communication interface receiving the state change request. The processor is further configured to cause the communication interface to communicate with the movable barrier operator system and inhibit operation of the moving-barrier imminent motion notification apparatus in combination with the change of state of the movable barrier operator upon a determination of the remote control being within a physical proximity of a location associated with the movable barrier operator system. Conversely, the processor is configured to cause the communication interface to communicate with the movable barrier operator system and effectuate operation of the moving-barrier imminent motion notification apparatus in combination with the change of state upon a determination of the remote control being beyond the physical proximity.

This disclosure likewise provides for a method of operating a movable barrier operator system having a moving-barrier imminent motion notification apparatus. The method includes receiving a communication from a remote control that causes the movable barrier operator system to change the state of a movable barrier. The method includes causing the moving-barrier imminent notification apparatus to output an alert in combination with the change of state of the movable barrier upon a determination of the remote control being beyond a physical proximity of a location associated with the movable barrier operator system. Further, upon a determination that the remote control is within the physical proximity, the method includes causing the moving-barrier imminent notification apparatus to refrain from outputting an alert in combination with the change of state of the movable barrier.

In another aspect, a method is provided of operating a movable barrier operator system using a remote control. The method includes receiving a user input at a user interface of the remote control, the user input requesting a change of state of a movable barrier of the movable barrier operator system. The remote control is configured, in response to the

user input, to output a communication to cause the movable barrier operator system to change a state of the movable barrier. The method includes communicating at least one locating indicium for determination or indication of whether the remote control is within or beyond a physical proximity of a location associated with the movable barrier operator system. The communication circuitry of the remote control sends a communication to the movable barrier operator system. The method includes effecting operation of the moving-barrier imminent motion notification apparatus in combination with the change of state of the movable barrier upon a determination of the remote control being beyond (e.g., relative to the at least one locating indicium) a physical proximity of the location associated with the movable barrier operator system. The method further includes inhibiting operation of the moving-barrier imminent motion notification apparatus in combination with the change of state of the movable barrier upon a determination of the remote control being within (e.g., relative to the at least one locating indicium) the physical proximity.

In accordance with yet another aspect of this disclosure, a non-transitory computer readable medium is provided having instructions stored thereon. When executed by a computer, the instructions cause the computer to perform operations including receiving a communication including a state change request from a remote control. The state change request is configured to cause a change of state of a movable barrier of a movable barrier operator system. The operations include effecting operation of a moving-barrier imminent notification apparatus in combination with the change of state of the movable barrier upon a determination of the remote control being beyond a physical proximity of a location associated with the movable barrier operator system. The operations further include inhibiting operation of the moving-barrier imminent motion notification apparatus in combination with the change of state of the movable barrier upon a determination that the remote control is within the physical proximity.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of an example movable barrier operator system in communication with various remote controls;

FIG. 2 is a block diagram of the movable barrier operator system of FIG. 1 showing a moving-barrier imminent motion notification apparatus of the movable barrier operator system;

FIG. 3 is a block diagram of one of the remote controls of FIG. 1;

FIG. 4 is a schematic view of an example server computer for facilitating operation of the movable barrier operator of FIG. 1;

FIG. 5 is a flow chart of an example method for operating a movable barrier operator system having a moving-barrier imminent motion notification apparatus;

FIG. 6 is a flow chart of an example method for operating, by a remote control, a movable barrier operator system having a moving-barrier imminent motion notification apparatus; and

FIG. 7 is a flow chart of an example method for operating, by a server computer, a movable barrier operator system having a moving-barrier imminent motion notification apparatus.

Elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. For example, the dimensions and/or relative positioning of some

of the elements in the figures may be exaggerated relative to other elements to help to improve understanding of various embodiments of the present teachings. Also, common but well-understood elements that are useful or necessary in a commercially feasible embodiment are often not depicted in order to facilitate a less obstructed view of these various embodiments of the present teachings. Certain actions and/or operations may be described or depicted in a particular order of occurrence while those skilled in the art will understand that such specificity with respect to sequence is not actually required. The terms and expressions used herein have the ordinary technical meaning as is accorded to such terms and expressions by persons skilled in the technical field as set forth above except where different specific meanings have otherwise been set forth herein. The word “or” when used herein shall be interpreted as having a disjunctive construction rather than a conjunctive construction unless otherwise specifically indicated.

DETAILED DESCRIPTION

Referring now to the drawings, FIG. 1 shows a movable barrier operator system 10 including a movable barrier operator 12 and a moving-barrier imminent motion notification apparatus 14. The movable barrier operator 12 is shown mounted to the ceiling of a garage 16 and controls the position of a movable barrier 18. The movable barrier operator 12 further includes a motor 260, communication circuitry 250, and a controller 255 (See FIG. 2). The movable barrier operator system 10 includes a rail 20 and trolley 22. The trolley 22 has an arm 24 that is connected to the movable barrier 18. A coupling 25 such as a belt or chain connects the trolley 22 to an output (e.g. drive shaft or transmission) of the motor 260. The movable barrier 18 is positioned for movement along a pair of door tracks 26, 28. In response to receiving a command message from a remote control 30, such as a handheld transmitter 32, the movable barrier operator 12 changes the state of the movable barrier 18. For example, the movable barrier operator 12 moves the movable barrier 18 from an open position to a closed position and vice versa.

The communication circuitry 250 of the movable barrier operator 12 is configured to communicate with one or more remote controls 30. The one or more remote controls 30 may include, for example, a wall-mounted keypad 31, a handheld transmitter 32, a mobile communication device 34 (such as a smartphone), a remote computer 36 (such as a desktop or laptop), or a vehicle integral (e.g., HomeLink®-style) transmitter 38, or a security system associated with the garage 16. The one or more remote controls 30 are configured to communicate directly or indirectly with the movable barrier operator 12 to effect a change of the state of the movable barrier 18. The remote controls 30 may send a communication that includes at least: an identifier portion to identify the remote control 30 sending the communication; and a rolling code portion that changes with each command message sent by the remote control 30. For example, the handheld transmitter 32 may send a communication that may be a radio frequency signal including a command message having an identifier portion and a rolling code portion.

The remote controls 30 may communicate directly with the movable barrier operator 12, such as with radio frequency signals. Alternatively or additionally, the remote controls 30 may communicate indirectly with the movable barrier operator 12 such as via a network 44 and a server computer 40 (see FIG. 2). The network 44 may include wired or wireless networks (or a combination thereof), for

example, the internet or a local area network. For example, the handheld transmitter 32 may communicate directly with the movable barrier operator 12 via radio frequency signals such that when the handheld transmitter 32 is out of range, the movable barrier operator 12 will not receive a communication from the handheld transmitter 32 and will not effect movement of the movable barrier 18. However, the mobile communication device 34, such as a smartphone, may instead communicate indirectly with the movable barrier operator 12 to effectively increase the range of operation. Specifically, the mobile communication device 34 communicates a state change request to the server computer 40 and the server computer 40 communicates a command message to the movable barrier operator 12 via the network 44. Similarly, a remote computer 36 or a security system 38 may communicate indirectly with the movable barrier operator 12 via the network 44 and the server computer 40.

Upon receiving the command message, the movable barrier operator 12 changes the state of the movable barrier 18. The movable barrier operator 12 may additionally be configured to communicate with one or more peripheral devices. For example, the communication circuitry 250 may include one or more antennae to facilitate communication with one or more remote sensors 70, a WiFi router or access point, and other devices, as will be discussed further hereinafter.

Regarding FIG. 1, the moving-barrier imminent motion notification apparatus 14 is integrated with the movable barrier operator 12 on the ceiling of the garage 16. The moving-barrier imminent motion notification apparatus 14 may alternatively or additionally be separate or distinct from the movable barrier operator 12 and located in other areas proximate the movable barrier 18, such as a wall of the garage 16 or on the ceiling of the garage 16.

The moving-barrier imminent motion notification apparatus 14 is configured to provide an imminent motion notification that typically includes a visual alert, a sound alert, a partial movement of the barrier, or a combination thereof, followed by or concurrent with delayed movement of the movable barrier 18. In one embodiment, the moving-barrier imminent motion notification apparatus 14 is configured to cause the controller 255 of the movable barrier operator 12 to use a timer to delay operation of the motor 260 for a short period of time, for example, five seconds or more before a change of state of the movable barrier 18. Additionally, the moving-barrier imminent motion notification apparatus 14 may include a speaker 15 for emitting an audible alert for a short period of time, for example, five seconds or more before a change of state of the movable barrier 18. For example, the audible alert may include a continuous high-pitched tone, an intermittent beeping, or the like, that may be heard by nearby individuals. The moving-barrier imminent motion notification apparatus 14 may provide a visual alert by causing the controller 255 to operate an overhead light 42 of the movable barrier operator 12. For example, the visual alert may include flashing or strobing the overhead light 42 for a short period of time, for example, five seconds or more before a change of state of the movable barrier 18. So configured, the moving-barrier imminent motion notification apparatus 14 provides an imminent motion notification to alert individuals near the movable barrier 18 prior to a change of state operation.

Regarding FIGS. 1 and 2, the movable barrier operator system 10 moves the movable barrier 18 with or without operation of the moving-barrier imminent motion notification apparatus 14 depending on whether a particular remote control of the remote controls 30 has been actuated and is

within a physical proximity of a location **80** associated with the movable barrier operator system **10**. In one embodiment, the location **80** may be a geofenced area **90** outside of the garage **16**. The user's home may have a driveway extending between the garage **16** and a street and the geofenced area **90** may be, for example, a portion of the street. FIG. **1** shows a vehicle **100** that is driving through the geofenced area **90** toward the garage **16**.

For example, the movable barrier operator system **10** includes communication circuitry **250** configured to receive a communication from a remote control **30** associated with the movable barrier operator system **10**. Upon the communication circuitry **250** receiving the communication, the controller **255** of the movable barrier operator **12** is configured to cause the motor **260** to effect movement of the movable barrier **18**. Upon a determination of the remote control **30** being beyond the physical proximity of the location **80** associated with the movable barrier operator system **10**, the controller **255** additionally operates the moving-barrier imminent motion notification apparatus **14**. However, upon the remote control **30** being determined to be located within the physical proximity of the location **80**, then the controller **255** will cause the motor **260** to operate the movable barrier **18** without effecting operation of the moving-barrier imminent motion notification apparatus **14**.

The controller **255** need not operate the moving-barrier imminent motion notification apparatus **14** upon the remote control **30** being within the physical proximity of the location **80** because the remote control **30** is substantially within a line of sight of the movable barrier **18** such that the operation is considered an attended operation. The movable barrier operator system **10** thereby makes a determination of whether to operate the moving-barrier imminent motion notification apparatus **14** based on the location of the remote control **30** rather than making the determination based solely on the type of remote control **30** (for example, whether the remote control is a local transmitter or a remote device). This avoids potential inconvenience or frustration of experiencing the delay, flashing light, and sound alarm of the moving-barrier imminent motion notification apparatus **14** when, for example, the user utilizes a mobile communication device **34** in a driveway of garage **16**.

As used herein, physical proximity refers to a geographic relationship between the remote control **30** and the location **80** associated with the movable barrier operator system **10** as discussed above. For example, physical proximity may refer to a threshold distance set by a user to be compared to an absolute measured distance between GPS coordinates of the remote control **30** and GPS coordinates of the location **80** associated with the movable barrier operator system **10** to determine whether to operate the moving-barrier imminent motion notification apparatus **14**. As one example in this regard, the location **80** may be the location of the garage **16**. Whether the remote control **30** is within the physical proximity of the location **80** is determined by comparing the absolute distance between the remote control **30** and the location **80** to a threshold distance. As another example, the location **80** may be defined as a bounded area (e.g., geofenced area **90**) associated with the movable barrier operator system **10**, and physical proximity may refer to the remote control **30** being located within the bounded area.

The proximity between the remote control **30** and movable barrier **18** may, in some cases, be represented by a route other than a direct path. For example, some routes that a user in a vehicle **100** with the remote control **30** may be required to take to arrive within a substantial line of sight of the movable barrier **18** may be lengthy or convoluted such as a

winding street, a one-way street, or a circuitous route in a gated community. In those instances, the remote control **30** may be determined to be within the absolute threshold distance of the location **80**, but the remote control **30** may still not be in a substantial line of sight of the movable barrier **18** such that an imminent barrier notification is still output in combination with a change of state operation. For example, if the location **80** is the location of the garage **16**, the remote control **30** may be located one street over from the movable barrier **18** in a dense subdivision and not be in a substantial line of sight of the movable barrier **18** even though the remote control **30** is relatively close to the garage **16**. To address this, whether the remote control **30** is within the physical proximity of the location **80** may be determined by first determining a distance the vehicle **100** carrying the remote control **30** would have to travel along one or more roads to arrive at the location **80**. This vehicle travel distance may be retrieved real-time from a navigation system of the vehicle **100** or the remote control **30** or, as another example, may be predicted based on the current location of the vehicle **100** or remote control **30** and a known vehicle travel distance between the current location and the location **80**. Next, the travel distance is compared to a threshold travel distance to determine whether the remote control **30** is within the physical proximity of the location **80**.

In some embodiments where location **80** is defined as a bounded area, the location of the remote control **30** may be determined at multiple intervals within location **80** to predictively determine whether the remote control **30** is moving nearer or farther away from the movable barrier **18**. If the determination indicates that the remote control **30** is moving towards the movable barrier **18**, operation of the moving-barrier imminent motion notification apparatus **14** may not be required. However, if the determination indicates that the remote control **30** is moving away from the movable barrier **18**, even if the remote control **30** is still within the area, operation of the moving-barrier imminent motion notification apparatus **14** may nevertheless be required. For example, the GPS coordinates of the remote control **30**, as the remote control **30** enters the bounds of the location **80**, may be used to determine a direction of travel of the vehicle **100** including the remote control **30**.

A user may define the geofenced area **90** using, for example, the remote computer **36**. The geofenced area **90** may be defined as a driveway associated with the garage **16**, the street address of a house including the garage **16**, or the boundaries of the garage **16** itself, among others. The location **80** may alternatively be defined as a set of latitude and longitude coordinates. For example, if the remote control **30** includes an in-vehicle human machine interface (such as infotainment system **72**) connected to a universal transmitter, the human-machine interface may prompt a driver to press a virtual button during setup to allow the global positioning satellite (GPS) system of the vehicle **100** to identify the location of the garage **16** or driveway associated therewith. The GPS location may then be saved in a memory of the human-machine interface for subsequent operation and may be communicated to the movable barrier operator **12** or server computer **40**.

By way of example, in a densely packed urban area, the bounds of the geofenced area **90** may be defined by the user as the street on which garage **16** is located. This would effectively preclude operation of the movable barrier **18** by the remote control **30** without operation of the moving-barrier imminent motion notification apparatus **14** from locations where the remote control **30** may be within an absolute threshold distance from the movable barrier **18**, but

may not have a substantial line of sight of the movable barrier **18** (for example, one street over from the garage **16** or a nearby alleyway). In this embodiment, physical proximity refers to whether the GPS coordinates of the remote control **30** indicate that the remote control **30** is within the bounds of the geofenced area **90** as defined by a user.

In some embodiments, the determination of whether the remote control **30** is within the physical proximity of the location **80** associated with the movable barrier operator system **10** may be made by the controller **255** of the movable barrier operator **12**. The controller **255** may include a memory **265** that comprises a non-transitory computer-readable medium. The controller **255** may also include a processor **285** operably coupled to the memory **265** and configured to execute computer-readable instructions stored in the memory **265**.

The controller **255** may be configured to determine whether the remote control **30** is within the physical proximity of the location **80** based at least in part on data obtained by any technique for obtaining proximity-related information of the remote control **30** including, but not limited to, dead reckoning determinations, angle of arrival measurements, time of flight measurements, received signal strength indication (RSSI) thresholding, comparison of global navigation satellite system (GNSS) data such as GPS data, analysis of data obtained from one or more remote sensors **70**, LiDAR scanning, LORAN or a combination thereof. Alternatively, the communication circuitry **250** may receive data representative of a proximity determination already made by another device such as, for example, a processor **355** (See FIG. 3) of the remote control **30** or a processor **455** (See FIG. 4) of the server computer **40**.

For example, the controller **255** may determine whether the remote control **30** is located within or beyond the physical proximity of the location **80** through RSSI thresholding. The signal strength of a radio frequency communication from the remote control **30** will decrease as the distance between the remote control **30** and location **80** increases. In this embodiment, the controller **255** of the movable barrier operator **12** may include the memory **265** for storing a threshold signal strength corresponding with a physical distance between the remote control **30** and the location **80** wherein an imminent motion notification would typically be output. Upon the communication circuitry **250** receiving a radio frequency communication from a remote control **30**, the controller **255** is configured to retrieve the threshold signal strength from the memory **265** and compare the received signal strength of the communication with the threshold signal strength. Upon the comparison indicating that the received signal strength of the communication is below the threshold, the remote control **30** is determined to be beyond the physical proximity, and the controller **255** will effect operation of the moving-barrier imminent motion notification apparatus **14** in combination with a change of state of the movable barrier **18**. Conversely, when the received signal strength is above the threshold, the controller **255** will not effect operation of the moving-barrier imminent motion notification apparatus **14**, and will instead operate the movable barrier **18** without an imminent motion notification.

In embodiments where the proximity determination is calculated by an angle of arrival of the communication from the remote control **30**, at least two sensors **270**, **271** having antennae may be associated with the movable barrier operator system **10**. Upon the remote control **30** communicating the command message to the communication circuitry **250** of the movable barrier operator **12**, the controller **255** is

configured to determine a direction and distance of the remote control **30** relative to the sensors **270**, **271** based at least in part on the time of arrival of the command message at each individual sensor **270**, **271**. The direction and the distance determined using the angle of arrival sensors **270**, **271** may then be used either alone or in combination with other proximity-related information by the controller **255** to perform the proximity determination and determine whether the remote control **30** is located within or beyond the physical proximity of the location **80**.

The movable barrier operator **12** may also include one or more time of flight sensors **272**. Each time of flight sensor **272** may employ a variety of signals including, but not limited to, ultrasound/ultrasonic and infrared signals for determining whether the remote control **30** is within or beyond the physical proximity of the location **80** associated with the movable barrier operator system **10**. For example, the time of flight sensor **272** may emit infrared light at a first time, T_1 , which may be reflected by a vehicle **100** (see FIG. 1) including the mobile communication device **34**, and received back at the time of flight sensor **272** at a second time, T_2 . The controller **255** may then perform a time of flight calculation based at least in part on the time between T_1 and T_2 to approximate the distance between the time of flight sensor **272** and the vehicle **100** including the remote control **30**. The controller **255** may then compare that distance to a threshold distance stored in the memory **265** to determine whether the remote control **30** is within or beyond the physical proximity of the location **80** associated with the movable barrier operator system **10**. Phase shift or frequency shift of an emitted signal from time of flight sensor **272** and a reflected/received signal may additionally or alternatively be employed for the determination of physical proximity.

A variety of remote sensors **70** may be used to obtain data for determining whether the vehicle **100** including the remote control **30** is within or beyond the physical proximity of the location **80** associated with the movable barrier operator system **10**. For example, an optical emitter and an optical detector may be located on opposing sides of a driveway and may be used to determine whether vehicle **100** including the remote control **30** is positioned thereupon. For example, if vehicle **100** including the remote control **30** interrupts a light beam between the optical emitter and optical detector, the emitter and/or detector may communicate with the communication circuitry **250** of the movable barrier operator **12** to indicate that the remote control **30** is within the physical proximity. To prevent false positives associated with other objects interrupting the light beam, such as a dog or child, the controller **255** may only inhibit operation of the moving-barrier imminent motion notification apparatus **14** if the light beam is interrupted within a defined time period after a user sends a command message using the remote control **30**. For example, if the light beam is not interrupted within 1-3 milliseconds upon the communication circuitry **250** receiving the radio frequency communication from the remote control **30**, then the moving-barrier imminent motion notification apparatus **14** will operate and provide an imminent motion notification.

Additionally, the remote sensors **70** may be integrated as part of a connected or "smart" city. For example, a number of different remote sensors **70** may be used to determine the location of the vehicle **100** including the remote control **30** as the vehicle **100** traverses through the city. The vehicle **100** including the remote control **30** may include an emitter **74** for emitting a radio frequency beacon signal having a unique identifier associated with the vehicle **100** such that a remote sensor **70** may detect the beacon signal. Such a remote

sensor **70** may be located, for example, in streetlights, street signs, on a building, or other fixed or mobile devices configured for vehicle-to-vehicle (V2V), vehicle-to-infrastructure (V2I), vehicle-to-anything (V2X) communications and the like. Once the beacon signal is detected, the identity of the remote sensor **70** and an indication that the remote sensor **70** detected the vehicle **100** is communicated to the communication circuitry **250** of the movable barrier operator **12**. The controller **255** may then determine the location of the vehicle **100** based at least in part on the location of the remote sensor **70** stored in the memory **265**.

The remote sensor **70** may also include an optical sensor configured to detect a light emitted by the remote control **30** or by the vehicle **100**. The remote control **30** may include a light emitter to emit light in response to a user interacting with the user interface **352** of the remote control **30** such that the optical sensor may detect the emitted light. The remote sensor **70** may then communicate to the communication circuitry **250** that the light was detected by the optical sensor of the remote sensor **70**, thus indicating that the remote control **30** is in an unobstructed line of sight of the movable barrier **18** and causing the controller **255** to not operate the moving-barrier imminent motion notification apparatus **14**.

As another example, the remote sensor **70** may be a camera such as a closed-circuit television camera that may be located at various intersections throughout a city, and a processor associated therewith may determine the relative location of a vehicle **100** including a remote control **30** based at least in part using image recognition technology. Additionally, the location of the camera or cameras may be stored in the memory **265** of the movable barrier operator **12**. For example, the remote control **30** may be integrated in the vehicle **100** and the vehicle **100** has a unique license plate that may be identified by the processor associated with the camera to determine that the vehicle **100** is near the camera. An indication of the vehicle **100** being in proximity to the camera may then be transmitted to the communication circuitry **250** of the movable barrier operator **12**. Based on the location of the camera that has been stored in the memory **265**, the controller **255** can determine the location of the vehicle **100**. If the location of the vehicle **100** including the remote control **30** is determined to be beyond the physical proximity of the location **80** associated with the movable barrier operator system **10**, the moving-barrier imminent motion notification apparatus **14** will operate in combination with any change in state of the movable barrier **18**.

In one embodiment, the communication circuitry **250** includes a wireless short-range communication interface **275** configured to communicate with the remote control **30** based on a paired relationship. The wireless short-range communication interface **275** may utilize one or more protocols including Zigbee, Z-Wave, Bluetooth (or Bluetooth Low Energy (BLE)), Near Field Communications (NFC), Long Terminal Repeat (LTR), Wi-Fi, WiMAX, or other proprietary or public wireless communication methods. During setup of the remote control **30**, the remote control **30** may be paired to the wireless short-range communication interface **275** such that pairing information is retained to provide a connection therebetween automatically when the remote control **30** is within the connection range of the interface **275**. The connection range of the interface **275** may be selected such that a connection between the interface **275** and the remote control **30** indicates that the vehicle **100** including the remote control **30** is within the physical proximity of the location **80** associated with the movable barrier operator system **10**. So configured, the controller **255**

may effect a change of state of the movable barrier **18** without operating the moving-barrier imminent motion notification apparatus **14** when the remote control **30** is connected to the interface **275**.

By another approach, a LiDAR system **280** may be used to determine whether the remote control **30** is located within or beyond the physical proximity of the location **80** associated with the movable barrier operator system **10**. For example, the vehicle **100** including the remote control **30** may additionally include a LiDAR system **280** configured to sense surroundings using pulsed laser light and measure the reflected pulses to create a digital 3-D representation of the environment. So configured, the LiDAR system **280** may identify when the vehicle **100** is in view of the movable barrier **18** associated with the remote control **30**. The LiDAR system **280** may then communicate a determination that the movable barrier **18** is in an unobstructed line of sight of the vehicle **100** to the remote control **30**. The remote control **30** may in turn communicate with the communication circuitry **250** of the movable barrier operator **12** to indicate that the remote control **30** is within the physical proximity of the location **80** associated with the movable barrier operator system **10** such that operation of the moving-barrier imminent motion notification apparatus **14** is not required.

Determining whether the remote control **30** is within the physical proximity of the location **80** may also be based at least in part on global navigation satellite system (GNSS) data such as, for example, global positioning satellite (GPS) coordinates including a latitude and a longitude associated with the remote control **30**. In one embodiment, the communication circuitry **350** of the remote control **30** includes a GPS receiver configured to receive data from GPS satellites that the GPS receiver or the controller **255** uses to determine the location of the remote control **30**. By way of example, the location **80** associated with the movable barrier operator system **10** may be the geofenced area **90** as shown in FIG. 1. When the GPS data indicates that the remote control **30** is outside of or beyond the geofenced area **90**, the controller **255** of the movable barrier operator system **10** will effect operation of the moving-barrier imminent motion notification apparatus **14** in combination with a change of state of the movable barrier **18**. The latitude and longitude of the remote control **30** may be communicated directly to the communication circuitry **250** of the movable barrier operator **12**, or may additionally or alternatively be sent to the server computer **40**, which may then communicate the latitude and longitude to the communication circuitry **250**.

In one embodiment, the memory **265** of the controller **255** is configured for storing a threshold distance corresponding with the physical proximity of the location **80** associated with the movable barrier operator system **10**. The controller **255** is configured to compare the threshold distance stored in the memory **265** to the distance measured between the remote control **30** and the location **80**. For example, the distance between the remote control **30** and the location **80** may be determined using GPS data and comparing the latitude and longitude of the remote control **30** to the latitude and longitude of the location to determine the absolute distance therebetween. Additionally or alternatively, the distance between the remote control **30** and the location **80** may correspond to the distance the vehicle **100** including the remote control **30** will have to travel along one or more roads to reach the location **80**. When the absolute distance between the remote control **30** and the location **80** is greater than the threshold distance, the controller **255** is configured to effect operation of the moving-barrier imminent motion notification apparatus **14** in combination with a change in

state of the movable barrier **18** in response the communication circuitry **250** receiving a communication. Additionally, the communication circuitry **255** is configured to receive a second, updated threshold distance from a remote server, such as server computer **40**, when a user adjusts the threshold distance. The controller **255** is configured to store the updated threshold distance in the memory **265** for performing the next proximity determination. The receipt of an updated distance threshold may cause the controller **255** to remove the prior distance threshold from the memory **265**.

Further, any number of techniques described herein for determining the proximity of the remote control **30** may be used in connection with one another to perform the proximity determination via a sensor fusion algorithm. For example, the proximity determination may rely on both RSSI thresholding in addition to comparison of GPS coordinates, or any other combination of proximity determining techniques to increase at least one of the accuracy, reliability, and precision of the proximity determination. In some embodiments, if even one of the techniques determines that the remote control **30** is beyond the physical proximity of the location **80** associated with the movable barrier operator system **10**, then operation of the moving-barrier imminent motion notification apparatus **14** will still occur for the safety reasons discussed herein. For instance, in an example embodiment relying on both GPS coordinates and connection with the wireless short-range interface **275**, even if the remote control **30** is connected to the interface **275**, when the GPS coordinates indicate that the remote control **30** is beyond the physical proximity then the controller **255** will still effect operation of the moving-barrier imminent motion notification apparatus **14** in combination with operation of the movable barrier **18**.

In some embodiments, various other local and remote devices and components may perform the proximity determination in accordance with the above-discussed proximity determining techniques and communicate that determination to the communication circuitry **250** of the movable barrier operator **12**. For instance, the server computer **40** or another computing device associated with the movable barrier operator system **10** may determine whether the remote control **30** is within or beyond the physical proximity of the location **80** and communicate the determination to the communication circuitry **250** of the movable barrier operator **12**. Such remote determinations may then instruct the controller **255** whether to effect operation of the moving-barrier imminent motion notification apparatus **14**. In other embodiments, a processor **355** (see FIG. 3) of the remote control **30** may be configured to perform the proximity determination and communicate that determination via communication circuitry **350** to the communication circuitry **250** of the movable barrier operator **12**.

A loop detector may be used in the determination of whether the remote control **30** is within the physical proximity. The loop detector may determine whether the vehicle **100** including the remote control **30** is within the physical proximity based on, for example, changes in inductance or measuring changes in the earth's magnetic field when the vehicle **100** including the remote control **30** passes over a buried or in-pavement loop of the loop detector. An output signal from the loop detector indicating a determination that the remote control **30** is within the physical proximity may then be sent to the communication circuitry **250** of the movable barrier operator **12**. Upon receiving a communication from the remote control **30** in conjunction with the loop detector indicating that the remote control **30** is within the physical proximity, the controller **255** effects a change of

state of the movable barrier **18** without operating the moving-barrier imminent motion notification apparatus **14**.

With reference to FIG. 3, the communication circuitry **350** is configured to send a communication to the movable barrier operator **12** to effect movement of the movable barrier **18**. For example, the communication circuitry **350** may include a radio frequency transmitter or transceiver configured to communicate with the movable barrier operator **12** via radio frequency signals in the 300 MHz to 900 MHz range. Alternatively or additionally, the communication circuitry **350** may include a wireless wide area network interface/device configured to communicate via cellular (for example, 3G, 4G, 4G LTE, 5G), Wi-MAX, LoRa, or other approaches.

The communication circuitry **350** is further configured to transmit or receive at least one locating indicium used in determining whether the remote control **30** is within the physical proximity of the location **80** associated with the movable barrier operator system **10**. The remote control **30** further includes a user interface **352** to receive a user input and, optionally, to provide information to the user.

The processor **355** is connected to the communication circuitry **350**, the user interface **352**, and a memory **365**. The memory **365** comprises a non-transitory computer-readable medium that can store, for example, a fixed or static identifier of the remote control **30**, a rolling code algorithm and a current rolling identifier, location data (for example, latitude and longitude coordinates of the geofence **90**), or any combination thereof.

The processor **355** is configured to effect movement of the movable barrier **18** in combination with an imminent motion notification when the remote control **30** is determined to be beyond the physical proximity of the location **80**. The processor **355** is configured to effect movement of the movable barrier **18** by, for example, causing the communication circuitry **350** to send a radio frequency communication directly to the movable barrier operator **12**. Alternatively, the processor **355** may send a communication indirectly to the movable barrier operator **12** by causing the communication circuitry **350** to send a state change request to the server computer **40**. In turn, the server computer **40** may then send a command message to the movable barrier operator **12** via the network **44**.

The user interface **352** may include a display screen, one or more buttons, a microphone, a speaker, or a combination thereof. A user input at the user interface **352** may cause the processor **355** to cause the communication circuitry **350** to send a communication directly or indirectly to the movable barrier operator **12**.

The determination of whether the remote control **30** is within or beyond the physical proximity of the location **80** associated with the movable barrier operator system **10** may be performed by the processor **355** of the remote control **30**. In one embodiment, the communication circuitry **350** of the remote control **30** may be configured to receive a locating indicium from an external device such as, for example, the server computer **40** or the movable barrier operator system **10**. In another embodiment, the communication circuitry **350** of the remote control **30** is configured to transmit the locating indicium to the movable barrier operator **12**, the server computer **40**, and/or another device.

The at least one locating indicium transmitted or received by the communication circuitry **350** may include raw data obtained by any of the proximity techniques discussed above with respect to FIG. 2, among others, or data representing a determination of a location of the remote control **30**. As other examples, the at least one locating indicium may

15

include a signal associated with cell tower triangulation of the remote control 30 or an ultrasonic sound. The proximity determination may be based at least in part on any of the locating indicia described herein, among others.

Upon the processor 355 determining that the remote control 30 is within the physical proximity of the location 80 associated with the movable barrier operator system 10, the communication circuitry 350 may communicate a non-notification instruction or indication to the communication circuitry 250 of the movable barrier operator. The communication that the remote control 30 sends to the movable barrier operator 12 to effect a change of state of the movable barrier may contain the non-notification instruction. In another approach, the non-notification instruction may be a separate communication.

The non-notification instruction is configured to instruct the controller 255 of the movable barrier operator 12 to not operate the moving-barrier imminent motion notification apparatus 14 when the movable barrier 18 is opened or closed. As another example, the controller 255 does not operate the moving-barrier imminent motion notification apparatus 14 unless the communication circuitry 250 receives a notification instruction from the remote control 30. The processor 355 may effect non-operation of the moving-barrier imminent notification apparatus 14 by not sending the notification instruction to the movable barrier operator 12.

In one embodiment, the communication circuitry 350 of the remote control 30 includes a global positioning satellite (GPS) receiver and the at least one locating indicium includes data from GPS satellites. Upon receiving the GPS data, the processor 355 of the remote control 30 may calculate the location of the remote control 30 and compare the calculated location with the location 80 associated with the movable barrier operator system 10 to determine whether the remote control 30 is located within or beyond the physical proximity. The communication circuitry 350 of the remote control 30 may then communicate the proximity determination to the communication circuitry 250 of the movable barrier operator 12.

In another embodiment, the at least one locating indicium may include an ultrasonic signal. As another example, the remote control 30 may include an ultrasonic transmitter and the movable barrier operator 12 may include an ultrasonic receiver, or vice versa. To determine whether the remote control 30 is within or beyond the physical proximity of the location 80 associated with the movable barrier operator system 10, either the remote control 30 or the movable barrier operator 12 may emit an ultrasonic signal which, if the remote control 30 is within the physical proximity, may be received and then analyzed to evaluate the distance between the remote control 30 and the movable barrier operator 12.

In one embodiment, the communication circuitry 350 of the remote control 30 communicates via a cellular or other wide-area or long-range network. The proximity determination may be based on triangulation data of the remote control 30. Specifically, the processor 355 of the remote control 30 may measure a time delay that a cellular signal takes to return from at least two cell towers associated with the cellular network. The processor 355 may then determine the location of the remote control 30 by comparing the time delays to the location of the cell towers. That location may in turn be used to determine whether the remote control is within or beyond the physical proximity of the location 80 associated with the movable barrier operator system 10. The communication circuitry 350 may then communicate the

16

proximity determination to the communication circuitry 250 of the movable barrier operator 12.

With reference to FIG. 4, the server computer 40 for facilitating operation by the remote control 30 of the movable barrier operator system 10 includes a communication interface 450, a processor 455, and a memory 465. The memory 465 comprises a non-transitory computer-readable medium that may be configured to store for example, threshold distances, threshold signal strengths, location data (for example, latitude and longitude coordinates of the geofence 90), and other data to be used in performing the proximity determination. The processor 455 may be configured to execute computer-readable instructions stored on the memory 465. The communication interface 450 is configured to communicate with the movable barrier operator system 10 and the remote control 30 via the network 44, such as the internet or a local area network, and may also receive a state change request from the remote control 30, the state change request configured to cause the server computer 40 to either open or close the movable barrier 18. When the communication interface 450 receives the state change request from the remote control 30, the processor 455 is configured to cause the communication interface 450 to communicate a command message to the movable barrier operator system 10. The command message is configured to effect a change in state of the movable barrier 18 in combination with operation of the moving-barrier imminent motion notification apparatus 14 upon a determination that the remote control 30 is located beyond the physical proximity of the location 80 associated with the movable barrier operator system 10.

In one embodiment, the proximity determination is performed by the processor 455 of the server computer 40 before communicating the command message to the movable barrier operator system 10. For example, the communication interface 450 of the server computer 40 may be configured to receive data representing one or more characteristics of the remote control 30, such as location data representing the physical location of the remote control 30. The location data can be raw data obtained by any of the proximity techniques discussed above with respect to FIGS. 2-3, or data representing a determined location. The location data should be understood to refer to data representing the physical location of the remote control 30 that is capable of being compared to the location 80 associated with the movable barrier operator system 10 to determine whether the remote control 30 is within or beyond the physical proximity.

Alternatively, the location data could be representative of the determination of the remote control 30 being within or beyond the physical proximity made by, for example, the controller 255 or the processor 355, and then communicated to the communication circuitry 450 of the server computer 40. Upon receiving a determination that the remote control 30 is beyond the physical proximity, the processor 455 is configured to cause the communication interface 450 to communicate a command message including a non-notification signal to the communication circuitry 250 of the movable barrier operator 12 to effect a change in state of the movable barrier 18 without operating the moving-barrier imminent motion notification apparatus 14.

With reference to FIG. 5, a method 500 is provided for operating the movable barrier operator 12. The method 500 includes the operation 510 of receiving at the movable barrier operator 12 a communication from the remote control 30 configured to change a state of the movable barrier 18. The method also includes the operation 520 of deter-

mining whether the remote control **30** is within or beyond the physical proximity of the location **80** associated with the movable barrier operator system **10**. The operation **520** may be performed, for example, by the controller **255** of the movable barrier operator **12**. Alternatively, the operation **520** may be performed by the processor **355** of the remote control **30** or the processor **455** of the server computer **40** and communicated to the communication circuitry **250** of the movable barrier operator **12**. The determination may be based, at least in part, on data obtained by any of the location determining techniques discussed above with respect to FIGS. 2-4. In response to a determination **520** that the remote control **30** is beyond the physical proximity, the movable barrier operator **12** is configured to effect operation of the moving-barrier imminent motion notification apparatus **14** in combination with movement of the movable barrier **18** in operation **530**. When the determination **520** indicates that the remote control **30** is within the physical proximity, in operation **540** the movable barrier operator **12** moves the movable barrier **18** and inhibits operation of the moving-barrier imminent motion notification apparatus **14**.

With reference to FIG. 6, a method **600** is provided for operating the movable barrier operator **12** using the remote control **30**. The method **600** includes operation **610** of receiving a user input at the user interface **352** of the remote control **30** and operation **620** of communicating with the movable barrier operator **12** in response to the receiving the user input. The method **600** further includes the operation **630** of determining whether the remote control **30** is within or beyond the physical proximity of the location **80** associated with the movable barrier operator system **10**. The operation **630** of determining may be performed, for example, by the processor **355** of the remote control **30**. Alternatively, the operation **630** may be performed by the controller **255** of the movable barrier operator **12** or the processor **455** of the server computer **40** and communicated to the communication interface **350** of the remote control **30**. The determination may be based, at least in part, on a locating indicium of the remote control **30**. The locating indicium can be raw data obtained by any of the location determining techniques discussed above with respect to FIGS. 2-4, among others, or data representative of such a determination.

The method **600** further includes operation **640** of effecting operation of the moving-barrier imminent motion notification apparatus **14** in combination with changing a state of the movable barrier **18** upon a determination of the remote control **30** being beyond the physical proximity. The method **600** includes operation **650** of not effecting operation of the moving-barrier imminent motion notification apparatus **14** along with effecting movement of the movable barrier when the remote control **30** is determined to be within the physical proximity. Alternatively, operation **650** may include the remote control **30** communicating a non-notification instruction to the communication circuitry **250** of the movable barrier operator **12** to effect a change in state of the movable barrier **18** without operating the moving-barrier imminent motion notification apparatus **14**.

With reference to FIG. 7, a processor **455** of the server computer **40** may execute instructions stored on a non-transitory computer readable medium that cause the processor **455** to perform a method **700**. The method **700** includes the operation **710** of communicating with the movable barrier operator **12** and the remote control **30** via the network **44**, and operation **720** of receiving a state change request from the remote control **30**. The method **700** additionally includes operation **730** of determining whether the remote

control **30** is within or beyond the physical proximity of the location **80** associated with the movable barrier operator system **10**. The operation **730** of determining may be performed, for example, by the processor **455** of the server computer **40**. Alternatively, the operation **730** may be performed by the controller **255** of the movable barrier operator **12** or the processor **355** of the remote control **30** and communicated to the communication interface **450** of the server computer **40**. The determination may be based, at least in part, on location data of the remote control **30**. The location data can be raw data obtained by any of the location determining techniques discussed above with respect to FIGS. 2-4, among others, or data representative of such a determination.

Operation **740** includes effecting operation of the moving-barrier imminent motion notification apparatus **14** in combination with changing a state of the movable barrier **18** upon a determination of the remote control **30** being beyond the physical proximity. At operation **750**, inhibiting operation of the moving-barrier imminent motion notification apparatus **14** is performed in conjunction with effecting movement of the movable barrier upon the remote control **30** being determined to be within the physical proximity.

Those skilled in the art will recognize that a wide variety of modifications, alterations, and combinations can be made with respect to the above described embodiments without departing from the scope of the invention. For instance, although the described embodiments include a garage door, various types of movable barrier systems can employ these teachings, for example, swinging gates, rolling gates, rising gates, and the like. Such modifications, alterations, and combinations are to be viewed as being within the ambit of the inventive concept.

What is claimed is:

1. A movable barrier operator system comprising:
 - a motor configured to connect with a movable barrier and effect movement of the movable barrier;
 - communication circuitry configured to communicate with a remote control;
 - a controller operably coupled to the motor and the communication circuitry, the controller configured to cause the motor to change a state of the movable barrier upon the communication circuitry receiving a communication from the remote control; and
 - a moving-barrier imminent motion notification apparatus operably coupled to the controller and configured to output an alert in combination with the change of state of the movable barrier upon a determination of the remote control being beyond a physical proximity of a location associated with the movable barrier operator system,
 the controller further configured to refrain from operation of the moving-barrier imminent motion notification apparatus in combination with the change of state of the movable barrier upon a determination of the remote control being within the physical proximity.
2. The system of claim 1 wherein the controller is configured to determine whether the remote control is within or beyond the physical proximity.
3. The system of claim 2 wherein the controller is configured to determine a signal strength of the communication, the controller further configured to determine whether the remote control is within or beyond the physical proximity based at least in part on the signal strength of the communication.
4. The system of claim 2 wherein the controller is configured to determine one or more of an angle of arrival

19

of the communication, a time of flight of the communication, or a combination thereof;

the controller further configured to determine whether the remote control is within or beyond the physical proximity based at least in part on the determination of the angle of arrival of the communication, or the time of flight of the communication, or the combination thereof.

5. The system of claim 1 wherein the communication circuitry is configured to receive data from a remote sensor, the data indicating a vehicle including the remote control is adjacent the remote sensor, the controller configured to determine whether the remote control is within or beyond the physical proximity of the location associated with the movable barrier operator system based at least in part on the data from the remote sensor.

6. The system of claim 5 wherein the controller is configured to determine a signal strength of the communication, the controller further configured to determine whether the remote control is within or beyond the physical proximity based at least in part on the data from the remote sensor and the signal strength of the communication.

7. The system of claim 1 wherein the communication circuitry includes a wireless short-range communication interface configured to receive the communication from the remote control, the controller configured to determine whether the remote control is within or beyond the physical proximity of the location associated with the movable barrier operator system based at least in part on receipt of the communication by the wireless short-range communication interface.

8. The system of claim 7 wherein the wireless short-range communication interface is configured to receive the communication from the remote control using a Wi-Fi, Bluetooth, ZigBee, or a proprietary protocol.

9. The system of claim 1 wherein the communication circuitry is configured to receive, from the remote control, an indication of whether the remote control is within or beyond the physical proximity.

10. The system of claim 1 wherein the communication circuitry is configured to communicate with a server computer and receive, from the server computer, a determination signal indicative of whether the remote control is within or beyond the physical proximity.

11. The system of claim 1 further comprising an optical sensor configured to receive a light emitted by the remote control, the controller configured to determine whether the remote control is within or beyond the physical proximity based at least in part on receipt by the optical sensor of the light emitted by the remote control.

12. The system of claim 1 wherein the controller includes a memory configured to store a first threshold distance, the controller configured to determine whether the remote control is within or beyond the physical proximity by comparing a distance between the remote control and the location associated with the movable barrier operator system to the first threshold distance; and

the communication circuitry is configured to receive a second threshold distance from a computing device and the controller is configured to replace the first threshold distance in the memory with the second threshold distance.

13. The system of claim 1 wherein the location associated with the movable barrier operator system includes a geofenced area and the controller is configured to:

determine whether the remote control is in the geofenced area; and

20

determine whether the remote control is within or beyond the physical proximity based at least in part on determination of whether the remote control is in the geofenced area.

14. The system of claim 1 wherein the communication circuitry is configured to receive the communication from the remote control via a network and a server computer.

15. A method of operating a movable barrier operator system having a moving-barrier imminent motion notification apparatus, the method comprising:

at the movable barrier operator system:

receiving a communication from a remote control, the communication configured to cause the movable barrier operator system to change a state of a movable barrier;

causing the moving-barrier imminent motion notification apparatus to output an alert in combination with a change of state of the movable barrier upon a determination of the remote control being beyond a physical proximity of a location associated with the movable barrier operator system; and

causing the moving-barrier imminent motion notification apparatus to refrain from outputting an alert in combination with the change of state of the movable barrier upon a determination of the remote control being within the physical proximity.

16. The method of claim 15 further comprising, at a processor of the movable barrier operator system, determining whether the remote control is within or beyond the physical proximity.

17. The method of claim 16 further comprising determining a signal strength of the communication received from the remote control; and

wherein determining whether the remote control is within or beyond the physical proximity is based at least in part on the signal strength of the communication.

18. The method of claim 16 further comprising determining an angle of arrival of the communication, a time of flight of the communication, or a combination thereof; and

wherein determining whether the remote control is within or beyond the physical proximity is based at least in part on the angle of arrival of the communication, the time of flight of the communication, or the combination thereof.

19. The method of claim 15 further comprising: receiving data from a remote sensor, the data indicating a vehicle including the remote control is adjacent the remote sensor; and

determining whether the remote control is within or beyond the physical proximity based at least in part on the data from the remote sensor.

20. The method of claim 19 further comprising determining a signal strength of the communication; and

wherein determining whether the remote control is within or beyond the physical proximity is based at least in part on the signal strength of the communication and the data from the remote sensor.

21. The method of claim 15 wherein receiving the communication from a remote control includes receiving the communication transmitted wirelessly from the remote control to the movable barrier operator system.

22. The method of claim 21 wherein receiving the communication transmitted wirelessly from the remote control includes receiving the communication using a Wi-Fi, Bluetooth, ZigBee, or a proprietary protocol.

23. The method of claim 15 further comprising receiving, at the movable barrier operator system, a determination from

21

the remote control indicative of whether the remote control is within or beyond the physical proximity.

24. The method of claim 15 further comprising receiving, at the movable barrier operator system, a determination from a computer server indicative of whether the remote control is within or beyond the physical proximity. 5

25. The method of claim 15 further comprising receiving, at an optical sensor of the movable barrier operator system, a light emitted by the remote control; and determining whether the remote control is within or beyond the physical proximity based at least in part on the light received at the optical sensor. 10

26. The method of claim 15 further comprising: storing a first threshold distance in a memory of the movable barrier operator system; determining whether the remote control is within or beyond the physical proximity by comparing a distance between the remote control and the location associated with the movable barrier operator to the first threshold distance; 15

22

receiving a second threshold distance from a computer server; and

replacing the first threshold distance with the second threshold distance in the memory of the movable barrier operator system.

27. The method of claim 15 wherein the location associated with the movable barrier operator system includes a geofenced area and the method further comprises:

determining whether the remote control is in the geofenced area; and

determining whether the remote control is within or beyond the physical proximity based at least in part on whether the remote control is in the geofenced area.

28. The method of claim 15 wherein receiving the communication from the remote control includes receiving the communication via a network and a server computer.

* * * * *