

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 823 598 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
19.11.2003 Bulletin 2003/47

(51) Int Cl.7: **F24F 11/00, F24F 1/00**

(21) Application number: **97113236.0**

(22) Date of filing: **31.07.1997**

(54) **In-ceiling type air conditioner having controller for upward and downward motion of elevating panel**

Klimagerät für Deckenmontage mit Steuerung der Auf- und Abbewegung der Hebevorrichtung

Dispositif de climatisation pour plafond avec commande de mouvement vers le haut et vers le bas du panneau élévateur

(84) Designated Contracting States:
DE ES FR GB GR IT PT

(30) Priority: **08.08.1996 JP 22596296**

(43) Date of publication of application:
11.02.1998 Bulletin 1998/07

(73) Proprietor: **SANYO ELECTRIC Co., Ltd.**
Moriguchi-shi, Osaka 570 (JP)

(72) Inventors:
• **Wada, Keiji**
Ora-gun, Gunma (JP)
• **Idei, Nobuhiro**
Ora-gun, Gunma (JP)
• **Osu, Shinichi**
Kiryu-shi, Gunma (JP)

(74) Representative: **Glawe, Delfs, Moll & Partner**
Patentanwälte
Postfach 26 01 62
80058 München (DE)

(56) References cited:
• **PATENT ABSTRACTS OF JAPAN vol. 018, no. 239 (M-1601), 9 May 1994 (1994-05-09) -& JP 06 026667 A (MITSUBISHI HEAVY IND LTD), 4 February 1994 (1994-02-04)**
• **PATENT ABSTRACTS OF JAPAN vol. 018, no. 492 (M-1673), 14 September 1994 (1994-09-14) -& JP 06 159718 A (MITSUBISHI HEAVY IND LTD), 7 June 1994 (1994-06-07)**
• **PATENT ABSTRACTS OF JAPAN vol. 1995, no. 02, 31 March 1995 (1995-03-31) -& JP 06 323565 A (HIROHARU TAKABAYASHI), 25 November 1994 (1994-11-25)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 823 598 B1

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to an improvement of an in-ceiling type air conditioner having a control system for controlling the upward and downward motion of a panel which is upwardly and downwardly movable (hereinafter referred to as "elevating panel") and provided with an air filter for cleaning suck-in air into the in-ceiling type air conditioner.

2. Description of the Related Art

[0002] There has been generally known an in-ceiling type air conditioner in which an air suction grill having an elevating panel is supported so as to be freely upwardly and downwardly moved relatively to the lower face of a decorative panel by using an elevating motor. In this type of air conditioner, a work for replacing an air filter with a new one can be performed at a lower place because an air suction grill provided with the air filter is controllable to be downwardly moved to the lower place (see for example JP-06 026 667).

[0003] The conventional in-ceiling type air conditioner as described above is provided with upper and lower limits switches for detecting the upper limit position and the lower limit position of the elevating panel, respectively. When the air suction grill is downwardly moved and stopped at the lower limit position, the elevating motor is stopped on the basis of a signal from the lower limit switch which is adapted to detect the lower limit position. On the other hand, when the air suction grill is upwardly moved and stopped at the upper limit position, the elevating motor is stopped on the basis of a signal from the upper limit switch which is adapted to detect the upper limit position.

[0004] Particularly when the air suction grill is stopped at the upper limit position, the air suction grill is upwardly moved until the four comers of the air suction grill uniformly come into contact with the lower face of the decorative panel so that the air suction grill is not inclined, and then stopped at that position while keeping a horizontal position.

[0005] In the prior art, a limit switch must be provided to stop the air suction grill at the upper limit position or the lower limit position as described above, resulting in increase of the number of parts and the number of electrical wires and also disturbing the reduction in cost. In addition, the rate of failure is also increased.

SUMMARY OF THE INVENTION

[0006] Therefore, an object of the present invention is to provide an in-ceiling type air conditioner in which the number of parts and the number of electrical wires are

reduced, a air suction grill can be stopped at the upper limit position or the lower limit position at a low failure rate and at a low cost, and also the inclination of the air suction grill can be corrected when the air suction grill is stopped at the upper limit position.

[0007] In order to attain the above object, according to the present invention, an in-ceiling type air conditioner includes a unit body which contains a heat exchanger and an air blower and is mounted in the ceiling, a decorative panel provided on the ceiling face, and an elevating panel with an air filter, to which one ends of suspending ropes are fixed, the other ends of the suspending ropes being fixed to pulleys which are rotationally driven by an elevating motor, the suspending ropes being unreel/reel by actuating the elevating motor to move the elevating panel upwardly and downwardly, is characterized by further including consumption current detecting means for detecting the consumption current of the elevating motor, stop instructing means for outputting an operation stop instruction when the detection result of the consumption current detecting means is over a predetermined set value during the upward or downward motion of the elevating panel, and motor stop control means for stopping the elevating motor in response to the operation stop instruction from the stop instruction means.

[0008] According to the present invention, when the elevating panel is being upwardly moved, the consumption current of the elevating motor is kept constant. However, when the elevating panel arrives at the upper limit position, the load imposed on the elevating motor increases, and finally it is over a predetermined value. In this case, the consumption current detecting means detects this situation, the operation stop instruction is output to the motor stop control means, and the motor stop control means stops the elevating motor, whereby the elevating panel is stopped at the upper lower limit position. Further, when the elevating panel is downwardly moved to the lower limit position, the rotation of the elevating motor is continued. Therefore, the rotation of the pulleys works to rewind the ropes after all the ropes are unreel. The load of the elevating motor when the ropes are unreel relatively small, and thus a relatively small consumption current is detected by the consumption current detecting means. However, the load on the elevating motor when the ropes are reel after the ropes are unreel, becomes relatively larger than the dead weight of the elevating panel, and thus the consumption current is increased. Therefore, the consumption current detecting means detects a relatively large consumption current. If the consumption current detected by the consumption current detecting means exceeds a predetermined set value, the operation stop signal is output from the stop instruction means, and the motor stop control means stops the elevating motor.

[0009] In the in-ceiling type air conditioner as described above, the stop instruction means outputs the operation stop instruction when the detection result of

the consumption current detecting means is over a first set value during the upward motion of the elevating panel, or when the detection result of the consumption current detecting means is over a second set value during the downward motion of the elevating panel.

[0010] According to the above in-ceiling type air conditioner as described above, for example when the load on the elevating motor increases in the progress of the upward motion of the elevating panel to the upper limit position and the consumption current finally exceeds the first set value, the timer is started, and the elevating motor is stopped after the predetermined time elapses. The first set value is set to a value larger than the consumption current which is took by the elevating motor when the elevating grill is upwardly moved, and it is predetermined in accordance with the load of the elevating motor which is increased when the elevating panel arrives at the upper limit position. Further, when the load on the elevating motor is increased in the progress of the lower limit position of the elevating panel and the consumption current finally exceeds the second set value, the elevating motor is immediately stopped. The second set value is set to be smaller than the first set value, and it is set on the basis of the consumption current which is took by the elevating motor when the elevating panel is upwardly moved.

[0011] In the in-ceiling type air conditioner as described above, the motor stop control means stops the elevating motor when a predetermined time elapses after receiving the operation stop instruction from the stop instruction means.

[0012] According the above in-ceiling type air conditioner as described above, the elevating motor is stopped after the predetermined time elapses from the time when the operation stop instruction is output from the stop instruction means. Therefore, after the elevating panel arrives at the upper limit position, the elevating motor is rotated for the predetermined time to correct the inclination of the elevating panel.

[0013] The in-ceiling type air conditioner as described above further includes a timer for counting the predetermined time after the operation stop instruction is output, wherein the motor stop control means stops the elevating motor in response to the output result of the timer.

[0014] Further, according to the present invention, a control device for controlling the upward and downward motion of an elevating panel of an in-ceiling type air conditioner, comprising, an elevating motor for moving the elevating panel upwardly and downwardly, a driver circuit for supplying an operating current to the elevating motor to rotate the elevating motor forwardly and backwardly, a controller for outputting a control signal to the driver circuit and controlling the driver circuit on the basis of the control signal, a consumption current detector for detecting the consumption current of the elevating motor at all times to output a detection result to the controller, a timer for counting a predetermined time and outputting the count result to the controller, wherein

when the consumption current detected by the consumption current detector exceeds a predetermined value during the upward or downward motion of the elevating panel, the controller outputs an operation stop instruction to the driver circuit to stop the rotation of the elevating motor and thus stop the elevating panel.

[0015] When the control device as described above is installed into an in-ceiling type air conditioner, the same effects as described above can be obtained.

[0016] According to the control device as described above, the predetermined time is set to such an enough time that the overall periphery of said elevating panel can perfectly arrive at the upper limit position of the upward motion or at the lower limit position of the downward motion thereof. Therefore, the elevating panel can be stopped at the upper or lower limit position while it is surely kept in a horizontal position when arriving at the upper limit position or lower limit position.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017]

Fig. 1 is a perspective view showing an embodiment of an in-ceiling type air conditioner;

Fig. 2 is a plane view showing a air suction grill;

Fig. 3 is a perspective view showing the state where the air suction grill is suspended;

Fig. 4 is a longitudinal sectional view showing the in-ceiling type air conditioner;

Fig. 5 is a block diagram showing a control system for the air conditioner of the present invention;

Fig. 6 is a flowchart showing a processing flow at the front stage of the present invention;

Fig. 7 is a flowchart showing a processing flow at the rear stage of the present invention;

Fig. 8 is a perspective view showing another embodiment of the in-ceiling type air conditioner of the present invention;

Fig. 9 is a cross-sectional view showing the in-ceiling type air conditioner shown in Fig. 8; and

Fig. 10 is a perspective view showing a center panel.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0018] Preferred embodiments according to the present invention will be described with reference to the accompanying drawings.

[0019] Fig. 4 is a longitudinal sectional view showing an in-ceiling type air conditioner. In Fig. 4, reference numeral 50 represents an air conditioner.

[0020] The air conditioner 50 includes a unit main body 2 which is mounted in the ceiling 1 and formed of a metal plate, a decorative panel 7 which has an air suck-in port 3 at the center thereof and air blow-out ports 4 on the four sides of the peripheral portion thereof and

provided in the ceiling plane so as to close a ceiling hole 5, and an air suction grill 9 (elevating panel) having an air suck-in port 8 at the center thereof.

[0021] Reference numeral 10 represents an air blower which comprises a turbo fan 11 and a fan motor 13 secured on the ceiling plate 12, reference numeral 14 represents a nozzle port for guiding indoor air from the air suck-in port 8 to the turbo fan 11, reference numeral 15 represents a drain pan which has an inwardly projecting portion 15a and an outwardly projecting portion 15b and is formed of styrofoam in a squared annular form, and reference numeral 16 represents a plate fin type heat exchanger which is disposed at the discharge side of the turbo fan 11 so as to surround the fan annularly. Reference numeral 17 represents a heat insulator which is wound around the peripheral surface of the unit body 2, reference numeral 21 represents an air guide unit for guiding to an air blow-out port 4 air which is heat-exchanged by the heat exchanger 16, reference numeral 22 represents a suspending bolt through which the unit body 2 is suspended from a ceiling girder by a hook member, and reference numeral 24 represents an air filter which is secured at the downstream side of the air suction grill 9 and adapted to purify the suck-in air.

[0022] Referring to Figs. 1 to 3, the air suction grill 9 is supported to the unit body 2 through four suspending ropes 31 so as to be freely upwardly and downwardly moved. Each of the four suspending ropes 31 is formed of a resin wire or metal wire which is coated with vinyl coating on the outer periphery thereof, however, it may comprise a dial cord. As shown in Fig. 3, one ends 31a of the four suspending ropes 31 are connected to hooks 90a of air suction grill reinforcing members 90 as shown in Fig. 3, and the other ends 31c of two suspending ropes of the four suspending ropes 31 are wound around main pulleys 100A while the other ends 31c of the other two suspending ropes 31 are wound around main pulleys 100B through rope guides 200 or auxiliary pulleys (not shown), respectively.

[0023] The air suction grill reinforcing members 90 are fixed to the two sides of the air suction grill 9 by screws or the like and function as hooks for the four suspending ropes 31. In addition, the air suction grill reinforcing members 90 also function to reinforce the air suction grill 9 and prevent the lateral displacement of the air filter 24 (Fig. 4) which is mounted on the suck-in face of the air suction grill 9.

[0024] As shown in Fig. 2, the totally four main pulleys 100A and 100B are linked to both the end portions of a shaft 110 while each pulley 100A and each pulley 100B are paired. Each of the main pulleys 100A and 100B are formed with a hole therein, and the shaft 110 is inserted into the holes of these main pulleys 100A and 100B so that the pulleys are freely rotatable around the shaft 110 through the holes. A fixing member 120 is fixed to the shaft portion of the shaft 110 through plural screws or the like, and a rotational force transmitting means such as a leaf spring, an electromagnet or the like (hereinafter

referred to as "coil spring") 130 is interposed between the fixing member 120 and the main pulley 100A, 100B.

[0025] Reference numeral 125 represents a freely rotating ring. In such a situation that only the dead weight of the air suction grill 9 is applied to the four suspending ropes 31, the fixing members 120, the main pulleys 100A, 100B and the rings are kept to be frictionally linked to one another by the spring force of the coil spring 130, and the four suspending ropes 31 are unreelable/rewindable interlockingly with the rotation of the shaft 110. However, when an excessive load is imposed on the four suspending ropes 31, the main pulleys 100A and 100B turn free against the spring force of the coil spring 130.

[0026] Further, according to this embodiment, a mechanism 150 for upwardly and downwardly moving the air suction grill 9 (hereinafter referred to as "elevating mechanism"), that is, the elevating mechanism 150 comprising the main pulleys 100A and 100B, the shaft 110, a clutch containing the rotational force transmitting means 130 and an air suction grill elevating motor (DC motor) 140 as described later, etc. are collectively disposed on a support plate 151 which is provided so as to extend in the open portion of the unit body 2.

[0027] As shown in Fig. 2, the support plate 151 is fixed to the decorative panel 7, and the elevating mechanism 150 described above is fixed to the decorative panel side. Further, a controller 160 for controlling the air conditioner is provided in the open portion of the unit body 2 so as to confront the support plate 151. The controller 160 and the support plate 151 are disposed so as to extend in the so-called air sucking open portion of the unit body 2. That is, the support plate 151 is disposed so as to extend in an area 190A while the controller 160 is disposed so as to extend in an area 190B, however, the existence of the support plate 151 and the controller 160 do not disturb the air sucking function because the air can be sufficiently sucked in through the residual space 170. The elevating mechanism 150 described above is fixed to the decorative panel 7, however, the controller 160 is fixed to the unit body 2.

[0028] The elevating mechanism 150 will be hereunder described in detail.

[0029] The shaft 110 is freely rotatably mounted on the support plate 151 through two bearings 152. A gear 153 is fixed to the substantially center portion of the shaft 110. The gear 153 is engaged with a gear 154, and the gear 154 is fixed to the output shaft of the motor 140 for elevating (upwardly and downwardly moving) the air suction grill as described above. Reference numeral 141 represents a capacitor for the motor, and reference numeral 143 represents a timer for correction.

[0030] A pull switch (operating switch) is provided as an instructing unit to move the air suction grill 9 upwardly and downwardly as shown in Fig. 1. A rotary type pull switch is used as the pull switch 51, upon repetitive pull operation of the switch, the air suction grill elevating motor 140 repetitively performs "forward rotation", "stop"

and "backward rotation" in this order, and thus the air suction grill 9 also repetitively performs "downward motion", "stop", "upward motion" and "stop" in this order. As described above, the air suction grill repeats "downward motion", "stop", "upward motion" and "stop" in this order by operating the rotary switch, so that the air suction grill can be stopped at any position by a simple operation.

[0031] Next, means for stopping the elevating motor 140 when the air suction grill 9 reaches the upper limit position or the lower limit position will be described with reference to Fig. 5.

[0032] In response to an instruction from the pull switch 51, the controller 160 outputs to a driver circuit 305 a control signal for controlling the forward rotation and the backward rotation of the elevating motor 140. In response to the control signal from the controller 160, the driver circuit 305 drives the elevating motor 140 at a predetermined speed.

[0033] When the elevating motor 140 is rotated in one direction to upwardly move the air suction grill 9, the consumption current IC output from the driver circuit 305 to the motor is equal to about 170mA while the air suction grill does not reach the upper limit position. However, when the air suction grill 9 reaches the upper limit position (at least one corner (or side) of the air suction grill 9 abuts against the decorative panel 7), the elevating motor 140 is rotated against the frictional force which occurs between the main pulleys 100A and 100B whose rotational speed is reduced or stopped and the shaft 11 which continues to rotate, and thus the load imposed on the elevating motor 140 is increased by the amount corresponding to the frictional force. Therefore, the consumption current IC output from the driver 305 for the elevating motor 140 is also increased. At this time, for example, the consumption current IC of the motor 140 ranges from about 300 mA to about 350 mA.

[0034] When the elevating motor 140 is rotated in the other direction to downwardly move the air suction grill 9, the consumption current IC for the elevating motor 140 is equal to about 60 mA while the air suction grill 9 does not reach the lower limit position. However, the elevating motor 140 is still rotated by the driver circuit 305 even when the air suction grill 9 reaches the lower limit position, and thus the consumption current IC is increased to the range from about 100 mA to about 170 mA. That is, when the elevating motor 140 is still rotated even after the air suction grill 9 reaches the lower limit position as described above, the pulleys 100A and 100B are rotated to rewind the suspending ropes 31 after the whole suspending ropes are unreeled therefrom. When the pulleys 100A and 100B are rotated to rewind the suspending ropes 31, the substantially same load as when the air suction grill 9 is upwardly moved is imposed on the elevating motor 140, and thus the consumption current IC of the elevating motor 140 is increased to the range from about 100 mA to about 170 mA.

[0035] The driver circuit 305 is connected to con-

sumption current detecting means 307 through an amplifier 303. The consumption current detecting means 307 detects the consumption current IC of the elevating motor 140 at all times, and inputs the consumption current IC thus detected to the controller 160.

[0036] When the air suction grill 9 is in the progress of the upward motion and the consumption current IC is increased from 170mA to 300mA (first set value X) or more, the controller 160 outputs an operation stop command of the elevating motor 140, and also when the air suction grill 9 is in the progress of the downward motion and the consumption current IC is increased from 60mA to 100mA (second set value Y) or more, the controller 160 outputs the operation stop command of the elevating motor 140.

[0037] When the operation stop command for the elevating motor 140 is output, the output of the control signal to the driver circuit 305 is intercepted to stop the driving of the elevating motor 140. However, even if the operation stop command for the elevating motor 140 is output when the air suction grill is being upwardly moved and the consumption current IC is increased from 170mA to 300mA (first set value X) or more, the output of the control signal to the driver circuit 305 is not intercepted unless a predetermined time (for example, 4 seconds) is counted by a timer 309, and at the time when the predetermined time (for example, 4 seconds) is counted, the output of the control signal to the driver circuit 305 is intercepted to stop the driving of the elevating motor 140.

[0038] In the case of the upward motion of the air suction grill 9, in some cases a time difference may occur in rewinding time among the four suspending ropes 31 fixed to the air suction grill 9, and thus even when the air suction grill 9 arrives at the upper limit position at one suspending rope side, it does not completely arrive at the upper limit position at the other suspending rope sides, so that the air suction grill 9 is not perfectly upwardly moved to the upper limit position. The predetermined time as described above is set to an enough time which is needed until the other suspending ropes are also perfectly rewound up after one suspending rope is perfectly rewound up.

[0039] Next, the operation of this embodiment will be described with reference to Figs. 6 and 7.

[0040] In step S1, it is first judged whether the pull switch 51 is manipulated. The pull switch 51 may be manipulated by using a pull-down rod or the like to pull the pull switch 51. When it is judged that the pull switch 51 is manipulated, in step S2 the control signal to rotate the elevating motor 140 forwardly is output from the controller 301, and input to the driver circuit 305 to forwardly rotate the elevating motor 140 and downwardly move the air suction grill 9. In step S3, the consumption current IC for the elevating motor 140 which is output from the driver circuit 305 is detected by the consumption current detecting means 307. In this case, the air suction grill 9 is in the progress of the downward motion to the lower

limit position, and thus it detects the consumption current IC of about 60mA as a detection value.

[0041] In step S4, it is judged whether the pull switch 51 is manipulated again. If the pull switch 51 is judged to be manipulated, the process goes to step S8 to intercept the current flow into the elevating motor 140 and stop the air suction grill 9. However, if the pull switch 51 is not manipulated, the process goes to step S5 and the controller 160 judges whether the consumption current IC increases to 100mA or more as the second set value Y. If the consumption current IC does not increase to the second set value Y, the process returns to the step S3. On the other hand, if the consumption current IC increases to the second set value Y, the process goes to step S6 to output the operation stop signal from the controller 160.

[0042] In step S7, the controller 301 intercepts the control signal to be output to the driver circuit 305, whereby the current to be supplied to the elevating motor 140 is intercepted and the air suction grill 9 is stopped. Thereafter, the process goes to step S9.

[0043] In step S9, it is judged whether the pull switch 51 is manipulated. If the pull switch 51 is not manipulated, the process returns to the step S8. However, if the pull switch 51 is manipulated, the process goes to step S10 to output from the controller 301 the control signal for backwardly rotating the elevating motor 140, and the control signal is input to the driver circuit 305 to backwardly rotate the elevating motor 140 and upwardly the air suction grill 9. In step S11, the consumption current IC of the elevating motor 140 is detected by the consumption current detecting means 307. In this case, the air suction grill 9 is in the progress of the upward motion to the upper limit position, and thus the detection value of the consumption current IC is equal to about 170mA, for example.

[0044] In step S12, it is judged whether the pull switch 51 is manipulated again. If the pull switch 51 is manipulated, the process goes to step S13 in which the controller 301 intercepts the current to be supplied to the elevating motor 140 and the air suction grill 9 is stopped. However, if the pull switch 51 is not manipulated, the process goes to step S14 in which the controller 160 judges whether the consumption current IC increases to the first set value X, for example, 300mA or more. If the consumption current IC does not reach the first set value X, the process returns to the step S10. However, if the consumption current IC reaches the first set value X, a start command is output from the controller 160 to the timer 309 in step S15, and then the process goes to step S16.

[0045] In step S16, in response to the start command, the timer 309 is started. The set time of the timer 309 is set to 4 seconds, for example. In step S17, it is judged when the time counted by the timer 309 reaches the set time (for example, 4 seconds). If the count time of the timer 309 is beyond 4 seconds, the process goes to step S18 to output the operation stop signal from the control-

ler 301, and then the process goes to step S19. In step S19, the controller 301 which outputs the operation stop signal intercepts the control signal to be output to the driver circuit 305, whereby the elevating motor 140 is stopped and thus the air suction grill 9 is stopped. Thereafter, the process returns to the step S1.

[0046] That is, when the air suction grill 9 arrives at the upper limit position, the timer 309 counts the set time (4 seconds) and then the elevating motor 140 is stopped. Therefore, the elevating motor 140 continues to be rotated for 4 seconds. During this time (4 seconds), the main pulleys 100A and 100B are rotated while following the rotation of the shaft, and the suspending ropes 31 are strongly rewound, whereby the four corners of the air suction grill 9 is substantially surely brought into close contact with the decorative panel 7.

[0047] According to this embodiment of the present invention, in the process of the downward motion of the air suction grill 9, the downward motion of the air suction grill 9 is stopped (S8) by pulling the pull switch 51 as described above, so that the air suction grill 9 can be temporarily stopped at any position. Although the illustration is omitted from Fig. 1, the air cleaning filter 24 (Fig. 4) is mounted on the upper portion of the air suction grill 9. Therefore, when the air suction grill 9 is pulled down from the ceiling 6 and temporarily stopped, the works of replacing the filter 24, cleaning the filter 24, etc. can be performed at a lower place. Accordingly as compared with works at a higher place, not only the works can be more readily performed, but also the safety for the works can be enhanced.

[0048] That is, according to this embodiment, by operating the pull switch 51 to drive the motor 140 for elevating the air suction grill, the shaft 110 is driven to rotate the main pulleys 100A and 100B which are linked through the clutch to the shaft 110, and the suspending ropes 31 which are wound around the main pulleys 100A and 100B are unreeled/rewound to thereby automatically move the air suction grill 9 upwardly and downwardly. Therefore, when a maintenance work is performed on the air cleaning filter 24, the work may be performed after the air cleaning filter 24 is pulled down to the lower position (or any position).

[0049] Further, it is sufficient to provide only one motor 140 for elevating the air suction grill, and thus the cost-up can be suppressed, and the construction becomes simpler and the trouble rate can be reduced to a smaller level as compared with the case where plural motors 140 for elevating the air suction grill are provided. Further, when an excessive load is imposed, the clutch operates to make the shaft 110 turn free, so that the burning of the motor 140 can be prevented.

[0050] According to this embodiment, when the air suction grill 9 is downwardly moved, the consumption current IC supplied to the elevating motor 140 is detected, and the air suction grill 9 is regarded as arriving at the lower limit position when the consumption current IC increases from 60mA to 100mA. At this time, the cur-

rent to be supplied to the elevating motor 140 is intercepted to stop the elevating motor 140, whereby the air suction grill 9 is stopped. Therefore, as compared with the case where the air suction grill 9 is stopped at the lower limit position by using a mechanical mechanism such as a limit switch or the like, the number of parts can be reduced to a smaller value, the construction can be more simplified, the cost can be more greatly reduced and the trouble rate can be also more lowered.

[0051] Likewise, when the air suction grill 9 is upwardly moved, the consumption current IC supplied to the elevating motor 140 is detected, and the air suction grill 9 is regarded as arriving at the upper limit position when the consumption current IC increases from 170mA to 300mA. At this time, the current to be supplied to the elevating motor 140 is intercepted to stop the elevating motor 140, whereby the air suction grill 9 is stopped. Therefore, as compared with the case where the air suction grill 9 is stopped at the lower limit position by using a mechanical mechanism such as a limit switch or the like, the number of parts can be reduced to a smaller value, the construction can be more simplified, the cost can be more greatly reduced and the trouble rate can be also more lowered.

[0052] Further, when the air suction grill 9 is suspended by the suspending ropes 31, the four suspending ropes are not necessarily kept equal in length so that the air suction grill 9 is kept in a horizontal position. That is, the air suction grill 9 may be lifted with being inclined. However, according to this embodiment, even when the air suction grill 9 is lifted in an inclined position, the timer 309 operates to count the predetermined time (for example, 4 seconds) after the air suction grill 9 arrives at the upper limit position, and then the rotation of the elevating motor 140 is stopped after 4 seconds elapses. During this predetermined time, the rotation of the main pulleys 100A and 100B is continued until all the suspending ropes 31 are perfectly rewound, so that the air suction grill 9 is perfectly lifted up until it is kept in a horizontal position and brought into close contact with the decorative panel 7. In this case, the main pulley 100A, 100B around which one of the four suspending ropes 31 has been perfectly rewound is stopped against the rotation on the shaft portion of the shaft 110 as described above.

[0053] Further, even if any unbalance in length occurs between the four suspending ropes 31 in the progress of the rewinding operation of the suspending ropes 31, when the air suction grill 9 has been finally rewound, the unbalance in length between the suspending ropes 31 is absorbed by the stop of the main pulleys 100A, 100B, so that the air suction grill 9 is brought into perfectly close contact with the decorative panel 7 and no gap occurs therebetween.

[0054] Still further, according to this embodiment, the controller 160, the consumption current detecting means 307 and the timer 309, that is, a small number of parts are used as a mechanism for stopping the air

suction grill 9 at the upper limit position after the air suction grill 9 is upwardly moved, so that the cost can be reduced by the amount corresponding to the reduced number of parts, and also the failure rate can be reduced.

[0055] The upwardly moved air suction grill 9 may be fixed to the decorative panel through air suction grill lock means (not shown). However, the lock means is not indispensable, and it is omitted in this embodiment. As a simple air suction grill lock means, a magnet 43 may be provided to the decorative panel 7 as shown in Fig. 1 to lock the air suction grill 9 by the magnet 43.

[0056] The present invention is not limited to the above embodiment, and various modifications may be made.

[0057] For example, the means for absorbing the different in length between the suspending ropes fixed to the right and left sides of the air suction grill 9 after the air suction grill 9 arrives at the upper limit position is not limited to the combination of the main pulleys 100A and 100B and the shaft 11 which are frictionally engaged with each other, and the timer 309. For example, a lever for pulling up the suspending ropes 31 by a spring force may be provided between the main pulley 100B and the rope guide 200.

[0058] In this case, when the air suction grill 9 arrives at the upper limit position while being inclined, the tension of the suspending rope 31 at one of the right and left sides of the air suction grill 9, which first arrives at the upper limit position, is increased, and it pulls down the lever against the spring force. Therefore, the suspending rope 31 is rewound by the amount corresponding to the pull-down of the lever. Accordingly, the other side of the air suction grill 9 which does not reach the upper limit position can be upwardly moved to the upper limit position.

[0059] Besides, the rope guides 200 may be designed to be upwardly urged by the spring force. In this case, when the air suction grill 9 arrives at the upper limit position while being inclined, the tension of the suspending rope 31 at one of the right and left sides of the air suction grill 9, which first arrives at the upper limit position, is increased, and it pushes down the rope guide 200 against the spring force. Therefore, the suspending rope 31 is rewound by the amount corresponding to the push-down of the rope guide 200. Accordingly, the other side of the air suction grill 9 which does not reach the upper limit position can be upwardly moved to the upper limit position.

[0060] Further, the present invention is applied to an air conditioner having no air suck-in port in the elevating panel as shown in Figs. 8 to 10.

[0061] In Fig. 8, reference numeral 2000 represents a box type unit body which is embedded in the ceiling. A heat exchanger 1600, an air blower 1000, etc. are accommodated in the unit body 2000 as shown in Fig. 9. Further, a decorative panel 700 having air blow-out ports 400 at the both ends thereof is fixed to the lower end of

the unit body 2000, and a filter receiving member 501 of metal plate is engagedly held at an inward portion of the center opening of the decorative panel 700. Further, air filters 240 are brought into contact with receiving portions 501a of the filter receiving member 501, and a center panel (elevating panel) 900 of metal plate is provided at the front portion of the center opening of the decorative panel 700 so that a space serving as an air suck-in port 300 remains at each of both the sides thereof.

[0062] As shown in Fig. 8, the air filters 240 are mounted on the center panel 900 through leg portions 100, and these air filters 240 are suspended to the decorative panel 700 through four ropes 310 so as to be freely movable upwardly and downwardly relatively to the decorative panel 700.

[0063] As shown in Fig. 10, respective one ends 310a of the four suspending ropes 310 are fixed to the center panel 900 at suitable four places thereof. The other ends of the four suspending ropes 310 are extended upwardly, wound around the rollers 210, extended in a substantially horizontal direction and then linked to an elevating mechanism 1500 having the same construction as the first embodiment. The elevating mechanism 1500 is fixed onto a metal plate 1510 which is bridged substantially at the center of the open portion of the decorative panel 700 as shown in Fig. 8.

[0064] According to the present invention, the air filters 240 are provided on the center panel 900 of metal plate through the leg portions 100. Therefore, even when vibration occurs during the upward or downward motion of the center panel 900, dust which is attached to the air filters 240 falls onto the upper surface of the center panel, and collected there. Accordingly, during a work of replacing the air filters 240 or the like, the dust attached to the filters 240 is prevented from falling onto the floor, and thus this makes the room very sanitary. Therefore, even when the present invention is applied to air conditioners in factories, stores, etc. for food, the trouble due to falling of dust can be perfectly avoided.

[0065] According to the present invention, when the detection result of the consumption current detecting means is beyond the predetermined set value in the progress of the upward motion of the elevating panel, the operation stop command is output to stop the elevating motor. Therefore, when the elevating panel arrives at the upper limit position, the elevating panel can be stopped. In this case, the number of parts can be reduced, so that the cost can be lowered and the failure rate can be also reduced.

[0066] According to the present invention, when in the progress of the downward motion of the elevating panel, the elevating panel arrives at the lower limit position and the consumption current is equal to the set value or more, the elevating motor can be immediately stopped. In this case, the number of parts can be also reduced, so that the cost can be lowered and the failure rate can be reduced.

[0067] According to the present invention, the motion of the elevating panel can be freely switched between the upward motion and the downward motion, and the above effect can be obtained in both the upward motion and the downward motion of the elevating panel. When the consumption panel is over the set value in the progress of the upward motion of the elevating panel, the elevating motor is set to be stopped after a predetermined time elapses. Therefore, after the elevating panel arrives at the upper limit position, the elevating panel can be stopped after the four corners of the elevating panel can be brought into close contact with the bottom face of the in-ceiling type air conditioner to correct the inclination of the elevating panel. In this case, the number of parts can be reduced, so that the cost can be lowered and the failure rate can be also reduced.

[0068] According to the present invention, when the consumption current is over the set value in the progress of the upward motion of the elevating panel, the elevating motor is set to be stopped after a predetermined time elapses. Therefore, after the elevating panel arrives at the upper limit position, the elevating panel can be stopped after the four corners of the elevating panel can be brought into close contact with the bottom face of the in-ceiling type air conditioner to correct the inclination of the elevating panel. In this case, the number of parts can be reduced, so that the cost can be lowered and the failure rate can be also reduced.

Claims

1. An in-ceiling type air conditioner including an unit body which contains a heat exchanger and an air blower and is mounted in the ceiling, a decorative panel provided on the ceiling face, and an elevating panel with an air filter, to which one ends of suspending ropes are fixed, the other ends of the suspending ropes being fixed to pulleys which are rotationally driven by an elevating motor, said suspending ropes being unreeled/rewound by actuating said elevating motor to move said elevating panel upwardly and downwardly, **characterized in that** said in-ceiling type air conditioner further including:

consumption current detecting means for detecting the consumption current of said elevating motor;

stop instructing means for outputting an operation stop instruction when the detection result of said consumption current detecting means is over a predetermined set value during the upward or downward motion of said elevating panel; and

motor stop control means for stopping said elevating motor in response to the operation stop instruction from said stop instruction means.

2. The in-ceiling type air conditioner as claimed in claim 1, wherein said stop instruction means outputs the operation stop instruction when the detection result of said consumption current detecting means is over a first set value during the upward motion of said elevating panel, or when the detection result of said consumption current detecting means is over a second set value during the downward motion of said elevating panel.
3. The in-ceiling type air conditioner as claimed in claim 1 or 2, wherein said motor stop control means stops said elevating motor when a predetermined time elapses after receiving the operation stop instruction from said stop instruction means.
4. The in-ceiling type air conditioner as claimed in claim 3, further including a timer for counting the predetermined time after the operation stop instruction is output, wherein said motor stop control means stops said elevating motor in response to the output result of said timer.
5. A control device for controlling the upward and downward motion of an elevating panel of an in-ceiling type air conditioner, comprising:
 - an elevating motor for moving said elevating panel upwardly and downwardly;
 - a driver circuit for supplying an operating current to said elevating motor to rotate said elevating motor forwardly and backwardly;
 - a controller for outputting a control signal to said driver circuit and controlling said driver circuit on the basis of the control signal;
 - a consumption current detector for detecting the consumption current of said elevating motor at all times to output a detection result to said controller;
 - a timer for counting a predetermined time and outputting the count result to said controller, wherein when the consumption current detected by said consumption current detector exceeds a predetermined value during the upward or downward motion of said elevating panel, said controller outputs an operation stop instruction to said driver circuit to stop the rotation of said elevating motor and thus stop said elevating panel.
6. The control device as claimed in claim 5, wherein the predetermined time is set to such an enough time that the overall periphery of said elevating panel can perfectly arrive at the upper limit position of the upward motion or at the lower limit position of the downward motion thereof, whereby said elevating panel is kept in a horizontal position when arriving at the upper limit position or lower limit position.

Patentansprüche

1. Klimagerät für Deckenmontage mit einem Hauptteil der Baueinheit, der einen Wärmetauscher und ein Luftgebläse enthält, und der an der Decke montiert ist, einem dekorativen Paneel, das an der Deckenstirnseite vorgesehen ist, und einem Hebepaneel mit einem Luftfilter, an welchem die einen Enden von Aufhängeseilen befestigt sind, die anderen Enden der Aufhängeseile sind an Riemenscheiben befestigt, die durch einen Hebemotor drehend angetrieben werden, wobei die Aufhängeseile durch Betätigen des Hebemotors abgewickelt/aufgewickelt werden, um das Hebepaneel auf und ab zu bewegen, **dadurch gekennzeichnet, dass** das Klimagerät für Deckenmontage weiter aufweist:

Verbrauchsstromdetektiermittel zum detektieren des Verbrauchstroms des Hebemotors;
 Stoppbefehlsmittel zum Ausgeben eines Betriebsstoppbefehls, wenn das Ergebnis der Detektion ist, das die Verbrauchsstromdetektiermittel während der Aufwärts- oder Abwärtsbewegung des Hebepaneels über einem vorbestimmten, eingestellten Wert sind; und
 Motorstoppsteuermittel zum Stoppen des Hebemotors in Antwort auf den Betriebsstoppbefehl von den Stoppbefehlsmitteln.

2. Klimagerät für Deckenmontage nach Anspruch 1, wobei die Stoppbefehlsmittel den Betriebsstoppbefehl ausgeben, wenn das Ergebnis der Detektion der Verbrauchsstromdetektiermittel während der Aufwärtsbewegung des Hebepaneels über einem ersten eingestellten Wert ist, oder wenn das Detektionsergebnis der Verbrauchsstromdetektiermittel während der Abwärtsbewegung des Hebepaneels über einem zweiten, gesetzten Wert ist.
3. Klimagerät für Deckenmontage nach Anspruch 1 oder 2, wobei die Motorstoppsteuermittel den Hebemotor stoppen, wenn nach dem Empfangen des Betriebsstoppbefehls von den Stoppbefehlsmitteln eine vorbestimmte Zeit abgelaufen ist.
4. Klimagerät für Deckenmontage nach Anspruch 3, ferner mit einem Zeitschalter zum Zählen der vorbestimmten Zeit nachdem der Betriebsstoppbefehl ausgegeben worden ist, wobei die Motorstoppsteuermittel den Hebemotor in Antwort auf das Ausgangsergebnis dieses Zeitschalters stoppen.
5. Steuervorrichtung zum Steuern der Aufwärts- und Abwärtsbewegung eines Hebepaneels eines Klimagerätes für Deckenmontage, mit:
 - einem Hebemotor zum Aufwärts- und Abwärtsbewegen des Hebepaneels;

einer Treiberschaltung zum Zuführen eines Betriebsstromes zu dem Hebemotor, um den Hebemotor nach vorwärts oder rückwärts zu drehen;

einer Steuerung zum Ausgeben eines Steuerungssignals an die Treiberschaltung und Steuern der Treiberschaltung auf der Basis des Steuerungssignals;

einen Verbrauchsstromdetektor zum Detektieren des Verbrauchsstroms des Hebemotors zu allen Zeitpunkten, um ein Detektionsergebnis an die Steuerung auszugeben;

einen Zeitschalter zum Zählen einer vorbestimmten Zeit und Ausgeben des Zählergebnisses an die Steuerung, wobei wenn der Verbrauchsstrom, welcher von den Verbrauchsstromdetektor detektiert worden ist, einen vorbestimmten Wert während der Aufwärts- oder Abwärtsbewegung des Hebepaneels überschreitet, die Steuerung einen Betriebsstoppbefehl an die Treiberschaltung ausgibt, um die Rotation des Hebemotors und damit das Hebepaneel zu stoppen.

6. Steuervorrichtung nach Anspruch 5, wobei die vorbestimmte Zeit auf eine solche ausreichende Zeit gesetzt ist, dass der Gesamtumfang des Hebepaneels perfekt an der oberen Grenzposition der Aufwärtsbewegung oder an der unteren Grenzposition der Abwärtsbewegung ankommen kann, wodurch das Hebepaneel in einer horizontalen Position gehalten wird, wenn es an der oberen Grenzposition oder der unteren Grenzposition ankommt.

Revendications

1. Climatiseur pour plafond comprenant un corps qui contient un échangeur de chaleur et un ventilateur de soufflage d'air et qui est monté dans le plafond, un panneau décoratif prévu sur la face du plafond, et un panneau élévateur avec un filtre à air, auquel des premières extrémités de câble de suspension sont fixées, les autres extrémités des câbles de suspension étant fixées à des poulies qui sont entraînées en rotation par un moteur d'élévation, les dits câbles de suspension étant déroulés / réenroulés par activation du dit moteur d'élévation de façon à déplacer le dit panneau élévateur vers le haut et vers le bas,
- caractérisé en ce que** le dit climatiseur pour plafond comprend en outre :

un moyen de détection de courant consommé, pour détecter le courant consommé du dit moteur d'élévation ;

un moyen d'instruction d'arrêt, pour émettre une instruction d'arrêt de fonctionnement lors-

que le résultat de détection du dit moyen de détection de courant consommé est supérieur à une valeur de consigne prédéterminée pendant la montée ou la descente du dit panneau élévateur ; et

un moyen de commande d'arrêt de moteur, pour arrêter le dit moteur d'élévation en réponse à l'instruction d'arrêt de fonctionnement fournie par le dit moyen d'instruction d'arrêt.

2. Climatiseur pour plafond selon la revendication 1, dans lequel le dit moyen d'instruction d'arrêt émet l'instruction d'arrêt de fonctionnement lorsque le résultat de détection du dit moyen de détection de courant consommé est supérieur à une première valeur de consigne pendant la montée du dit panneau élévateur, ou lorsque le résultat de détection du dit moyen de détection de courant consommé est supérieur à une deuxième valeur de consigne pendant la descente du dit panneau élévateur.

3. Climatiseur pour plafond selon la revendication 1 ou 2, dans lequel le dit moyen de commande d'arrêt de moteur arrête le dit moteur d'élévation lorsqu'un temps prédéterminé est écoulé après réception de l'instruction d'arrêt de fonctionnement fournie par le dit moyen d'instruction d'arrêt.

4. Climatiseur pour plafond selon la revendication 3, comprenant en outre une minuterie pour compter le temps prédéterminé après émission de l'instruction d'arrêt de fonctionnement, dans lequel le dit moyen de commande d'arrêt de moteur arrête le dit moteur d'élévation en réponse au résultat de sortie de la dite minuterie.

5. Dispositif de commande pour commander la montée et la descente d'un panneau élévateur d'un climatiseur pour plafond, comprenant :

un moteur d'élévation pour déplacer le dit panneau élévateur vers le haut et le bas ;

un circuit d'excitation pour fournir un courant d'alimentation au dit moteur d'élévation afin de faire tourner le dit moteur d'élévation en sens direct et en sens inverse ;

une unité de commande pour fournir un signal de commande au dit circuit d'excitation et commander le dit circuit d'excitation sur la base du signal de commande ;

un détecteur de courant consommé pour détecter le courant consommé du dit moteur d'élévation, en permanence, afin de fournir un résultat de détection à la dite unité de commande ;

une minuterie pour compter un temps prédéterminé et fournir le résultat de compte à la dite unité de commande, de sorte que, lorsque le courant consommé détecté par le dit détecteur

de courant consommé dépasse une valeur prédéterminée pendant la montée ou la descente du dit panneau élévateur, la dite unité de commande fournit une instruction d'arrêt de fonctionnement au dit circuit d'excitation afin d'arrêter la rotation du dit moteur d'élévation et donc d'arrêter le dit panneau élévateur. 5

6. Dispositif de commande selon la revendication 5, dans lequel le temps prédéterminé est réglé à une valeur suffisante telle que toute la périphérie du dit panneau élévateur peut parfaitement arriver à la position limite supérieure de sa montée ou à la position limite inférieure de sa descente, le dit panneau élévateur étant ainsi maintenu dans une position horizontale lorsqu'il arrive à la position limite supérieure ou à la position limite inférieure. 10 15

20

25

30

35

40

45

50

55

FIG. 1

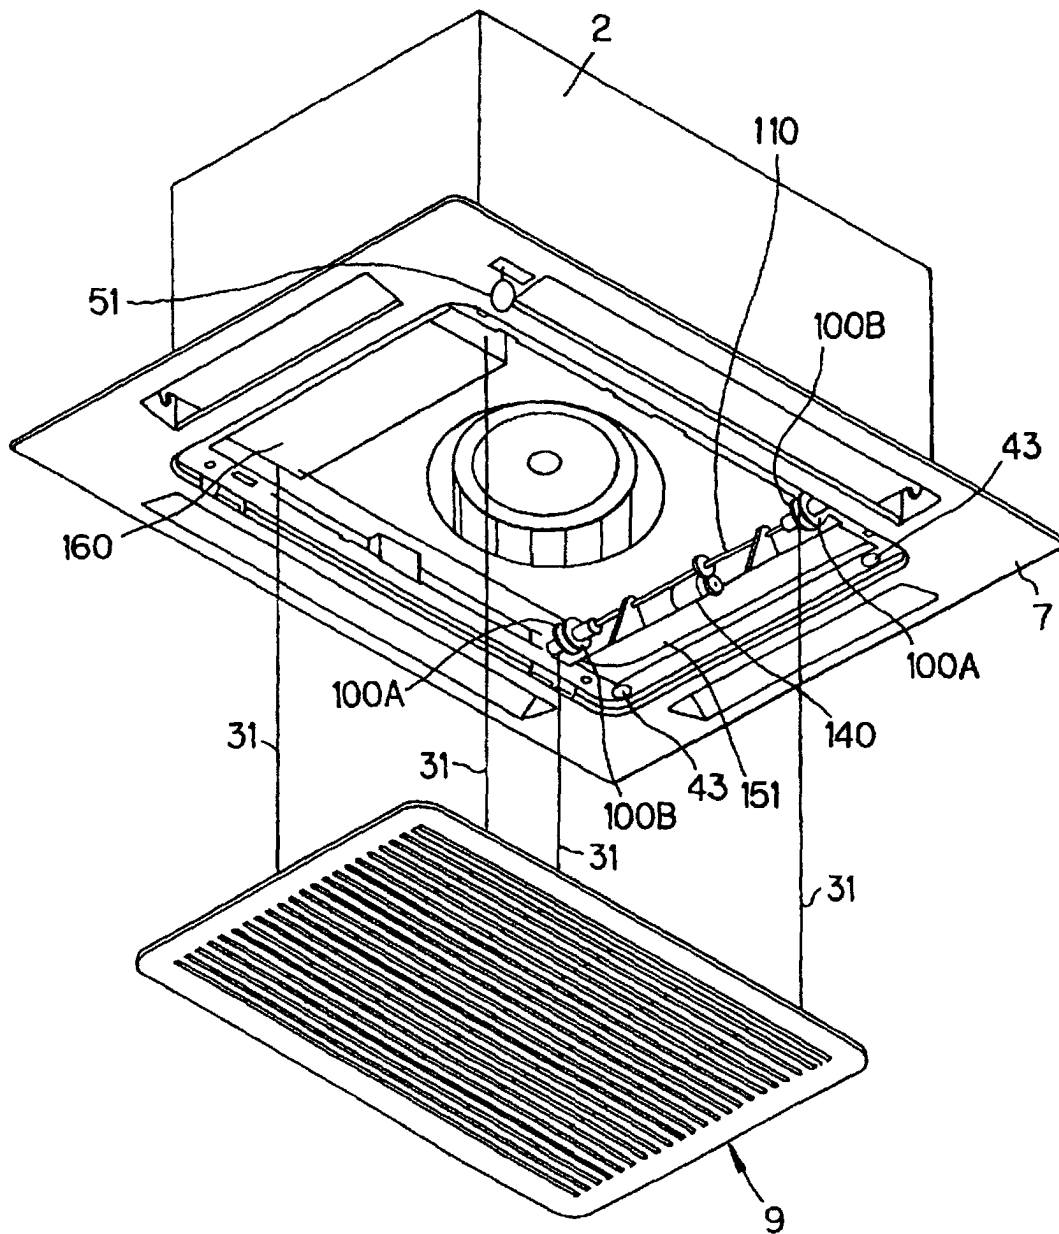


FIG. 2

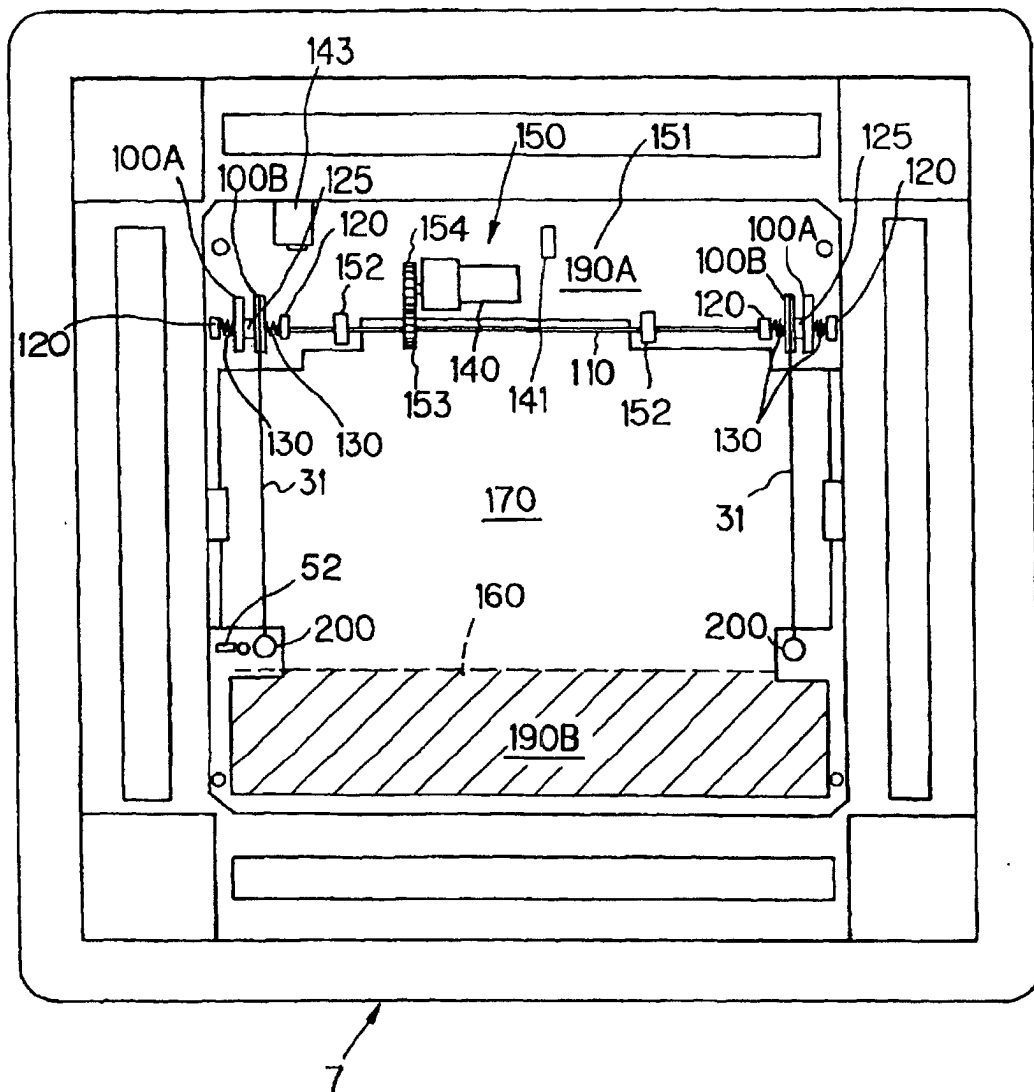


FIG. 3

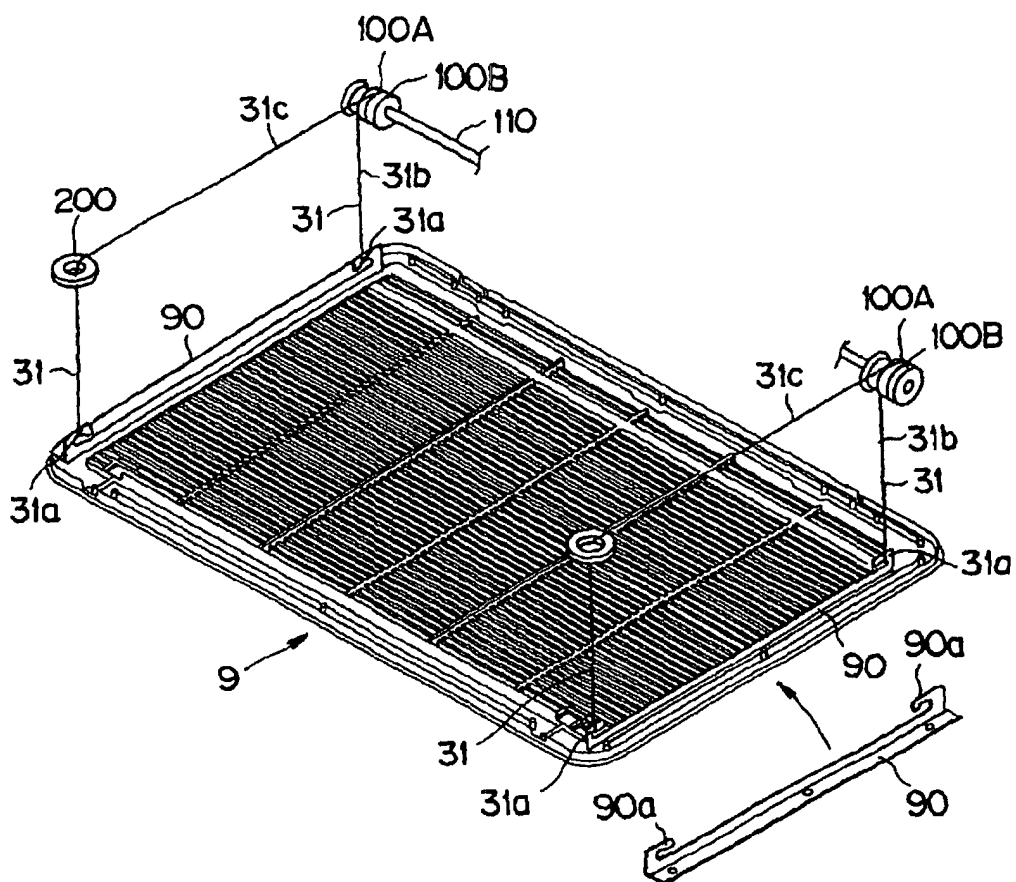


FIG. 4

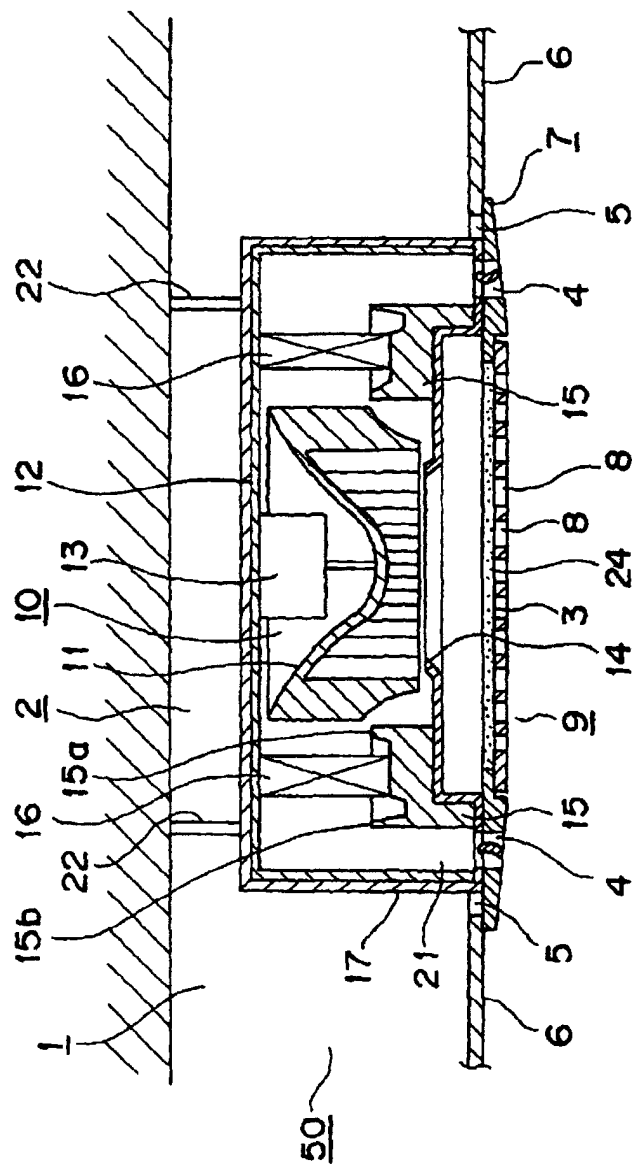


FIG. 5

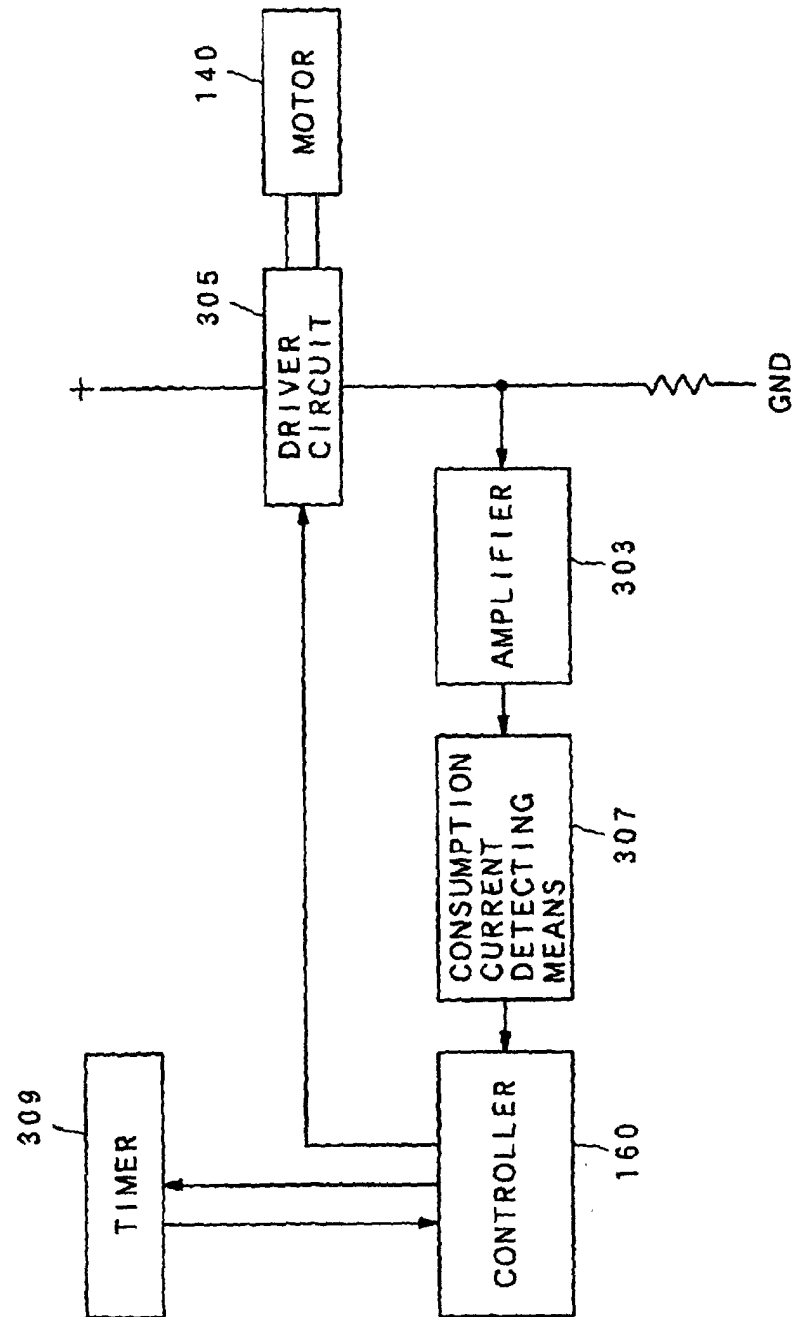


FIG. 6

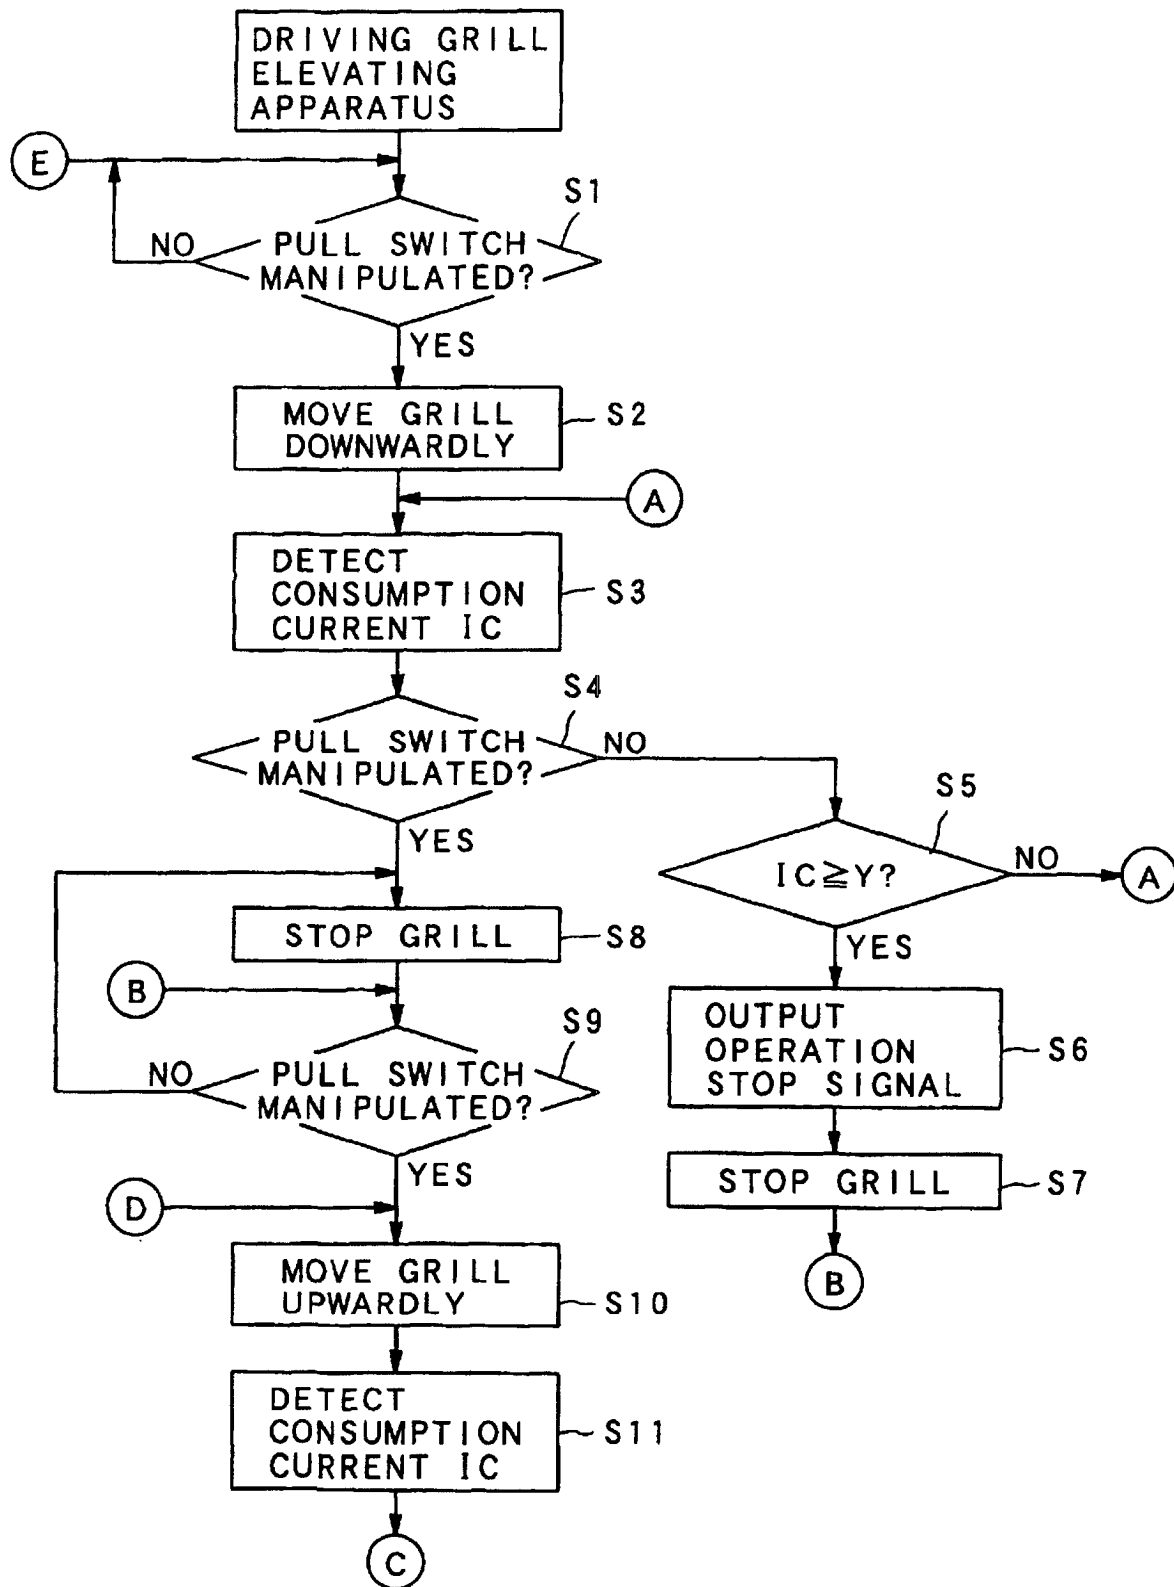


FIG. 7

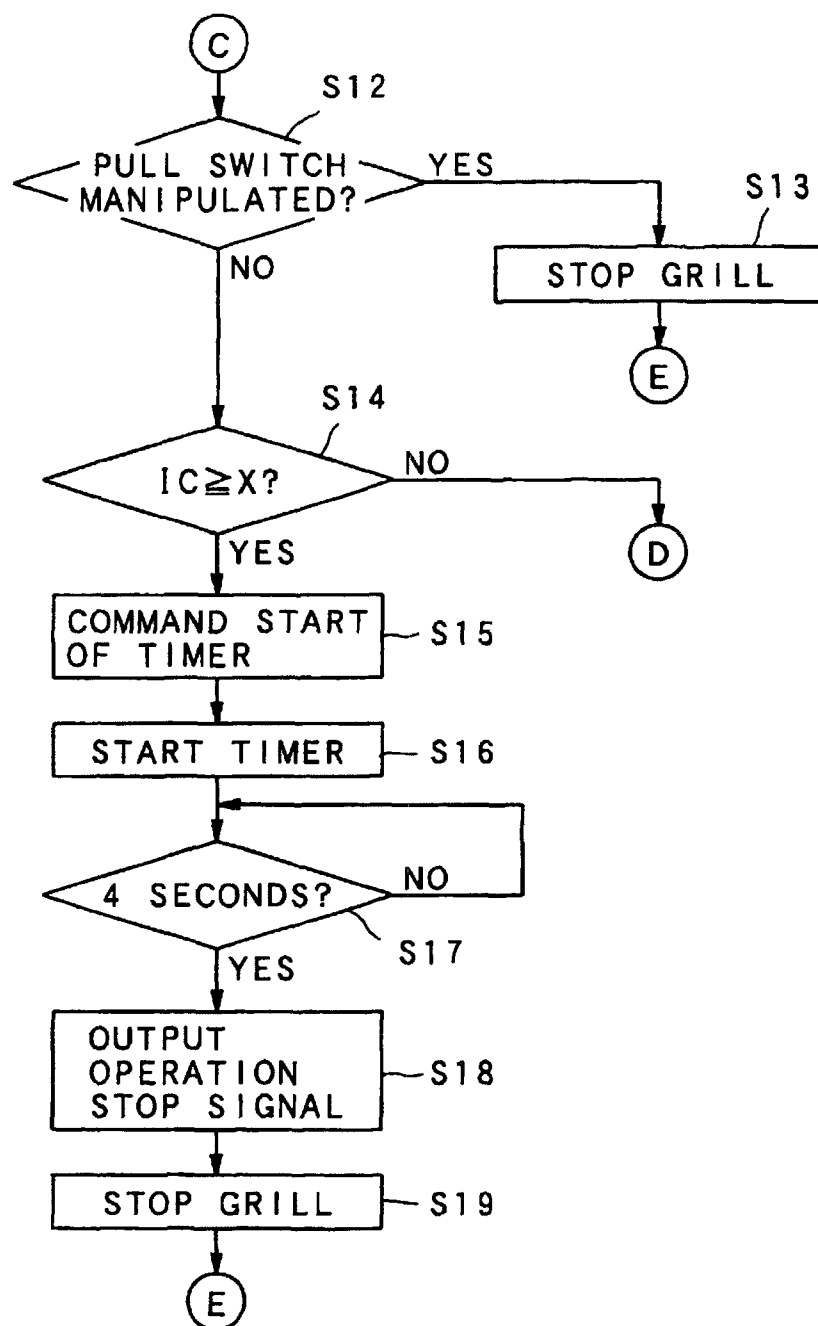


FIG. 8

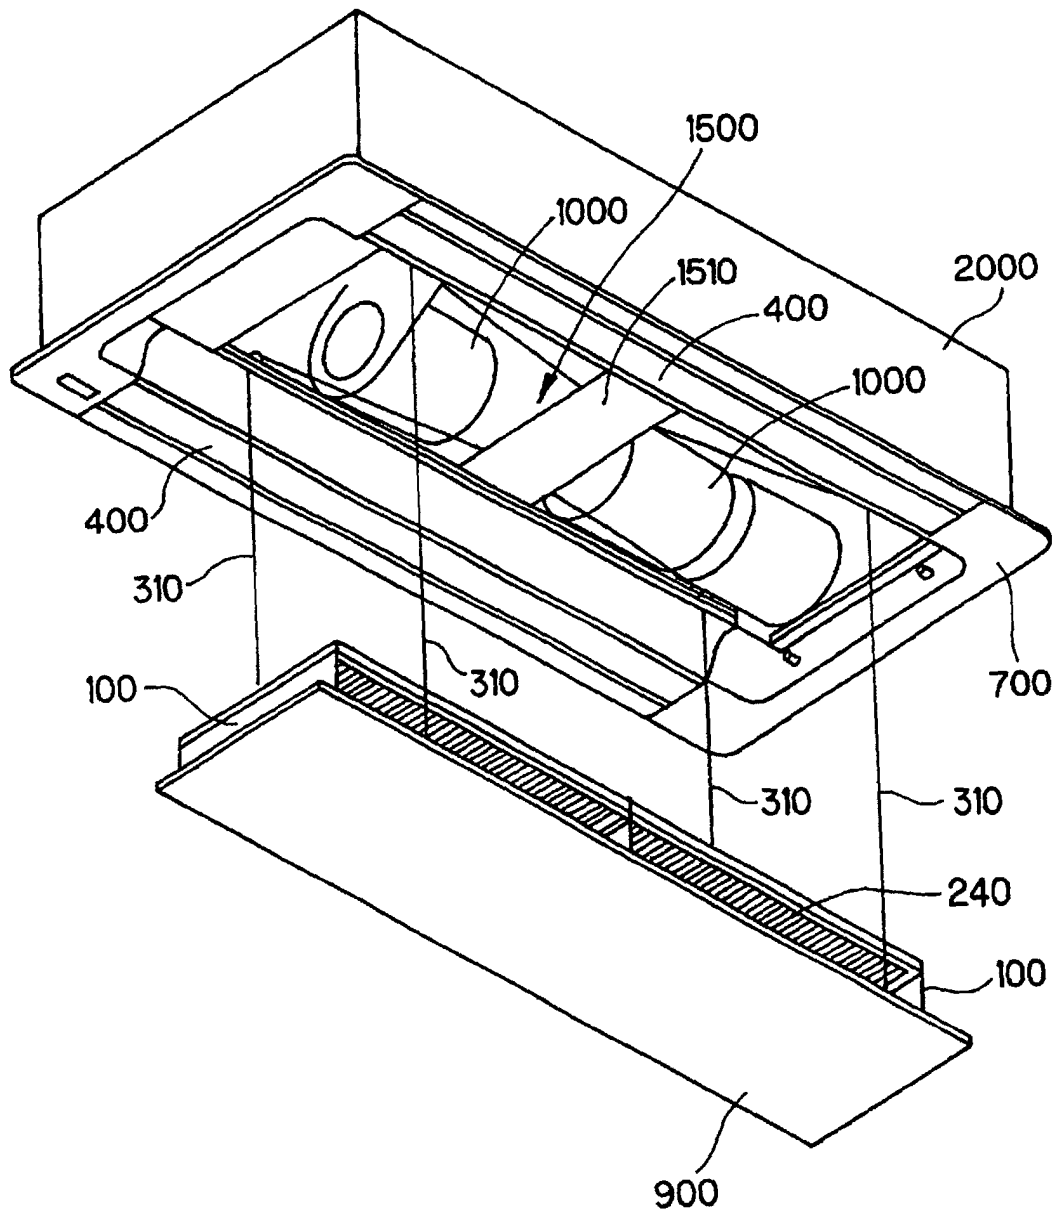


FIG. 9

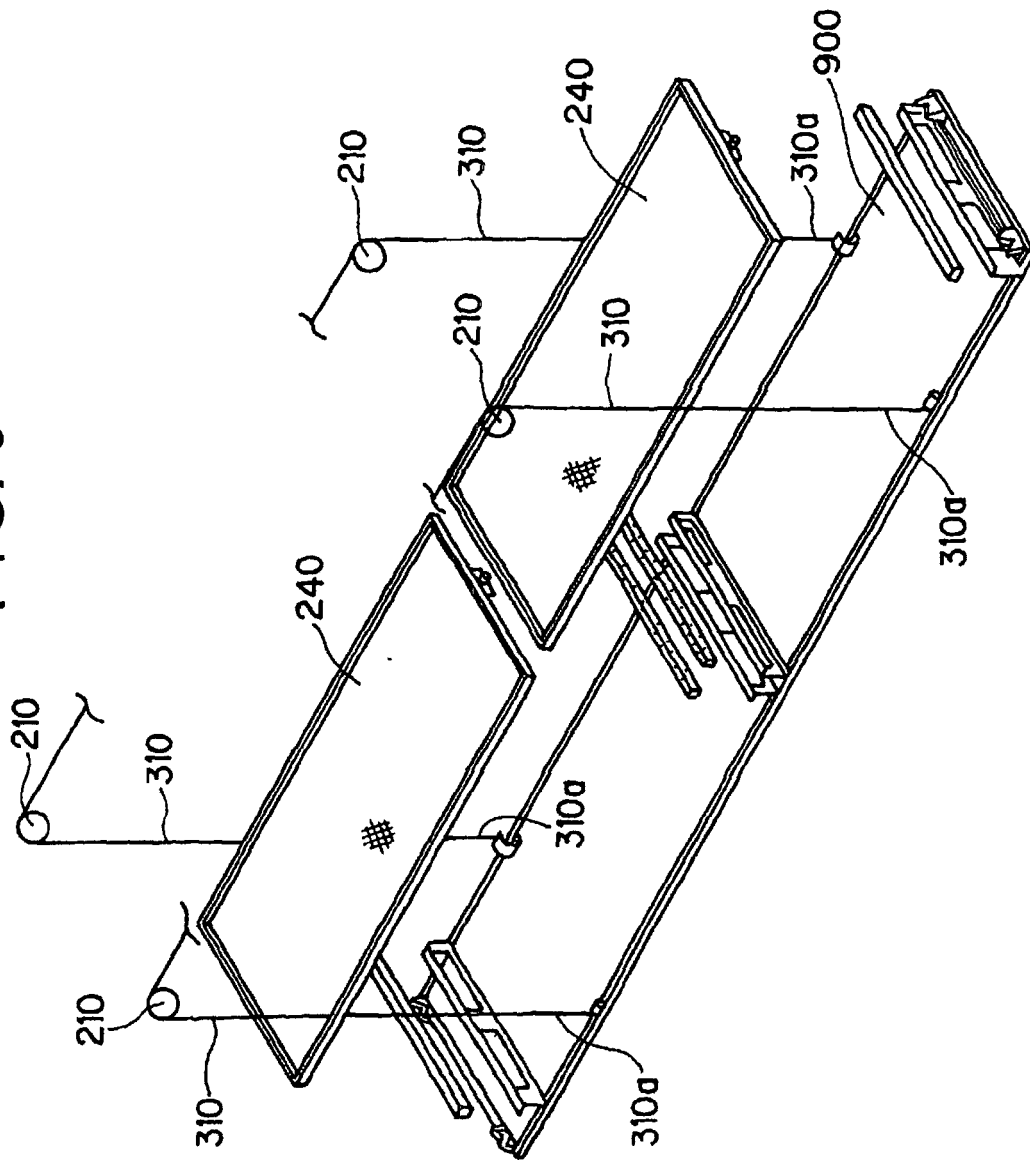


FIG.10

