

(12) **EUROPEAN PATENT SPECIFICATION**

- (45) Date of publication of patent specification: **11.01.84** (51) Int. Cl.³: **B 22 D 11/06**
(21) Application number: **80104010.6**
(22) Date of filing: **11.07.80**

(54) **Apparatus providing continuous expandable quench surface and casting method.**

(30) Priority: **17.08.79 US 67256**

(43) Date of publication of application:
18.03.81 Bulletin 81/11

(45) Publication of the grant of the patent:
11.01.84 Bulletin 84/2

(84) Designated Contracting States:
DE FR GB IT

(56) References cited:
US - A - 4 124 664
US - A - 4 142 571
US - A - 4 155 397

(73) Proprietor: **ALLIED CORPORATION**
Columbia Road and Park Avenue P.O. Box 2245R
(Law Dept.)
Morristown New Jersey 07960 (US)

(72) Inventor: **Draizen, Seymour**
4 Bertrand Street
Old Bridge New Jersey 08857 (US)
Inventor: **Sossong, Henry John**
19 Deer Run, Drive
Randolph New Jersey 07869 (US)

(74) Representative: **Weber, Dieter, Dr. et al,**
Dr. Dieter Weber und Klaus Seiffert
Patentanwälte Gustav-Freytag-Strasse 25
D-6200 Wiesbaden 1 (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Apparatus providing continuous expandable quench surface and casting method

Background of the Invention

This invention relates generally to the substantial reduction of thermal distortion of a continuous casting quench surface. Specifically, this invention provides for radially unrestrained thermal growth of a hoop-like quench surface of a quench wheel in the continuous casting of glassy alloy filaments.

Extruding a molten alloy from a pressurized crucible through a nozzle onto a rotating quench surface is one of several technologically significant methods available for the continuous casting of continuous glassy alloy filaments, as representatively shown in US—A—4,142,571, which discloses an apparatus and a method for continuously casting metallic filament according to the precharacterising parts of claims 1 and 6. Typically, such filaments are continuously cast as thin strips, as required to achieve the extreme quench rates in quenching a molten alloy to the glassy state.

To maintain transverse cross-sectional constancy along the length of the strip as cast, it is essential that a geometrically stable quench surface be provided. In this regard, a substantial problem, referred to as "crowning", has been encountered, whereby thermal distortion of the hoop-like quench surface of the quench wheel causes the quench surface to bow radially outward, since the hot quench surface is restrained along its periphery by the cool side disk of the quench wheel ("discontinuity stress"). Thus, in steady-state continuous casting with the quench wheel at thermal equilibrium, the bowing of the quench surface is undesirable induced in the transverse cross-sectional shape of the cast filament.

Summary of the Invention

The present invention substantially eliminates the problem of quench surface crowning in quench wheel continuous casting by providing for the unrestrained radial thermal growth of the hoop-like quench surface in a manner that also maintains concentricity of the quench surface with its shaft of rotation and further provides circumferential support against the torque loads of rotation so that the hot, expanded hoop-like quench surface does not slip on its underlying rotative drive disk.

The method of the invention for continuously casting metallic filaments, especially glassy alloy strips, by directing a stream of molten alloy onto a hoop-like quench surface of a rotating quench wheel, is characterized in that unrestrained radial thermal growth of the quench surface is allowed while maintaining its concentricity in a fixed angular relationship with the rotating quench wheel.

The apparatus of the invention for continuously casting metallic filaments by directing a stream of molten alloy onto a rotating quench surface, comprising a quench wheel having a

rotative drive disk, about a shaft of rotation, concentrically supporting a hoop-like quench surface is characterized in that the apparatus has expansion means for allowing unrestrained radial thermal growth of the quench surface while maintaining its concentricity in a fixed angular relationship with the drive disk.

The expansion means preferably comprise at least three radial expansion joints connecting the quench surface and the drive disk, which are symmetrically situated with respect to the shaft of rotation. More preferably, six such expansion joints are utilized.

Brief Description of the Drawings

Further details are given below with reference to the embodiments shown in the drawings wherein:

Fig. 1 is an illustration of typical prior art apparatus for the continuous casting of glassy alloy continuous filaments in which a molten stream is extruded from a pressurized crucible through an extrusion nozzle onto the quench surface of a rotating quench wheel.

Fig. 2 is an axial partial cross-section of the quench wheel illustrating the problem of crowning or thermal-bowing of the hot quench surface as compared to its cold position.

Figs. 3 and 3A show an embodiment of the present invention, wherein the quench surface is secured to the quench wheel by three sliding-pin radial expansion joints.

Figs. 4 and 4A show two embodiments of the sliding-pin expansion joint.

Fig. 5 shows an alternative sliding-key radial expansion joint.

Description of the Preferred Embodiments

Referring specifically to the drawings, in Fig. 1, typical prior art apparatus for the continuous casting of a glassy alloy filament is illustrated to point out the general use of the present invention. The molten alloy is contained in a crucible 11 provided with a heating element 12. Pressurization of the crucible 11 with an inert gas causes a molten stream to be extruded through a nozzle 13 at the base of the crucible 11 onto a quench surface 14 of a rotating quench wheel 17. The solidified, moving filament 16, after its break away point from the quench surface 14 is typically routed through a tension regulator and finally onto a winder (not shown).

The quench wheel is provided with conventional cooling means (not shown) for maintaining the quench surface at a substantially constant temperature during continuous casting, by contacting the quench surface with a cooling liquid or gas. For example, cooling water may be circulated through the interior of the quench wheel, or the quench surface may be externally spray-cooled.

The quench surface is conventionally made

of an alloy, such as beryllium copper, generally having most of the desired characteristics of high thermal conductivity, low thermal expansion, high abrasion resistance, and low chemical reactivity with and high wettability by the extruded melt. Additionally, the high conductivity quench surface may be thinly coated with a high melting ceramic or refractory alloy to improve wear resistance. Other components of the quench wheel may be of any conventional structural alloy, such as a high strength aluminum alloy.

In Fig. 2, a partial cross-section of the quench wheel 17 is shown to illustrate the problem of crowning or thermal-bowing of the quench surface 14. Typically, the hoop-like quench surface 14 is attached to rotating drive disk 15 of the quench wheel 17 by conventional rigid joining means, such as a bolt 21. The quench surface 14 at room temperature is desirably flat, but during operation a substantial temperature gradient is developed between the hot quench surface 14 and the cooler drive disk 15 as molten metal is extruded through nozzle 13 onto quench surface 14 to continuously cast filament 16. Thus, thermal expansion causes the quench surface 15 to crown or bow to the position indicated by dashed line 14A, since the lateral edge of the surface is restrained by the cooler drive disk 15 and bolt 21. As a result, the uniformity of the transverse cross-section of the cast filament 16 is adversely affected.

In Fig. 3, an embodiment of the present invention is applied to the conventional quench wheel 17 and comprises three radial expansion joints 31 connecting quench surface 14 and drive disk 15, instead of conventional rigid joining means 21. Disk 15A may be another drive disk or simply a coolant sealing disk. In concept, the radial expansion joints 31 allow unrestrained radial thermal growth of the quench surface 14 while maintaining concentricity of the quench surface 14 with the shaft of rotation 18 and while providing circumferential support against the torque loads of rotation so that the hot, expanded quench surface does not slip on the underlying drive disk 15 during rotation. In FIG. 3A, a detail of one such radial expansion joint is shown which in essence comprises a radially elongated expansion slot 32 in drive disk 15 having its major axis aligned along the radius of drive disk 15 and laterally receives a close fitting sliding-pin 33. Sliding-pin 33 is affixed to the underside of quench surface 14 and is slidably movable in slot 32 as quench surface 14 undergoes radial thermal expansion. On the other hand, sliding-pin 33 is not free to move circumferentially in slot 32 and thus transmits torque loading from the drive disk 15 to the quench surface 14.

At least three such radial expansion joints 31 are required to maintain concentricity of the hoop-like quench surface 14 with the shaft of rotation 18 during radial thermal growth. Further, the radial expansion joints 31 must be

symmetrically situated on the drive disk 15 to maintain concentricity of the quench surface 14. For example, the three joints 31 are spaced equiangularly (120° intervals) at equal radial distances from the shaft of rotation 18. Practically speaking, due to machining tolerances there will be some small circumferential slack in each radial expansion joint and therefore some correspondingly small circumferential (rotational) slack of the quench surface 14 with respect to the drive disk 15. This rotational slack may be minimized by increasing the number of radial expansion joints beyond the minimum of three that are fundamentally required to maintain concentricity of the quench surface. Based on statistical consideration of tolerances, it is preferred to use six radial expansion joints symmetrically situated as discussed above.

In FIG. 4, a partial cross-section of the quench wheel exposes the lateral details of one embodiment of the radial expansion joint 31. Sliding-pin 33 passes through expansion slot 32 in drive disk 15 and is rigidly received into the underside 41 of quench surface 14. In Fig. 4A, an alternative arrangement of the sliding-pin radial expansion joint is shown wherein the expansion slot 32 is integral to the quench surface 14 and sliding-pin 33 is rigidly received in drive disk 15.

Other embodiments of the radial expansion joint are contemplated in addition to the sliding-pin type. For example, in Fig. 5 a sliding-key type of radial expansion joint is shown. Sliding-key 51 is rigidly secured to the drive disk 15 and is received in expansion groove 52 under quench surface 14. Expansion groove 52 corresponds in shape to sliding-key 51 such that a close fit is obtained. As discussed above, at least three such expansion joints, symmetrically situated, are required to maintain concentricity of the quench surface 14. As in the sliding-pin joint, respective placement of the key and groove may be reversed. Drive disk 15 is shown optionally as supporting quench surface 14 near the center of its underside. Phantom disks 15A are sealing disks for an internal coolant.

Although the present invention has been described in conjunction with preferred embodiments, it is to be understood that modifications and variations may be utilized without departing from the principles and scope of the invention as those skilled in the art will readily understand. Accordingly, such modifications and variations may be practiced within the scope of the following claims:

Claims

1. Apparatus for continuously casting metallic filaments by directing a stream of molten alloy onto a rotating quench surface, comprising a quench wheel (17) having a rotative drive disk (15), about a shaft of rotation (18), concentrically supporting a hoop-like

quench surface (14), characterized in that the apparatus has expansion means (31) for allowing unrestrained radial thermal growth of said quench surface while maintaining its concentricity in a fixed angular relationship with said drive disk (15).

2. Apparatus, as in claim 1, wherein said expansion means further comprise at least three radial expansion joints (31) between said quench surface (14) and said drive disk (15), which are symmetrically situated about the axis of rotation (18).

3. Apparatus, as in claim 2, wherein each said radial expansion joint (31) is a sliding-pin (33) expansion joint.

4. Apparatus, as in claim 2, wherein each said radial expansion joint (31) is a sliding-key (51) expansion joint.

5. Apparatus as in claim 3 or 4, further comprising at least six said expansion joints (31).

6. A method for continuously casting metallic filaments by directing a stream of molten alloy onto a hoop-like quench surface (14) of a rotating quench wheel (17), characterized in that unrestrained radial thermal growth of said quench surface (14) is allowed while maintaining its concentricity in a fixed angular relationship with said rotating quench wheel (17).

7. A method, as in claim 6, wherein said filament is a glassy alloy strip.

Patentansprüche

1. Vorrichtung zum kontinuierlichen Gießen von Metallfäden durch Richten eines Stromes geschmolzener Legierung auf eine sich drehende Kühlfläche, mit einem Kühlrad (17) mit einer um eine Rotationsachse (18) rotierenden Antriebsscheibe (15), die konzentrisch eine reifenartige Kühlfläche (14) trägt, dadurch gekennzeichnet, daß die Vorrichtung Ausdehnungseinrichtungen (31) besitzt, die eine uneingeschränkte radiale Wärmeausdehnung der Kühlfläche gestatten, während ihre Konzentrität in einem feststehenden Winkelverhältnis zu der Antriebsscheibe (15) aufrecht erhalten wird.

2. Vorrichtung nach Anspruch 1, worin die Ausdehnungseinrichtung wenigstens drei radiale Ausdehnungsverbindungen (31) zwischen der Kühlfläche (14) und der Antriebsscheibe (15) hat, welche symmetrisch um die Rotationsachse (18) herum angeordnet sind.

3. Vorrichtung nach Anspruch 2, worin jede der radialen Ausdehnungsverbindungen (31) eine Gleitbolzen-Ausdehnungsverbindung (33) ist.

4. Vorrichtung nach Anspruch 2, worin jede

der radialen Ausdehnungsverbindung (31) eine Gleitfeder-Ausdehnungsverbindung (51) ist.

5. Vorrichtung nach Anspruch 3 oder 4 die weiterhin wenigstens sechs der Ausdehnungsverbindungen (31) besitzt.

6. Verfahren zum kontinuierlichen Gießen von Metallfäden durch Richten eines Stromes von geschmolzener Legierung auf eine reifenartige Kühlfläche (14) eines rotierenden Kühlrades (17), dadurch gekennzeichnet, daß man eine uneingeschränkte radiale Wärmeausdehnung der Kühlfläche (14) gestattet, während man ihre Konzentrität in einem feststehenden Winkelverhältnis zu dem rotierenden Kühlrad (17) aufrechterhält.

7. Verfahren nach Anspruch 6, worin der Faden ein glasartiger Legierungsstreifen ist.

Revendications

1. Appareil de coulée continue de filaments métalliques par envoi d'un courant d'alliage fondu sur une surface tournante de trempe, comprenant une roue de trempe (17) comportant un disque tournant d'entraînement (15) monté sur un arbre de rotation (18), supportant concentriquement une surface de trempe en forme d'anneau (14), caractérisé par le fait qu'il comporte des moyens d'expansion (31) permettant la libre dilatation thermique radiale de la surface de trempe tout en maintenant sa concentricité dans une position angulaire relative fixe avec le disque d'entraînement (15).

2. Appareil selon la revendication 1, dans lequel les moyens de dilatation comprennent au moins trois joints d'expansion radial (31) placés entre la surface de trempe (14) et le disque d'entraînement et disposés symétriquement autour de l'axe de rotation (18).

3. Appareil selon la revendication 2, dans lequel chaque joint d'expansion radiale (31) est un joint d'expansion à tenon coulissant (33).

4. Appareil selon la revendication 2, dans lequel chaque joint d'expansion radiale (31) est un joint d'expansion à clavette coulissante (51).

5. Appareil selon l'une des revendications 3 et 4, comportant au moins six joints d'expansion (31).

6. Procédé de coulée continue de filaments métalliques par envoi d'un courant d'alliage fondu sur une surface de trempe en forme d'anneau (14) d'une roue tournante de trempe (17), caractérisé par le fait qu'on permet la libre dilatation thermique radiale de la surface de trempe (14) tout en maintenant sa concentricité dans une position angulaire relative fixe avec la roue tournante de trempe (17).

7. Procédé selon la revendication 6, dans lequel le filament est un ruban d'alliage vitreux.

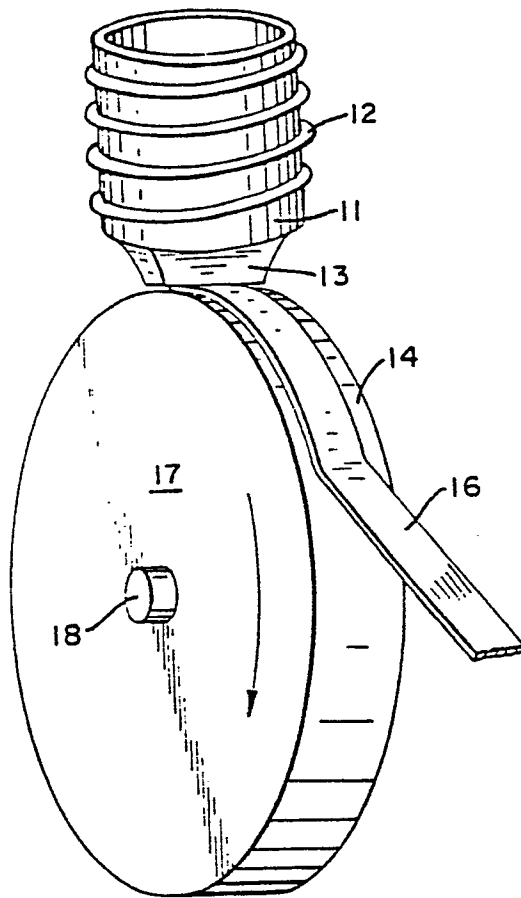


FIG. 1

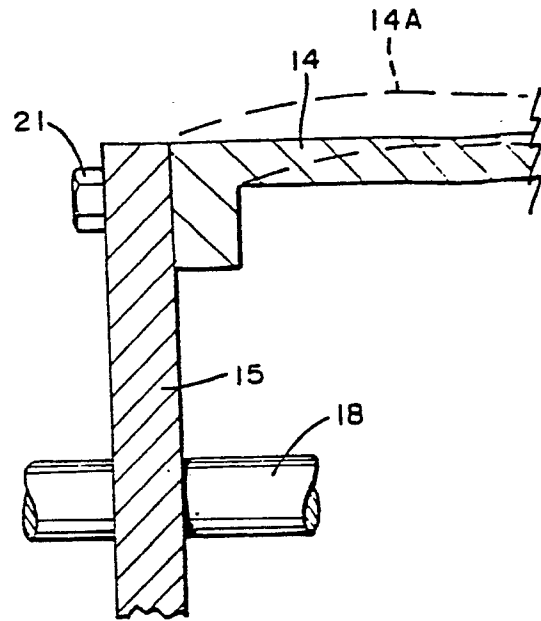


FIG. 2

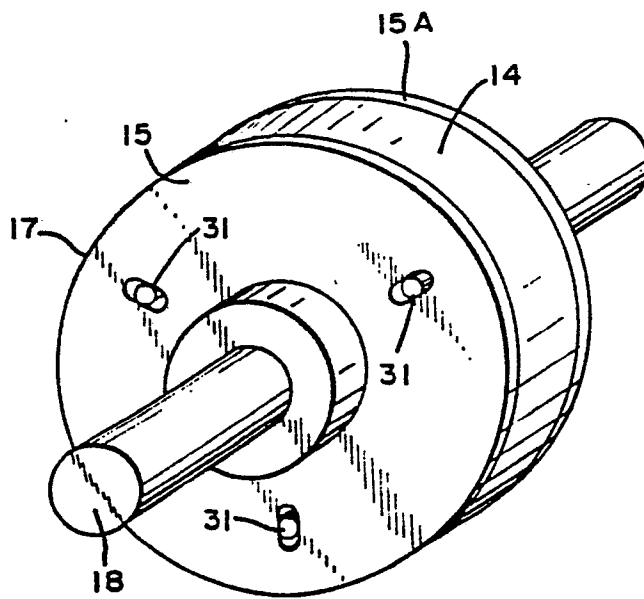


FIG. 3




FIG. 3A

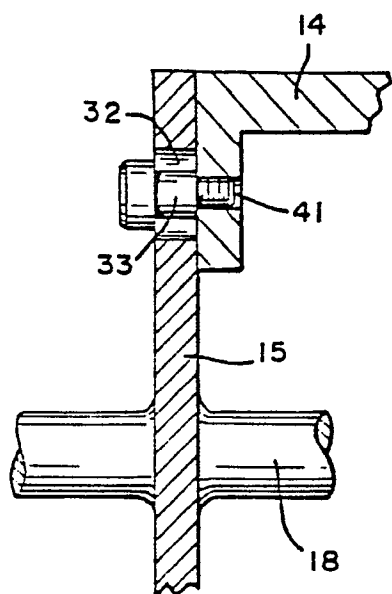


FIG. 4

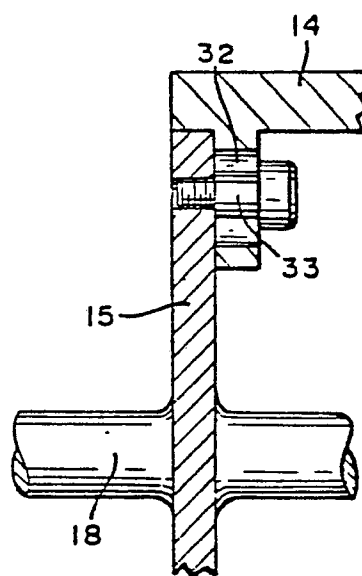


FIG. 4A

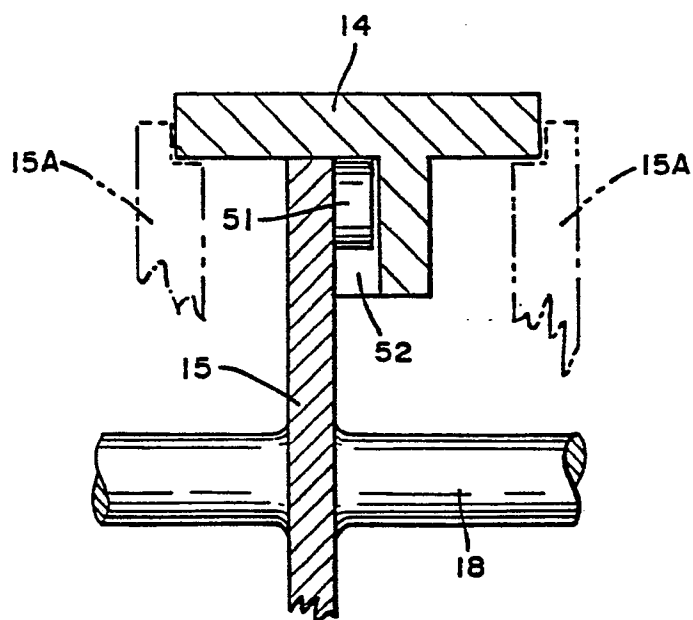


FIG. 5