



(51) International Patent Classification:
B64D 17/54 (2006.01)

(21) International Application Number:
PCT/US2010/061515

(22) International Filing Date:
21 December 2010 (21.12.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/644,717 22 December 2009 (22.12.2009) US

(71) Applicant (for all designated States except US): **BAE SYSTEMS INFORMATION AND ELECTRONIC SYSTEMS INTEGRATION INC.** [US/US]; PO Box 868, NHQ1-719, Nashua, NH 03061-0868 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MILLER, Richard, D.** [US/US]; 219 London Street, Manchester, NH 03104

(US). **GORMLEY, Edward, A.** [US/US]; 191 Joe English Road, New Boston, NH 03070 (US).

(74) Agent: **LONG, Daniel, J.**; BAE SYSTEMS INFORMATION AND ELECTRONIC SYSTEMS INTEGRATION INC., PO Box 868, Nhq1-719, Nashua, NH 03061-0868 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,

[Continued on next page]

(54) Title: FORCE DECAY RELEASE MECHANISM

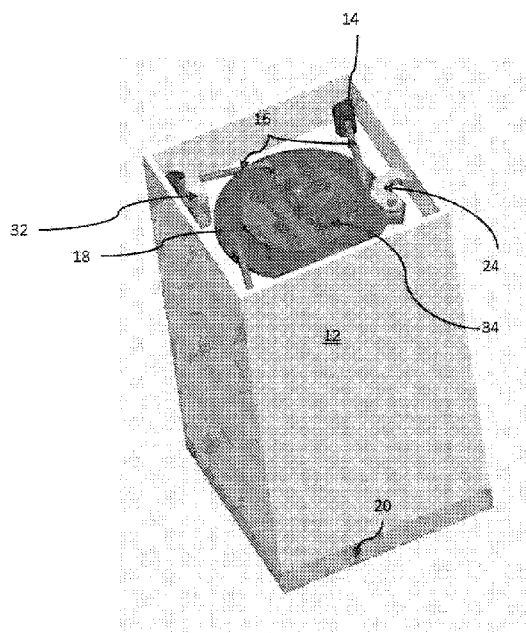


Fig. 1

(57) Abstract: A system is provided for the force decay triggered release of a device, the system comprising: a base; a plurality of retention rods extending from the base; a rotationally movable actuator, to which a linear force is configured to be applied, converting the linear force to a rotational force; a plurality of retention pins, the retention pins being coupled to the actuator, and each the pin being removably disposed with in a retention rod of the plurality of retention rods, such that a rotation of the actuator withdraw each the pin from respective the rod; a force triggered detent, the detent allowing the rotation of the actuator when the rotational force exceeds a threshold level.



ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

FORCE DECAY RELEASE MECHANISM

Inventors:
Richard D. Miller, Jr.
Edward A. Gormley

FIELD OF THE INVENTION

[0001] The invention relates to release mechanisms, and more particularly, to a mechanical trigger actuated by force decay.

BACKGROUND OF THE INVENTION

[0002] In devices that are deployed from high speed which require slowing by parachute, such as missile countermeasures or the parachutes of race cars, known systems for deploying such parachutes employ pyrotechnic devices to time and deploy parachute at a desired time.

[0003] Such systems pose health and safety hazards to workers and users as they are charged with explosive and potentially toxic material. Such devices are also prone to failure due to limited long storage before deployment, battery failure or voltage drop preventing firing of the pyrotechnic.

[0004] What is needed, therefore, are shelf stable techniques for releasing parachutes and similar devices at desired times.

SUMMARY OF THE INVENTION

[0005] One embodiment of the present invention provides a system for the force decay triggered release of a device, the system comprising: a base; a plurality of retention rods extending from the base; a rotationally movable actuator, to which a linear force is configured to be applied, converting the linear force to a rotational force; a plurality of retention pins, the retention pins being coupled to the actuator, and each the pin being removably disposed within a retention rod of the plurality of retention rods, such that a rotation of the actuator withdraw each the pin from respective the rod; a force triggered detent, the detent allowing the rotation of the actuator when the rotational force exceeds a threshold level.

[0006] Another embodiment of the present invention provides such a system wherein the actuator comprises an axially mounted disk having the retention pins tangentially mounted at a periphery thereof.

[0007] A further embodiment of the present invention provides such a system wherein the pins are spring steel.

[0008] Yet another embodiment of the present invention provides such a system wherein the retention rods are configured to separate from the base upon release of the pins.

[0009] A yet further embodiment of the present invention provides such a system wherein the actuator is configured in a plane orthogonal to the retention rods.

[0010] Even another embodiment of the present invention provides such a system further comprising cable guides disposed in the actuator, through which passes a cable to which the linear force is applied.

[0011] An even further embodiment of the present invention provides such a system wherein the detent is a spring loaded catch pawl.

[0012] Still another embodiment of the present invention provides such a system further comprising a housing, the housing being configured to be removed from the base when the retention pins are withdrawn from the retention rods.

[0013] A still further embodiment of the present invention provides such a system wherein the retention rods detachably couple the housing to the base.

[0014] Still yet another embodiment of the present invention provides such a system wherein the retention rods detach from the base in the absence of the housing.

[0015] One embodiment of the present invention provides a force decay trigger, the trigger comprising: a force loaded rotational member; at least one detent coupled to the rotational member, the detent being removably coupled to a trigger frame, such that when a rotational force is applied to the rotational member, the detent is removed from the trigger frame and the trigger frame is released.

[0016] Another embodiment of the present invention provides such a trigger wherein the trigger frame comprises at least one rod coupled to a trigger base.

[0017] A further embodiment of the present invention provides such a trigger, further comprising a cord by which a linear force is applied to the rotational member, the linear force being converted by the rotational member to the rotational force.

[0018] Yet another embodiment of the present invention provides such a trigger wherein the cord comprises a cord selected from the group of cords consisting of chains, cables, wires, ropes, or woven cords.

[0019] A yet further embodiment of the present invention provides such a trigger wherein the rotational member further comprises at least one cord guide, such that the linear force is converted to the rotational force.

[0020] Even another embodiment of the present invention provides such a trigger wherein the trigger frame comprises a plurality of rods extending from a trigger base to a detachable housing, the housing supporting the rotational member.

[0021] An even further embodiment of the present invention provides such a trigger wherein the at least one detent is a plurality of detents, wherein each the detent of the plurality of detents is removably coupled to at least one rod of the plurality of rods.

[0022] Still another embodiment of the present invention provides such a trigger further comprising a rotation resistance member, said rotation resistance member resisting rotation of said rotational member until the rotational force exceeds a threshold force.

[0023] A still further embodiment of the present invention provides such a trigger wherein said threshold force is provided by a spring bias on the rotation resistance member.

[0024] The features and advantages described herein are not all-inclusive and, in particular, many additional features and advantages will be apparent to one of ordinary skill in the art in view of the drawings, specification, and claims. Moreover, it should be noted that the language used in the specification has been principally selected for readability and instructional purposes, and not to limit the scope of the inventive subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] **Figure 1** is a perspective drawing illustrating a force decay release mechanism configured in accordance with one embodiment of the present invention.

[0026] **Figure 2** is an exploded perspective drawing illustrating a force decay release mechanism configured in accordance with one embodiment of the present invention.

[0027] **Figure 3** is a perspective drawing illustrating a force delay release mechanism in a released position and configured in accordance with one embodiment of the present invention.

[0028] **Figure 4** is a schematic drawing illustrating a force decay release mechanism configured in accordance with one embodiment of the present invention.

[0029] **Figure 5** is an elevation view of a retaining rod assembly of a force decay release mechanism configured in accord with one embodiment of the present invention.

[0030] **Figure 6** is a diagram of a force decay curve of a parachute release to which a release mechanism such as one embodiment of the present invention may be applied.

DETAILED DESCRIPTION

[0031] As illustrated in **Figure 1** an assembly configured according to one embodiment of the present invention comprises a housing 12 through which extend retention rods 14, the retention rods 14 being engaged in an unreleased stage by corresponding retention pins 16 disposed in a base 28. The retention pins 16 disposed within an actuation plate 18 are configured to secure the housing 12 to a base 20 by interlocking with the retention rods 14. Rotation of the actuation plate 18 removes the pins 16, allowing the housing 12 to be pulled free of the rods 14. Such a release is illustrated in **Figure 4**. The actuation plate 18 is configured to be rotated by a force applied by a cable or cord 30 disposed about a series of cable guides 32. In one embodiment, the rotation imparted to the actuation plate by the cable or cord may be about an axis parallel to the axes of the rods 14. In one such embodiment it may be applied via a central cap 34. Alternative embodiments may have the orientation of the actuation plate in a different position, for example, where the orientation of the axis is orthogonal to the axes of the rods.

[0032] An exploded view of one embodiment of the present invention is shown in **Figure 2**. In such an embodiment, initially, a torsion spring 22 provides a preload on a spring loaded catch pawl 24 (also illustrated in **Figure 3**) that, when the device is loaded is latched to a pawl retention pin 26. The catch 24 prevents rotation of the disk until a sufficient overcoming force is applied via a cable or line 30. Once the force of the Actuation Disk torsion (in one embodiment provided by a spring 38) has been overcome, the spring loaded catch pawl 24 is free to disengage the pin. As the force resisting rotation of the disk decays, the disk is allowed to rotate. As illustrated in **Figure 5**, the minimum rotational force is set such that the four retaining pins 16 disengage the retaining posts 14 at which time, the entire housing 12 is extracted by

the remaining excess force, and subsequent actions or processes take place and inherent to the payload assembly.

[0033] In one embodiment of the present invention, the retaining rods 14 are configured to release from the base 20 upon removal of the housing 12. In such an embodiment, the removal of the housing 12 releases tension on the rods 14, thereby permitting the rods to be removed from the base 28, decreasing chances that the residual rods would catch or inhibit the operation of the post release mechanism.

[0034] In one embodiment of the present invention the housing may be configured from a suitable durable material, including but not limited to plastic, resin, machined, composite materials, stamped or died metals and metal alloys. Rods 14 may be configured from metals or composite material or such other material as is suitable for connecting the base with the housing, even under the forces imposed by the various applications in which such a release mechanism may be employed. Examples of suitable material include composites, plastics, metals, and ceramics.

[0035] As illustrated in **Figure 5**, in one embodiment of the invention, a washer 44 may be disposed about the retention rod 14 between the retention pin 16 and the housing 12. The withdrawal of the retention pin 16 allows the rods 14 to be withdrawn and the housing to detach from the base. In such a situation, the rods 14 may simply fall from the base so as to not extend from the base after the release of the housing 12.

[0036] As illustrated in **Figure 6**, the graph of acceleration over time of a device delivered by such a release mechanism. As can be inferred from the graph, the forces applied to the device during deployment, create an effecting time release curve, resulting in deployment at, in this embodiment, about 9.5 seconds.

[0037] The foregoing description of the embodiments of the invention has been presented for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed. Many modifications and variations are possible in light of this disclosure. It is intended that the scope of the invention be limited not by this detailed description, but rather by the claims appended hereto.

CLAIMS

What is claimed is:

- 1 1. A system for the force decay triggered release of a device, the
2 system comprising:
3 a base;
4 a plurality of retention rods extending from said base;
5 a rotationally movable actuator, to which a linear force is configured
6 to be applied, converting said linear force to a rotational force;
7 a plurality of retention pins, said retention pins being coupled to said
8 actuator, and each said pin being removably disposed within a
9 retention rod of said plurality of retention rods, such that a
10 rotation of said actuator withdraw each said pin from
11 respective said rod;
12 a force triggered detent, said detent allowing the rotation of said
13 actuator when said rotational force exceeds a threshold level.
- 1 2. The system of claim 1 wherein said actuator comprises an
2 axially mounted disk having said retention pins tangentially mounted at a
3 periphery thereof.
- 1 3. The system according to claim 1 wherein said pins are spring
2 steel.
- 1 4. The system according to claim 1 wherein said retention rods are
2 configured to separate from said base upon release of said
3 pins.
- 1 5. The system according to claim 1 wherein said actuator is
2 configured in a plane orthogonal to said retention rods.
- 1 6. The system according to claim 1 further comprising cable guides
2 disposed in said actuator, through which passes a cable to
3 which said linear force is applied.

- 1 7. The system according to claim 1 wherein said detent is a spring
2 loaded catch pawl.
- 1 8. The system according to claim 1 further comprising a housing,
2 said housing being configured to be removed from said base
3 when said retention pins are withdrawn from said retention
4 rods.
- 1 9. The system according to claim 8 said system wherein said
2 retention rods detachably couple said housing to said base.
- 1 10. The system according to claim 8 wherein said retention rods
2 detach from said base in the absence of said housing.
- 1 11. A force decay trigger, said trigger comprising:
2 a force loaded rotational member;
3 at least one detent coupled to said rotational member, said detent
4 being removably coupled to a trigger frame, such that when a
5 rotational force is applied to said rotational member, said
6 detent is removed from said trigger frame and said trigger
7 frame is released.
- 1 12. The trigger of claim 11, wherein said trigger frame comprises at
2 least one rod coupled to a trigger base.
- 1 13. The trigger of claim 11, further comprising a cord by which a
2 linear force is applied to said rotational member, said linear
3 force being converted by said rotational member to said
4 rotational force.
- 1 14. The trigger of claim 13 wherein said cord comprises a cord
2 selected from the group of cords consisting of chains, cables,
3 wires, ropes, or woven cords.
- 1 15. The trigger of claim 13 wherein said rotational member further
2 comprises at least one cord guide, such that said linear force is
3 converted to said rotational force.

- 1 16. The trigger according to claim 11, wherein said trigger frame
2 comprises a plurality of rods extending from a trigger base to a
3 detachable housing, said housing supporting said rotational
4 member.
- 1 17. The trigger according to claim 16, wherein said at least one
2 detent is a plurality of detents, wherein each said detent of
3 said plurality of detents is removably coupled to at least one
4 rod of said plurality of rods.
- 1 18. The trigger according to claim 11 further comprising a rotation
2 resistance member, said rotation resistance member resisting
3 rotation of said rotational member until said rotational force
4 exceeds a threshold force.
- 1 19. The trigger according to claim 19 wherein said threshold force
2 is provided by a spring bias on said rotation resistance
3 member.

1/6

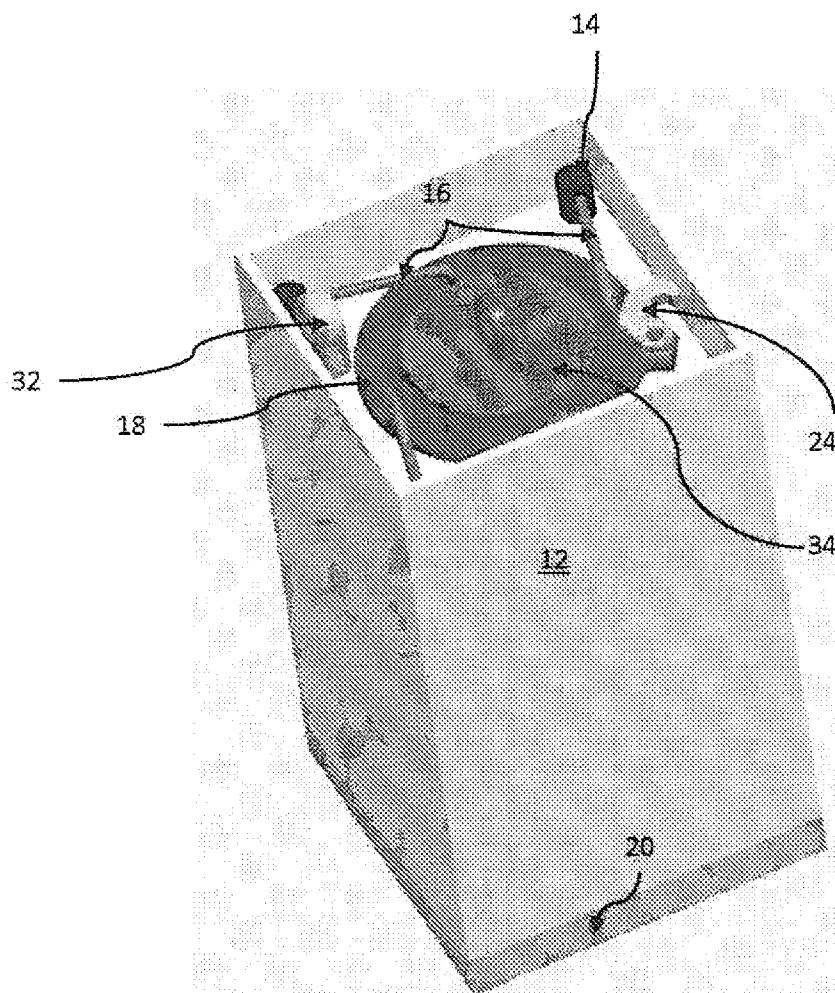


Fig. 1

2/6

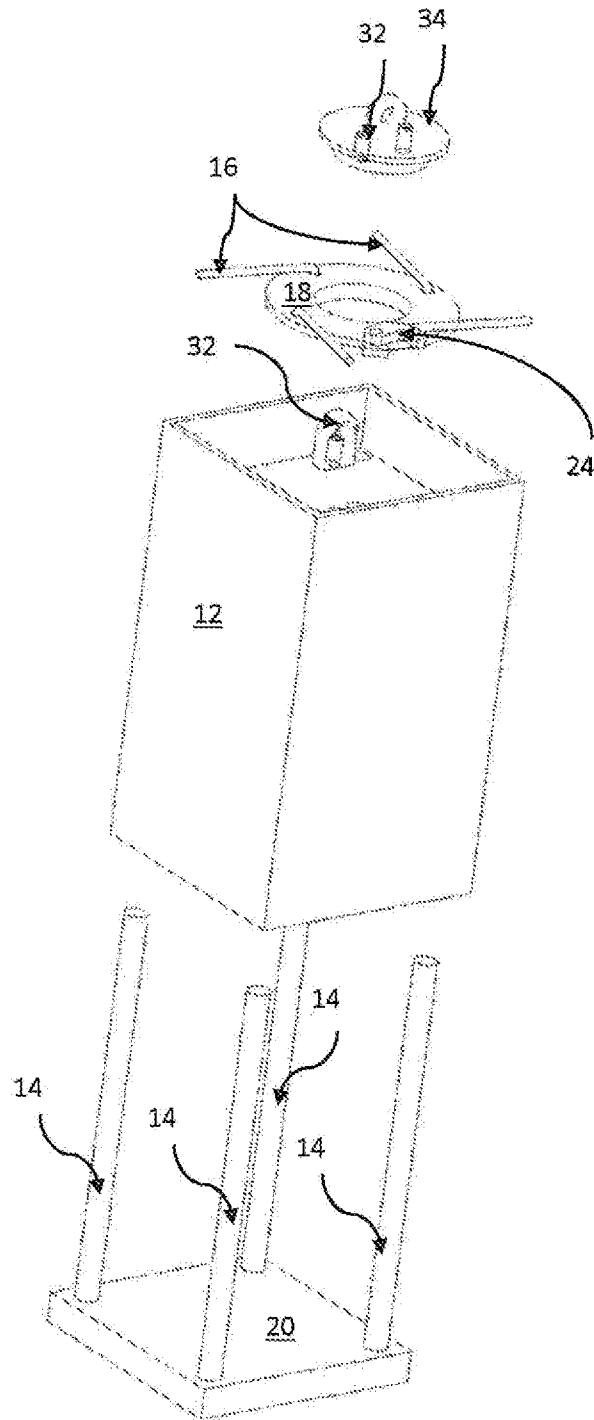


Fig. 2

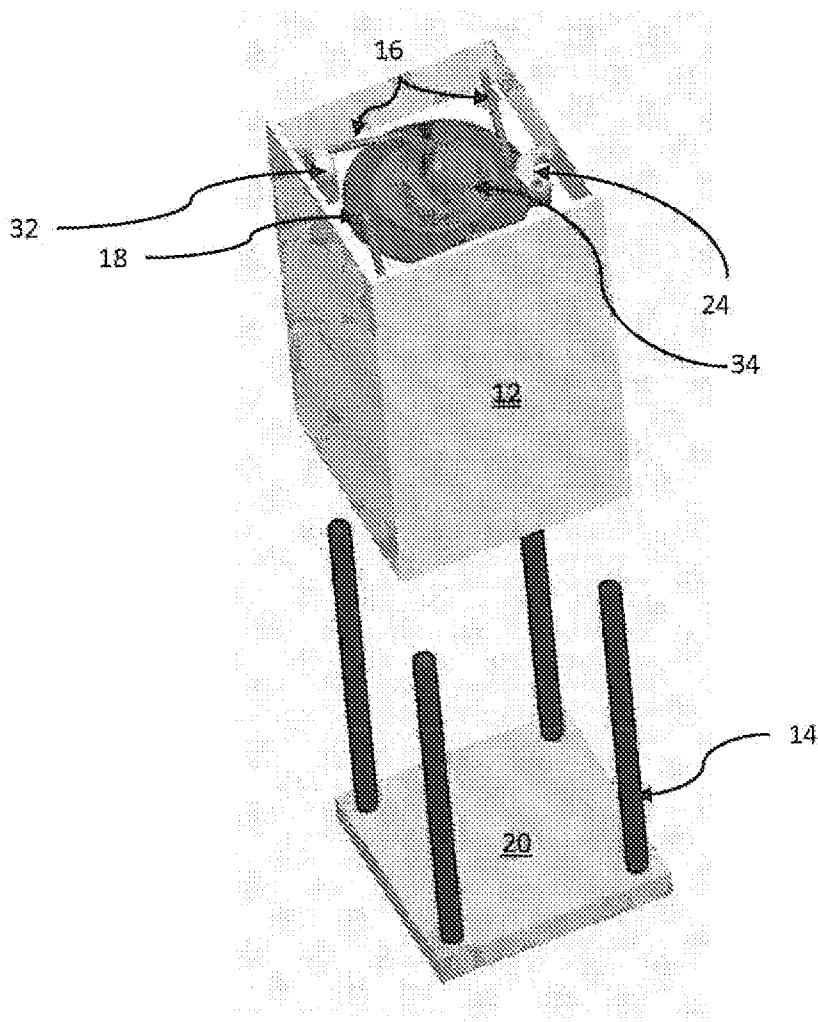


Fig. 3

4/6

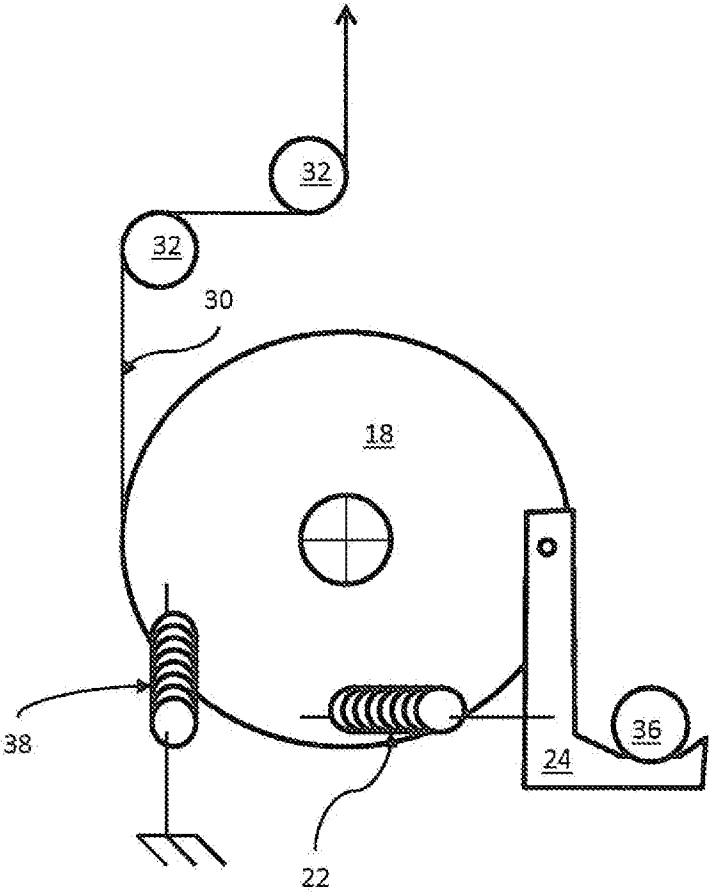


Fig. 4

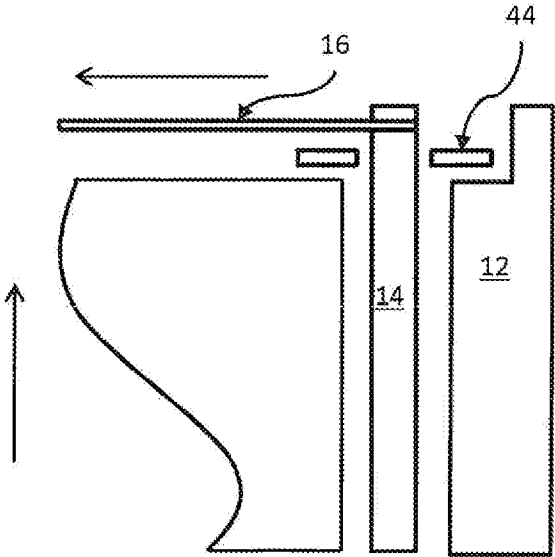


Fig. 5

6/6

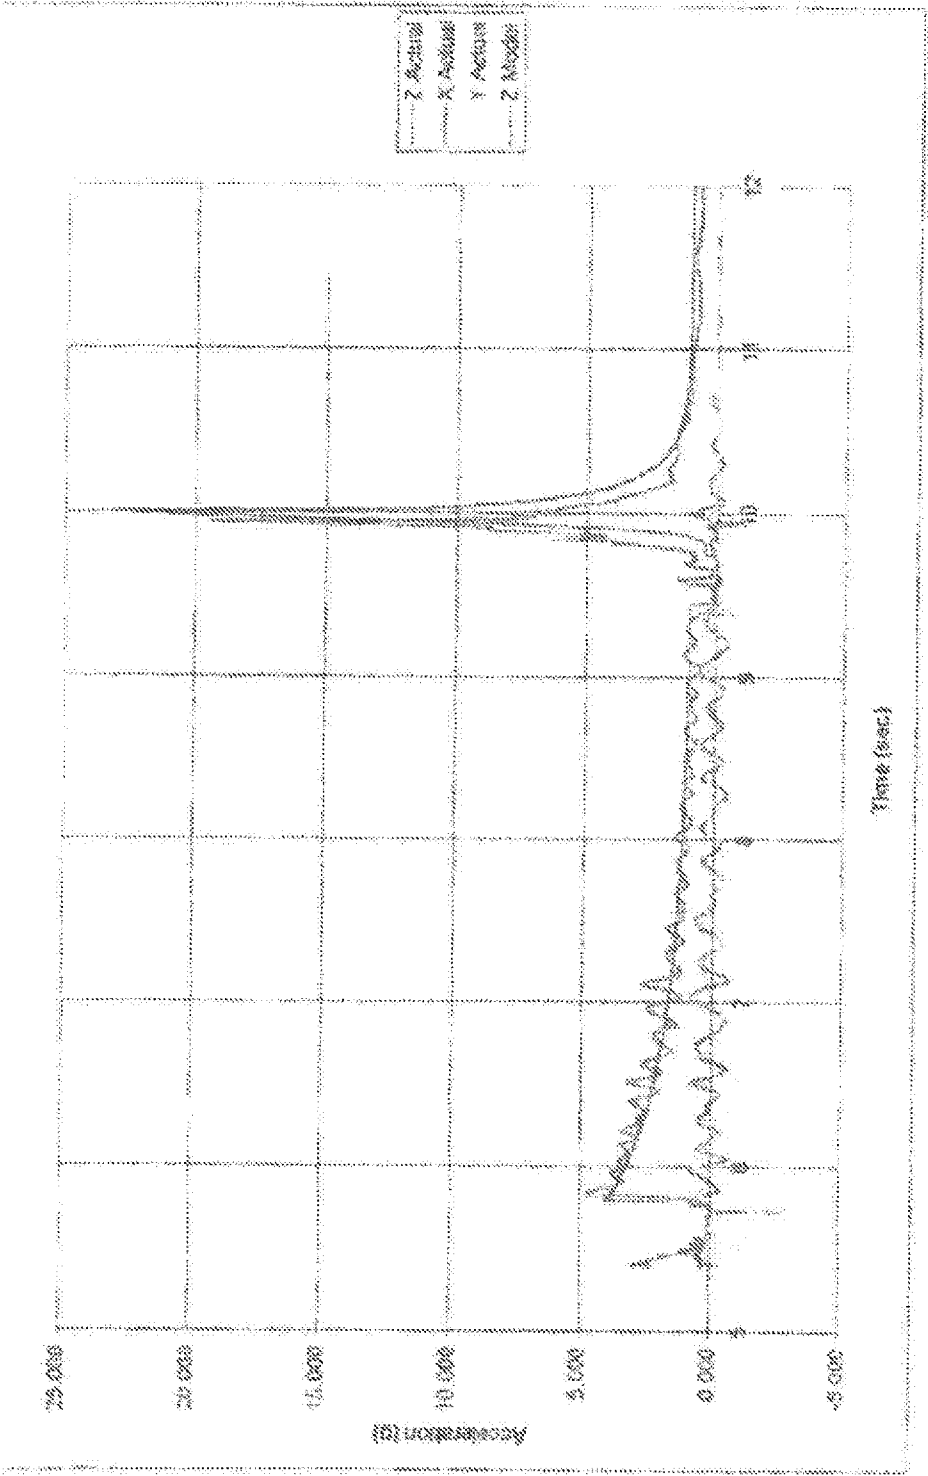


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 10/61515

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - B64D 17/54 (2011.01)

USPC - 244/149

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - B64D 17/54 (2011.01)

USPC - 244/149

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

IPC(8) - B64D 17/54 (2011.01) (text search)

USPC - 244/147-152 (text search)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWEST (USPT, PGPB, EPAB, JPAB); Internet search via Google Web and Google Scholar search engines. Search terms used: parachute force decay triggered trigger release device base plurality retention rod actuator linear pin detent exceed threshold perpendicular orthogonal spring steel catch pawl cord guide bias

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2001/0035637 A1 (THOMAS et al.) 01 November 2001 (01.11.2001), Entire document, especially Fig. 1A, 1B, 1C, 5B, 5E, 8P, 8Q, 11; Para [0070], [0092], [0095], [0105], [0111].	1-19
Y	US 4,028,948 A (FROST et al.) 14 June 1977 (14.06.1977), Entire document, especially Fig. 5-7, 8; col 7, ln 51-66; col 8, ln 4-15; col 8, ln 46-52.	1-19
Y	US 4,783,027 A (JONES) 08 November 1988 (08.11.1988), Entire document, especially Fig. 3, 4, 25; col 6, ln 65 - col 7, ln 2; col 17, ln 17-28.	9, 13-15
Y	US 2,436,177 A (QUILTER) 17 February 1948 (17.02.1948), Entire document, especially Fig. 2; col 2, ln 13-19.	3
A	US 2004/0145972 A1 (GARTSBEYN) 29 July 2004 (29.07.2004), Entire document.	1-19
A	US 3,584,581 A (FLATAU et al.) 15 June 1971 (15.06.1971), Entire document.	1-19

☐ Further documents are listed in the continuation of Box C.


* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 February 2011 (21.02.2011)

Date of mailing of the international search report

07 MAR 2011

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774